

APPLICANT: MOTOROLA MOBILITY, INC

FCC ID: IHDT56NH2



**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 24965-1 Supplement

Report Date – 2012-04-13

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Engineer

Test: 2012-03-20 to 2012-04-13

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2012-04-17

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 402854

IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ

ISO/IEC-17025:2005 accredited by UKAS



UKAS Certificate Number: 2404

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

APPLICANT: MOTOROLA MOBILITY, INC

FCC ID: IHDT56NH2

Test Report Details

Tests Performed By: Motorola (Beijing) Mobility Technologies Co., Ltd.
Asia Global Compliance Labs
No.1 Wang Jing East Road
Chao Yang District
Beijing, 100102, P. R. China
Phone: +86 10 8499 5891
FCC Registration Number: 402854
IC Registration Number: 109AW-1

Tests Requested By: Motorola Mobility Inc.
No. 1 Wang Jing East Road
Chao Yang District
Beijing, 100102, P. R. China

Product Type: Cell phone

Signaling Capability: GSM850/1900, EDGE850/1900, CDMA 850/1900, EVDO, Bluetooth, 802.11b/802.11g/802.11n

HEX: A000002C98F7E8

FCC ID: IHDT56NH2

Project number: 24965-1

Testing Complete Date: 2012-04-13

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47:

X Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI C63.4-2003, RSS-Gen Issue 2

Summary of Testing

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged embedded battery.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4-2003 Standard requirements during the entire duration of testing.

Equipment List

Through the test, the EUT was installed in an evaluation board.

Equipment	Model/type	Serial number	Operational range	Date of calibration
EMI analyzers	ESU 40	100036	20 Hz – 40 GHz	11.11.2011
Pre Amplifiers	PA-02-0001:	2007343	(10 kHz – 3 GHz)	07.04.2011
	PA-02-218	2007344	3 GHz – 18 GHz	07.04.2011
	PA-02-5	2007345	18 GHz – 40 GHz	07.04.2011
Radio com. Tester	CMU 200	112790	GSM 850/900/1800/1900 UMTS, CDMA, Bluetooth	N/A
Band Reject Filter	WRCD	N/A	GSM 850/900/1800/1900 UMTS, CDMA	N/A
	4N45-24241/3/6	N/A	WLAN	N/A
EMI analyzers	R&S ESCI	100650	9 kHz – 3 GHz	03.14.2012
LISN	ENV216	100375	9 kHz – 30 MHz	12.19.2010

The antennas used in the various tests are listed in the below table.

Antenna	Type	Serial number	Operational range	Date of calibration
Hybrid-log periodic	TDK HLP 3003C	130408	30 MHz – 3 GHz	11.11.2011
Double ridged Horn	TDK HRN0118	130376	1 GHz – 18 GHz	01.22.2011
Double ridged Horn	ETS HRN3116	00071938	18 GHz – 40 GHz	07.13.2011
Active Loop Antenna	FMZB1513	1513-105	9 kHz – 30 MHz	04.01.2012

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list. The LISN is on a two-year calibration cycle. The antennas are on a three-year calibration cycle. All other equipments are on a one-year calibration cycle.

The Dell D620 Laptop Computer, D-Link DI-624+A Router and the Sony D-600 L Camera are labeled as DoC.

Measurement Procedures and Data

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a Styrofoam table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (3/m)}$$

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Additional EUT information:

Processor Speed --- 1.2GHz
Xtal – 26MHz
TCXO – 26 MHz
Memory Size – 1024M LPDDR2 SDRAM, 4GB eMMC.
Video Resolution – 960x540 (qHD)
Video Clock : Max 200 MHz
Refresh rate – 60Hz

Measurement Results

Operating Mode – Rx Mode

Notes: Worst Case emissions reported.

Radiated emissions were measured from 9kHz to 30MHz and all emissions were 20 dB below the limit.

30 MHz – 1000 MHz

Freq (MHz)	(QP) EMI (dB μ V/m)	(1) Limit (dB μ V/m)	(QP) Margin Lim1 (dB)	Twr Ht (cm)	Pol	Ttbl Agl (deg)
275.04	22.21	46.00	-23.79	173.00	V	140.10
300.00	26.25	46.00	-19.75	195.00	V	155.30
336.00	34.90	46.00	-11.10	149.00	V	124.20
400.02	37.17	46.00	-8.83	225.00	H	127.10
400.02	35.33	46.00	-10.67	146.00	V	262.30
432.18	33.77	46.00	-12.23	100.00	H	151.20
432.96	25.05	46.00	-20.95	142.00	V	314.80
499.98	36.33	46.00	-9.67	202.00	H	258.20
499.98	33.31	46.00	-12.69	140.00	V	167.10
666.72	26.49	46.00	-19.51	117.00	H	129.20
666.72	29.15	46.00	-16.85	188.00	V	336.70
800.04	34.74	46.00	-11.26	100.00	H	106.10
933.36	28.54	46.00	-17.46	181.00	H	271.20

Above 1 GHz

Radiated emissions were measured from 1 GHz to 6 GHz and all emissions were 20dB below the limit.

AC LINE CONDUCTED EMISSIONS

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50Ω LISN port, where permitted, terminated into a 50Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50Ω measuring port is terminated by a 50Ω radio-noise meter or a 50Ω resistive load. All other ports are terminated in 50Ω .

Detectors - Peak and Average Detector

Test Setup


The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results


See attached:

APPLICANT: MOTOROLA MOBILITY, INC

FCC ID: IHDT56NH2

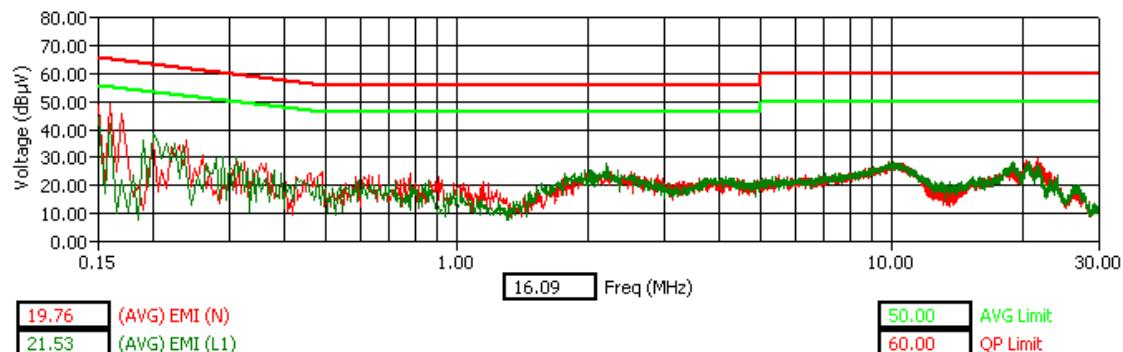

AC LINE COMPUTER PERIPHERAL - Tx Mode – Average Detector

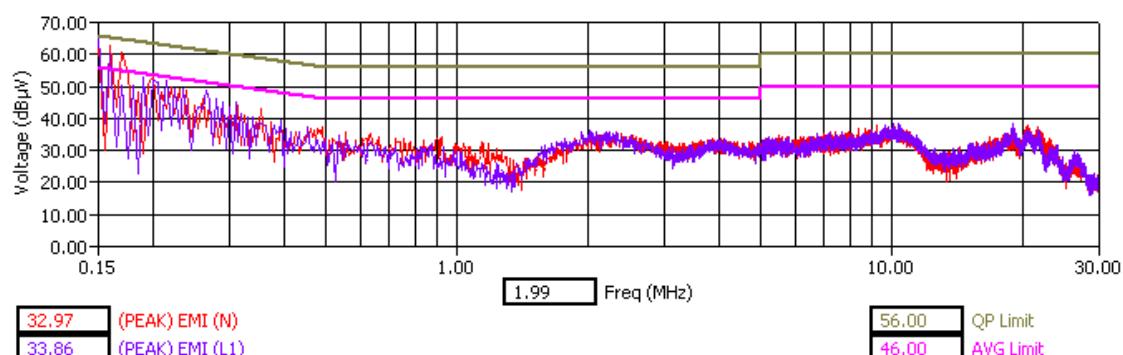

AC LINE COMPUTER PERIPHERAL - Tx Mode – Peak Detector

End of Test Report