


# FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola Mobility, LLC  
MODEL NAME : 3606  
FCC ID : IHDT56QA3  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

1. Statement of Compliance .....	4
2. Administration Data .....	5
3. Guidance Standard .....	5
4. Equipment Under Test (EUT) .....	6
4.1 General Information .....	6
4.2 Maximum Tune-up Limit.....	7
4.3 General LTE SAR Test and Reporting Considerations.....	8
5. RF Exposure Limits.....	10
5.1 Uncontrolled Environment.....	10
5.2 Controlled Environment.....	10
6. Specific Absorption Rate (SAR).....	11
6.1 Introduction .....	11
6.2 SAR Definition.....	11
7. System Description and Setup .....	12
8. Measurement Procedures .....	13
8.1 Spatial Peak SAR Evaluation.....	13
8.2 Power Reference Measurement.....	14
8.3 Area Scan .....	14
8.4 Zoom Scan.....	15
8.5 Volume Scan Procedures.....	15
8.6 Power Drift Monitoring.....	15
9. Test Equipment List.....	16
10. System Verification .....	17
10.1 Tissue Verification .....	17
10.2 System Performance Check Results.....	19
11. RF Exposure Positions .....	20
11.1 Ear and handset reference point .....	20
11.2 Definition of the cheek position.....	21
11.3 Definition of the tilt position.....	22
11.4 Body Worn Accessory .....	23
11.5 Wireless Router.....	23
12. Conducted RF Output Power (Unit: dBm).....	24
13. Antenna Location .....	48
14. SAR Test Results .....	49
14.1 Head SAR .....	50
14.2 Wireless Router SAR .....	54
14.3 Body Worn Accessory SAR.....	57
14.4 Repeated SAR Measurement .....	61
15. Simultaneous Transmission Analysis.....	62
15.1 Head Exposure Conditions .....	63
15.2 Wireless Router Exposure Conditions.....	67
15.3 Body-Worn Accessory Exposure Conditions .....	71
15.4 SPLSR Evaluation and Analysis.....	73
16. Uncertainty Assessment .....	82
17. References.....	84
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

## Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA453017A	Rev. 01	Initial issue of report	Jul. 18, 2014
FA453017A	Rev. 02	Additional FCC request test channel.	Jul. 27, 2014
FA453017A	Rev. 03	In section15.1 page63 and page65, corrected WCDMA IV left check SAR value.	Aug. 06, 2014
FA453017A	Rev. 04	In section14.2 and 14.3, added TDD LTE B41 other channel testing.	Aug. 22, 2014
FA453017A	Rev. 05	Added FCC second request testing channels	Sep. 02, 2014

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility, LLC, Mobile Cellular Phone, 3606**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			
		Head (Separation 0mm) 1g SAR (W/kg)	Body-worn (Separation 15mm) 1g SAR (W/kg)	Wireless Router (Separation 10mm) 1g SAR (W/kg)	Highest Simultaneous Transmission 1g SAR (W/kg)
PCE	GSM850	0.56	0.53	0.64	1.56
	GSM1900	0.34	0.90	0.65	
	WCDMA Band V	0.48	0.58	0.80	
	WCDMA Band IV	0.47	0.75	0.64	
	WCDMA Band II	0.51	1.16	0.80	
	CDMA 2000 BC10	0.54	0.68	0.80	
	CDMA 2000 BC0	0.62	0.64	0.66	
	CDMA 2000 BC1	0.76	1.50	0.76	
	LTE Band 12	0.46	0.51	0.68	
	LTE Band 17	0.43	0.51	0.72	
	LTE Band 5	0.44	0.46	0.65	
	LTE Band 26	0.47	0.54	0.67	
	LTE Band 4	0.38	0.52	0.69	
	LTE Band 2	0.56	1.18	0.83	
	LTE Band 25	0.48	1.19	0.84	
	LTE Band 41	0.41	0.79	0.64	
Date of Testing:		06/17/2014 ~ 09/01/2014			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

## **2. Administration Data**

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

Manufacturer	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

## **3. Guidance Standard**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

## 4. Equipment Under Test (EUT)

### 4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola Mobility, LLC
Model Name	3606
FCC ID	IHDT56QA3
IMEI Code	990004980029072
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC10: 817.9 MHz ~ 822.9 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	<ul style="list-style-type: none"> <li>• GSM/GPRS/EGPRS</li> <li>• RMC/AMR 12.2Kbps</li> <li>• HSDPA</li> <li>• HSUPA</li> <li>• DC-HSDPA</li> <li>• CDMA: 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A)</li> <li>• LTE: QPSK, 16QAM</li> <li>• 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80</li> <li>• Bluetooth v3.0+EDR , Bluetooth v4.0-LE</li> <li>• NFC:ASK</li> </ul>
HW Version	P2
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<b>Remark:</b> <ol style="list-style-type: none"> <li>1. This device supported VoIP in EGPRS, WCDMA, CDMA, LTE (e.g. 3rd party VoIP).</li> <li>2. While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the GSM1900, WCDMA B2 / B4, CDMA BC1 and LTE B2 / B4 / B25 / B41 transmitter. More detailed information which can be referred to “operational description”.</li> <li>3. The 2.4GHz / 5GHz WLAN and Bluetooth conducted power and SAR testing results were referred to Sporton FCC SAR Test Report, Brand Name: Motorola Mobility LLC, Model Name: 3578, FCC ID: IHDT56QA1, Report No: FA442943A and also used perform transmission simultaneous analysis.</li> </ol>	

## **4.2 Maximum Tune-up Limit**

Mode	Burst average power(dBm)	
	GSM 850	GSM 1900
GSM (GMSK, 1 Tx slot)	34.00	30.80
GPRS (GMSK, 1 Tx slot)	34.00	30.80
GPRS (GMSK, 2 Tx slots)	31.50	27.70
GPRS (GMSK, 3 Tx slots)	30.00	25.70
GPRS (GMSK, 4 Tx slots)	28.50	24.50
EDGE (8PSK, 1 Tx slot)	28.50	26.40
EDGE (8PSK, 2 Tx slots)	25.80	24.00
EDGE (8PSK, 3 Tx slots)	24.50	22.50
EDGE (8PSK, 4 Tx slots)	23.20	21.00

Band / Mode			Average power(dBm)
WCDMA	Band V / IV / II	AMR / RMC 12.2Kbps	24.0
		HSDPA Subtest-1	23.0
		DC-HSDPA Subtest-1	23.0
		HSUPA Subtest-5	23.0
CDMA		BC10	25.0
		BC0	25.0
		BC1	25.0
LTE		Band 12	24.0
		Band 17	24.0
		Band 5	24.0
		Band 26	24.0
		Band 4	24.0
		Band 2	24.0
		Band 25	24.0
		Band 41	24.0

### 4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																																						
FCC ID	IHDT56QA3																																																					
Equipment Name	Mobile Cellular Phone																																																					
Operating Frequency Range of each LTE transmission band	LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																					
Channel Bandwidth	LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz, LTE Band 17: 5MHz, 10MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																					
uplink modulations used	QPSK, and 16QAM																																																					
LTE Voice / Data requirements	Data only																																																					
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>&gt; 5</td><td>&gt; 4</td><td>&gt; 8</td><td>&gt; 12</td><td>&gt; 16</td><td>&gt; 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>&gt; 5</td><td>&gt; 4</td><td>&gt; 8</td><td>&gt; 12</td><td>&gt; 16</td><td>&gt; 18</td><td>≤ 2</td></tr></table>								Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																						
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																															
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																															
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																															
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																															
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																					
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																					
Power reduction applied to satisfy SAR compliance	Yes, When operating in hotspot mode that LTE B2 / B4 / B25 / B41 power reduction applied to satisfy SAR compliance.																																																					
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																						
LTE Band 12																																																						
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																														
L	23017	699.7	23025	700.5	23035	701.5	23060	704																																														
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5																																														
H	23173	715.3	23165	714.5	23155	713.5	23130	711																																														
LTE Band 17																																																						
	Bandwidth 5 MHz				Bandwidth 10 MHz																																																	
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)																																															
L	23755		706.5		23780		709																																															
M	23790		710		23790		710																																															
H	23825		713.5		23800		711																																															
LTE Band 5																																																						
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																														
L	20407	824.7	20415	825.5	20425	826.5	20450	829																																														
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5																																														
H	20643	848.3	20635	847.5	20625	846.5	20600	844																																														



LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	20733	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
L M	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2590	40620	2593	40620	2593	40620	2593	40620	2593
H M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680

## 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

**The DASY system used for performing compliance tests consists of the following items:**

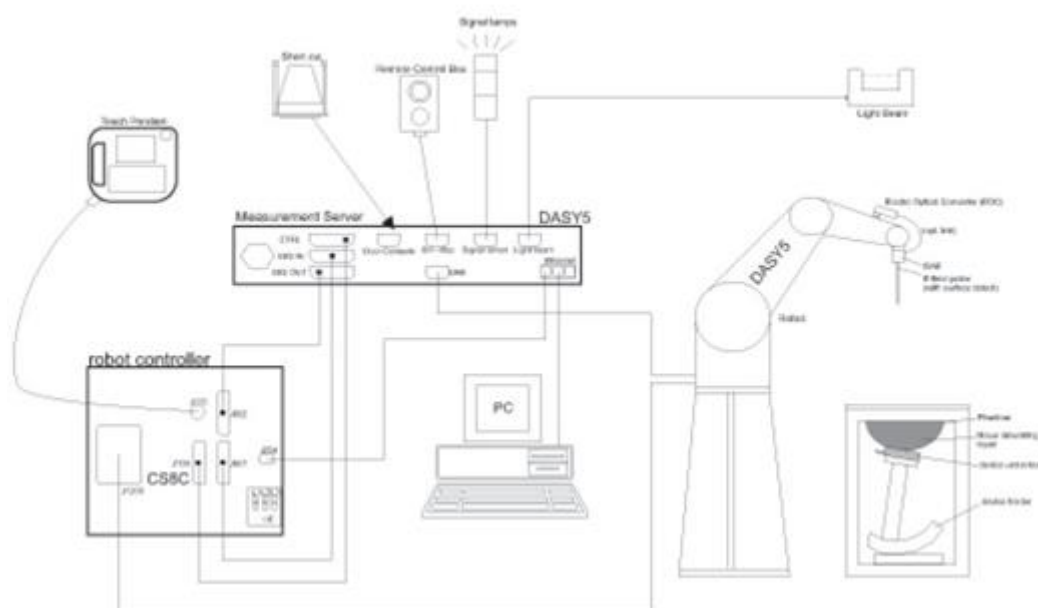

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## **8. Measurement Procedures**

The measurement procedures are as follows:

### **<Conducted power measurement>**

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### **<SAR measurement>**

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## **8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

## 8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

## 8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 16, 2014	May. 15, 2015
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 24, 2014	Mar. 23, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 27, 2013	Nov. 26, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2014	Mar. 20, 2015
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 13, 2013	Nov. 12, 2014
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 05, 2013	Nov. 04, 2014
SPEAG	Data Acquisition Electronics	DAE4	1425	Mar. 03, 2014	Mar. 02, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 19, 2014	May. 18, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2013	Aug. 20, 2014
SPEAG	Data Acquisition Electronics	DAE3	577	May. 15, 2014	May. 14, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2013	Sep. 23, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 22, 2014	May. 21, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 10, 2013	Sep. 09, 2014
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 22, 2013	Oct. 21, 2014
WonDer	Thermometer	WD-5015	TM225	Dec. 02, 2013	Dec. 01, 2014
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 11, 2014	Feb. 10, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201341950	Dec. 25, 2013	Dec. 24, 2014
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 10, 2014	Jan. 09, 2015
R&S	Radio communication Tester	CMW500	113998	Oct. 04, 2013	Oct. 03, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 03, 2013	Nov. 02, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 30	101329	Jun. 14, 2014	Jun. 13, 2015
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator	WK0602-XX	N/A	Note 1	
PE	Attenuator	PE7005-10	N/A	Note 1	
PE	Attenuator	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 1	

**General Note:**

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



## **10. System Verification**

### **10.1 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

#### **Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Head	22.5	0.896	40.991	0.89	41.90	0.67	-2.17	±5	2014/6/23
750	Head	22.2	0.894	41.019	0.89	41.90	0.45	-2.10	±5	2014/7/25
750	Body	22.2	0.965	54.349	0.96	55.50	0.52	-2.07	±5	2014/6/21
750	Body	22.3	0.964	55.660	0.96	55.50	0.42	0.29	±5	2014/7/26
835	Head	22.4	0.899	41.194	0.90	41.50	-0.11	-0.74	±5	2014/6/24
835	Head	22.4	0.903	40.999	0.90	41.50	0.33	-1.21	±5	2014/6/25
835	Head	22.5	0.904	40.524	0.90	41.50	0.44	-2.35	±5	2014/6/27
835	Head	22.6	0.907	42.345	0.90	41.50	0.78	2.04	±5	2014/7/25
835	Body	22.3	0.957	52.962	0.97	55.20	-1.34	-4.05	±5	2014/6/18
835	Body	22.6	0.975	52.906	0.97	55.20	0.52	-4.16	±5	2014/6/26
835	Body	22.4	0.942	55.365	0.97	55.20	-2.89	0.30	±5	2014/7/26
1750	Head	22.5	1.407	39.137	1.37	40.10	2.70	-2.40	±5	2014/6/27
1750	Head	22.3	1.407	39.276	1.37	40.10	2.70	-2.05	±5	2014/7/8
1750	Body	22.6	1.526	52.021	1.49	53.40	2.42	-2.58	±5	2014/6/22
1750	Body	22.3	1.528	52.410	1.49	53.40	2.55	-1.85	±5	2014/7/8
1900	Head	22.6	1.449	38.532	1.40	40.00	3.50	-3.67	±5	2014/6/25
1900	Head	22.6	1.435	38.114	1.40	40.00	2.50	-4.72	±5	2014/6/26
1900	Head	22.6	1.446	38.297	1.40	40.00	3.29	-4.26	±5	2014/7/25
1900	Body	22.5	1.565	52.909	1.52	53.30	2.96	-0.73	±5	2014/6/17
1900	Body	22.3	1.521	53.218	1.52	53.30	0.07	-0.15	±5	2014/6/19
1900	Body	22.2	1.532	52.506	1.52	53.30	0.79	-1.49	±5	2014/6/21
1900	Body	22.4	1.530	52.859	1.52	53.30	0.66	-0.83	±5	2014/6/27
1900	Body	22.6	1.548	52.056	1.52	53.30	1.84	-2.33	±5	2014/6/29
1900	Body	22.3	1.532	52.328	1.52	53.30	0.79	-1.82	±5	2014/7/26
1900	Body	22.2	1.546	52.216	1.52	53.30	1.71	-2.03	±5	2014/9/1
2600	Head	22.6	1.981	38.254	1.96	39.00	1.07	-1.91	±5	2014/6/24
2600	Head	22.5	1.991	37.553	1.96	39.00	1.58	-3.71	±5	2014/7/25
2600	Body	22.5	2.165	53.823	2.16	52.50	0.23	2.52	±5	2014/6/28
2600	Body	22.4	2.209	51.123	2.16	52.50	2.27	-2.62	±5	2014/7/26
2600	Body	22.2	2.201	51.023	2.16	52.50	1.90	-2.81	±5	2014/8/21

## 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/6/23	750	Head	250	D750V3-1012	3955	1399	2.00	8.12	8.00	-1.48
2014/7/25	750	Head	250	D750V3-1012	3925	1425	1.99	8.12	7.96	-1.97
2014/6/21	750	Body	250	D750V3-1012	3955	1399	2.18	8.65	8.72	0.81
2014/7/26	750	Body	250	D750V3-1012	3925	495	2.18	8.65	8.72	0.81
2014/6/24	835	Head	250	D835V2-499	3955	1399	2.40	9.13	9.60	5.15
2014/6/25	835	Head	250	D835V2-499	3954	1425	2.35	9.13	9.40	2.96
2014/6/27	835	Head	250	D835V2-499	3954	1425	2.46	9.13	9.84	7.78
2014/7/25	835	Head	250	D835V2-499	3954	1425	2.45	9.13	9.80	7.34
2014/6/18	835	Body	250	D835V2-499	3954	495	2.45	9.46	9.80	3.59
2014/6/26	835	Body	250	D835V2-499	3954	1425	2.55	9.46	10.20	7.82
2014/7/26	835	Body	250	D835V2-499	3925	495	2.54	9.46	10.16	7.40
2014/6/27	1750	Head	250	D1750V2-1068	3935	1338	8.73	37.30	34.92	-6.38
2014/7/8	1750	Head	250	D1750V2-1068	3270	778	8.91	37.30	35.64	-4.45
2014/6/22	1750	Body	250	D1750V2-1068	3955	1399	8.95	37.50	35.80	-4.53
2014/7/8	1750	Body	250	D1750V2-1068	3955	1399	9.27	37.50	37.08	-1.12
2014/6/25	1900	Head	250	D1900V2-5d041	3954	1425	10.30	41.00	41.20	0.49
2014/6/26	1900	Head	250	D1900V2-5d041	3954	1425	10.50	41.00	42.00	2.44
2014/7/25	1900	Head	250	D1900V2-5d041	3954	1425	10.10	41.00	40.40	-1.46
2014/6/17	1900	Body	250	D1900V2-5d041	3954	495	10.20	41.00	40.80	-0.49
2014/6/19	1900	Body	250	D1900V2-5d041	3954	495	9.93	41.00	39.72	-3.12
2014/6/21	1900	Body	250	D1900V2-5d041	3954	495	10.60	41.00	42.40	3.41
2014/6/27	1900	Body	250	D1900V2-5d041	3954	1425	10.50	41.00	42.00	2.44
2014/6/29	1900	Body	250	D1900V2-5d041	3935	1338	10.40	41.00	41.60	1.46
2014/7/26	1900	Body	250	D1900V2-5d041	3925	495	10.30	41.00	41.20	0.49
2014/9/1	1900	Body	250	D1900V2-5d041	3931	577	9.50	41.00	38	-7.32
2014/6/24	2600	Head	250	D2600V2-1070	3955	1399	13.90	56.60	55.60	-1.77
2014/7/25	2600	Head	250	D2600V2-1070	3925	495	13.20	56.60	52.80	-6.71
2014/6/28	2600	Body	250	D2600V2-1070	3935	1338	13.60	55.70	54.40	-2.33
2014/7/26	2600	Body	250	D2600V2-1070	3925	495	13.50	55.70	54.00	-3.05
2014/8/21	2600	Body	250	D2600V2-1070	3935	1338	14.00	55.70	56.00	0.54

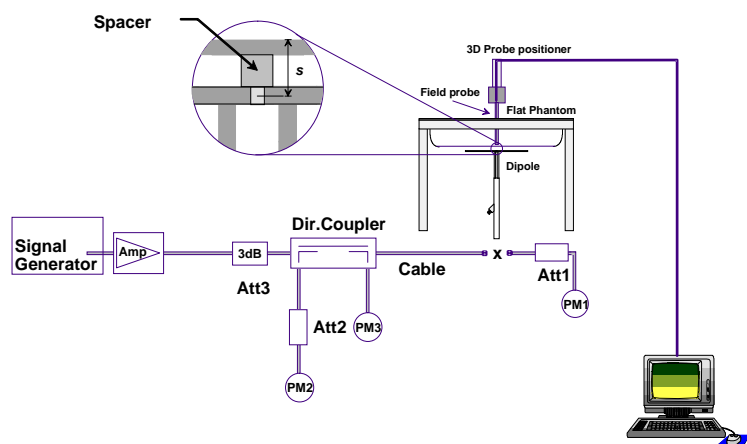

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

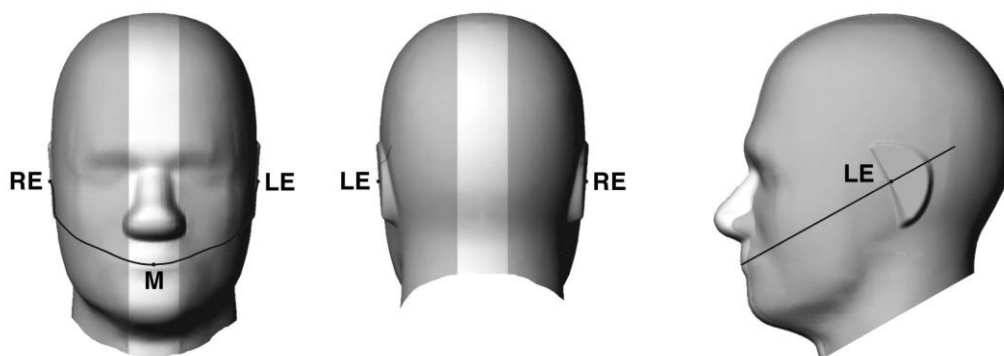


Fig 9.1.1 Front, back, and side views of SAM twin phantom

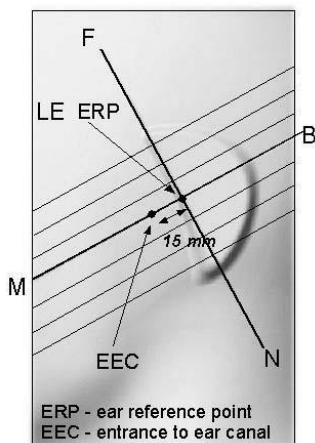


Fig 9.1.2 Close-up side view of phantom showing the ear region.

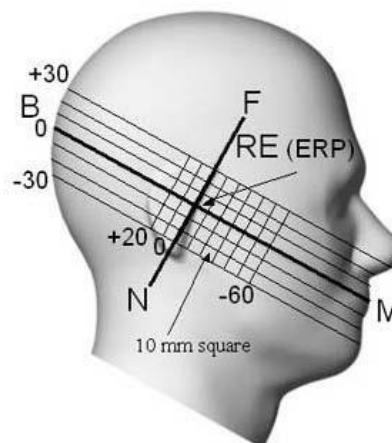


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

## 11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

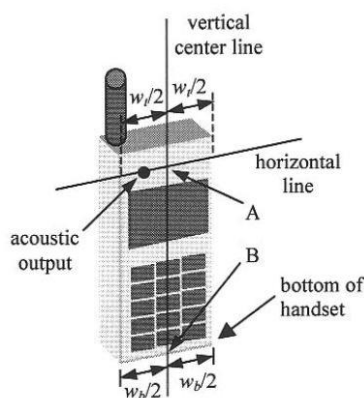


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

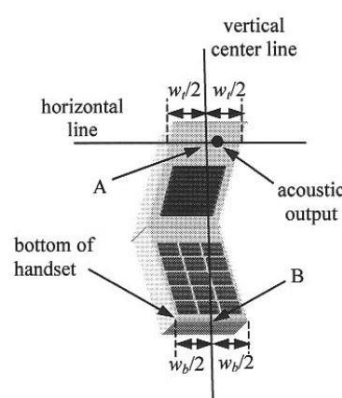


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

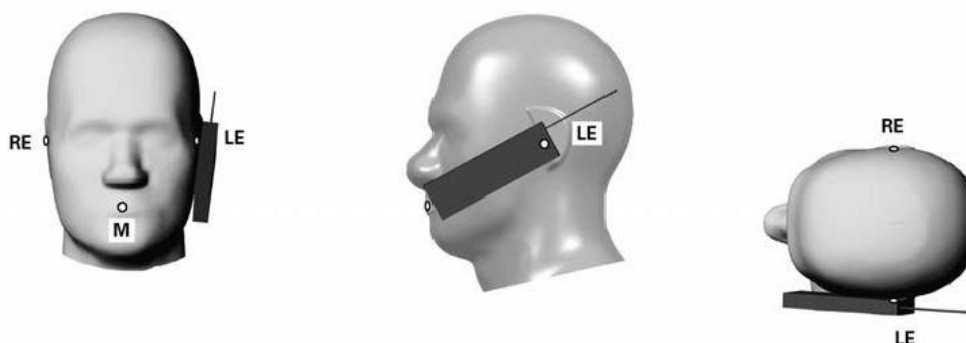


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

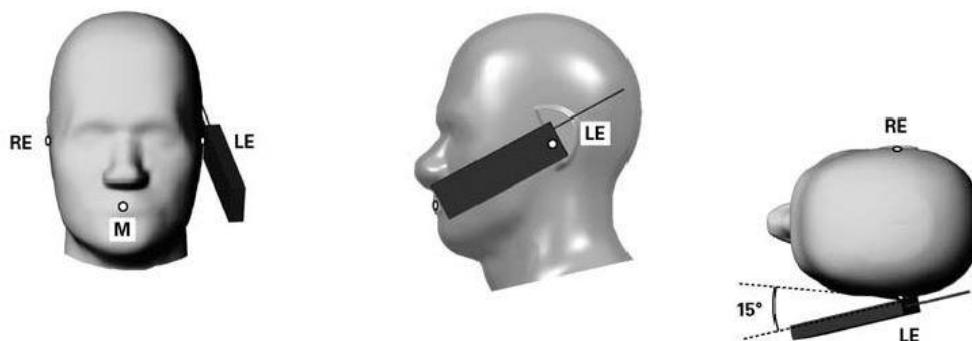


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

## 11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $< 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

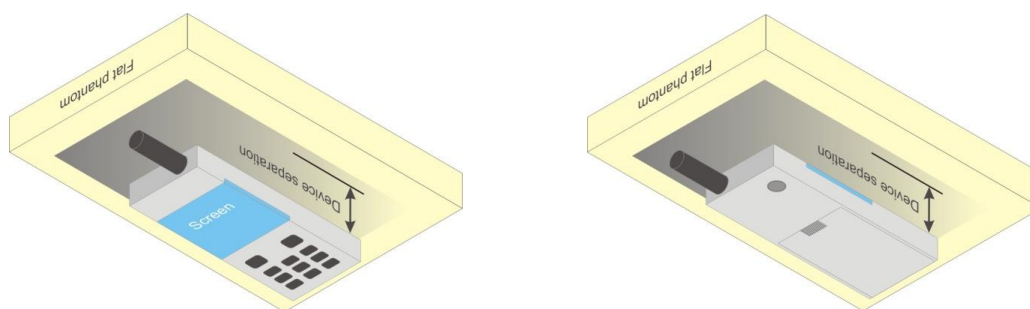


Fig 9.4 Body Worn Position

## 11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06v01r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## **12. Conducted RF Output Power (Unit: dBm)**

### **<GSM Conducted Power>**

#### **General Note:**

1. According to October 2013TCB Workshop, For GSM / EGPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration, Considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (3Tx slots) for GSM850, GPRS (1Tx slot) for GSM1900 band due to its highest frame-average power.
2. For hotspot mode SAR testing, GPRS / EDGE should be evaluated, therefore the EUT was set in GPRS 3 Tx slots for GSM850, GPRS (1Tx slot) for GSM1900 band due to its highest frame-average power.

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)	33.21	33.64	33.54	34.00	24.21	24.64	24.54	25.00
GPRS (GMSK, 1 Tx slot) – CS1	33.24	33.65	33.55	34.00	24.24	24.65	24.55	25.00
GPRS (GMSK, 2 Tx slots) – CS1	30.71	31.20	31.14	31.50	24.71	25.20	25.14	25.50
GPRS (GMSK, 3 Tx slots) – CS1	29.43	29.92	29.82	30.00	25.17	25.66	25.56	25.74
GPRS (GMSK, 4 Tx slots) – CS1	27.89	28.31	28.19	28.50	24.89	25.31	25.19	25.50
EDGE (8PSK, 1 Tx slot) – MCS5	27.95	28.37	28.25	28.50	18.95	19.37	19.25	19.50
EDGE (8PSK, 2 Tx slots) – MCS5	25.36	25.77	25.69	25.80	19.36	19.77	19.69	19.80
EDGE (8PSK, 3 Tx slots) – MCS5	23.90	24.32	24.15	24.50	19.64	20.06	19.89	20.24
EDGE (8PSK, 4 Tx slots) – MCS5	22.65	23.12	23.04	23.20	19.65	20.12	20.04	20.20

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)	30.11	30.12	29.88	30.80	21.11	21.12	20.88	21.80
GPRS (GMSK, 1 Tx slot) – CS1	30.13	30.13	29.89	30.80	21.13	21.13	20.89	21.80
GPRS (GMSK, 2 Tx slots) – CS1	27.34	27.35	27.17	27.70	21.34	21.35	21.17	21.70
GPRS (GMSK, 3 Tx slots) – CS1	25.52	25.61	25.28	25.70	21.26	21.35	21.02	21.44
GPRS (GMSK, 4 Tx slots) – CS1	24.32	24.40	24.14	24.50	21.32	21.40	21.14	21.50
EDGE (8PSK, 1 Tx slot) – MCS5	26.11	26.16	25.88	26.40	17.11	17.16	16.88	17.40
EDGE (8PSK, 2 Tx slots) – MCS5	23.55	23.58	23.32	24.00	17.55	17.58	17.32	18.00
EDGE (8PSK, 3 Tx slots) – MCS5	22.27	22.30	22.00	22.50	18.01	18.04	17.74	18.24
EDGE (8PSK, 4 Tx slots) – MCS5	20.75	20.73	20.51	21.00	17.75	17.73	17.51	18.00

### **<For FCC Additional Test Channel>**

Band GSM850	Burst Average Power (dBm)		Tune-up Limit (dBm)	Frame-Average Power (dBm)		Tune-up Limit (dBm)
TX Channel	148	231		148	231	
Frequency (MHz)	828.2	844.8		828.2	844.8	
GPRS (GMSK, 3 Tx slots) – CS1	29.01	28.96	30.00	24.75	24.70	25.74

Band GSM1900	Burst Average Power (dBm)		Tune-up Limit (dBm)	Frame-Average Power (dBm)		Tune-up Limit (dBm)
TX Channel	561	761		561	761	
Frequency (MHz)	1860	1900		1860	1900	
GPRS (GMSK, 1 Tx slot) – CS1	30.09	30.01	30.80	21.09	21.01	21.80



**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**


**DC-HSDPA 3GPP release 8 Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.  
A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**
**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

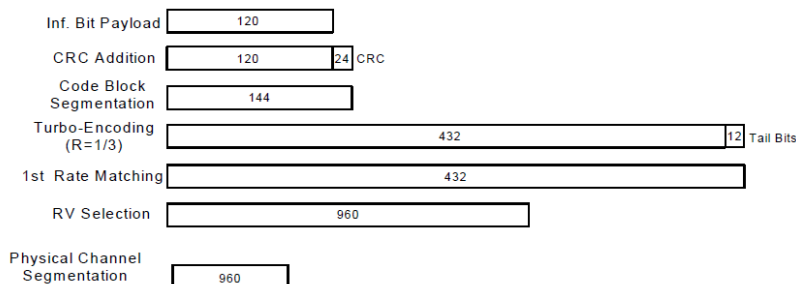
**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**
**Setup Configuration**

**<WCDMA Conducted Power>**
**General Note:**

1. SAR testing in AMR configuration is not required when the maximum average output of each RF channel for AMR 12.2Kbps is less than 0.25dB higher than that measured in RMC 12.2Kbps
2. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/kg}$ , HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..

Band		WCDMA V			WCDMA II			WCDMA IV		
TX Channel		4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
3GPP Rel 99	AMR 12.2Kbps	22.75	22.86	22.93	22.64	22.86	22.75	22.88	22.90	22.85
3GPP Rel 99	RMC 12.2Kbps	22.80	22.89	22.94	22.67	22.86	22.80	22.89	22.95	22.89
3GPP Rel 6	HSDPA Subtest-1	21.72	21.88	22.00	21.40	21.31	21.43	21.63	21.53	21.47
3GPP Rel 6	HSDPA Subtest-2	21.50	21.68	21.72	21.30	21.20	21.35	21.66	21.48	21.50
3GPP Rel 6	HSDPA Subtest-3	21.24	21.34	21.42	21.34	21.26	21.40	21.11	21.05	21.05
3GPP Rel 6	HSDPA Subtest-4	21.19	21.38	21.48	21.42	21.21	21.36	21.16	21.04	21.04
3GPP Rel 8	DC-HSDPA Subtest-1	21.71	21.90	21.88	21.36	21.22	21.48	21.60	21.50	21.45
3GPP Rel 8	DC-HSDPA Subtest-2	21.46	21.65	21.68	21.31	21.14	21.32	21.63	21.45	21.40
3GPP Rel 8	DC-HSDPA Subtest-3	21.22	21.39	21.35	21.37	21.17	21.34	21.10	21.00	21.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.26	21.38	21.37	21.39	21.19	21.27	21.08	21.00	21.00
3GPP Rel 6	HSUPA Subtest-1	21.37	21.26	21.16	21.45	21.17	21.50	21.01	21.02	21.37
3GPP Rel 6	HSUPA Subtest-2	20.87	20.81	20.70	20.73	20.50	20.83	20.52	20.54	20.50
3GPP Rel 6	HSUPA Subtest-3	20.79	20.56	20.54	20.67	20.46	20.69	20.15	20.34	20.52
3GPP Rel 6	HSUPA Subtest-4	21.32	21.22	21.10	21.21	20.94	21.29	20.77	20.62	20.63
3GPP Rel 6	HSUPA Subtest-5	22.00	21.88	21.75	21.88	21.57	21.90	21.63	21.47	21.54

**<For FCC Additional Test Channel>**

Band		WCDMA V		WCDMA II	
TX Channel		4141		9300	9500
Frequency (MHz)		828.2		1860	1900
3GPP Rel 99	RMC 12.2Kbps	23.19		23.16	23.12

**<CDMA2000 Conducted Power>**
**General Note:**

1. Per KDB 941225 D01v02, Head SAR for RC1+SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3+SO55.
2. Per KDB 941225 D01v02, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is high than 1/4dB higher than Re v0, SAR tests with those settings are necessary.
3. Per KDB 941225 D01v02, SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only.

Band	CDMA2000 BC10			CDMA2000 BC0			CDMA2000 BC1		
TX Channel	476	580	676	1013	384	777	25	600	1175
Frequency (MHz)	817.9	820.5	822.9	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	23.84	23.86	23.81	23.75	23.93	23.95	24.23	24.28	24.33
1xRTT RC3 SO55	23.85	23.87	23.82	23.76	23.94	23.96	24.22	24.27	24.31
1xRTT RC3 SO32(+ F-SCH)	23.81	23.85	23.79	23.74	23.90	23.93	24.21	24.24	24.30
1xRTT RC3 SO32(+SCH)	23.83	23.84	23.80	23.73	23.85	23.94	24.20	24.26	24.32
1xEVDO RTAP 153.6 Kbps	23.79	23.83	23.75	23.71	23.88	23.89	24.21	24.22	24.23
1xEVDO RETAP 4096 bits	23.82	23.85	23.79	23.72	23.91	23.92	24.25	24.23	24.26

**<For FCC Additional Test Channel>**

Band	CDMA2000 BC0		CDMA2000 BC1	
TX Channel	107	383	200	1000
Frequency (MHz)	828.21	836.49	1860	1900
1xRTT RC3 SO55	24.01	24.15	24.32	24.22
1xRTT RC3 SO32(+ F-SCH)	23.99	24.11	24.30	24.19

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

**<LTE Band 12>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.14	23.16	23.14		
10	QPSK	1	24	22.93	22.97	23.07	24.0	0
10	QPSK	1	49	22.84	22.93	22.96		
10	QPSK	25	0	22.05	22.17	22.17		
10	QPSK	25	12	22.02	22.09	22.16	23.0	1
10	QPSK	25	24	21.97	21.97	22.08		
10	QPSK	50	0	22.12	22.28	22.18		
10	16QAM	1	0	22.17	22.14	22.12	23.0	1
10	16QAM	1	24	21.94	21.92	22.04		
10	16QAM	1	49	21.83	21.91	21.89		
10	16QAM	25	0	21.04	21.01	21.11	22.0	2
10	16QAM	25	12	21.00	21.13	21.16		
10	16QAM	25	24	21.00	21.20	21.20		
10	16QAM	50	0	21.07	21.21	21.19		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.12	23.14	23.07		
5	QPSK	1	12	22.83	22.96	23.06	24.0	0
5	QPSK	1	24	22.74	22.84	22.92		
5	QPSK	12	0	21.98	22.12	22.15		
5	QPSK	12	6	22.01	22.03	22.15	23.0	1
5	QPSK	12	11	21.87	21.94	22.05		
5	QPSK	25	0	22.02	22.20	22.16		
5	16QAM	1	0	22.13	22.11	22.11	23.0	1
5	16QAM	1	12	21.87	21.91	22.01		
5	16QAM	1	24	21.75	21.84	21.81		
5	16QAM	12	0	20.98	20.98	21.06	22.0	2
5	16QAM	12	6	20.95	21.05	21.14		
5	16QAM	12	11	20.94	21.19	21.20		
5	16QAM	25	0	21.04	21.11	21.14		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.13	23.11	23.13		
3	QPSK	1	7	22.89	22.89	23.07	24.0	0
3	QPSK	1	14	22.74	22.86	22.90		
3	QPSK	8	0	21.95	22.14	22.17		
3	QPSK	8	4	22.02	22.06	22.12	23.0	1
3	QPSK	8	7	21.91	21.96	22.01		
3	QPSK	15	0	22.03	22.23	22.16		
3	16QAM	1	0	22.15	22.13	22.06	23.0	1
3	16QAM	1	7	21.93	21.85	21.94		
3	16QAM	1	14	21.80	21.84	21.86		
3	16QAM	8	0	20.95	20.92	21.07	22.0	2
3	16QAM	8	4	20.99	21.10	21.13		
3	16QAM	8	7	20.90	21.13	21.17		
3	16QAM	15	0	21.05	21.15	21.14		

Channel				23017	23095	23173	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.06	23.14	23.08	24.0	0
1.4	QPSK	1	2	22.85	22.93	22.99		
1.4	QPSK	1	5	22.78	22.85	22.96		
1.4	QPSK	3	0	22.36	22.52	22.45		
1.4	QPSK	3	1	22.40	22.50	22.43		
1.4	QPSK	3	2	22.41	22.48	22.40		
1.4	QPSK	6	0	22.03	22.23	22.17	23.0	1
1.4	16QAM	1	0	22.17	22.05	22.05	23.0	1
1.4	16QAM	1	2	21.87	21.89	21.94		
1.4	16QAM	1	5	21.74	21.85	21.79		
1.4	16QAM	3	0	21.36	21.50	21.42		
1.4	16QAM	3	1	21.41	21.46	21.40		
1.4	16QAM	3	2	21.40	21.47	21.45		
1.4	16QAM	6	0	20.97	21.11	21.19	22.0	2



**<LTE Band 17>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.16	23.16	23.20		
10	QPSK	1	24	23.09	23.09	23.09	24.0	0
10	QPSK	1	49	22.96	22.94	22.95		
10	QPSK	25	0	22.16	22.16	22.20		
10	QPSK	25	12	22.05	22.06	22.19	23.0	1
10	QPSK	25	24	22.04	22.05	22.05		
10	QPSK	50	0	22.15	22.16	22.11		
10	16QAM	1	0	22.13	22.13	22.16	23.0	1
10	16QAM	1	24	22.07	22.08	22.11		
10	16QAM	1	49	21.93	21.93	21.95		
10	16QAM	25	0	21.05	21.09	21.10	22.0	2
10	16QAM	25	12	21.12	21.12	21.21		
10	16QAM	25	24	21.22	21.25	21.25		
10	16QAM	50	0	21.10	21.06	21.10		
Channel				23755	23790	23825	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.08	23.08	23.16		
5	QPSK	1	12	23.05	23.07	23.00	24.0	0
5	QPSK	1	24	22.90	22.92	22.90		
5	QPSK	12	0	22.08	22.15	22.11		
5	QPSK	12	6	21.97	22.04	22.15	23.0	1
5	QPSK	12	11	22.04	22.02	22.02		
5	QPSK	25	0	22.06	22.10	22.10		
5	16QAM	1	0	22.11	22.06	22.12	23.0	1
5	16QAM	1	12	22.00	22.06	22.06		
5	16QAM	1	24	21.83	21.92	21.88		
5	16QAM	12	0	21.04	21.03	21.02	22.0	2
5	16QAM	12	6	21.12	21.03	21.14		
5	16QAM	12	11	21.14	21.17	21.16		
5	16QAM	25	0	21.01	21.02	21.10		

**<LTE Band 5>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.01	23.05	23.02		
10	QPSK	1	24	22.99	23.04	23.01	24.0	0
10	QPSK	1	49	22.98	23.01	23.00		
10	QPSK	25	0	22.15	22.06	22.10		
10	QPSK	25	12	22.10	22.05	22.08	23.0	1
10	QPSK	25	24	22.02	22.04	22.03		
10	QPSK	50	0	22.06	22.20	22.10		
10	16QAM	1	0	22.00	21.99	22.04	23.0	1
10	16QAM	1	24	21.94	21.98	22.00		
10	16QAM	1	49	21.92	21.97	21.96		
10	16QAM	25	0	20.99	21.04	21.06	22.0	2
10	16QAM	25	12	21.12	21.06	21.09		
10	16QAM	25	24	21.09	21.07	21.05		
10	16QAM	50	0	21.06	21.14	21.08		
Channel				20425	20525	20625	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.01	22.98	22.95		
5	QPSK	1	12	22.90	22.95	22.91	24.0	0
5	QPSK	1	24	22.89	22.92	22.93		
5	QPSK	12	0	22.13	21.96	22.03		
5	QPSK	12	6	22.03	21.97	22.03	23.0	1
5	QPSK	12	11	21.92	21.99	21.96		
5	QPSK	25	0	22.00	22.20	22.00		
5	16QAM	1	0	21.98	21.99	21.99	23.0	1
5	16QAM	1	12	21.90	21.96	21.98		
5	16QAM	1	24	21.83	21.95	21.89		
5	16QAM	12	0	20.96	21.02	21.06	22.0	2
5	16QAM	12	6	21.04	21.02	20.99		
5	16QAM	12	11	21.03	21.07	21.02		
5	16QAM	25	0	20.99	21.04	21.03		
Channel				20415	20525	20635	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.95	23.02	23.00		
3	QPSK	1	7	22.92	23.01	22.94	24.0	0
3	QPSK	1	14	22.91	23.00	22.95		
3	QPSK	8	0	22.15	22.00	22.04		
3	QPSK	8	4	22.01	21.95	22.05	23.0	1
3	QPSK	8	7	21.97	21.94	22.00		
3	QPSK	15	0	22.00	22.15	22.10		
3	16QAM	1	0	21.99	21.97	22.04	23.0	1
3	16QAM	1	7	21.87	21.96	21.90		
3	16QAM	1	14	21.83	21.91	21.89		
3	16QAM	8	0	20.94	20.94	21.00	22.0	2
3	16QAM	8	4	21.10	21.06	21.05		
3	16QAM	8	7	21.01	21.06	20.99		
3	16QAM	15	0	20.99	21.09	21.01		

Channel				20407	20525	20643	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.93	23.03	23.00	24.0	0
1.4	QPSK	1	2	22.93	23.00	22.98		
1.4	QPSK	1	5	22.88	22.95	22.93		
1.4	QPSK	3	0	22.30	22.50	22.30		
1.4	QPSK	3	1	22.31	22.48	22.32		
1.4	QPSK	3	2	22.28	22.41	22.36		
1.4	QPSK	6	0	22.06	22.16	22.09	23.0	1
1.4	16QAM	1	0	21.91	21.97	22.04	23.0	1
1.4	16QAM	1	2	21.93	21.95	21.98		
1.4	16QAM	1	5	21.84	21.88	21.88		
1.4	16QAM	3	0	21.25	21.42	21.30		
1.4	16QAM	3	1	21.24	21.35	21.35		
1.4	16QAM	3	2	21.23	21.36	21.32		
1.4	16QAM	6	0	20.96	21.07	21.04	22.0	2

**<LTE Band 26>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.05	23.07	23.06		
15	QPSK	1	37	22.99	23.03	23.05	24.0	0
15	QPSK	1	74	22.93	23.00	22.93		
15	QPSK	36	0	22.17	22.14	22.16		
15	QPSK	36	18	22.11	22.09	22.15	23.0	1
15	QPSK	36	37	22.10	22.10	22.10		
15	QPSK	75	0	22.26	22.19	22.22		
15	16QAM	1	0	22.03	22.09	22.08	23.0	1
15	16QAM	1	37	22.01	22.02	22.06		
15	16QAM	1	74	21.97	22.01	21.97		
15	16QAM	36	0	21.12	21.07	21.10	22.0	2
15	16QAM	36	18	21.07	21.09	21.11		
15	16QAM	36	37	21.07	21.07	21.00		
15	16QAM	75	0	21.23	21.13	21.09		
Channel				26740	26865	26990	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.04	23.03	23.02		
10	QPSK	1	24	22.92	23.02	23.01	24.0	0
10	QPSK	1	49	22.93	22.95	22.85		
10	QPSK	25	0	22.16	22.09	22.09		
10	QPSK	25	12	22.04	22.14	22.08	23.0	1
10	QPSK	25	24	22.02	22.00	22.02		
10	QPSK	50	0	22.23	22.14	22.22		
10	16QAM	1	0	22.00	22.00	22.03	23.0	1
10	16QAM	1	24	21.91	21.93	21.97		
10	16QAM	1	49	21.95	21.99	21.95		
10	16QAM	25	0	21.07	21.04	21.06	22.0	2
10	16QAM	25	12	21.03	21.07	21.02		
10	16QAM	25	24	20.97	20.97	20.96		
10	16QAM	50	0	21.17	21.13	21.03		
Channel				26715	26865	27015	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.98	23.01	22.99		
5	QPSK	1	12	22.98	22.98	22.97	24.0	0
5	QPSK	1	24	22.92	22.98	22.91		
5	QPSK	12	0	22.13	22.04	22.08		
5	QPSK	12	6	22.11	22.06	22.06	23.0	1
5	QPSK	12	11	22.07	22.06	22.06		
5	QPSK	25	0	22.23	22.19	22.20		
5	16QAM	1	0	22.02	22.09	22.08	23.0	1
5	16QAM	1	12	21.94	21.94	22.01		
5	16QAM	1	24	21.89	22.00	21.94		
5	16QAM	12	0	21.06	21.02	21.06	22.0	2
5	16QAM	12	6	20.98	21.06	21.10		
5	16QAM	12	11	21.07	20.99	20.98		
5	16QAM	25	0	21.13	21.12	21.07		

Channel				26705	26865	27025	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.96	23.06	23.06	24.0	0
3	QPSK	1	7	22.91	23.01	23.03		
3	QPSK	1	14	22.91	22.99	22.92		
3	QPSK	8	0	22.17	22.03	22.09	23.0	1
3	QPSK	8	4	22.11	22.04	22.09		
3	QPSK	8	7	22.10	22.10	22.06		
3	QPSK	15	0	22.16	22.12	22.16		
3	16QAM	1	0	21.97	22.00	22.02	23.0	1
3	16QAM	1	7	21.91	21.93	22.00		
3	16QAM	1	14	21.87	21.92	21.91		
3	16QAM	8	0	21.05	21.04	21.00	22.0	2
3	16QAM	8	4	21.00	21.04	21.07		
3	16QAM	8	7	20.98	21.04	20.96		
3	16QAM	15	0	21.19	21.07	21.09		
Channel				26697	26865	27033	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.96	23.05	23.02	24.0	0
1.4	QPSK	1	2	22.95	22.93	23.01		
1.4	QPSK	1	5	22.91	22.93	22.92		
1.4	QPSK	3	0	22.30	22.35	22.36		
1.4	QPSK	3	1	22.28	22.36	22.35		
1.4	QPSK	3	2	22.27	22.42	22.35		
1.4	QPSK	6	0	22.26	22.15	22.20	23.0	1
1.4	16QAM	1	0	22.02	22.09	22.06	23.0	1
1.4	16QAM	1	2	21.97	21.93	22.05		
1.4	16QAM	1	5	21.91	21.97	21.87		
1.4	16QAM	3	0	21.30	21.36	21.40		
1.4	16QAM	3	1	21.32	21.40	21.39		
1.4	16QAM	3	2	21.33	21.42	21.38		
1.4	16QAM	6	0	21.18	21.03	21.03	22.0	2

**<LTE Band 4>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.51	23.41	23.45		
20	QPSK	1	49	23.41	23.23	23.40	24.0	0
20	QPSK	1	99	23.29	23.23	23.27		
20	QPSK	50	0	22.57	22.35	22.50		
20	QPSK	50	24	22.50	22.33	22.50	23.0	1
20	QPSK	50	49	22.42	22.33	22.42		
20	QPSK	100	0	22.45	22.34	22.43		
20	16QAM	1	0	22.49	22.39	22.46	23.0	1
20	16QAM	1	49	22.37	22.24	22.35		
20	16QAM	1	99	22.28	22.19	22.27		
20	16QAM	50	0	21.52	21.31	21.42	22.0	2
20	16QAM	50	24	21.46	21.26	21.43		
20	16QAM	50	49	21.34	21.25	21.37		
20	16QAM	100	0	21.49	21.32	21.46		
Channel				20025	20175	20325	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.42	23.39	23.44	24.0	0
15	QPSK	1	37	23.37	23.23	23.40		
15	QPSK	1	74	23.25	23.20	23.22		
15	QPSK	36	0	22.47	22.30	22.47	23.0	1
15	QPSK	36	18	22.42	22.33	22.50		
15	QPSK	36	37	22.37	22.25	22.33		
15	QPSK	75	0	22.37	22.25	22.41		
15	16QAM	1	0	22.39	22.33	22.37	23.0	1
15	16QAM	1	37	22.27	22.22	22.33		
15	16QAM	1	74	22.26	22.12	22.23		
15	16QAM	36	0	21.52	21.26	21.42	22.0	2
15	16QAM	36	18	21.38	21.20	21.38		
15	16QAM	36	37	21.24	21.20	21.31		
15	16QAM	75	0	21.46	21.29	21.46		
Channel				20000	20175	20350	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.46	23.37	23.45	24.0	0
10	QPSK	1	24	23.41	23.23	23.39		
10	QPSK	1	49	23.23	23.21	23.19		
10	QPSK	25	0	22.50	22.29	22.47	23.0	1
10	QPSK	25	12	22.48	22.30	22.45		
10	QPSK	25	24	22.38	22.28	22.35		
10	QPSK	50	0	22.45	22.31	22.35		
10	16QAM	1	0	22.39	22.39	22.37	23.0	1
10	16QAM	1	24	22.36	22.15	22.35		
10	16QAM	1	49	22.26	22.17	22.19		
10	16QAM	25	0	21.52	21.28	21.37	22.0	2
10	16QAM	25	12	21.39	21.22	21.40		
10	16QAM	25	24	21.29	21.17	21.29		
10	16QAM	50	0	21.47	21.22	21.42		

Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.49	23.40	23.42	24.0	0
5	QPSK	1	12	23.31	23.21	23.32		
5	QPSK	1	24	23.19	23.22	23.23		
5	QPSK	12	0	22.54	22.26	22.46	23.0	1
5	QPSK	12	6	22.43	22.25	22.45		
5	QPSK	12	11	22.40	22.23	22.39		
5	QPSK	25	0	22.41	22.34	22.41		
5	16QAM	1	0	22.39	22.36	22.43	23.0	1
5	16QAM	1	12	22.34	22.19	22.34		
5	16QAM	1	24	22.23	22.12	22.18		
5	16QAM	12	0	21.46	21.30	21.42	22.0	2
5	16QAM	12	6	21.39	21.22	21.42		
5	16QAM	12	11	21.33	21.25	21.33		
5	16QAM	25	0	21.48	21.30	21.45		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.44	23.40	23.36	24.0	0
3	QPSK	1	7	23.37	23.19	23.35		
3	QPSK	1	14	23.19	23.20	23.18		
3	QPSK	8	0	22.53	22.34	22.46	23.0	1
3	QPSK	8	4	22.43	22.32	22.41		
3	QPSK	8	7	22.38	22.28	22.33		
3	QPSK	15	0	22.43	22.33	22.36		
3	16QAM	1	0	22.43	22.39	22.37	23.0	1
3	16QAM	1	7	22.32	22.20	22.32		
3	16QAM	1	14	22.21	22.16	22.23		
3	16QAM	8	0	21.51	21.31	21.33	22.0	2
3	16QAM	8	4	21.45	21.19	21.33		
3	16QAM	8	7	21.34	21.15	21.36		
3	16QAM	15	0	21.46	21.23	21.45		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.44	23.32	23.42	24.0	0
1.4	QPSK	1	2	23.36	23.21	23.39		
1.4	QPSK	1	5	23.27	23.15	23.25		
1.4	QPSK	3	0	22.82	22.62	22.75		
1.4	QPSK	3	1	22.80	22.65	22.74		
1.4	QPSK	3	2	22.78	22.65	22.72		
1.4	QPSK	6	0	22.43	22.34	22.41	23.0	1
1.4	16QAM	1	0	22.43	22.34	22.43	23.0	1
1.4	16QAM	1	2	22.29	22.14	22.31		
1.4	16QAM	1	5	22.20	22.15	22.27		
1.4	16QAM	3	0	21.82	21.62	21.75		
1.4	16QAM	3	1	21.78	21.62	21.73		
1.4	16QAM	3	2	21.76	21.63	21.72		
1.4	16QAM	6	0	21.47	21.28	21.40	22.0	2

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.34	23.55	23.42		
20	QPSK	1	49	23.28	23.44	23.40	24.0	0
20	QPSK	1	99	23.27	23.36	23.38		
20	QPSK	50	0	22.44	22.54	22.46		
20	QPSK	50	24	22.38	22.51	22.44	23.0	1
20	QPSK	50	49	22.37	22.47	22.38		
20	QPSK	100	0	22.43	22.50	22.47		
20	16QAM	1	0	22.34	22.50	22.41	23.0	1
20	16QAM	1	49	22.24	22.37	22.38		
20	16QAM	1	99	22.27	22.31	22.40		
20	16QAM	50	0	21.40	21.45	21.40	22.0	2
20	16QAM	50	24	21.27	21.40	21.38		
20	16QAM	50	49	21.30	21.43	21.33		
20	16QAM	100	0	21.43	21.45	21.41		
Channel				18675	18900	19125	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.28	23.50	23.41		
15	QPSK	1	37	23.27	23.40	23.35	24.0	0
15	QPSK	1	74	23.20	23.33	23.37		
15	QPSK	36	0	22.44	22.48	22.43		
15	QPSK	36	18	22.29	22.45	22.44	23.0	1
15	QPSK	36	37	22.28	22.45	22.34		
15	QPSK	75	0	22.41	22.47	22.43		
15	16QAM	1	0	22.32	22.47	22.39	23.0	1
15	16QAM	1	37	22.23	22.28	22.30		
15	16QAM	1	74	22.25	22.24	22.38		
15	16QAM	36	0	21.31	21.41	21.39	22.0	2
15	16QAM	36	18	21.24	21.39	21.30		
15	16QAM	36	37	21.27	21.33	21.27		
15	16QAM	75	0	21.42	21.37	21.38		
Channel				18650	18900	19150	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.25	23.53	23.37		
10	QPSK	1	24	23.24	23.35	23.35	24.0	0
10	QPSK	1	49	23.20	23.26	23.30		
10	QPSK	25	0	22.38	22.54	22.36		
10	QPSK	25	12	22.31	22.44	22.43	23.0	1
10	QPSK	25	24	22.29	22.37	22.29		
10	QPSK	50	0	22.35	22.44	22.43		
10	16QAM	1	0	22.30	22.45	22.38	23.0	1
10	16QAM	1	24	22.23	22.36	22.35		
10	16QAM	1	49	22.23	22.26	22.35		
10	16QAM	25	0	21.30	21.38	21.35	22.0	2
10	16QAM	25	12	21.24	21.39	21.35		
10	16QAM	25	24	21.29	21.36	21.26		
10	16QAM	50	0	21.38	21.37	21.38		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.27	23.54	23.37	24.0	0
5	QPSK	1	12	23.26	23.37	23.31		
5	QPSK	1	24	23.23	23.34	23.35		
5	QPSK	12	0	22.41	22.46	22.42	23.0	1
5	QPSK	12	6	22.34	22.41	22.44		
5	QPSK	12	11	22.31	22.41	22.34		
5	QPSK	25	0	22.42	22.41	22.42		
5	16QAM	1	0	22.34	22.42	22.35	23.0	1
5	16QAM	1	12	22.18	22.37	22.33		
5	16QAM	1	24	22.23	22.26	22.34		
5	16QAM	12	0	21.35	21.39	21.36	22.0	2
5	16QAM	12	6	21.17	21.31	21.35		
5	16QAM	12	11	21.20	21.35	21.26		
5	16QAM	25	0	21.36	21.35	21.37		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.26	23.50	23.38	24.0	0
3	QPSK	1	7	23.26	23.39	23.36		
3	QPSK	1	14	23.21	23.33	23.34		
3	QPSK	8	0	22.35	22.54	22.43	23.0	1
3	QPSK	8	4	22.32	22.44	22.34		
3	QPSK	8	7	22.35	22.44	22.32		
3	QPSK	15	0	22.33	22.48	22.39		
3	16QAM	1	0	22.33	22.48	22.37	23.0	1
3	16QAM	1	7	22.24	22.30	22.30		
3	16QAM	1	14	22.20	22.29	22.31		
3	16QAM	8	0	21.39	21.45	21.39	22.0	2
3	16QAM	8	4	21.24	21.39	21.31		
3	16QAM	8	7	21.21	21.33	21.30		
3	16QAM	15	0	21.36	21.40	21.34		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.33	23.46	23.41	24.0	0
1.4	QPSK	1	2	23.22	23.37	23.35		
1.4	QPSK	1	5	23.23	23.36	23.29		
1.4	QPSK	3	0	22.68	22.78	22.72		
1.4	QPSK	3	1	22.67	22.76	22.72		
1.4	QPSK	3	2	22.65	22.76	22.73		
1.4	QPSK	6	0	22.41	22.40	22.46	23.0	1
1.4	16QAM	1	0	22.34	22.40	22.40	23.0	1
1.4	16QAM	1	2	22.24	22.34	22.30		
1.4	16QAM	1	5	22.22	22.30	22.33		
1.4	16QAM	3	0	21.70	21.78	21.75		
1.4	16QAM	3	1	21.68	21.76	21.77		
1.4	16QAM	3	2	21.65	21.79	21.74		
1.4	16QAM	6	0	21.33	21.42	21.33	22.0	2

**<LTE Band 25>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.47	23.52	23.46		
20	QPSK	1	49	23.31	23.45	23.36	24.0	0
20	QPSK	1	99	23.35	23.36	23.32		
20	QPSK	50	0	22.48	22.54	22.50		
20	QPSK	50	24	22.44	22.53	22.47	23.0	1
20	QPSK	50	49	22.36	22.48	22.38		
20	QPSK	100	0	22.47	22.50	22.49		
20	16QAM	1	0	22.47	22.45	22.44	23.0	1
20	16QAM	1	49	22.27	22.36	22.36		
20	16QAM	1	99	22.27	22.40	22.24		
20	16QAM	50	0	21.45	21.48	21.44	22.0	2
20	16QAM	50	24	21.39	21.49	21.43		
20	16QAM	50	49	21.39	21.44	21.33		
20	16QAM	100	0	21.47	21.46	21.43		
Channel				26115	26340	26615	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.48	23.45	23.42		
15	QPSK	1	37	23.24	23.40	23.32	24.0	0
15	QPSK	1	74	23.33	23.26	23.24		
15	QPSK	36	0	22.40	22.54	22.42		
15	QPSK	36	18	22.34	22.47	22.43	23.0	1
15	QPSK	36	37	22.26	22.47	22.36		
15	QPSK	75	0	22.39	22.41	22.40		
15	16QAM	1	0	22.42	22.39	22.43	23.0	1
15	16QAM	1	37	22.21	22.32	22.32		
15	16QAM	1	74	22.20	22.38	22.15		
15	16QAM	36	0	21.38	21.41	21.37	22.0	2
15	16QAM	36	18	21.38	21.42	21.35		
15	16QAM	36	37	21.31	21.36	21.30		
15	16QAM	75	0	21.38	21.42	21.41		
Channel				26090	26340	26640	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.44	23.40	23.39		
10	QPSK	1	24	23.26	23.39	23.36	24.0	0
10	QPSK	1	49	23.25	23.28	23.31		
10	QPSK	25	0	22.45	22.50	22.44		
10	QPSK	25	12	22.34	22.51	22.43	23.0	1
10	QPSK	25	24	22.26	22.41	22.32		
10	QPSK	50	0	22.37	22.42	22.48		
10	16QAM	1	0	22.44	22.39	22.41	23.0	1
10	16QAM	1	24	22.25	22.32	22.35		
10	16QAM	1	49	22.18	22.35	22.19		
10	16QAM	25	0	21.45	21.43	21.43	22.0	2
10	16QAM	25	12	21.29	21.39	21.33		
10	16QAM	25	24	21.37	21.36	21.25		
10	16QAM	50	0	21.42	21.39	21.42		

Channel				26065	26340	26665	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.48	23.38	23.44	24.0	0
5	QPSK	1	12	23.24	23.36	23.30		
5	QPSK	1	24	23.31	23.32	23.22		
5	QPSK	12	0	22.48	22.54	22.45	23.0	1
5	QPSK	12	6	22.37	22.44	22.40		
5	QPSK	12	11	22.31	22.45	22.28		
5	QPSK	25	0	22.47	22.48	22.41	23.0	1
5	16QAM	1	0	22.44	22.43	22.37		
5	16QAM	1	12	22.20	22.36	22.31		
5	16QAM	1	24	22.26	22.31	22.15	22.0	2
5	16QAM	12	0	21.40	21.42	21.44		
5	16QAM	12	6	21.36	21.48	21.43		
5	16QAM	12	11	21.32	21.43	21.31	21.44	21.42
5	16QAM	25	0	21.44	21.46	21.42		
Channel				26055	26340	26675	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.45	23.40	23.36	24.0	0
3	QPSK	1	7	23.25	23.38	23.27		
3	QPSK	1	14	23.35	23.26	23.31		
3	QPSK	8	0	22.43	22.48	22.44	23.0	1
3	QPSK	8	4	22.36	22.52	22.43		
3	QPSK	8	7	22.30	22.40	22.36		
3	QPSK	15	0	22.44	22.49	22.45	23.0	1
3	16QAM	1	0	22.43	22.42	22.40		
3	16QAM	1	7	22.21	22.30	22.26		
3	16QAM	1	14	22.23	22.30	22.16	22.0	2
3	16QAM	8	0	21.37	21.48	21.35		
3	16QAM	8	4	21.32	21.41	21.35		
3	16QAM	8	7	21.32	21.42	21.24	21.39	21.39
3	16QAM	15	0	21.39	21.37	21.39		
Channel				26047	26340	26683	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.46	23.41	23.37	24.0	0
1.4	QPSK	1	2	23.25	23.37	23.30		
1.4	QPSK	1	5	23.26	23.29	23.29		
1.4	QPSK	3	0	22.78	22.76	22.70	23.0	1
1.4	QPSK	3	1	22.76	22.75	22.68		
1.4	QPSK	3	2	22.78	22.74	22.67		
1.4	QPSK	6	0	22.42	22.45	22.39	23.0	1
1.4	16QAM	1	0	22.45	22.44	22.40		
1.4	16QAM	1	2	22.18	22.36	22.26		
1.4	16QAM	1	5	22.20	22.33	22.23	22.0	2
1.4	16QAM	3	0	21.78	21.75	21.68		
1.4	16QAM	3	1	21.77	21.75	21.67		
1.4	16QAM	3	2	21.76	21.73	21.67	21.43	21.38
1.4	16QAM	6	0	21.43	21.38	21.43		

**<For FCC Additional Test Channel>**


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				26148	26582		
Frequency (MHz)				1860.8	1904.2	24.0	0
20	QPSK	1	0	23.31	23.28		

### <TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

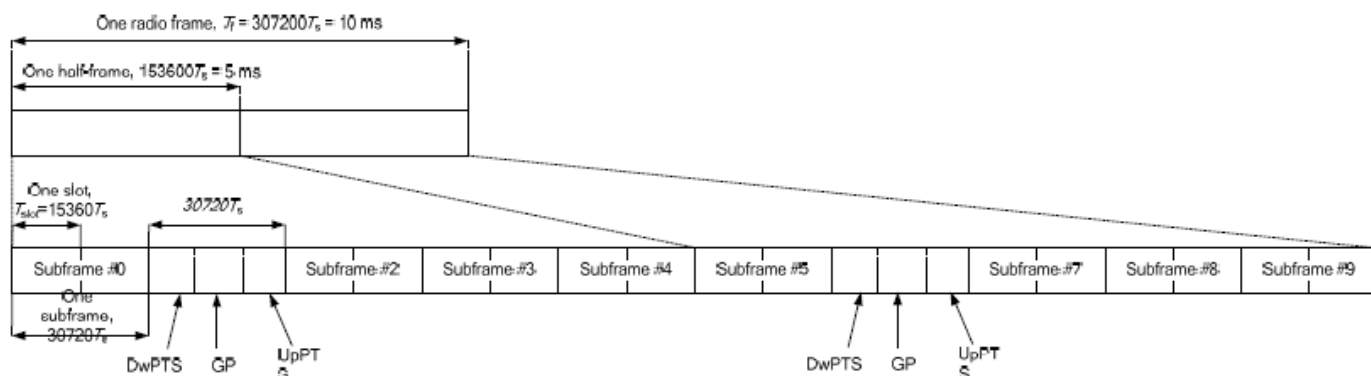

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T <sub>s</sub> ): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T <sub>s</sub> ): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.01$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

**<LTE Band 41>**


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	24.0	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.31	23.35	23.45	23.20	23.30	24.0	0
20	QPSK	1	49	23.19	23.23	23.42	23.19	23.24		
20	QPSK	1	99	23.30	23.34	23.41	23.03	23.25		
20	QPSK	50	0	22.25	22.27	22.49	22.25	22.33	23.0	0-1
20	QPSK	50	24	22.24	22.21	22.41	22.11	22.29		
20	QPSK	50	49	22.24	22.19	22.39	22.24	22.21		
20	QPSK	100	0	22.26	22.20	22.40	22.19	22.18		
20	16QAM	1	0	22.09	22.00	22.13	21.82	22.22	23.0	0-1
20	16QAM	1	49	21.94	22.02	22.18	22.02	21.97		
20	16QAM	1	99	21.92	22.12	22.25	21.86	22.02		
20	16QAM	50	0	21.20	21.13	21.30	21.06	21.26	22.0	0-2
20	16QAM	50	24	21.23	21.24	21.35	21.19	21.29		
20	16QAM	50	49	21.25	21.18	21.40	21.10	21.21		
20	16QAM	100	0	21.22	21.23	21.43	21.17	21.32		
Channel				39725	40173	40620	41068	41515	24.0	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.25	23.18	23.44	23.11	23.28	24.0	0
15	QPSK	1	37	23.22	23.30	23.43	23.04	23.23		
15	QPSK	1	74	23.24	23.16	23.40	23.03	23.29		
15	QPSK	36	0	22.14	22.21	22.35	22.09	22.32	23.0	0-1
15	QPSK	36	18	22.19	22.27	22.39	22.13	22.26		
15	QPSK	36	37	22.17	22.27	22.40	22.24	22.25		
15	QPSK	75	0	22.19	22.14	22.38	22.19	22.24		
15	16QAM	1	0	21.98	21.81	22.21	21.93	22.05	23.0	0-1
15	16QAM	1	37	21.94	22.02	22.20	21.91	21.98		
15	16QAM	1	74	21.89	21.96	22.23	21.77	22.01		
15	16QAM	36	0	21.16	21.15	21.32	21.15	21.26	22.0	0-2
15	16QAM	36	18	21.25	21.23	21.36	21.27	21.13		
15	16QAM	36	37	21.25	21.18	21.39	21.14	21.22		
15	16QAM	75	0	21.24	21.16	21.38	21.24	21.18		
Channel				39700	40160	40620	41080	41540	24.0	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.21	23.23	23.30	22.95	23.17	24.0	0
10	QPSK	1	24	23.14	23.12	23.36	23.08	23.25		
10	QPSK	1	49	23.11	23.21	23.28	23.11	23.30		
10	QPSK	25	0	22.13	22.20	22.20	22.03	22.20	23.0	0-1
10	QPSK	25	12	22.12	22.03	22.26	22.05	22.22		
10	QPSK	25	24	22.13	22.11	22.46	21.97	22.25		
10	QPSK	50	0	22.11	22.02	22.41	21.92	22.11		
10	16QAM	1	0	22.00	21.96	22.17	21.75	22.15	23.0	0-1
10	16QAM	1	24	21.86	21.91	22.19	21.81	22.20		
10	16QAM	1	49	21.82	22.05	22.21	21.86	22.16		
10	16QAM	25	0	21.26	21.24	21.41	21.04	21.25	22.0	0-2
10	16QAM	25	12	21.24	21.16	21.48	21.19	21.27		
10	16QAM	25	24	21.19	21.19	21.44	21.12	21.31		
10	16QAM	50	0	21.22	21.27	21.36	21.08	21.20		

Channel				39675	40148	40620	41093	41565	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.3	2687.5		
5	QPSK	1	0	23.18	23.22	23.36	23.07	23.22	24.0	0
5	QPSK	1	12	23.16	23.09	23.41	22.99	23.28		
5	QPSK	1	24	23.03	23.06	23.36	23.01	23.20		
5	QPSK	12	0	22.18	22.11	22.39	22.10	22.20	23.0	0-1
5	QPSK	12	6	22.10	22.10	22.40	21.91	22.28		
5	QPSK	12	11	22.12	22.03	22.40	21.93	22.26		
5	QPSK	25	0	22.19	22.16	22.43	22.07	22.23		
5	16QAM	1	0	21.95	21.94	22.16	21.84	22.01	23.0	0-1
5	16QAM	1	12	21.90	21.98	22.14	21.88	22.02		
5	16QAM	1	24	21.88	21.87	22.24	21.87	22.05		
5	16QAM	12	0	21.28	21.32	21.42	21.19	21.26	22.0	0-2
5	16QAM	12	6	21.27	21.20	21.43	21.08	21.26		
5	16QAM	12	11	21.25	21.17	21.40	21.14	21.29		
5	16QAM	25	0	21.30	21.34	21.45	21.07	21.27		

**<For FCC Additional Test Channel>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				39973	41267		
Frequency (MHz)				2528.3	2657.7	24.0	0
20	QPSK	1	0	23.11	23.06		

### 13. Antenna Location

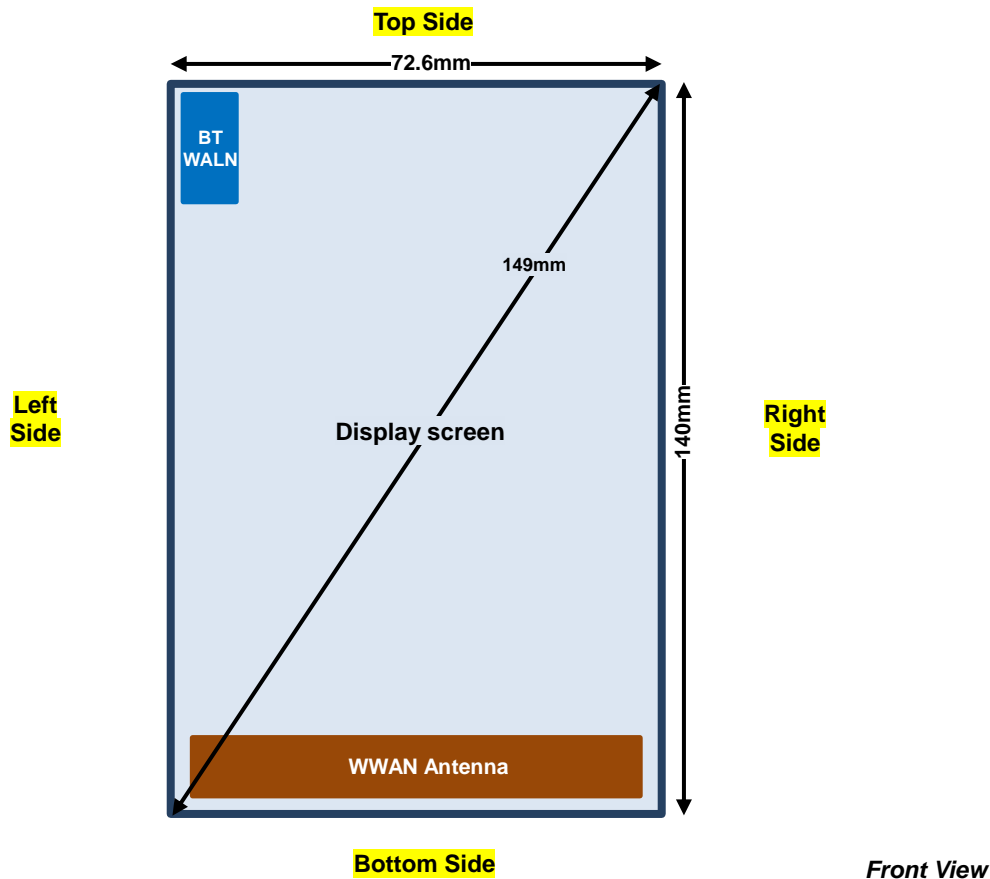

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes

**General Note:**

- Referring to KDB 941225 D06 v01r01, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - d. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - e. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Pre KDB648474 D04v01r02, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset, if reported SAR  $< 1.2$  W/kg connected to the headset is not required.
4. While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the GSM1900, WCDMA B2 / B4, CDMA BC1 and LTE B2 / B4 / B7 transmitter. And while operating in body-worn accessory exposure conditions, reduced power limits are enforced on the CDMA BC1 transmitter. More detailed information which can be referred to "operational description".
5. This device utilizes dynamic antenna tuning on the main antenna. Please refer to the operational description (Exhibit 12) for functionality description, and FCC the pre-test KDB inquiry (Exhibit 12A) for test guidance. Test results for this specific condition are labeled as Triggered in the Antenna Tuner column contained in the tables below.

### GSM Note:

1. According to October 2013TCB Workshop, For GSM / EGPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration, Considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (3Tx slots) for GSM850, GPRS (1Tx slot) for GSM1900 band due to its highest frame-average power.
2. For hotspot mode SAR testing, GPRS / EDGE should be evaluated, therefore the EUT was set in GPRS 3 Tx slots for GSM850, GPRS (1Tx slot) for GSM1900 band due to its highest frame-average power.

### WCDMA Note:

1. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is  $< 0.25$ dB higher than RMC, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2$ W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.

### CDMA Note:

1. Per KDB 941225 D01v02, Head SAR for RC3+SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3+SO55 and considering the possibility of e.g. 3rd party VoIP was additional Ev-Do Rev A (RETAP 4096 bits) SAR testing performed on RC3+SO55 worse case.
2. Per KDB 941225 D01v02, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is high than 1/4dB higher than Re v0, SAR tests with those settings are necessary.
3. Per KDB 941225 D01v02, SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. To account for VOIP operation, Ev-Do Rev. A (RETAP 4096 bits) SAR testing was performed at the worst position identified by 1xRTT SAR test results, for both head and body-worn accessory exposure conditions.

**LTE Note:**

1. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
6. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.01$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

## 14.1 Head SAR

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Right Cheek	non-Trigger	189	836.4	29.92	30.00	1.019	-0.07	0.334	0.340
	GSM850	GPRS (3 Tx slots)	Right Cheek	Trigger	189	836.4	29.92	30.00	1.019	-0.09	0.332	0.338
01	GSM850	GPRS (3 Tx slots)	Right Cheek	Trigger	148	828.2	29.01	30.00	1.256	-0.08	0.447	<b>0.561</b>
	GSM850	GPRS (3 Tx slots)	Right Cheek	Trigger	231	844.8	28.96	30.00	1.271	-0.06	0.325	0.413
	GSM850	GPRS (3 Tx slots)	Right Tilted	non-Trigger	189	836.4	29.92	30.00	1.019	-0.07	0.160	0.163
	GSM850	GPRS (3 Tx slots)	Left Cheek	non-Trigger	189	836.4	29.92	30.00	1.019	-0.03	0.292	0.297
	GSM850	GPRS (3 Tx slots)	Left Tilted	non-Trigger	189	836.4	29.92	30.00	1.019	-0.08	0.185	0.188
	GSM1900	GPRS (1 Tx slot)	Right Cheek	non-Trigger	661	1880	30.13	30.80	1.167	-0.08	0.153	0.179
	GSM1900	GPRS (1 Tx slot)	Right Tilted	non-Trigger	661	1880	30.13	30.80	1.167	-0.15	0.076	0.089
	GSM1900	GPRS (1 Tx slot)	Left Cheek	non-Trigger	661	1880	30.13	30.80	1.167	-0.05	0.265	0.309
	GSM1900	GPRS (1 Tx slot)	Left Cheek	Trigger	661	1880	30.13	30.80	1.167	-0.19	0.202	0.236
	GSM1900	GPRS (1 Tx slot)	Left Cheek	Trigger	561	1860	30.09	30.80	1.178	-0.08	0.280	0.330
02	GSM1900	GPRS (1 Tx slot)	Left Cheek	Trigger	761	1900	30.01	30.80	1.199	-0.11	0.283	<b>0.339</b>
	GSM1900	GPRS (1 Tx slot)	Left Tilted	non-Trigger	661	1880	30.13	30.80	1.167	-0.04	0.073	0.085

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC 12.2Kbps	Right Cheek	non-Trigger	4233	846.6	22.94	24.00	1.276	-0.06	0.377	<b>0.481</b>
	WCDMA V	RMC 12.2Kbps	Right Cheek	Trigger	4233	846.6	22.94	24.00	1.276	-0.11	0.373	0.476
	WCDMA V	RMC 12.2Kbps	Right Cheek	Trigger	4141	828.2	23.19	24.00	1.205	-0.06	0.356	0.429
	WCDMA V	RMC 12.2Kbps	Right Cheek	Trigger	4182	836.4	22.89	24.00	1.291	0.03	0.334	0.431
	WCDMA V	RMC 12.2Kbps	Right Tilted	non-Trigger	4233	846.6	22.94	24.00	1.276	-0.09	0.189	0.241
	WCDMA V	RMC 12.2Kbps	Left Cheek	non-Trigger	4233	846.6	22.94	24.00	1.276	0	0.308	0.393
	WCDMA V	RMC 12.2Kbps	Left Tilted	non-Trigger	4233	846.6	22.94	24.00	1.276	-0.09	0.185	0.236
	WCDMA IV	RMC 12.2Kbps	Right Cheek	non-Trigger	1413	1732.6	22.95	24.00	1.274	0	0.145	0.185
	WCDMA IV	RMC 12.2Kbps	Right Tilted	non-Trigger	1413	1732.6	22.95	24.00	1.274	0.12	0.063	0.080
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	non-Trigger	1413	1732.6	22.95	24.00	1.274	0.09	0.368	<b>0.469</b>
	WCDMA IV	RMC 12.2Kbps	Left Cheek	Trigger	1413	1732.6	22.95	24.00	1.274	0.03	0.274	0.349
	WCDMA IV	RMC 12.2Kbps	Left Tilted	non-Trigger	1413	1732.6	22.95	24.00	1.274	0.1	0.067	0.085
	WCDMA II	RMC 12.2Kbps	Right Cheek	non-Trigger	9400	1880	22.86	24.00	1.300	-0.17	0.190	0.247
	WCDMA II	RMC 12.2Kbps	Right Tilted	non-Trigger	9400	1880	22.86	24.00	1.300	-0.08	0.197	0.256
	WCDMA II	RMC 12.2Kbps	Left Cheek	non-Trigger	9400	1880	22.86	24.00	1.300	-0.08	0.271	0.352
	WCDMA II	RMC 12.2Kbps	Left Cheek	Trigger	9400	1880	22.86	24.00	1.300	-0.1	0.281	0.365
	WCDMA II	RMC 12.2Kbps	Left Cheek	Trigger	9300	1860	23.16	24.00	1.213	-0.13	0.398	0.483
05	WCDMA II	RMC 12.2Kbps	Left Cheek	Trigger	9500	1900	23.12	24.00	1.225	-0.16	0.420	<b>0.514</b>
	WCDMA II	RMC 12.2Kbps	Left Tilted	non-Trigger	9400	1880	22.86	24.00	1.300	-0.09	0.187	0.243

**<CDMA SAR>**

Plot No.	Band	Mode	Test Position	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	CDMA BC10	1xRTT RC3 SO55	Right Cheek	non-Trigger	580	820.5	23.87	25.00	1.297	-0.02	0.416	<b>0.540</b>
	CDMA BC10	1xRTT RC3 SO55	Right Cheek	Trigger	580	820.5	23.87	25.00	1.297	-0.11	0.414	0.537
	CDMA BC10	RETAP 4096 bits	Right Cheek	non-Trigger	580	820.5	23.85	25.00	1.303	-0.04	0.349	0.455
	CDMA BC10	1xRTT RC3 SO55	Right Tilted	non-Trigger	580	820.5	23.87	25.00	1.297	-0.1	0.232	0.301
	CDMA BC10	1xRTT RC3 SO55	Left Cheek	non-Trigger	580	820.5	23.87	25.00	1.297	-0.03	0.367	0.476
	CDMA BC10	1xRTT RC3 SO55	Left Tilted	non-Trigger	580	820.5	23.87	25.00	1.297	-0.07	0.254	0.329
	CDMA BC0	1xRTT RC3 SO55	Right Cheek	non-Trigger	777	848.31	23.96	25.00	1.271	-0.05	0.422	0.536
07	CDMA BC0	1xRTT RC3 SO55	Right Cheek	Trigger	777	848.31	23.96	25.00	1.271	-0.06	0.484	<b>0.615</b>
	CDMA BC0	1xRTT RC3 SO55	Right Cheek	Trigger	107	828.21	24.01	25.00	1.256	0.01	0.318	0.399
	CDMA BC0	1xRTT RC3 SO55	Right Cheek	Trigger	383	836.49	24.15	25.00	1.216	-0.07	0.380	0.462
	CDMA BC0	RETAP 4096 bits	Right Cheek	non-Trigger	777	848.31	23.92	25.00	1.282	-0.07	0.366	0.469
	CDMA BC0	1xRTT RC3 SO55	Right Tilted	non-Trigger	777	848.31	23.96	25.00	1.271	-0.05	0.210	0.267
	CDMA BC0	1xRTT RC3 SO55	Left Cheek	non-Trigger	777	848.31	23.96	25.00	1.271	-0.03	0.349	0.443
	CDMA BC0	1xRTT RC3 SO55	Left Tilted	non-Trigger	777	848.31	23.96	25.00	1.271	-0.05	0.209	0.266
	CDMA BC1	1xRTT RC3 SO55	Right Cheek	non-Trigger	1175	1908.75	24.31	25.00	1.172	-0.09	0.223	0.261
	CDMA BC1	1xRTT RC3 SO55	Right Tilted	non-Trigger	1175	1908.75	24.31	25.00	1.172	-0.15	0.144	0.169
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	non-Trigger	1175	1908.75	24.31	25.00	1.172	-0.15	0.504	0.591
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	Trigger	1175	1908.75	24.31	25.00	1.172	-0.17	0.512	0.600
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	Trigger	200	1860	24.32	25.00	1.169	-0.12	0.63	0.737
08	CDMA BC1	1xRTT RC3 SO55	Left Cheek	Trigger	600	1880	24.27	25.00	1.183	-0.13	0.643	<b>0.761</b>
	CDMA BC1	RETAP 4096 bits	Left Cheek	non-Trigger	1175	1908.75	24.26	25.00	1.186	-0.16	0.302	0.358
	CDMA BC1	1xRTT RC3 SO55	Left Tilted	non-Trigger	1175	1908.75	24.31	25.00	1.172	-0.18	0.125	0.147



## &lt;FDD LTE SAR&gt;

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Right Cheek	non-Trigger	23095	707.5	23.16	24.00	1.213	-0.07	0.318	0.386
	LTE Band 12	10M	QPSK	25	0	Right Cheek	non-Trigger	23095	707.5	22.17	23.00	1.211	-0.12	0.185	0.224
	LTE Band 12	10M	QPSK	1	0	Right Cheek	Trigger	23095	707.5	23.16	24.00	1.213	0.01	0.348	0.422
	LTE Band 12	10M	QPSK	1	0	Right Cheek	Trigger	23060	704	23.14	24.00	1.219	-0.06	0.355	0.433
09	LTE Band 12	10M	QPSK	1	0	Right Cheek	Trigger	23130	711	23.14	24.00	1.219	0.04	0.377	0.460
	LTE Band 12	10M	QPSK	25	0	Right Cheek	Trigger	23095	707.5	22.17	23.00	1.211	-0.13	0.203	0.246
	LTE Band 12	10M	QPSK	1	0	Right Tilted	non-Trigger	23095	707.5	23.16	24.00	1.213	-0.06	0.158	0.192
	LTE Band 12	10M	QPSK	25	0	Right Tilted	non-Trigger	23095	707.5	22.17	23.00	1.211	0.04	0.091	0.110
	LTE Band 12	10M	QPSK	1	0	Left Cheek	non-Trigger	23095	707.5	23.16	24.00	1.213	0.03	0.297	0.360
	LTE Band 12	10M	QPSK	25	0	Left Cheek	non-Trigger	23095	707.5	22.17	23.00	1.211	0.04	0.173	0.209
	LTE Band 12	10M	QPSK	1	0	Left Tilted	non-Trigger	23095	707.5	23.16	24.00	1.213	0	0.172	0.209
	LTE Band 12	10M	QPSK	25	0	Left Tilted	non-Trigger	23095	707.5	22.17	23.00	1.211	-0.04	0.103	0.125
	LTE Band 17	10M	QPSK	1	0	Right Cheek	non-Trigger	23800	711	23.20	24.00	1.202	-0.03	0.319	0.384
	LTE Band 17	10M	QPSK	25	0	Right Cheek	non-Trigger	23800	711	22.20	23.00	1.202	0	0.190	0.228
10	LTE Band 17	10M	QPSK	1	0	Right Cheek	Trigger	23800	711	23.20	24.00	1.202	-0.14	0.354	0.426
	LTE Band 17	10M	QPSK	25	0	Right Cheek	Trigger	23800	711	22.20	23.00	1.202	0.02	0.212	0.255
	LTE Band 17	10M	QPSK	1	0	Right Tilted	non-Trigger	23800	711	23.20	24.00	1.202	-0.02	0.167	0.201
	LTE Band 17	10M	QPSK	25	0	Right Tilted	non-Trigger	23800	711	22.20	23.00	1.202	0.07	0.100	0.120
	LTE Band 17	10M	QPSK	1	0	Left Cheek	non-Trigger	23800	711	23.20	24.00	1.202	-0.1	0.309	0.371
	LTE Band 17	10M	QPSK	25	0	Left Cheek	non-Trigger	23800	711	22.20	23.00	1.202	-0.09	0.181	0.218
	LTE Band 17	10M	QPSK	1	0	Left Tilted	non-Trigger	23800	711	23.20	24.00	1.202	-0.07	0.189	0.227
	LTE Band 17	10M	QPSK	25	0	Left Tilted	non-Trigger	23800	711	22.20	23.00	1.202	-0.16	0.112	0.135
11	LTE Band 5	10M	QPSK	1	0	Right Cheek	non-Trigger	20525	836.5	23.05	24.00	1.245	-0.04	0.357	0.444
	LTE Band 5	10M	QPSK	25	0	Right Cheek	non-Trigger	20450	829	22.15	23.00	1.216	-0.15	0.207	0.252
	LTE Band 5	10M	QPSK	1	0	Right Cheek	Trigger	20525	836.5	23.05	24.00	1.245	0	0.311	0.387
	LTE Band 5	10M	QPSK	1	0	Right Cheek	Trigger	20450	829	23.01	24.00	1.256	-0.03	0.328	0.412
	LTE Band 5	10M	QPSK	1	0	Right Cheek	Trigger	20600	844	23.02	24.00	1.253	-0.05	0.335	0.420
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Trigger	20450	829	22.15	23.00	1.216	-0.09	0.194	0.236
	LTE Band 5	10M	QPSK	1	0	Right Tilted	non-Trigger	20525	836.5	23.05	24.00	1.245	-0.02	0.219	0.273
	LTE Band 5	10M	QPSK	25	0	Right Tilted	non-Trigger	20450	829	22.15	23.00	1.216	-0.01	0.219	0.266
	LTE Band 5	10M	QPSK	1	0	Left Cheek	non-Trigger	20525	836.5	23.05	24.00	1.245	-0.02	0.335	0.417
	LTE Band 5	10M	QPSK	25	0	Left Cheek	non-Trigger	20450	829	22.15	23.00	1.216	0.12	0.194	0.236
	LTE Band 5	10M	QPSK	1	0	Left Tilted	non-Trigger	20525	836.5	23.05	24.00	1.245	-0.03	0.217	0.270
	LTE Band 5	10M	QPSK	25	0	Left Tilted	non-Trigger	20450	829	22.15	23.00	1.216	0.09	0.126	0.153
	LTE Band 26	15M	QPSK	1	0	Right Cheek	non-Trigger	26865	831.5	23.07	24.00	1.239	-0.05	0.344	0.426
	LTE Band 26	15M	QPSK	36	0	Right Cheek	non-Trigger	26765	821.5	22.17	23.00	1.211	-0.04	0.224	0.271
	LTE Band 26	15M	QPSK	1	0	Right Cheek	Trigger	26865	831.5	23.07	24.00	1.239	-0.02	0.340	0.421
12	LTE Band 26	15M	QPSK	1	0	Right Cheek	Trigger	26765	821.5	23.05	24.00	1.245	0.01	0.378	0.470
	LTE Band 26	15M	QPSK	1	0	Right Cheek	Trigger	26965	841.5	23.06	24.00	1.242	0.06	0.347	0.431
	LTE Band 26	15M	QPSK	36	0	Right Cheek	Trigger	26765	821.5	22.17	23.00	1.211	-0.01	0.250	0.303
	LTE Band 26	15M	QPSK	1	0	Right Tilted	non-Trigger	26865	831.5	23.07	24.00	1.239	0	0.193	0.239
	LTE Band 26	15M	QPSK	36	0	Right Tilted	non-Trigger	26765	821.5	22.17	23.00	1.211	0.04	0.131	0.159
	LTE Band 26	15M	QPSK	1	0	Left Cheek	non-Trigger	26865	831.5	23.07	24.00	1.239	-0.08	0.318	0.394
	LTE Band 26	15M	QPSK	36	0	Left Cheek	non-Trigger	26765	821.5	22.17	23.00	1.211	-0.02	0.195	0.236
	LTE Band 26	15M	QPSK	1	0	Left Tilted	non-Trigger	26865	831.5	23.07	24.00	1.239	-0.06	0.205	0.254
	LTE Band 26	15M	QPSK	36	0	Left Tilted	non-Trigger	26765	821.5	22.17	23.00	1.211	-0.02	0.131	0.159



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Right Cheek	non-Trigger	20050	1720	23.51	24.00	1.119	-0.12	0.225	0.252
	LTE Band 4	20M	QPSK	50	0	Right Cheek	non-Trigger	20050	1720	22.57	23.00	1.104	-0.1	0.175	0.193
	LTE Band 4	20M	QPSK	1	0	Right Tilted	non-Trigger	20050	1720	23.51	24.00	1.119	0.02	0.137	0.153
	LTE Band 4	20M	QPSK	50	0	Right Tilted	non-Trigger	20050	1720	22.57	23.00	1.104	-0.12	0.115	0.127
13	LTE Band 4	20M	QPSK	1	0	Left Cheek	non-Trigger	20050	1720	23.51	24.00	1.119	-0.12	0.336	0.376
	LTE Band 4	20M	QPSK	50	0	Left Cheek	non-Trigger	20050	1720	22.57	23.00	1.104	-0.11	0.269	0.297
	LTE Band 4	20M	QPSK	1	0	Left Cheek	Trigger	20050	1720	23.51	24.00	1.119	-0.12	0.151	0.169
	LTE Band 4	20M	QPSK	50	0	Left Cheek	Trigger	20050	1720	22.57	23.00	1.104	-0.16	0.118	0.130
	LTE Band 4	20M	QPSK	1	0	Left Tilted	non-Trigger	20050	1720	23.51	24.00	1.119	0.05	0.145	0.162
	LTE Band 4	20M	QPSK	50	0	Left Tilted	non-Trigger	20050	1720	22.57	23.00	1.104	0.15	0.108	0.119
	LTE Band 2	20M	QPSK	1	0	Right Cheek	non-Trigger	18900	1880	23.55	24.00	1.109	-0.06	0.246	0.273
	LTE Band 2	20M	QPSK	50	0	Right Cheek	non-Trigger	18900	1880	22.54	23.00	1.112	-0.1	0.195	0.217
	LTE Band 2	20M	QPSK	1	0	Right Tilted	non-Trigger	18900	1880	23.55	24.00	1.109	-0.14	0.128	0.142
	LTE Band 2	20M	QPSK	50	0	Right Tilted	non-Trigger	18900	1880	22.54	23.00	1.112	-0.07	0.111	0.123
	LTE Band 2	20M	QPSK	1	0	Left Cheek	non-Trigger	18900	1880	23.55	24.00	1.109	-0.05	0.295	0.327
	LTE Band 2	20M	QPSK	50	0	Left Cheek	non-Trigger	18900	1880	22.54	23.00	1.112	0.17	0.255	0.283
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Trigger	18900	1880	23.55	24.00	1.109	-0.12	0.309	0.343
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Trigger	18700	1860	23.23	24.00	1.194	-0.17	0.465	0.555
14	LTE Band 2	20M	QPSK	1	0	Left Cheek	Trigger	19100	1900	23.29	24.00	1.178	-0.1	0.477	0.562
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Trigger	18900	1880	22.54	23.00	1.112	-0.17	0.261	0.290
	LTE Band 2	20M	QPSK	1	0	Left Tilted	non-Trigger	18900	1880	23.55	24.00	1.109	-0.04	0.072	0.080
	LTE Band 2	20M	QPSK	50	0	Left Tilted	non-Trigger	18900	1880	22.54	23.00	1.112	-0.06	0.056	0.062
	LTE Band 25	20M	QPSK	1	0	Right Cheek	non-Trigger	26340	1880	23.52	24.00	1.117	-0.17	0.232	0.259
	LTE Band 25	20M	QPSK	50	0	Right Cheek	non-Trigger	26340	1880	22.54	23.00	1.112	-0.04	0.192	0.213
	LTE Band 25	20M	QPSK	1	0	Right Tilted	non-Trigger	26340	1880	23.52	24.00	1.117	-0.13	0.103	0.115
	LTE Band 25	20M	QPSK	50	0	Right Tilted	non-Trigger	26340	1880	22.54	23.00	1.112	-0.15	0.082	0.091
	LTE Band 25	20M	QPSK	1	0	Left Cheek	non-Trigger	26340	1880	23.52	24.00	1.117	-0.18	0.354	0.395
	LTE Band 25	20M	QPSK	50	0	Left Cheek	non-Trigger	26340	1880	22.54	23.00	1.112	-0.12	0.286	0.318
	LTE Band 25	20M	QPSK	1	0	Left Cheek	Trigger	26340	1880	23.52	24.00	1.117	-0.14	0.300	0.335
	LTE Band 25	20M	QPSK	1	0	Left Cheek	Trigger	26148	1860.8	23.31	24.00	1.172	-0.1	0.397	0.465
15	LTE Band 25	20M	QPSK	1	0	Left Cheek	Trigger	26582	1904.2	23.28	24.00	1.180	-0.13	0.406	0.479
	LTE Band 25	20M	QPSK	50	0	Left Cheek	Trigger	26340	1880	22.54	23.00	1.112	-0.1	0.251	0.279
	LTE Band 25	20M	QPSK	1	0	Left Tilted	non-Trigger	26340	1880	23.52	24.00	1.117	-0.12	0.069	0.077
	LTE Band 25	20M	QPSK	50	0	Left Tilted	non-Trigger	26340	1880	22.54	23.00	1.112	-0.18	0.060	0.067

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	non-Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	0.04	0.230	0.263
	LTE Band 41	20M	QPSK	50	0	Right Cheek	non-Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	-0.15	0.193	0.218
	LTE Band 41	20M	QPSK	1	0	Right Tilted	non-Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	0.05	0.157	0.179
	LTE Band 41	20M	QPSK	50	0	Right Tilted	non-Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	0.04	0.135	0.153
	LTE Band 41	20M	QPSK	1	0	Left Cheek	non-Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	0.18	0.325	0.371
	LTE Band 41	20M	QPSK	50	0	Left Cheek	non-Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	-0.12	0.199	0.225
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	-0.1	0.283	0.323
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Trigger	39973	2528.3	23.11	24.00	1.227	62.9	1.01	-0.18	0.235	0.290
16	LTE Band 41	20M	QPSK	1	0	Left Cheek	Trigger	41267	2657.7	23.06	24.00	1.242	62.9	1.01	-0.15	0.324	0.405
	LTE Band 41	20M	QPSK	50	0	Left Cheek	Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	-0.19	0.165	0.187
	LTE Band 41	20M	QPSK	1	0	Left Tilted	non-Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	-0.11	0.132	0.151
	LTE Band 41	20M	QPSK	50	0	Left Tilted	non-Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	0.1	0.059	0.067



## 14.2 Wireless Router SAR

### <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Front	1cm	OFF	189	836.4	29.92	30.00	1.019	-0.08	0.539	0.549
	GSM850	GPRS (3 Tx slots)	Back	1cm	OFF	189	836.4	29.92	30.00	1.019	-0.04	0.491	0.500
	GSM850	GPRS (3 Tx slots)	Left Side	1cm	OFF	189	836.4	29.92	30.00	1.019	-0.12	0.417	0.425
17	GSM850	GPRS (3 Tx slots)	Right Side	1cm	OFF	189	836.4	29.92	30.00	1.019	-0.14	0.628	<b>0.640</b>
	GSM850	GPRS (3 Tx slots)	Bottom Side	1cm	OFF	189	836.4	29.92	30.00	1.019	-0.15	0.200	0.204
	GSM1900	GPRS (1 Tx slot)	Front	1cm	ON	661	1880		26.80	1.000	-0.06	0.455	0.455
	GSM1900	GPRS (1 Tx slot)	Back	1cm	ON	661	1880		26.80	1.000	-0.09	0.452	0.452
	GSM1900	GPRS (1 Tx slot)	Left Side	1cm	ON	661	1880		26.80	1.000	-0.13	0.073	0.073
	GSM1900	GPRS (1 Tx slot)	Right Side	1cm	ON	661	1880		26.80	1.000	0.04	0.035	0.035
18	GSM1900	GPRS (1 Tx slot)	Bottom Side	1cm	ON	661	1880		26.80	1.000	-0.1	0.649	<b>0.649</b>

### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	1cm	OFF	4233	846.6	22.94	24.00	1.276	-0.05	0.532	0.679
	WCDMA V	RMC 12.2Kbps	Back	1cm	OFF	4233	846.6	22.94	24.00	1.276	-0.08	0.483	0.617
	WCDMA V	RMC 12.2Kbps	Left Side	1cm	OFF	4233	846.6	22.94	24.00	1.276	-0.12	0.439	0.560
19	WCDMA V	RMC 12.2Kbps	Right Side	1cm	OFF	4233	846.6	22.94	24.00	1.276	-0.07	0.629	<b>0.803</b>
	WCDMA V	RMC 12.2Kbps	Right Side	1cm	OFF	4132	826.4	22.80	24.00	1.318	-0.12	0.473	0.624
	WCDMA V	RMC 12.2Kbps	Right Side	1cm	OFF	4182	836.4	22.89	24.00	1.291	-0.08	0.448	0.578
	WCDMA V	RMC 12.2Kbps	Bottom Side	1cm	OFF	4233	846.6	22.94	24.00	1.276	0.01	0.227	0.290
	WCDMA IV	RMC 12.2Kbps	Front	1cm	ON	1413	1732.6		19.00	1.000	-0.05	0.546	0.546
	WCDMA IV	RMC 12.2Kbps	Bak	1cm	ON	1413	1732.6		19.00	1.000	-0.07	0.327	0.327
	WCDMA IV	RMC 12.2Kbps	Left Side	1cm	ON	1413	1732.6		19.00	1.000	0	0.015	0.015
	WCDMA IV	RMC 12.2Kbps	Right Side	1cm	ON	1413	1732.6		19.00	1.000	0.14	0.011	0.011
20	WCDMA IV	RMC 12.2Kbps	Bottom Side	1cm	ON	1413	1732.6		19.00	1.000	-0.03	0.638	<b>0.638</b>
	WCDMA II	RMC 12.2Kbps	Front	1cm	ON	9400	1880		19.00	1.000	-0.13	0.592	0.592
	WCDMA II	RMC 12.2Kbps	Back	1cm	ON	9400	1880		19.00	1.000	-0.08	0.501	0.501
	WCDMA II	RMC 12.2Kbps	Left Side	1cm	ON	9400	1880		19.00	1.000	-0.13	0.081	0.081
	WCDMA II	RMC 12.2Kbps	Right Side	1cm	ON	9400	1880		19.00	1.000	-0.05	0.038	0.038
21	WCDMA II	RMC 12.2Kbps	Bottom Side	1cm	ON	9400	1880		19.00	1.000	-0.17	0.799	<b>0.799</b>

**<CDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
22	CDMA BC10	RTAP 153.6Kbps	Front	1cm	OFF	580	820.5	23.83	25.00	1.309	-0.08	0.610	<b>0.799</b>
	CDMA BC10	RTAP 153.6Kbps	Back	1cm	OFF	580	820.5	23.83	25.00	1.309	-0.06	0.609	0.797
	CDMA BC10	RTAP 153.6Kbps	Left Side	1cm	OFF	580	820.5	23.83	25.00	1.309	-0.11	0.383	0.501
	CDMA BC10	RTAP 153.6Kbps	Right Side	1cm	OFF	580	820.5	23.83	25.00	1.309	-0.11	0.573	0.750
	CDMA BC10	RTAP 153.6Kbps	Bottom Side	1cm	OFF	580	820.5	23.83	25.00	1.309	-0.09	0.192	0.251
	CDMA BC0	RTAP 153.6Kbps	Front	1cm	OFF	777	848.31	23.89	25.00	1.291	-0.02	0.509	0.657
	CDMA BC0	RTAP 153.6Kbps	Back	1cm	OFF	777	848.31	23.89	25.00	1.291	-0.04	0.465	0.600
	CDMA BC0	RTAP 153.6Kbps	Left Side	1cm	OFF	777	848.31	23.89	25.00	1.291	-0.13	0.294	0.380
23	CDMA BC0	RTAP 153.6Kbps	Right Side	1cm	OFF	777	848.31	23.89	25.00	1.291	-0.09	0.513	<b>0.662</b>
	CDMA BC0	RTAP 153.6Kbps	Bottom Side	1cm	OFF	777	848.31	23.89	25.00	1.291	-0.09	0.220	0.284
	CDMA BC1	RTAP 153.6Kbps	Front	1cm	ON	1175	1908.75		19.50	1.000	-0.01	0.611	0.611
	CDMA BC1	RTAP 153.6Kbps	Back	1cm	ON	1175	1908.75		19.50	1.000	-0.03	0.472	0.472
	CDMA BC1	RTAP 153.6Kbps	Left Side	1cm	ON	1175	1908.75		19.50	1.000	-0.15	0.088	0.088
	CDMA BC1	RTAP 153.6Kbps	Right Side	1cm	ON	1175	1908.75		19.50	1.000	-0.11	0.042	0.042
24	CDMA BC1	RTAP 153.6Kbps	Bottom Side	1cm	ON	1175	1908.75		19.50	1.000	-0.13	0.762	<b>0.762</b>

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
25	LTE Band 12	10M	QPSK	1	0	Front	1cm	OFF	23095	707.5	23.16	24.00	1.213	-0.05	0.560	<b>0.679</b>
	LTE Band 12	10M	QPSK	25	0	Front	1cm	OFF	23095	707.5	22.17	23.00	1.211	-0.04	0.326	0.395
	LTE Band 12	10M	QPSK	1	0	Back	1cm	OFF	23095	707.5	23.16	24.00	1.213	-0.06	0.553	0.671
	LTE Band 12	10M	QPSK	25	0	Back	1cm	OFF	23095	707.5	22.17	23.00	1.211	-0.03	0.324	0.392
	LTE Band 12	10M	QPSK	1	0	Left Side	1cm	OFF	23095	707.5	23.16	24.00	1.213	-0.09	0.298	0.362
	LTE Band 12	10M	QPSK	25	0	Left Side	1cm	OFF	23095	707.5	22.17	23.00	1.211	0.08	0.172	0.208
	LTE Band 12	10M	QPSK	1	0	Right Side	1cm	OFF	23095	707.5	23.16	24.00	1.213	-0.04	0.284	0.345
	LTE Band 12	10M	QPSK	25	0	Right Side	1cm	OFF	23095	707.5	22.17	23.00	1.211	-0.06	0.191	0.231
	LTE Band 12	10M	QPSK	1	0	Bottom Side	1cm	OFF	23095	707.5	23.16	24.00	1.213	0.03	0.176	0.214
	LTE Band 12	10M	QPSK	25	0	Bottom Side	1cm	OFF	23095	707.5	22.17	23.00	1.211	0.08	0.101	0.122
26	LTE Band 17	10M	QPSK	1	0	Front	1cm	OFF	23800	711	23.20	24.00	1.202	-0.11	0.601	<b>0.723</b>
	LTE Band 17	10M	QPSK	25	0	Front	1cm	OFF	23800	711	22.20	23.00	1.202	-0.04	0.356	0.428
	LTE Band 17	10M	QPSK	1	0	Back	1cm	OFF	23800	711	23.20	24.00	1.202	-0.04	0.554	0.666
	LTE Band 17	10M	QPSK	25	0	Back	1cm	OFF	23800	711	22.20	23.00	1.202	-0.06	0.323	0.388
	LTE Band 17	10M	QPSK	1	0	Left Side	1cm	OFF	23800	711	23.20	24.00	1.202	-0.07	0.367	0.441
	LTE Band 17	10M	QPSK	25	0	Left Side	1cm	OFF	23800	711	22.20	23.00	1.202	-0.06	0.218	0.262
	LTE Band 17	10M	QPSK	1	0	Right Side	1cm	OFF	23800	711	23.20	24.00	1.202	-0.13	0.330	0.397
	LTE Band 17	10M	QPSK	25	0	Right Side	1cm	OFF	23800	711	22.20	23.00	1.202	-0.03	0.194	0.233
	LTE Band 17	10M	QPSK	1	0	Bottom Side	1cm	OFF	23800	711	23.20	24.00	1.202	-0.18	0.162	0.195
	LTE Band 17	10M	QPSK	25	0	Bottom Side	1cm	OFF	23800	711	22.20	23.00	1.202	0	0.093	0.112
	LTE Band 5	10M	QPSK	1	0	Front	1cm	OFF	20525	836.5	23.05	24.00	1.245	-0.03	0.508	0.632
	LTE Band 5	10M	QPSK	25	0	Front	1cm	OFF	20450	829	22.15	23.00	1.216	0.01	0.313	0.381
	LTE Band 5	10M	QPSK	1	0	Back	1cm	OFF	20525	836.5	23.05	24.00	1.245	0.11	0.438	0.545
	LTE Band 5	10M	QPSK	25	0	Back	1cm	OFF	20450	829	22.15	23.00	1.216	0.02	0.226	0.275
	LTE Band 5	10M	QPSK	1	0	Left Side	1cm	OFF	20525	836.5	23.05	24.00	1.245	-0.19	0.411	0.511
	LTE Band 5	10M	QPSK	25	0	Left Side	1cm	OFF	20450	829	22.15	23.00	1.216	-0.1	0.262	0.319
27	LTE Band 5	10M	QPSK	1	0	Right Side	1cm	OFF	20525	836.5	23.05	24.00	1.245	-0.11	0.518	<b>0.645</b>
	LTE Band 5	10M	QPSK	25	0	Right Side	1cm	OFF	20450	829	22.15	23.00	1.216	-0.11	0.310	0.377
	LTE Band 5	10M	QPSK	1	0	Bottom Side	1cm	OFF	20525	836.5	23.05	24.00	1.245	-0.03	0.198	0.246
	LTE Band 5	10M	QPSK	25	0	Bottom Side	1cm	OFF	20450	829	22.15	23.00	1.216	-0.12	0.116	0.141



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	0	Front	1cm	OFF	26865	831.5	23.07	24.00	1.239	-0.01	0.533	0.660
	LTE Band 26	15M	QPSK	36	0	Front	1cm	OFF	26765	821.5	22.17	23.00	1.211	-0.1	0.361	0.437
	LTE Band 26	15M	QPSK	1	0	Back	1cm	OFF	26865	831.5	23.07	24.00	1.239	-0.08	0.507	0.628
	LTE Band 26	15M	QPSK	36	0	Back	1cm	OFF	26765	821.5	22.17	23.00	1.211	-0.08	0.328	0.397
	LTE Band 26	15M	QPSK	1	0	Left Side	1cm	OFF	26865	831.5	23.07	24.00	1.239	-0.07	0.431	0.534
	LTE Band 26	15M	QPSK	36	0	Left Side	1cm	OFF	26765	821.5	22.17	23.00	1.211	0.08	0.307	0.372
28	LTE Band 26	15M	QPSK	1	0	Right Side	1cm	OFF	26865	831.5	23.07	24.00	1.239	-0.07	0.540	<b>0.669</b>
	LTE Band 26	15M	QPSK	36	0	Right Side	1cm	OFF	26765	821.5	22.17	23.00	1.211	-0.11	0.351	0.425
	LTE Band 26	15M	QPSK	1	0	Bottom Side	1cm	OFF	26865	831.5	23.07	24.00	1.239	-0.08	0.206	0.255
	LTE Band 26	15M	QPSK	36	0	Bottom Side	1cm	OFF	26765	821.5	22.17	23.00	1.211	0.04	0.125	0.151
	LTE Band 4	20M	QPSK	1	0	Front	1cm	ON	20050	1720		18.50	1.000	-0.01	0.519	0.519
	LTE Band 4	20M	QPSK	50	0	Front	1cm	ON	20050	1720		18.50	1.000	-0.03	0.482	0.482
	LTE Band 4	20M	QPSK	1	0	Back	1cm	ON	20050	1720		18.50	1.000	-0.08	0.516	0.516
	LTE Band 4	20M	QPSK	50	0	Back	1cm	ON	20050	1720		18.50	1.000	-0.07	0.478	0.478
	LTE Band 4	20M	QPSK	1	0	Left Side	1cm	ON	20050	1720		18.50	1.000	0.18	0.064	0.064
	LTE Band 4	20M	QPSK	50	0	Left Side	1cm	ON	20050	1720		18.50	1.000	-0.01	0.061	0.061
	LTE Band 4	20M	QPSK	1	0	Right Side	1cm	ON	20050	1720		18.50	1.000	0.02	0.048	0.048
	LTE Band 4	20M	QPSK	50	0	Right Side	1cm	ON	20050	1720		18.50	1.000	0.07	0.043	0.043
29	LTE Band 4	20M	QPSK	1	0	Bottom Side	1cm	ON	20050	1720		18.50	1.000	-0.13	0.685	<b>0.685</b>
	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	ON	20050	1720		18.50	1.000	-0.16	0.660	0.660
	LTE Band 2	20M	QPSK	1	0	Front	1cm	ON	18900	1880		19.00	1.000	-0.14	0.635	0.635
	LTE Band 2	20M	QPSK	50	0	Front	1cm	ON	18900	1880		19.00	1.000	-0.06	0.595	0.595
	LTE Band 2	20M	QPSK	1	0	Back	1cm	ON	18900	1880		19.00	1.000	-0.06	0.615	0.615
	LTE Band 2	20M	QPSK	50	0	Back	1cm	ON	18900	1880		19.00	1.000	-0.16	0.563	0.563
	LTE Band 2	20M	QPSK	1	0	Left Side	1cm	ON	18900	1880		19.00	1.000	-0.05	0.076	0.076
	LTE Band 2	20M	QPSK	50	0	Left Side	1cm	ON	18900	1880		19.00	1.000	0.04	0.070	0.070
	LTE Band 2	20M	QPSK	1	0	Right Side	1cm	ON	18900	1880		19.00	1.000	-0.15	0.038	0.038
	LTE Band 2	20M	QPSK	50	0	Right Side	1cm	ON	18900	1880		19.00	1.000	-0.04	0.034	0.034
	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	ON	18900	1880		19.00	1.000	-0.19	0.824	0.824
	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	ON	18700	1860		19.00	1.000	-0.18	0.803	0.803
30	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	ON	19100	1900		19.00	1.000	0.05	0.830	<b>0.830</b>
	LTE Band 2	20M	QPSK	50	0	Bottom Side	1cm	ON	18900	1880		19.00	1.000	-0.13	0.778	0.778
	LTE Band 2	20M	QPSK	100	0	Bottom Side	1cm	ON	18900	1880		19.00	1.000	-0.1	0.788	0.788
	LTE Band 25	20M	QPSK	1	0	Front	1cm	ON	26340	1880		19.00	1.000	-0.13	0.798	0.798
	LTE Band 25	20M	QPSK	50	0	Front	1cm	ON	26340	1880		19.00	1.000	-0.17	0.775	0.775
	LTE Band 25	20M	QPSK	1	0	Back	1cm	ON	26340	1880		19.00	1.000	-0.19	0.543	0.543
	LTE Band 25	20M	QPSK	50	0	Back	1cm	ON	26340	1880		19.00	1.000	-0.11	0.511	0.511
	LTE Band 25	20M	QPSK	1	0	Left Side	1cm	ON	26340	1880		19.00	1.000	-0.09	0.084	0.084
	LTE Band 25	20M	QPSK	50	0	Left Side	1cm	ON	26340	1880		19.00	1.000	-0.09	0.080	0.080
	LTE Band 25	20M	QPSK	1	0	Right Side	1cm	ON	26340	1880		19.00	1.000	-0.13	0.040	0.040
	LTE Band 25	20M	QPSK	50	0	Right Side	1cm	ON	26340	1880		19.00	1.000	-0.11	0.037	0.037
	LTE Band 25	20M	QPSK	1	0	Bottom Side	1cm	ON	26340	1880		19.00	1.000	-0.1	0.842	0.842
	LTE Band 25	20M	QPSK	1	0	Bottom Side	1cm	ON	26140	1860		19.00	1.000	-0.03	0.840	0.840
31	LTE Band 25	20M	QPSK	1	0	Bottom Side	1cm	ON	26590	1905		19.00	1.000	-0.19	0.844	<b>0.844</b>
	LTE Band 25	20M	QPSK	50	0	Bottom Side	1cm	ON	26340	1880		19.00	1.000	-0.09	0.825	0.825
	LTE Band 25	20M	QPSK	50	0	Bottom Side	1cm	ON	26140	1860		19.00	1.000	-0.11	0.827	0.827
	LTE Band 25	20M	QPSK	50	0	Bottom Side	1cm	ON	26590	1905		19.00	1.000	-0.05	0.719	0.719
	LTE Band 25	20M	QPSK	100	0	Bottom Side	1cm	ON	26340	1880		19.00	1.000	-0.17	0.744	0.744



**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.127	0.315	0.317
	LTE Band 41	20M	QPSK	50	0	Front	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.13	0.270	0.272
	LTE Band 41	20M	QPSK	1	0	Back	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.06	0.291	0.293
	LTE Band 41	20M	QPSK	50	0	Back	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.1	0.247	0.248
	LTE Band 41	20M	QPSK	1	0	Left Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.04	0.136	0.137
	LTE Band 41	20M	QPSK	50	0	Left Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.01	0.119	0.120
	LTE Band 41	20M	QPSK	1	0	Right Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	0.13	0.027	0.027
	LTE Band 41	20M	QPSK	50	0	Right Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.16	0.028	0.028
32	LTE Band 41	20M	QPSK	1	0	Bottom Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.07	0.639	0.643
	LTE Band 41	20M	QPSK	1	0	Bottom Side	1cm	ON	39750	2506		18.50	1.000	62.9	1.01	-0.07	0.635	0.639
	LTE Band 41	20M	QPSK	1	0	Bottom Side	1cm	ON	41490	2680		18.50	1.000	62.9	1.01	-0.07	0.687	0.691
	LTE Band 41	20M	QPSK	1	0	Bottom Side	1cm	ON	40185	2549.5		18.50	1.000	62.9	1.01	-0.03	0.647	0.651
	LTE Band 41	20M	QPSK	1	0	Bottom Side	1cm	ON	41055	2636.5		18.50	1.000	62.9	1.01	-0.07	0.701	0.705
	LTE Band 41	20M	QPSK	50	0	Bottom Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.02	0.556	0.559
	LTE Band 41	20M	QPSK	100	0	Bottom Side	1cm	ON	40620	2593		18.50	1.000	62.9	1.01	-0.17	0.633	0.637

**14.3 Body Worn Accessory SAR**
**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Front	1.5cm		non-Trigger	189	836.4	29.92	30.00	1.019	-0.05	0.436	0.444
	GSM850	GPRS (3 Tx slots)	Front	1.5cm	Headset	Trigger	189	836.4	29.92	30.00	1.019	0.12	0.334	0.340
33	GSM850	GPRS (3 Tx slots)	Front	1.5cm	Headset	Trigger	148	828.2	29.01	30.00	1.256	0	0.419	0.526
	GSM850	GPRS (3 Tx slots)	Front	1.5cm	Headset	Trigger	231	844.8	28.96	30.00	1.271	0	0.315	0.400
	GSM850	GPRS (3 Tx slots)	Back	1.5cm		non-Trigger	189	836.4	29.92	30.00	1.019	-0.11	0.392	0.399
	GSM1900	GPRS (1 Tx slot)	Front	1.5cm		non-Trigger	661	1880	30.13	30.80	1.167	-0.09	0.726	0.847
	GSM1900	GPRS (1 Tx slot)	Front	1.5cm		non-Trigger	512	1850.2	30.13	30.80	1.167	-0.13	0.606	0.707
34	GSM1900	GPRS (1 Tx slot)	Front	1.5cm		non-Trigger	810	1909.8	29.88	30.80	1.236	-0.1	0.725	0.896
	GSM1900	GPRS (1 Tx slot)	Front	1.5cm	Headset	Trigger	810	1909.8	29.88	30.80	1.236	-0.03	0.689	0.852
	GSM1900	GPRS (1 Tx slot)	Front	1.5cm	Headset	Trigger	512	1850.2	30.13	30.80	1.167	-0.18	0.564	0.658
	GSM1900	GPRS (1 Tx slot)	Front	1.5cm	Headset	Trigger	561	1860	30.09	30.80	1.178	-0.04	0.656	0.773
	GSM1900	GPRS (1 Tx slot)	Front	1.5cm	Headset	Trigger	661	1880	30.13	30.80	1.167	-0.07	0.627	0.732
	GSM1900	GPRS (1 Tx slot)	Back	1.5cm		non-Trigger	661	1880	30.13	30.80	1.167	-0.12	0.677	0.790

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
35	WCDMA V	RMC 12.2Kbps	Front	1.5cm		non-Trigger	4233	846.6	22.94	24.00	1.276	-0.05	0.456	<b>0.582</b>
	WCDMA V	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	4233	846.6	22.94	24.00	1.276	-0.13	0.400	0.511
	WCDMA V	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	4141	828.2	23.19	24.00	1.205	0.04	0.359	0.433
	WCDMA V	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	4182	836.4	23.11	24.00	1.227	0.01	0.343	0.421
	WCDMA V	RMC 12.2Kbps	Back	1.5cm		non-Trigger	4233	846.6	22.94	24.00	1.276	-0.02	0.385	0.491
36	WCDMA IV	RMC 12.2Kbps	Front	1.5cm		non-Trigger	1413	1732.6	22.95	24.00	1.274	-0.06	0.588	<b>0.749</b>
	WCDMA IV	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	1413	1732.6	22.95	24.00	1.274	-0.06	0.469	0.597
	WCDMA IV	RMC 12.2Kbps	Back	1.5cm		non-Trigger	1413	1732.6	22.95	24.00	1.274	-0.1	0.339	0.432
	WCDMA II	RMC 12.2Kbps	Front	1.5cm		non-Trigger	9400	1880	22.86	24.00	1.300	-0.08	0.880	1.144
37	WCDMA II	RMC 12.2Kbps	Front	1.5cm		non-Trigger	9262	1852.4	22.67	24.00	1.358	-0.16	0.857	<b>1.164</b>
	WCDMA II	RMC 12.2Kbps	Front	1.5cm		non-Trigger	9538	1907.6	22.80	24.00	1.318	-0.1	0.828	1.092
	WCDMA II	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	9262	1852.4	22.67	24.00	1.358	-0.12	0.841	1.142
	WCDMA II	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	9400	1880	22.86	24.00	1.300	-0.04	0.872	1.134
	WCDMA II	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	9500	1900	23.12	24.00	1.225	-0.13	0.859	1.052
	WCDMA II	RMC 12.2Kbps	Front	1.5cm	Headset	Trigger	9538	1907.6	22.80	24.00	1.318	-0.04	0.881	1.161
	WCDMA II	RMC 12.2Kbps	Back	1.5cm		non-Trigger	9400	1880	22.86	24.00	1.300	-0.19	0.802	1.043
	WCDMA II	RMC 12.2Kbps	Back	1.5cm		non-Trigger	9262	1852.4	22.67	24.00	1.358	-0.11	0.785	1.066
	WCDMA II	RMC 12.2Kbps	Back	1.5cm		non-Trigger	9538	1907.6	22.80	24.00	1.318	-0.19	0.850	1.121

**<CDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
38	CDMA BC10	1xRTT RC3 SO32	Front	1.5cm		non-Trigger	580	820.5	23.85	25.00	1.303	-0.07	0.521	<b>0.679</b>
	CDMA BC10	1xRTT RC3 SO32	Front	1.5cm	Headset	Trigger	580	820.5	23.85	25.00	1.303	-0.06	0.440	0.573
	CDMA BC10	RETAP 4096 bits	Front	1.5cm		non-Trigger	580	820.5	23.85	25.00	1.303	-0.04	0.425	0.554
	CDMA BC10	1xRTT RC3 SO32	Back	1.5cm		non-Trigger	580	820.5	23.85	25.00	1.303	-0.06	0.463	0.603
39	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm		non-Trigger	777	848.31	23.93	25.00	1.279	-0.04	0.496	<b>0.635</b>
	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm	Headset	Trigger	777	848.31	23.93	25.00	1.279	-0.07	0.491	0.628
	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm	Headset	Trigger	107	828.21	23.99	25.00	1.262	0	0.470	0.593
	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm	Headset	Trigger	383	836.49	24.11	25.00	1.227	0	0.476	0.584
	CDMA BC0	RETAP 4096 bits	Front	1.5cm		non-Trigger	777	848.31	23.92	25.00	1.282	-0.03	0.414	0.531
	CDMA BC0	1xRTT RC3 SO32	Back	1.5cm		non-Trigger	777	848.31	23.93	25.00	1.279	-0.03	0.477	0.610
	CDMA BC1	1xRTT RC3 SO32	Front	1.5cm		non-Trigger	1175	1908.75	24.30	25.00	1.175	-0.01	1.220	1.433
	CDMA BC1	1xRTT RC3 SO32	Front	1.5cm		non-Trigger	25	1851.25	24.21	25.00	1.199	-0.03	1.230	1.475
	CDMA BC1	1xRTT RC3 SO32	Front	1.5cm		non-Trigger	600	1880	24.24	25.00	1.191	-0.11	1.200	1.429
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm		non-Trigger	1175	1908.75	24.30	25.00	1.175	-0.14	1.240	1.457
40	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm		non-Trigger	25	1851.25	24.21	25.00	1.199	-0.03	1.250	<b>1.499</b>
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm		non-Trigger	600	1880	24.24	25.00	1.191	-0.02	1.230	1.465
	CDMA BC1	RETAP 4096 bits	Back	1.5cm		non-Trigger	1175	1908.75	24.26	25.00	1.186	-0.19	1.150	1.364
	CDMA BC1	RETAP 4096 bits	Back	1.5cm		non-Trigger	25	1851.25	24.25	25.00	1.189	-0.16	1.170	1.391
	CDMA BC1	RETAP 4096 bits	Back	1.5cm		non-Trigger	600	1880	24.23	25.00	1.194	-0.14	1.130	1.349
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	non-Trigger	1175	1908.75	24.30	25.00	1.175	-0.14	0.789	0.927
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	non-Trigger	25	1851.25	24.21	25.00	1.199	-0.12	0.788	0.945
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	non-Trigger	600	1880	24.24	25.00	1.191	-0.11	0.790	0.941
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	Trigger	25	1851.25	24.21	25.00	1.199	0.19	0.786	0.943
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	Trigger	600	1880	24.24	25.00	1.191	-0.13	0.824	0.982
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	Trigger	1000	1900	24.19	25.00	1.205	-0.02	0.781	0.941
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	Trigger	1175	1908.75	24.30	25.00	1.175	0.03	0.876	1.029



**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
41	LTE Band 12	10M	QPSK	1	0	Front	1.5cm		non-Trigger	23095	707.5	23.16	24.00	1.213	-0.09	0.424	<b>0.514</b>
	LTE Band 12	10M	QPSK	25	0	Front	1.5cm		non-Trigger	23095	707.5	22.17	23.00	1.211	0	0.246	0.298
	LTE Band 12	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	23095	707.5	23.16	24.00	1.213	-0.04	0.322	0.391
	LTE Band 12	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	23060	704	23.16	24.00	1.213	0.01	0.345	0.419
	LTE Band 12	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	23130	711	23.16	24.00	1.213	-0.07	0.361	0.438
	LTE Band 12	10M	QPSK	25	0	Front	1.5cm	Headset	Trigger	23095	707.5	22.17	23.00	1.211	-0.07	0.187	0.226
	LTE Band 12	10M	QPSK	1	0	Back	1.5cm		non-Trigger	23095	707.5	23.16	24.00	1.213	-0.07	0.390	0.473
	LTE Band 12	10M	QPSK	25	0	Back	1.5cm		non-Trigger	23095	707.5	22.17	23.00	1.211	-0.05	0.229	0.277
42	LTE Band 17	10M	QPSK	1	0	Front	1.5cm		non-Trigger	23800	711	23.20	24.00	1.202	0.12	0.422	<b>0.507</b>
	LTE Band 17	10M	QPSK	25	0	Front	1.5cm		non-Trigger	23800	711	22.20	23.00	1.202	0.15	0.250	0.301
	LTE Band 17	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	23800	711	23.20	24.00	1.202	-0.01	0.335	0.403
	LTE Band 17	10M	QPSK	25	0	Front	1.5cm	Headset	Trigger	23800	711	22.20	23.00	1.202	0.03	0.203	0.244
	LTE Band 17	10M	QPSK	1	0	Back	1.5cm		non-Trigger	23800	711	23.20	24.00	1.202	-0.05	0.395	0.475
	LTE Band 17	10M	QPSK	25	0	Back	1.5cm		non-Trigger	23800	711	22.20	23.00	1.202	0	0.235	0.283
43	LTE Band 5	10M	QPSK	1	0	Front	1.5cm		non-Trigger	20525	836.5	23.05	24.00	1.245	-0.09	0.372	<b>0.463</b>
	LTE Band 5	10M	QPSK	25	0	Front	1.5cm		non-Trigger	20450	829	22.15	23.00	1.216	0	0.234	0.285
	LTE Band 5	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	20525	836.5	23.05	24.00	1.245	-0.15	0.361	0.449
	LTE Band 5	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	20450	829	23.01	24.00	1.256	0.01	0.354	0.445
	LTE Band 5	10M	QPSK	1	0	Front	1.5cm	Headset	Trigger	20600	844	23.02	24.00	1.253	0.02	0.331	0.415
	LTE Band 5	10M	QPSK	25	0	Front	1.5cm	Headset	Trigger	20450	829	22.15	23.00	1.216	-0.06	0.222	0.270
	LTE Band 5	10M	QPSK	1	0	Back	1.5cm		non-Trigger	20525	836.5	23.05	24.00	1.245	-0.06	0.339	0.422
	LTE Band 5	10M	QPSK	25	0	Back	1.5cm		non-Trigger	20450	829	22.15	23.00	1.216	-0.02	0.210	0.255
44	LTE Band 26	15M	QPSK	1	0	Front	1.5cm		non-Trigger	26865	831.5	23.07	24.00	1.239	-0.07	0.437	<b>0.541</b>
	LTE Band 26	15M	QPSK	36	0	Front	1.5cm		non-Trigger	26765	821.5	22.17	23.00	1.211	-0.07	0.288	0.349
	LTE Band 26	15M	QPSK	1	0	Front	1.5cm	Headset	Trigger	26865	831.5	23.07	24.00	1.239	-0.08	0.387	0.479
	LTE Band 26	15M	QPSK	1	0	Front	1.5cm	Headset	Trigger	26765	821.5	23.05	24.00	1.245	0	0.401	0.499
	LTE Band 26	15M	QPSK	1	0	Front	1.5cm	Headset	Trigger	26965	841.5	23.06	24.00	1.242	-0.01	0.363	0.451
	LTE Band 26	15M	QPSK	36	0	Front	1.5cm	Headset	Trigger	26765	821.5	22.17	23.00	1.211	-0.11	0.246	0.298
	LTE Band 26	15M	QPSK	1	0	Back	1.5cm		non-Trigger	26865	831.5	23.07	24.00	1.239	-0.01	0.387	0.479
	LTE Band 26	15M	QPSK	36	0	Back	1.5cm		non-Trigger	26765	821.5	22.17	23.00	1.211	-0.17	0.254	0.307
	LTE Band 4	20M	QPSK	1	0	Front	1.5cm		non-Trigger	20050	1720	23.51	24.00	1.119	-0.11	0.462	0.517
	LTE Band 4	20M	QPSK	50	0	Front	1.5cm		non-Trigger	20050	1720	22.57	23.00	1.104	-0.07	0.368	0.406
45	LTE Band 4	20M	QPSK	1	0	Back	1.5cm		non-Trigger	20050	1720	23.51	24.00	1.119	-0.19	0.467	<b>0.523</b>
	LTE Band 4	20M	QPSK	50	0	Back	1.5cm		non-Trigger	20050	1720	22.57	23.00	1.104	-0.1	0.371	0.410
	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	Headset	Trigger	20050	1720	23.51	24.00	1.119	-0.11	0.356	0.399
	LTE Band 4	20M	QPSK	50	0	Back	1.5cm	Headset	Trigger	20050	1720	22.57	23.00	1.104	0.12	0.284	0.314



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm		non-Trigger	18900	1880	23.55	24.00	1.109	-0.1	0.955	1.059
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm		non-Trigger	18700	1860	23.34	24.00	1.164	-0.09	0.964	1.122
46	LTE Band 2	20M	QPSK	1	0	Front	1.5cm		non-Trigger	19100	1900	23.42	24.00	1.143	-0.07	1.030	1.177
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm		non-Trigger	18900	1880	22.54	23.00	1.112	-0.06	0.871	0.968
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm		non-Trigger	18700	1860	22.44	23.00	1.138	-0.11	0.867	0.986
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm		non-Trigger	19100	1900	22.46	23.00	1.132	-0.08	0.880	0.997
	LTE Band 2	20M	QPSK	100	0	Front	1.5cm		non-Trigger	18900	1880	22.50	23.00	1.122	-0.04	0.888	0.996
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	18900	1880	23.55	24.00	1.109	-0.01	1.020	1.131
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	18700	1860	23.34	24.00	1.164	-0.1	0.999	1.163
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	19100	1900	23.42	24.00	1.143	0.01	1.020	1.166
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	18900	1900	22.54	23.00	1.112	-0.11	0.834	0.927
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	18700	1860	22.44	23.00	1.138	-0.09	0.828	0.942
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	19100	1900	22.46	23.00	1.132	-0.16	0.828	0.938
	LTE Band 2	20M	QPSK	100	0	Front	1.5cm	Headset	Trigger	18900	1880	22.50	23.00	1.122	-0.14	0.844	0.947
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm		non-Trigger	18900	1880	23.55	24.00	1.109	-0.02	0.956	1.060
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm		non-Trigger	18700	1860	23.34	24.00	1.164	-0.03	0.820	0.955
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm		non-Trigger	19100	1900	23.42	24.00	1.143	-0.08	0.977	1.117
	LTE Band 2	20M	QPSK	50	0	Back	1.5cm		non-Trigger	18900	1880	22.54	23.00	1.112	-0.12	0.771	0.857
	LTE Band 2	20M	QPSK	50	0	Back	1.5cm		non-Trigger	18700	1860	22.44	23.00	1.138	-0.15	0.767	0.873
	LTE Band 2	20M	QPSK	50	0	Back	1.5cm		non-Trigger	19100	1900	22.46	23.00	1.132	-0.11	0.778	0.881
	LTE Band 2	20M	QPSK	100	0	Back	1.5cm		non-Trigger	18900	1880	22.50	23.00	1.122	-0.1	0.850	0.954
	LTE Band 25	20M	QPSK	1	0	Front	1.5cm		non-Trigger	26340	1880	23.52	24.00	1.117	-0.09	0.954	1.065
	LTE Band 25	20M	QPSK	1	0	Front	1.5cm		non-Trigger	26140	1860	23.47	24.00	1.130	-0.08	0.973	1.099
	LTE Band 25	20M	QPSK	1	0	Front	1.5cm		non-Trigger	26590	1905	23.46	24.00	1.132	-0.08	0.985	1.115
	LTE Band 25	20M	QPSK	50	0	Front	1.5cm		non-Trigger	26340	1880	22.54	23.00	1.112	-0.05	0.792	0.880
	LTE Band 25	20M	QPSK	50	0	Front	1.5cm		non-Trigger	26140	1860	22.48	23.00	1.127	-0.11	0.739	0.833
	LTE Band 25	20M	QPSK	50	0	Front	1.5cm		non-Trigger	26590	1905	22.50	23.00	1.122	-0.12	0.741	0.831
	LTE Band 25	20M	QPSK	100	0	Front	1.5cm		non-Trigger	26340	1880	22.50	23.00	1.122	-0.11	0.781	0.876
	LTE Band 25	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	26340	1880	23.52	24.00	1.117	0	1.020	1.139
	LTE Band 25	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	26140	1860	23.47	24.00	1.130	-0.12	1.000	1.130
47	LTE Band 25	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	26590	1905	23.46	24.00	1.132	-0.08	1.050	1.189
	LTE Band 25	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	26340	1880	22.54	23.00	1.112	-0.14	0.808	0.898
	LTE Band 25	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	26140	1860	22.48	23.00	1.127	0.08	0.804	0.906
	LTE Band 25	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	26590	1905	22.50	23.00	1.122	-0.1	0.823	0.923
	LTE Band 25	20M	QPSK	100	0	Front	1.5cm	Headset	Trigger	26340	1880	22.50	23.00	1.122	-0.04	0.841	0.944
	LTE Band 25	20M	QPSK	1	0	Back	1.5cm		non-Trigger	26340	1880	23.52	24.00	1.117	-0.03	0.768	0.858
	LTE Band 25	20M	QPSK	1	0	Back	1.5cm		non-Trigger	26140	1860	23.47	24.00	1.130	-0.12	0.794	0.897
	LTE Band 25	20M	QPSK	1	0	Back	1.5cm		non-Trigger	26590	1905	23.46	24.00	1.132	-0.08	0.794	0.899
	LTE Band 25	20M	QPSK	50	0	Back	1.5cm		non-Trigger	26340	1880	22.54	23.00	1.112	-0.06	0.667	0.742
	LTE Band 25	20M	QPSK	100	0	Back	1.5cm		non-Trigger	26340	1880	22.50	23.00	1.122	-0.07	0.674	0.756

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm		non-Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	0.02	0.588	0.671
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm		non-Trigger	39750	2506	23.31	24.00	1.172	62.9	1.01	-0.1	0.551	0.650
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm		non-Trigger	41490	2680	23.30	24.00	1.175	62.9	1.01	-0.09	0.634	0.749
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm		non-Trigger	40185	2549.5	23.35	24.00	1.161	62.9	1.01	-0.04	0.577	0.674
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm		non-Trigger	41055	2636.5	23.20	24.00	1.202	62.9	1.01	-0.06	0.606	0.733
	LTE Band 41	20M	QPSK	50	0	Front	1.5cm		non-Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	-0.17	0.324	0.367
	LTE Band 41	20M	QPSK	100	0	Front	1.5cm		non-Trigger	40620	2593	22.40	23.00	1.148	62.9	1.01	0.12	0.365	0.422
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	-0.18	0.592	0.676
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	39750	2506	23.31	24.00	1.172	62.9	1.01	-0.17	0.562	0.663
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	41490	2680	23.30	24.00	1.175	62.9	1.01	-0.17	0.639	0.755
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	40185	2549.5	23.35	24.00	1.161	62.9	1.01	0.07	0.572	0.668
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	41055	2636.5	23.20	24.00	1.202	62.9	1.01	-0.12	0.624	0.755
	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	39973	2528.3	23.11	24.00	1.227	62.9	1.01	-0.1	0.579	0.715
48	LTE Band 41	20M	QPSK	1	0	Front	1.5cm	Headset	Trigger	41267	2657.7	23.06	24.00	1.242	62.9	1.01	0.05	0.632	0.789
	LTE Band 41	20M	QPSK	50	0	Front	1.5cm	Headset	Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	-0.09	0.328	0.371
	LTE Band 41	20M	QPSK	100	0	Front	1.5cm	Headset	Trigger	40620	2593	22.40	23.00	1.148	62.9	1.01	-0.04	0.350	0.404
	LTE Band 41	20M	QPSK	1	0	Back	1.5cm		non-Trigger	40620	2593	23.45	24.00	1.135	62.9	1.01	-0.13	0.579	0.661
	LTE Band 41	20M	QPSK	1	0	Back	1.5cm		non-Trigger	39750	2506	23.31	24.00	1.172	62.9	1.01	-0.04	0.583	0.687
	LTE Band 41	20M	QPSK	1	0	Back	1.5cm		non-Trigger	41490	2680	23.30	24.00	1.175	62.9	1.01	0.04	0.554	0.655
	LTE Band 41	20M	QPSK	1	0	Back	1.5cm		non-Trigger	40185	2549.5	23.35	24.00	1.161	62.9	1.01	-0.1	0.600	0.701
	LTE Band 41	20M	QPSK	1	0	Back	1.5cm		non-Trigger	41055	2636.5	23.20	24.00	1.202	62.9	1.01	-0.06	0.575	0.695
	LTE Band 41	20M	QPSK	50	0	Back	1.5cm		non-Trigger	40620	2593	22.49	23.00	1.125	62.9	1.01	-0.17	0.337	0.381
	LTE Band 41	20M	QPSK	100	0	Back	1.5cm		non-Trigger	40620	2593	22.40	23.00	1.148	62.9	1.01	-0.04	0.345	0.398

**14.4 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (cm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	non-Trigger	25	1851.25	24.21	25.00	1.199	-0.03	1.250	-	1.499
2nd	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	non-Trigger	25	1851.25	24.21	25.00	1.199	-0.05	1.240	1.01	1.487

**General Note:**

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

## 15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Mobile Phone			Note
		Head	Body-worn	Wireless Router	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	CDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
4.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
5.	WCDMA(Voice) + Bluetooth(data)	Yes	Yes		
6.	CDMA(Voice) + Bluetooth(data)	Yes	Yes		
7.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
8.	WCDMA(Voice) + WLAN5GHz(data)	Yes	Yes		
9.	CDMA(Voice) + WLAN5GHz(data)	Yes	Yes		
10.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
11.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
12.	CDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
13.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
14.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
15.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
16.	CDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
17.	LTE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
18.	GPRS/EDGE(Data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
19.	WCDMA(Data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
20.	CDMA(Data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
21.	LTE(Data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct

**General Note:**

- This device supported VoIP in EGPRS, WCDMA, CDMA, LTE (e.g. 3rd party VoIP).
- The 2.4GHz / 5GHz WLAN and Bluetooth conducted power and SAR testing results were referred to Sporton FCC SAR Test Report, Brand Name: Motorola Mobility LLC, Model Name: 3578, FCC ID: IHDT56QA1, Report No: FA442943A and also used to perform transmission simultaneous analysis.
- The worst case 2.4GHz / 5GHz WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with the WLAN.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation < 1.6W/kg.
  - $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
  - If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
  - The SPLSR calculated results please refer to section 15.4.



**15.1 Head Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.561	0.788	0.189	<b>1.35</b>	<b>0.75</b>		
		Right Tilted	0.163	0.248	0.058	<b>0.41</b>	<b>0.22</b>		
		Left Cheek	0.297	0.178	0.041	<b>0.48</b>	<b>0.34</b>		
		Left Tilted	0.188	0.201	0.044	<b>0.39</b>	<b>0.23</b>		
	GSM1900	Right Cheek	0.179	0.788	0.189	<b>0.97</b>	<b>0.37</b>		
		Right Tilted	0.089	0.248	0.058	<b>0.34</b>	<b>0.15</b>		
		Left Cheek	0.339	0.178	0.041	<b>0.52</b>	<b>0.38</b>		
		Left Tilted	0.085	0.201	0.044	<b>0.29</b>	<b>0.13</b>		
WCMDA	Band V	Right Cheek	0.481	0.788	0.189	<b>1.27</b>	<b>0.67</b>		
		Right Tilted	0.241	0.248	0.058	<b>0.49</b>	<b>0.30</b>		
		Left Cheek	0.393	0.178	0.041	<b>0.57</b>	<b>0.43</b>		
		Left Tilted	0.236	0.201	0.044	<b>0.44</b>	<b>0.28</b>		
	Band IV	Right Cheek	0.185	0.788	0.189	<b>0.97</b>	<b>0.37</b>		
		Right Tilted	0.080	0.248	0.058	<b>0.33</b>	<b>0.14</b>		
		Left Cheek	0.469	0.178	0.041	<b>0.65</b>	<b>0.51</b>		
		Left Tilted	0.085	0.201	0.044	<b>0.29</b>	<b>0.13</b>		
	Band II	Right Cheek	0.247	0.788	0.189	<b>1.04</b>	<b>0.44</b>		
		Right Tilted	0.256	0.248	0.058	<b>0.50</b>	<b>0.31</b>		
		Left Cheek	0.514	0.178	0.041	<b>0.69</b>	<b>0.56</b>		
		Left Tilted	0.243	0.201	0.044	<b>0.44</b>	<b>0.29</b>		
CDMA	BC10	Right Cheek	0.540	0.788	0.189	<b>1.33</b>	<b>0.73</b>		
		Right Tilted	0.301	0.248	0.058	<b>0.55</b>	<b>0.36</b>		
		Left Cheek	0.476	0.178	0.041	<b>0.65</b>	<b>0.52</b>		
		Left Tilted	0.329	0.201	0.044	<b>0.53</b>	<b>0.37</b>		
	BC0	Right Cheek	0.615	0.788	0.189	<b>1.40</b>	<b>0.80</b>		
		Right Tilted	0.267	0.248	0.058	<b>0.52</b>	<b>0.33</b>		
		Left Cheek	0.443	0.178	0.041	<b>0.62</b>	<b>0.48</b>		
		Left Tilted	0.266	0.201	0.044	<b>0.47</b>	<b>0.31</b>		
	BC1	Right Cheek	0.261	0.788	0.189	<b>1.05</b>	<b>0.45</b>		
		Right Tilted	0.169	0.248	0.058	<b>0.42</b>	<b>0.23</b>		
		Left Cheek	0.761	0.178	0.041	<b>0.94</b>	<b>0.80</b>		
		Left Tilted	0.147	0.201	0.044	<b>0.35</b>	<b>0.19</b>		



WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE	Band 12	Right Cheek	0.460	0.788	0.189	<b>1.25</b>	<b>0.65</b>		
		Right Tilted	0.192	0.248	0.058	<b>0.44</b>	<b>0.25</b>		
		Left Cheek	0.360	0.178	0.041	<b>0.54</b>	<b>0.40</b>		
		Left Tilted	0.209	0.201	0.044	<b>0.41</b>	<b>0.25</b>		
	Band 17	Right Cheek	0.426	0.788	0.189	<b>1.21</b>	<b>0.62</b>		
		Right Tilted	0.201	0.248	0.058	<b>0.45</b>	<b>0.26</b>		
		Left Cheek	0.371	0.178	0.041	<b>0.55</b>	<b>0.41</b>		
		Left Tilted	0.227	0.201	0.044	<b>0.43</b>	<b>0.27</b>		
	Band 5	Right Cheek	0.444	0.788	0.189	<b>1.23</b>	<b>0.63</b>		
		Right Tilted	0.273	0.248	0.058	<b>0.52</b>	<b>0.33</b>		
		Left Cheek	0.417	0.178	0.041	<b>0.60</b>	<b>0.46</b>		
		Left Tilted	0.270	0.201	0.044	<b>0.47</b>	<b>0.31</b>		
	Band 26	Right Cheek	0.470	0.788	0.189	<b>1.26</b>	<b>0.66</b>		
		Right Tilted	0.239	0.248	0.058	<b>0.49</b>	<b>0.30</b>		
		Left Cheek	0.394	0.178	0.041	<b>0.57</b>	<b>0.44</b>		
		Left Tilted	0.254	0.201	0.044	<b>0.46</b>	<b>0.30</b>		
	Band 4	Right Cheek	0.252	0.788	0.189	<b>1.04</b>	<b>0.44</b>		
		Right Tilted	0.153	0.248	0.058	<b>0.40</b>	<b>0.21</b>		
		Left Cheek	0.376	0.178	0.041	<b>0.55</b>	<b>0.42</b>		
		Left Tilted	0.162	0.201	0.044	<b>0.36</b>	<b>0.21</b>		
	Band 2	Right Cheek	0.273	0.788	0.189	<b>1.06</b>	<b>0.46</b>		
		Right Tilted	0.142	0.248	0.058	<b>0.39</b>	<b>0.20</b>		
		Left Cheek	0.562	0.178	0.041	<b>0.74</b>	<b>0.60</b>		
		Left Tilted	0.080	0.201	0.044	<b>0.28</b>	<b>0.12</b>		
	Band 25	Right Cheek	0.259	0.788	0.189	<b>1.05</b>	<b>0.45</b>		
		Right Tilted	0.115	0.248	0.058	<b>0.36</b>	<b>0.17</b>		
		Left Cheek	0.479	0.178	0.041	<b>0.66</b>	<b>0.52</b>		
		Left Tilted	0.077	0.201	0.044	<b>0.28</b>	<b>0.12</b>		
	Band 41	Right Cheek	0.263	0.788	0.189	<b>1.05</b>	<b>0.45</b>		
		Right Tilted	0.179	0.248	0.058	<b>0.43</b>	<b>0.24</b>		
		Left Cheek	0.405	0.178	0.041	<b>0.58</b>	<b>0.45</b>		
		Left Tilted	0.151	0.201	0.044	<b>0.35</b>	<b>0.20</b>		



WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.3GHz / 5.5GHz / 5.8GHz WLAN				
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.561	5.2GHz WLAN	1.462	2.02	0.03	Case 1
		Right Tilted	0.163	5.2GHz WLAN	1.106	1.27		
		Left Cheek	0.297	5.2GHz WLAN	0.345	0.64		
		Left Tilted	0.188	5.2GHz WLAN	0.381	0.57		
	GSM1900	Right Cheek	0.179	5.2GHz WLAN	1.462	1.64	0.04	Case 2
		Right Tilted	0.089	5.2GHz WLAN	1.106	1.20		
		Left Cheek	0.339	5.2GHz WLAN	0.345	0.68		
		Left Tilted	0.085	5.2GHz WLAN	0.381	0.47		
WCMDA	Band V	Right Cheek	0.481	5.2GHz WLAN	1.462	1.94	0.03	Case 3
		Right Tilted	0.241	5.2GHz WLAN	1.106	1.35		
		Left Cheek	0.393	5.2GHz WLAN	0.345	0.74		
		Left Tilted	0.236	5.2GHz WLAN	0.381	0.62		
	Band IV	Right Cheek	0.185	5.2GHz WLAN	1.462	1.65	0.02	Case 4
		Right Tilted	0.080	5.2GHz WLAN	1.106	1.19		
		Left Cheek	0.469	5.2GHz WLAN	0.345	0.81		
		Left Tilted	0.085	5.2GHz WLAN	0.381	0.47		
	Band II	Right Cheek	0.247	5.2GHz WLAN	1.462	1.71	0.02	Case 5
		Right Tilted	0.256	5.2GHz WLAN	1.106	1.36		
		Left Cheek	0.514	5.2GHz WLAN	0.345	0.86		
		Left Tilted	0.243	5.2GHz WLAN	0.381	0.62		
CDMA	BC10	Right Cheek	0.540	5.2GHz WLAN	1.462	2.00	0.04	Case 6
		Right Tilted	0.301	5.2GHz WLAN	1.106	1.41		
		Left Cheek	0.476	5.2GHz WLAN	0.345	0.82		
		Left Tilted	0.329	5.2GHz WLAN	0.381	0.71		
	BC0	Right Cheek	0.615	5.2GHz WLAN	1.462	2.08	0.04	Case 7
		Right Tilted	0.267	5.2GHz WLAN	1.106	1.37		
		Left Cheek	0.443	5.2GHz WLAN	0.345	0.79		
		Left Tilted	0.266	5.2GHz WLAN	0.381	0.65		
	BC1	Right Cheek	0.261	5.2GHz WLAN	1.462	1.72	0.04	Case 8
		Right Tilted	0.169	5.2GHz WLAN	1.106	1.28		
		Left Cheek	0.761	5.2GHz WLAN	0.345	1.11		
		Left Tilted	0.147	5.2GHz WLAN	0.381	0.53		

WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.3GHz / 5.5GHz / 5.8GHz WLAN				
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
LTE	Band 12	Right Cheek	0.460	5.2GHz WLAN	1.462	1.92	0.03	Case 9
		Right Tilted	0.192	5.2GHz WLAN	1.106	1.30		
		Left Cheek	0.360	5.2GHz WLAN	0.345	0.71		
		Left Tilted	0.209	5.2GHz WLAN	0.381	0.59		
	Band 17	Right Cheek	0.426	5.2GHz WLAN	1.462	1.89	0.03	Case 10
		Right Tilted	0.201	5.2GHz WLAN	1.106	1.31		
		Left Cheek	0.371	5.2GHz WLAN	0.345	0.72		
		Left Tilted	0.227	5.2GHz WLAN	0.381	0.61		
	Band 5	Right Cheek	0.444	5.2GHz WLAN	1.462	1.91	0.03	Case 11
		Right Tilted	0.273	5.2GHz WLAN	1.106	1.38		
		Left Cheek	0.417	5.2GHz WLAN	0.345	0.76		
		Left Tilted	0.270	5.2GHz WLAN	0.381	0.65		
	Band 26	Right Cheek	0.470	5.2GHz WLAN	1.462	1.93	0.03	Case 12
		Right Tilted	0.239	5.2GHz WLAN	1.106	1.35		
		Left Cheek	0.394	5.2GHz WLAN	0.345	0.74		
		Left Tilted	0.254	5.2GHz WLAN	0.381	0.64		
	Band 4	Right Cheek	0.252	5.2GHz WLAN	1.462	1.71	0.02	Case 13
		Right Tilted	0.153	5.2GHz WLAN	1.106	1.26		
		Left Cheek	0.376	5.2GHz WLAN	0.345	0.72		
		Left Tilted	0.162	5.2GHz WLAN	0.381	0.54		
	Band 2	Right Cheek	0.273	5.2GHz WLAN	1.462	1.74	0.04	Case 14
		Right Tilted	0.142	5.2GHz WLAN	1.106	1.25		
		Left Cheek	0.562	5.2GHz WLAN	0.345	0.91		
		Left Tilted	0.080	5.2GHz WLAN	0.381	0.46		
	Band 25	Right Cheek	0.259	5.2GHz WLAN	1.462	1.72	0.02	Case 15
		Right Tilted	0.115	5.2GHz WLAN	1.106	1.22		
		Left Cheek	0.479	5.2GHz WLAN	0.345	0.82		
		Left Tilted	0.077	5.2GHz WLAN	0.381	0.46		
	Band 41	Right Cheek	0.263	5.2GHz WLAN	1.462	1.73	0.04	Case 16
		Right Tilted	0.179	5.2GHz WLAN	1.106	1.29		
		Left Cheek	0.405	5.2GHz WLAN	0.345	0.75		
		Left Tilted	0.151	5.2GHz WLAN	0.381	0.53		



## 15.2 Wireless Router Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.549	0.077	0.024	<b>0.63</b>	<b>0.57</b>		
		Back	0.500	0.05	0.019	<b>0.55</b>	<b>0.52</b>		
		Left side	0.425	0.156	0.037	<b>0.58</b>	<b>0.46</b>		
		Right side	0.640			<b>0.64</b>	<b>0.64</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.204			<b>0.20</b>	<b>0.20</b>		
	GSM1900	Front	0.455	0.077	0.024	<b>0.53</b>	<b>0.48</b>		
		Back	0.452	0.05	0.019	<b>0.50</b>	<b>0.47</b>		
		Left side	0.073	0.156	0.037	<b>0.23</b>	<b>0.11</b>		
		Right side	0.035			<b>0.04</b>	<b>0.04</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.649			<b>0.65</b>	<b>0.65</b>		
WCMDA	Band V	Front	0.679	0.077	0.024	<b>0.76</b>	<b>0.70</b>		
		Back	0.617	0.05	0.019	<b>0.67</b>	<b>0.64</b>		
		Left side	0.560	0.156	0.037	<b>0.72</b>	<b>0.60</b>		
		Right side	0.803			<b>0.80</b>	<b>0.80</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.290			<b>0.29</b>	<b>0.29</b>		
	Band IV	Front	0.546	0.077	0.024	<b>0.62</b>	<b>0.57</b>		
		Back	0.327	0.05	0.019	<b>0.38</b>	<b>0.35</b>		
		Left side	0.015	0.156	0.037	<b>0.17</b>	<b>0.05</b>		
		Right side	0.011			<b>0.01</b>	<b>0.01</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.638			<b>0.64</b>	<b>0.64</b>		
	Band II	Front	0.592	0.077	0.024	<b>0.67</b>	<b>0.62</b>		
		Back	0.501	0.05	0.019	<b>0.55</b>	<b>0.52</b>		
		Left side	0.081	0.156	0.037	<b>0.24</b>	<b>0.12</b>		
		Right side	0.038			<b>0.04</b>	<b>0.04</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.799			<b>0.80</b>	<b>0.80</b>		
CDMA	BC10	Front	0.799	0.077	0.024	<b>0.88</b>	<b>0.82</b>		
		Back	0.797	0.05	0.019	<b>0.85</b>	<b>0.82</b>		
		Left side	0.501	0.156	0.037	<b>0.66</b>	<b>0.54</b>		
		Right side	0.750			<b>0.75</b>	<b>0.75</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.251			<b>0.25</b>	<b>0.25</b>		
	BC0	Front	0.657	0.077	0.024	<b>0.73</b>	<b>0.68</b>		
		Back	0.600	0.05	0.019	<b>0.65</b>	<b>0.62</b>		
		Left side	0.380	0.156	0.037	<b>0.54</b>	<b>0.42</b>		
		Right side	0.662			<b>0.66</b>	<b>0.66</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.284			<b>0.28</b>	<b>0.28</b>		
	BC1	Front	0.611	0.077	0.024	<b>0.69</b>	<b>0.64</b>		
		Back	0.472	0.05	0.019	<b>0.52</b>	<b>0.49</b>		
		Left side	0.088	0.156	0.037	<b>0.24</b>	<b>0.13</b>		
		Right side	0.042			<b>0.04</b>	<b>0.04</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.762			<b>0.76</b>	<b>0.76</b>		

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	2.4GHz Bluetooth 1g SAR (W/kg)				
LTE	Band 12	Front	0.679	0.077	0.024	<b>0.76</b>	<b>0.70</b>		
		Back	0.671	0.05	0.019	<b>0.72</b>	<b>0.69</b>		
		Left side	0.362	0.156	0.037	<b>0.52</b>	<b>0.40</b>		
		Right side	0.345			<b>0.35</b>	<b>0.35</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.214			<b>0.21</b>	<b>0.21</b>		
	Band 17	Front	0.723	0.077	0.024	<b>0.80</b>	<b>0.75</b>		
		Back	0.666	0.05	0.019	<b>0.72</b>	<b>0.69</b>		
		Left side	0.441	0.156	0.037	<b>0.60</b>	<b>0.48</b>		
		Right side	0.397			<b>0.40</b>	<b>0.40</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.195			<b>0.20</b>	<b>0.20</b>		
	Band 5	Front	0.632	0.077	0.024	<b>0.71</b>	<b>0.66</b>		
		Back	0.545	0.05	0.019	<b>0.60</b>	<b>0.56</b>		
		Left side	0.511	0.156	0.037	<b>0.67</b>	<b>0.55</b>		
		Right side	0.645			<b>0.65</b>	<b>0.65</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.246			<b>0.25</b>	<b>0.25</b>		
	Band 26	Front	0.660	0.077	0.024	<b>0.74</b>	<b>0.68</b>		
		Back	0.628	0.05	0.019	<b>0.68</b>	<b>0.65</b>		
		Left side	0.534	0.156	0.037	<b>0.69</b>	<b>0.57</b>		
		Right side	0.669			<b>0.67</b>	<b>0.67</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.255			<b>0.26</b>	<b>0.26</b>		
	Band 4	Front	0.519	0.077	0.024	<b>0.60</b>	<b>0.54</b>		
		Back	0.516	0.05	0.019	<b>0.57</b>	<b>0.54</b>		
		Left side	0.064	0.156	0.037	<b>0.22</b>	<b>0.10</b>		
		Right side	0.048			<b>0.05</b>	<b>0.05</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.685			<b>0.69</b>	<b>0.69</b>		
	Band 2	Front	0.635	0.077	0.024	<b>0.71</b>	<b>0.66</b>		
		Back	0.615	0.05	0.019	<b>0.67</b>	<b>0.63</b>		
		Left side	0.076	0.156	0.037	<b>0.23</b>	<b>0.11</b>		
		Right side	0.038			<b>0.04</b>	<b>0.04</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.830			<b>0.83</b>	<b>0.83</b>		
	Band 25	Front	0.798	0.077	0.024	<b>0.88</b>	<b>0.82</b>		
		Back	0.543	0.05	0.019	<b>0.59</b>	<b>0.56</b>		
		Left side	0.084	0.156	0.037	<b>0.24</b>	<b>0.12</b>		
		Right side	0.040			<b>0.04</b>	<b>0.04</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.844			<b>0.84</b>	<b>0.84</b>		
	Band 41	Front	0.317	0.077	0.024	<b>0.39</b>	<b>0.34</b>		
		Back	0.293	0.05	0.019	<b>0.34</b>	<b>0.31</b>		
		Left side	0.137	0.156	0.037	<b>0.29</b>	<b>0.17</b>		
		Right side	0.028			<b>0.03</b>	<b>0.03</b>		
		Top side		0.042	0.011	<b>0.04</b>	<b>0.01</b>		
		Bottom side	0.643			<b>0.64</b>	<b>0.64</b>		

WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.8GHz WLAN				
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
GSM	GSM850	Front	0.549	5.2GHz WLAN	0.134	0.68		
		Back	0.500	5.8GHz WLAN	0.212	0.71		
		Left side	0.425	5.2GHz WLAN	0.141	0.57		
		Right side	0.640			0.64		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.204			0.20		
	GSM1900	Front	0.455	5.2GHz WLAN	0.134	0.59		
		Back	0.452	5.8GHz WLAN	0.212	0.66		
		Left side	0.073	5.2GHz WLAN	0.141	0.21		
		Right side	0.035			0.04		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.649			0.65		
WCMDA	Band V	Front	0.679	5.2GHz WLAN	0.134	0.81		
		Back	0.617	5.8GHz WLAN	0.212	0.83		
		Left side	0.560	5.2GHz WLAN	0.141	0.70		
		Right side	0.803			0.80		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.290			0.29		
	Band IV	Front	0.546	5.2GHz WLAN	0.134	0.68		
		Back	0.327	5.8GHz WLAN	0.212	0.54		
		Left side	0.015	5.2GHz WLAN	0.141	0.16		
		Right side	0.011			0.01		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.638			0.64		
	Band II	Front	0.592	5.2GHz WLAN	0.134	0.73		
		Back	0.501	5.8GHz WLAN	0.212	0.71		
		Left side	0.081	5.2GHz WLAN	0.141	0.22		
		Right side	0.038			0.04		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.799			0.80		
CDMA	BC10	Front	0.799	5.2GHz WLAN	0.134	0.93		
		Back	0.797	5.8GHz WLAN	0.212	1.01		
		Left side	0.501	5.2GHz WLAN	0.141	0.64		
		Right side	0.750			0.75		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.251			0.25		
	BC0	Front	0.657	5.2GHz WLAN	0.134	0.79		
		Back	0.600	5.8GHz WLAN	0.212	0.81		
		Left side	0.380	5.2GHz WLAN	0.141	0.52		
		Right side	0.662			0.66		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.284			0.28		
	BC1	Front	0.611	5.2GHz WLAN	0.134	0.75		
		Back	0.472	5.8GHz WLAN	0.212	0.68		
		Left side	0.088	5.2GHz WLAN	0.141	0.23		
		Right side	0.042			0.04		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.762			0.76		



WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.8GHz WLAN				
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
LTE	Band 12	Front	0.679	5.2GHz WLAN	0.134	0.81		
		Back	0.671	5.8GHz WLAN	0.212	0.88		
		Left side	0.362	5.2GHz WLAN	0.141	0.50		
		Right side	0.345			0.35		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.214			0.21		
	Band 17	Front	0.723	5.2GHz WLAN	0.134	0.86		
		Back	0.666	5.8GHz WLAN	0.212	0.88		
		Left side	0.441	5.2GHz WLAN	0.141	0.58		
		Right side	0.397			0.40		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.195			0.20		
	Band 5	Front	0.632	5.2GHz WLAN	0.134	0.77		
		Back	0.545	5.8GHz WLAN	0.212	0.76		
		Left side	0.511	5.2GHz WLAN	0.141	0.65		
		Right side	0.645			0.65		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.246			0.25		
	Band 26	Front	0.660	5.2GHz WLAN	0.134	0.79		
		Back	0.628	5.8GHz WLAN	0.212	0.84		
		Left side	0.534	5.2GHz WLAN	0.141	0.68		
		Right side	0.669			0.67		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.255			0.26		
	Band 4	Front	0.519	5.2GHz WLAN	0.134	0.65		
		Back	0.516	5.8GHz WLAN	0.212	0.73		
		Left side	0.064	5.2GHz WLAN	0.141	0.21		
		Right side	0.048			0.05		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.685			0.69		
	Band 2	Front	0.635	5.2GHz WLAN	0.134	0.77		
		Back	0.615	5.8GHz WLAN	0.212	0.83		
		Left side	0.076	5.2GHz WLAN	0.141	0.22		
		Right side	0.038			0.04		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.830			0.83		
	Band 25	Front	0.798	5.2GHz WLAN	0.134	0.93		
		Back	0.543	5.8GHz WLAN	0.212	0.76		
		Left side	0.084	5.2GHz WLAN	0.141	0.23		
		Right side	0.040			0.04		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.844			0.84		
	Band 41	Front	0.317	5.2GHz WLAN	0.134	0.45		
		Back	0.293	5.8GHz WLAN	0.212	0.51		
		Left side	0.137	5.2GHz WLAN	0.141	0.28		
		Right side	0.028			0.03		
		Top side		5.2GHz WLAN	0.189	0.19		
		Bottom side	0.643			0.64		



### 15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	2.4GHz Bluetooth 1g SAR (W/kg)				
GSM	GSM850	Front	0.444	0.072	0.011	0.52	0.46		
		Back	0.399	0.060	0.017	0.46	0.42		
		Front with Headset	0.526	0.072	0.011	0.60	0.54		
	GSM1900	Front	0.896	0.072	0.011	0.97	0.91		
		Back	0.790	0.060	0.017	0.85	0.81		
		Front with Headset	0.852	0.072	0.011	0.92	0.86		
WCMDA	Band V	Front	0.582	0.072	0.011	0.65	0.59		
		Back	0.491	0.060	0.017	0.55	0.51		
		Front with Headset	0.511	0.072	0.011	0.58	0.52		
	Band IV	Front	0.749	0.072	0.011	0.82	0.76		
		Back	0.432	0.060	0.017	0.49	0.45		
		Front with Headset	0.597	0.072	0.011	0.67	0.61		
	Band II	Front	1.164	0.072	0.011	1.24	1.18		
		Back	1.121	0.060	0.017	1.18	1.14		
		Front with Headset	1.161	0.072	0.011	1.23	1.17		
CDMA	BC10	Front	0.679	0.072	0.011	0.75	0.69		
		Back	0.603	0.060	0.017	0.66	0.62		
		Front with Headset	0.573	0.072	0.011	0.65	0.58		
	BC0	Front	0.635	0.072	0.011	0.71	0.65		
		Back	0.610	0.060	0.017	0.67	0.63		
		Front with Headset	0.628	0.072	0.011	0.70	0.64		
	BC1	Front	1.475	0.072	0.011	1.55	1.49		
		Back	1.499	0.060	0.017	1.56	1.52		
		Back with Headset	1.029	0.060	0.017	1.09	1.05		
LTE	Band 12	Front	0.514	0.072	0.011	0.59	0.53		
		Back	0.473	0.060	0.017	0.53	0.49		
		Front with Headset	0.438	0.072	0.011	0.51	0.45		
	Band 17	Front	0.507	0.072	0.011	0.58	0.52		
		Back	0.475	0.060	0.017	0.54	0.49		
		Front with Headset	0.403	0.072	0.011	0.48	0.41		
	Band 5	Front	0.463	0.072	0.011	0.54	0.47		
		Back	0.422	0.060	0.017	0.48	0.44		
		Front with Headset	0.449	0.072	0.011	0.52	0.46		
	Band 26	Front	0.541	0.072	0.011	0.61	0.55		
		Back	0.479	0.060	0.017	0.54	0.50		
		Front with Headset	0.499	0.072	0.011	0.57	0.51		
	Band 4	Front	0.517	0.072	0.011	0.59	0.53		
		Back	0.523	0.060	0.017	0.58	0.54		
		Back with Headset	0.399	0.060	0.017	0.46	0.42		
	Band 2	Front	1.177	0.072	0.011	1.25	1.19		
		Back	1.117	0.060	0.017	1.18	1.13		
		Front with Headset	1.166	0.072	0.011	1.24	1.18		
	Band 25	Front	1.115	0.072	0.011	1.19	1.13		
		Back	0.899	0.060	0.017	0.96	0.92		
		Front with Headset	1.189	0.072	0.011	1.26	1.20		
	Band 41	Front	0.749	0.072	0.011	0.82	0.76		
		Back	0.701	0.060	0.017	0.76	0.72		
		Front with Headset	0.789	0.072	0.011	0.86	0.80		

WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5.2GHz / 5.3GHz / 5.5GHz / 5.8GHz WLAN				
			1g SAR (W/kg)	Band	1g SAR (W/kg)			
GSM	GSM850	Front	0.444	5.2GHz WLAN	0.075	0.52		
		Back	0.399	5.5GHz WLAN	0.402	0.80		
		Front with Headset	0.526	5.2GHz WLAN	0.075	0.60		
	GSM1900	Front	0.896	5.2GHz WLAN	0.075	0.97		
		Back	0.790	5.5GHz WLAN	0.402	1.19		
		Front with Headset	0.852	5.2GHz WLAN	0.075	0.93		
WCMDA	Band V	Front	0.582	5.2GHz WLAN	0.075	0.66		
		Back	0.491	5.5GHz WLAN	0.402	0.89		
		Front with Headset	0.511	5.2GHz WLAN	0.075	0.59		
	Band IV	Front	0.749	5.2GHz WLAN	0.075	0.82		
		Back	0.432	5.5GHz WLAN	0.402	0.83		
		Front with Headset	0.597	5.2GHz WLAN	0.075	0.67		
	Band II	Front	1.164	5.2GHz WLAN	0.075	1.24		
		Back	1.121	5.5GHz WLAN	0.402	1.52		
		Front with Headset	1.161	5.2GHz WLAN	0.075	1.24		
CDMA	BC10	Front	0.679	5.2GHz WLAN	0.075	0.75		
		Back	0.603	5.5GHz WLAN	0.402	1.01		
		Front with Headset	0.573	5.2GHz WLAN	0.075	0.65		
	BC0	Front	0.635	5.2GHz WLAN	0.075	0.71		
		Back	0.610	5.5GHz WLAN	0.402	1.01		
		Front with Headset	0.628	5.2GHz WLAN	0.075	0.70		
	BC1	Front	1.475	5.2GHz WLAN	0.075	1.55		
		Back	1.499	5.5GHz WLAN	0.402	1.90	0.02	Case 17
		Back with Headset	1.029	5.5GHz WLAN	0.402	1.43		
LTE	Band 12	Front	0.514	5.2GHz WLAN	0.075	0.59		
		Back	0.473	5.5GHz WLAN	0.402	0.88		
		Front with Headset	0.438	5.2GHz WLAN	0.075	0.51		
	Band 17	Front	0.507	5.2GHz WLAN	0.075	0.58		
		Back	0.475	5.5GHz WLAN	0.402	0.88		
		Front with Headset	0.403	5.2GHz WLAN	0.075	0.48		
	Band 5	Front	0.463	5.2GHz WLAN	0.075	0.54		
		Back	0.422	5.5GHz WLAN	0.402	0.82		
		Front with Headset	0.449	5.2GHz WLAN	0.075	0.52		
	Band 26	Front	0.541	5.2GHz WLAN	0.075	0.62		
		Back	0.479	5.5GHz WLAN	0.402	0.88		
		Front with Headset	0.499	5.2GHz WLAN	0.075	0.57		
	Band 4	Front	0.517	5.2GHz WLAN	0.075	0.59		
		Back	0.523	5.5GHz WLAN	0.402	0.93		
		Back with Headset	0.399	5.5GHz WLAN	0.402	0.80		
	Band 2	Front	1.177	5.2GHz WLAN	0.075	1.25		
		Back	1.117	5.5GHz WLAN	0.402	1.52		
		Front with Headset	1.166	5.2GHz WLAN	0.075	1.24		
	Band 25	Front	1.115	5.2GHz WLAN	0.075	1.19		
		Back	0.899	5.5GHz WLAN	0.402	1.30		
		Front with Headset	1.189	5.2GHz WLAN	0.075	1.26		
	Band 41	Front	0.749	5.2GHz WLAN	0.075	0.82		
		Back	0.701	5.5GHz WLAN	0.402	1.10		
		Front with Headset	0.789	5.2GHz WLAN	0.075	0.86		




## 15.4 SPLSR Evaluation and Analysis


**General Note:**

1.  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850	Right Cheek	0.561	0	X	Y	Z	85.8	2.02	0.03	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

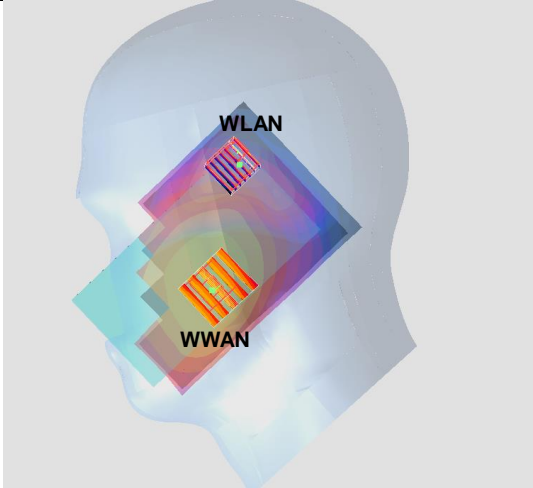
Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900	Right Cheek	0.179	0	X	Y	Z	53.3	1.64	0.04	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA Band V	Right Cheek	0.481	0	X	Y	Z	85.8	1.94	0.03	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

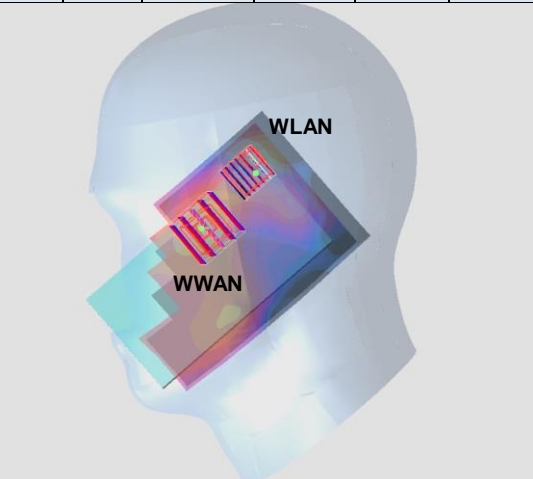
Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA Band IV	Right Cheek	0.185	0	X	Y	Z	102.7	1.65	0.02	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				


Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA Band II	Right Cheek	0.247	0	X	Y	Z	102.4	1.71	0.02	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

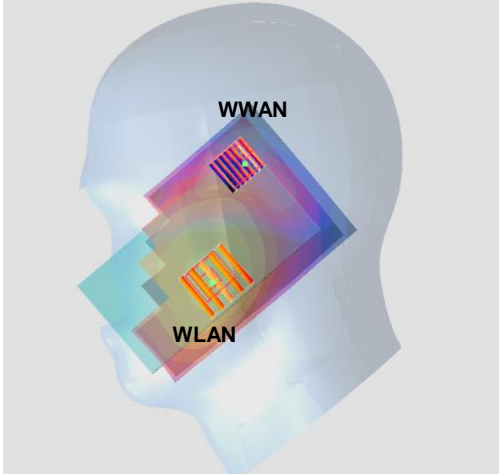
Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC 10	Right Cheek	0.54	0	X	Y	Z	79.1	2.00	0.04	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

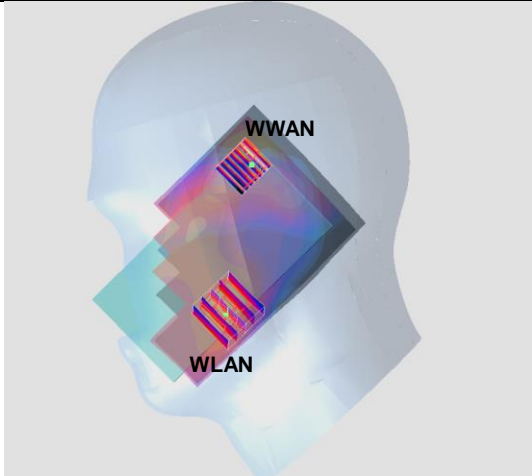
Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC 0	Right Cheek	0.615	0	0.0687	-0.269	-0.173	79.2	2.08	0.04	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				


Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC 1	Right Cheek	0.261	0	0.0707	-0.305	-0.172	52.5	1.72	0.04	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

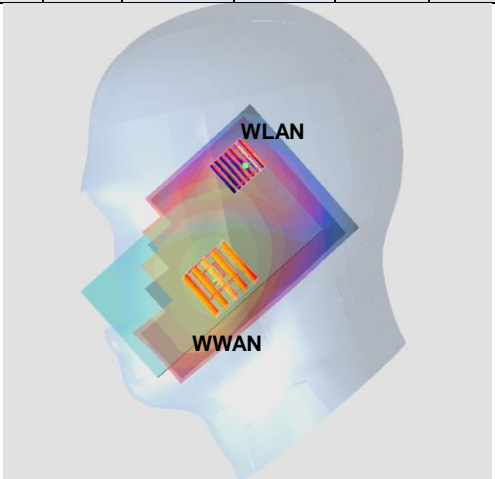
Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 12	Right Cheek	0.46	0	0.07	-0.268	-0.172	80.7	1.92	0.03	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

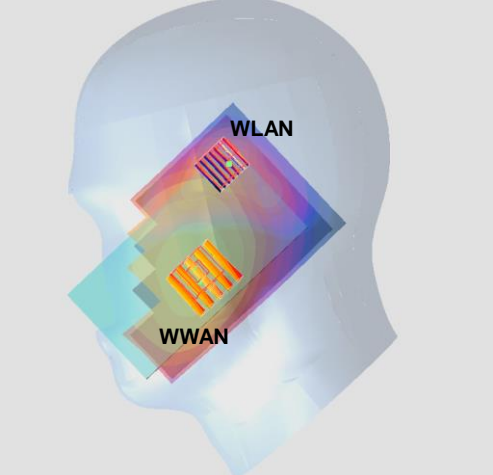
Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 17	Right Cheek	0.426	0	0.0668	-0.262	-0.173	84.5	1.89	0.03	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

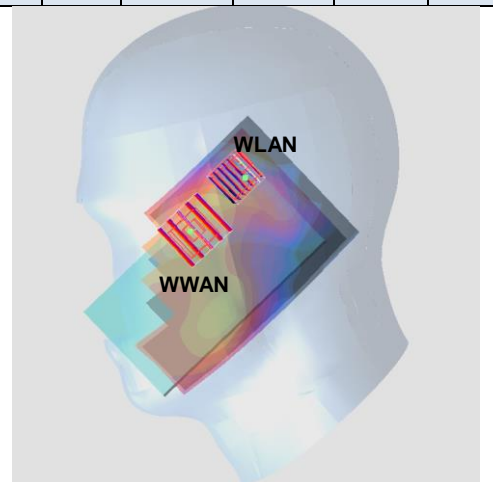
Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Right Cheek	0.444	0	0.0694	-0.263	-0.172	84.8	1.91	0.03	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

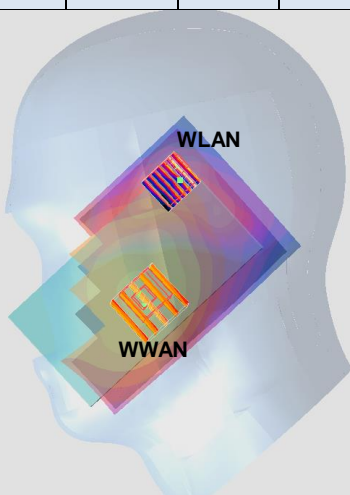
Case 12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26	Right Cheek	0.47	0	0.0668	-0.267	-0.173	80.0	1.93	0.03	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

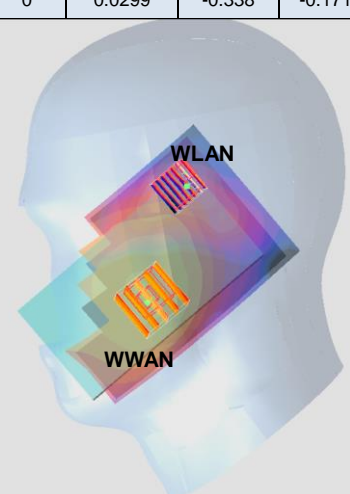
Case 13	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Right Cheek	0.252	0	0.0652	-0.241	-0.17				
5.2GHz WLAN	1.462		0	0.0299	-0.338	-0.171					

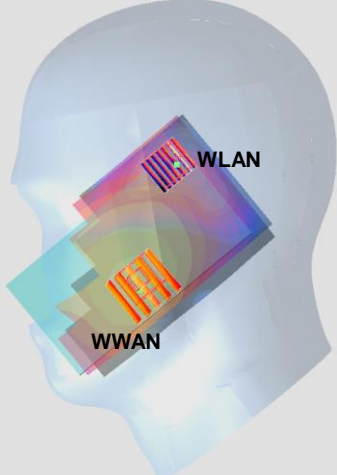

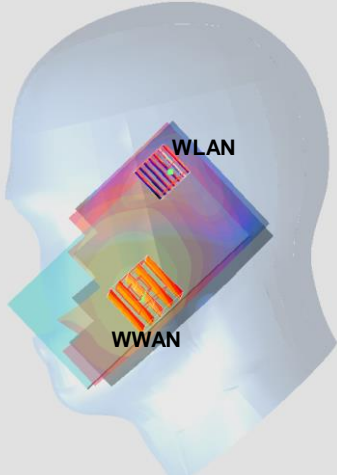
Case 14	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Right Cheek	0.273	0	0.0705	-0.301	-0.173				
5.2GHz WLAN	1.462		0	0.0299	-0.338	-0.171					

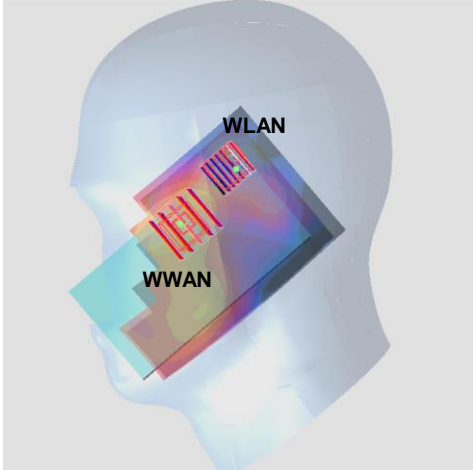

Case 15	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 25	Right Cheek	0.259	0	0.0656	-0.242	-0.17	102.4	1.72	0.02	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				


  


Case 16	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41	Right Cheek	0.263	0	0.0657	-0.3	-0.174	52.3	1.73	0.04	Not required
	5.2GHz WLAN		1.462	0	0.0299	-0.338	-0.171				

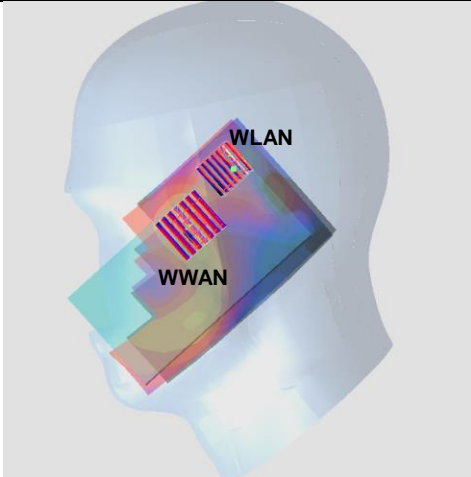

Case 17	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC 1	Back	1.499	1.5	X	Y	Z	129.3	1.90	0.02	Not required
	5.5GHz WLAN		0.402	1.5	0.00598	0.057	-0.205				

**Test Engineer :** Ken Li, San Lin, Angel Chang, Nick Yu, Bevis Chang, Tom Jiang, Jack Wu,  
Mood Huang, Galen Zhang and Aaron Chen
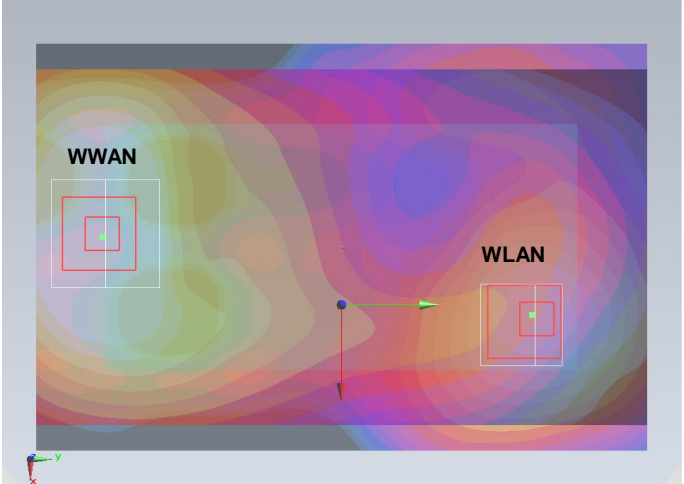
## **16. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 16.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>						± 11.0 %	± 10.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 22.0 %	± 21.5 %

**Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [6] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [7] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [8] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [10] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [11] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.