



# FCC RF Test Report

**APPLICANT** : Motorola Mobility, LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 7524  
**FCC ID** : IHDT56VC2  
**STANDARD** : FCC Part 15 Subpart C §15.225  
**CLASSIFICATION** : (DXX) Low Power Communication Device Transmitter

The testing was completed on Jul. 31, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



***SPORTON INTERNATIONAL INC.***  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



## Table of Contents

<b>SUMMARY OF THE TEST RESULT .....</b>	<b>4</b>
<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
1.1    Applicant .....	5
1.2    Manufacturer.....	5
1.3    Feature of Equipment Under Test .....	5
1.4    Product Details.....	6
1.5    Modification of EUT.....	6
1.6    Testing Location .....	7
1.7    Applicable Standards .....	7
1.8    Test Modes.....	7
1.9    Test Configurations.....	8
1.10    Table for Supporting Units .....	10
<b>2. CONDUCTED EMISSION TEST.....</b>	<b>11</b>
2.1    Measuring Instruments .....	11
2.2    Test setup .....	11
2.3    Test Result of Conducted Emission Test.....	11
2.4    AC Power Line Conducted Emissions Measurement .....	12
<b>3. RADIATED TEST ITEMS .....</b>	<b>13</b>
3.1    Measuring Instruments .....	13
3.2    Test Setup .....	13
3.3    Test Result of Radiated Test Items .....	13
3.4    Field Strength of Fundamental Emissions and Mask Measurement .....	14
3.5    Radiated Emissions Measurement .....	15
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>17</b>

### APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

### APPENDIX B. TEST RESULTS OF RADIATED TEST ITEMS

- B.1 Test Result of Field Strength of Fundamental Emissions
- B.2 Results of Radiated Emissions (9 kHz~30MHz)
- B.3 Results of Radiated Emissions (30MHz~1GHz)

### APPENDIX C. ORIGINAL REPORT



## REVISION HISTORY



## SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	3.80 dB at 0.182MHz
3.2	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	65.77 dB at 13.560 MHz
3.4	15.225(d) 15.209	Radiated Emissions	Complies	6.99 dB at 40.800 MHz
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±4.80dB	Confidence levels of 95%



## 1. GENERAL INFORMATION

### 1.1 Applicant

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

### 1.2 Manufacturer

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

### 1.3 Feature of Equipment Under Test

Product Feature		
<b>Equipment</b>		Mobile Cellular Phone
<b>Brand Name</b>		Motorola
<b>FCC Model Name</b>		7524
<b>FCC ID</b>		IHDT56VC2
<b>IMEI Code</b>		Radiated      IMEI 1: 354131070011437 IMEI 2: 354131070011445 Conducted      IMEI 1: 354131070017814 IMEI 2: 354131070017822
<b>EUT supports Radios application</b>		GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 Bluetooth v3.0 EDR Bluetooth v4.0 - LE
<b>HW Version</b>		DVT2
<b>EUT Stage</b>		Identical Prototype

Accessory List	
<b>WPC Cover</b>	Brand Name : INCIPIO
	Model Name : MT-043-CASE



## 1.4 Product Details

Items	Description
<b>Tx/Rx Frequency Range</b>	13.553 ~ 13.567MHz
<b>Channel Number</b>	1
<b>Antenna Type</b>	Coil / embeded Antenna
<b>Type of Modulation</b>	ASK

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	CO05-HY	03CH07-HY
<b>Test Engineer</b>	Arthur Hsieh	
<b>Temperature</b>	22~23°C	
<b>Relative Humidity</b>	48~50%	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013


## 1.8 Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


<b>Test Items</b>	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz
<b>Note:</b>	
1. The EUT was programmed to be in continuously transmitting mode. 2. The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.	

## 1.9 Test Configurations


### <AC Conducted Emission with WPC Charging Mode>

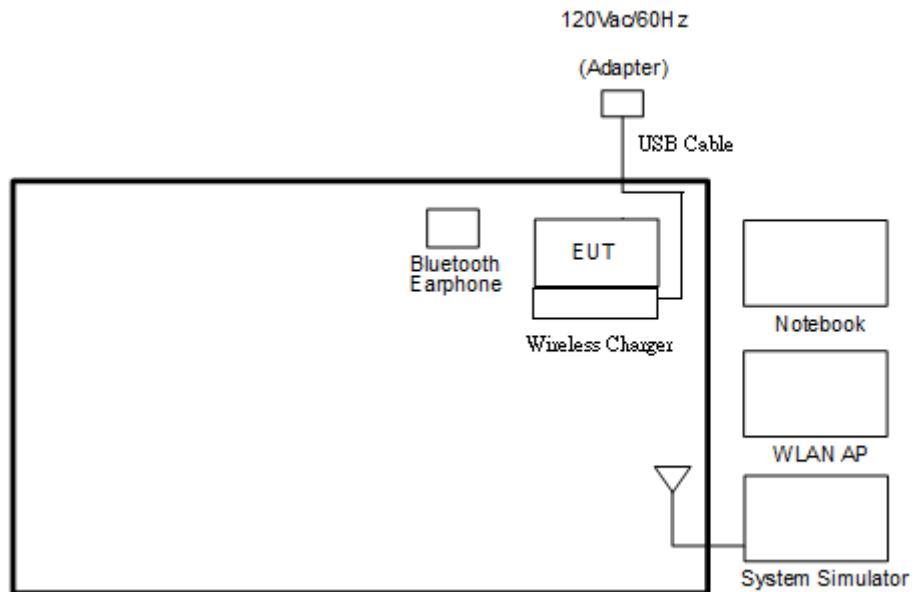


### <AC Conducted Emission with PMA Charging Mode>

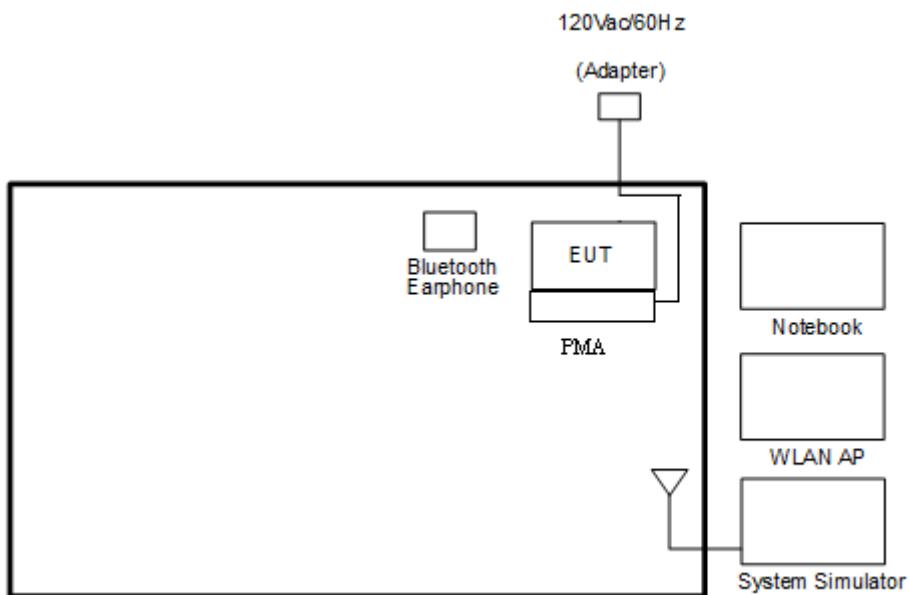

**<For Fundamental Emissions and Mask and Radiated Emissions Measurement with WPC Charging Mode >**

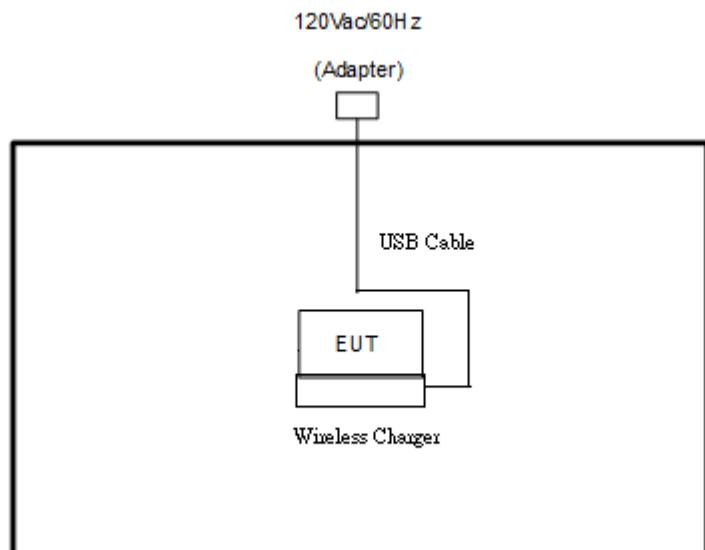

**<For Fundamental Emissions and Mask and Radiated Emissions Measurement with PMA Charging Mode >**

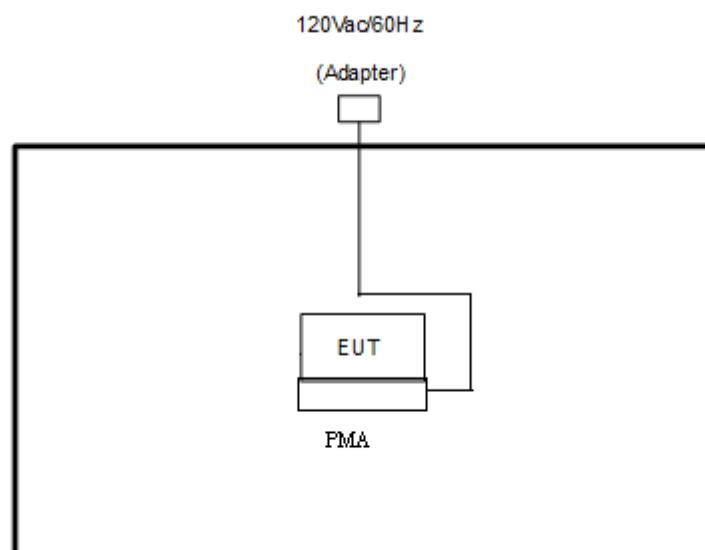



### 1.10 Table for Supporting Units


Support Unit	Manufacturer	Model	FCC ID
System Simulator	Anritsu	MT8820C	N/A
WLAN AP	D-Link	DIR-628	KA2DIR628A2
Bluetooth Earphone	Sony Ericsson	MW600	PY70DA2029
Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054
SD Card	SanDisk	MicroSD HC	FCC DoC
NFC Card	Metro Taipei	Easy Card	N/A
Wireless Charger	LG	WCD-100	FCC DoC
PMA	DURACELL	M-018B-518A	FCC DoC
USB Cable	Motorola	SKN6461A	N/A
Adapter	Motorola	SPN5865A	N/A

## 2. CONDUCTED EMISSION TEST

### 2.1 Measuring Instruments

See list of measuring instruments of this test report.

### 2.2 Test setup

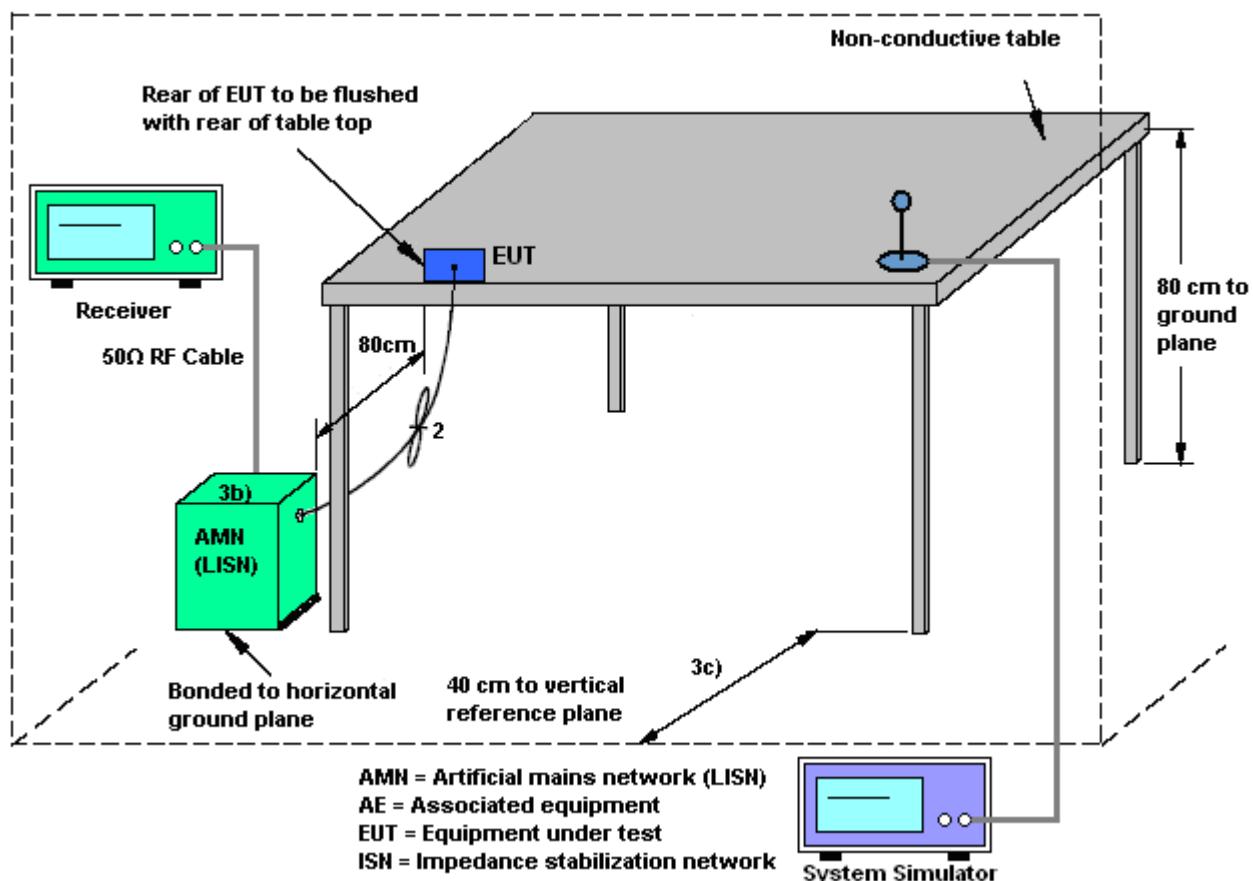

### 2.3 Test Result of Conducted Emission Test

Please refer to Appendix A.



## 2.4 AC Power Line Conducted Emissions Measurement

### 2.4.1 Limit

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 2.4.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3. RADIATED TEST ITEMS

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup

##### 3.2.1 For radiated emissions below 30MHz

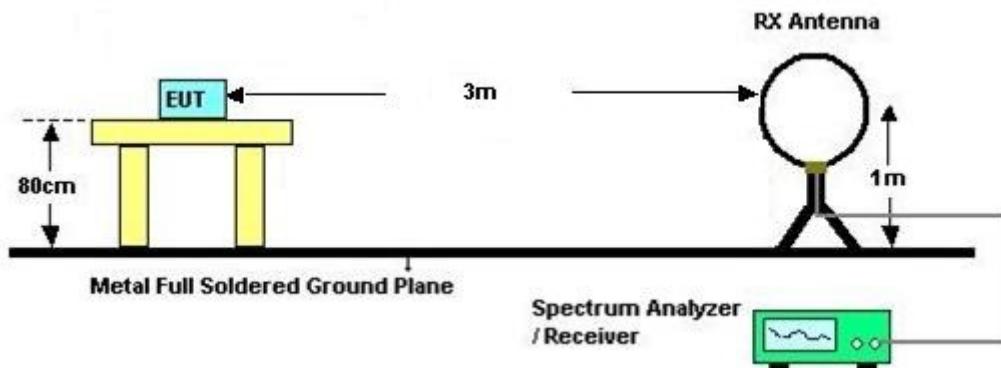

##### 3.2.2 For radiated emissions above 30MHz

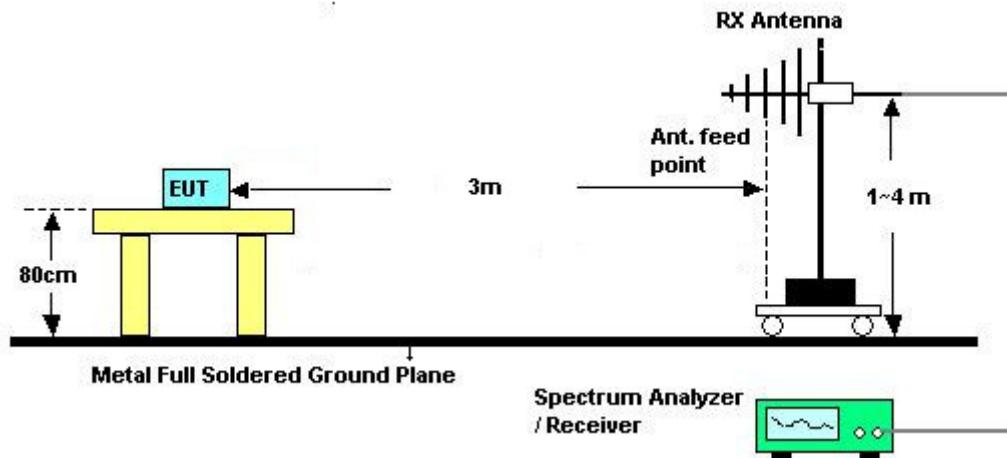

#### 3.3 Test Result of Radiated Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225 IC RSS-210 A2.6			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ( $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

#### 3.4.2 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).



### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.



### 3.5.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
1. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
2. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
4. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

### 3.5.4 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 3.5.5 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



#### 4. LIST OF MEASURING EQUIPMENT


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 29, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Jul. 29, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Jul. 29, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D	35419	30MHz to 1GHz	Jan. 13, 2016	Jul. 31, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 04, 2015	Jul. 31, 2016	Nov. 03, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jul. 31, 2016	Sep. 01, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Jul. 31, 2016	Apr. 14, 2017	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	Jul. 31, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jul. 31, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jul. 31, 2016	N/A	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Mar. 18, 2016	Jul. 31, 2016	Mar. 17, 2017	Radiation (03CH07-HY)



## Appendix A. Test Results of Conducted Emission Test


### <WPC Charging Mode>


Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	NFC Tx + WPC Back Cover + WPC Charging Pad + USB Cable (Charging from Adapter)		

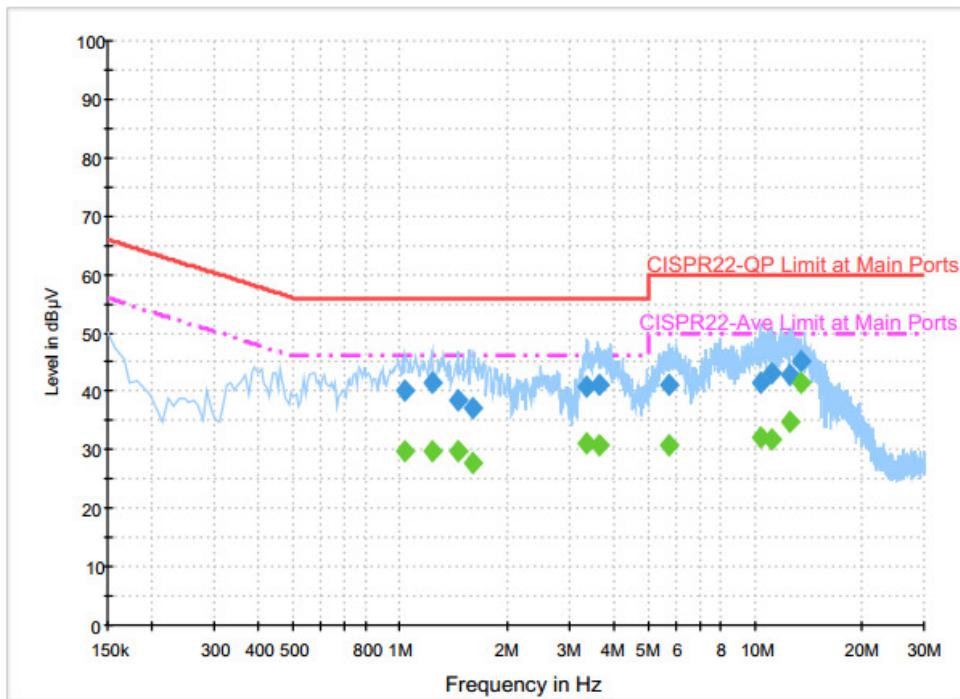

### Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
1.038000	40.1	Off	L1	19.7	15.9	56.0
1.230000	41.4	Off	L1	19.7	14.6	56.0
1.462000	38.4	Off	L1	19.7	17.6	56.0
1.606000	37.2	Off	L1	19.7	18.8	56.0
3.374000	40.7	Off	L1	19.7	15.3	56.0
3.654000	41.3	Off	L1	19.8	14.7	56.0
5.766000	41.0	Off	L1	19.9	19.0	60.0
10.414000	41.5	Off	L1	20.1	18.5	60.0
11.150000	43.3	Off	L1	20.2	16.7	60.0
12.638000	42.9	Off	L1	20.3	17.1	60.0
13.558000	45.2	Off	L1	20.3	14.8	60.0

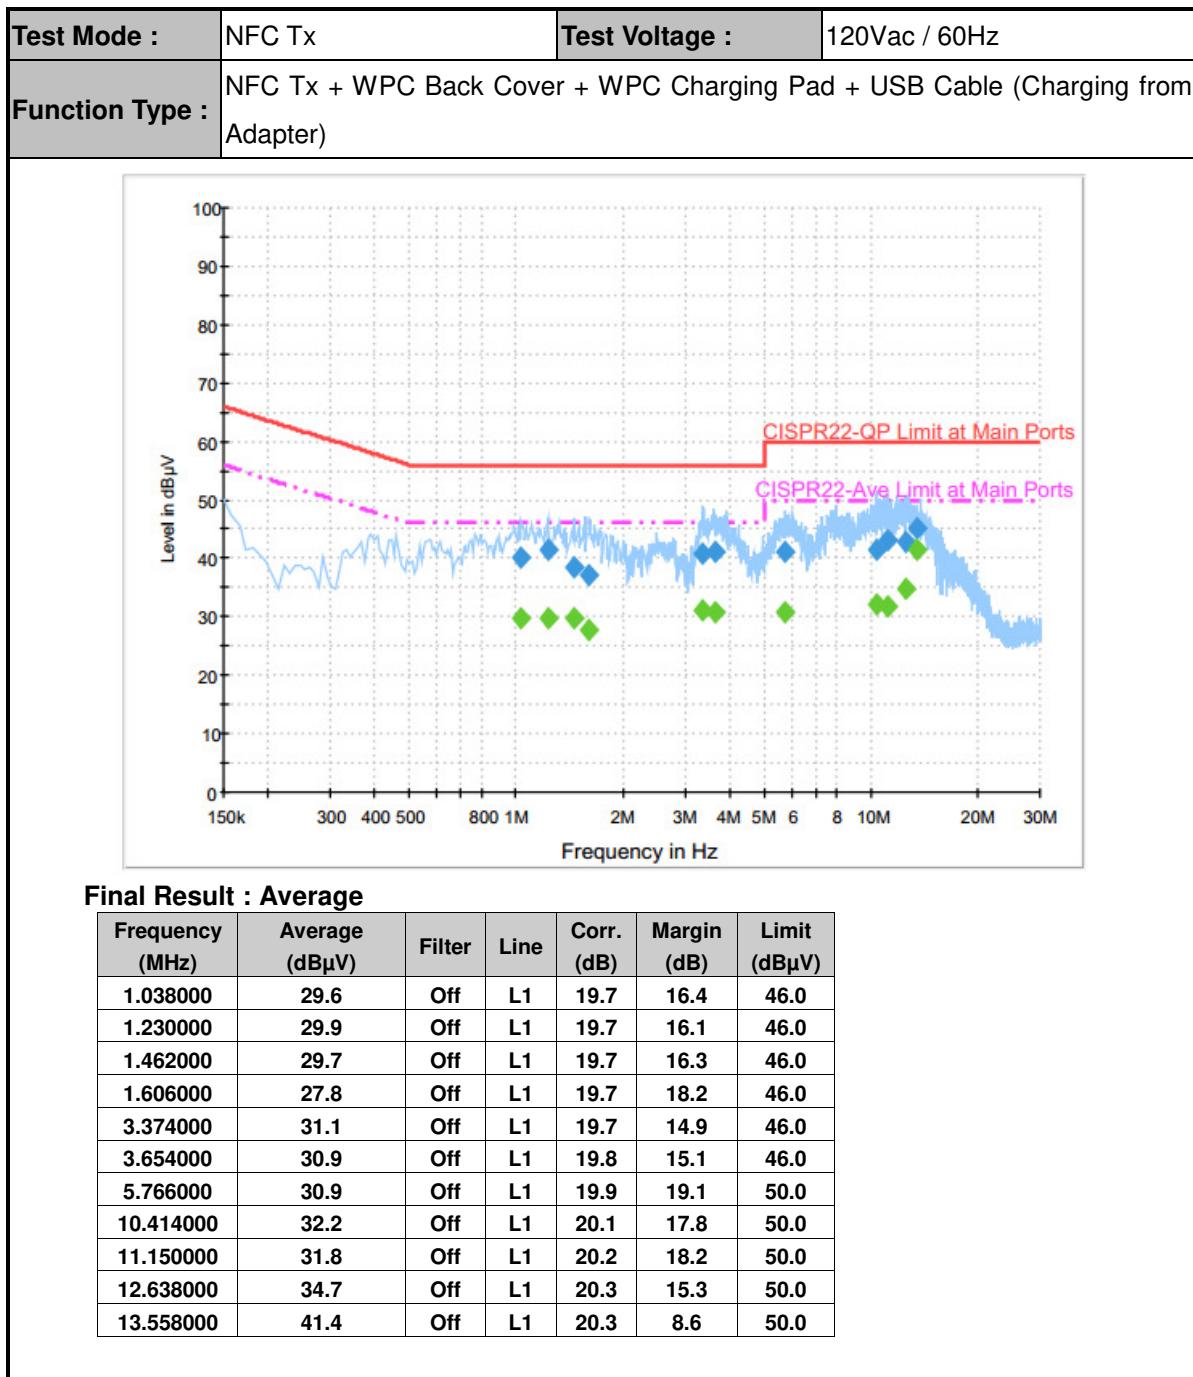


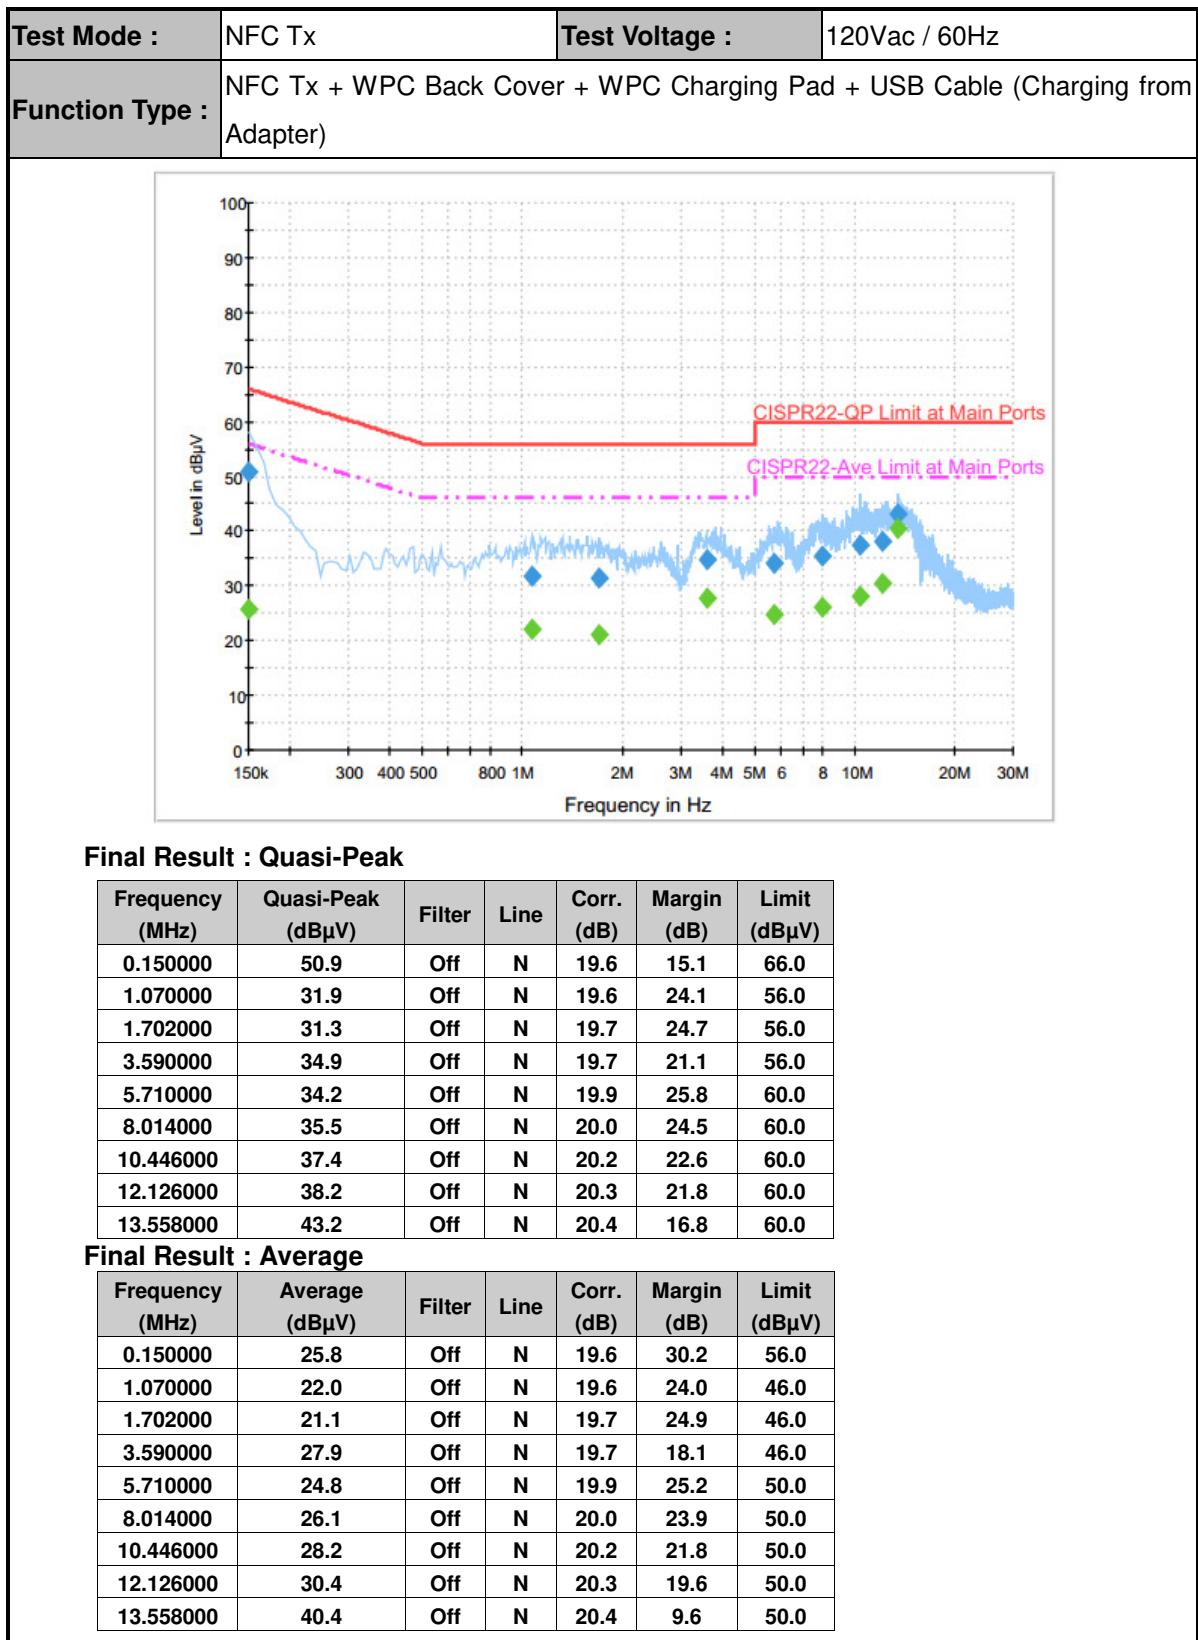





## &lt;PMA Charging Mode&gt;

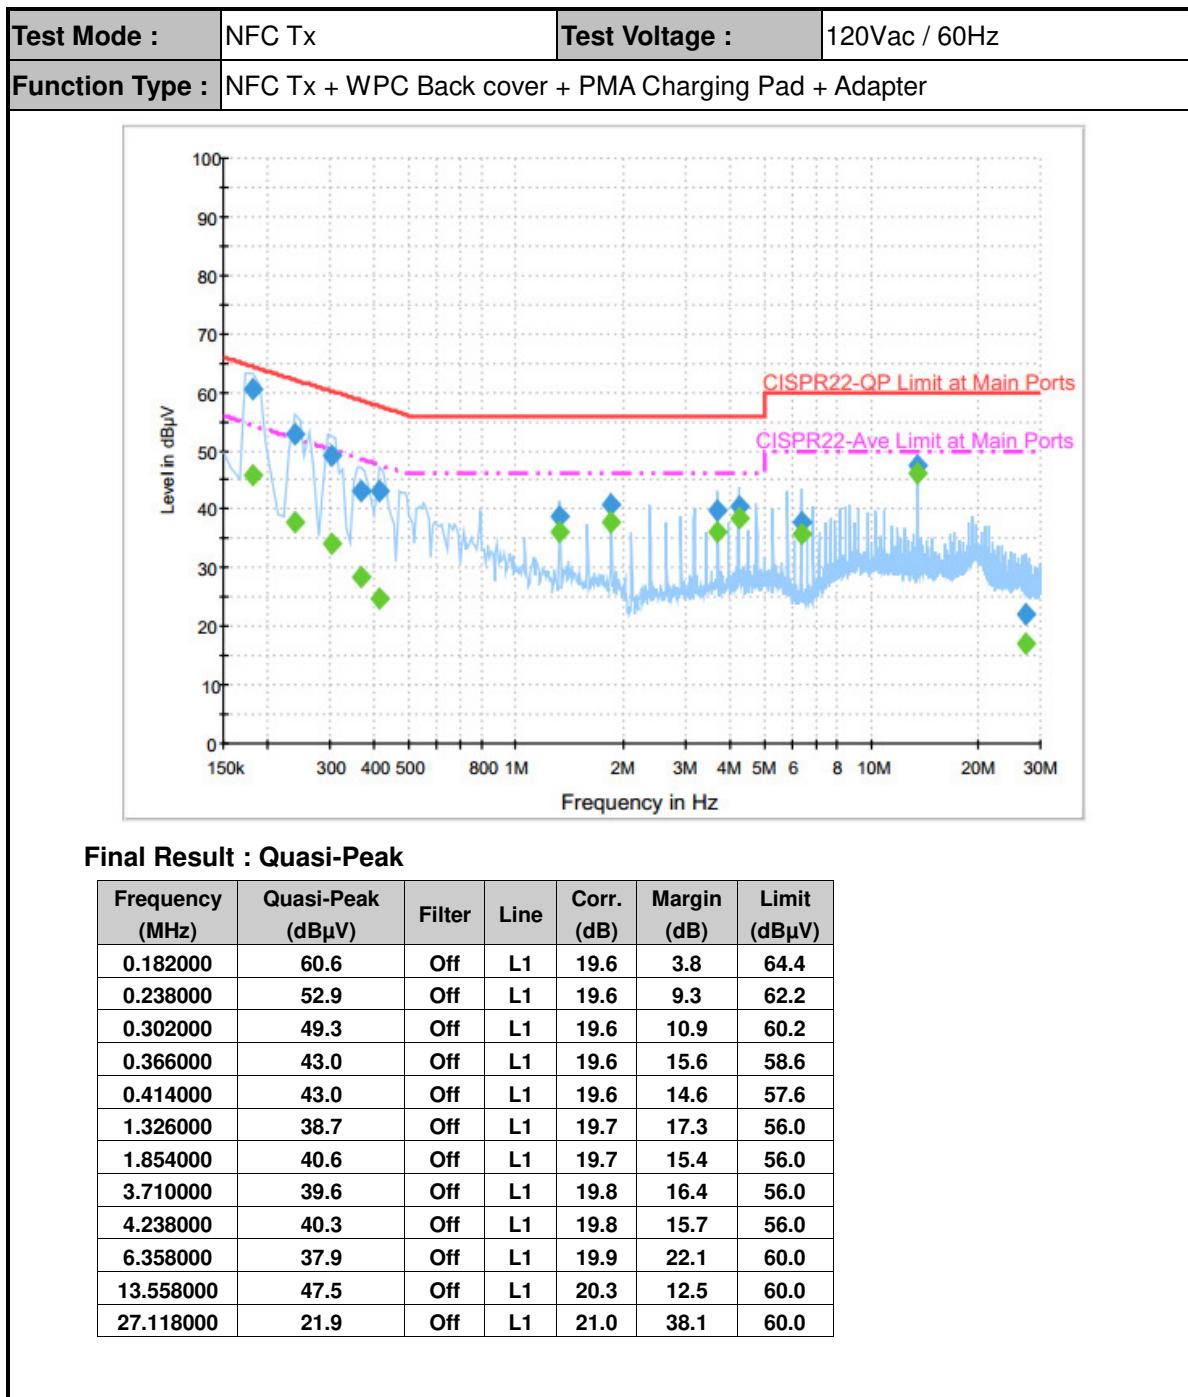

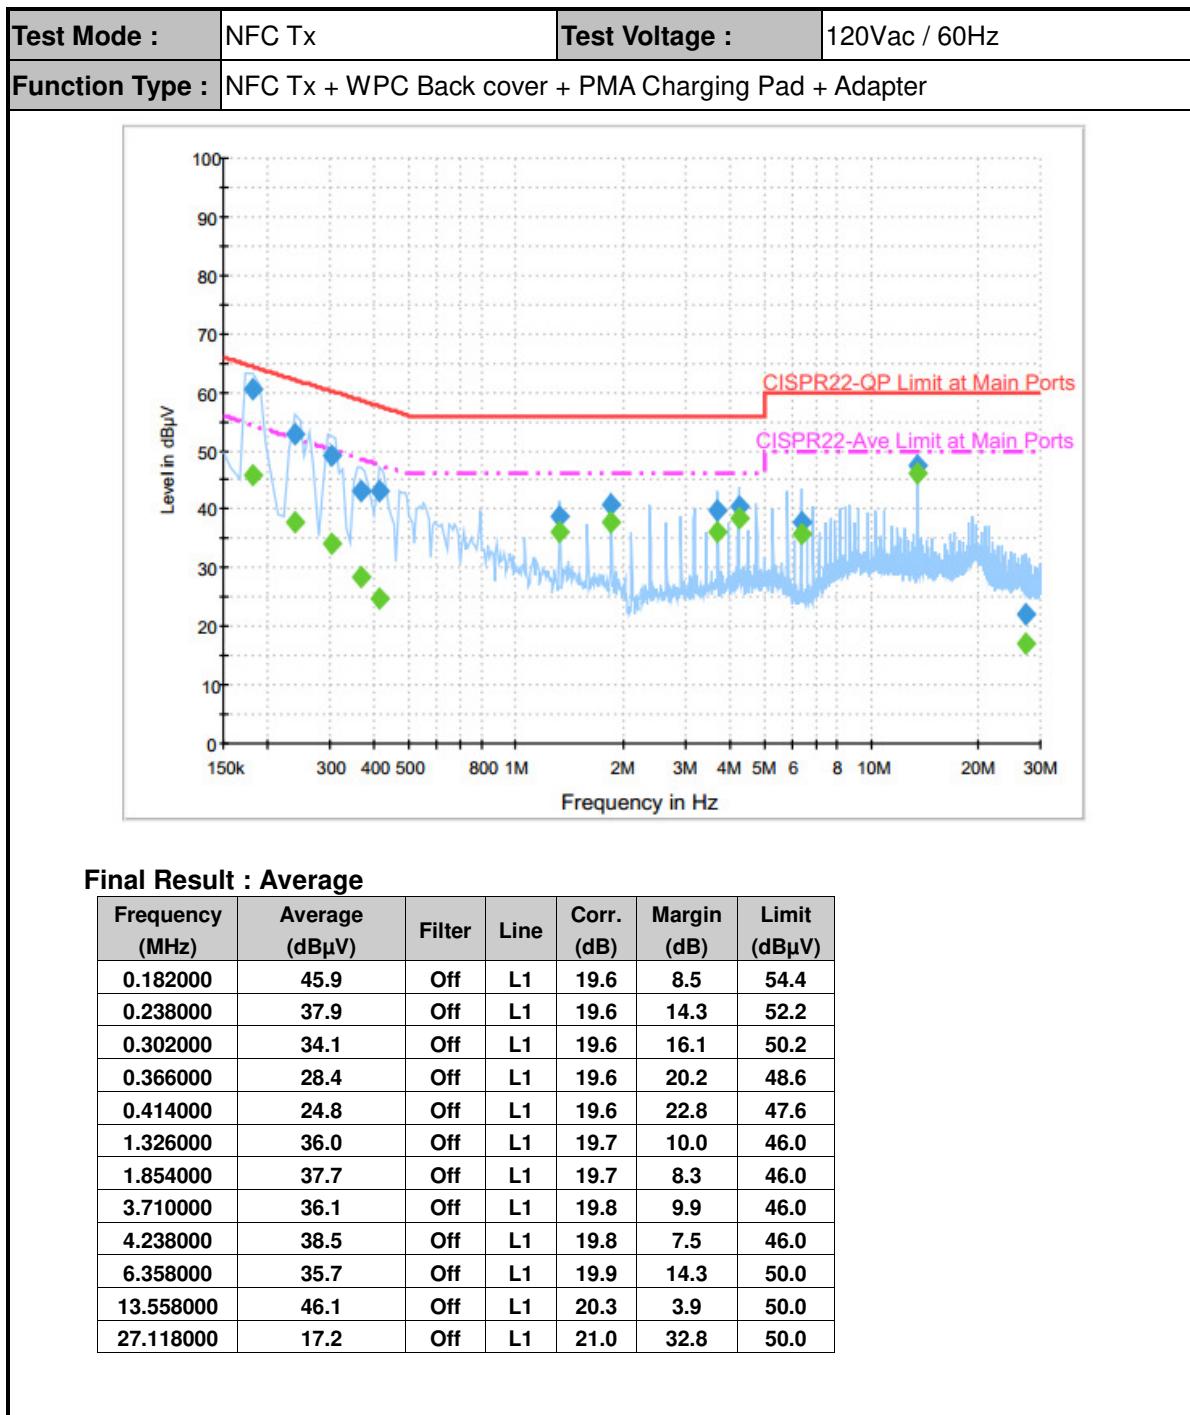

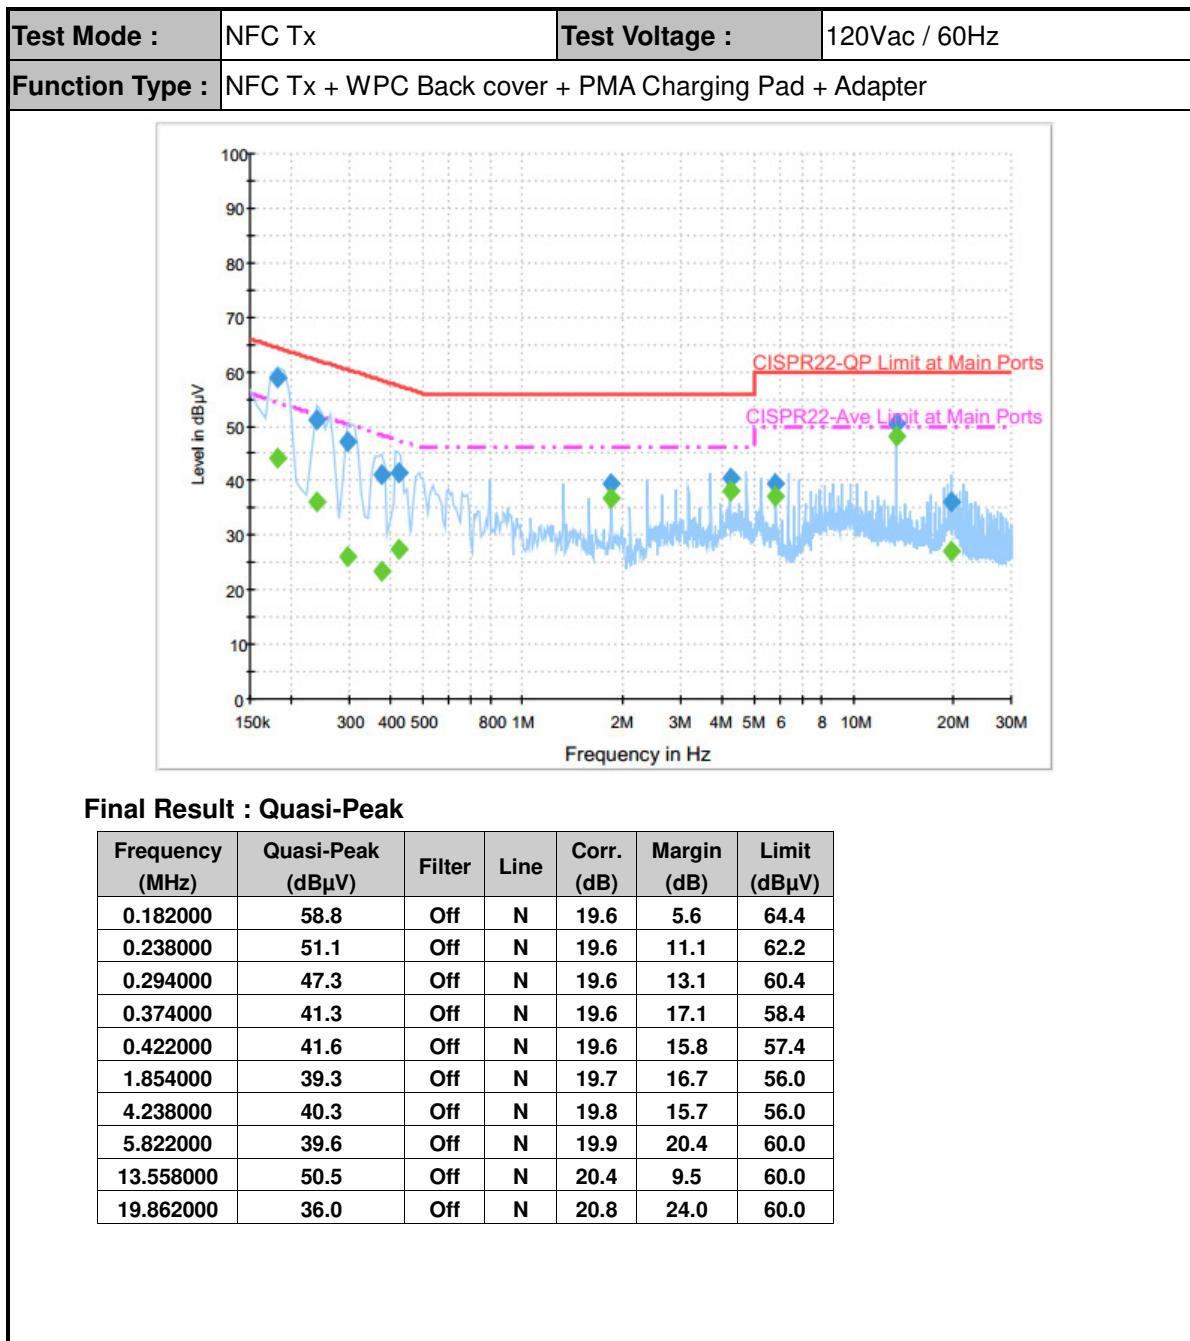

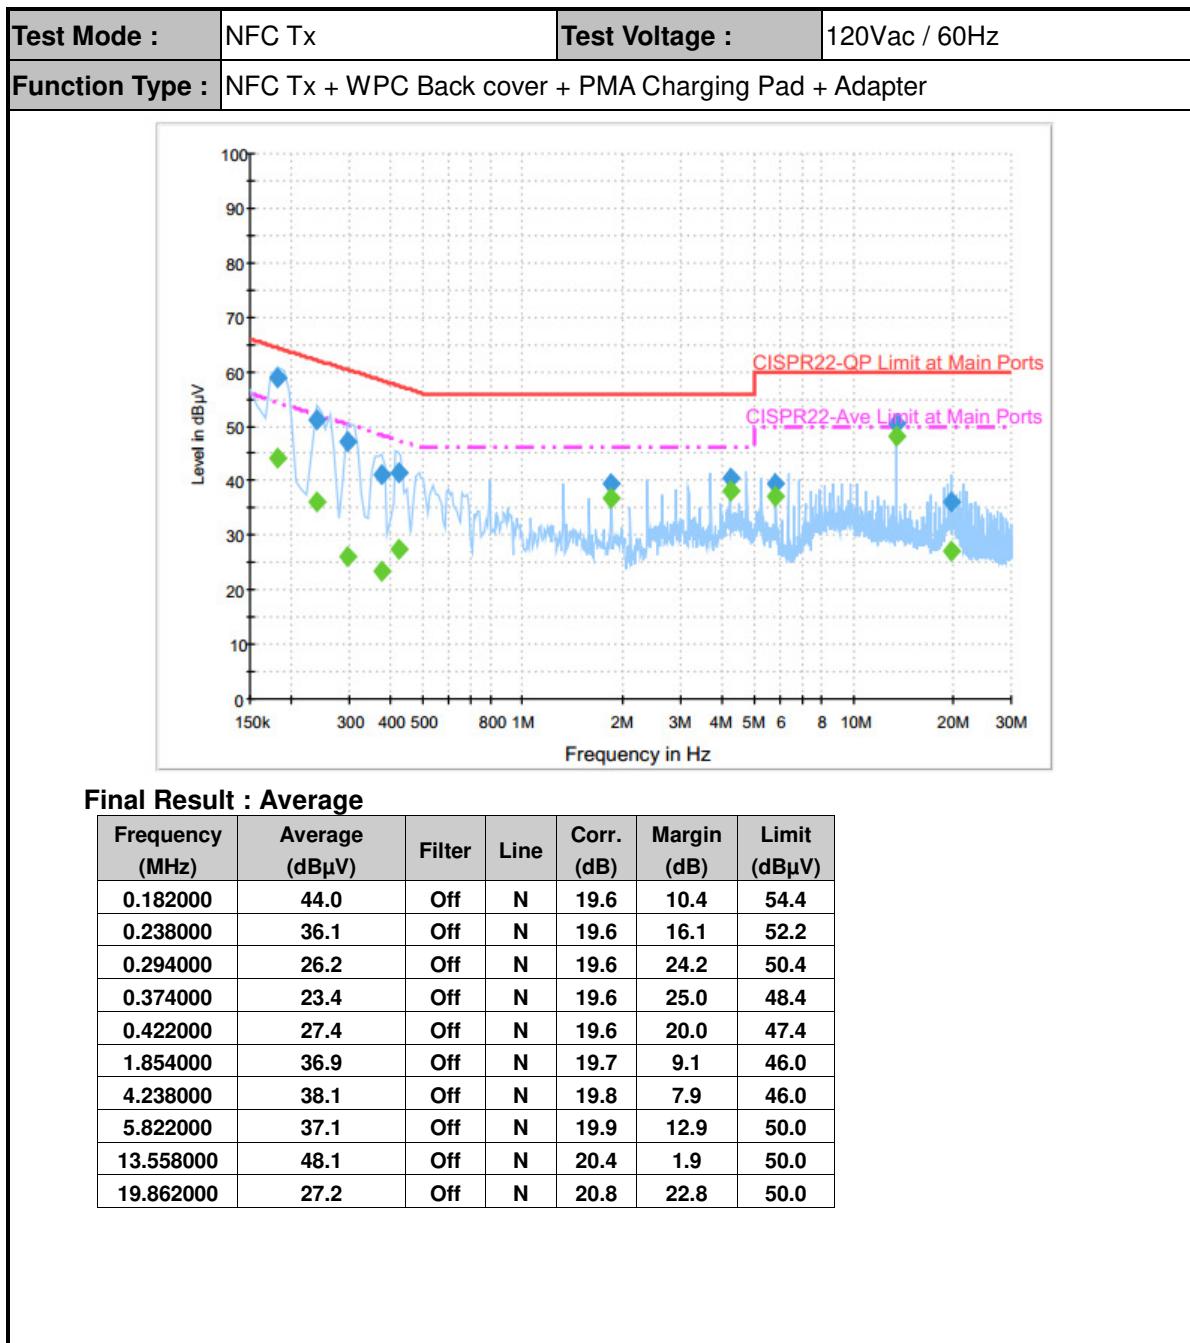

(1) with antenna

Remark: 13.558MHz is the NFC RF fundamental signal.

(2) with dummy load


Remark: Only the fundamental NFC signal needs to be retested per C63.4.



## Appendix B. Test Results of Radiated Test Items

### B.1 Test Result of Field Strength of Fundamental Emissions


<WPC Charging Mode>

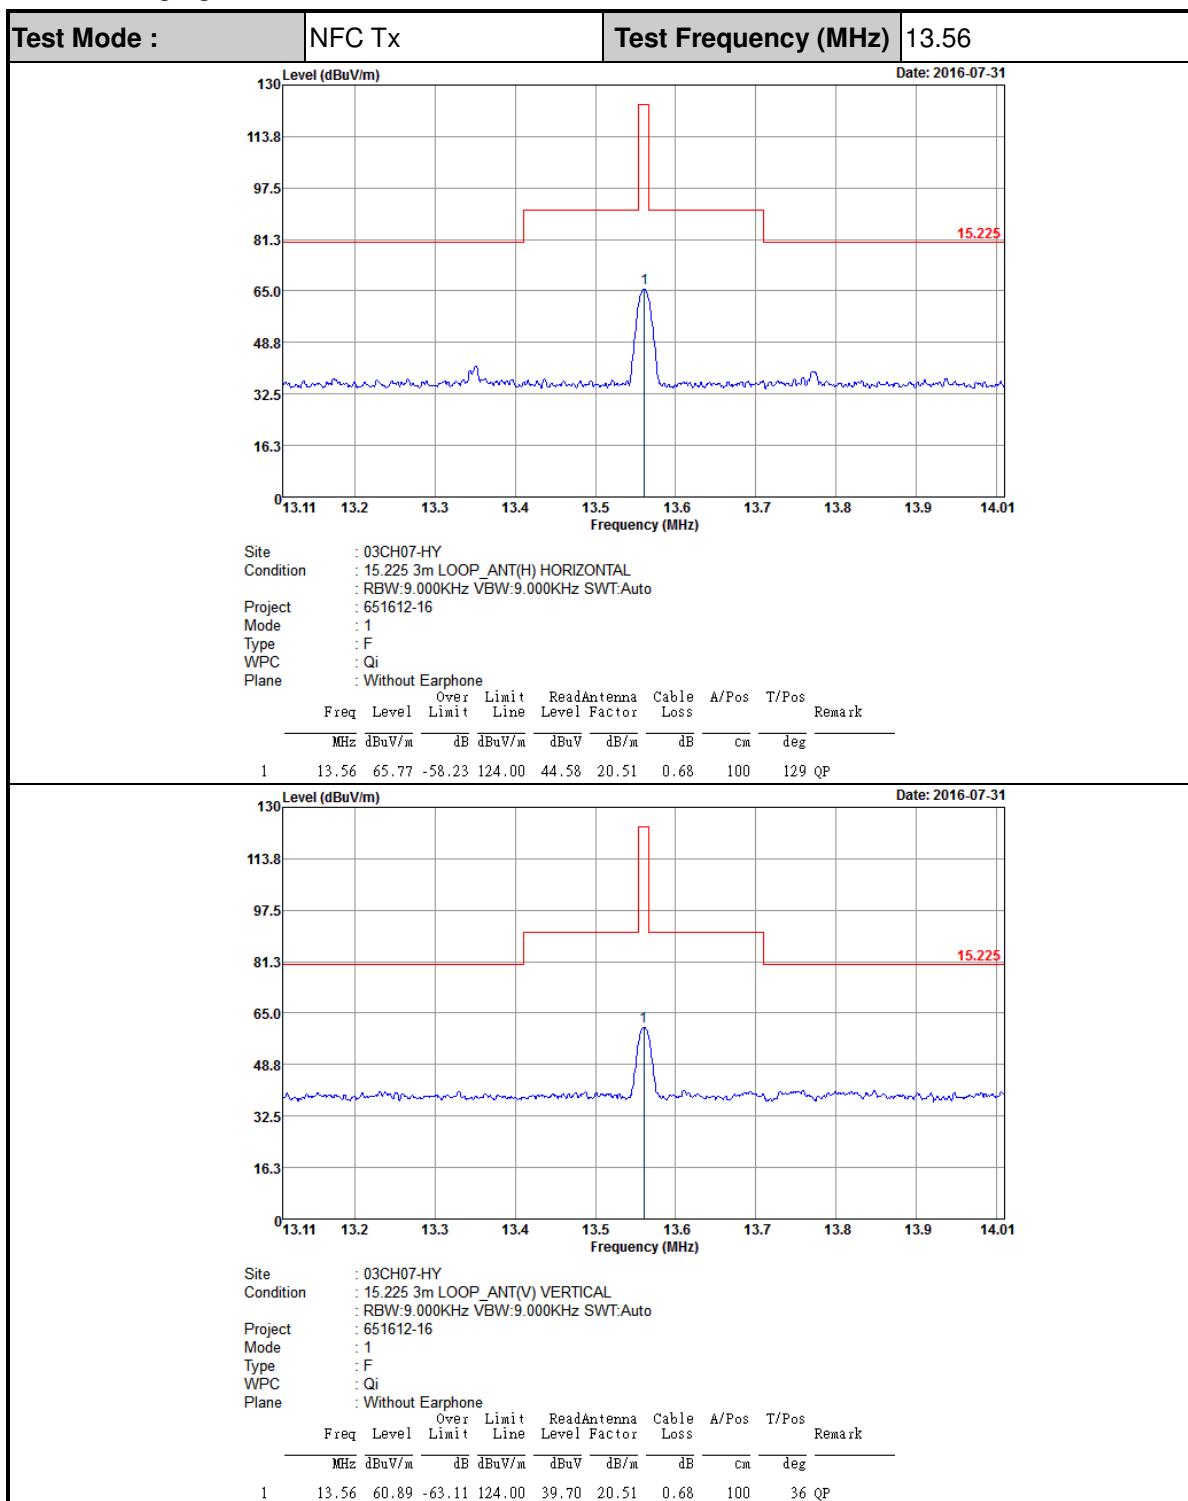

**Note:** All NFC's spurious emissions are below 20dB of limits.



## &lt;PMA Charging Mode&gt;

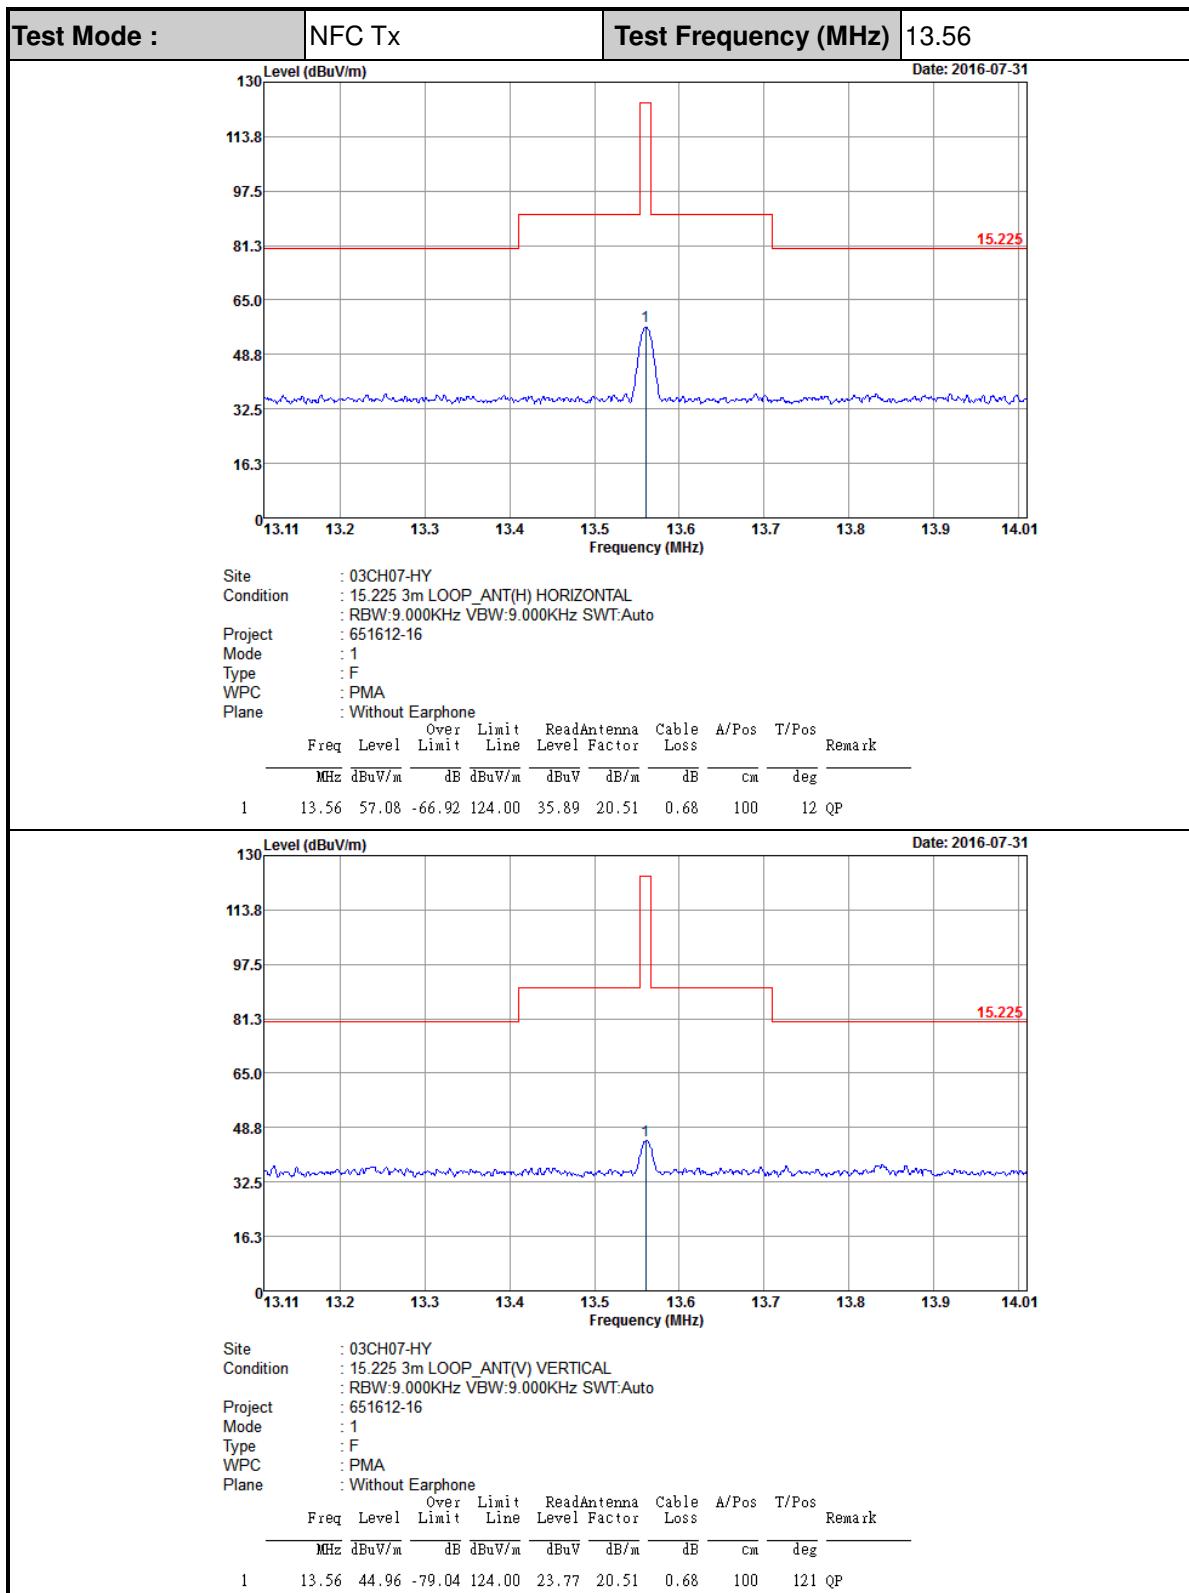

**Note:** All NFC's spurious emissions are below 20dB of limits.

**B.2 Results of Radiated Emissions (9 kHz~30MHz)****<WPC Charging Mode>**

Test Mode :		NFC Tx		Polarization :			Horizontal		
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01339	56.09	-68.98	125.07	32.51	22.9	0.68	-	-	Average
0.0645	53.84	-57.57	111.41	34.16	19	0.68	-	-	Average
0.09008	33.06	-75.45	108.51	13.58	18.8	0.68	-	-	QP
0.129	41.43	-63.96	105.39	21.96	18.79	0.68	-	-	Average
0.18774	56.08	-46.05	102.13	36.64	18.76	0.68	-	-	Average
0.51253	50.55	-22.86	73.41	31.25	18.62	0.68	100	0	QP
12.376	37.5	-32	69.5	16.55	20.27	0.68	-	-	QP
13.56	64.77	-4.73	69.5	43.58	20.51	0.68	-	-	QP
20.941	39.26	-30.24	69.5	16.33	21.86	1.07	-	-	QP
28.545	39.17	-30.33	69.5	15.79	22.31	1.07	-	-	QP

Test Mode :		NFC Tx		Polarization :			Vertical		
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01308	51.59	-73.68	125.27	28.01	22.9	0.68	-	-	Average
0.07629	49.64	-60.32	109.96	29.96	19	0.68	-	-	Average
0.09018	34.41	-74.09	108.5	14.93	18.8	0.68	-	-	QP
0.122	39.57	-66.31	105.88	20.1	18.79	0.68	-	-	Average
0.17856	52.6	-49.97	102.57	33.16	18.76	0.68	-	-	Average
0.51253	46.47	-26.94	73.41	27.17	18.62	0.68	100	0	QP
13.008	38.46	-31.04	69.5	17.38	20.4	0.68	-	-	QP
13.56	60.42	-9.08	69.5	39.23	20.51	0.68	-	-	QP
21.409	39.33	-30.17	69.5	16.38	21.88	1.07	-	-	QP
29.485	40.65	-28.85	69.5	17.21	22.37	1.07	-	-	QP

**Note:**

1. 13.56 MHz is fundamental signal which can be ignored.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
4. Limit line = specific limits (dB $\mu$ V) + distance extrapolation factor.



## &lt;PMA Charging Mode&gt;

Test Mode :		NFC Tx		Polarization :		Horizontal			
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01359	53.28	-71.66	124.94	29.7	22.9	0.68	-	-	Average
0.0645	51.93	-59.48	111.41	32.25	19	0.68	-	-	Average
0.09126	40.73	-67.67	108.4	21.25	18.8	0.68	-	-	QP
0.129	53.04	-52.35	105.39	33.57	18.79	0.68	-	-	Average
0.21868	49.84	-50.97	100.81	30.42	18.74	0.68	-	-	Average
0.50502	44.7	-28.84	73.54	25.4	18.62	0.68	100	0	QP
11.68	37.34	-32.16	69.5	16.52	20.14	0.68	-	-	QP
13.56	56.59	-12.91	69.5	35.4	20.51	0.68	-	-	QP
21.643	39.16	-30.34	69.5	16.19	21.9	1.07	-	-	QP
25.495	39.08	-30.42	69.5	15.88	22.13	1.07	-	-	QP

Test Mode :		NFC Tx		Polarization :		Vertical			
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01364	45.91	-79	124.91	22.33	22.9	0.68	-	-	Average
0.06033	48.09	-63.9	111.99	28.41	19	0.68	-	-	Average
0.0965	42.11	-65.8	107.91	22.63	18.8	0.68	-	-	QP
0.122	39.59	-66.29	105.88	20.12	18.79	0.68	-	-	Average
0.218	51.07	-49.76	100.83	31.65	18.74	0.68	-	-	Average
0.5651	43.15	-29.41	72.56	23.82	18.65	0.68	100	0	QP
13.056	36.91	-32.59	69.5	15.82	20.41	0.68	-	-	QP
13.56	44.42	-25.08	69.5	23.23	20.51	0.68	-	-	QP
18.16	39.31	-30.19	69.5	17.2	21.43	0.68	-	-	QP
29.025	39.41	-30.09	69.5	16	22.34	1.07	-	-	QP

**Note:**

- 13.56 MHz is fundamental signal which can be ignored.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
- Limit line = specific limits (dB $\mu$ V) + distance extrapolation factor.

**B.3 Results of Radiated Emissions (30MHz~1GHz)****<WPC Charging Mode>**

Test Mode :		NFC Tx		Polarization :			Horizontal			
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	28.45	-11.55	40	32.73	26	1.07	31.35	-	-	Peak
90.48	31.03	-12.47	43.5	46.19	15.1	1.28	31.54	-	-	Peak
194.16	32.75	-10.75	43.5	46.66	15.7	1.87	31.48	100	0	Peak
305.6	26.85	-19.15	46	35.74	19.96	2.41	31.26	-	-	Peak
725.6	30.63	-15.37	46	30.77	26.81	3.74	30.69	-	-	Peak
970.6	34.18	-19.82	54	30.4	30.24	4.07	30.53	-	-	Peak

Test Mode :		NFC Tx		Polarization :			Vertical			
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.8	33.01	-6.99	40	43.59	19.84	1.07	31.49	100	0	Peak
190.11	32.53	-10.97	43.5	46.64	15.5	1.87	31.48	-	-	Peak
292.71	25.78	-20.22	46	35.01	19.73	2.32	31.28	-	-	Peak
470.1	26.77	-19.23	46	31.25	23.54	3.04	31.06	-	-	Peak
752.2	30.36	-15.64	46	29.96	27.23	3.82	30.65	-	-	Peak
954.5	33.97	-12.03	46	30.22	30.21	4.07	30.53	-	-	Peak

**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.



## &lt;PMA Charging Mode&gt;

Test Mode :		NFC Tx			Polarization :			Horizontal			
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark	
30	28.38	-11.62	40	32.66	26	1.07	31.35	-	-	Peak	
83.19	28.5	-11.5	40	44.51	14.26	1.28	31.55	100	0	Peak	
244.92	33.91	-12.09	46	44.68	18.55	2.07	31.39	-	-	Peak	
311.9	29.99	-16.01	46	38.69	20.15	2.41	31.26	-	-	Peak	
741	30	-16	46	29.79	27.06	3.82	30.67	-	-	Peak	
951	33.83	-12.17	46	30.09	30.2	4.07	30.53	-	-	Peak	

Test Mode :		NFC Tx			Polarization :			Vertical			
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark	
38.37	31.89	-8.11	40	41.3	20.98	1.07	31.46	100	0	Peak	
79.68	28.31	-11.69	40	44.79	13.79	1.28	31.55	-	-	Peak	
216.03	33.07	-12.93	46	46.29	16.36	1.87	31.45	-	-	Peak	
302.1	26.19	-19.81	46	35.17	19.88	2.41	31.27	-	-	Peak	
600.3	29.17	-16.83	46	31.23	25.4	3.36	30.82	-	-	Peak	
956.6	34.38	-11.62	46	30.63	30.21	4.07	30.53	-	-	Peak	

**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



## **Appendix C. Original Report**

Please refer to Sporton report number FR651612-02F as below.



# FCC RF Test Report

**APPLICANT** : Motorola Mobility, LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 7524  
**FCC ID** : IHDT56VC2  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DXX) Low Power Communication Device Transmitter

This is a variant report which is only valid together with the original test report. The testing was completed on Jun. 21, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



## **Table of Contents**

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1    Applicant .....	4
1.2    Manufacturer.....	4
1.3    Feature of Equipment Under Test .....	4
1.4    Re-use of Measured Data.....	5
1.5    Modification of EUT.....	5

## **APPENDIX A. ORIGINAL REPORT**



## REVISION HISTORY



## 1. GENERAL INFORMATION

### 1.1 Applicant

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

### 1.2 Manufacturer

**Motorola Mobility, LLC**

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

### 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Mobile Cellular Phone
<b>Brand Name</b>	Motorola
<b>Model Name</b>	7524
<b>FCC ID</b>	IHDT56VC2
<b>EUT supports Radios application</b>	GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 Bluetooth v3.0 EDR Bluetooth v4.0 LE
<b>HW Version</b>	DVT2
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



## 1.4 Re-use of Measured Data

### 1.4.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model 7524, FCC ID IHDT56VC2) is electrically identical to the reference device (Model 5892, FCC ID IHDT56VC1) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

### 1.4.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix A (Sporton RF Report No. FR651612F for the reference device Model 5892, FCC ID IHDT56VC1):

-NFC

### 1.4.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, the test result were consistent with FCC ID IHDT56VC1.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

### 1.4.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
DXX	IHDT56VC1	Part15C (FR651612F)	All sections applicable

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## **Appendix A. Original Report**

Please refer to Sporton report number FR651612F.