


# FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 9894  
FCC ID : IHDT56WB1  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 5
3. Guidance Applied ..... 5
4. Equipment Under Test (EUT) Information ..... 6
4.1 General Information ..... 6
4.2 General LTE SAR Test and Reporting Considerations ..... 7
5. RF Exposure Limits ..... 10
5.1 Uncontrolled Environment ..... 10
5.2 Controlled Environment ..... 10
6. Specific Absorption Rate (SAR) ..... 11
6.1 Introduction ..... 11
6.2 SAR Definition ..... 11
7. System Description and Setup ..... 12
7.1 E-Field Probe ..... 13
7.2 Data Acquisition Electronics (DAE) ..... 13
7.3 Phantom ..... 14
7.4 Device Holder ..... 15
8. Measurement Procedures ..... 16
8.1 Spatial Peak SAR Evaluation ..... 16
8.2 Power Reference Measurement ..... 17
8.3 Area Scan ..... 17
8.4 Zoom Scan ..... 18
8.5 Volume Scan Procedures ..... 18
8.6 Power Drift Monitoring ..... 18
9. Test Equipment List ..... 19
10. System Verification ..... 20
10.1 Tissue Simulating Liquids ..... 20
10.2 Tissue Verification ..... 21
10.3 System Performance Check Results ..... 28
11. RF Exposure Positions ..... 30
11.1 Ear and handset reference point ..... 30
11.2 Definition of the cheek position ..... 31
11.3 Definition of the tilt position ..... 32
11.4 Body Worn Accessory ..... 32
11.5 Product Specific ..... 33
11.6 Wireless Router ..... 33
12. Conducted RF Output Power (Unit: dBm) ..... 34
13. Antenna Location ..... 111
14. SAR Test Results ..... 112
14.1 Head SAR ..... 114
14.2 Hotspot SAR ..... 118
14.3 Product Specific SAR ..... 126
14.4 Body Worn Accessory SAR ..... 128
14.5 Repeated SAR Measurement ..... 132
15. Simultaneous Transmission Analysis ..... 133
15.1 Head Exposure Conditions ..... 134
15.2 Hotspot Exposure Conditions ..... 136
15.3 Product Specific Conditions ..... 139
15.4 Body-Worn Accessory Exposure Conditions ..... 140
15.5 Spot Check Verification Data Section ..... 141
16. Supplemental tuner tests results ..... 143
16.1 Supplemental Head SAR results ..... 143
16.2 Supplemental Body SAR results ..... 144
17. Uncertainty Assessment ..... 145
18. References ..... 148
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA733129-02	Rev. 01	Initial issue of report	May 15, 2017



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility, LLC, Mobile Cellular Phone, 9894**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.13	0.68	0.68		1.59
	GSM1900	0.25	0.70	0.70		
	WCDMA II	0.38	1.02	1.02	3.27	
	WCDMA V	0.17	1.06	1.06		
	CDMA BC0	0.23	1.07	1.03		
	CDMA BC1	0.38	0.93	1.00	3.76	
	LTE Band 2	0.38	1.10	1.10	3.36	
	LTE Band 4	0.39	0.91	0.91	3.17	
	LTE Band 5	0.29	0.91	0.91		
	LTE Band 7	0.35	1.02	1.02		
	LTE Band 12	0.31	1.00	1.00		
	LTE Band 13	0.33	0.82	0.82		
	LTE Band 17	0.29	1.00	1.00		
	LTE Band 25	0.53	1.10	1.18	3.36	
	LTE Band 26	0.32	0.90	0.90		
LTE Band 66	0.53	0.79	1.02			
DTS	2.4GHz WLAN	0.64	0.31	0.37		1.59
NII	5GHz WLAN	0.87	0.22	0.23	1.47	1.59
DSS	Bluetooth		0.04			1.50
Date of Testing:		2017/4/12 ~ 2017/5/3				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

**2. Administration Data**

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

Manufacturer	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

**3. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	9894
FCC ID	IHDT56WB1
IMEI Code	353310080024751
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n/ac HT20/VHT20 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	DVT2
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	<ol style="list-style-type: none"> <li>In the operational description, the IHDT56WB1 has the identical design as IHDT56WB4 in GSM1900, WCDMA B2, LTE B2 / B4 / B25 / B66, 2.4GHz WLAN / Bluetooth and 5GHz WLAN, and for those frequency bands the SAR test results are leveraged from the test report of IHDT54WB4. To justify the leverage additional verification on the worst configurations was performed and reported in the section 15.5 of this test report</li> <li>This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation.</li> <li>While operating in "Head" configuration by end user, the device will limit different maximum output powers on the CDMA BC1 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.</li> <li>While operating in "Front" and "Back" configuration by end user, the device will limit different maximum output powers on the WCDMA B 2 / B5, CDMA BC0 / BC1 and LTE B2 / B4 / B5 / B7 / B12 / B13 / B17 / B25 / B26 / B66 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.</li> <li>While operating in body-adjacent exposure configuration during a mobile hotspot session, the device will reduced output powers on the WCDMA B 2 / B5, CDMA BC0 / BC1 and LTE B2 / B4 / B5 / B7 / B12 / B13 / B17 / B25 / B26 / B66 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.</li> <li>The device utilizes independent power reduction mechanisms for SAR compliance for the WLAN transmitter for held-to-ear exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description.</li> <li>This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA, CDMA and LTE modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner are included in the operational description and supplemental data for additional information on section16.</li> </ol>



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																					
FCC ID	IHDT56WB1																																																																				
Equipment Name	Mobile Cellular Phone																																																																				
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz																																																																				
Channel Bandwidth	LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																				
uplink modulations used	QPSK, 16QAM, 64QAM																																																																				
LTE Voice / Data requirements	Voice and Data																																																																				
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p align="center"><b>Table 6.2.3_3.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth configuration (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	Modulation	Channel bandwidth / Transmission bandwidth configuration (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
Modulation	Channel bandwidth / Transmission bandwidth configuration (RB)						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																				
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that LTE B2 / B4 / B5 / B7 / B12 / B13 / B17 / B25 / B26 / B66 power reduction applied to satisfy SAR compliance.																																																																				
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to section 12.																																																																				
LTE Carrier Aggregation Additional Information	This device supports a maximum of 3 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																				



Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5		23280		787	
M	23230		782		23255		784.5		23280		787		23305		789.5	
H	23255		784.5		23280		787		23305		789.5		23330		792	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23805		712		23830		715	
M	23790		710		23815		713		23840		716		23865		719	
H	23825		713.5		23850		716.5		23875		719.5		23900		722.5	
LTE Band 25																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860				
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880				
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905				



LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770



## 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

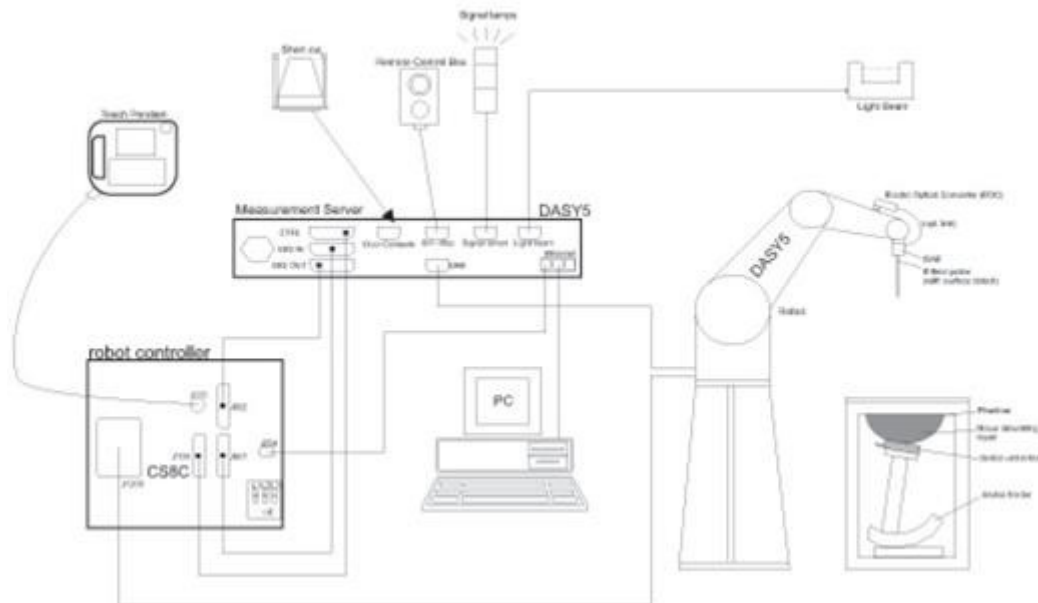


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**7.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
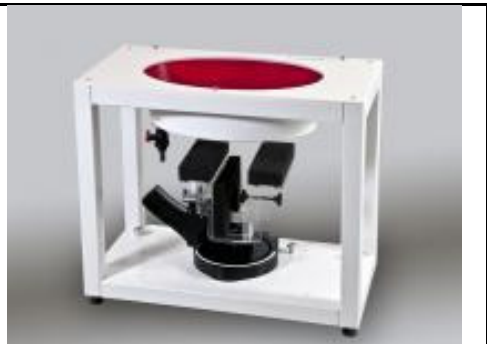
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **7.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**8.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 18, 2016	May. 17, 2017
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 16, 2016	Nov. 15, 2017
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 30, 2016	Sep. 29, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	926	Jul. 25, 2016	Jul. 24, 2017
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 30, 2016	Aug. 29, 2017
SPEAG	5GHz System Validation Kit	D5GHZV2	1006	Sep. 27, 2016	Sep. 26, 2017
SPEAG	5GHz System Validation Kit	D5GHZV2	1040	Jun. 17, 2016	Jun. 16, 2017
SPEAG	Data Acquisition Electronics	DAE4	1424	Feb. 16, 2017	Feb. 15, 2018
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 28, 2016	Sep. 27, 2017
SPEAG	Data Acquisition Electronics	DAE3	495	May. 27, 2016	May. 26, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 26, 2016	May. 25, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Feb. 21, 2017	Feb. 20, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 03, 2016	Oct. 02, 2017
WonDer	Thermometer	WD-5015	TM685	Oct. 12, 2016	Oct. 11, 2017
WonDer	Thermometer	WD-5015	TM281	Oct. 12, 2016	Oct. 11, 2017
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 20, 2017	Apr. 19, 2018
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 10, 2016	May. 09, 2017
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 17, 2016	May. 16, 2017
R&S	BT Base Station	CBT32	100519	Jun. 03, 2016	Jun. 02, 2017
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 09, 2016	Dec. 08, 2017
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 04, 2017	Jan. 03, 2018
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 05, 2016	Sep. 04, 2017
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017
Anritsu	Power Meter	ML2495A	1438002	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017
Anritsu	Power Sensor	MA2411B	1339195	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 21, 2016	Jun. 20, 2017
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

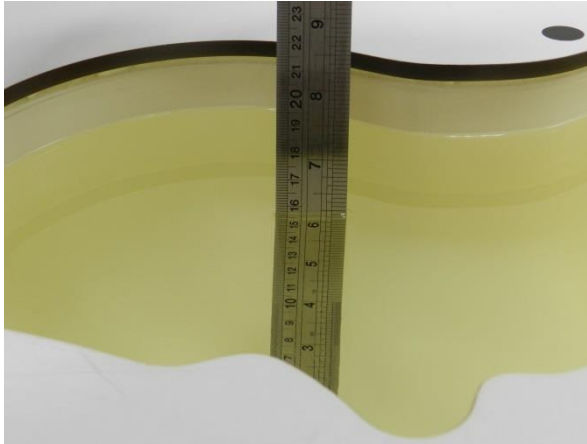


Fig 10.1 Photo of Liquid Height for Head SAR

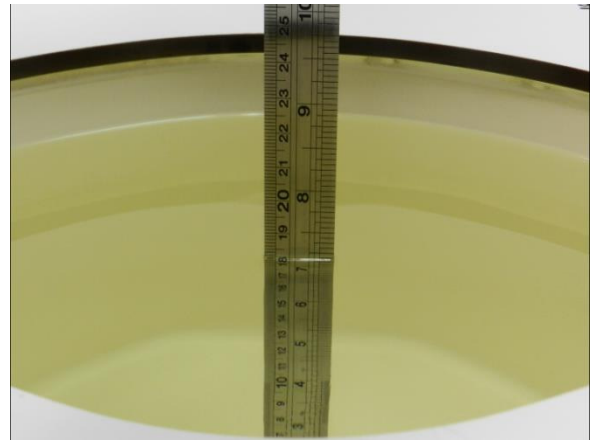


Fig 10.2 Photo of Liquid Height for Body SAR



**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	HSL	22.4	0.902	40.709	0.89	41.90	1.35	-2.84	±5	2017/4/25
750	MSL	22.6	0.957	55.174	0.96	55.50	-0.31	-0.59	±5	2017/5/2
835	HSL	22.4	0.895	42.932	0.90	41.50	-0.56	3.45	±5	2017/4/24
835	MSL	22.6	0.946	54.473	0.97	55.20	-2.47	-1.32	±5	2017/4/30
835	MSL	22.6	0.975	57.194	0.97	55.20	0.52	3.61	±5	2017/5/3
1750	HSL	22.5	1.390	41.700	1.37	40.10	1.46	3.99	±5	2017/4/14
1750	HSL	22.5	1.375	41.829	1.37	40.10	0.36	4.31	±5	2017/4/28
1750	MSL	22.5	1.527	54.161	1.49	53.40	2.48	1.43	±5	2017/4/20
1750	MSL	22.2	1.492	52.638	1.49	53.40	0.13	-1.43	±5	2017/4/27
1900	HSL	22.5	1.410	41.600	1.40	40.00	0.71	4.00	±5	2017/4/12
1900	HSL	22.5	1.385	38.747	1.40	40.00	-1.07	-3.13	±5	2017/4/28
1900	MSL	22.5	1.533	53.363	1.52	53.30	0.86	0.12	±5	2017/4/18
1900	MSL	22.5	1.555	54.164	1.52	53.30	2.30	1.62	±5	2017/4/20
1900	HSL	22.5	1.432	41.123	1.40	40.00	2.29	2.81	±5	2017/4/28
1900	MSL	22.5	1.551	55.309	1.52	53.30	2.04	3.77	±5	2017/4/29
2450	HSL	22.2	1.810	40.800	1.80	39.20	0.56	4.08	±5	2017/4/16
2450	HSL	22.4	1.776	40.635	1.80	39.20	-1.33	3.66	±5	2017/4/28
2450	MSL	22.4	2.024	52.188	1.95	52.70	3.79	-0.97	±5	2017/4/23
2600	HSL	22.4	1.951	40.084	1.96	39.00	-0.46	2.78	±5	2017/4/27
2600	MSL	22.5	2.157	52.040	2.16	52.50	-0.14	-0.88	±5	2017/4/29
5200	MSL	22.7	5.450	47.100	5.30	49.00	2.83	-3.88	±5	2017/4/17
5250	HSL	22.4	4.559	37.392	4.71	35.95	-3.21	4.01	±5	2017/4/28
5250	MSL	22.4	5.228	46.937	5.36	48.95	-2.46	-4.11	±5	2017/4/27
5600	HSL	22.8	5.010	36.100	5.07	35.50	-1.18	1.69	±5	2017/4/16
5600	MSL	22.4	5.664	46.390	5.77	48.50	-1.84	-4.35	±5	2017/4/27
5750	HSL	22.4	5.065	36.718	5.22	35.35	-2.97	3.87	±5	2017/4/28
5800	HSL	22.3	5.090	36.200	5.27	35.30	-3.42	2.55	±5	2017/4/20
5800	MSL	22.7	6.230	46.000	6.00	48.20	3.83	-4.56	±5	2017/4/17



**<Tissue Dielectric Parameter Check for Low / Middle / High Frequencies>**

**General Note:**

The tissue measure results for low / middle / high frequencies list below, the results were used in the Dasy SAR system to perform interpolation to determine the dielectric parameters on the SAR test device. The SAR test plots may slightly difference between the tables below due to the digit rounding in the software calculated.

CH	Frequency (MHz)	Liquid Type	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
9262	1852.4	Head	1.359	41.770	1.400	40.000	-2.93	4.43	±5	Apr. 12, 2017
9400	1880	Head	1.385	41.670	1.400	40.000	-1.07	4.18	±5	Apr. 12, 2017
9538	1907.6	Head	1.413	41.530	1.400	40.000	0.93	3.83	±5	Apr. 12, 2017
18700	1860	Head	1.366	41.752	1.400	40.000	-2.42	4.38	±5	Apr. 12, 2017
18900	1880	Head	1.385	41.667	1.400	40.000	-1.09	4.17	±5	Apr. 12, 2017
19100	1900	Head	1.406	41.568	1.400	40.000	0.40	3.92	±5	Apr. 12, 2017
26140	1860	Head	1.366	41.752	1.400	40.000	-2.42	4.38	±5	Apr. 12, 2017
26340	1880	Head	1.385	41.667	1.400	40.000	-1.09	4.17	±5	Apr. 12, 2017
26590	1905	Head	1.411	41.541	1.400	40.000	0.76	3.85	±5	Apr. 12, 2017
512	1850.2	Head	1.356	41.776	1.400	40.000	-3.11	4.44	±5	Apr. 12, 2017
661	1880	Head	1.385	41.667	1.400	40.000	-1.09	4.17	±5	Apr. 12, 2017
810	1909.8	Head	1.416	41.520	1.400	40.000	1.11	3.80	±5	Apr. 12, 2017
20050	1720	Head	1.357	41.839	1.356	40.149	-0.18	4.34	±5	Apr. 14, 2017
20175	1732.5	Head	1.370	41.783	1.362	40.129	0.71	4.20	±5	Apr. 14, 2017
20300	1745	Head	1.382	41.717	1.368	40.108	0.86	4.03	±5	Apr. 14, 2017
132072	1720	Head	1.357	41.839	1.369	40.089	-0.91	4.34	±5	Apr. 14, 2017
132322	1745	Head	1.382	41.717	1.384	40.046	0.12	4.29	±5	Apr. 14, 2017
132572	1770	Head	1.404	41.617	1.395	40.015	1.01	4.04	±5	Apr. 14, 2017
1	2412	Head	1.766	40.964	1.766	39.268	-0.21	4.23	±5	Apr. 16, 2017
3	2422	Head	1.778	40.924	1.775	39.250	-0.11	4.40	±5	Apr. 16, 2017
6	2437	Head	1.794	40.878	1.788	39.223	0.20	4.28	±5	Apr. 16, 2017
9	2452	Head	1.810	40.818	1.802	39.197	0.58	4.13	±5	Apr. 16, 2017
11	2462	Head	1.822	40.781	1.813	39.184	0.66	4.03	±5	Apr. 16, 2017
100	5500	Head	4.908	36.274	4.967	35.633	-1.25	1.89	±5	Apr. 16, 2017
102	5510	Head	4.916	36.270	4.977	35.620	-1.28	1.88	±5	Apr. 16, 2017
104	5520	Head	4.925	36.254	4.987	35.607	-1.30	1.84	±5	Apr. 16, 2017
106	5530	Head	4.937	36.238	4.998	35.593	-1.26	1.79	±5	Apr. 16, 2017
108	5540	Head	4.949	36.223	5.008	35.580	-1.23	1.75	±5	Apr. 16, 2017
110	5550	Head	4.961	36.208	5.018	35.567	-1.17	1.71	±5	Apr. 16, 2017
112	5560	Head	4.970	36.205	5.029	35.553	-1.19	1.70	±5	Apr. 16, 2017
116	5580	Head	4.985	36.164	5.049	35.527	-1.30	1.87	±5	Apr. 16, 2017
120	5600	Head	5.013	36.130	5.070	35.500	-1.12	1.77	±5	Apr. 16, 2017
122	5610	Head	5.024	36.127	5.080	35.490	-1.10	1.76	±5	Apr. 16, 2017
124	5620	Head	5.033	36.119	5.090	35.480	-1.12	1.74	±5	Apr. 16, 2017
126	5630	Head	5.042	36.104	5.100	35.470	-1.14	1.70	±5	Apr. 16, 2017
128	5640	Head	5.053	36.091	5.110	35.460	-1.12	1.66	±5	Apr. 16, 2017
132	5660	Head	5.076	36.065	5.130	35.440	-1.06	1.88	±5	Apr. 16, 2017
134	5670	Head	5.083	36.059	5.140	35.430	-1.10	1.86	±5	Apr. 16, 2017
136	5680	Head	5.090	36.036	5.150	35.420	-1.17	1.80	±5	Apr. 16, 2017
138	5690	Head	5.101	36.009	5.160	35.410	-1.15	1.72	±5	Apr. 16, 2017
140	5700	Head	5.116	35.993	5.170	35.400	-1.04	1.67	±5	Apr. 16, 2017
142	5710	Head	5.129	35.986	5.180	35.390	-0.99	1.66	±5	Apr. 16, 2017
144	5720	Head	5.138	35.983	5.190	35.380	-1.00	1.65	±5	Apr. 16, 2017

**Table of Low/Middle/High Channel for Liquid Validation**



CH	Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
36	5180	Body	5.427	47.150	5.276	49.030	2.78	-3.78	±5	Apr. 17, 2017
38	5190	Body	5.438	47.150	5.288	49.010	2.80	-3.78	±5	Apr. 17, 2017
40	5200	Body	5.448	47.120	5.300	49.000	2.79	-3.84	±5	Apr. 17, 2017
42	5210	Body	5.459	47.090	5.312	48.990	2.81	-3.90	±5	Apr. 17, 2017
44	5220	Body	5.471	47.060	5.323	48.980	2.84	-3.96	±5	Apr. 17, 2017
46	5230	Body	5.486	47.030	5.335	48.970	2.73	-4.02	±5	Apr. 17, 2017
48	5240	Body	5.500	47.010	5.346	48.960	2.80	-4.06	±5	Apr. 17, 2017
149	5745	Body	6.179	46.230	5.936	48.280	4.02	-4.29	±5	Apr. 17, 2017
151	5755	Body	6.190	46.220	5.947	48.270	4.03	-4.31	±5	Apr. 17, 2017
153	5765	Body	6.199	46.200	5.959	48.250	4.01	-4.35	±5	Apr. 17, 2017
155	5775	Body	6.201	46.180	5.971	48.240	3.87	-4.19	±5	Apr. 17, 2017
157	5785	Body	6.204	46.130	5.982	48.220	3.75	-4.29	±5	Apr. 17, 2017
159	5795	Body	6.218	46.070	5.994	48.210	3.81	-4.42	±5	Apr. 17, 2017
161	5805	Body	6.237	46.030	6.000	48.200	3.95	-4.50	±5	Apr. 17, 2017
165	5825	Body	6.279	46.020	6.030	48.200	4.13	-4.52	±5	Apr. 17, 2017
26140	1860	Body	1.488	53.501	1.520	53.300	-2.08	0.38	±5	Apr. 18, 2017
26340	1880	Body	1.510	53.436	1.520	53.300	-0.66	0.25	±5	Apr. 18, 2017
26590	1905	Body	1.538	53.345	1.520	53.300	1.18	0.09	±5	Apr. 18, 2017
18700	1860	Body	1.488	53.501	1.520	53.300	-2.08	0.38	±5	Apr. 18, 2017
18900	1880	Body	1.510	53.436	1.520	53.300	-0.66	0.25	±5	Apr. 18, 2017
19100	1900	Body	1.533	53.363	1.520	53.300	0.83	0.12	±5	Apr. 18, 2017
20050	1720	Body	1.495	54.259	1.474	53.456	1.68	1.42	±5	Apr. 20, 2017
20175	1732.5	Body	1.508	54.219	1.481	53.433	1.89	1.53	±5	Apr. 20, 2017
20300	1745	Body	1.521	54.174	1.487	53.409	2.10	1.45	±5	Apr. 20, 2017
512	1850.2	Body	1.493	54.330	1.520	53.300	-1.78	1.93	±5	Apr. 20, 2017
661	1880	Body	1.530	54.250	1.520	53.300	0.66	1.78	±5	Apr. 20, 2017
810	1909.8	Body	1.567	54.120	1.520	53.300	3.09	1.54	±5	Apr. 20, 2017
9262	1852.4	Body	1.496	54.330	1.520	53.300	-1.58	1.93	±5	Apr. 20, 2017
9400	1880	Body	1.530	54.250	1.520	53.300	0.66	1.78	±5	Apr. 20, 2017
9538	1907.6	Body	1.564	54.130	1.520	53.300	2.89	1.56	±5	Apr. 20, 2017
149	5745	Head	5.037	36.241	5.215	35.355	-3.51	2.38	±5	Apr. 20, 2017
151	5755	Head	5.049	36.223	5.225	35.345	-3.46	2.61	±5	Apr. 20, 2017
153	5765	Head	5.061	36.219	5.235	35.335	-3.41	2.60	±5	Apr. 20, 2017
155	5775	Head	5.069	36.219	5.245	35.325	-3.45	2.60	±5	Apr. 20, 2017
157	5785	Head	5.075	36.204	5.255	35.315	-3.52	2.56	±5	Apr. 20, 2017
159	5795	Head	5.085	36.180	5.265	35.305	-3.51	2.49	±5	Apr. 20, 2017
161	5805	Head	5.099	36.165	5.275	35.295	-3.43	2.45	±5	Apr. 20, 2017
165	5825	Head	5.118	36.149	5.296	35.275	-3.44	2.40	±5	Apr. 20, 2017
1	2412	Body	1.974	52.346	1.914	52.751	3.37	-0.86	±5	Apr. 23, 2017
3	2422	Body	1.988	52.299	1.923	52.737	3.54	-0.76	±5	Apr. 23, 2017
6	2437	Body	2.006	52.244	1.938	52.717	3.41	-0.86	±5	Apr. 23, 2017
9	2452	Body	2.027	52.179	1.953	52.697	3.94	-0.99	±5	Apr. 23, 2017
11	2462	Body	2.040	52.141	1.967	52.684	3.55	-1.06	±5	Apr. 23, 2017
0	2402	Body	1.961	52.392	1.904	52.764	3.23	-0.77	±5	Apr. 23, 2017
39	2441	Body	2.011	52.228	1.941	52.712	3.68	-0.90	±5	Apr. 23, 2017
78	2480	Body	2.040	52.071	1.950	52.700	4.62	-1.19	±5	Apr. 23, 2017

**Table of Low/Middle/High Channel for Liquid Validation**



CH	Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
4132	826.4	Head	0.886	43.05	0.9	41.54	-1.56	3.73	±5	Apr. 24, 2017
4182	836.4	Head	0.896	42.92	0.9	41.5	-0.44	3.42	±5	Apr. 24, 2017
4233	846.6	Head	0.906	42.79	0.91	41.5	-0.44	3.11	±5	Apr. 24, 2017
128	824.2	Head	0.884	43.08	0.9	41.55	-1.78	3.56	±5	Apr. 24, 2017
189	836.4	Head	0.896	42.92	0.9	41.5	-0.44	3.42	±5	Apr. 24, 2017
251	848.8	Head	0.908	42.77	0.91	41.5	-0.22	3.06	±5	Apr. 24, 2017
1013	824.7	Head	0.88	43.07	0.90	41.55	-1.69	3.78	±5	Apr. 24, 2017
384	836.52	Head	0.90	42.91	0.90	41.50	-0.42	3.41	±5	Apr. 24, 2017
777	848.31	Head	0.91	42.77	0.91	41.50	-0.30	3.07	±5	Apr. 24, 2017
20450	829	Head	0.89	43.01	0.90	41.53	-1.22	3.63	±5	Apr. 24, 2017
20525	836.5	Head	0.90	42.91	0.90	41.50	-0.43	3.41	±5	Apr. 24, 2017
20600	844	Head	0.90	42.82	0.91	41.50	-0.76	3.19	±5	Apr. 24, 2017
26765	821.5	Head	0.88	43.11	0.90	41.56	-2.02	3.62	±5	Apr. 24, 2017
26865	831.5	Head	0.89	42.98	0.90	41.52	-0.96	3.56	±5	Apr. 24, 2017
26965	841.5	Head	0.90	42.85	0.91	41.50	-1.02	3.26	±5	Apr. 24, 2017
23060	704	Head	0.85	41.27	0.89	42.15	-4.14	-1.97	±5	Apr. 25, 2017
23095	707.5	Head	0.86	41.23	0.89	42.13	-3.17	-2.07	±5	Apr. 25, 2017
23130	711	Head	0.87	41.44	0.89	42.11	-2.37	-1.58	±5	Apr. 25, 2017
23230	782	Head	0.93	40.46	0.89	42.15	4.67	-3.89	±5	Apr. 25, 2017
23780	709	Head	0.86	41.40	0.89	42.12	-3.31	-1.66	±5	Apr. 25, 2017
23790	710	Head	0.86	41.28	0.89	42.11	-3.51	-1.94	±5	Apr. 25, 2017
23800	711	Head	0.87	41.44	0.89	42.11	-2.37	-1.58	±5	Apr. 25, 2017
20850	2510	Head	1.84	40.42	1.86	39.12	-0.89	3.36	±5	Apr. 27, 2017
21100	2535	Head	1.87	40.32	1.89	39.09	-0.89	3.11	±5	Apr. 27, 2017
21350	2560	Head	1.90	40.22	1.92	39.05	-0.96	2.86	±5	Apr. 27, 2017
132072	1720	Body	1.460	52.736	1.470	53.496	-0.65	-1.43	±5	Apr. 27, 2017
132322	1745	Body	1.486	52.651	1.485	53.420	-0.24	-1.40	±5	Apr. 27, 2017
132572	1770	Body	1.512	52.573	1.501	53.355	0.79	-1.55	±5	Apr. 27, 2017
52	5260	Body	5.237	46.914	5.370	48.940	-2.47	-4.06	±5	Apr. 27, 2017
54	5270	Body	5.253	46.893	5.381	48.930	-2.37	-4.10	±5	Apr. 27, 2017
56	5280	Body	5.268	46.880	5.393	48.920	-2.26	-4.13	±5	Apr. 27, 2017
58	5290	Body	5.279	46.870	5.404	48.910	-2.25	-4.15	±5	Apr. 27, 2017
60	5300	Body	5.290	46.855	5.416	48.900	-2.40	-4.18	±5	Apr. 27, 2017
62	5310	Body	5.300	46.835	5.428	48.787	-2.39	-4.03	±5	Apr. 27, 2017
64	5320	Body	5.314	46.815	5.439	48.673	-2.32	-3.87	±5	Apr. 27, 2017
100	5500	Body	5.532	46.547	5.650	48.600	-2.09	-4.22	±5	Apr. 27, 2017
102	5510	Body	5.544	46.531	5.661	48.590	-2.06	-4.26	±5	Apr. 27, 2017
104	5520	Body	5.555	46.513	5.673	48.580	-2.02	-4.30	±5	Apr. 27, 2017
106	5530	Body	5.570	46.495	5.685	48.570	-1.94	-4.33	±5	Apr. 27, 2017
108	5540	Body	5.584	46.479	5.696	48.560	-2.04	-4.36	±5	Apr. 27, 2017
110	5550	Body	5.600	46.461	5.708	48.550	-1.93	-4.40	±5	Apr. 27, 2017
112	5560	Body	5.613	46.459	5.720	48.540	-1.88	-4.21	±5	Apr. 27, 2017
116	5580	Body	5.634	46.420	5.743	48.520	-1.85	-4.29	±5	Apr. 27, 2017
120	5600	Body	5.664	46.390	5.770	48.500	-1.84	-4.35	±5	Apr. 27, 2017
122	5610	Body	5.675	46.382	5.778	48.485	-1.81	-4.37	±5	Apr. 27, 2017
124	5620	Body	5.686	46.366	5.790	48.470	-1.80	-4.40	±5	Apr. 27, 2017
126	5630	Body	5.699	46.347	5.801	48.455	-1.74	-4.44	±5	Apr. 27, 2017
128	5640	Body	5.713	46.329	5.813	48.440	-1.66	-4.28	±5	Apr. 27, 2017

**Table of Low/Middle/High Channel for Liquid Validation**



CH	Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
132	5660	Body	5.743	46.302	5.837	48.410	-1.66	-4.33	±5	Apr. 27, 2017
134	5670	Body	5.754	46.298	5.848	48.395	-1.65	-4.34	±5	Apr. 27, 2017
136	5680	Body	5.762	46.281	5.860	48.380	-1.67	-4.38	±5	Apr. 27, 2017
138	5690	Body	5.777	46.254	5.872	48.365	-1.58	-4.43	±5	Apr. 27, 2017
140	5700	Body	5.792	46.240	5.883	48.350	-1.50	-4.46	±5	Apr. 27, 2017
142	5710	Body	5.805	46.230	5.895	48.335	-1.44	-4.29	±5	Apr. 27, 2017
144	5720	Body	5.817	46.216	5.907	48.320	-1.58	-4.31	±5	Apr. 27, 2017
52	5260	Head	4.566	37.369	4.720	35.940	-3.25	4.09	±5	Apr. 28, 2017
54	5270	Head	4.578	37.347	4.730	35.930	-3.21	4.03	±5	Apr. 28, 2017
56	5280	Head	4.590	37.335	4.740	35.920	-3.16	4.00	±5	Apr. 28, 2017
58	5290	Head	4.600	37.327	4.750	35.910	-3.16	3.97	±5	Apr. 28, 2017
60	5300	Head	4.607	37.313	4.760	35.900	-3.21	3.94	±5	Apr. 28, 2017
62	5310	Head	4.617	37.294	4.770	35.887	-3.21	3.88	±5	Apr. 28, 2017
64	5320	Head	4.629	37.276	4.781	35.873	-3.17	3.83	±5	Apr. 28, 2017
132072	1720	Head	1.344	41.951	1.369	40.089	-1.93	4.62	±5	Apr. 28, 2017
132322	1745	Head	1.369	41.844	1.384	40.046	-0.77	4.61	±5	Apr. 28, 2017
132572	1770	Head	1.393	41.756	1.395	40.015	0.18	4.39	±5	Apr. 28, 2017
26140	1860	Head	1.344	38.916	1.400	40.000	-4.01	-2.71	±5	Apr. 28, 2017
26340	1880	Head	1.363	38.831	1.400	40.000	-2.63	-2.92	±5	Apr. 28, 2017
26590	1905	Head	1.390	38.729	1.400	40.000	-0.74	-3.18	±5	Apr. 28, 2017
149	5745	Head	5.059	36.725	5.215	35.355	-3.09	3.74	±5	Apr. 28, 2017
151	5755	Head	5.071	36.709	5.225	35.345	-3.05	3.99	±5	Apr. 28, 2017
153	5765	Head	5.083	36.700	5.235	35.335	-3.00	3.97	±5	Apr. 28, 2017
155	5775	Head	5.091	36.698	5.245	35.325	-3.03	3.96	±5	Apr. 28, 2017
157	5785	Head	5.097	36.685	5.255	35.315	-3.10	3.92	±5	Apr. 28, 2017
159	5795	Head	5.107	36.663	5.265	35.305	-3.09	3.86	±5	Apr. 28, 2017
161	5805	Head	5.121	36.650	5.275	35.295	-3.01	3.82	±5	Apr. 28, 2017
165	5825	Head	5.141	36.633	5.296	35.275	-3.01	3.78	±5	Apr. 28, 2017
1	2412	Head	1.733	40.792	1.766	39.268	-2.10	3.80	±5	Apr. 28, 2017
3	2422	Head	1.745	40.747	1.775	39.250	-1.97	3.95	±5	Apr. 28, 2017
6	2437	Head	1.762	40.688	1.788	39.223	-1.58	3.80	±5	Apr. 28, 2017
9	2452	Head	1.778	40.626	1.802	39.197	-1.21	3.64	±5	Apr. 28, 2017
11	2462	Head	1.790	40.586	1.813	39.184	-1.09	3.53	±5	Apr. 28, 2017
25	1851.25	Head	1.382	41.3	1.4	40	-1.29	3.25	±5	Apr. 28, 2017
600	1880	Head	1.41	41.21	1.4	40	0.71	3.03	±5	Apr. 28, 2017
1175	1908.75	Head	1.44	41.09	1.4	40	2.86	2.73	±5	Apr. 28, 2017
25	1851.25	Body	1.495	55.49	1.52	53.3	-1.64	4.11	±5	Apr. 29, 2017
600	1880	Body	1.529	55.39	1.52	53.3	0.59	3.92	±5	Apr. 29, 2017
1175	1908.75	Body	1.561	55.27	1.52	53.3	2.70	3.70	±5	Apr. 29, 2017
20850	2510	Body	2.029	52.34	2.03	52.62	-0.05	-0.49	±5	Apr. 29, 2017
21100	2535	Body	2.061	52.26	2.07	52.59	-0.43	-0.65	±5	Apr. 29, 2017
21350	2560	Body	2.098	52.16	2.1	52.55	-0.10	-0.84	±5	Apr. 29, 2017
20450	829	Body	0.94	54.53	0.97	55.22	-2.97	-1.21	±5	Apr. 30, 2017
20525	836.5	Body	0.95	54.46	0.97	55.20	-2.30	-1.34	±5	Apr. 30, 2017
20600	844	Body	0.95	54.39	0.98	55.17	-2.61	-1.47	±5	Apr. 30, 2017
26765	821.5	Body	0.93	54.61	0.97	55.25	-3.69	-1.07	±5	Apr. 30, 2017
26865	831.5	Body	0.94	54.51	0.97	55.21	-2.75	-1.25	±5	Apr. 30, 2017
26965	841.5	Body	0.95	54.41	0.98	55.18	-2.86	-1.43	±5	Apr. 30, 2017

**Table of Low/Middle/High Channel for Liquid Validation**



CH	Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
1013	824.7	Body	0.937	54.58	0.97	55.24	-3.40	-1.12	$\pm 5$	Apr. 30, 2017
384	836.52	Body	0.948	54.46	0.97	55.2	-2.27	-1.34	$\pm 5$	Apr. 30, 2017
777	848.31	Body	0.958	54.34	0.99	55.16	-3.23	-1.56	$\pm 5$	Apr. 30, 2017
4132	826.4	Body	0.939	54.56	0.97	55.23	-3.20	-1.16	$\pm 5$	Apr. 30, 2017
4182	836.4	Body	0.948	54.46	0.97	55.2	-2.27	-1.34	$\pm 5$	Apr. 30, 2017
4233	846.6	Body	0.957	54.36	0.98	55.16	-2.35	-1.52	$\pm 5$	Apr. 30, 2017
23780	709	Body	0.92	55.58	0.96	55.66	-4.13	-0.21	$\pm 5$	May. 02, 2017
23790	710	Body	0.92	55.57	0.96	55.66	-4.03	-0.23	$\pm 5$	May. 02, 2017
23800	711	Body	0.92	55.56	0.96	55.66	-3.94	-0.26	$\pm 5$	May. 02, 2017
23230	782	Body	0.99	54.89	0.96	55.68	2.84	-1.46	$\pm 5$	May. 02, 2017
23060	704	Body	0.92	55.63	0.96	55.68	-4.62	-0.13	$\pm 5$	May. 02, 2017
23095	707.5	Body	0.92	55.59	0.96	55.67	-4.28	-0.19	$\pm 5$	May. 02, 2017
23130	711	Body	0.92	55.56	0.96	55.66	-3.94	-0.26	$\pm 5$	May. 02, 2017
128	824.2	Body	0.96	57.30	0.97	55.24	-0.52	3.80	$\pm 5$	May. 03, 2017
189	836.4	Body	0.98	57.18	0.97	55.20	0.63	3.59	$\pm 5$	May. 03, 2017
251	848.8	Body	0.99	57.07	0.99	55.16	-0.26	3.38	$\pm 5$	May. 03, 2017

Table of Low/Middle/High Channel for Liquid Validation




10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 11 columns: Date, Frequency (MHz), Tissue Type, Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). Rows contain test data for various frequencies from 750 to 5800 MHz.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2017/4/20	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3976	DAE4 Sn1424	5.15	19.40	20.6	6.19
2017/4/18	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	5.27	20.60	21.08	2.33
2017/4/20	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	5.56	20.60	22.24	7.96
2017/4/29	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	4.74	20.60	18.96	-7.96
2017/4/27	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3931	DAE3 Sn577	1.91	21.20	19.1	-9.91
2017/4/27	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3931	DAE3 Sn577	2.19	22.00	21.9	-0.45

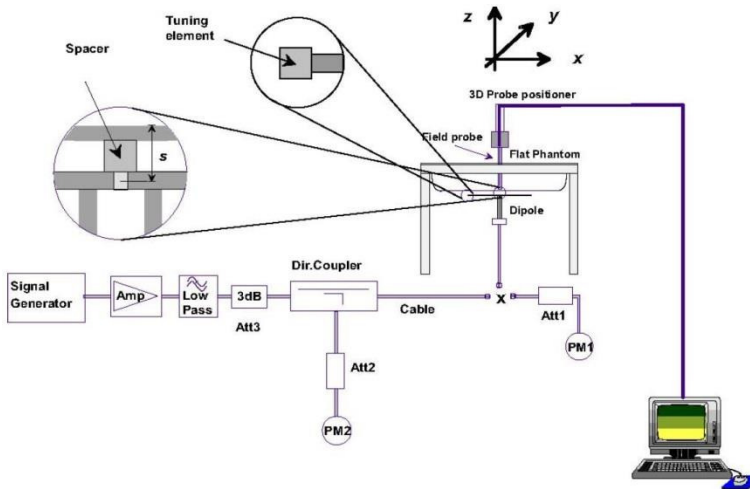

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

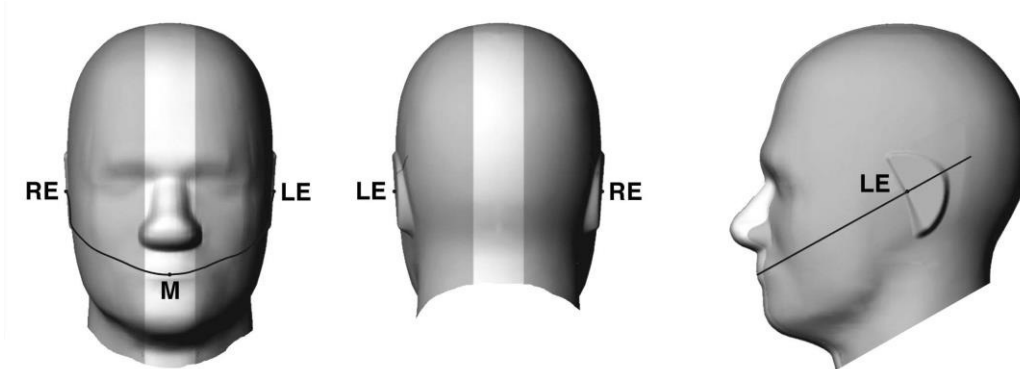


Fig 9.1.1 Front, back, and side views of SAM twin phantom

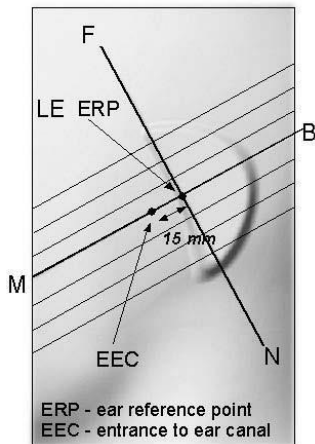


Fig 9.1.2 Close-up side view of phantom showing the ear region.


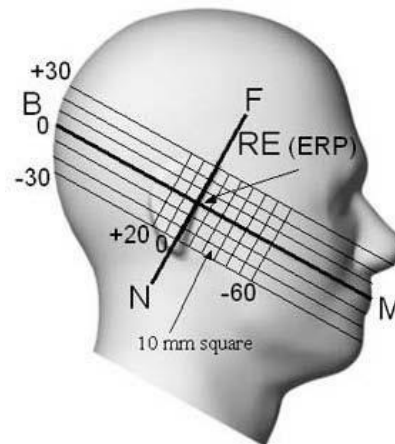



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**11.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

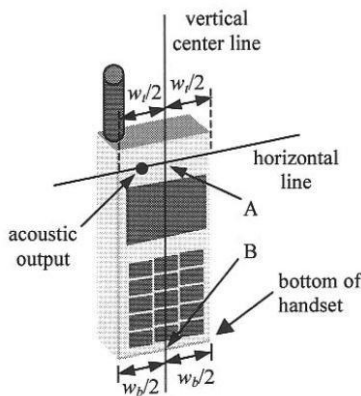

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

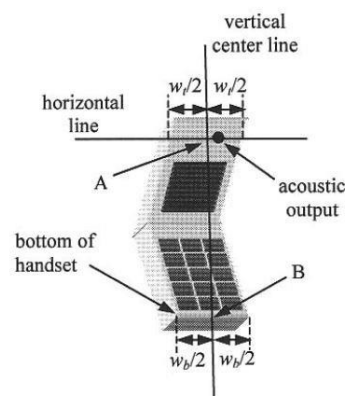


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

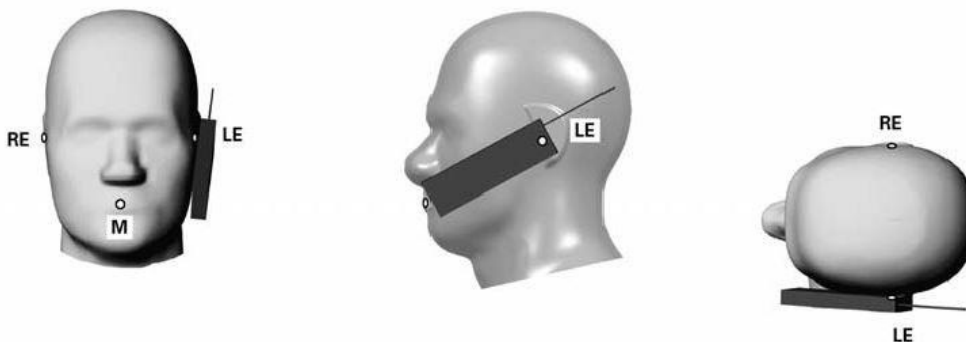

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**11.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

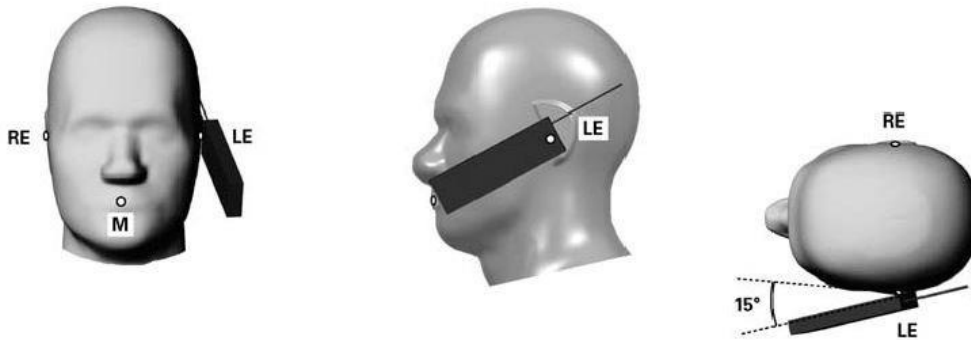


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**11.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

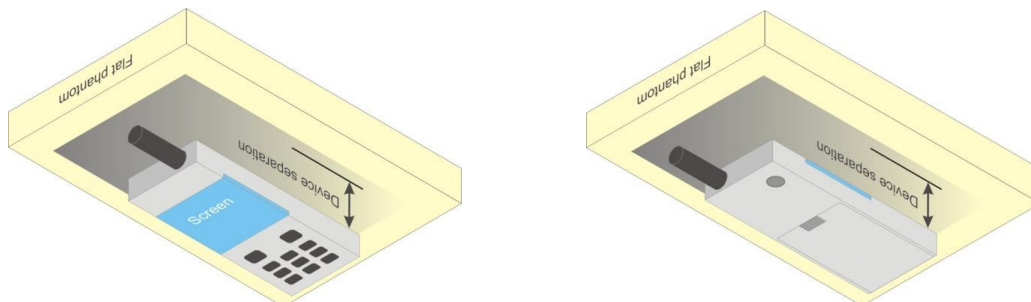

**Fig 9.4 Body Worn Position**



**11.5 Product Specific**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

**11.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

**General Note:**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

### < At-Head and Default Power Mode>

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.95	32.91	32.73	33.50	23.95	23.91	23.73	24.50
GPRS 1 Tx slot	32.99	32.92	33.00	33.50	23.99	23.92	24.00	24.50
GPRS 2 Tx slots	28.52	28.52	28.50	30.50	22.52	22.52	22.50	24.50
GPRS 3 Tx slots	26.85	26.80	26.83	28.75	22.59	22.54	22.57	24.49
GPRS 4 Tx slots	26.10	25.98	25.86	27.50	23.10	22.98	22.86	24.50
EDGE 1 Tx slot	25.77	25.96	25.67	28.00	16.77	16.96	16.67	19.00
EDGE 2 Tx slots	25.55	25.28	25.31	28.00	19.55	19.28	19.31	22.00
EDGE 3 Tx slots	24.78	24.49	24.68	26.25	20.52	20.23	20.42	21.99
EDGE 4 Tx slots	23.25	23.19	23.00	25.00	20.25	20.19	20.00	22.00

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.18	29.20	29.22	30.50	20.18	20.20	20.22	21.50
GPRS 1 Tx slot	29.14	29.19	29.28	30.50	20.14	20.19	20.28	21.50
GPRS 2 Tx slots	25.62	25.72	25.77	27.50	19.62	19.72	19.77	21.50
GPRS 3 Tx slots	24.16	24.18	24.21	25.75	19.90	19.92	19.95	21.49
GPRS 4 Tx slots	22.79	22.75	22.90	24.50	19.79	19.75	19.90	21.50
EDGE 1 Tx slot	25.01	25.12	25.07	27.00	16.01	16.12	16.07	18.00
EDGE 2 Tx slots	24.68	24.75	25.03	27.00	18.68	18.75	19.03	21.00
EDGE 3 Tx slots	23.42	23.65	23.48	25.25	19.16	19.39	19.22	20.99
EDGE 4 Tx slots	22.02	22.13	22.20	24.00	19.02	19.13	19.20	21.00



**<Near-body and Hotspot Mode>**

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
	Frequency (MHz)	824.2	836.4		848.8	824.2	836.4	
GSM 1 Tx slot	32.95	32.91	32.73	33.50	23.95	23.91	23.73	24.50
GPRS 1 Tx slot	32.99	32.92	33.00	33.50	23.99	23.92	24.00	24.50
GPRS 2 Tx slots	28.52	28.52	28.50	30.50	22.52	22.52	22.50	24.50
GPRS 3 Tx slots	26.85	26.80	26.83	28.75	22.59	22.54	22.57	24.49
GPRS 4 Tx slots	26.10	25.98	25.86	27.50	23.10	22.98	22.86	24.50
EDGE 1 Tx slot	25.77	25.96	25.67	28.00	16.77	16.96	16.67	19.00
EDGE 2 Tx slots	25.55	25.28	25.31	28.00	19.55	19.28	19.31	22.00
EDGE 3 Tx slots	24.78	24.49	24.68	26.25	20.52	20.23	20.42	21.99
EDGE 4 Tx slots	23.25	23.19	23.00	25.00	20.25	20.19	20.00	22.00

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
	Frequency (MHz)	1850.2	1880		1909.8	1850.2	1880	
GSM 1 Tx slot	29.18	29.20	29.22	30.50	20.18	20.20	20.22	21.50
GPRS 1 Tx slot	29.14	29.19	29.28	30.50	20.14	20.19	20.28	21.50
GPRS 2 Tx slots	25.62	25.72	25.77	27.50	19.62	19.72	19.77	21.50
GPRS 3 Tx slots	24.16	24.18	24.21	25.75	19.90	19.92	19.95	21.49
GPRS 4 Tx slots	22.79	22.75	22.90	24.50	19.79	19.75	19.90	21.50
EDGE 1 Tx slot	25.01	25.12	25.07	27.00	16.01	16.12	16.07	18.00
EDGE 2 Tx slots	24.68	24.75	25.03	27.00	18.68	18.75	19.03	21.00
EDGE 3 Tx slots	23.42	23.65	23.48	25.25	19.16	19.39	19.22	20.99
EDGE 4 Tx slots	22.02	22.13	22.20	24.00	19.02	19.13	19.20	21.00

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

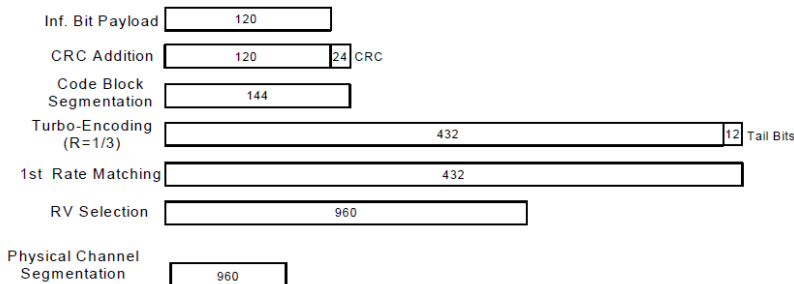

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**< At-Head and Default Power Mode>**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.38	22.05	22.41	24.00	22.78	22.50	22.38	24.00
3GPP Rel 99	RMC 12.2Kbps	22.51	22.25	22.50	24.00	22.80	22.58	22.40	24.00
3GPP Rel 6	HSDPA Subtest-1	21.50	21.36	21.48	23.00	21.72	21.68	21.41	23.00
3GPP Rel 6	HSDPA Subtest-2	21.42	21.31	21.43	23.00	21.74	21.61	21.43	23.00
3GPP Rel 6	HSDPA Subtest-3	20.94	20.87	20.91	22.50	21.25	21.11	21.00	22.50
3GPP Rel 6	HSDPA Subtest-4	20.92	20.84	20.90	22.50	21.27	21.13	21.02	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.34	21.30	21.44	23.00	21.70	21.65	21.38	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.36	21.11	21.39	23.00	21.70	21.58	21.40	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	20.76	20.76	20.81	22.50	21.24	21.08	20.99	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	20.92	20.75	20.90	22.50	21.23	21.10	21.00	22.50
3GPP Rel 6	HSUPA Subtest-1	21.28	21.13	21.06	23.00	21.72	21.68	21.40	23.00
3GPP Rel 6	HSUPA Subtest-2	19.26	19.15	19.07	21.00	19.82	19.72	19.68	21.00
3GPP Rel 6	HSUPA Subtest-3	20.21	20.16	20.10	22.00	20.73	20.68	20.58	22.00
3GPP Rel 6	HSUPA Subtest-4	19.20	19.12	19.07	21.00	19.72	19.65	19.60	21.00
3GPP Rel 6	HSUPA Subtest-5	21.52	21.37	21.11	23.00	21.74	21.62	21.42	23.00

**<Near-body and Hotspot Mode>**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	21.51	21.35	21.41	23.00	22.08	22.09	21.80	23.50
3GPP Rel 99	RMC 12.2Kbps	21.55	21.36	21.41	23.00	22.09	22.10	21.82	23.50
3GPP Rel 6	HSDPA Subtest-1	20.44	20.10	20.53	22.00	21.15	21.10	20.83	22.50
3GPP Rel 6	HSDPA Subtest-2	20.50	20.44	20.48	22.00	21.18	21.03	20.87	22.50
3GPP Rel 6	HSDPA Subtest-3	20.10	19.72	19.98	21.50	20.66	20.59	20.48	22.00
3GPP Rel 6	HSDPA Subtest-4	20.04	20.03	19.88	21.50	20.71	20.53	20.50	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	20.57	20.27	20.39	22.00	21.19	21.09	20.79	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	20.44	20.29	20.51	22.00	21.19	21.04	20.89	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.84	19.75	19.96	21.50	20.68	20.57	20.46	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	20.01	19.93	20.09	21.50	20.70	20.58	20.45	22.00
3GPP Rel 6	HSUPA Subtest-1	20.35	20.30	20.32	22.00	21.21	21.15	20.83	22.50
3GPP Rel 6	HSUPA Subtest-2	18.28	18.18	18.32	20.00	19.29	19.20	19.08	20.50
3GPP Rel 6	HSUPA Subtest-3	19.39	19.38	19.39	21.00	20.21	20.09	19.99	21.50
3GPP Rel 6	HSUPA Subtest-4	18.51	18.47	18.24	20.00	19.19	19.07	19.00	20.50
3GPP Rel 6	HSUPA Subtest-5	20.62	20.24	20.37	22.00	21.15	21.09	20.82	22.50



**<CDMA2000 Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

**<At-Head Power Mode>**

Band	CDMA BC0			Tune-up Limit (dBm)	CDMA BC1			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	23.91	23.64	23.53	25.00	23.51	23.14	23.46	25.00
RC3 SO55	23.91	23.76	23.52	25.00	23.42	23.02	23.41	25.00
RC3 SO32 (F+SCH)	23.91	23.66	23.53	25.00	23.48	23.05	23.44	25.00
RC3 SO32 (+SCH)	23.90	23.70	23.52	25.00	23.47	23.06	23.42	25.00
RTAP 153.6Kbps	23.91	23.67	23.54	25.00	23.50	23.12	23.46	25.00
RETAP 4096Bits	23.92	23.76	23.54	25.00	23.52	23.16	23.46	25.00

**<Default Power Mode>**

Band	CDMA BC0			Tune-up Limit (dBm)	CDMA BC1			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	23.91	23.64	23.53	25.00	22.38	22.50	22.40	24.00
RC3 SO55	23.91	23.76	23.52	25.00	22.43	22.55	22.46	24.00
RC3 SO32 (F+SCH)	23.91	23.66	23.53	25.00	22.46	22.54	22.45	24.00
RC3 SO32 (+SCH)	23.90	23.70	23.52	25.00	22.42	22.54	22.46	24.00
RTAP 153.6Kbps	23.91	23.67	23.54	25.00	22.44	22.54	22.48	24.00
RETAP 4096Bits	23.92	23.76	23.54	25.00	22.45	22.52	22.47	24.00


**<Near-body and Hotspot Mode>**

Band	CDMA BC0			Tune-up Limit (dBm)	CDMA BC1			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	23.07	22.83	22.71	24.00	21.28	21.37	21.30	23.00
RC3 SO55	23.09	22.84	22.72	24.00	21.37	21.38	21.32	23.00
RC3 SO32 (F+SCH)	23.09	22.84	22.71	24.00	21.33	21.43	21.34	23.00
RC3 SO32 (+SCH)	23.08	22.85	22.71	24.00	21.33	21.41	21.32	23.00
RTAP 153.6Kbps	23.09	22.87	22.74	24.00	21.36	21.47	21.41	23.00
RETAP 4096Bits	23.09	22.84	22.74	24.00	21.32	21.44	21.45	23.00


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore the conducted power measurement for 64QAM and 16 QAM signal modulation are correct.

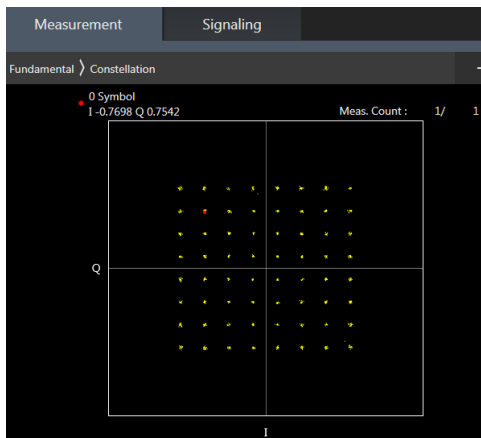

**64QAM**

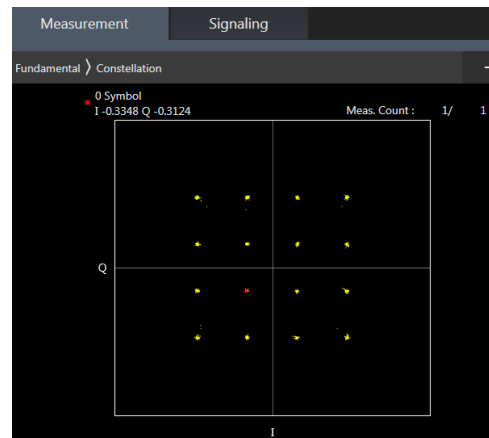

**16QAM**



< At-Head and Default Power Mode >

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.67	22.59	22.78	24	0
20	QPSK	1	49	22.33	22.28	22.50		
20	QPSK	1	99	22.41	22.44	22.53		
20	QPSK	50	0	21.48	21.44	21.68	23	1
20	QPSK	50	24	21.44	21.41	21.64		
20	QPSK	50	50	21.41	21.39	21.58		
20	QPSK	100	0	21.45	21.44	21.63		
20	16QAM	1	0	21.91	21.81	21.97	23	1
20	16QAM	1	49	21.58	21.49	21.68		
20	16QAM	1	99	21.61	21.66	21.74		
20	16QAM	50	0	20.54	20.48	20.71	22	2
20	16QAM	50	24	20.45	20.43	20.63		
20	16QAM	50	50	20.40	20.39	20.59		
20	16QAM	100	0	20.45	20.42	20.64		
20	64QAM	1	0	21.78	21.69	21.83	22	2
20	64QAM	1	49	21.49	21.38	21.63		
20	64QAM	1	99	21.50	21.48	21.54		
20	64QAM	50	0	20.53	20.45	20.61	21	3
20	64QAM	50	24	20.42	20.37	20.64		
20	64QAM	50	50	20.35	20.32	20.66		
20	64QAM	100	0	20.38	20.53	20.67		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.44	22.39	22.61	24	0
15	QPSK	1	37	22.30	22.26	22.49		
15	QPSK	1	74	22.30	22.26	22.51		
15	QPSK	36	0	21.44	21.45	21.66	23	1
15	QPSK	36	20	21.42	21.38	21.63		
15	QPSK	36	39	21.37	21.35	21.58		
15	QPSK	75	0	21.43	21.38	21.62		
15	16QAM	1	0	21.71	21.66	21.86	23	1
15	16QAM	1	37	21.56	21.52	21.72		
15	16QAM	1	74	21.56	21.54	21.77		
15	16QAM	36	0	20.47	20.46	20.66	22	2
15	16QAM	36	20	20.41	20.43	20.64		
15	16QAM	36	39	20.36	20.39	20.60		
15	16QAM	75	0	20.43	20.41	20.63		
15	64QAM	1	0	21.63	21.45	21.75	22	2
15	64QAM	1	37	21.30	21.46	21.50		
15	64QAM	1	74	21.44	21.30	21.53		
15	64QAM	36	0	20.52	20.39	20.64	21	3
15	64QAM	36	20	20.48	20.44	20.72		
15	64QAM	36	39	20.32	20.29	20.53		
15	64QAM	75	0	20.33	20.35	20.69		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.62	22.59	22.62	24	0
10	QPSK	1	25	22.30	22.30	22.53		
10	QPSK	1	49	22.52	22.51	22.54		
10	QPSK	25	0	21.40	21.39	21.63	23	1
10	QPSK	25	12	21.36	21.36	21.58		
10	QPSK	25	25	21.36	21.33	21.57		
10	QPSK	50	0	21.35	21.38	21.61		
10	16QAM	1	0	21.77	21.77	21.80	23	1
10	16QAM	1	25	21.53	21.50	21.74		
10	16QAM	1	49	21.69	21.70	21.74		
10	16QAM	25	0	20.43	20.40	20.62	22	2
10	16QAM	25	12	20.40	20.40	20.62		
10	16QAM	25	25	20.36	20.37	20.60		
10	16QAM	50	0	20.41	20.39	20.61		
10	64QAM	1	0	21.79	21.66	21.66	22	2
10	64QAM	1	25	21.39	21.38	21.71		
10	64QAM	1	49	21.56	21.65	21.58		
10	64QAM	25	0	20.42	20.37	20.64	21	3
10	64QAM	25	12	20.27	20.40	20.67		
10	64QAM	25	25	20.29	20.43	20.58		
10	64QAM	50	0	20.35	20.45	20.68		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.36	22.34	22.61	24	0
5	QPSK	1	12	22.27	22.27	22.54		
5	QPSK	1	24	22.32	22.33	22.57		
5	QPSK	12	0	21.35	21.37	21.62	23	1
5	QPSK	12	7	21.33	21.37	21.62		
5	QPSK	12	13	21.31	21.33	21.60		
5	QPSK	25	0	21.33	21.34	21.57		
5	16QAM	1	0	21.51	21.52	21.75	23	1
5	16QAM	1	12	21.50	21.50	21.76		
5	16QAM	1	24	21.48	21.51	21.74		
5	16QAM	12	0	20.37	20.40	20.62	22	2
5	16QAM	12	7	20.37	20.39	20.67		
5	16QAM	12	13	20.34	20.35	20.61		
5	16QAM	25	0	20.34	20.37	20.62		
5	64QAM	1	0	21.50	21.50	21.64	22	2
5	64QAM	1	12	21.32	21.43	21.67		
5	64QAM	1	24	21.47	21.47	21.57		
5	64QAM	12	0	20.34	20.32	20.69	21	3
5	64QAM	12	7	20.32	20.43	20.57		
5	64QAM	12	13	20.35	20.28	20.53		
5	64QAM	25	0	20.40	20.34	20.60		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.30	22.32	22.55	24	0
3	QPSK	1	8	22.28	22.30	22.54		
3	QPSK	1	14	22.28	22.28	22.53		
3	QPSK	8	0	21.32	21.35	21.58	23	1
3	QPSK	8	4	21.32	21.35	21.58		
3	QPSK	8	7	21.30	21.34	21.57		
3	QPSK	15	0	21.28	21.34	21.58		
3	16QAM	1	0	21.44	21.48	21.71	23	1
3	16QAM	1	8	21.48	21.49	21.75		
3	16QAM	1	14	21.45	21.46	21.65		
3	16QAM	8	0	20.37	20.41	20.65	22	2
3	16QAM	8	4	20.38	20.42	20.68		
3	16QAM	8	7	20.33	20.40	20.62		
3	16QAM	15	0	20.36	20.36	20.61		
3	64QAM	1	0	21.30	21.46	21.62	22	2
3	64QAM	1	8	21.36	21.39	21.61		
3	64QAM	1	14	21.48	21.31	21.66		
3	64QAM	8	0	20.42	20.25	20.67	21	3
3	64QAM	8	4	20.40	20.31	20.54		
3	64QAM	8	7	20.20	20.37	20.48		
3	64QAM	15	0	20.26	20.29	20.62		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.18	22.21	22.47	24	0
1.4	QPSK	1	3	22.26	22.28	22.50		
1.4	QPSK	1	5	22.16	22.22	22.43		
1.4	QPSK	3	0	22.25	22.26	22.54		
1.4	QPSK	3	1	22.31	22.34	22.59		
1.4	QPSK	3	3	22.23	22.25	22.53	23	1
1.4	QPSK	6	0	21.24	21.28	21.51	23	1
1.4	16QAM	1	0	21.35	21.37	21.66		
1.4	16QAM	1	3	21.45	21.50	21.70		
1.4	16QAM	1	5	21.37	21.42	21.62		
1.4	16QAM	3	0	21.21	21.27	21.51		
1.4	16QAM	3	1	21.28	21.30	21.54		
1.4	16QAM	3	3	21.22	21.23	21.47	22	2
1.4	16QAM	6	0	20.32	20.36	20.59		
1.4	64QAM	1	0	21.21	21.21	21.55	22	2
1.4	64QAM	1	3	21.42	21.32	21.66		
1.4	64QAM	1	5	21.30	21.22	21.55		
1.4	64QAM	3	0	21.28	21.31	21.57		
1.4	64QAM	3	1	21.36	21.27	21.49		
1.4	64QAM	3	3	21.14	21.27	21.47	21	3
1.4	64QAM	6	0	20.24	20.23	20.41		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.72	22.76	22.68	24	0
20	QPSK	1	49	22.45	22.39	22.56		
20	QPSK	1	99	22.32	22.37	22.54		
20	QPSK	50	0	21.63	21.69	21.68	23	1
20	QPSK	50	24	21.59	21.56	21.67		
20	QPSK	50	50	21.52	21.50	21.65		
20	QPSK	100	0	21.57	21.65	21.68		
20	16QAM	1	0	21.99	21.95	21.89	23	1
20	16QAM	1	49	21.69	21.62	21.82		
20	16QAM	1	99	21.55	21.63	21.78		
20	16QAM	50	0	20.66	20.63	20.69	22	2
20	16QAM	50	24	20.56	20.57	20.67		
20	16QAM	50	50	20.53	20.50	20.63		
20	16QAM	100	0	20.58	20.58	20.67		
20	64QAM	1	0	21.84	21.92	21.83	22	2
20	64QAM	1	49	21.61	21.50	21.59		
20	64QAM	1	99	21.35	21.57	21.73		
20	64QAM	50	0	20.60	20.64	20.63	21	3
20	64QAM	50	24	20.59	20.56	20.70		
20	64QAM	50	50	20.43	20.43	20.60		
20	64QAM	100	0	20.65	20.69	20.70		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.72	22.53	22.65	24	0
15	QPSK	1	37	22.42	22.37	22.56		
15	QPSK	1	74	22.41	22.42	22.55		
15	QPSK	36	0	21.69	21.58	21.74	23	1
15	QPSK	36	20	21.53	21.55	21.70		
15	QPSK	36	39	21.50	21.49	21.64		
15	QPSK	75	0	21.54	21.53	21.68		
15	16QAM	1	0	21.94	21.81	21.91	23	1
15	16QAM	1	37	21.68	21.62	21.84		
15	16QAM	1	74	21.68	21.64	21.83		
15	16QAM	36	0	20.70	20.58	20.73	22	2
15	16QAM	36	20	20.57	20.56	20.69		
15	16QAM	36	39	20.50	20.46	20.63		
15	16QAM	75	0	20.54	20.54	20.68		
15	64QAM	1	0	21.83	21.54	21.77	22	2
15	64QAM	1	37	21.54	21.54	21.74		
15	64QAM	1	74	21.54	21.59	21.57		
15	64QAM	36	0	20.78	20.64	20.73	21	3
15	64QAM	36	20	20.51	20.55	20.69		
15	64QAM	36	39	20.47	20.55	20.61		
15	64QAM	75	0	20.48	20.45	20.59		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.67	22.55	22.69	24	0
10	QPSK	1	25	22.57	22.42	22.57		
10	QPSK	1	49	22.45	22.40	22.54		
10	QPSK	25	0	21.66	21.56	21.67	23	1
10	QPSK	25	12	21.61	21.52	21.65		
10	QPSK	25	25	21.52	21.49	21.64		
10	QPSK	50	0	21.61	21.51	21.65	23	1
10	16QAM	1	0	21.87	21.73	21.92		
10	16QAM	1	25	21.78	21.63	21.82		
10	16QAM	1	49	21.66	21.61	21.79	22	2
10	16QAM	25	0	20.66	20.52	20.67		
10	16QAM	25	12	20.63	20.53	20.66		
10	16QAM	25	25	20.51	20.45	20.61	22	2
10	16QAM	50	0	20.63	20.52	20.66		
10	64QAM	1	0	21.86	21.68	21.84		
10	64QAM	1	25	21.73	21.57	21.77	22	2
10	64QAM	1	49	21.53	21.57	21.65		
10	64QAM	25	0	20.72	20.58	20.67		
10	64QAM	25	12	20.71	20.59	20.75	21	3
10	64QAM	25	25	20.57	20.49	20.73		
10	64QAM	50	0	20.56	20.55	20.73		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.58	22.49	22.62	24	0
5	QPSK	1	12	22.53	22.42	22.57		
5	QPSK	1	24	22.55	22.41	22.58		
5	QPSK	12	0	21.64	21.51	21.67	23	1
5	QPSK	12	7	21.61	21.48	21.64		
5	QPSK	12	13	21.59	21.46	21.60		
5	QPSK	25	0	21.61	21.51	21.64	23	1
5	16QAM	1	0	21.80	21.65	21.89		
5	16QAM	1	12	21.78	21.60	21.85		
5	16QAM	1	24	21.76	21.60	21.81	22	2
5	16QAM	12	0	20.64	20.50	20.68		
5	16QAM	12	7	20.62	20.50	20.65		
5	16QAM	12	13	20.60	20.46	20.61	22	2
5	16QAM	25	0	20.63	20.50	20.64		
5	64QAM	1	0	21.71	21.61	21.66		
5	64QAM	1	12	21.61	21.62	21.72	22	2
5	64QAM	1	24	21.71	21.46	21.67		
5	64QAM	12	0	20.57	20.45	20.68		
5	64QAM	12	7	20.65	20.45	20.65	21	3
5	64QAM	12	13	20.68	20.54	20.59		
5	64QAM	25	0	20.58	20.49	20.58		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.55	22.45	22.58	24	0
3	QPSK	1	8	22.53	22.42	22.55		
3	QPSK	1	14	22.53	22.39	22.53		
3	QPSK	8	0	21.57	21.48	21.64	23	1
3	QPSK	8	4	21.61	21.48	21.65		
3	QPSK	8	7	21.55	21.49	21.58		
3	QPSK	15	0	21.58	21.45	21.60	23	1
3	16QAM	1	0	21.73	21.58	21.83		
3	16QAM	1	8	21.75	21.60	21.81		
3	16QAM	1	14	21.72	21.57	21.77	22	2
3	16QAM	8	0	20.63	20.52	20.68		
3	16QAM	8	4	20.66	20.54	20.70		
3	16QAM	8	7	20.59	20.53	20.65	21	3
3	16QAM	15	0	20.61	20.49	20.62		
3	64QAM	1	0	21.65	21.48	21.65		
3	64QAM	1	8	21.65	21.51	21.61	22	2
3	64QAM	1	14	21.56	21.40	21.71		
3	64QAM	8	0	20.55	20.42	20.74		
3	64QAM	8	4	20.66	20.43	20.66	21	3
3	64QAM	8	7	20.60	20.42	20.48		
3	64QAM	15	0	20.63	20.35	20.63		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.45	22.31	22.49	24	0
1.4	QPSK	1	3	22.51	22.41	22.58		
1.4	QPSK	1	5	22.45	22.31	22.51		
1.4	QPSK	3	0	22.52	22.40	22.57		
1.4	QPSK	3	1	22.57	22.44	22.62		
1.4	QPSK	3	3	22.52	22.39	22.55		
1.4	QPSK	6	0	21.50	21.41	21.54	23	1
1.4	16QAM	1	0	21.66	21.52	21.76	23	1
1.4	16QAM	1	3	21.74	21.59	21.81		
1.4	16QAM	1	5	21.65	21.51	21.76		
1.4	16QAM	3	0	21.51	21.38	21.58		
1.4	16QAM	3	1	21.56	21.42	21.61		
1.4	16QAM	3	3	21.48	21.34	21.55		
1.4	16QAM	6	0	20.56	20.47	20.61	22	2
1.4	64QAM	1	0	21.46	21.33	21.52	22	2
1.4	64QAM	1	3	21.51	21.56	21.69		
1.4	64QAM	1	5	21.64	21.46	21.71		
1.4	64QAM	3	0	21.46	21.36	21.62		
1.4	64QAM	3	1	21.65	21.34	21.59		
1.4	64QAM	3	3	21.49	21.44	21.58		
1.4	64QAM	6	0	20.52	20.32	20.51	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.43	22.57	22.40	24	0
10	QPSK	1	25	22.46	22.37	22.30		
10	QPSK	1	49	22.35	22.28	22.21		
10	QPSK	25	0	21.56	21.58	21.43	23	1
10	QPSK	25	12	21.56	21.44	21.38		
10	QPSK	25	25	21.47	21.38	21.34		
10	QPSK	50	0	21.53	21.54	21.38		
10	16QAM	1	0	21.76	21.69	21.64	23	1
10	16QAM	1	25	21.66	21.63	21.58		
10	16QAM	1	49	21.60	21.53	21.46		
10	16QAM	25	0	20.57	20.50	20.42	22	2
10	16QAM	25	12	20.54	20.47	20.39		
10	16QAM	25	25	20.48	20.39	20.32		
10	16QAM	50	0	20.52	20.46	20.38		
10	64QAM	1	0	20.76	20.58	20.48	22	2
10	64QAM	1	25	20.67	20.51	20.40		
10	64QAM	1	49	20.57	20.41	20.31		
10	64QAM	25	0	19.64	19.46	19.41	21	3
10	64QAM	25	12	19.62	19.47	19.38		
10	64QAM	25	25	19.55	19.40	19.30		
10	64QAM	50	0	19.62	19.45	19.35		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.51	22.40	22.32	24	0
5	QPSK	1	12	22.56	22.36	22.26		
5	QPSK	1	24	22.47	22.34	22.24		
5	QPSK	12	0	21.67	21.45	21.36	23	1
5	QPSK	12	7	21.65	21.44	21.34		
5	QPSK	12	13	21.61	21.40	21.30		
5	QPSK	25	0	21.63	21.40	21.32		
5	16QAM	1	0	21.82	21.67	21.55	23	1
5	16QAM	1	12	21.84	21.63	21.55		
5	16QAM	1	24	21.73	21.60	21.45		
5	16QAM	12	0	20.68	20.47	20.34	22	2
5	16QAM	12	7	20.67	20.46	20.35		
5	16QAM	12	13	20.61	20.42	20.33		
5	16QAM	25	0	20.63	20.43	20.33		
5	64QAM	1	0	20.73	20.53	20.42	22	2
5	64QAM	1	12	20.66	20.48	20.31		
5	64QAM	1	24	20.54	20.38	20.31		
5	64QAM	12	0	19.63	19.43	19.40	21	3
5	64QAM	12	7	19.57	19.43	19.36		
5	64QAM	12	13	19.51	19.37	19.23		
5	64QAM	25	0	19.55	19.38	19.30		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.53	22.38	22.30	24	0
3	QPSK	1	8	22.48	22.35	22.26		
3	QPSK	1	14	22.46	22.31	22.24		
3	QPSK	8	0	21.65	21.44	21.33	23	1
3	QPSK	8	4	21.68	21.43	21.31		
3	QPSK	8	7	21.61	21.37	21.32		
3	QPSK	15	0	21.64	21.41	21.30	23	1
3	16QAM	1	0	21.77	21.63	21.50		
3	16QAM	1	8	21.77	21.60	21.53		
3	16QAM	1	14	21.74	21.57	21.41	22	2
3	16QAM	8	0	20.71	20.49	20.36		
3	16QAM	8	4	20.70	20.48	20.38		
3	16QAM	8	7	20.66	20.44	20.36	21	3
3	16QAM	15	0	20.68	20.44	20.34		
3	64QAM	1	0	20.74	20.58	20.39		
3	64QAM	1	8	20.57	20.44	20.31	22	2
3	64QAM	1	14	20.55	20.38	20.26		
3	64QAM	8	0	19.55	19.38	19.34		
3	64QAM	8	4	19.62	19.47	19.29	21	3
3	64QAM	8	7	19.46	19.39	19.30		
3	64QAM	15	0	19.57	19.39	19.25		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.48	22.33	22.14	24	0
1.4	QPSK	1	3	22.47	22.32	22.15		
1.4	QPSK	1	5	22.37	22.28	22.21		
1.4	QPSK	3	0	22.55	22.33	22.23		
1.4	QPSK	3	1	22.56	22.37	22.33		
1.4	QPSK	3	3	22.40	22.28	22.17		
1.4	QPSK	6	0	21.44	21.36	21.22	23	1
1.4	16QAM	1	0	21.48	21.48	21.31	23	1
1.4	16QAM	1	3	21.57	21.50	21.42		
1.4	16QAM	1	5	21.46	21.46	21.32		
1.4	16QAM	3	0	21.46	21.39	21.20		
1.4	16QAM	3	1	21.57	21.45	21.32		
1.4	16QAM	3	3	21.48	21.34	21.32		
1.4	16QAM	6	0	20.51	20.42	20.28	22	2
1.4	64QAM	1	0	20.67	20.48	20.46	22	2
1.4	64QAM	1	3	20.66	20.44	20.38		
1.4	64QAM	1	5	20.57	20.34	20.21		
1.4	64QAM	3	0	20.56	20.41	20.38		
1.4	64QAM	3	1	20.62	20.44	20.28		
1.4	64QAM	3	3	20.54	20.40	20.21		
1.4	64QAM	6	0	19.52	19.38	19.26	21	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.07	22.09	22.14	24	0
20	QPSK	1	49	22.01	22.02	22.06		
20	QPSK	1	99	22.06	22.09	22.12		
20	QPSK	50	0	21.07	21.07	21.16	23	1
20	QPSK	50	24	21.03	21.06	21.08		
20	QPSK	50	50	21.05	21.06	21.06		
20	QPSK	100	0	21.03	21.06	21.09		
20	16QAM	1	0	21.59	21.59	21.57	23	1
20	16QAM	1	49	21.50	21.52	21.62		
20	16QAM	1	99	21.45	21.44	21.71		
20	16QAM	50	0	20.15	20.00	20.10	22	2
20	16QAM	50	24	20.02	20.04	20.14		
20	16QAM	50	50	20.08	20.01	20.20		
20	16QAM	100	0	20.03	20.04	20.06		
20	64QAM	1	0	20.23	20.29	20.24	22	2
20	64QAM	1	49	20.11	20.14	20.19		
20	64QAM	1	99	20.09	20.21	20.26		
20	64QAM	50	0	19.09	19.02	19.06	21	3
20	64QAM	50	24	19.00	19.02	19.06		
20	64QAM	50	50	19.00	19.04	19.07		
20	64QAM	100	0	19.00	19.00	19.05		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.10	22.12	22.09	24	0
15	QPSK	1	37	22.00	22.01	22.05		
15	QPSK	1	74	22.00	22.02	22.06		
15	QPSK	36	0	21.02	21.02	21.07	23	1
15	QPSK	36	20	21.00	21.10	21.14		
15	QPSK	36	39	21.01	21.07	21.06		
15	QPSK	75	0	21.00	21.04	21.08		
15	16QAM	1	0	21.55	21.63	21.64	23	1
15	16QAM	1	37	21.36	21.46	21.57		
15	16QAM	1	74	21.41	21.51	21.65		
15	16QAM	36	0	20.07	20.06	20.11	22	2
15	16QAM	36	20	20.04	20.06	20.10		
15	16QAM	36	39	20.00	20.01	20.10		
15	16QAM	75	0	20.00	20.03	20.14		
15	64QAM	1	0	20.26	20.30	20.34	22	2
15	64QAM	1	37	20.09	20.13	20.28		
15	64QAM	1	74	20.13	20.19	20.23		
15	64QAM	36	0	19.06	19.03	19.06	21	3
15	64QAM	36	20	19.00	19.02	19.09		
15	64QAM	36	39	19.02	19.01	19.06		
15	64QAM	75	0	19.01	19.00	19.03		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.04	22.07	22.13	24	0
10	QPSK	1	25	22.07	22.07	22.11		
10	QPSK	1	49	22.00	22.01	22.12		
10	QPSK	25	0	21.00	21.02	21.12	23	1
10	QPSK	25	12	21.03	21.05	21.10		
10	QPSK	25	25	21.01	21.04	21.05		
10	QPSK	50	0	21.03	21.05	21.11	23	1
10	16QAM	1	0	21.22	21.48	21.49		
10	16QAM	1	25	21.42	21.46	21.53		
10	16QAM	1	49	21.35	21.57	21.57	22	2
10	16QAM	25	0	20.00	20.02	20.04		
10	16QAM	25	12	20.02	20.06	20.11		
10	16QAM	25	25	20.01	20.02	20.04	22	2
10	16QAM	50	0	20.11	20.04	20.16		
10	64QAM	1	0	20.32	20.29	20.33		
10	64QAM	1	25	20.33	20.31	20.37	22	2
10	64QAM	1	49	20.22	20.30	20.38		
10	64QAM	25	0	19.17	19.11	19.21		
10	64QAM	25	12	19.22	19.17	19.24	21	3
10	64QAM	25	25	19.09	19.13	19.20		
10	64QAM	25	25	19.09	19.13	19.20		
10	64QAM	50	0	19.20	19.13	19.21	21	3
Channel				20775	21100	21425		
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.07	22.09	22.13	24	0
5	QPSK	1	12	22.00	22.02	22.06		
5	QPSK	1	24	22.00	22.09	22.12		
5	QPSK	12	0	21.07	21.03	21.05	23	1
5	QPSK	12	7	21.03	21.06	21.08		
5	QPSK	12	13	21.05	21.06	21.14		
5	QPSK	25	0	21.03	21.06	21.09	23	1
5	16QAM	1	0	21.59	21.59	21.57		
5	16QAM	1	12	21.50	21.52	21.62		
5	16QAM	1	24	21.45	21.44	21.71	22	2
5	16QAM	12	0	20.15	20.00	20.10		
5	16QAM	12	7	20.02	20.04	20.14		
5	16QAM	12	13	20.08	20.01	20.20	22	2
5	16QAM	25	0	20.03	20.04	20.06		
5	64QAM	1	0	20.32	20.25	20.49		
5	64QAM	1	12	20.32	20.28	20.49	22	2
5	64QAM	1	24	20.29	20.26	20.47		
5	64QAM	12	0	19.18	19.14	19.35		
5	64QAM	12	7	19.21	19.19	19.39	21	3
5	64QAM	12	13	19.16	19.16	19.35		
5	64QAM	25	0	19.15	19.10	19.34		



**<LTE Band 12>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.22	22.36	22.22	24	0
10	QPSK	1	25	22.35	22.22	22.29		
10	QPSK	1	49	22.28	22.23	22.32		
10	QPSK	25	0	21.32	21.46	21.38	23	1
10	QPSK	25	12	21.40	21.45	21.31		
10	QPSK	25	25	21.44	21.43	21.41		
10	QPSK	50	0	21.42	21.44	21.27		
10	16QAM	1	0	21.50	21.42	21.47	23	1
10	16QAM	1	25	21.54	21.51	21.53		
10	16QAM	1	49	21.53	21.56	21.61		
10	16QAM	25	0	20.29	20.40	20.35	22	2
10	16QAM	25	12	20.47	20.36	20.39		
10	16QAM	25	25	20.39	20.38	20.46		
10	16QAM	50	0	20.53	20.45	20.31		
10	64QAM	1	0	20.57	20.54	20.57	22	2
10	64QAM	1	25	20.67	20.59	20.53		
10	64QAM	1	49	20.55	20.56	20.61		
10	64QAM	25	0	19.43	19.51	19.47	21	3
10	64QAM	25	12	19.56	19.54	19.48		
10	64QAM	25	25	19.51	19.48	19.57		
10	64QAM	50	0	19.52	19.53	19.47		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.27	22.34	22.16	24	0
5	QPSK	1	12	22.30	22.27	22.17		
5	QPSK	1	24	22.14	22.30	22.33		
5	QPSK	12	0	21.41	21.34	21.44	23	1
5	QPSK	12	7	21.46	21.44	21.49		
5	QPSK	12	13	21.46	21.44	21.44		
5	QPSK	25	0	21.46	21.45	21.48		
5	16QAM	1	0	21.91	21.80	21.59	23	1
5	16QAM	1	12	21.77	21.64	21.80		
5	16QAM	1	24	21.96	21.70	21.93		
5	16QAM	12	0	20.42	20.43	20.49	22	2
5	16QAM	12	7	20.41	20.45	20.47		
5	16QAM	12	13	20.41	20.40	20.45		
5	16QAM	25	0	20.40	20.31	20.45		
5	64QAM	1	0	20.51	20.54	20.56	22	2
5	64QAM	1	12	20.66	20.56	20.46		
5	64QAM	1	24	20.54	20.54	20.51		
5	64QAM	12	0	19.35	19.42	19.46	21	3
5	64QAM	12	7	19.54	19.47	19.38		
5	64QAM	12	13	19.45	19.41	19.53		
5	64QAM	25	0	19.50	19.46	19.39		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.20	22.17	22.32	24	0
3	QPSK	1	8	22.27	22.31	22.28		
3	QPSK	1	14	22.26	22.26	22.30		
3	QPSK	8	0	21.32	21.40	21.43	23	1
3	QPSK	8	4	21.41	21.39	21.41		
3	QPSK	8	7	21.29	21.31	21.41		
3	QPSK	15	0	21.31	21.29	21.43		
3	16QAM	1	0	21.48	21.56	21.56	23	1
3	16QAM	1	8	21.53	21.46	21.67		
3	16QAM	1	14	21.46	21.47	21.66		
3	16QAM	8	0	20.45	20.30	20.35	22	2
3	16QAM	8	4	20.44	20.41	20.52		
3	16QAM	8	7	20.43	20.33	20.31		
3	16QAM	15	0	20.33	20.40	20.48		
3	64QAM	1	0	20.48	20.49	20.57	22	2
3	64QAM	1	8	20.57	20.53	20.43		
3	64QAM	1	14	20.45	20.49	20.53		
3	64QAM	8	0	19.38	19.43	19.45	21	3
3	64QAM	8	4	19.50	19.44	19.45		
3	64QAM	8	7	19.51	19.41	19.50		
3	64QAM	15	0	19.47	19.46	19.39		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.33	22.20	22.33	24	0
1.4	QPSK	1	3	22.14	22.24	22.34		
1.4	QPSK	1	5	22.13	22.23	22.24		
1.4	QPSK	3	0	22.20	22.24	22.30		
1.4	QPSK	3	1	22.12	22.34	22.23		
1.4	QPSK	3	3	22.14	22.26	22.32		
1.4	QPSK	6	0	21.38	21.31	21.32	23	1
1.4	16QAM	1	0	21.55	21.44	21.43	23	1
1.4	16QAM	1	3	21.64	21.49	21.57		
1.4	16QAM	1	5	21.55	21.41	21.49		
1.4	16QAM	3	0	21.44	21.35	21.41		
1.4	16QAM	3	1	21.55	21.30	21.43		
1.4	16QAM	3	3	21.45	21.32	21.34		
1.4	16QAM	6	0	20.42	20.34	20.35	22	2
1.4	64QAM	1	0	20.45	20.37	20.33	22	2
1.4	64QAM	1	3	20.59	20.39	20.52		
1.4	64QAM	1	5	20.49	20.41	20.41		
1.4	64QAM	3	0	20.43	20.35	20.32		
1.4	64QAM	3	1	20.46	20.29	20.40		
1.4	64QAM	3	3	20.40	20.29	20.25		
1.4	64QAM	6	0	19.35	19.33	19.33	21	3



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	22.37			24	0
10	QPSK	1	25	22.24				
10	QPSK	1	49	22.14				
10	QPSK	25	0	21.35			23	1
10	QPSK	25	12	21.34				
10	QPSK	25	25	21.32				
10	QPSK	50	0	21.31				
10	16QAM	1	0	21.49			23	1
10	16QAM	1	25	21.28				
10	16QAM	1	49	21.46				
10	16QAM	25	0	20.20			22	2
10	16QAM	25	12	20.31				
10	16QAM	25	25	20.31				
10	16QAM	50	0	20.38				
10	64QAM	1	0	20.51			22	2
10	64QAM	1	25	20.45				
10	64QAM	1	49	20.49				
10	64QAM	25	0	19.46			21	3
10	64QAM	25	12	19.48				
10	64QAM	25	25	19.47				
10	64QAM	50	0	19.46				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.35	22.33	22.30	24	0
5	QPSK	1	12	22.23	22.30	22.35		
5	QPSK	1	24	22.30	22.15	22.34		
5	QPSK	12	0	21.33	21.35	21.38	23	1
5	QPSK	12	7	21.29	21.35	21.48		
5	QPSK	12	13	21.31	21.22	21.41		
5	QPSK	25	0	21.29	21.26	21.48		
5	16QAM	1	0	21.52	21.62	21.63	23	1
5	16QAM	1	12	21.65	21.49	21.77		
5	16QAM	1	24	21.59	21.34	21.55		
5	16QAM	12	0	20.34	20.34	20.37	22	2
5	16QAM	12	7	20.48	20.23	20.47		
5	16QAM	12	13	20.42	20.20	20.48		
5	16QAM	25	0	20.25	20.24	20.45		
5	64QAM	1	0	20.26	20.48	20.20	22	2
5	64QAM	1	12	20.31	20.37	20.41		
5	64QAM	1	24	20.23	20.43	20.29		
5	64QAM	12	0	19.19	19.45	19.34	21	3
5	64QAM	12	7	19.24	19.45	19.38		
5	64QAM	12	13	19.21	19.42	19.27		
5	64QAM	25	0	19.21	19.44	19.33		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.41	22.43	22.30	24	0
10	QPSK	1	25	22.31	22.37	22.36		
10	QPSK	1	49	22.39	22.25	22.29		
10	QPSK	25	0	21.35	21.48	21.36	23	1
10	QPSK	25	12	21.33	21.43	21.39		
10	QPSK	25	25	21.36	21.35	21.34		
10	QPSK	50	0	21.34	21.36	21.35	23	1
10	16QAM	1	0	21.65	21.46	21.82		
10	16QAM	1	25	21.46	21.47	21.63		
10	16QAM	1	49	21.71	21.61	21.58	22	2
10	16QAM	25	0	20.39	20.41	20.33		
10	16QAM	25	12	20.40	20.40	20.37		
10	16QAM	25	25	20.25	20.40	20.39	22	2
10	16QAM	50	0	20.36	20.30	20.35		
10	64QAM	1	0	20.54	20.54	20.62		
10	64QAM	1	25	20.59	20.58	20.56	22	2
10	64QAM	1	49	20.63	20.61	20.63		
10	64QAM	25	0	19.51	19.52	19.49		
10	64QAM	25	12	19.53	19.51	19.51	21	3
10	64QAM	25	25	19.47	19.55	19.51		
10	64QAM	50	0	19.52	19.51	19.48		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.26	22.33	22.29	24	0
5	QPSK	1	12	22.27	22.42	22.37		
5	QPSK	1	24	22.27	22.40	22.35		
5	QPSK	12	0	21.22	21.39	21.37	23	1
5	QPSK	12	7	21.32	21.32	21.42		
5	QPSK	12	13	21.28	21.35	21.46		
5	QPSK	25	0	21.26	21.43	21.39	23	1
5	16QAM	1	0	21.50	21.65	21.57		
5	16QAM	1	12	21.62	21.70	21.63		
5	16QAM	1	24	21.35	21.58	21.73	22	2
5	16QAM	12	0	20.25	20.35	20.34		
5	16QAM	12	7	20.36	20.29	20.38		
5	16QAM	12	13	20.29	20.33	20.40	22	2
5	16QAM	25	0	20.32	20.32	20.34		
5	64QAM	1	0	20.44	20.48	20.58		
5	64QAM	1	12	20.57	20.58	20.52	22	2
5	64QAM	1	24	20.54	20.55	20.63		
5	64QAM	12	0	19.49	19.49	19.44		
5	64QAM	12	7	19.47	19.47	19.48	21	3
5	64QAM	12	13	19.42	19.46	19.50		
5	64QAM	25	0	19.51	19.44	19.48		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.63	22.68	22.61	24	0
20	QPSK	1	49	22.36	22.34	22.50		
20	QPSK	1	99	22.38	22.40	22.41		
20	QPSK	50	0	21.48	21.55	21.54	23	1
20	QPSK	50	24	21.36	21.48	21.48		
20	QPSK	50	50	21.36	21.38	21.49		
20	QPSK	100	0	21.40	21.63	21.59	23	1
20	16QAM	1	0	21.97	21.98	21.90		
20	16QAM	1	49	21.59	21.68	21.76		
20	16QAM	1	99	21.63	21.66	21.65	22	2
20	16QAM	50	0	20.46	20.46	20.57		
20	16QAM	50	24	20.43	20.41	20.54		
20	16QAM	50	50	20.16	20.37	20.47	22	2
20	16QAM	100	0	20.43	20.49	20.84		
20	64QAM	1	0	20.67	20.88	20.78		
20	64QAM	1	49	20.50	20.49	20.53	22	2
20	64QAM	1	99	20.40	20.54	20.51		
20	64QAM	50	0	19.40	19.64	19.48		
20	64QAM	50	24	19.35	19.53	19.57	21	3
20	64QAM	50	50	19.43	19.41	19.52		
20	64QAM	100	0	19.39	19.70	19.56		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.38	22.43	22.60	24	0
15	QPSK	1	37	22.23	22.29	22.35		
15	QPSK	1	74	22.17	22.21	22.39		
15	QPSK	36	0	21.36	21.45	21.59	23	1
15	QPSK	36	20	21.32	21.44	21.47		
15	QPSK	36	39	21.31	21.38	21.45		
15	QPSK	75	0	21.37	21.43	21.50	23	1
15	16QAM	1	0	21.63	21.70	21.88		
15	16QAM	1	37	21.51	21.57	21.64		
15	16QAM	1	74	21.41	21.49	21.59	22	2
15	16QAM	36	0	20.41	20.48	20.62		
15	16QAM	36	20	20.35	20.43	20.49		
15	16QAM	36	39	20.31	20.39	20.45	22	2
15	16QAM	75	0	20.37	20.44	20.46		
15	64QAM	1	0	20.47	20.48	20.79		
15	64QAM	1	37	20.28	20.43	20.37	22	2
15	64QAM	1	74	20.27	20.25	20.54		
15	64QAM	36	0	19.43	19.48	19.67		
15	64QAM	36	20	19.31	19.46	19.50	21	3
15	64QAM	36	39	19.37	19.29	19.38		
15	64QAM	75	0	19.41	19.52	19.56		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.53	22.60	22.47	24	0
10	QPSK	1	25	22.24	22.33	22.37		
10	QPSK	1	49	22.42	22.50	22.42		
10	QPSK	25	0	21.35	21.43	21.47	23	1
10	QPSK	25	12	21.31	21.38	21.48		
10	QPSK	25	25	21.31	21.40	21.49		
10	QPSK	50	0	21.33	21.42	21.48	23	1
10	16QAM	1	0	21.74	21.83	21.72		
10	16QAM	1	25	21.48	21.58	21.62		
10	16QAM	1	49	21.64	21.72	21.54	22	2
10	16QAM	25	0	20.37	20.47	20.50		
10	16QAM	25	12	20.35	20.45	20.49		
10	16QAM	25	25	20.33	20.39	20.46	22	2
10	16QAM	50	0	20.36	20.42	20.51		
10	64QAM	1	0	20.54	20.62	20.66		
10	64QAM	1	25	20.24	20.44	20.54	22	2
10	64QAM	1	49	20.47	20.62	20.57		
10	64QAM	25	0	19.38	19.33	19.42		
10	64QAM	25	12	19.29	19.40	19.43	21	3
10	64QAM	25	25	19.29	19.46	19.48		
10	64QAM	50	0	19.35	19.42	19.53		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.28	22.37	22.45	24	0
5	QPSK	1	12	22.20	22.29	22.38		
5	QPSK	1	24	22.24	22.34	22.44		
5	QPSK	12	0	21.29	21.40	21.48	23	1
5	QPSK	12	7	21.32	21.41	21.48		
5	QPSK	12	13	21.25	21.37	21.44		
5	QPSK	25	0	21.25	21.39	21.49	23	1
5	16QAM	1	0	21.50	21.59	21.64		
5	16QAM	1	12	21.46	21.55	21.59		
5	16QAM	1	24	21.45	21.58	21.54	22	2
5	16QAM	12	0	20.34	20.42	20.46		
5	16QAM	12	7	20.31	20.43	20.45		
5	16QAM	12	13	20.28	20.40	20.42	22	2
5	16QAM	25	0	20.31	20.40	20.46		
5	64QAM	1	0	20.41	20.49	20.61		
5	64QAM	1	12	20.34	20.42	20.55	22	2
5	64QAM	1	24	20.38	20.49	20.51		
5	64QAM	12	0	19.34	19.33	19.49		
5	64QAM	12	7	19.30	19.41	19.38	21	3
5	64QAM	12	13	19.27	19.36	19.41		
5	64QAM	25	0	19.24	19.45	19.43		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.22	22.34	22.42	24	0
3	QPSK	1	8	22.21	22.30	22.42		
3	QPSK	1	14	22.21	22.29	22.43		
3	QPSK	8	0	21.26	21.37	21.48	23	1
3	QPSK	8	4	21.27	21.40	21.50		
3	QPSK	8	7	21.27	21.36	21.50		
3	QPSK	15	0	21.26	21.36	21.47	23	1
3	16QAM	1	0	21.45	21.54	21.55		
3	16QAM	1	8	21.44	21.53	21.57		
3	16QAM	1	14	21.43	21.52	21.53	22	2
3	16QAM	8	0	20.33	20.46	20.52		
3	16QAM	8	4	20.35	20.45	20.52		
3	16QAM	8	7	20.30	20.42	20.55	22	2
3	16QAM	15	0	20.32	20.41	20.45		
3	64QAM	1	0	20.27	20.39	20.53		
3	64QAM	1	8	20.37	20.41	20.53	22	2
3	64QAM	1	14	20.37	20.32	20.45		
3	64QAM	8	0	19.34	19.46	19.46		
3	64QAM	8	4	19.31	19.40	19.53	21	3
3	64QAM	8	7	19.36	19.40	19.41		
3	64QAM	15	0	19.24	19.38	19.48		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.14	22.26	22.31	24	0
1.4	QPSK	1	3	22.17	22.31	22.39		
1.4	QPSK	1	5	22.12	22.25	22.30		
1.4	QPSK	3	0	22.19	22.32	22.38		
1.4	QPSK	3	1	22.25	22.35	22.43		
1.4	QPSK	3	3	22.17	22.30	22.39		
1.4	QPSK	6	0	21.17	21.29	21.41	23	1
1.4	16QAM	1	0	21.38	21.48	21.49	23	1
1.4	16QAM	1	3	21.44	21.54	21.57		
1.4	16QAM	1	5	21.38	21.47	21.48		
1.4	16QAM	3	0	21.19	21.30	21.39		
1.4	16QAM	3	1	21.25	21.36	21.41		
1.4	16QAM	3	3	21.19	21.30	21.36		
1.4	16QAM	6	0	20.27	20.37	20.47	22	2
1.4	64QAM	1	0	20.32	20.66	20.45	22	2
1.4	64QAM	1	3	20.24	20.43	20.43		
1.4	64QAM	1	5	20.12	20.33	20.30		
1.4	64QAM	3	0	20.13	20.30	20.36		
1.4	64QAM	3	1	20.21	20.42	20.38		
1.4	64QAM	3	3	20.20	20.38	20.32		
1.4	64QAM	6	0	19.08	19.26	19.39	21	3



**<LTE Band 26>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.63	22.68	22.47		
15	QPSK	1	37	22.54	22.43	22.41	24	0
15	QPSK	1	74	22.38	22.36	22.24		
15	QPSK	36	0	21.71	21.60	21.50		
15	QPSK	36	20	21.64	21.52	21.49	23	1
15	QPSK	36	39	21.55	21.49	21.35		
15	QPSK	75	0	21.63	21.52	21.46		
15	16QAM	1	0	21.92	21.87	21.76	23	1
15	16QAM	1	37	21.82	21.70	21.62		
15	16QAM	1	74	21.68	21.59	21.42		
15	16QAM	36	0	20.78	20.60	20.56	22	2
15	16QAM	36	20	20.71	20.53	20.41		
15	16QAM	36	39	20.62	20.41	20.33		
15	16QAM	75	0	20.63	20.55	20.47	22	2
15	64QAM	1	0	20.77	20.71	20.52		
15	64QAM	1	37	20.72	20.60	20.48		
15	64QAM	1	74	20.64	20.52	20.41	22	2
15	64QAM	36	0	19.70	19.58	19.39		
15	64QAM	36	20	19.71	19.56	19.39		
15	64QAM	36	39	19.64	19.48	19.38	21	3
15	64QAM	75	0	19.64	19.52	19.34		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.55	22.40	22.41		
10	QPSK	1	25	22.50	22.36	22.32		
10	QPSK	1	49	22.34	22.28	22.47	24	0
10	QPSK	25	0	21.55	21.60	21.46		
10	QPSK	25	12	21.59	21.54	21.48		
10	QPSK	25	25	21.49	21.53	21.37	23	1
10	QPSK	50	0	21.55	21.52	21.38		
10	16QAM	1	0	21.75	21.78	21.59		
10	16QAM	1	25	21.69	21.74	21.64	23	1
10	16QAM	1	49	21.66	21.64	21.46		
10	16QAM	25	0	20.64	20.52	20.36		
10	16QAM	25	12	20.54	20.55	20.47	22	2
10	16QAM	25	25	20.56	20.43	20.37		
10	16QAM	50	0	20.68	20.49	20.43		
10	64QAM	1	0	20.86	20.72	20.61	22	2
10	64QAM	1	25	20.79	20.65	20.52		
10	64QAM	1	49	20.68	20.57	20.43		
10	64QAM	25	0	19.74	19.59	19.48	21	3
10	64QAM	25	12	19.73	19.58	19.48		
10	64QAM	25	25	19.66	19.49	19.38		
10	64QAM	50	0	19.70	19.54	19.43		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.65	22.55	22.32	24	0
5	QPSK	1	12	22.60	22.49	22.28		
5	QPSK	1	24	22.53	22.31	22.21		
5	QPSK	12	0	21.78	21.58	21.41	23	1
5	QPSK	12	7	21.71	21.55	21.33		
5	QPSK	12	13	21.71	21.46	21.31		
5	QPSK	25	0	21.65	21.53	21.41	23	1
5	16QAM	1	0	21.90	21.67	21.60		
5	16QAM	1	12	21.89	21.63	21.41		
5	16QAM	1	24	21.81	21.54	21.41	22	2
5	16QAM	12	0	20.71	20.55	20.35		
5	16QAM	12	7	20.75	20.52	20.28		
5	16QAM	12	13	20.65	20.44	20.26	22	2
5	16QAM	25	0	20.73	20.54	20.31		
5	64QAM	1	0	20.81	20.69	20.55		
5	64QAM	1	12	20.79	20.59	20.49	22	2
5	64QAM	1	24	20.58	20.49	20.35		
5	64QAM	12	0	19.64	19.55	19.39		
5	64QAM	12	7	19.66	19.53	19.38	21	3
5	64QAM	12	13	19.61	19.43	19.37		
5	64QAM	25	0	19.61	19.51	19.39		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.62	22.45	22.30	24	0
3	QPSK	1	8	22.65	22.48	22.27		
3	QPSK	1	14	22.59	22.46	22.22		
3	QPSK	8	0	21.71	21.54	21.39	23	1
3	QPSK	8	4	21.77	21.58	21.34		
3	QPSK	8	7	21.74	21.49	21.36		
3	QPSK	15	0	21.71	21.54	21.40	23	1
3	16QAM	1	0	21.87	21.53	21.41		
3	16QAM	1	8	21.81	21.48	21.42		
3	16QAM	1	14	21.88	21.67	21.46	22	2
3	16QAM	8	0	20.75	20.60	20.33		
3	16QAM	8	4	20.81	20.65	20.48		
3	16QAM	8	7	20.78	20.45	20.40	22	2
3	16QAM	15	0	20.70	20.47	20.32		
3	64QAM	1	0	20.79	20.63	20.61		
3	64QAM	1	8	20.78	20.60	20.49	22	2
3	64QAM	1	14	20.67	20.47	20.42		
3	64QAM	8	0	19.64	19.58	19.41		
3	64QAM	8	4	19.67	19.54	19.41	21	3
3	64QAM	8	7	19.58	19.45	19.34		
3	64QAM	15	0	19.65	19.50	19.42		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.66	22.37	22.23	24	0
1.4	QPSK	1	3	22.65	22.38	22.22		
1.4	QPSK	1	5	22.57	22.36	22.19		
1.4	QPSK	3	0	22.62	22.45	22.30		
1.4	QPSK	3	1	22.67	22.57	22.31		
1.4	QPSK	3	3	22.57	22.50	22.34		
1.4	QPSK	6	0	21.68	21.39	21.29	23	1
1.4	16QAM	1	0	21.69	21.54	21.38	23	1
1.4	16QAM	1	3	21.82	21.66	21.49		
1.4	16QAM	1	5	21.78	21.48	21.36		
1.4	16QAM	3	0	21.71	21.53	21.27		
1.4	16QAM	3	1	21.68	21.57	21.39		
1.4	16QAM	3	3	21.66	21.40	21.30		
1.4	16QAM	6	0	20.65	20.47	20.35	22	2
1.4	64QAM	1	0	20.77	20.65	20.51	22	2
1.4	64QAM	1	3	20.70	20.64	20.50		
1.4	64QAM	1	5	20.61	20.54	20.40		
1.4	64QAM	3	0	20.66	20.52	20.47		
1.4	64QAM	3	1	20.70	20.57	20.42		
1.4	64QAM	3	3	20.66	20.39	20.28		
1.4	64QAM	6	0	19.66	19.48	19.42	21	3



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.96	22.84	22.74	24	0
20	QPSK	1	49	22.75	22.53	22.36		
20	QPSK	1	99	22.60	22.40	22.31		
20	QPSK	50	0	21.88	21.68	21.67	23	1
20	QPSK	50	24	21.82	21.65	21.49		
20	QPSK	50	50	21.69	21.54	21.44		
20	QPSK	100	0	21.86	21.65	21.50		
20	16QAM	1	0	21.87	21.93	21.99	23	1
20	16QAM	1	49	21.97	21.77	21.61		
20	16QAM	1	99	21.84	21.65	21.51		
20	16QAM	50	0	20.93	20.75	20.70	22	2
20	16QAM	50	24	20.85	20.67	20.50		
20	16QAM	50	50	20.67	20.61	20.41		
20	16QAM	100	0	20.83	20.64	20.49		
20	64QAM	1	0	21.54	21.36	21.27	22	2
20	64QAM	1	49	21.30	21.06	20.93		
20	64QAM	1	99	21.19	20.94	20.88		
20	64QAM	50	0	20.41	20.12	20.19	21	3
20	64QAM	50	24	20.39	20.25	19.90		
20	64QAM	50	50	20.29	19.96	20.04		
20	64QAM	100	0	20.30	20.14	20.07		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.87	22.78	22.67	24	0
15	QPSK	1	37	22.69	22.51	22.34		
15	QPSK	1	74	22.60	22.50	22.32		
15	QPSK	36	0	21.84	21.69	21.53	23	1
15	QPSK	36	20	21.83	21.60	21.48		
15	QPSK	36	39	21.66	21.60	21.41		
15	QPSK	75	0	21.82	21.64	21.48	23	1
15	16QAM	1	0	21.92	21.94	21.92		
15	16QAM	1	37	21.95	21.80	21.59		
15	16QAM	1	74	21.83	21.78	21.59		
15	16QAM	36	0	20.86	20.67	20.53	22	2
15	16QAM	36	20	20.83	20.64	20.49		
15	16QAM	36	39	20.66	20.59	20.43		
15	16QAM	75	0	20.83	20.64	20.49		
15	64QAM	1	0	21.38	21.21	21.12	22	2
15	64QAM	1	37	21.13	20.97	20.92		
15	64QAM	1	74	21.12	21.01	20.73		
15	64QAM	36	0	20.37	20.10	20.05	21	3
15	64QAM	36	20	20.32	20.06	19.98		
15	64QAM	36	39	20.09	20.15	19.95		
15	64QAM	75	0	20.23	20.11	19.99		



Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.79	22.62	22.64	24	0
10	QPSK	1	25	22.72	22.52	22.53		
10	QPSK	1	49	22.71	22.49	22.51		
10	QPSK	25	0	21.82	21.64	21.64	23	1
10	QPSK	25	12	21.77	21.60	21.61		
10	QPSK	25	25	21.76	21.59	21.56		
10	QPSK	50	0	21.81	21.58	21.59	23	1
10	16QAM	1	0	21.93	21.86	21.87		
10	16QAM	1	25	21.96	21.80	21.80		
10	16QAM	1	49	21.94	21.77	21.76	22	2
10	16QAM	25	0	20.82	20.61	20.56		
10	16QAM	25	12	20.80	20.63	20.62		
10	16QAM	25	25	20.77	20.56	20.54	22	2
10	16QAM	50	0	20.79	20.62	20.60		
10	64QAM	1	0	21.34	21.04	21.11		
10	64QAM	1	25	21.18	21.04	21.09	22	2
10	64QAM	1	49	21.29	20.93	21.08		
10	64QAM	25	0	20.28	20.04	20.21		
10	64QAM	25	12	20.24	20.07	20.19	21	3
10	64QAM	25	25	20.28	20.11	20.07		
10	64QAM	50	0	20.22	20.06	20.19		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.79	22.57	22.46	24	0
5	QPSK	1	12	22.73	22.51	22.37		
5	QPSK	1	24	22.74	22.51	22.38		
5	QPSK	12	0	21.76	21.63	21.45	23	1
5	QPSK	12	7	21.79	21.60	21.45		
5	QPSK	12	13	21.75	21.56	21.41		
5	QPSK	25	0	21.78	21.59	21.45	23	1
5	16QAM	1	0	21.97	21.82	21.66		
5	16QAM	1	12	21.96	21.77	21.61		
5	16QAM	1	24	21.95	21.77	21.55	22	2
5	16QAM	12	0	20.80	20.62	20.45		
5	16QAM	12	7	20.80	20.59	20.45		
5	16QAM	12	13	20.75	20.57	20.40	22	2
5	16QAM	25	0	20.74	20.61	20.44		
5	64QAM	1	0	21.28	21.16	20.95		
5	64QAM	1	12	21.14	20.98	20.92	22	2
5	64QAM	1	24	21.18	21.02	20.97		
5	64QAM	12	0	20.23	20.03	19.90		
5	64QAM	12	7	20.24	20.01	19.94	21	3
5	64QAM	12	13	20.18	20.00	19.88		
5	64QAM	25	0	20.29	20.16	20.02		



Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.71	22.53	22.41	24	0
3	QPSK	1	8	22.68	22.51	22.37		
3	QPSK	1	14	22.69	22.47	22.37		
3	QPSK	8	0	21.72	21.58	21.42	23	1
3	QPSK	8	4	21.74	21.59	21.45		
3	QPSK	8	7	21.72	21.52	21.44		
3	QPSK	15	0	21.69	21.55	21.42	23	1
3	16QAM	1	0	21.93	21.76	21.57		
3	16QAM	1	8	21.92	21.74	21.58		
3	16QAM	1	14	21.89	21.75	21.49	22	2
3	16QAM	8	0	20.78	20.63	20.48		
3	16QAM	8	4	20.81	20.64	20.52		
3	16QAM	8	7	20.75	20.59	20.46	22	2
3	16QAM	15	0	20.76	20.57	20.44		
3	64QAM	1	0	21.16	21.10	20.92		
3	64QAM	1	8	21.24	21.05	20.77	22	2
3	64QAM	1	14	21.14	20.97	20.78		
3	64QAM	8	0	20.12	20.07	19.94		
3	64QAM	8	4	20.17	20.04	19.90	21	3
3	64QAM	8	7	20.21	20.09	19.85		
3	64QAM	15	0	20.24	20.06	19.90		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.61	22.44	22.42	24	0
1.4	QPSK	1	3	22.66	22.51	22.38		
1.4	QPSK	1	5	22.59	22.43	22.30		
1.4	QPSK	3	0	22.65	22.49	22.36		
1.4	QPSK	3	1	22.69	22.53	22.41		
1.4	QPSK	3	3	22.65	22.47	22.36		
1.4	QPSK	6	0	21.64	21.47	21.37	23	1
1.4	16QAM	1	0	21.82	21.70	21.52	23	1
1.4	16QAM	1	3	21.89	21.75	21.56		
1.4	16QAM	1	5	21.82	21.68	21.49		
1.4	16QAM	3	0	21.66	21.51	21.37		
1.4	16QAM	3	1	21.69	21.53	21.42		
1.4	16QAM	3	3	21.64	21.45	21.36		
1.4	16QAM	6	0	20.72	20.53	20.43	22	2
1.4	64QAM	1	0	21.15	20.94	20.99	22	2
1.4	64QAM	1	3	21.12	21.10	20.85		
1.4	64QAM	1	5	21.11	20.95	20.84		
1.4	64QAM	3	0	21.17	21.04	20.96		
1.4	64QAM	3	1	21.19	21.06	20.95		
1.4	64QAM	3	3	21.21	20.99	20.93		
1.4	64QAM	6	0	20.21	19.90	19.79	21	3



<Near-body and Hotspot Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.49	21.53	21.83	23	0
20	QPSK	1	49	21.16	21.22	21.45		
20	QPSK	1	99	21.20	21.34	21.47		
20	QPSK	50	0	21.32	21.38	21.63	23	0
20	QPSK	50	24	21.29	21.33	21.55		
20	QPSK	50	50	21.24	21.30	21.53		
20	QPSK	100	0	21.28	21.35	21.58		
20	16QAM	1	0	21.78	21.79	21.74	23	0
20	16QAM	1	49	21.48	21.54	21.70		
20	16QAM	1	99	21.51	21.64	21.73		
20	16QAM	50	0	20.33	20.39	20.62	22	1
20	16QAM	50	24	20.28	20.35	20.58		
20	16QAM	50	50	20.24	20.30	20.51		
20	16QAM	100	0	20.28	20.31	20.57		
20	64QAM	1	0	21.48	21.52	21.73	22	1
20	64QAM	1	49	21.22	21.25	21.38		
20	64QAM	1	99	21.22	21.31	21.39		
20	64QAM	50	0	20.43	20.34	20.60	21	2
20	64QAM	50	24	20.32	20.45	20.48		
20	64QAM	50	50	20.19	20.27	20.52		
20	64QAM	100	0	20.23	20.24	20.57		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.30	21.39	21.63	23	0
15	QPSK	1	37	21.13	21.22	21.47		
15	QPSK	1	74	21.16	21.23	21.50		
15	QPSK	36	0	21.29	21.37	21.60	23	0
15	QPSK	36	20	21.24	21.35	21.59		
15	QPSK	36	39	21.23	21.30	21.54		
15	QPSK	75	0	21.27	21.35	21.58		
15	16QAM	1	0	21.60	21.69	21.73	23	0
15	16QAM	1	37	21.49	21.58	21.76		
15	16QAM	1	74	21.47	21.54	21.78		
15	16QAM	36	0	20.32	20.35	20.59	22	1
15	16QAM	36	20	20.26	20.35	20.57		
15	16QAM	36	39	20.20	20.31	20.54		
15	16QAM	75	0	20.29	20.36	20.58		
15	64QAM	1	0	21.26	21.43	21.67	22	1
15	64QAM	1	37	21.06	21.29	21.48		
15	64QAM	1	74	21.16	21.33	21.55		
15	64QAM	36	0	20.24	20.34	20.49	21	2
15	64QAM	36	20	20.35	20.28	20.57		
15	64QAM	36	39	20.11	20.33	20.56		
15	64QAM	75	0	20.30	20.33	20.53		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.42	21.49	21.56	23	0
10	QPSK	1	25	21.15	21.23	21.46		
10	QPSK	1	49	21.31	21.39	21.47		
10	QPSK	25	0	21.22	21.32	21.55	23	0
10	QPSK	25	12	21.21	21.30	21.55		
10	QPSK	25	25	21.20	21.27	21.53		
10	QPSK	50	0	21.20	21.29	21.54	23	0
10	16QAM	1	0	21.70	21.80	21.81		
10	16QAM	1	25	21.46	21.55	21.76		
10	16QAM	1	49	21.63	21.70	21.73	22	1
10	16QAM	25	0	20.27	20.36	20.57		
10	16QAM	25	12	20.24	20.33	20.57		
10	16QAM	25	25	20.19	20.28	20.54	22	1
10	16QAM	50	0	20.25	20.34	20.58		
10	64QAM	1	0	21.48	21.50	21.49		
10	64QAM	1	25	21.10	21.30	21.55	22	1
10	64QAM	1	49	21.28	21.48	21.49		
10	64QAM	25	0	20.23	20.33	20.59		
10	64QAM	25	12	20.23	20.33	20.61	21	2
10	64QAM	25	25	20.11	20.24	20.62		
10	64QAM	50	0	20.35	20.41	20.49		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.17	21.27	21.51	23	0
5	QPSK	1	12	21.10	21.21	21.46		
5	QPSK	1	24	21.11	21.24	21.49		
5	QPSK	12	0	21.20	21.30	21.56	23	0
5	QPSK	12	7	21.19	21.27	21.56		
5	QPSK	12	13	21.18	21.28	21.54		
5	QPSK	25	0	21.18	21.27	21.54	23	0
5	16QAM	1	0	21.48	21.60	21.80		
5	16QAM	1	12	21.44	21.58	21.81		
5	16QAM	1	24	21.45	21.55	21.79	22	1
5	16QAM	12	0	20.22	20.32	20.60		
5	16QAM	12	7	20.22	20.31	20.61		
5	16QAM	12	13	20.18	20.27	20.56	22	1
5	16QAM	25	0	20.19	20.29	20.56		
5	64QAM	1	0	21.25	21.35	21.54		
5	64QAM	1	12	21.01	21.30	21.38	22	1
5	64QAM	1	24	21.17	21.29	21.54		
5	64QAM	12	0	20.14	20.25	20.51		
5	64QAM	12	7	20.16	20.28	20.51	21	2
5	64QAM	12	13	20.21	20.29	20.49		
5	64QAM	25	0	20.29	20.19	20.53		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.08	21.19	21.44	23	0
3	QPSK	1	8	21.08	21.19	21.44		
3	QPSK	1	14	21.06	21.15	21.42		
3	QPSK	8	0	21.13	21.22	21.52	23	0
3	QPSK	8	4	21.14	21.27	21.54		
3	QPSK	8	7	21.10	21.23	21.48		
3	QPSK	15	0	21.11	21.21	21.50		
3	16QAM	1	0	21.38	21.51	21.73	23	0
3	16QAM	1	8	21.39	21.51	21.75		
3	16QAM	1	14	21.36	21.47	21.69		
3	16QAM	8	0	20.19	20.29	20.57	22	1
3	16QAM	8	4	20.21	20.33	20.58		
3	16QAM	8	7	20.17	20.29	20.55		
3	16QAM	15	0	20.16	20.25	20.54		
3	64QAM	1	0	21.18	21.23	21.49	22	1
3	64QAM	1	8	21.11	21.26	21.52		
3	64QAM	1	14	21.08	21.23	21.41		
3	64QAM	8	0	20.18	20.36	20.49	21	2
3	64QAM	8	4	20.18	20.39	20.54		
3	64QAM	8	7	20.10	20.29	20.53		
3	64QAM	15	0	20.23	20.18	20.56		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.02	21.13	21.40	23	0
1.4	QPSK	1	3	21.08	21.20	21.47		
1.4	QPSK	1	5	21.02	21.12	21.36		
1.4	QPSK	3	0	21.06	21.21	21.43		
1.4	QPSK	3	1	21.09	21.23	21.50		
1.4	QPSK	3	3	21.08	21.19	21.44		
1.4	QPSK	6	0	21.03	21.15	21.42	23	0
1.4	16QAM	1	0	21.28	21.42	21.67	23	0
1.4	16QAM	1	3	21.38	21.49	21.71		
1.4	16QAM	1	5	21.29	21.41	21.64		
1.4	16QAM	3	0	21.08	21.24	21.44		
1.4	16QAM	3	1	21.14	21.28	21.52		
1.4	16QAM	3	3	21.06	21.23	21.45		
1.4	16QAM	6	0	20.13	20.24	20.52	22	1
1.4	64QAM	1	0	21.11	21.23	21.38	22	1
1.4	64QAM	1	3	21.18	21.30	21.41		
1.4	64QAM	1	5	21.09	21.17	21.33		
1.4	64QAM	3	0	21.14	21.15	21.35		
1.4	64QAM	3	1	21.20	21.37	21.62		
1.4	64QAM	3	3	21.02	21.26	21.41		
1.4	64QAM	6	0	20.16	20.24	20.59	21	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.63	20.93	20.68	22	0
20	QPSK	1	49	20.35	20.41	20.55		
20	QPSK	1	99	20.20	20.45	20.60		
20	QPSK	50	0	20.50	20.74	20.58	22	0
20	QPSK	50	24	20.45	20.65	20.54		
20	QPSK	50	50	20.41	20.74	20.54		
20	QPSK	100	0	20.46	20.60	20.53	22	0
20	16QAM	1	0	20.73	20.84	20.92		
20	16QAM	1	49	20.61	20.68	20.86		
20	16QAM	1	99	20.47	20.79	20.92	22	0
20	16QAM	50	0	20.52	20.56	20.75		
20	16QAM	50	24	20.45	20.53	20.70		
20	16QAM	50	50	20.40	20.57	20.73	22	0
20	16QAM	100	0	20.43	20.53	20.67		
20	64QAM	1	0	20.56	20.92	20.61		
20	64QAM	1	49	20.31	20.38	20.65	22	0
20	64QAM	1	99	20.21	20.49	20.50		
20	64QAM	50	0	20.56	20.73	20.55		
20	64QAM	50	24	20.39	20.64	20.48	21	1
20	64QAM	50	50	20.40	20.64	20.64		
20	64QAM	100	0	20.39	20.69	20.63		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.62	20.58	20.79	22	0
15	QPSK	1	37	20.35	20.42	20.59		
15	QPSK	1	74	20.35	20.52	20.67		
15	QPSK	36	0	20.58	20.55	20.70	22	0
15	QPSK	36	20	20.41	20.54	20.70		
15	QPSK	36	39	20.41	20.46	20.70		
15	QPSK	75	0	20.43	20.51	20.69	22	0
15	16QAM	1	0	20.90	20.85	20.84		
15	16QAM	1	37	20.64	20.70	20.74		
15	16QAM	1	74	20.62	20.82	20.89	22	0
15	16QAM	36	0	20.59	20.53	20.75		
15	16QAM	36	20	20.47	20.53	20.70		
15	16QAM	36	39	20.37	20.44	20.70	22	0
15	16QAM	75	0	20.43	20.49	20.68		
15	64QAM	1	0	20.57	20.61	20.84		
15	64QAM	1	37	20.28	20.37	20.54	22	0
15	64QAM	1	74	20.38	20.57	20.69		
15	64QAM	36	0	20.63	20.53	20.70		
15	64QAM	36	20	20.45	20.64	20.79	21	1
15	64QAM	36	39	20.31	20.46	20.72		
15	64QAM	75	0	20.34	20.60	20.75		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.53	20.52	20.67	22	0
10	QPSK	1	25	20.45	20.43	20.68		
10	QPSK	1	49	20.32	20.37	20.61		
10	QPSK	25	0	20.54	20.52	20.69	22	0
10	QPSK	25	12	20.54	20.47	20.73		
10	QPSK	25	25	20.39	20.45	20.71		
10	QPSK	50	0	20.53	20.49	20.77		
10	16QAM	1	0	20.81	20.75	20.82	22	0
10	16QAM	1	25	20.71	20.68	20.81		
10	16QAM	1	49	20.60	20.66	20.78		
10	16QAM	25	0	20.56	20.49	20.49	22	0
10	16QAM	25	12	20.61	20.47	20.55		
10	16QAM	25	25	20.47	20.44	20.50		
10	16QAM	50	0	20.60	20.48	20.57		
10	64QAM	1	0	20.53	20.62	20.76	22	0
10	64QAM	1	25	20.49	20.37	20.78		
10	64QAM	1	49	20.30	20.43	20.60		
10	64QAM	25	0	20.51	20.60	20.70	21	1
10	64QAM	25	12	20.48	20.40	20.70		
10	64QAM	25	25	20.35	20.54	20.70		
10	64QAM	50	0	20.55	20.39	20.81		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.60	20.47	20.52	22	0
5	QPSK	1	12	20.53	20.43	20.48		
5	QPSK	1	24	20.53	20.41	20.48		
5	QPSK	12	0	20.58	20.51	20.56	22	0
5	QPSK	12	7	20.59	20.46	20.55		
5	QPSK	12	13	20.54	20.45	20.53		
5	QPSK	25	0	20.59	20.48	20.53		
5	16QAM	1	0	20.86	20.73	20.88	22	0
5	16QAM	1	12	20.84	20.69	20.82		
5	16QAM	1	24	20.83	20.69	20.83		
5	16QAM	12	0	20.61	20.48	20.56	22	0
5	16QAM	12	7	20.61	20.51	20.56		
5	16QAM	12	13	20.55	20.44	20.56		
5	16QAM	25	0	20.56	20.46	20.55		
5	64QAM	1	0	20.56	20.39	20.61	22	0
5	64QAM	1	12	20.43	20.49	20.49		
5	64QAM	1	24	20.55	20.32	20.39		
5	64QAM	12	0	20.57	20.41	20.53	21	1
5	64QAM	12	7	20.66	20.49	20.47		
5	64QAM	12	13	20.53	20.47	20.47		
5	64QAM	25	0	20.53	20.41	20.43		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.39	20.39	20.66	22	0
3	QPSK	1	8	20.36	20.36	20.62		
3	QPSK	1	14	20.35	20.36	20.60		
3	QPSK	8	0	20.42	20.45	20.66	22	0
3	QPSK	8	4	20.45	20.43	20.69		
3	QPSK	8	7	20.38	20.42	20.67		
3	QPSK	15	0	20.44	20.39	20.70	22	0
3	16QAM	1	0	20.70	20.67	20.80		
3	16QAM	1	8	20.71	20.65	20.78		
3	16QAM	1	14	20.68	20.65	20.75	22	0
3	16QAM	8	0	20.52	20.48	20.55		
3	16QAM	8	4	20.50	20.48	20.54		
3	16QAM	8	7	20.48	20.45	20.53	21	1
3	16QAM	15	0	20.43	20.41	20.51		
3	64QAM	1	0	20.46	20.42	20.62		
3	64QAM	1	8	20.35	20.40	20.61	22	0
3	64QAM	1	14	20.44	20.31	20.63		
3	64QAM	8	0	20.37	20.36	20.61		
3	64QAM	8	4	20.55	20.38	20.65	21	1
3	64QAM	8	7	20.41	20.42	20.77		
3	64QAM	15	0	20.38	20.49	20.78		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.32	20.32	20.60	22	0
1.4	QPSK	1	3	20.39	20.41	20.69		
1.4	QPSK	1	5	20.32	20.31	20.59		
1.4	QPSK	3	0	20.34	20.35	20.62		
1.4	QPSK	3	1	20.40	20.38	20.68		
1.4	QPSK	3	3	20.37	20.35	20.63	22	0
1.4	QPSK	6	0	20.36	20.33	20.64		
1.4	16QAM	1	0	20.61	20.59	20.84	22	0
1.4	16QAM	1	3	20.69	20.66	20.87		
1.4	16QAM	1	5	20.60	20.60	20.91		
1.4	16QAM	3	0	20.38	20.35	20.67		
1.4	16QAM	3	1	20.42	20.42	20.72		
1.4	16QAM	3	3	20.36	20.37	20.64	22	0
1.4	16QAM	6	0	20.43	20.40	20.70		
1.4	64QAM	1	0	20.31	20.31	20.51	22	0
1.4	64QAM	1	3	20.47	20.44	20.76		
1.4	64QAM	1	5	20.22	20.35	20.55		
1.4	64QAM	3	0	20.40	20.44	20.58		
1.4	64QAM	3	1	20.50	20.29	20.75		
1.4	64QAM	3	3	20.42	20.25	20.55	21	1
1.4	64QAM	6	0	20.35	20.33	20.55		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.88	21.99	21.70	23.5	0
10	QPSK	1	25	21.89	21.82	21.64		
10	QPSK	1	49	21.80	21.61	21.55		
10	QPSK	25	0	21.30	21.50	21.23	23	0.5
10	QPSK	25	12	21.29	21.48	21.20		
10	QPSK	25	25	21.20	21.40	21.15		
10	QPSK	50	0	21.25	21.46	21.18	23	0.5
10	16QAM	1	0	21.50	21.64	21.45		
10	16QAM	1	25	21.44	21.61	21.35		
10	16QAM	1	49	21.35	21.53	21.28	22	1.5
10	16QAM	25	0	20.29	20.49	20.21		
10	16QAM	25	12	20.28	20.50	20.21		
10	16QAM	25	25	20.19	20.41	20.14	22	1.5
10	16QAM	50	0	20.24	20.47	20.21		
10	64QAM	1	0	20.41	20.62	20.34		
10	64QAM	1	25	20.36	20.53	20.24	22	1.5
10	64QAM	1	49	20.25	20.44	20.17		
10	64QAM	25	0	19.32	19.53	19.24		
10	64QAM	25	12	19.29	19.51	19.26	21	2.5
10	64QAM	25	25	19.21	19.43	19.17		
10	64QAM	50	0	19.27	19.50	19.22		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.95	21.73	21.74	23.5	0
5	QPSK	1	12	21.91	21.68	21.70		
5	QPSK	1	24	21.89	21.66	21.66		
5	QPSK	12	0	21.59	21.24	21.28	23	0.5
5	QPSK	12	7	21.59	21.26	21.28		
5	QPSK	12	13	21.54	21.22	21.20		
5	QPSK	25	0	21.56	21.21	21.27	23	0.5
5	16QAM	1	0	21.77	21.46	21.46		
5	16QAM	1	12	21.69	21.44	21.44		
5	16QAM	1	24	21.69	21.34	21.34	22	1.5
5	16QAM	12	0	20.60	20.26	20.28		
5	16QAM	12	7	20.58	20.28	20.27		
5	16QAM	12	13	20.55	20.21	20.23	22	1.5
5	16QAM	25	0	20.58	20.24	20.25		
5	64QAM	1	0	20.72	20.41	20.40		
5	64QAM	1	12	20.65	20.36	20.36	22	1.5
5	64QAM	1	24	20.61	20.31	20.31		
5	64QAM	12	0	19.66	19.30	19.36		
5	64QAM	12	7	19.65	19.33	19.32	21	2.5
5	64QAM	12	13	19.62	19.25	19.29		
5	64QAM	25	0	19.58	19.26	19.27		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.95	21.69	21.73	23.5	0
3	QPSK	1	8	21.92	21.67	21.69		
3	QPSK	1	14	21.91	21.64	21.65		
3	QPSK	8	0	21.58	21.21	21.25	23	0.5
3	QPSK	8	4	21.58	21.20	21.29		
3	QPSK	8	7	21.55	21.19	21.23		
3	QPSK	15	0	21.56	21.18	21.24	23	0.5
3	16QAM	1	0	21.70	21.38	21.39		
3	16QAM	1	8	21.71	21.39	21.42		
3	16QAM	1	14	21.63	21.41	21.32	22	1.5
3	16QAM	8	0	20.64	20.28	20.31		
3	16QAM	8	4	20.65	20.29	20.32		
3	16QAM	8	7	20.63	20.25	20.28	21	2.5
3	16QAM	15	0	20.60	20.23	20.25		
3	64QAM	1	0	20.71	20.38	20.39		
3	64QAM	1	8	20.67	20.35	20.35	22	1.5
3	64QAM	1	14	20.65	20.33	20.35		
3	64QAM	8	0	19.65	19.30	19.33		
3	64QAM	8	4	19.66	19.29	19.30	21	2.5
3	64QAM	8	7	19.64	19.26	19.30		
3	64QAM	15	0	19.61	19.23	19.26		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.95	21.59	21.61	23.5	0
1.4	QPSK	1	3	21.89	21.65	21.64		
1.4	QPSK	1	5	21.92	21.58	21.59		
1.4	QPSK	3	0	21.96	21.65	21.62		
1.4	QPSK	3	1	21.93	21.71	21.71		
1.4	QPSK	3	3	21.89	21.63	21.64		
1.4	QPSK	6	0	21.51	21.16	21.14	23	0.5
1.4	16QAM	1	0	21.63	21.34	21.33	23	0.5
1.4	16QAM	1	3	21.68	21.41	21.35		
1.4	16QAM	1	5	21.60	21.34	21.30		
1.4	16QAM	3	0	21.49	21.15	21.15		
1.4	16QAM	3	1	21.54	21.18	21.19		
1.4	16QAM	3	3	21.47	21.12	21.12		
1.4	16QAM	6	0	20.57	20.22	20.22	22	1.5
1.4	64QAM	1	0	20.64	20.32	20.29	22	1.5
1.4	64QAM	1	3	20.68	20.32	20.34		
1.4	64QAM	1	5	20.60	20.25	20.26		
1.4	64QAM	3	0	20.61	20.28	20.26		
1.4	64QAM	3	1	20.62	20.32	20.32		
1.4	64QAM	3	3	20.61	20.25	20.25		
1.4	64QAM	6	0	19.49	19.14	19.15	21	2.5



**<LTE Band 7>**

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				Channel	20850	21100		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.30	21.33	21.29	23	0
20	QPSK	1	49	21.14	21.17	21.23		
20	QPSK	1	99	21.13	21.26	21.25		
20	QPSK	50	0	21.13	21.15	21.14	23	0
20	QPSK	50	24	21.07	21.10	21.13		
20	QPSK	50	50	21.07	21.10	21.12		
20	QPSK	100	0	21.05	21.11	21.10	23	0
20	16QAM	1	0	21.22	21.29	21.22		
20	16QAM	1	49	21.06	21.11	21.18		
20	16QAM	1	99	21.07	21.07	21.25	22	1
20	16QAM	50	0	20.15	20.10	20.12		
20	16QAM	50	24	20.05	20.14	20.15		
20	16QAM	50	50	20.04	20.09	20.12	21	2
20	16QAM	100	0	20.02	20.08	20.13		
20	64QAM	1	0	20.29	20.32	20.27		
20	64QAM	1	49	20.14	20.21	20.24	22	1
20	64QAM	1	99	20.11	20.25	20.31		
20	64QAM	50	0	19.16	19.09	19.14		
20	64QAM	50	24	19.09	19.12	19.15	21	2
20	64QAM	50	50	19.07	19.08	19.13		
20	64QAM	100	0	19.08	19.09	19.15		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.09	21.15	21.11	23	0
15	QPSK	1	37	21.04	21.03	21.07		
15	QPSK	1	74	21.03	21.07	21.13		
15	QPSK	36	0	21.12	21.08	21.11	23	0
15	QPSK	36	20	21.07	21.08	21.16		
15	QPSK	36	39	21.03	21.07	21.15		
15	QPSK	75	0	21.05	21.08	21.13	23	0
15	16QAM	1	0	21.20	21.25	21.19		
15	16QAM	1	37	21.07	21.12	21.21		
15	16QAM	1	74	21.12	21.18	21.25	22	1
15	16QAM	36	0	20.13	20.06	20.14		
15	16QAM	36	20	20.08	20.11	20.15		
15	16QAM	36	39	20.05	20.09	20.12	22	1
15	16QAM	75	0	20.03	20.07	20.11		
15	64QAM	1	0	20.32	20.36	20.33		
15	64QAM	1	37	20.17	20.23	20.26	22	1
15	64QAM	1	74	20.22	20.26	20.33		
15	64QAM	36	0	19.16	19.09	19.16		
15	64QAM	36	20	19.08	19.13	19.17	21	2
15	64QAM	36	39	19.10	19.08	19.14		
15	64QAM	75	0	19.14	19.08	19.11		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.09	21.07	21.15	23	0
10	QPSK	1	25	21.11	21.09	21.17		
10	QPSK	1	49	21.00	21.09	21.06		
10	QPSK	25	0	21.02	21.01	21.10	23	0
10	QPSK	25	12	21.03	21.02	21.11		
10	QPSK	25	25	21.01	21.01	21.09		
10	QPSK	50	0	21.03	21.01	21.10	23	0
10	16QAM	1	0	21.22	21.20	21.29		
10	16QAM	1	25	21.22	21.22	21.30		
10	16QAM	1	49	21.12	21.23	21.30	22	1
10	16QAM	25	0	20.03	20.01	20.09		
10	16QAM	25	12	20.07	20.04	20.11		
10	16QAM	25	25	20.06	20.02	20.10	22	1
10	16QAM	50	0	20.08	20.03	20.10		
10	64QAM	1	0	20.18	20.17	20.26		
10	64QAM	1	25	20.19	20.16	20.28	22	1
10	64QAM	1	49	20.08	20.18	20.27		
10	64QAM	25	0	19.06	19.04	19.09		
10	64QAM	25	12	19.08	19.08	19.13	21	2
10	64QAM	25	25	19.06	19.04	19.10		
10	64QAM	50	0	19.06	19.03	19.11		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.05	21.04	21.03	23	0
5	QPSK	1	12	21.07	21.06	21.05		
5	QPSK	1	24	21.04	21.06	21.04		
5	QPSK	12	0	21.12	21.11	21.08	23	0
5	QPSK	12	7	21.16	21.12	21.12		
5	QPSK	12	13	21.13	21.08	21.09		
5	QPSK	25	0	21.10	21.11	21.07	23	0
5	16QAM	1	0	21.25	21.28	21.24		
5	16QAM	1	12	21.21	21.29	21.30		
5	16QAM	1	24	21.18	21.28	21.25	22	1
5	16QAM	12	0	20.08	20.14	20.08		
5	16QAM	12	7	20.08	20.16	20.14		
5	16QAM	12	13	20.03	20.14	20.10	22	1
5	16QAM	25	0	20.06	20.11	20.09		
5	64QAM	1	0	20.27	20.25	20.25		
5	64QAM	1	12	20.19	20.25	20.27	22	1
5	64QAM	1	24	20.16	20.25	20.26		
5	64QAM	12	0	19.08	19.15	19.12		
5	64QAM	12	7	19.17	19.20	19.15	21	2
5	64QAM	12	13	19.20	19.15	19.13		
5	64QAM	25	0	19.13	19.12	19.08		



**<LTE Band 12>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	21.59	21.60	21.58	23	0
10	QPSK	1	25	21.52	21.53	21.49		
10	QPSK	1	49	21.48	21.41	21.50		
10	QPSK	25	0	21.45	21.48	21.42	23	0
10	QPSK	25	12	21.43	21.41	21.39		
10	QPSK	25	25	21.41	21.41	21.40		
10	QPSK	50	0	21.53	21.55	21.44		
10	16QAM	1	0	21.56	21.48	21.47	23	0
10	16QAM	1	25	21.54	21.49	21.48		
10	16QAM	1	49	21.46	21.45	21.54		
10	16QAM	25	0	20.45	20.53	20.47	22	1
10	16QAM	25	12	20.57	20.57	20.49		
10	16QAM	25	25	20.52	20.49	20.59		
10	16QAM	50	0	20.56	20.53	20.45		
10	64QAM	1	0	20.58	20.58	20.62	22	1
10	64QAM	1	25	20.71	20.60	20.56		
10	64QAM	1	49	20.59	20.56	20.63		
10	64QAM	25	0	19.49	19.56	19.49	21	2
10	64QAM	25	12	19.60	19.56	19.52		
10	64QAM	25	25	19.56	19.51	19.62		
10	64QAM	50	0	19.59	19.54	19.49		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	21.51	21.43	21.38	23	0
5	QPSK	1	12	21.48	21.43	21.49		
5	QPSK	1	24	21.58	21.43	21.48		
5	QPSK	12	0	21.57	21.49	21.57	23	0
5	QPSK	12	7	21.59	21.50	21.55		
5	QPSK	12	13	21.54	21.47	21.54		
5	QPSK	25	0	21.53	21.46	21.53		
5	16QAM	1	0	21.56	21.48	21.44	23	0
5	16QAM	1	12	21.57	21.44	21.55		
5	16QAM	1	24	21.34	21.44	21.47		
5	16QAM	12	0	20.61	20.51	20.57	22	1
5	16QAM	12	7	20.61	20.51	20.63		
5	16QAM	12	13	20.58	20.47	20.57		
5	16QAM	25	0	20.56	20.49	20.54		
5	64QAM	1	0	20.75	20.67	20.56	22	1
5	64QAM	1	12	20.74	20.59	20.67		
5	64QAM	1	24	20.79	20.58	20.62		
5	64QAM	12	0	19.62	19.53	19.61	21	2
5	64QAM	12	7	19.63	19.58	19.66		
5	64QAM	12	13	19.61	19.53	19.61		
5	64QAM	25	0	19.57	19.50	19.58		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	21.42	21.41	21.51	23	0
3	QPSK	1	8	21.42	21.39	21.46		
3	QPSK	1	14	21.39	21.44	21.48		
3	QPSK	8	0	21.49	21.45	21.55	23	0
3	QPSK	8	4	21.50	21.47	21.54		
3	QPSK	8	7	21.43	21.49	21.51		
3	QPSK	15	0	21.44	21.43	21.51		
3	16QAM	1	0	21.47	21.43	21.50	23	0
3	16QAM	1	8	21.50	21.45	21.51		
3	16QAM	1	14	21.48	21.43	21.47		
3	16QAM	8	0	20.51	20.53	20.59	22	1
3	16QAM	8	4	20.56	20.53	20.63		
3	16QAM	8	7	20.48	20.52	20.58		
3	16QAM	15	0	20.46	20.50	20.56		
3	64QAM	1	0	20.63	20.60	20.62	22	1
3	64QAM	1	8	20.63	20.58	20.63		
3	64QAM	1	14	20.64	20.56	20.62		
3	64QAM	8	0	19.55	19.52	19.59	21	2
3	64QAM	8	4	19.56	19.54	19.62		
3	64QAM	8	7	19.49	19.52	19.57		
3	64QAM	15	0	19.48	19.48	19.55		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	21.40	21.34	21.37	23	0
1.4	QPSK	1	3	21.38	21.39	21.42		
1.4	QPSK	1	5	21.42	21.32	21.37		
1.4	QPSK	3	0	21.45	21.38	21.47		
1.4	QPSK	3	1	21.52	21.44	21.49		
1.4	QPSK	3	3	21.48	21.38	21.43		
1.4	QPSK	6	0	21.50	21.38	21.45	23	0
1.4	16QAM	1	0	21.69	21.55	21.62	23	0
1.4	16QAM	1	3	21.59	21.61	21.66		
1.4	16QAM	1	5	21.69	21.56	21.58		
1.4	16QAM	3	0	21.50	21.38	21.40		
1.4	16QAM	3	1	21.54	21.43	21.45		
1.4	16QAM	3	3	21.49	21.37	21.39		
1.4	16QAM	6	0	20.56	20.45	20.53	22	1
1.4	64QAM	1	0	20.66	20.54	20.53	22	1
1.4	64QAM	1	3	20.67	20.60	20.59		
1.4	64QAM	1	5	20.62	20.53	20.54		
1.4	64QAM	3	0	20.65	20.52	20.56		
1.4	64QAM	3	1	20.66	20.55	20.60		
1.4	64QAM	3	3	20.60	20.50	20.51		
1.4	64QAM	6	0	19.51	19.38	19.44	21	2



**<LTE Band 13>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	21.14			22.5	0
10	QPSK	1	25	21.08				
10	QPSK	1	49	21.06				
10	QPSK	25	0	21.13			22.5	0
10	QPSK	25	12	21.06				
10	QPSK	25	25	21.11				
10	QPSK	50	0	21.03				
10	16QAM	1	0	21.04			22.5	0
10	16QAM	1	25	21.00				
10	16QAM	1	49	21.02				
10	16QAM	25	0	20.62			22	0.5
10	16QAM	25	12	20.64				
10	16QAM	25	25	20.61				
10	16QAM	50	0	20.61				
10	64QAM	1	0	20.68			22	0.5
10	64QAM	1	25	20.61				
10	64QAM	1	49	20.62				
10	64QAM	25	0	19.61			21	1.5
10	64QAM	25	12	19.64				
10	64QAM	25	25	19.64				
10	64QAM	50	0	19.62				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	21.03	21.10	21.08	22.5	0
5	QPSK	1	12	21.00	21.06	21.11		
5	QPSK	1	24	21.07	21.05	21.10		
5	QPSK	12	0	21.05	21.08	21.02	22.5	0
5	QPSK	12	7	21.08	21.06	21.10		
5	QPSK	12	13	21.07	21.10	21.05		
5	QPSK	25	0	21.00	21.02	21.09		
5	16QAM	1	0	21.09	21.05	21.08	22.5	0
5	16QAM	1	12	21.03	21.08	21.07		
5	16QAM	1	24	21.06	21.05	21.06		
5	16QAM	12	0	20.61	20.63	20.66	22	0.5
5	16QAM	12	7	20.65	20.56	20.76		
5	16QAM	12	13	20.57	20.52	20.70		
5	16QAM	25	0	20.56	20.57	20.75		
5	64QAM	1	0	20.67	20.72	20.71	22	0.5
5	64QAM	1	12	20.68	20.60	20.78		
5	64QAM	1	24	20.60	20.58	20.73		
5	64QAM	12	0	19.62	19.61	19.69	21	1.5
5	64QAM	12	7	19.63	19.62	19.80		
5	64QAM	12	13	19.60	19.59	19.75		
5	64QAM	25	0	19.57	19.58	19.71		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.56	21.58	21.54		
10	QPSK	1	25	21.47	21.52	21.50	23	0
10	QPSK	1	49	21.56	21.57	21.53		
10	QPSK	25	0	21.54	21.58	21.56		
10	QPSK	25	12	21.53	21.52	21.42	23	0
10	QPSK	25	25	21.53	21.57	21.41		
10	QPSK	50	0	21.50	21.52	21.41		
10	16QAM	1	0	21.43	21.39	21.36	23	0
10	16QAM	1	25	21.46	21.47	21.47		
10	16QAM	1	49	21.57	21.55	21.47		
10	16QAM	25	0	20.52	20.52	20.45	22	1
10	16QAM	25	12	20.54	20.51	20.41		
10	16QAM	25	25	20.49	20.55	20.52		
10	16QAM	50	0	20.54	20.51	20.43	22	1
10	64QAM	1	0	20.57	20.49	20.39		
10	64QAM	1	25	20.58	20.57	20.47		
10	64QAM	1	49	20.67	20.66	20.59	21	2
10	64QAM	25	0	19.56	19.53	19.45		
10	64QAM	25	12	19.59	19.55	19.51		
10	64QAM	25	25	19.49	19.57	19.55	21	2
10	64QAM	50	0	19.57	19.55	19.54		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	21.27	21.42	21.38		
5	QPSK	1	12	21.33	21.40	21.45	23	0
5	QPSK	1	24	21.35	21.48	21.43		
5	QPSK	12	0	21.31	21.46	21.51		
5	QPSK	12	7	21.46	21.49	21.52	23	0
5	QPSK	12	13	21.40	21.42	21.49		
5	QPSK	25	0	21.41	21.47	21.49		
5	16QAM	1	0	21.33	21.43	21.44	23	0
5	16QAM	1	12	21.40	21.45	21.55		
5	16QAM	1	24	21.36	21.52	21.47		
5	16QAM	12	0	20.34	20.48	20.53	22	1
5	16QAM	12	7	20.46	20.47	20.54		
5	16QAM	12	13	20.39	20.45	20.51		
5	16QAM	25	0	20.43	20.46	20.50	22	1
5	64QAM	1	0	20.48	20.60	20.60		
5	64QAM	1	12	20.53	20.56	20.67		
5	64QAM	1	24	20.49	20.65	20.62	21	2
5	64QAM	12	0	19.36	19.50	19.59		
5	64QAM	12	7	19.49	19.55	19.59		
5	64QAM	12	13	19.48	19.50	19.55	21	2
5	64QAM	25	0	19.45	19.48	19.51		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	21.63	21.93	21.84	23	0
20	QPSK	1	49	21.29	21.41	21.67		
20	QPSK	1	99	21.34	21.47	21.61		
20	QPSK	50	0	21.44	21.89	21.82	23	0
20	QPSK	50	24	21.40	21.53	21.77		
20	QPSK	50	50	21.26	21.52	21.68		
20	QPSK	100	0	21.42	21.77	21.70	23	0
20	16QAM	1	0	21.85	21.88	21.90		
20	16QAM	1	49	21.53	21.65	21.84		
20	16QAM	1	99	21.56	21.70	21.76	22	1
20	16QAM	50	0	20.48	20.58	20.86		
20	16QAM	50	24	20.41	20.55	20.82		
20	16QAM	50	50	20.38	20.53	20.70	22	1
20	16QAM	100	0	20.50	20.56	21.45		
20	64QAM	1	0	20.93	20.95	21.01		
20	64QAM	1	49	20.60	20.62	20.89	22	1
20	64QAM	1	99	20.61	20.66	20.77		
20	64QAM	50	0	19.58	19.61	19.89		
20	64QAM	50	24	19.52	19.56	19.81	21	2
20	64QAM	50	50	19.39	19.54	19.71		
20	64QAM	100	0	19.51	19.55	19.88		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	21.41	21.55	21.82	23	0
15	QPSK	1	37	21.26	21.43	21.58		
15	QPSK	1	74	21.19	21.33	21.63		
15	QPSK	36	0	21.41	21.57	21.79	23	0
15	QPSK	36	20	21.35	21.53	21.70		
15	QPSK	36	39	21.33	21.50	21.67		
15	QPSK	75	0	21.36	21.53	21.73	23	0
15	16QAM	1	0	21.64	21.81	21.90		
15	16QAM	1	37	21.54	21.68	21.87		
15	16QAM	1	74	21.47	21.61	21.80	22	1
15	16QAM	36	0	20.42	20.60	20.84		
15	16QAM	36	20	20.38	20.55	20.71		
15	16QAM	36	39	20.31	20.51	20.69	22	1
15	16QAM	75	0	20.38	20.57	20.73		
15	64QAM	1	0	20.62	20.77	21.02		
15	64QAM	1	37	20.47	20.63	20.80	22	1
15	64QAM	1	74	20.38	20.55	20.79		
15	64QAM	36	0	19.43	19.58	19.85		
15	64QAM	36	20	19.41	19.58	19.72	21	2
15	64QAM	36	39	19.39	19.54	19.71		
15	64QAM	75	0	19.38	19.53	19.71		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	21.53	21.70	21.68	23	0
10	QPSK	1	25	21.25	21.41	21.61		
10	QPSK	1	49	21.46	21.63	21.64		
10	QPSK	25	0	21.35	21.52	21.69	23	0
10	QPSK	25	12	21.31	21.51	21.69		
10	QPSK	25	25	21.32	21.48	21.72		
10	QPSK	50	0	21.33	21.51	21.69	23	0
10	16QAM	1	0	21.76	21.86	21.93		
10	16QAM	1	25	21.51	21.67	21.84		
10	16QAM	1	49	21.71	21.88	21.80	22	1
10	16QAM	25	0	20.39	20.53	20.71		
10	16QAM	25	12	20.37	20.55	20.72		
10	16QAM	25	25	20.34	20.51	20.71	22	1
10	16QAM	50	0	20.37	20.54	20.73		
10	64QAM	1	0	20.71	20.88	20.83		
10	64QAM	1	25	20.42	20.62	20.80	22	1
10	64QAM	1	49	20.59	20.82	20.73		
10	64QAM	25	0	19.37	19.56	19.71		
10	64QAM	25	12	19.37	19.54	19.72	21	2
10	64QAM	25	25	19.35	19.52	19.70		
10	64QAM	50	0	19.36	19.54	19.75		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	21.26	21.46	21.65	23	0
5	QPSK	1	12	21.19	21.40	21.62		
5	QPSK	1	24	21.23	21.43	21.65		
5	QPSK	12	0	21.30	21.48	21.69	23	0
5	QPSK	12	7	21.31	21.53	21.68		
5	QPSK	12	13	21.23	21.50	21.67		
5	QPSK	25	0	21.24	21.44	21.73	23	0
5	16QAM	1	0	21.50	21.68	21.86		
5	16QAM	1	12	21.47	21.67	21.79		
5	16QAM	1	24	21.47	21.67	21.75	22	1
5	16QAM	12	0	20.32	20.51	20.69		
5	16QAM	12	7	20.32	20.51	20.66		
5	16QAM	12	13	20.27	20.47	20.64	22	1
5	16QAM	25	0	20.29	20.51	20.68		
5	64QAM	1	0	20.46	20.67	20.84		
5	64QAM	1	12	20.41	20.62	20.76	22	1
5	64QAM	1	24	20.41	20.62	20.74		
5	64QAM	12	0	19.34	19.56	19.76		
5	64QAM	12	7	19.35	19.56	19.77	21	2
5	64QAM	12	13	19.29	19.52	19.75		
5	64QAM	25	0	19.27	19.51	19.70		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	21.28	21.42	21.63	23	0
3	QPSK	1	8	21.25	21.39	21.60		
3	QPSK	1	14	21.27	21.40	21.61		
3	QPSK	8	0	21.33	21.45	21.70	23	0
3	QPSK	8	4	21.36	21.47	21.72		
3	QPSK	8	7	21.33	21.46	21.73		
3	QPSK	15	0	21.32	21.45	21.68	23	0
3	16QAM	1	0	21.53	21.64	21.77		
3	16QAM	1	8	21.53	21.66	21.78		
3	16QAM	1	14	21.51	21.65	21.73	22	1
3	16QAM	8	0	20.39	20.52	20.73		
3	16QAM	8	4	20.42	20.56	20.74		
3	16QAM	8	7	20.38	20.50	20.75	22	1
3	16QAM	15	0	20.35	20.48	20.68		
3	64QAM	1	0	20.48	20.58	20.74		
3	64QAM	1	8	20.47	20.58	20.74	22	1
3	64QAM	1	14	20.46	20.59	20.73		
3	64QAM	8	0	19.39	19.51	19.72		
3	64QAM	8	4	19.40	19.54	19.77	21	2
3	64QAM	8	7	19.36	19.48	19.73		
3	64QAM	15	0	19.34	19.47	19.71		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	21.19	21.35	21.49	23	0
1.4	QPSK	1	3	21.26	21.40	21.58		
1.4	QPSK	1	5	21.20	21.32	21.51		
1.4	QPSK	3	0	21.24	21.42	21.57		
1.4	QPSK	3	1	21.29	21.45	21.64		
1.4	QPSK	3	3	21.24	21.39	21.59		
1.4	QPSK	6	0	21.26	21.40	21.60	23	0
1.4	16QAM	1	0	21.41	21.54	21.70	23	0
1.4	16QAM	1	3	21.53	21.64	21.76		
1.4	16QAM	1	5	21.43	21.57	21.66		
1.4	16QAM	3	0	21.27	21.40	21.57		
1.4	16QAM	3	1	21.33	21.43	21.62		
1.4	16QAM	3	3	21.25	21.39	21.56		
1.4	16QAM	6	0	20.32	20.47	20.68	22	1
1.4	64QAM	1	0	20.40	20.52	20.73	22	1
1.4	64QAM	1	3	20.46	20.60	20.79		
1.4	64QAM	1	5	20.41	20.51	20.72		
1.4	64QAM	3	0	20.37	20.50	20.68		
1.4	64QAM	3	1	20.43	20.57	20.74		
1.4	64QAM	3	3	20.36	20.50	20.69		
1.4	64QAM	6	0	19.28	19.40	19.60	22	1



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	21.36	21.58	21.24	23	0
15	QPSK	1	37	21.23	21.48	21.13		
15	QPSK	1	74	21.08	21.29	21.09		
15	QPSK	36	0	21.29	21.48	21.15	23	0
15	QPSK	36	20	21.28	21.38	21.12		
15	QPSK	36	39	21.14	21.39	21.03		
15	QPSK	75	0	21.20	21.44	21.11		
15	16QAM	1	0	21.26	21.45	21.22	23	0
15	16QAM	1	37	21.18	21.43	21.09		
15	16QAM	1	74	21.08	21.23	21.04		
15	16QAM	36	0	20.26	20.53	20.18	22	1
15	16QAM	36	20	20.25	20.51	20.14		
15	16QAM	36	39	20.15	20.39	20.05		
15	16QAM	75	0	20.24	20.46	20.12		
15	64QAM	1	0	20.44	20.71	20.36	22	1
15	64QAM	1	37	20.33	20.60	20.27		
15	64QAM	1	74	20.23	20.40	20.11		
15	64QAM	36	0	19.33	19.55	19.21	21	2
15	64QAM	36	20	19.30	19.54	19.16		
15	64QAM	36	39	19.18	19.45	19.09		
15	64QAM	75	0	19.21	19.47	19.12		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	21.06	21.20	21.05	23	0
10	QPSK	1	25	21.00	21.12	21.02		
10	QPSK	1	49	21.04	21.01	21.01		
10	QPSK	25	0	21.33	21.22	21.06	23	0
10	QPSK	25	12	21.32	21.19	21.08		
10	QPSK	25	25	21.27	21.13	21.03		
10	QPSK	50	0	21.32	21.18	21.04		
10	16QAM	1	0	21.56	21.37	21.30	23	0
10	16QAM	1	25	21.51	21.31	21.22		
10	16QAM	1	49	21.41	21.28	21.16		
10	16QAM	25	0	20.37	20.21	20.07	22	1
10	16QAM	25	12	20.38	20.21	20.08		
10	16QAM	25	25	20.31	20.13	20.02		
10	16QAM	50	0	20.34	20.18	20.07		
10	64QAM	1	0	20.40	20.36	20.24	22	1
10	64QAM	1	25	20.45	20.25	20.15		
10	64QAM	1	49	20.33	20.18	20.05		
10	64QAM	25	0	19.47	19.22	19.09	21	2
10	64QAM	25	12	19.44	19.24	19.10		
10	64QAM	25	25	19.37	19.17	19.01		
10	64QAM	50	0	19.38	19.22	19.10		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	21.32	21.15	21.08	23	0
5	QPSK	1	12	21.27	21.10	21.05		
5	QPSK	1	24	21.24	21.06	21.02		
5	QPSK	12	0	21.37	21.18	21.01	23	0
5	QPSK	12	7	21.40	21.18	21.01		
5	QPSK	12	13	21.32	21.13	21.03		
5	QPSK	25	0	21.35	21.16	21.02	23	0
5	16QAM	1	0	21.53	21.35	21.24		
5	16QAM	1	12	21.52	21.31	21.21		
5	16QAM	1	24	21.48	21.30	21.13	22	1
5	16QAM	12	0	20.41	20.20	20.01		
5	16QAM	12	7	20.37	20.18	20.03		
5	16QAM	12	13	20.35	20.13	20.01	22	1
5	16QAM	25	0	20.38	20.16	20.02		
5	64QAM	1	0	20.51	20.32	20.21		
5	64QAM	1	12	20.45	20.26	20.13	22	1
5	64QAM	1	24	20.42	20.23	20.10		
5	64QAM	12	0	19.42	19.24	19.10		
5	64QAM	12	7	19.42	19.23	19.09	21	2
5	64QAM	12	13	19.38	19.18	19.07		
5	64QAM	25	0	19.34	19.18	19.04		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.44	21.14	21.06	23	0
3	QPSK	1	8	21.40	21.08	21.03		
3	QPSK	1	14	21.40	21.07	21.01		
3	QPSK	8	0	21.48	21.17	21.03	23	0
3	QPSK	8	4	21.45	21.19	21.09		
3	QPSK	8	7	21.41	21.12	21.00		
3	QPSK	15	0	21.42	21.14	21.07	23	0
3	16QAM	1	0	21.52	21.28	21.16		
3	16QAM	1	8	21.51	21.37	21.21		
3	16QAM	1	14	21.50	21.31	21.11	22	1
3	16QAM	8	0	20.51	20.22	20.06		
3	16QAM	8	4	20.53	20.20	20.05		
3	16QAM	8	7	20.49	20.20	20.05	22	1
3	16QAM	15	0	20.45	20.16	20.01		
3	64QAM	1	0	20.57	20.29	20.15		
3	64QAM	1	8	20.58	20.26	20.12	22	1
3	64QAM	1	14	20.55	20.24	20.09		
3	64QAM	8	0	19.51	19.23	19.05		
3	64QAM	8	4	19.53	19.22	19.07	21	2
3	64QAM	8	7	19.53	19.21	19.04		
3	64QAM	15	0	19.49	19.17	19.04		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	21.55	21.29	21.31	23	0
1.4	QPSK	1	3	21.57	21.35	21.34		
1.4	QPSK	1	5	21.52	21.28	21.29		
1.4	QPSK	3	0	21.57	21.35	21.32		
1.4	QPSK	3	1	21.53	21.41	21.41		
1.4	QPSK	3	3	21.57	21.33	21.34		
1.4	QPSK	6	0	21.21	21.06	21.04	23	0
1.4	16QAM	1	0	21.33	21.04	21.03	23	0
1.4	16QAM	1	3	21.38	21.11	21.05		
1.4	16QAM	1	5	21.30	21.04	21.00		
1.4	16QAM	3	0	21.19	21.05	21.04		
1.4	16QAM	3	1	21.24	21.08	21.09		
1.4	16QAM	3	3	21.17	21.02	21.02		
1.4	16QAM	6	0	20.27	20.02	20.02	22	1
1.4	64QAM	1	0	20.34	20.02	20.01	22	1
1.4	64QAM	1	3	20.38	20.02	20.04		
1.4	64QAM	1	5	20.30	20.05	20.06		
1.4	64QAM	3	0	20.31	20.08	20.06		
1.4	64QAM	3	1	20.32	20.02	20.02		
1.4	64QAM	3	3	20.31	20.05	20.05		
1.4	64QAM	6	0	19.19	19.04	19.05	21	2



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	20.84	21.37	20.95	22	0
20	QPSK	1	49	20.65	20.99	20.74		
20	QPSK	1	99	20.61	20.83	20.56		
20	QPSK	50	0	20.81	21.14	20.94	22	0
20	QPSK	50	24	20.75	21.08	20.85		
20	QPSK	50	50	20.72	21.06	20.66		
20	QPSK	100	0	20.74	21.11	20.84	22	0
20	16QAM	1	0	21.13	21.23	21.26		
20	16QAM	1	49	20.94	21.33	21.02		
20	16QAM	1	99	20.92	21.17	20.87	22	0
20	16QAM	50	0	20.84	21.19	20.93		
20	16QAM	50	24	20.78	21.14	20.87		
20	16QAM	50	50	20.72	21.09	20.70	22	0
20	16QAM	100	0	20.78	21.12	20.85		
20	64QAM	1	0	20.72	21.27	21.03		
20	64QAM	1	49	20.63	20.91	20.84	22	0
20	64QAM	1	99	20.52	20.73	20.56		
20	64QAM	50	0	19.89	20.29	19.94		
20	64QAM	50	24	19.86	20.21	19.84	21	1
20	64QAM	50	50	19.64	20.08	19.67		
20	64QAM	100	0	19.86	20.13	19.88		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	20.80	21.09	21.02	22	0
15	QPSK	1	37	20.63	20.91	20.72		
15	QPSK	1	74	20.64	20.75	20.68		
15	QPSK	36	0	20.77	20.96	20.98	22	0
15	QPSK	36	20	20.73	20.90	20.74		
15	QPSK	36	39	20.70	20.88	20.66		
15	QPSK	75	0	20.74	20.93	20.74	22	0
15	16QAM	1	0	21.11	21.32	21.22		
15	16QAM	1	37	20.97	21.16	20.94		
15	16QAM	1	74	20.97	21.07	20.91	22	0
15	16QAM	36	0	20.80	20.98	20.87		
15	16QAM	36	20	20.78	20.95	20.74		
15	16QAM	36	39	20.71	20.88	20.67	22	0
15	16QAM	75	0	20.77	20.95	20.75		
15	64QAM	1	0	20.69	21.04	20.97		
15	64QAM	1	37	20.67	20.96	20.68	22	0
15	64QAM	1	74	20.56	20.72	20.59		
15	64QAM	36	0	19.88	19.99	19.80		
15	64QAM	36	20	19.87	19.90	19.82	21	1
15	64QAM	36	39	19.76	19.78	19.74		
15	64QAM	75	0	19.87	19.99	19.76		



Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	20.68	21.04	20.91	22	0
10	QPSK	1	25	20.61	20.94	20.71		
10	QPSK	1	49	20.58	20.89	20.65		
10	QPSK	25	0	20.70	21.04	20.84	22	0
10	QPSK	25	12	20.69	21.02	20.81		
10	QPSK	25	25	20.66	20.96	20.76		
10	QPSK	50	0	20.68	20.99	20.68	22	0
10	16QAM	1	0	21.02	21.10	21.11		
10	16QAM	1	25	20.94	21.27	20.93		
10	16QAM	1	49	20.88	21.27	20.87	22	0
10	16QAM	25	0	20.73	21.06	20.74		
10	16QAM	25	12	20.71	21.06	20.70		
10	16QAM	25	25	20.65	21.00	20.66	22	0
10	16QAM	50	0	20.71	21.04	20.69		
10	64QAM	1	0	20.46	20.94	20.97		
10	64QAM	1	25	20.62	21.02	20.71	22	0
10	64QAM	1	49	20.64	20.91	20.70		
10	64QAM	25	0	19.80	20.06	19.80		
10	64QAM	25	12	19.66	19.97	19.70	21	1
10	64QAM	25	25	19.66	19.90	19.72		
10	64QAM	50	0	19.70	19.94	19.78		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	20.63	20.98	20.67	22	0
5	QPSK	1	12	20.58	20.92	20.61		
5	QPSK	1	24	20.57	20.93	20.59		
5	QPSK	12	0	20.67	20.99	20.69	22	0
5	QPSK	12	7	20.68	21.01	20.67		
5	QPSK	12	13	20.62	20.94	20.65		
5	QPSK	25	0	20.66	21.00	20.69	22	0
5	16QAM	1	0	20.97	21.15	20.99		
5	16QAM	1	12	20.91	21.32	20.92		
5	16QAM	1	24	20.90	21.32	20.89	22	0
5	16QAM	12	0	20.72	21.05	20.70		
5	16QAM	12	7	20.67	21.05	20.73		
5	16QAM	12	13	20.65	20.99	20.66	22	0
5	16QAM	25	0	20.66	21.02	20.70		
5	64QAM	1	0	20.51	20.95	20.69		
5	64QAM	1	12	20.68	20.98	20.52	22	0
5	64QAM	1	24	20.65	20.88	20.61		
5	64QAM	12	0	19.63	20.07	19.78		
5	64QAM	12	7	19.68	20.02	19.74	21	1
5	64QAM	12	13	19.75	20.08	19.68		
5	64QAM	25	0	19.58	19.95	19.68		



Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	20.57	20.94	20.63	22	0
3	QPSK	1	8	20.56	20.94	20.62		
3	QPSK	1	14	20.54	20.90	20.59		
3	QPSK	8	0	20.63	20.98	20.66	22	0
3	QPSK	8	4	20.62	20.99	20.70		
3	QPSK	8	7	20.58	20.97	20.67		
3	QPSK	15	0	20.64	20.97	20.64	22	0
3	16QAM	1	0	20.90	21.13	20.93		
3	16QAM	1	8	20.90	21.31	20.93		
3	16QAM	1	14	20.86	21.28	20.89	22	0
3	16QAM	8	0	20.71	21.05	20.73		
3	16QAM	8	4	20.73	21.08	20.78		
3	16QAM	8	7	20.68	21.05	20.73	22	0
3	16QAM	15	0	20.67	21.01	20.69		
3	64QAM	1	0	20.31	20.86	20.53		
3	64QAM	1	8	20.60	20.91	20.59	22	0
3	64QAM	1	14	20.60	20.95	20.60		
3	64QAM	8	0	19.68	20.06	19.74		
3	64QAM	8	4	19.83	20.13	19.82	21	1
3	64QAM	8	7	19.73	20.07	19.78		
3	64QAM	15	0	19.60	19.96	19.73		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	20.53	20.88	20.56	22	0
1.4	QPSK	1	3	20.60	20.96	20.64		
1.4	QPSK	1	5	20.50	20.87	20.56		
1.4	QPSK	3	0	20.56	20.93	20.59	22	0
1.4	QPSK	3	1	20.61	20.97	20.67		
1.4	QPSK	3	3	20.57	20.92	20.57		
1.4	QPSK	6	0	20.57	20.92	20.59	22	0
1.4	16QAM	1	0	20.86	21.20	20.87	22	0
1.4	16QAM	1	3	20.93	21.31	20.91		
1.4	16QAM	1	5	20.85	21.23	20.85		
1.4	16QAM	3	0	20.59	20.99	20.64	22	0
1.4	16QAM	3	1	20.64	21.03	20.71		
1.4	16QAM	3	3	20.58	20.97	20.64		
1.4	16QAM	6	0	20.63	21.02	20.73	22	0
1.4	64QAM	1	0	20.31	20.81	20.51	22	0
1.4	64QAM	1	3	20.60	20.89	20.69		
1.4	64QAM	1	5	20.45	20.96	20.53		
1.4	64QAM	3	0	20.21	20.62	20.23	22	0
1.4	64QAM	3	1	20.24	20.66	20.16		
1.4	64QAM	3	3	20.03	20.43	20.28		
1.4	64QAM	6	0	19.64	19.92	19.78	21	1



**<LTE Carrier Aggregation>**

**General Note:**

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. This device supported up to 3 DL carrier aggregation for inter band and intra-band non-contiguous and contiguous configuration.

**<Inter-Band Two Carrier combination>**

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-4A	2	Yes	Yes	Yes	Yes	Yes	Yes	40	0
	4			Yes	Yes	Yes	Yes		
CA_2A-4A	2			Yes	Yes			20	1
	4			Yes	Yes				
CA_2A-4A	2			Yes	Yes	Yes	Yes	40	2
	4			Yes	Yes	Yes	Yes		
CA_2A-5A	2			Yes	Yes	Yes	Yes	30	0
	5			Yes	Yes				
CA_2A-5A	2			Yes	Yes			20	1
	5			Yes	Yes				
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	0
	12			Yes	Yes				
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	1
	12		Yes	Yes	Yes				
CA_2A-12A	2			Yes	Yes			20	2
	12			Yes	Yes				
CA_2A-13A	2			Yes	Yes	Yes	Yes	30	0
	13				Yes				
CA_2A-13A	2			Yes	Yes			20	1
	13				Yes				
CA_2A-66A	2	Yes	Yes	Yes	Yes	Yes	Yes	40	1
	66			Yes	Yes	Yes	Yes		
CA_2A-66A	2			Yes	Yes			20	1
	66			Yes	Yes				
CA_2A-66A	2			Yes	Yes	Yes	Yes	40	2
	66			Yes	Yes	Yes	Yes		
CA_4A-5A	4			Yes	Yes			20	0
	5			Yes	Yes				
	4			Yes	Yes	Yes	Yes	30	1
	5			Yes	Yes				
CA_4A-12A	4	Yes	Yes	Yes	Yes			20	0
	12			Yes	Yes				
	4	Yes	Yes	Yes	Yes	Yes	Yes	30	1
	12			Yes	Yes				
	4			Yes	Yes	Yes	Yes	30	2
	12		Yes	Yes	Yes				
	4			Yes	Yes			20	3
	12			Yes	Yes				
4			Yes	Yes	Yes	Yes	30	4	
12			Yes	Yes					



E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_4A-13A	4			Yes	Yes	Yes	Yes	30	0
	13				Yes				
	4			Yes	Yes			20	1
	13				Yes				
CA_5A-66A	5			Yes	Yes			30	0
	66			Yes	Yes	Yes	Yes		
CA_12A-66A	12			Yes	Yes			20	0
	66	Yes	Yes	Yes	Yes				
	12			Yes	Yes			30	1
	66	Yes	Yes	Yes	Yes	Yes	Yes		
	12		Yes	Yes	Yes			30	2
	66			Yes	Yes	Yes	Yes		
	12			Yes	Yes			20	3
	66			Yes	Yes				
	12			Yes	Yes			30	4
	66			Yes	Yes	Yes	Yes		
	12			Yes				20	5
66			Yes	Yes	Yes				
CA_13A-66A	13			Yes	Yes			30	0
	66			Yes	Yes	Yes	Yes		



<Inter-Band Three Carrier combination>

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set	
CA_2A-2A-5A	2			Yes	Yes	Yes	Yes	50	0	
	2			Yes	Yes	Yes	Yes			
	5			Yes	Yes					
CA_2A-2A-12A	2			Yes	Yes	Yes	Yes	50	0	
	2			Yes	Yes	Yes	Yes			
	12			Yes	Yes					
CA_2A-2A-13A	2			Yes	Yes	Yes	Yes	50	0	
	2			Yes	Yes	Yes	Yes			
	13			Yes	Yes					
CA_2A-4A-5A	2			Yes	Yes	Yes	Yes	50	0	
	4			Yes	Yes	Yes	Yes			
	5			Yes	Yes					
CA_2A-4A-12A	2			Yes	Yes	Yes	Yes	50	0	
	4			Yes	Yes	Yes	Yes			
	12			Yes	Yes					
CA_2A-4A-13A	2			Yes	Yes	Yes	Yes	50	0	
	4			Yes	Yes	Yes	Yes			
	13			Yes	Yes					
CA_2A-5A-66A	2			Yes	Yes	Yes	Yes	50	0	
	5			Yes	Yes					
	66			Yes	Yes	Yes	Yes			
CA_2A-12B	2			Yes	Yes	Yes	Yes	35	0	
	12			Yes						
	12			Yes	Yes					
CA_2A-12A-66A	2			Yes	Yes	Yes	Yes	50	0	
	12			Yes	Yes					
	66			Yes	Yes	Yes	Yes			
CA_2A-66B	2			Yes	Yes	Yes	Yes	40	0	
	66			66B BCS 0						
	66									
CA_2A-66C	2			Yes	Yes	Yes	Yes	60	0	
	66			66C BCS 0						
	66									
CA_2A-66A-66A	2			Yes	Yes	Yes	Yes	60	0	
	66			Yes	Yes	Yes	Yes			
	66			Yes	Yes	Yes	Yes			
CA_4A-4A-5A	4			Yes	Yes	Yes	Yes	50	0	
	4			Yes	Yes	Yes	Yes			
	5			Yes	Yes					
CA_4A-4A-13A	4			Yes	Yes	Yes	Yes	50	0	
	4			Yes	Yes	Yes	Yes			
	13			Yes	Yes					



E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_4A-12B	4			Yes	Yes	Yes	Yes	35	0
	12			Yes					
	12			Yes	Yes				
CA_5A-66B	5			Yes	Yes			30	0
	66			66B BCS 0					
	66			66B BCS 0					
CA_5A-66C	5			Yes	Yes			50	0
	66			66C BCS 0					
	66			66C BCS 0					
CA_5A-66A-66A	5			Yes	Yes			50	0
	66			Yes	Yes	Yes	Yes		
	66			Yes	Yes	Yes	Yes		
CA_13A-66B	13			Yes	Yes			30	0
	66			66B BCS 0					
	66			66B BCS 0					
CA_13A-66C	13			Yes	Yes			50	0
	66			66C BCS 0					
	66			66C BCS 0					
CA_13A-66A-66A	13			Yes	Yes			50	0
	66			Yes	Yes	Yes	Yes		
	66			Yes	Yes	Yes	Yes		

**<Intra-Band Carrier combination>**

E-UTRA CA Configuration	E-UTRA Bands	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-2A	2	5, 10, 15, 20	5, 10, 15, 20	40	0
CA_4A-4A	4	5, 10, 15, 20	5, 10, 15, 20	40	0
CA_5B	5	5, 10	10	20	0
		10	5		
CA_12B	12	5	5, 10	15	0
CA_66B	66	5	5, 10, 15	20	0
		10	5, 10		
		15	5		
CA_66C	66	5	20	40	0
		10	15, 20		
		15	10, 15, 20		
		20	5, 10, 15, 20		
CA_66A-66A	66	5, 10, 15, 20	5, 10, 15, 20	40	0
CA_66A-66C	66	5, 10, 15, 20	66C BCS 0	60	0
		66C BCS 0	5, 10, 15, 20		

**LTE Carrier Aggregation Conducted Power**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$



<Maximum output power for Two Carrier power verification>

Configure		PCC						SCC				Power			
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Inter-Band		Band 2	20	1900	19100	QPSK	1	0	Band 4	20	2132.5	2175	22.75	22.78	
		Band 4	20	1732.5	20175	QPSK	1	0	Band 2	20	1960	900	22.70	22.76	
		Band 2	20	1900	19100	QPSK	1	0	Band 5	10	881.5	2525	22.72	22.78	
		Band 5	10	836.5	20525	QPSK	1	0	Band 2	20	1960	900	22.50	22.57	
		Band 2	20	1900	19100	QPSK	1	0	Band 12	10	737.5	5095	22.75	22.78	
		Band 12	10	707.5	23095	QPSK	1	0	Band 2	20	1960	900	22.30	22.36	
		Band 2	20	1900	19100	QPSK	1	0	Band 13	10	751	5230	22.76	22.78	
		Band 13	10	782	23230	QPSK	1	0	Band 2	20	1960	900	22.35	22.37	
		Band 2	20	1900	19100	QPSK	1	0	Band 66	20	2145	66786	22.75	22.78	
		Band 66	20	1720	132072	QPSK	1	0	Band 2	20	1960	900	22.90	22.96	
		Band 4	20	1732.5	20175	QPSK	1	0	Band 5	10	881.5	2525	22.70	22.76	
		Band 5	10	836.5	20525	QPSK	1	0	Band 4	10	2132.5	2175	22.51	22.57	
		Band 4	20	1732.5	20175	QPSK	1	0	Band 12	10	737.5	5095	22.60	22.69	
		Band 12	10	707.5	23095	QPSK	1	0	Band 4	10	2132.5	2175	22.32	22.36	
		Band 4	20	1732.5	20175	QPSK	1	0	Band 13	10	751	5230	22.71	22.76	
		Band 13	10	782	23230	QPSK	1	0	Band 4	20	2132.5	2175	22.30	22.37	
		Band 5	10	836.5	20525	QPSK	1	0	Band 66	20	2145	66786	22.50	22.57	
		Band 66	20	1720	132072	QPSK	1	0	Band 5	10	881.5	2525	22.94	22.96	
	Intra-Band	Non-Contiguous	Band 2	20	1900	19100	QPSK	1	0	Band 2	5	1932.5	625	22.77	22.78
			Band 4	20	1732.5	20175	QPSK	1	0	Band 4	5	2152.5	2375	22.76	22.76
Band 66			20	1720	132072	QPSK	1	0	Band 66	5	2197.5	67311	22.92	22.96	
Contiguous		Band 5	10	836.5	20525	QPSK	1	0	Band 5	10	891.4	2624	22.55	22.57	
		Band 12	10	707.5	23095	QPSK	1	0	Band 12	5	744.9	5169	22.32	22.36	
		Band 66	15	1717.5	132047	QPSK	1	0	Band 66	5	2126.8	66604	22.84	22.87	
		Band 66	20	1720	132072	QPSK	1	0	Band 66	20	2139.8	66734	22.96	22.96	



<Maximum output power for Three Carrier power verification>

Configure	PCC							SCC1				SCC2				Power		
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Inter-Band	Band 2	20	1900	19100	QPSK	1	0	Band 2	5	1932.5	625	Band 5	10	881.5	2525	22.75	22.78	
	Band 5	10	836.5	20525	QPSK	1	0	Band 2	20	1960	900	Band 2	5	1932.5	625	22.51	22.57	
	Band 2	20	1900	19100	QPSK	1	0	Band 2	5	1932.5	625	Band 12	10	737.5	5095	22.75	22.78	
	Band 12	10	707.5	23095	QPSK	1	0	Band 2	20	1960	900	Band 2	5	1932.5	625	22.33	22.36	
	Band 2	20	1900	19100	QPSK	1	0	Band 2	5	1932.5	625	Band 13	10	751	5230	22.73	22.78	
	Band 13	10	782	23230	QPSK	1	0	Band 2	20	1960	900	Band 2	5	1932.5	625	22.31	22.37	
	Band 2	20	1900	19100	QPSK	1	0	Band 4	20	2132.5	2175	Band 5	10	881.5	2525	22.71	22.78	
	Band 4	20	1732.5	20175	QPSK	1	0	Band 2	20	1960	900	Band 5	10	881.5	2525	22.71	22.76	
	Band 5	10	836.5	20525	QPSK	1	0	Band 2	20	1960	900	Band 4	20	2132.5	2175	22.52	22.57	
	Band 2	20	1900	19100	QPSK	1	0	Band 4	20	2132.5	2175	Band 12	10	737.5	5095	22.77	22.78	
	Band 4	20	1732.5	20175	QPSK	1	0	Band 2	20	1960	900	Band 12	10	737.5	5095	22.75	22.76	
	Band 12	10	707.5	23095	QPSK	1	0	Band 2	20	1960	900	Band 4	20	2132.5	2175	22.34	22.36	
	Band 2	20	1900	19100	QPSK	1	0	Band 4	20	2132.5	2175	Band 13	10	751	5230	22.74	22.78	
	Band 4	20	1732.5	20175	QPSK	1	0	Band 2	20	1960	900	Band 13	10	751	5230	22.75	22.76	
	Band 13	10	782	23230	QPSK	1	0	Band 2	20	1960	900	Band 4	20	2132.5	2175	22.35	22.37	
	Band 2	20	1900	19100	QPSK	1	0	Band 5	10	881.5	2525	Band 66	20	2145	66786	22.75	22.78	
	Band 5	10	836.5	20525	QPSK	1	0	Band 2	20	1960	900	Band 66	20	2145	66786	22.52	22.57	
	Band 66	20	1720	132072	QPSK	1	0	Band 2	20	1960	900	Band 5	10	881.5	2525	22.95	22.96	
	Band 2	20	1900	19100	QPSK	1	0	Band 12	10	737.5	5095	Band 12	5	744.9	5169	22.75	22.78	
	Band 12	10	707.5	23095	QPSK	1	0	Band 12	5	744.9	5169	Band 2	20	1960	900	22.35	22.36	
	Band 2	20	1900	19100	QPSK	1	0	Band 12	10	737.5	5095	Band 66	20	2145	66786	22.74	22.78	
	Band 12	10	707.5	23095	QPSK	1	0	Band 2	20	1960	900	Band 66	20	2145	66786	22.35	22.36	
	Band 66	20	1720	132072	QPSK	1	0	Band 2	20	1960	900	Band 12	10	737.5	5095	22.92	22.96	
	Band 2	20	1900	19100	QPSK	1	0	Band 66	15	2145	66786	Band 66	5	2154.3	66879	22.71	22.78	
	Band 66	15	1717.5	132047	QPSK	1	0	Band 66	5	2126.8	66604	Band 2	20	1960	900	22.80	22.87	
	Band 2	20	1900	19100	QPSK	1	0	Band 66	20	2145	66786	Band 66	20	2164.8	66984	22.70	22.78	
	Band 66	20	1720	132072	QPSK	1	0	Band 66	20	2139.8	66734	Band 2	20	1960	900	22.92	22.96	
	Band 2	20	1900	19100	QPSK	1	0	Band 66	20	2145	66786	Band 66	5	2197.5	67311	22.71	22.78	
	Band 66	20	1720	132072	QPSK	1	0	Band 66	5	2197.5	67311	Band 2	20	1960	900	22.91	22.96	
	Band 4	20	1732.5	20175	QPSK	1	0	Band 4	5	2152.5	2375	Band 5	10	881.5	2525	22.75	22.76	
	Band 5	10	836.5	20525	QPSK	1	0	Band 4	20	2132.5	2175	Band 4	5	2152.5	2375	22.52	22.57	
	Band 4	20	1732.5	20175	QPSK	1	0	Band 4	5	2152.5	2375	Band 13	10	751	5230	22.74	22.76	
	Band 13	10	782	23230	QPSK	1	0	Band 4	20	2132.5	2175	Band 4	5	2152.5	2375	22.34	22.37	
	Band 4	20	1732.5	20175	QPSK	1	0	Band 12	10	737.5	5095	Band 12	5	744.9	5169	22.75	22.76	
	Band 12	10	707.5	23095	QPSK	1	0	Band 12	5	744.9	5169	Band 4	20	2132.5	2175	22.32	22.36	
	Band 5	10	836.5	20525	QPSK	1	0	Band 66	15	2145	66786	Band 66	5	2154.3	66879	22.52	22.57	
	Band 66	15	1717.5	132047	QPSK	1	0	Band 66	5	2126.8	66604	Band 2	20	1960	900	22.80	22.87	
	Band 5	10	836.5	20525	QPSK	1	0	Band 66	20	2145	66786	Band 66	20	2164.8	66984	22.55	22.57	
	Band 66	20	1720	132072	QPSK	1	0	Band 66	20	2139.8	66734	Band 5	10	881.5	2525	22.96	22.96	
	Band 5	10	836.5	20525	QPSK	1	0	Band 66	20	2145	66786	Band 66	5	2197.5	67311	22.55	22.57	
	Band 66	20	1720	132072	QPSK	1	0	Band 66	5	2197.5	67311	Band 5	10	881.5	2525	22.94	22.96	
	Band 13	10	782	23230	QPSK	1	0	Band 66	15	2145	66786	Band 66	5	2154.3	66879	22.33	22.37	
	Band 66	15	1717.5	132047	QPSK	1	0	Band 66	5	2126.8	66604	Band 13	10	751	5230	22.83	22.87	
	Band 13	10	782	23230	QPSK	1	0	Band 66	20	2145	66786	Band 66	20	2164.8	66984	22.33	22.37	
	Band 66	20	1720	132072	QPSK	1	0	Band 66	20	2139.8	66734	Band 13	10	751	5230	22.91	22.96	
Band 13	10	782	23230	QPSK	1	0	Band 66	20	2145	66786	Band 66	5	2197.5	67311	22.32	22.37		
Band 66	20	1720	132072	QPSK	1	0	Band 66	5	2197.5	67311	Band 13	10	751	5230	22.95	22.96		
Intra-Band	Non-Contiguous	Band 66	20	1720	132072	QPSK	1	0	Band 66	5	2177.5	67111	Band 66	20	2189.2	67228	22.94	22.96
		Band 66	20	1720	132072	QPSK	1	0	Band 66	20	2139.8	66734	Band 66	5	2197.5	67311	22.95	22.96

**<WLAN Conducted Power>****General Note:**

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.



**<Default Power Mode>**

**<2.4GHz WLAN ANT 1>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.90	16.50	100.00
		6	2437	15.90	16.50	
		11	2462	15.85	16.50	
	802.11g 6Mbps	1	2412	15.30	16.50	94.14
		6	2437	15.86	16.50	
		11	2462	15.26	16.50	
	802.11n-HT20 MCS0	1	2412	14.40	14.50	93.75
		6	2437	15.81	16.50	
		11	2462	13.73	14.00	
	802.11ac-VHT20 MCS0	1	2412	14.34	14.50	94.53
		6	2437	15.83	16.50	
		11	2462	13.14	13.50	

**<2.4GHz WLAN ANT 2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.90	16.50	100.00
		6	2437	15.66	16.50	
		11	2462	15.60	16.50	
	802.11g 6Mbps	1	2412	15.15	16.50	94.85
		6	2437	15.36	16.50	
		11	2462	14.83	15.50	
	802.11n-HT20 MCS0	1	2412	14.18	14.50	93.75
		6	2437	15.43	16.50	
		11	2462	13.41	14.00	
	802.11ac-VHT20 MCS0	1	2412	14.17	14.50	93.75
		6	2437	15.43	16.50	
		11	2462	12.95	13.50	

**<2.4GHz WLAN ANT 1+2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.90	19.50	100.00
		6	2437	18.80	19.50	
		11	2462	18.75	19.50	
	802.11g 6Mbps	1	2412	18.26	19.50	94.85
		6	2437	18.58	19.50	
		11	2462	18.08	19.50	
	802.11n-HT20 MCS0	1	2412	17.33	17.50	94.49
		6	2437	18.62	19.50	
		11	2462	16.61	17.00	
	802.11ac-VHT20 MCS0	1	2412	17.30	17.50	94.53
		6	2437	18.58	19.50	
		11	2462	16.08	16.50	



<5GHz WLAN ANT1>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	18.16	19.00	94.16
		40	5200	18.13	19.00	
		44	5220	18.12	19.00	
		48	5240	18.01	19.00	
	802.11n-HT20 MCS0	36	5180	18.15	19.00	93.75
		40	5200	18.10	19.00	
		44	5220	18.09	19.00	
		48	5240	18.05	19.00	
	802.11n-HT40 MCS0	38	5190	17.38	18.00	89.62
46		5230	17.40	18.00		
802.11ac-VHT20 MCS0	36	5180	18.19	19.00	94.53	
	40	5200	18.15	19.00		
	44	5220	18.12	19.00		
	48	5240	18.07	19.00		
802.11ac-VHT40 MCS0	38	5190	17.39	18.00	90.48	
	46	5230	17.41	18.00		
802.11ac-VHT80 MCS0	42	5210	15.13	15.50	86.51	

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	18.11	19.00	94.16
		56	5280	18.13	19.00	
		60	5300	18.16	19.00	
		64	5320	18.26	19.00	
	802.11n-HT20 MCS0	52	5260	18.08	19.00	93.75
		56	5280	18.09	19.00	
		60	5300	18.10	19.00	
		64	5320	18.24	19.00	
	802.11n-HT40 MCS0	54	5270	17.28	18.00	89.62
		62	5310	15.28	15.50	
	802.11ac-VHT20 MCS0	52	5260	18.09	19.00	94.53
		56	5280	18.10	19.00	
		60	5300	18.11	19.00	
64		5320	18.25	19.00		
802.11ac-VHT40 MCS0	54	5270	17.29	18.00	90.48	
	62	5310	15.23	15.50		
802.11ac-VHT80 MCS0	58	5290	13.80	14.00	86.51	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	18.29	19.00	94.16
		116	5580	18.21	19.00	
		124	5620	18.19	19.00	
		132	5660	17.90	19.00	
		140	5700	17.84	19.00	
		144	5720	18.25	19.00	
802.11n-HT20 MCS0	100	5500	18.32	19.00	93.75	
	116	5580	18.25	19.00		
	124	5620	18.20	19.00		
	132	5660	17.96	19.00		
	140	5700	16.98	17.00		
	144	5720	18.16	19.00		
802.11n-HT40 MCS0	102	5510	17.60	18.00	89.62	
	110	5550	17.45	18.00		
	126	5630	17.39	18.00		
	134	5670	17.26	18.00		
	142	5710	17.15	18.00		
802.11ac-VHT20 MCS0	100	5500	18.34	19.00	94.53	
	116	5580	18.26	19.00		
	124	5620	18.23	19.00		
	132	5660	17.91	19.00		
	140	5700	16.41	17.00		
	144	5720	17.88	19.00		
802.11ac-VHT40 MCS0	102	5510	17.61	18.00	90.48	
	110	5550	17.48	18.00		
	126	5630	17.39	18.00		
	134	5670	17.28	18.00		
	142	5710	17.17	18.00		
802.11ac-VHT80 MCS0	106	5530	15.16	15.50	86.51	
	122	5610	18.13	19.00		
	138	5690	18.25	19.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	18.11	19.00	94.16
		157	5785	18.07	19.00	
		165	5825	18.03	19.00	
	802.11n-HT20 MCS0	149	5745	18.13	19.00	93.75
		157	5785	18.03	19.00	
		165	5825	18.00	19.00	
	802.11n-HT40 MCS0	151	5755	17.42	18.00	89.62
		159	5795	17.48	18.00	
	802.11ac-VHT20 MCS0	149	5745	18.14	19.00	94.53
		157	5785	18.04	19.00	
		165	5825	18.02	19.00	
	802.11ac-VHT40 MCS0	151	5755	17.43	18.00	90.48
		159	5795	17.49	18.00	
802.11ac-VHT80 MCS0	155	5775	18.18	19.00	86.51	



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	18.10	19.00	94.85
		40	5200	18.08	19.00	
		44	5220	18.07	19.00	
		48	5240	17.96	19.00	
	802.11n-HT20 MCS0	36	5180	18.02	19.00	94.49
		40	5200	18.00	19.00	
		44	5220	17.97	19.00	
		48	5240	17.90	19.00	
	802.11n-HT40 MCS0	38	5190	17.09	18.00	90.48
		46	5230	17.13	18.00	
	802.11ac-VHT20 MCS0	36	5180	18.04	19.00	93.75
		40	5200	18.02	19.00	
		44	5220	18.03	19.00	
		48	5240	17.98	19.00	
802.11ac-VHT40 MCS0	38	5190	17.14	18.00	89.62	
	46	5230	17.31	18.00		
802.11ac-VHT80 MCS0	42	5210	15.48	15.50	85.71	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.92	19.00	94.85
		56	5280	18.00	19.00	
		60	5300	18.06	19.00	
		64	5320	18.13	19.00	
	802.11n-HT20 MCS0	52	5260	17.95	19.00	94.49
		56	5280	17.98	19.00	
		60	5300	18.02	19.00	
		64	5320	18.05	19.00	
	802.11n-HT40 MCS0	54	5270	17.05	18.00	90.48
		62	5310	15.43	15.50	
	802.11ac-VHT20 MCS0	52	5260	18.08	19.00	93.75
		56	5280	18.09	19.00	
		60	5300	18.10	19.00	
		64	5320	18.14	19.00	
802.11ac-VHT40 MCS0	54	5270	17.13	18.00	89.62	
	62	5310	15.48	15.50		
802.11ac-VHT80 MCS0	58	5290	14.00	14.00	85.71	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	18.21	19.00	94.85
		116	5580	18.09	19.00	
		124	5620	18.07	19.00	
		132	5660	17.80	19.00	
		140	5700	17.74	19.00	
		144	5720	17.74	19.00	
802.11n-HT20 MCS0	100	5500	18.17	19.00	94.49	
	116	5580	18.11	19.00		
	124	5620	18.08	19.00		
	132	5660	17.80	19.00		
	140	5700	16.98	17.00		
	144	5720	17.77	19.00		
802.11n-HT40 MCS0	102	5510	17.47	18.00	90.48	
	110	5550	17.23	18.00		
	126	5630	17.18	18.00		
	134	5670	17.15	18.00		
	142	5710	16.82	18.00		
	100	5500	18.29	19.00		93.75
802.11ac-VHT20 MCS0	116	5580	18.20	19.00		
	124	5620	18.17	19.00		
	132	5660	17.90	19.00		
	140	5700	16.83	17.00		
	144	5720	17.73	19.00		
	802.11ac-VHT40 MCS0	102	5510	17.48	18.00	89.62
110		5550	17.28	18.00		
126		5630	17.25	18.00		
134		5670	17.23	18.00		
142		5710	16.75	18.00		
802.11ac-VHT80 MCS0		106	5530	15.42	15.50	
	122	5610	17.98	19.00		
	138	5690	18.00	19.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	18.13	19.00	94.86
		157	5785	18.11	19.00	
		165	5825	18.08	19.00	
	802.11n-HT20 MCS0	149	5745	18.21	19.00	94.49
		157	5785	18.09	19.00	
		165	5825	18.08	19.00	
802.11n-HT40 MCS0	151	5755	17.43	18.00	90.48	
	159	5795	17.55	18.00		
802.11ac-VHT20 MCS0	149	5745	18.23	19.00	93.75	
	157	5785	18.19	19.00		
	165	5825	18.18	19.00		
802.11ac-VHT40 MCS0	151	5755	17.49	18.00	89.62	
	159	5795	17.64	18.00		
802.11ac-VHT80 MCS0	155	5775	18.30	19.00	85.71	



<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	20.99	22.00	94.85
		40	5200	20.96	22.00	
		44	5220	20.98	22.00	
		48	5240	20.97	22.00	
	802.11n-HT20 MCS0	36	5180	20.98	22.00	94.49
		40	5200	20.96	22.00	
		44	5220	20.97	22.00	
		48	5240	20.93	22.00	
	802.11n-HT40 MCS0	38	5190	20.24	21.00	89.52
		46	5230	20.42	21.00	
	802.11ac-VHT20 MCS0	36	5180	20.99	22.00	94.53
		40	5200	20.97	22.00	
		44	5220	20.98	22.00	
		48	5240	20.96	22.00	
	802.11ac-VHT40 MCS0	38	5190	20.30	21.00	89.72
		46	5230	20.49	21.00	
802.11ac-VHT80 MCS0	42	5210	18.40	18.50	85.71	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	21.02	22.00	94.85
		56	5280	21.04	22.00	
		60	5300	21.06	22.00	
		64	5320	21.17	22.00	
	802.11n-HT20 MCS0	52	5260	21.06	22.00	94.49
		56	5280	21.08	22.00	
		60	5300	21.10	22.00	
		64	5320	21.19	22.00	
	802.11n-HT40 MCS0	54	5270	20.27	21.00	89.52
		62	5310	18.50	18.50	
	802.11ac-VHT20 MCS0	52	5260	21.09	22.00	94.53
		56	5280	21.10	22.00	
		60	5300	21.11	22.00	
		64	5320	21.22	22.00	
	802.11ac-VHT40 MCS0	54	5270	20.31	21.00	89.72
		62	5310	18.44	18.50	
802.11ac-VHT80 MCS0	58	5290	16.97	17.00	85.71	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	21.34	22.00	94.85
		116	5580	21.18	22.00	
		124	5620	21.16	22.00	
		132	5660	20.85	22.00	
		140	5700	20.75	22.00	
		144	5720	20.89	22.00	
802.11n-HT20 MCS0	100	5500	21.29	22.00	94.49	
	116	5580	21.22	22.00		
	124	5620	21.19	22.00		
	132	5660	20.83	22.00		
	140	5700	19.99	20.00		
	144	5720	20.99	22.00		
802.11n-HT40 MCS0	102	5510	20.58	21.00	89.52	
	110	5550	20.45	21.00		
	126	5630	20.39	21.00		
	134	5670	20.32	21.00		
	142	5710	19.96	21.00		
	100	5500	21.41	22.00		94.53
116	5580	21.26	22.00			
124	5620	21.20	22.00			
132	5660	20.91	22.00			
140	5700	19.65	20.00			
144	5720	20.89	22.00			
802.11ac-VHT40 MCS0	102	5510	20.60	21.00	89.72	
	110	5550	20.48	21.00		
	126	5630	20.40	21.00		
	134	5670	20.35	21.00		
	142	5710	19.93	21.00		
	106	5530	18.38	18.50		85.71
802.11ac-VHT80 MCS0	122	5610	21.14	22.00		
	138	5690	21.11	22.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	21.07	22.00	94.85
		157	5785	21.05	22.00	
		165	5825	21.02	22.00	
	802.11n-HT20 MCS0	149	5745	21.06	22.00	94.49
		157	5785	21.03	22.00	
		165	5825	21.01	22.00	
	802.11n-HT40 MCS0	151	5755	20.35	21.00	89.52
		159	5795	20.50	21.00	
	802.11ac-VHT20 MCS0	149	5745	21.20	22.00	94.53
		157	5785	21.15	22.00	
		165	5825	21.13	22.00	
	802.11ac-VHT40 MCS0	151	5755	20.38	21.00	89.72
		159	5795	20.52	21.00	
802.11ac-VHT80 MCS0	155	5775	21.21	22.00	85.71	



**<At-Head Power Mode>**

**<2.4GHz WLAN ANT 1>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.90	16.50	100.00
		6	2437	15.90	16.50	
		11	2462	15.85	16.50	
	802.11g 6Mbps	1	2412	15.30	16.50	94.14
		6	2437	15.86	16.50	
		11	2462	15.26	16.50	
	802.11n-HT20 MCS0	1	2412	14.40	14.50	93.75
		6	2437	15.81	16.50	
		11	2462	13.73	14.00	
	802.11ac-VHT20 MCS0	1	2412	14.34	14.50	94.53
		6	2437	15.83	16.50	
		11	2462	13.14	13.50	

**<2.4GHz WLAN ANT 2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.90	16.50	100.00
		6	2437	15.66	16.50	
		11	2462	15.60	16.50	
	802.11g 6Mbps	1	2412	15.15	16.50	94.85
		6	2437	15.36	16.50	
		11	2462	14.83	15.50	
	802.11n-HT20 MCS0	1	2412	14.18	14.50	93.75
		6	2437	15.43	16.50	
		11	2462	13.41	14.00	
	802.11ac-VHT20 MCS0	1	2412	14.17	14.50	93.75
		6	2437	15.43	16.50	
		11	2462	12.95	13.50	

**<2.4GHz WLAN ANT 1+2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.90	19.50	100.00
		6	2437	18.80	19.50	
		11	2462	18.75	19.50	
	802.11g 6Mbps	1	2412	18.26	19.50	94.85
		6	2437	18.58	19.50	
		11	2462	18.08	19.50	
	802.11n-HT20 MCS0	1	2412	17.33	17.50	94.49
		6	2437	18.62	19.50	
		11	2462	16.61	17.00	
	802.11ac-VHT20 MCS0	1	2412	17.30	17.50	94.53
		6	2437	18.58	19.50	
		11	2462	16.08	16.50	



<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.73	15.00	94.16
		40	5200	14.70	15.00	
		44	5220	14.68	15.00	
		48	5240	14.63	15.00	
	802.11n-HT20 MCS0	36	5180	14.77	15.00	93.75
		40	5200	14.78	15.00	
		44	5220	14.74	15.00	
		48	5240	14.68	15.00	
	802.11n-HT40 MCS0	38	5190	14.83	15.00	89.62
		46	5230	14.88	15.00	
	802.11ac-VHT20 MCS0	36	5180	14.77	15.00	94.53
		40	5200	14.80	15.00	
		44	5220	14.76	15.00	
		48	5240	14.67	15.00	
	802.11ac-VHT40 MCS0	38	5190	14.83	15.00	90.48
		46	5230	14.87	15.00	
802.11ac-VHT80 MCS0	42	5210	14.53	15.00	86.51	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.61	15.00	94.16
		56	5280	14.53	15.00	
		60	5300	14.58	15.00	
		64	5320	14.69	15.00	
	802.11n-HT20 MCS0	52	5260	14.63	15.00	93.75
		56	5280	14.59	15.00	
		60	5300	14.62	15.00	
		64	5320	14.65	15.00	
	802.11n-HT40 MCS0	54	5270	14.79	15.00	89.62
		62	5310	14.75	15.00	
	802.11ac-VHT20 MCS0	52	5260	14.68	15.00	94.53
		56	5280	14.60	15.00	
		60	5300	14.66	15.00	
		64	5320	14.70	15.00	
	802.11ac-VHT40 MCS0	54	5270	14.76	15.00	90.48
		62	5310	14.63	15.00	
802.11ac-VHT80 MCS0	58	5290	13.80	14.00	86.51	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		100	5500	14.75	15.00
116			5580	14.59	15.00	
124			5620	14.43	15.00	
132			5660	14.54	15.00	
140			5700	14.41	15.00	
144			5720	14.54	15.00	
802.11n-HT20 MCS0		100	5500	14.85	15.00	93.75
		116	5580	14.48	15.00	
		124	5620	14.45	15.00	
		132	5660	14.43	15.00	
		140	5700	14.57	15.00	
		144	5720	13.90	15.00	
802.11n-HT40 MCS0		102	5510	14.89	15.00	89.62
		110	5550	14.78	15.00	
		126	5630	14.76	15.00	
		134	5670	14.49	15.00	
		142	5710	14.41	15.00	
		144	5720	14.41	15.00	
802.11ac-VHT20 MCS0		100	5500	14.79	15.00	94.53
		116	5580	14.62	15.00	
		124	5620	14.57	15.00	
		132	5660	14.49	15.00	
		140	5700	14.60	15.00	
		144	5720	14.24	15.00	
802.11ac-VHT40 MCS0		102	5510	14.81	15.00	90.48
		110	5550	14.79	15.00	
		126	5630	14.65	15.00	
		134	5670	14.60	15.00	
		142	5710	14.24	15.00	
		144	5720	14.24	15.00	
802.11ac-VHT80 MCS0		106	5530	14.91	15.00	86.51
		122	5610	14.90	15.00	
		138	5690	14.88	15.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0		149	5745	14.76	15.00
157			5785	14.64	15.00	
165			5825	14.67	15.00	
802.11n-HT20 MCS0		149	5745	14.69	15.00	93.75
		157	5785	14.64	15.00	
		165	5825	14.68	15.00	
802.11n-HT40 MCS0		151	5755	14.80	15.00	89.62
		159	5795	14.87	15.00	
802.11ac-VHT20 MCS0		149	5745	14.71	15.00	94.53
		157	5785	14.65	15.00	
		165	5825	14.69	15.00	
802.11ac-VHT40 MCS0		151	5755	14.82	15.00	90.48
		159	5795	14.94	15.00	
802.11ac-VHT80 MCS0		155	5775	14.63	15.00	86.51



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.88	15.00	94.85
		40	5200	14.89	15.00	
		44	5220	14.94	15.00	
		48	5240	14.91	15.00	
	802.11n-HT20 MCS0	36	5180	14.97	15.00	94.49
		40	5200	14.94	15.00	
		44	5220	14.89	15.00	
		48	5240	14.94	15.00	
	802.11n-HT40 MCS0	38	5190	14.86	15.00	90.48
		46	5230	14.93	15.00	
	802.11ac-VHT20 MCS0	36	5180	14.93	15.00	93.75
		40	5200	14.94	15.00	
		44	5220	14.92	15.00	
		48	5240	14.93	15.00	
	802.11ac-VHT40 MCS0	38	5190	14.92	15.00	89.62
		46	5230	14.92	15.00	
802.11ac-VHT80 MCS0	42	5210	14.89	15.00	85.71	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.92	15.00	94.85
		56	5280	14.80	15.00	
		60	5300	14.73	15.00	
		64	5320	14.98	15.00	
	802.11n-HT20 MCS0	52	5260	14.81	15.00	94.49
		56	5280	14.85	15.00	
		60	5300	14.75	15.00	
		64	5320	14.94	15.00	
	802.11n-HT40 MCS0	54	5270	14.86	15.00	90.48
		62	5310	14.81	15.00	
	802.11ac-VHT20 MCS0	52	5260	14.84	15.00	93.75
		56	5280	14.91	15.00	
		60	5300	14.89	15.00	
		64	5320	14.91	15.00	
	802.11ac-VHT40 MCS0	54	5270	14.85	15.00	89.62
		62	5310	14.92	15.00	
802.11ac-VHT80 MCS0	58	5290	14.00	14.00	85.71	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		100	5500	14.87	15.00
116			5580	14.89	15.00	
124			5620	14.74	15.00	
132			5660	14.74	15.00	
140			5700	14.80	15.00	
144			5720	14.82	15.00	
802.11n-HT20 MCS0		100	5500	14.76	15.00	94.49
		116	5580	14.81	15.00	
		124	5620	14.81	15.00	
		132	5660	14.85	15.00	
		140	5700	14.79	15.00	
		144	5720	14.97	15.00	
802.11n-HT40 MCS0		102	5510	14.87	15.00	90.48
		110	5550	14.93	15.00	
		126	5630	14.83	15.00	
		134	5670	14.79	15.00	
		142	5710	14.91	15.00	
802.11ac-VHT20 MCS0		100	5500	14.93	15.00	93.75
		116	5580	14.93	15.00	
		124	5620	14.93	15.00	
		132	5660	14.87	15.00	
		140	5700	14.87	15.00	
		144	5720	14.95	15.00	
802.11ac-VHT40 MCS0		102	5510	14.90	15.00	89.62
		110	5550	14.89	15.00	
		126	5630	14.87	15.00	
		134	5670	14.88	15.00	
		142	5710	14.94	15.00	
802.11ac-VHT80 MCS0		106	5530	14.88	15.00	85.71
		122	5610	14.87	15.00	
		138	5690	14.85	15.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0		149	5745	14.84	15.00
157			5785	14.88	15.00	
165			5825	14.95	15.00	
802.11n-HT20 MCS0		149	5745	14.81	15.00	94.49
		157	5785	14.83	15.00	
		165	5825	14.81	15.00	
802.11n-HT40 MCS0		151	5755	14.82	15.00	90.48
		159	5795	14.81	15.00	
802.11ac-VHT20 MCS0		149	5745	14.85	15.00	93.75
		157	5785	14.77	15.00	
		165	5825	14.89	15.00	
802.11ac-VHT40 MCS0		151	5755	14.81	15.00	89.62
		159	5795	14.96	15.00	
802.11ac-VHT80 MCS0		155	5775	14.79	15.00	85.71



**<5GHz WLAN ANT1+2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.91	18.00	94.85
		40	5200	17.87	18.00	
		44	5220	17.88	18.00	
		48	5240	17.87	18.00	
	802.11n-HT20 MCS0	36	5180	17.88	18.00	94.49
		40	5200	17.82	18.00	
		44	5220	17.83	18.00	
		48	5240	17.81	18.00	
	802.11n-HT40 MCS0	38	5190	17.84	18.00	89.52
		46	5230	17.95	18.00	
	802.11ac-VHT20 MCS0	36	5180	17.89	18.00	94.53
		40	5200	17.96	18.00	
		44	5220	17.94	18.00	
		48	5240	17.87	18.00	
	802.11ac-VHT40 MCS0	38	5190	17.88	18.00	89.72
		46	5230	17.96	18.00	
802.11ac-VHT80 MCS0	42	5210	17.97	18.00	85.71	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.78	18.00	94.85
		56	5280	17.77	18.00	
		60	5300	17.74	18.00	
		64	5320	17.86	18.00	
	802.11n-HT20 MCS0	52	5260	17.82	18.00	94.49
		56	5280	17.77	18.00	
		60	5300	17.71	18.00	
		64	5320	17.77	18.00	
	802.11n-HT40 MCS0	54	5270	17.88	18.00	89.52
		62	5310	17.90	18.00	
	802.11ac-VHT20 MCS0	52	5260	17.85	18.00	94.53
		56	5280	17.77	18.00	
		60	5300	17.79	18.00	
		64	5320	17.85	18.00	
	802.11ac-VHT40 MCS0	54	5270	17.87	18.00	89.72
		62	5310	17.94	18.00	
802.11ac-VHT80 MCS0	58	5290	16.97	17.00	85.71	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		100	5500	17.94	18.00
116			5580	17.81	18.00	
124			5620	17.85	18.00	
132			5660	17.74	18.00	
140			5700	17.68	18.00	
144			5720	17.95	18.00	
802.11n-HT20 MCS0		100	5500	17.90	18.00	94.49
		116	5580	17.75	18.00	
		124	5620	17.74	18.00	
		132	5660	17.68	18.00	
		140	5700	17.78	18.00	
		144	5720	17.61	18.00	
802.11n-HT40 MCS0		102	5510	17.79	18.00	89.52
		110	5550	17.82	18.00	
		126	5630	17.84	18.00	
		134	5670	17.83	18.00	
		142	5710	17.82	18.00	
		100	5500	17.89	18.00	
116	5580	17.80	18.00			
124	5620	17.67	18.00			
132	5660	17.71	18.00			
140	5700	17.82	18.00			
144	5720	17.54	18.00			
802.11ac-VHT20 MCS0		102	5510	17.92	18.00	89.72
		110	5550	17.87	18.00	
		126	5630	17.84	18.00	
		134	5670	17.78	18.00	
		142	5710	17.68	18.00	
		106	5530	17.74	18.00	
122	5610	17.72	18.00			
138	5690	17.92	18.00			

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0		149	5745	17.98	18.00
157			5785	17.83	18.00	
165			5825	17.88	18.00	
802.11n-HT20 MCS0		149	5745	17.96	18.00	94.49
		157	5785	17.84	18.00	
		165	5825	17.92	18.00	
802.11n-HT40 MCS0		151	5755	17.93	18.00	89.52
		159	5795	17.93	18.00	
802.11ac-VHT20 MCS0		149	5745	17.91	18.00	94.53
		157	5785	17.83	18.00	
		165	5825	17.98	18.00	
802.11ac-VHT40 MCS0		151	5755	17.88	18.00	89.72
		159	5795	17.90	18.00	
802.11ac-VHT80 MCS0		155	5775	17.88	18.00	85.71




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	14.81	9.10	9.14
	CH 39	2441	14.56	9.22	9.25
	CH 78	2480	14.16	9.03	9.08
Tune-up Limit			16.	10	10

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	9.18	9.15
	CH 19	2440	8.46	8.83
	CH 39	2480	9.12	8.50
Tune-up Limit			10	10


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
- The Bluetooth duty cycle is 76.6 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

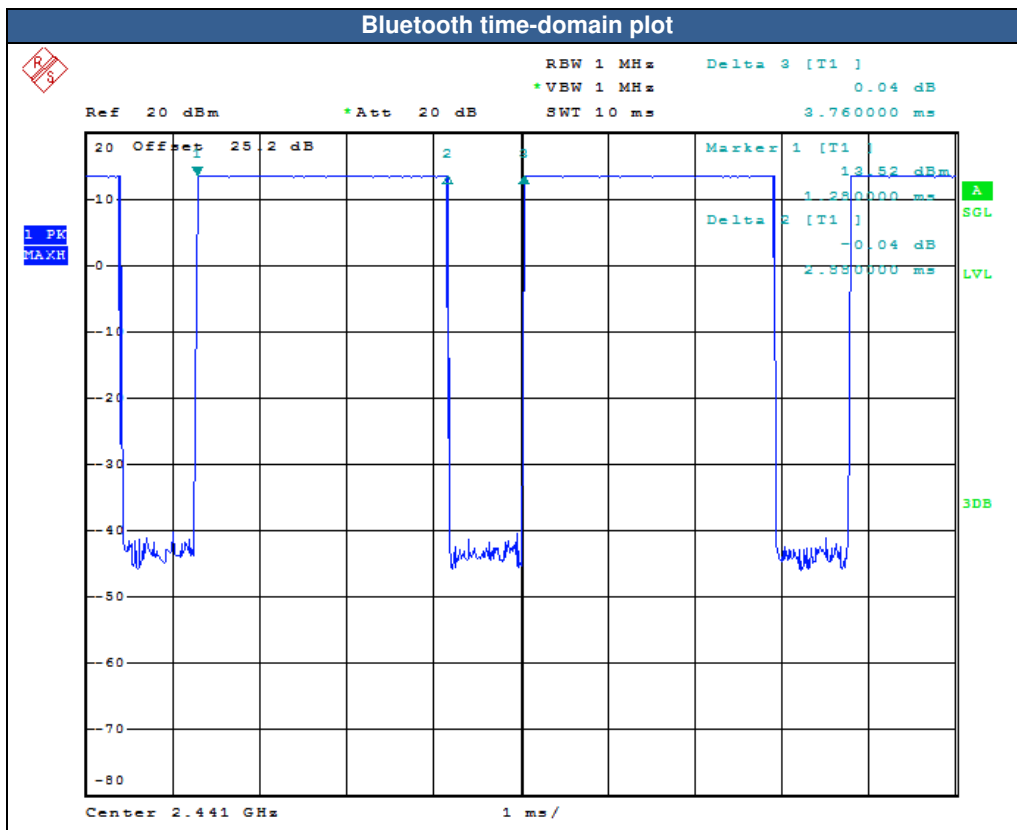

### 13. Antenna Location

<Mobile Phone>

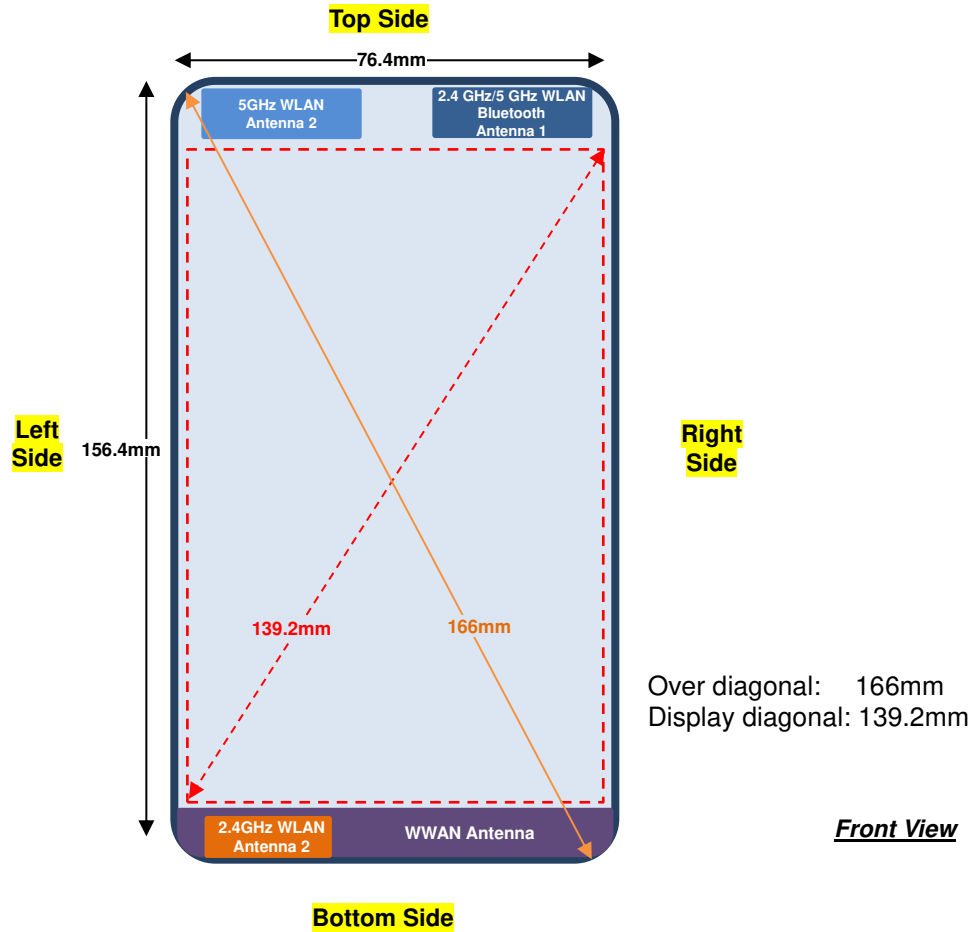

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	≤ 25mm	≤ 25mm
2.4GHz / 5GHz WLAN & BT Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	>25 mm
2.4GHz WLAN Antenna 2	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	>25 mm	≤ 25mm
5GHz WLAN Antenna 2	≤ 25mm	≤ 25mm	≤ 25mm	>25 mm	>25 mm	≤ 25mm
2.4GHz WLAN MIMO	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm
5GHz WLAN MIMO	≤ 25mm	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	Yes	Yes	No	Yes	Yes	Yes
2.4GHz / 5GHz WLAN & BT Antenna 1	Yes	Yes	Yes	No	Yes	No
2.4GHz WLAN Antenna 2	Yes	Yes	No	Yes	No	Yes
5GHz WLAN Antenna 2	Yes	Yes	Yes	No	No	Yes
2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes	Yes	Yes
5GHz WLAN MIMO	Yes	Yes	Yes	No	Yes	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Since the device supports MIMO operated, when each chain transmits at the same time that bottom side can be exempt for 5GHz WLAN only.



## **14. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN / Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR for WWAN transmitter is required only for the edges according to "operational description" with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2W/kg SAR test reduction threshold, for this device only bottom side SAR for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of WCDMA B2 ,CDMA BC1 and LTE B2 / B4 / B5 therefore product specific SAR is necessary.
6. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.
7. While operating in "Head" configuration by end user, the device will limit different maximum output powers on the CDMA BC1 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
8. While operating in "Front" and "Back" configuration by end user, the device will limit different maximum output powers on the WCDMA B 2 / B5, CDMA BC0 / BC1 and LTE B2 / B4 / B5 / B7 / B12 / B13 / B17 / B25 / B26 / B66 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
9. While operating in body-adjacent exposure configuration during a mobile hotspot session, the device will reduced output powers on the WCDMA B 2 / B5, CDMA BC0 / BC1 and LTE B2 / B4 / B5 / B7 / B12 / B13 / B17 / B25 / B26 / B66 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
10. The device utilizes independent power reduction mechanisms for SAR compliance for the WLAN transmitter for held-to-ear exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description.

### **GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**CDMA Note:**

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



**14.1 Head SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	26.10	27.50	1.380	-0.08	0.092	0.127
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	26.10	27.50	1.380	-0.08	0.037	0.051
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	26.10	27.50	1.380	0.04	0.090	0.124
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	26.10	27.50	1.380	-0.13	0.037	0.051
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	810	1909.8	22.90	24.50	1.445	0.063	0.125	0.181
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	810	1909.8	22.90	24.50	1.445	-0.021	0.041	0.059
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	810	1909.8	22.90	24.50	1.445	0.19	0.171	0.247
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	512	1850.2	22.79	24.50	1.483	-0.049	0.108	0.160
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	22.75	24.50	1.496	0.043	0.142	0.212
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	512	1850.2	22.90	24.50	1.445	0.103	0.039	0.056

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	22.51	24.00	1.409	-0.044	0.226	0.318
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	22.51	24.00	1.409	-0.07	0.131	0.185
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	22.51	24.00	1.409	0.021	0.254	0.358
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	22.25	24.00	1.496	0.125	0.256	0.383
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	22.50	24.00	1.413	0.113	0.242	0.342
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	22.51	24.00	1.409	0.032	0.120	0.169
04	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	22.80	22.80	1.000	-0.02	0.168	0.168
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	22.80	22.80	1.000	-0.18	0.066	0.066
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	22.80	22.80	1.000	-0.04	0.151	0.151
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	22.80	22.80	1.000	0	0.070	0.070

**<CDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	CDMA BC0	1xRTT RC3 SO55	Right Cheek	0mm	1013	824.7	23.91	25.00	1.285	0.04	0.179	0.230
	CDMA BC0	1xRTT RC3 SO55	Right Tilted	0mm	1013	824.7	23.91	25.00	1.285	0.01	0.113	0.145
	CDMA BC0	1xRTT RC3 SO55	Left Cheek	0mm	1013	824.7	23.91	25.00	1.285	0.12	0.148	0.190
	CDMA BC0	1xRTT RC3 SO55	Left Tilted	0mm	1013	824.7	23.91	25.00	1.285	0.06	0.096	0.123
	CDMA BC1	1xRTT RC3 SO55	Right Cheek	0mm	25	1851.25	23.42	25.00	1.439	0.19	0.191	0.275
	CDMA BC1	1xRTT RC3 SO55	Right Tilted	0mm	25	1851.25	23.42	25.00	1.439	0.08	0.119	0.171
06	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	25	1851.25	23.42	25.00	1.439	0.1	0.264	0.380
	CDMA BC1	1xRTT RC3 SO55	Left Tilted	0mm	25	1851.25	23.42	25.00	1.439	-0.07	0.101	0.145



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	19100	1900	22.78	24.00	1.324	0.034	0.254	0.336
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	19100	1900	21.68	23.00	1.355	0.023	0.153	0.207
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	19100	1900	22.78	24.00	1.324	-0.079	0.053	0.070
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	19100	1900	21.68	23.00	1.355	0.124	0.029	0.039
07	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	19100	1900	22.78	24.00	1.324	0.104	0.288	0.381
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18700	1860	22.67	24.00	1.358	0.065	0.255	0.346
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	22.59	24.00	1.384	0.028	0.271	0.375
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	19100	1900	21.68	23.00	1.355	0.059	0.179	0.243
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	19100	1900	22.78	24.00	1.324	-0.001	0.093	0.123
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	19100	1900	21.68	23.00	1.355	0.141	0.052	0.070
08	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	22.76	24.00	1.330	0.088	0.294	0.391
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	21.69	23.00	1.352	0.029	0.185	0.250
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	22.76	24.00	1.330	-0.051	0.041	0.055
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	21.69	23.00	1.352	0.041	0.041	0.055
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	22.76	24.00	1.330	0.079	0.266	0.354
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	21.69	23.00	1.352	0.136	0.175	0.237
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	22.76	24.00	1.330	-0.048	0.114	0.152
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	21.69	23.00	1.352	0.08	0.072	0.097
09	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	22.57	24.00	1.390	0.02	0.211	0.293
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	20525	836.5	21.58	23.00	1.387	-0.07	0.114	0.158
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	22.57	24.00	1.390	-0.01	0.049	0.068
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	20525	836.5	21.58	23.00	1.387	0.07	0.038	0.053
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	22.57	24.00	1.390	-0.04	0.151	0.210
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	20525	836.5	21.58	23.00	1.387	-0.05	0.121	0.168
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	22.57	24.00	1.390	-0.05	0.073	0.101
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	20525	836.5	21.58	23.00	1.387	-0.03	0.056	0.078
10	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	21350	2560	22.14	24.00	1.535	-0.01	0.230	0.353
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	21350	2560	21.16	23.00	1.528	-0.03	0.177	0.270
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	21350	2560	22.14	24.00	1.535	-0.06	0.074	0.114
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	21350	2560	21.16	23.00	1.528	0.07	0.058	0.089
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	21350	2560	22.14	24.00	1.535	0.1	0.100	0.153
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	21350	2560	21.16	23.00	1.528	0.01	0.071	0.108
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	21350	2560	22.14	24.00	1.535	0.01	0.073	0.112
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	21350	2560	21.16	23.00	1.528	0.12	0.061	0.093
11	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	22.36	24.00	1.459	-0.05	0.212	0.309
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	21.46	23.00	1.426	-0.02	0.126	0.180
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	22.36	24.00	1.459	-0.08	0.038	0.055
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	21.46	23.00	1.426	-0.19	0.031	0.044
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	22.36	24.00	1.459	-0.01	0.153	0.223
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	21.46	23.00	1.426	-0.1	0.080	0.114
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	22.36	24.00	1.459	0	0.047	0.069
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	21.46	23.00	1.426	-0.02	0.037	0.053



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	22.37	24.00	1.455	0	0.229	0.333
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	21.35	23.00	1.462	-0.07	0.140	0.205
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	22.37	24.00	1.455	0.02	0.056	0.082
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	21.35	23.00	1.462	0.12	0.049	0.072
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	22.37	24.00	1.455	-0.03	0.118	0.172
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	21.35	23.00	1.462	-0.14	0.124	0.181
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	22.37	24.00	1.455	-0.02	0.070	0.102
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	21.35	23.00	1.462	0.05	0.061	0.089
13	LTE Band 17	10M	QPSK	1	0	Right Cheek	0mm	23790	710	22.43	24.00	1.435	0.05	0.203	0.291
	LTE Band 17	10M	QPSK	25	0	Right Cheek	0mm	23790	710	21.48	23.00	1.419	-0.08	0.118	0.167
	LTE Band 17	10M	QPSK	1	0	Right Tilted	0mm	23790	710	22.43	24.00	1.435	-0.02	0.035	0.050
	LTE Band 17	10M	QPSK	25	0	Right Tilted	0mm	23790	710	21.48	23.00	1.419	0	0.028	0.040
	LTE Band 17	10M	QPSK	1	0	Left Cheek	0mm	23790	710	22.43	24.00	1.435	0.02	0.149	0.214
	LTE Band 17	10M	QPSK	25	0	Left Cheek	0mm	23790	710	21.48	23.00	1.419	-0.07	0.093	0.132
	LTE Band 17	10M	QPSK	1	0	Left Tilted	0mm	23790	710	22.43	24.00	1.435	-0.02	0.047	0.067
	LTE Band 17	10M	QPSK	25	0	Left Tilted	0mm	23790	710	21.48	23.00	1.419	-0.1	0.038	0.054
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26340	1880	22.68	24.00	1.355	0.02	0.283	0.384
	LTE Band 25	20M	QPSK	50	0	Right Cheek	0mm	26340	1880	21.55	23.00	1.396	-0.03	0.211	0.295
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	26340	1880	22.68	24.00	1.355	0.004	0.048	0.065
	LTE Band 25	20M	QPSK	50	0	Right Tilted	0mm	26340	1880	21.55	23.00	1.396	0.124	0.034	0.047
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26340	1880	22.68	24.00	1.355	0.13	0.377	0.511
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26140	1860	22.63	24.00	1.371	0.06	0.341	0.467
14	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26590	1905	22.61	24.00	1.377	0.1	0.382	0.526
	LTE Band 25	20M	QPSK	50	0	Left Cheek	0mm	26340	1880	21.55	23.00	1.396	0.05	0.292	0.408
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	26340	1880	22.68	24.00	1.355	-0.025	0.090	0.122
	LTE Band 25	20M	QPSK	50	0	Left Tilted	0mm	26340	1880	21.55	23.00	1.396	0.051	0.066	0.092
	LTE Band 26	15M	QPSK	1	0	Right Cheek	0mm	26865	831.5	22.63	24.00	1.371	-0.06	0.215	0.295
	LTE Band 26	15M	QPSK	36	0	Right Cheek	0mm	26865	831.5	21.60	23.00	1.380	-0.05	0.111	0.153
	LTE Band 26	15M	QPSK	1	0	Right Tilted	0mm	26865	831.5	22.63	24.00	1.371	-0.15	0.048	0.066
	LTE Band 26	15M	QPSK	36	0	Right Tilted	0mm	26865	831.5	21.60	23.00	1.380	-0.01	0.038	0.052
15	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	26865	831.5	22.63	24.00	1.371	-0.08	0.230	0.315
	LTE Band 26	15M	QPSK	36	0	Left Cheek	0mm	26865	831.5	21.60	23.00	1.380	-0.09	0.128	0.177
	LTE Band 26	15M	QPSK	1	0	Left Tilted	0mm	26865	831.5	22.63	24.00	1.371	-0.05	0.076	0.104
	LTE Band 26	15M	QPSK	36	0	Left Tilted	0mm	26865	831.5	21.60	23.00	1.380	-0.11	0.061	0.084
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132072	1720	22.96	24.00	1.271	0.13	0.360	0.457
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	132072	1720	21.88	23.00	1.294	0.13	0.266	0.344
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	132072	1720	22.96	24.00	1.271	-0.047	0.070	0.089
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	132072	1720	21.88	23.00	1.294	0.078	0.054	0.070
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132072	1720	22.96	24.00	1.271	0.14	0.386	0.490
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132322	1745	22.84	24.00	1.306	-0.08	0.378	0.494
16	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132572	1770	22.74	24.00	1.337	0.12	0.393	0.525
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132072	1720	21.88	23.00	1.294	0.11	0.275	0.356
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	132072	1720	22.96	24.00	1.271	0.097	0.108	0.137
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	132072	1720	21.88	23.00	1.294	-0.038	0.086	0.111



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	0.098	0.297	0.341
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.168	0.260	0.299
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	0.18	0.506	0.581
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	6	2437	15.90	16.50	1.148	100	1.000	0.04	0.517	0.594
17	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	11	2462	15.85	16.50	1.161	100	1.000	-0.09	0.548	0.636
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	0.061	0.439	0.504
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	0.111	0.044	0.051
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	0.157	0.019	0.022
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	0.107	0.045	0.052
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.148	0.020	0.023
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 1	54	5270	14.79	15.00	1.050	89.62	1.116	-0.11	0.259	0.303
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 1	54	5270	14.79	15.00	1.050	89.62	1.116	-0.13	0.269	0.315
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	54	5270	14.79	15.00	1.050	89.62	1.116	-0.16	0.385	0.451
18	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 1	54	5270	14.79	15.00	1.050	89.62	1.116	0.03	0.396	0.464
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 1	62	5310	14.75	15.00	1.059	89.62	1.116	0.04	0.385	0.455
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 2	54	5270	14.86	15.00	1.033	90.48	1.105	0.03	0.399	0.455
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 2	54	5270	14.86	15.00	1.033	90.48	1.105	0.02	0.352	0.402
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 2	54	5270	14.86	15.00	1.033	90.48	1.105	-0.04	0.255	0.291
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 2	54	5270	14.86	15.00	1.033	90.48	1.105	0.11	0.235	0.268
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 1	106	5530	14.91	15.00	1.021	86.51	1.156	-0.055	0.299	0.353
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 1	106	5530	14.91	15.00	1.021	86.51	1.156	0.179	0.342	0.404
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	106	5530	14.91	15.00	1.021	86.51	1.156	0.02	0.484	0.571
19	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	106	5530	14.91	15.00	1.021	86.51	1.156	0.15	0.527	0.622
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	122	5610	14.90	15.00	1.023	86.51	1.156	0.147	0.521	0.616
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	138	5690	14.88	15.00	1.028	85.71	1.167	-0.024	0.510	0.612
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	106	5530	14.88	15.00	1.028	85.71	1.167	-0.101	0.408	0.489
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	106	5530	14.88	15.00	1.028	85.71	1.167	0.14	0.444	0.533
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	106	5530	14.88	15.00	1.028	85.71	1.167	0.181	0.266	0.319
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 2	106	5530	14.88	15.00	1.028	85.71	1.167	0.163	0.315	0.378
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 1	155	5775	14.63	15.00	1.089	86.51	1.156	-0.137	0.278	0.350
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 1	155	5775	14.63	15.00	1.089	86.51	1.156	0.188	0.322	0.405
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	155	5775	14.63	15.00	1.089	86.51	1.156	-0.042	0.481	0.605
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	155	5775	14.63	15.00	1.089	86.51	1.156	0.047	0.525	0.661
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	155	5775	14.79	15.00	1.050	85.71	1.167	0.16	0.591	0.724
20	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	155	5775	14.79	15.00	1.050	85.71	1.167	-0.04	0.713	0.873
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	155	5775	14.79	15.00	1.050	85.71	1.167	0.1	0.351	0.430
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 2	155	5775	14.79	15.00	1.050	85.71	1.167	0.02	0.417	0.511



**14.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.10	27.50	1.380	-0.04	0.406	0.560
21	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.10	27.50	1.380	0.1	0.489	0.675
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	26.10	27.50	1.380	0.14	0.146	0.202
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	26.10	27.50	1.380	0.19	0.285	0.393
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	26.10	27.50	1.380	0.11	0.193	0.266
	GSM1900	GPRS (4 Tx slots)	Front	10mm	810	1909.8	22.90	24.50	1.445	-0.09	0.422	0.610
22	GSM1900	GPRS (4 Tx slots)	Back	10mm	810	1909.8	22.90	24.50	1.445	0.01	0.483	0.698
	GSM1900	GPRS (4 Tx slots)	Back	10mm	512	1850.2	22.79	24.50	1.483	-0.12	0.359	0.532
	GSM1900	GPRS (4 Tx slots)	Back	10mm	661	1880	22.75	24.50	1.496	-0.01	0.455	0.681
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	810	1909.8	22.90	24.50	1.445	0.06	0.189	0.273
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	810	1909.8	22.90	24.50	1.445	0.06	0.128	0.185
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	810	1909.8	22.90	24.50	1.445	-0.03	0.459	0.663

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9262	1852.4	21.55	23.00	1.396	0.03	0.671	0.937
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	21.36	23.00	1.459	0.04	0.605	0.883
	WCDMA II	RMC 12.2Kbps	Front	10mm	9538	1907.6	21.41	23.00	1.442	-0.07	0.617	0.890
23	WCDMA II	RMC 12.2Kbps	Back	10mm	9262	1852.4	21.55	23.00	1.396	-0.06	0.730	1.019
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	21.36	23.00	1.459	-0.04	0.691	1.008
	WCDMA II	RMC 12.2Kbps	Back	10mm	9538	1907.6	21.41	23.00	1.442	-0.04	0.705	1.017
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9262	1852.4	21.55	23.00	1.396	-0.05	0.318	0.444
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9262	1852.4	21.55	23.00	1.396	-0.01	0.238	0.332
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	21.55	23.00	1.396	0.14	0.727	1.015
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	21.36	23.00	1.459	-0.18	0.661	0.964
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	21.41	23.00	1.442	0.09	0.652	0.940
	WCDMA V	RMC 12.2Kbps	Front	10mm	4182	836.4	22.10	23.50	1.380	-0.04	0.667	0.921
	WCDMA V	RMC 12.2Kbps	Front	10mm	4132	826.4	22.09	23.50	1.384	-0.01	0.663	0.917
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	21.82	23.50	1.472	0.01	0.623	0.917
	WCDMA V	RMC 12.2Kbps	Back	10mm	4182	836.4	22.10	23.50	1.380	0.11	0.759	1.048
	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	22.09	23.50	1.384	0.17	0.762	1.054
24	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	21.82	23.50	1.472	0.12	0.719	1.059
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4182	836.4	22.10	23.50	1.380	-0.01	0.154	0.213
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4182	836.4	22.10	23.50	1.380	0.01	0.330	0.456
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4182	836.4	22.10	23.50	1.380	-0.07	0.225	0.311



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	RTAP 153.6Kbps	Front	10mm	1013	824.7	23.09	24.00	1.233	-0.01	0.763	0.941
	CDMA BC0	RTAP 153.6Kbps	Front	10mm	384	836.52	22.87	24.00	1.297	-0.02	0.734	0.952
	CDMA BC0	RTAP 153.6Kbps	Front	10mm	777	848.31	22.74	24.00	1.337	-0.01	0.726	0.970
	CDMA BC0	RTAP 153.6Kbps	Back	10mm	1013	824.7	23.09	24.00	1.233	0.16	0.819	1.010
	CDMA BC0	RTAP 153.6Kbps	Back	10mm	384	836.52	22.87	24.00	1.297	0.14	0.784	1.017
25	CDMA BC0	RTAP 153.6Kbps	Back	10mm	777	848.31	22.74	24.00	1.337	0.12	0.772	1.032
	CDMA BC0	RTAP 153.6Kbps	Left Side	10mm	1013	824.7	23.09	24.00	1.233	-0.04	0.235	0.290
	CDMA BC0	RTAP 153.6Kbps	Right Side	10mm	1013	824.7	23.09	24.00	1.233	0.01	0.446	0.550
	CDMA BC0	RTAP 153.6Kbps	Bottom Side	10mm	1013	824.7	23.09	24.00	1.233	-0.05	0.311	0.383
	CDMA BC1	RTAP 153.6Kbps	Front	10mm	600	1880	21.47	23.00	1.422	-0.03	0.611	0.869
	CDMA BC1	RTAP 153.6Kbps	Front	10mm	25	1851.25	21.36	23.00	1.459	-0.03	0.594	0.867
	CDMA BC1	RTAP 153.6Kbps	Front	10mm	1175	1908.75	21.41	23.00	1.442	-0.07	0.602	0.868
	CDMA BC1	RTAP 153.6Kbps	Back	10mm	600	1880	21.47	23.00	1.422	0.04	0.674	0.959
	CDMA BC1	RTAP 153.6Kbps	Back	10mm	25	1851.25	21.36	23.00	1.459	-0.04	0.658	0.960
	CDMA BC1	RTAP 153.6Kbps	Back	10mm	1175	1908.75	21.41	23.00	1.442	0.04	0.670	0.966
	CDMA BC1	RTAP 153.6Kbps	Left Side	10mm	600	1880	21.47	23.00	1.422	0.14	0.221	0.314
	CDMA BC1	RTAP 153.6Kbps	Right Side	10mm	600	1880	21.47	23.00	1.422	-0.14	0.137	0.195
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	10mm	600	1880	21.47	23.00	1.422	0.08	0.700	0.996
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	10mm	25	1851.25	21.36	23.00	1.459	0.07	0.668	0.974
26	CDMA BC1	RTAP 153.6Kbps	Bottom Side	10mm	1175	1908.75	21.41	23.00	1.442	0.07	0.695	1.002



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	19100	1900	21.83	23.00	1.309	0.03	0.766	1.003
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18700	1860	21.49	23.00	1.416	0.05	0.747	1.058
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18900	1880	21.53	23.00	1.403	0.14	0.735	1.031
	LTE Band 2	20M	QPSK	50	0	Front	10mm	19100	1900	21.63	23.00	1.371	0.01	0.608	0.833
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18700	1860	21.32	23.00	1.472	0.01	0.597	0.879
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18900	1880	21.38	23.00	1.452	0.06	0.614	0.892
	LTE Band 2	20M	QPSK	100	0	Front	10mm	19100	1900	21.58	23.00	1.387	0.04	0.615	0.853
	LTE Band 2	20M	QPSK	1	0	Back	10mm	19100	1900	21.83	23.00	1.309	-0.03	0.795	1.041
27	LTE Band 2	20M	QPSK	1	0	Back	10mm	18700	1860	21.49	23.00	1.416	-0.05	0.778	1.101
	LTE Band 2	20M	QPSK	1	0	Back	10mm	18900	1880	21.53	23.00	1.403	-0.15	0.771	1.082
	LTE Band 2	20M	QPSK	50	0	Back	10mm	19100	1900	21.63	23.00	1.371	-0.13	0.660	0.905
	LTE Band 2	20M	QPSK	50	0	Back	10mm	18700	1860	21.32	23.00	1.472	-0.07	0.647	0.953
	LTE Band 2	20M	QPSK	50	0	Back	10mm	18900	1880	21.38	23.00	1.452	-0.03	0.651	0.945
	LTE Band 2	20M	QPSK	100	0	Back	10mm	19100	1900	21.58	23.00	1.387	-0.17	0.652	0.904
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	19100	1900	21.83	23.00	1.309	-0.05	0.326	0.427
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	19100	1900	21.63	23.00	1.371	-0.04	0.245	0.336
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	19100	1900	21.83	23.00	1.309	-0.07	0.182	0.238
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	19100	1900	21.63	23.00	1.371	-0.03	0.139	0.191
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	21.83	23.00	1.309	-0.01	0.840	1.100
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	21.49	23.00	1.416	-0.05	0.706	1.000
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	21.53	23.00	1.403	-0.02	0.773	1.084
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	19100	1900	21.63	23.00	1.371	-0.06	0.660	0.905
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	18700	1860	21.32	23.00	1.472	-0.09	0.559	0.823
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	18900	1880	21.38	23.00	1.452	-0.02	0.602	0.874
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	19100	1900	21.58	23.00	1.387	-0.11	0.648	0.899
	LTE Band 4	20M	QPSK	1	0	Front	10mm	20175	1732.5	20.93	22.00	1.279	0.03	0.603	0.771
	LTE Band 4	20M	QPSK	50	0	Front	10mm	20175	1732.5	20.74	22.00	1.337	0.04	0.596	0.797
	LTE Band 4	20M	QPSK	1	0	Back	10mm	20175	1732.5	20.93	22.00	1.279	-0.03	0.693	0.887
	LTE Band 4	20M	QPSK	50	0	Back	10mm	20175	1732.5	20.74	22.00	1.337	-0.16	0.562	0.751
28	LTE Band 4	20M	QPSK	100	0	Back	10mm	20175	1732.5	20.60	22.00	1.380	-0.02	0.660	0.911
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	20.93	22.00	1.279	-0.08	0.247	0.316
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	20.74	22.00	1.337	-0.06	0.247	0.330
	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	20.93	22.00	1.279	-0.09	0.129	0.165
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	20.74	22.00	1.337	-0.03	0.139	0.186
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	20.93	22.00	1.279	-0.11	0.613	0.784
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	20.74	22.00	1.337	-0.12	0.611	0.817
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10mm	20175	1732.5	20.60	22.00	1.380	-0.18	0.618	0.853



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
29	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	21.99	23.50	1.416	0.06	0.645	0.913
	LTE Band 5	10M	QPSK	25	0	Front	10mm	20525	836.5	21.50	23.00	1.413	-0.03	0.437	0.617
	LTE Band 5	10M	QPSK	50	0	Front	10mm	20525	836.5	21.46	23.00	1.426	0.13	0.388	0.553
	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	21.99	23.50	1.416	0.12	0.635	0.899
	LTE Band 5	10M	QPSK	25	0	Back	10mm	20525	836.5	21.50	23.00	1.413	0.11	0.443	0.626
	LTE Band 5	10M	QPSK	50	0	Back	10mm	20525	836.5	21.46	23.00	1.426	0.15	0.442	0.630
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	20525	836.5	21.99	23.50	1.416	-0.09	0.182	0.258
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	20525	836.5	21.50	23.00	1.413	-0.13	0.119	0.168
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	20525	836.5	21.99	23.50	1.416	0.08	0.449	0.636
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	20525	836.5	21.50	23.00	1.413	0.02	0.311	0.439
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	20525	836.5	21.99	23.50	1.416	0.07	0.193	0.273
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	20525	836.5	21.50	23.00	1.413	0.05	0.194	0.274
	LTE Band 7	20M	QPSK	1	0	Front	10mm	21100	2535	21.33	23.00	1.469	-0.16	0.621	0.912
	LTE Band 7	20M	QPSK	1	0	Front	10mm	20850	2510	21.30	23.00	1.479	-0.17	0.568	0.840
	LTE Band 7	20M	QPSK	1	0	Front	10mm	21350	2560	21.29	23.00	1.483	-0.03	0.654	0.970
	LTE Band 7	20M	QPSK	50	0	Front	10mm	21100	2535	21.15	23.00	1.531	-0.08	0.528	0.808
	LTE Band 7	20M	QPSK	50	0	Front	10mm	20850	2510	21.13	23.00	1.538	0.14	0.519	0.798
	LTE Band 7	20M	QPSK	50	0	Front	10mm	21350	2560	21.14	23.00	1.535	-0.17	0.504	0.773
	LTE Band 7	20M	QPSK	100	0	Front	10mm	21100	2535	21.11	23.00	1.545	-0.11	0.513	0.793
30	LTE Band 7	20M	QPSK	1	0	Back	10mm	21100	2535	21.33	23.00	1.469	-0.08	0.695	1.021
	LTE Band 7	20M	QPSK	1	0	Back	10mm	20850	2510	21.30	23.00	1.479	-0.07	0.678	1.003
	LTE Band 7	20M	QPSK	1	0	Back	10mm	21350	2560	21.29	23.00	1.483	0.04	0.637	0.944
	LTE Band 7	20M	QPSK	50	0	Back	10mm	21100	2535	21.15	23.00	1.531	0.05	0.622	0.952
	LTE Band 7	20M	QPSK	50	0	Back	10mm	20850	2510	21.13	23.00	1.538	0.02	0.590	0.908
	LTE Band 7	20M	QPSK	50	0	Back	10mm	21350	2560	21.14	23.00	1.535	0.13	0.594	0.912
	LTE Band 7	20M	QPSK	100	0	Back	10mm	21100	2535	21.11	23.00	1.545	0.03	0.627	0.969
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	21100	2535	21.33	23.00	1.469	-0.02	0.041	0.060
	LTE Band 7	20M	QPSK	50	0	Left Side	10mm	21100	2535	21.15	23.00	1.531	0.07	0.041	0.063
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	21100	2535	21.33	23.00	1.469	0.06	0.212	0.311
	LTE Band 7	20M	QPSK	50	0	Right Side	10mm	21100	2535	21.15	23.00	1.531	0.07	0.155	0.237
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	21100	2535	21.33	23.00	1.469	0.02	0.608	0.893
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	20850	2510	21.30	23.00	1.479	0.04	0.602	0.890
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	21350	2560	21.29	23.00	1.483	0.1	0.452	0.670
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	21100	2535	21.15	23.00	1.531	0.07	0.437	0.669
	LTE Band 7	20M	QPSK	100	0	Bottom Side	10mm	21100	2535	21.11	23.00	1.545	0.01	0.401	0.620



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
31	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	21.60	23.00	1.380	-0.04	0.721	0.995
	LTE Band 12	10M	QPSK	25	0	Front	10mm	23095	707.5	21.48	23.00	1.419	0.02	0.447	0.634
	LTE Band 12	10M	QPSK	50	0	Front	10mm	23095	707.5	21.55	23.00	1.396	-0.05	0.443	0.619
	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	21.60	23.00	1.380	-0.02	0.714	0.986
	LTE Band 12	10M	QPSK	25	0	Back	10mm	23095	707.5	21.48	23.00	1.419	0.06	0.503	0.714
	LTE Band 12	10M	QPSK	50	0	Back	10mm	23095	707.5	21.55	23.00	1.396	-0.01	0.497	0.694
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	23095	707.5	21.60	23.00	1.380	0.1	0.118	0.163
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	23095	707.5	21.48	23.00	1.419	0.01	0.083	0.118
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	23095	707.5	21.60	23.00	1.380	0.09	0.458	0.632
	LTE Band 12	10M	QPSK	25	0	Right Side	10mm	23095	707.5	21.48	23.00	1.419	0.06	0.323	0.458
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	21.60	23.00	1.380	0.02	0.240	0.331
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	23095	707.5	21.48	23.00	1.419	0.01	0.169	0.240
32	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	21.14	22.50	1.368	-0.04	0.576	0.788
	LTE Band 13	10M	QPSK	25	0	Front	10mm	23230	782	21.13	22.50	1.371	-0.03	0.442	0.606
	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	21.14	22.50	1.368	0.06	0.596	0.815
	LTE Band 13	10M	QPSK	25	0	Back	10mm	23230	782	21.13	22.50	1.371	0.06	0.515	0.706
	LTE Band 13	10M	QPSK	50	0	Back	10mm	23230	782	21.03	22.50	1.403	-0.03	0.496	0.696
	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	23230	782	21.14	22.50	1.368	-0.04	0.301	0.412
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	23230	782	21.13	22.50	1.371	0	0.162	0.222
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	23230	782	21.14	22.50	1.368	0.01	0.540	0.739
33	LTE Band 17	10M	QPSK	1	0	Front	10mm	23790	710	21.58	23.00	1.387	0.14	0.723	1.003
	LTE Band 17	10M	QPSK	25	0	Front	10mm	23790	710	21.58	23.00	1.387	-0.05	0.448	0.621
	LTE Band 17	10M	QPSK	50	0	Front	10mm	23790	710	21.52	23.00	1.406	-0.02	0.445	0.626
	LTE Band 17	10M	QPSK	1	0	Back	10mm	23790	710	21.58	23.00	1.387	0.06	0.717	0.994
	LTE Band 17	10M	QPSK	25	0	Back	10mm	23790	710	21.58	23.00	1.387	0.06	0.505	0.700
	LTE Band 17	10M	QPSK	50	0	Back	10mm	23790	710	21.52	23.00	1.406	0.13	0.498	0.700
	LTE Band 17	10M	QPSK	1	0	Left Side	10mm	23790	710	21.58	23.00	1.387	0	0.119	0.165
	LTE Band 17	10M	QPSK	25	0	Left Side	10mm	23790	710	21.58	23.00	1.387	0.04	0.083	0.115
	LTE Band 17	10M	QPSK	1	0	Right Side	10mm	23790	710	21.58	23.00	1.387	0.09	0.460	0.638
	LTE Band 17	10M	QPSK	25	0	Right Side	10mm	23790	710	21.58	23.00	1.387	0.16	0.324	0.449
LTE Band 17	10M	QPSK	1	0	Bottom Side	10mm	23790	710	21.58	23.00	1.387	0.05	0.241	0.334	
LTE Band 17	10M	QPSK	25	0	Bottom Side	10mm	23790	710	21.58	23.00	1.387	0.18	0.169	0.234	



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26340	1880	21.93	23.00	1.279	0.03	0.768	0.983
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26140	1860	21.63	23.00	1.371	0.05	0.767	1.051
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26590	1905	21.84	23.00	1.306	0.04	0.776	1.014
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26340	1880	21.89	23.00	1.291	0.01	0.595	0.768
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26140	1860	21.44	23.00	1.432	0.01	0.597	0.855
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26590	1905	21.82	23.00	1.312	0.06	0.631	0.828
	LTE Band 25	20M	QPSK	100	0	Front	10mm	26340	1880	21.77	23.00	1.327	0.04	0.602	0.799
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26340	1880	21.93	23.00	1.279	-0.03	0.804	1.029
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26140	1860	21.63	23.00	1.371	-0.05	0.801	1.098
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26590	1860	21.84	23.00	1.306	-0.05	0.774	1.011
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26340	1880	21.89	23.00	1.291	-0.02	0.646	0.834
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26140	1860	21.44	23.00	1.432	-0.09	0.647	0.927
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26590	1905	21.82	23.00	1.312	-0.05	0.669	0.878
	LTE Band 25	20M	QPSK	100	0	Back	10mm	26340	1880	21.77	23.00	1.327	-0.04	0.639	0.848
	LTE Band 25	20M	QPSK	1	0	Left Side	10mm	26340	1880	21.93	23.00	1.279	-0.05	0.319	0.408
	LTE Band 25	20M	QPSK	50	0	Left Side	10mm	26340	1880	21.89	23.00	1.291	-0.04	0.239	0.309
	LTE Band 25	20M	QPSK	1	0	Right Side	10mm	26340	1880	21.93	23.00	1.279	-0.07	0.178	0.228
	LTE Band 25	20M	QPSK	50	0	Right Side	10mm	26340	1880	21.89	23.00	1.291	-0.03	0.136	0.176
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26340	1880	21.93	23.00	1.279	-0.04	0.852	1.090
34	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26140	1860	21.63	23.00	1.371	-0.04	0.857	1.175
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26590	1905	21.84	23.00	1.306	-0.08	0.821	1.072
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10mm	26340	1880	21.89	23.00	1.291	-0.08	0.643	0.830
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10mm	26140	1860	21.44	23.00	1.432	-0.03	0.667	0.955
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10mm	26590	1905	21.82	23.00	1.312	-0.04	0.645	0.846
	LTE Band 25	20M	QPSK	100	0	Bottom Side	10mm	26340	1880	21.77	23.00	1.327	-0.03	0.634	0.842
35	LTE Band 26	15M	QPSK	1	0	Front	10mm	26865	831.5	21.58	23.00	1.387	0.01	0.646	0.896
	LTE Band 26	15M	QPSK	36	0	Front	10mm	26865	831.5	21.48	23.00	1.419	-0.03	0.435	0.617
	LTE Band 26	15M	QPSK	75	0	Front	10mm	26865	831.5	21.44	23.00	1.432	0.13	0.386	0.553
	LTE Band 26	15M	QPSK	1	0	Back	10mm	26865	831.5	21.58	23.00	1.387	0.06	0.631	0.875
	LTE Band 26	15M	QPSK	36	0	Back	10mm	26865	831.5	21.48	23.00	1.419	0.15	0.440	0.624
	LTE Band 26	15M	QPSK	75	0	Back	10mm	26865	831.5	21.44	23.00	1.432	0.15	0.439	0.629
	LTE Band 26	15M	QPSK	1	0	Left Side	10mm	26865	831.5	21.58	23.00	1.387	-0.02	0.181	0.251
	LTE Band 26	15M	QPSK	36	0	Left Side	10mm	26865	831.5	21.48	23.00	1.419	-0.02	0.118	0.167
	LTE Band 26	15M	QPSK	1	0	Right Side	10mm	26865	831.5	21.58	23.00	1.387	0.08	0.446	0.618
	LTE Band 26	15M	QPSK	36	0	Right Side	10mm	26865	831.5	21.48	23.00	1.419	0.06	0.309	0.438
	LTE Band 26	15M	QPSK	1	0	Bottom Side	10mm	26865	831.5	21.58	23.00	1.387	0.14	0.192	0.266
	LTE Band 26	15M	QPSK	36	0	Bottom Side	10mm	26865	831.5	21.48	23.00	1.419	0.14	0.193	0.274



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132322	1745	21.37	22.00	1.156	-0.04	0.647	0.748
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132322	1745	21.14	22.00	1.219	-0.01	0.644	0.785
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132072	1720	20.84	22.00	1.306	0	0.600	0.784
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132572	1770	20.95	22.00	1.274	-0.02	0.611	0.778
	LTE Band 66	20M	QPSK	1	0	Back	10mm	132322	1745	21.37	22.00	1.156	-0.11	0.637	0.736
	LTE Band 66	20M	QPSK	50	0	Back	10mm	132322	1745	21.14	22.00	1.219	-0.13	0.630	0.768
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	132322	1745	21.37	22.00	1.156	-0.07	0.294	0.340
	LTE Band 66	20M	QPSK	50	0	Left Side	10mm	132322	1745	21.14	22.00	1.219	-0.09	0.290	0.354
	LTE Band 66	20M	QPSK	1	0	Right Side	10mm	132322	1745	21.37	22.00	1.156	-0.11	0.161	0.186
	LTE Band 66	20M	QPSK	50	0	Right Side	10mm	132322	1745	21.14	22.00	1.219	-0.07	0.165	0.201
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	132322	1745	21.37	22.00	1.156	0.07	0.707	0.817
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	132072	1720	20.84	22.00	1.306	0.12	0.610	0.797
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	132572	1770	20.95	22.00	1.274	0.11	0.789	1.005
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	132322	1745	21.14	22.00	1.219	0.07	0.703	0.857
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	132072	1720	20.81	22.00	1.315	0.09	0.624	0.821
36	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	132572	1770	20.94	22.00	1.276	-0.13	0.799	1.020
	LTE Band 66	20M	QPSK	100	0	Bottom Side	10mm	132322	1745	21.11	22.00	1.227	0.13	0.717	0.880



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.02	0.094	0.108
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	0.02	0.138	0.158
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.05	0.016	0.018
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.14	0.051	0.059
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.07	0.071	0.082
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.01	0.003	0.003
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.09	0.212	0.243
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.1	0.248	0.285
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.06	0.073	0.084
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.17	0.034	0.039
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.02	0.005	0.006
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.11	0.300	0.344
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 2	6	2437	15.66	16.50	1.213	100	1.000	-0.16	0.274	0.332
37	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 2	11	2462	15.60	16.50	1.230	100	1.000	-0.07	0.303	0.373
38	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1	36	5180	18.16	19.00	1.213	94.16	1.062	-0.158	0.109	0.140
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1	44	5220	18.12	19.00	1.224	94.16	1.062	-0.122	0.096	0.125
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 1	36	5180	18.16	19.00	1.213	94.16	1.062	-0.095	0.090	0.116
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	Ant 1	36	5180	18.16	19.00	1.213	94.16	1.062	-0.164	0.005	0.006
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	Ant 1	36	5180	18.16	19.00	1.213	94.16	1.062	0.145	0.012	0.015
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	Ant 1	36	5180	18.16	19.00	1.213	94.16	1.062	0.086	0.060	0.077
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 2	36	5180	18.10	19.00	1.230	94.85	1.054	0.017	0.031	0.040
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 2	36	5180	18.10	19.00	1.230	94.85	1.054	-0.039	0.073	0.095
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	Ant 2	36	5180	18.10	19.00	1.230	94.85	1.054	-0.005	0.004	0.005
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	Ant 2	36	5180	18.10	19.00	1.230	94.85	1.054	-0.149	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	Ant 2	36	5180	18.10	19.00	1.230	94.85	1.054	0.017	0.033	0.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	0.172	0.094	0.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	0.095	0.100	0.140
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	0.12	0.003	0.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	-0.12	0.007	0.009
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	-0.17	0.036	0.050
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.079	0.161	0.221
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.101	0.137	0.188
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.015	0.044	0.060
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.122	0.015	0.021
39	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.013	0.168	0.230



14.3 Product Specific SAR

<WCDMA SAR>

Table with 13 columns: Plot No., Band, Mode, Test Position, Gap (mm), Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 10g SAR (W/kg), Reported 10g SAR (W/kg). Contains 3 rows of WCDMA II test data.

<CDMA SAR>

Table with 13 columns: Plot No., Band, Mode, Test Position, Gap (mm), Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 10g SAR (W/kg), Reported 10g SAR (W/kg). Contains 3 rows of CDMA BC1 test data.

<LTE SAR>

Table with 15 columns: Plot No., Band, BW (MHz), Modulation, RB Size, RB offset, Test Position, Gap (mm), Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 10g SAR (W/kg), Reported 10g SAR (W/kg). Contains 9 rows of LTE test data across various bands.



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	-0.05	0.585	0.736
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	-0.01	0.193	0.243
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	-0.03	0.012	0.015
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	0.11	0.024	0.030
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	0.08	0.232	0.292
45	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	0.12	0.718	0.925
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 2	56	5280	18.00	19.00	1.259	94.85	1.054	0.17	0.687	0.912
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	-0.11	0.208	0.268
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	0.02	0.090	0.116
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	0.01	0.024	0.031
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	-0.14	0.641	0.826
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	0.114	0.594	0.817
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	-0.05	0.259	0.356
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	0.012	0.008	0.110
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	-0.11	0.014	0.019
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	-0.11	0.528	0.726
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	-0.17	0.808	1.187
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	0.19	0.291	0.428
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	0.02	0.119	0.175
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	0.03	0.039	0.057
46	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	0.11	1.000	1.469
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 2	106	5530	15.42	15.50	1.019	85.71	1.167	0.15	0.412	0.490



**14.4 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	26.10	27.50	1.380	-0.04	0.406	0.560
47	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	26.10	27.50	1.380	0.1	0.489	0.675
	GSM1900	GPRS (4 Tx slots)	Front	10mm	810	1909.8	22.90	24.50	1.445	-0.09	0.422	0.610
48	GSM1900	GPRS (4 Tx slots)	Back	10mm	810	1909.8	22.90	24.50	1.445	0.01	0.483	0.698
	GSM1900	GPRS (4 Tx slots)	Back	10mm	512	1850.2	22.79	24.50	1.483	-0.12	0.359	0.532
	GSM1900	GPRS (4 Tx slots)	Back	10mm	661	1880	22.75	24.50	1.496	-0.01	0.455	0.681

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9262	1852.4	21.55	23.00	1.396	0.03	0.671	0.937
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	21.36	23.00	1.459	0.04	0.605	0.883
	WCDMA II	RMC 12.2Kbps	Front	10mm	9538	1907.6	21.41	23.00	1.442	-0.07	0.617	0.890
49	WCDMA II	RMC 12.2Kbps	Back	10mm	9262	1852.4	21.55	23.00	1.396	-0.06	0.730	1.019
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	21.36	23.00	1.459	-0.04	0.691	1.008
	WCDMA II	RMC 12.2Kbps	Back	10mm	9538	1907.6	21.41	23.00	1.442	-0.04	0.705	1.017
	WCDMA V	RMC 12.2Kbps	Front	10mm	4182	836.4	22.10	23.50	1.380	-0.04	0.667	0.921
	WCDMA V	RMC 12.2Kbps	Front	10mm	4132	826.4	22.09	23.50	1.384	-0.01	0.663	0.917
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	21.82	23.50	1.472	0.01	0.623	0.917
	WCDMA V	RMC 12.2Kbps	Back	10mm	4182	836.4	22.10	23.50	1.380	0.11	0.759	1.048
	WCDMA V	RMC 12.2Kbps	Back	10mm	4132	826.4	22.09	23.50	1.384	0.17	0.762	1.054
50	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	21.82	23.50	1.472	0.12	0.719	1.059

**<CDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	1xRTT RC3 SO32	Front	10mm	1013	824.7	23.09	24.00	1.233	-0.01	0.759	0.936
	CDMA BC0	1xRTT RC3 SO32	Front	10mm	384	836.52	22.84	24.00	1.306	0	0.722	0.943
	CDMA BC0	1xRTT RC3 SO32	Front	10mm	777	848.31	22.71	24.00	1.346	0.01	0.663	0.892
	CDMA BC0	1xRTT RC3 SO32	Back	10mm	1013	824.7	23.09	24.00	1.233	0.13	0.778	0.959
	CDMA BC0	1xRTT RC3 SO32	Back	10mm	384	836.52	22.84	24.00	1.306	0.13	0.795	1.038
51	CDMA BC0	1xRTT RC3 SO32	Back	10mm	777	848.31	22.71	24.00	1.346	0.16	0.794	1.069
	CDMA BC1	1xRTT RC3 SO32	Front	10mm	600	1880	21.43	23.00	1.435	0.02	0.609	0.874
	CDMA BC1	1xRTT RC3 SO32	Front	10mm	25	1851.25	21.33	23.00	1.469	0	0.572	0.840
	CDMA BC1	1xRTT RC3 SO32	Front	10mm	1175	1908.75	21.34	23.00	1.466	-0.03	0.567	0.831
	CDMA BC1	1xRTT RC3 SO32	Back	10mm	600	1880	21.43	23.00	1.435	0.05	0.643	0.923
	CDMA BC1	1xRTT RC3 SO32	Back	10mm	25	1851.25	21.33	23.00	1.469	0.07	0.625	0.918
52	CDMA BC1	1xRTT RC3 SO32	Back	10mm	1175	1908.75	21.34	23.00	1.466	0.07	0.633	0.928



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	19100	1900	21.83	23.00	1.309	0.03	0.766	1.003
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18700	1860	21.49	23.00	1.416	0.05	0.747	1.058
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18900	1880	21.53	23.00	1.403	0.14	0.735	1.031
	LTE Band 2	20M	QPSK	50	0	Front	10mm	19100	1900	21.63	23.00	1.371	0.01	0.608	0.833
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18700	1860	21.32	23.00	1.472	0.01	0.597	0.879
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18900	1880	21.38	23.00	1.452	0.06	0.614	0.892
	LTE Band 2	20M	QPSK	100	0	Front	10mm	19100	1900	21.58	23.00	1.387	0.04	0.615	0.853
	LTE Band 2	20M	QPSK	1	0	Back	10mm	19100	1900	21.83	23.00	1.309	-0.03	0.795	1.041
53	LTE Band 2	20M	QPSK	1	0	Back	10mm	18700	1860	21.49	23.00	1.416	-0.05	0.778	1.101
	LTE Band 2	20M	QPSK	1	0	Back	10mm	18900	1880	21.53	23.00	1.403	-0.15	0.771	1.082
	LTE Band 2	20M	QPSK	50	0	Back	10mm	19100	1900	21.63	23.00	1.371	-0.13	0.660	0.905
	LTE Band 2	20M	QPSK	50	0	Back	10mm	18700	1860	21.32	23.00	1.472	-0.07	0.647	0.953
	LTE Band 2	20M	QPSK	50	0	Back	10mm	18900	1880	21.38	23.00	1.452	-0.03	0.651	0.945
	LTE Band 2	20M	QPSK	100	0	Back	10mm	19100	1900	21.58	23.00	1.387	-0.17	0.652	0.904
	LTE Band 4	20M	QPSK	1	0	Front	10mm	20175	1732.5	20.93	22.00	1.279	0.03	0.603	0.771
	LTE Band 4	20M	QPSK	50	0	Front	10mm	20175	1732.5	20.74	22.00	1.337	0.04	0.596	0.797
	LTE Band 4	20M	QPSK	1	0	Back	10mm	20175	1732.5	20.93	22.00	1.279	-0.03	0.693	0.887
	LTE Band 4	20M	QPSK	50	0	Back	10mm	20175	1732.5	20.74	22.00	1.337	-0.16	0.562	0.751
54	LTE Band 4	20M	QPSK	100	0	Back	10mm	20175	1732.5	20.60	22.00	1.380	-0.02	0.660	0.911
55	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	21.99	23.50	1.416	0.06	0.645	0.913
	LTE Band 5	10M	QPSK	25	0	Front	10mm	20525	836.5	21.50	23.00	1.413	-0.03	0.437	0.617
	LTE Band 5	10M	QPSK	50	0	Front	10mm	20525	836.5	21.46	23.00	1.426	0.13	0.388	0.553
	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	21.99	23.50	1.416	0.12	0.635	0.899
	LTE Band 5	10M	QPSK	25	0	Back	10mm	20525	836.5	21.50	23.00	1.413	0.11	0.443	0.626
	LTE Band 5	10M	QPSK	50	0	Back	10mm	20525	836.5	21.46	23.00	1.426	0.15	0.442	0.630
	LTE Band 7	20M	QPSK	1	0	Front	10mm	21100	2535	21.33	23.00	1.469	-0.16	0.621	0.912
	LTE Band 7	20M	QPSK	1	0	Front	10mm	20850	2510	21.30	23.00	1.479	-0.17	0.568	0.840
	LTE Band 7	20M	QPSK	1	0	Front	10mm	21350	2560	21.29	23.00	1.483	-0.03	0.654	0.970
	LTE Band 7	20M	QPSK	50	0	Front	10mm	21100	2535	21.15	23.00	1.531	-0.08	0.528	0.808
	LTE Band 7	20M	QPSK	50	0	Front	10mm	20850	2510	21.13	23.00	1.538	0.14	0.519	0.798
	LTE Band 7	20M	QPSK	50	0	Front	10mm	21350	2560	21.14	23.00	1.535	-0.17	0.504	0.773
	LTE Band 7	20M	QPSK	100	0	Front	10mm	21100	2535	21.11	23.00	1.545	-0.11	0.513	0.793
56	LTE Band 7	20M	QPSK	1	0	Back	10mm	21100	2535	21.33	23.00	1.469	-0.08	0.695	1.021
	LTE Band 7	20M	QPSK	1	0	Back	10mm	20850	2510	21.30	23.00	1.479	-0.07	0.678	1.003
	LTE Band 7	20M	QPSK	1	0	Back	10mm	21350	2560	21.29	23.00	1.483	0.04	0.637	0.944
	LTE Band 7	20M	QPSK	50	0	Back	10mm	21100	2535	21.15	23.00	1.531	0.05	0.622	0.952
	LTE Band 7	20M	QPSK	50	0	Back	10mm	20850	2510	21.13	23.00	1.538	0.02	0.590	0.908
	LTE Band 7	20M	QPSK	50	0	Back	10mm	21350	2560	21.14	23.00	1.535	0.13	0.594	0.912
	LTE Band 7	20M	QPSK	100	0	Back	10mm	21100	2535	21.11	23.00	1.545	0.03	0.627	0.969



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
57	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	21.60	23.00	1.380	-0.04	0.721	0.995
	LTE Band 12	10M	QPSK	25	0	Front	10mm	23095	707.5	21.48	23.00	1.419	0.02	0.447	0.634
	LTE Band 12	10M	QPSK	50	0	Front	10mm	23095	707.5	21.55	23.00	1.396	-0.05	0.443	0.619
	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	21.60	23.00	1.380	-0.02	0.714	0.986
	LTE Band 12	10M	QPSK	25	0	Back	10mm	23095	707.5	21.48	23.00	1.419	0.06	0.503	0.714
	LTE Band 12	10M	QPSK	50	0	Back	10mm	23095	707.5	21.55	23.00	1.396	-0.01	0.497	0.694
58	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	21.14	22.50	1.368	-0.04	0.576	0.788
	LTE Band 13	10M	QPSK	25	0	Front	10mm	23230	782	21.13	22.50	1.371	-0.03	0.442	0.606
	LTE Band 13	10M	QPSK	50	0	Back	10mm	23230	782	21.13	22.50	1.371	0.06	0.515	0.706
59	LTE Band 13	10M	QPSK	25	0	Back	10mm	23230	782	21.13	22.50	1.371	0.06	0.515	0.706
	LTE Band 13	10M	QPSK	50	0	Back	10mm	23230	782	21.03	22.50	1.403	-0.03	0.496	0.696
	LTE Band 17	10M	QPSK	1	0	Front	10mm	23790	710	21.58	23.00	1.387	0.14	0.723	1.003
	LTE Band 17	10M	QPSK	25	0	Front	10mm	23790	710	21.58	23.00	1.387	-0.05	0.448	0.621
	LTE Band 17	10M	QPSK	50	0	Front	10mm	23790	710	21.52	23.00	1.406	-0.02	0.445	0.626
	LTE Band 17	10M	QPSK	1	0	Back	10mm	23790	710	21.58	23.00	1.387	0.06	0.717	0.994
60	LTE Band 17	10M	QPSK	25	0	Back	10mm	23790	710	21.58	23.00	1.387	0.06	0.505	0.700
	LTE Band 17	10M	QPSK	50	0	Back	10mm	23790	710	21.52	23.00	1.406	0.13	0.498	0.700
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26340	1880	21.93	23.00	1.279	0.03	0.768	0.983
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26140	1860	21.63	23.00	1.371	0.05	0.767	1.051
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26590	1905	21.84	23.00	1.306	0.04	0.776	1.014
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26340	1880	21.89	23.00	1.291	0.01	0.595	0.768
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26140	1860	21.44	23.00	1.432	0.01	0.597	0.855
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26590	1905	21.82	23.00	1.312	0.06	0.631	0.828
	LTE Band 25	20M	QPSK	100	0	Front	10mm	26340	1880	21.77	23.00	1.327	0.04	0.602	0.799
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26340	1880	21.93	23.00	1.279	-0.03	0.804	1.029
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26140	1860	21.63	23.00	1.371	-0.05	0.801	1.098
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26590	1860	21.84	23.00	1.306	-0.05	0.774	1.011
61	LTE Band 25	20M	QPSK	50	0	Back	10mm	26340	1880	21.89	23.00	1.291	-0.02	0.646	0.834
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26140	1860	21.44	23.00	1.432	-0.09	0.647	0.927
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26590	1905	21.82	23.00	1.312	-0.05	0.669	0.878
	LTE Band 25	20M	QPSK	100	0	Back	10mm	26340	1880	21.77	23.00	1.327	-0.04	0.639	0.848
	LTE Band 26	15M	QPSK	1	0	Front	10mm	26865	831.5	21.58	23.00	1.387	0.01	0.646	0.896
	LTE Band 26	15M	QPSK	36	0	Front	10mm	26865	831.5	21.48	23.00	1.419	-0.03	0.435	0.617
62	LTE Band 26	15M	QPSK	75	0	Front	10mm	26865	831.5	21.44	23.00	1.432	0.13	0.386	0.553
	LTE Band 26	15M	QPSK	1	0	Back	10mm	26865	831.5	21.58	23.00	1.387	0.06	0.631	0.875
	LTE Band 26	15M	QPSK	36	0	Back	10mm	26865	831.5	21.48	23.00	1.419	0.15	0.440	0.624
	LTE Band 26	15M	QPSK	75	0	Back	10mm	26865	831.5	21.44	23.00	1.432	0.15	0.439	0.629
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132322	1745	21.37	22.00	1.156	-0.04	0.647	0.748
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132322	1745	21.14	22.00	1.219	-0.01	0.644	0.785
62	LTE Band 66	20M	QPSK	50	0	Front	10mm	132072	1720	20.84	22.00	1.306	0	0.600	0.784
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132572	1770	20.95	22.00	1.274	-0.02	0.611	0.778
	LTE Band 66	20M	QPSK	1	0	Back	10mm	132322	1745	21.37	22.00	1.156	-0.11	0.637	0.736
	LTE Band 66	20M	QPSK	50	0	Back	10mm	132322	1745	21.14	22.00	1.219	-0.13	0.630	0.768



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	-0.02	0.094	0.108
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	1	2412	15.90	16.50	1.148	100	1.000	0.02	0.138	0.158
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.09	0.212	0.243
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	1	2412	15.90	16.50	1.148	100	1.000	-0.1	0.248	0.285
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	6	2437	15.66	16.50	1.213	100	1.000	-0.1	0.206	0.250
63	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	11	2462	15.60	16.50	1.230	100	1.000	-0.05	0.255	0.314
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	-0.01	0.085	0.107
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 1	64	5320	18.26	19.00	1.185	94.16	1.062	-0.1	0.077	0.097
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	0.13	0.089	0.115
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 2	64	5320	18.13	19.00	1.222	94.85	1.054	0.02	0.151	0.194
64	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 2	56	5280	18.00	19.00	1.259	94.85	1.054	0.02	0.147	0.195
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	0.12	0.106	0.146
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	138	5690	18.25	19.00	1.190	86.51	1.156	0.128	0.117	0.161
65	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	-0.12	0.133	0.195
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	106	5530	15.42	15.50	1.019	85.71	1.167	-0.04	0.053	0.063
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 2	138	5690	18.00	19.00	1.259	85.71	1.167	0.03	0.125	0.184
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	0.172	0.094	0.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	155	5775	18.18	19.00	1.208	86.51	1.156	0.095	0.100	0.140
66	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.079	0.161	0.221
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 2	155	5775	18.30	19.00	1.175	85.71	1.167	0.101	0.137	0.188

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 1	00	2402	14.81	16.00	1.315	76.6	1.087	0.1	0.018	0.026
	Bluetooth	1Mbps	Back	10mm	Ant 1	00	2402	14.81	16.00	1.315	76.6	1.087	0	0.020	0.029
	Bluetooth	1Mbps	Back	10mm	Ant 1	39	2441	14.56	16.00	1.393	76.6	1.087	0.08	0.020	0.030
67	Bluetooth	1Mbps	Back	10mm	Ant 1	78	2480	14.16	16.00	1.528	76.6	1.087	-0.18	0.023	0.038



14.5 Repeated SAR Measurement

Table with 14 columns: Plot No., Band, Mode, Test Position, Gap (mm), Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 1g SAR (W/kg), Ratio, Reported 1g SAR (W/kg). Rows include CDMA BC0 and LTE Band 25 measurements.

Table with 14 columns: Plot No., Band, Mode, Test Position, Gap (mm), Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 10g SAR (W/kg), Ratio, Reported 10g SAR (W/kg). Rows include CDMA BC1 and LTE Band 4 measurements.

Gneral Note:

- 1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated measured SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**15. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN (Voice) + WLAN Ant 1 + WLAN Ant 2	Yes	Yes		Yes
2.	WWAN (Data) + WLAN Ant 1 + WLAN Ant 2	Yes	Yes	Yes	Yes
3.	WWAN (Voice) + WLAN2.4GHz Ant 2 + Bluetooth Ant 1		Yes		Yes
4.	WWAN (Data) + WLAN2.4GHz Ant 2 + Bluetooth Ant 1		Yes		Yes
5.	WWAN (Voice) + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 1		Yes		Yes
6.	WWAN (Data) + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 1		Yes		Yes

**General Note:**

1. This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation.
2. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
3. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
4. 2.4GHz WLAN and Bluetooth share the same antenna 1, and cannot transmit simultaneously.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
7. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}] \cdot x \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Product Specific
	Test separation	5 mm
16.0 Bm	Estimated 10g SAR (W/kg)	0.672 W/kg



**15.1 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.127	0.341	0.051	0.353	0.724	<b>0.519</b>	<b>1.204</b>	<b>1.192</b>	<b>0.531</b>
		Right Tilted	0.051	0.299	0.022	0.405	0.873	<b>0.372</b>	<b>1.329</b>	<b>1.223</b>	<b>0.478</b>
		Left Cheek	0.124	0.636	0.052	0.605	0.430	<b>0.812</b>	<b>1.159</b>	<b>1.190</b>	<b>0.781</b>
		Left Tilted	0.051	0.504	0.023	0.661	0.511	<b>0.578</b>	<b>1.223</b>	<b>1.066</b>	<b>0.735</b>
	GSM1900	Right Cheek	0.181	0.341	0.051	0.353	0.724	<b>0.573</b>	<b>1.258</b>	<b>1.246</b>	<b>0.585</b>
		Right Tilted	0.059	0.299	0.022	0.405	0.873	<b>0.380</b>	<b>1.337</b>	<b>1.231</b>	<b>0.486</b>
		Left Cheek	0.247	0.636	0.052	0.605	0.430	<b>0.935</b>	<b>1.282</b>	<b>1.313</b>	<b>0.904</b>
		Left Tilted	0.056	0.504	0.023	0.661	0.511	<b>0.583</b>	<b>1.228</b>	<b>1.071</b>	<b>0.740</b>
WCDMA	WCDMA II	Right Cheek	0.318	0.341	0.051	0.353	0.724	<b>0.710</b>	<b>1.395</b>	<b>1.383</b>	<b>0.722</b>
		Right Tilted	0.185	0.299	0.022	0.405	0.873	<b>0.506</b>	<b>1.463</b>	<b>1.357</b>	<b>0.612</b>
		Left Cheek	0.383	0.636	0.052	0.605	0.430	<b>1.071</b>	<b>1.418</b>	<b>1.449</b>	<b>1.040</b>
		Left Tilted	0.169	0.504	0.023	0.661	0.511	<b>0.696</b>	<b>1.341</b>	<b>1.184</b>	<b>0.853</b>
	WCDMA V	Right Cheek	0.168	0.341	0.051	0.353	0.724	<b>0.560</b>	<b>1.245</b>	<b>1.233</b>	<b>0.572</b>
		Right Tilted	0.066	0.299	0.022	0.405	0.873	<b>0.387</b>	<b>1.344</b>	<b>1.238</b>	<b>0.493</b>
		Left Cheek	0.151	0.636	0.052	0.605	0.430	<b>0.839</b>	<b>1.186</b>	<b>1.217</b>	<b>0.808</b>
		Left Tilted	0.070	0.504	0.023	0.661	0.511	<b>0.597</b>	<b>1.242</b>	<b>1.085</b>	<b>0.754</b>
CDMA	CDMA BC0	Right Cheek	0.230	0.341	0.051	0.353	0.724	<b>0.622</b>	<b>1.307</b>	<b>1.295</b>	<b>0.634</b>
		Right Tilted	0.145	0.299	0.022	0.405	0.873	<b>0.466</b>	<b>1.423</b>	<b>1.317</b>	<b>0.572</b>
		Left Cheek	0.190	0.636	0.052	0.605	0.430	<b>0.878</b>	<b>1.225</b>	<b>1.256</b>	<b>0.847</b>
		Left Tilted	0.123	0.504	0.023	0.661	0.511	<b>0.650</b>	<b>1.295</b>	<b>1.138</b>	<b>0.807</b>
	CDMA BC1	Right Cheek	0.275	0.341	0.051	0.353	0.724	<b>0.667</b>	<b>1.352</b>	<b>1.340</b>	<b>0.679</b>
		Right Tilted	0.171	0.299	0.022	0.405	0.873	<b>0.492</b>	<b>1.449</b>	<b>1.343</b>	<b>0.598</b>
		Left Cheek	0.380	0.636	0.052	0.605	0.430	<b>1.068</b>	<b>1.415</b>	<b>1.446</b>	<b>1.037</b>
		Left Tilted	0.145	0.504	0.023	0.661	0.511	<b>0.672</b>	<b>1.317</b>	<b>1.160</b>	<b>0.829</b>



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	LTE Band 2	Right Cheek	0.336	0.341	0.051	0.353	0.724	<b>0.728</b>	<b>1.413</b>	<b>1.401</b>	<b>0.740</b>
		Right Tilted	0.070	0.299	0.022	0.405	0.873	<b>0.391</b>	<b>1.348</b>	<b>1.242</b>	<b>0.497</b>
		Left Cheek	0.381	0.636	0.052	0.605	0.430	<b>1.069</b>	<b>1.416</b>	<b>1.447</b>	<b>1.038</b>
		Left Tilted	0.123	0.504	0.023	0.661	0.511	<b>0.650</b>	<b>1.295</b>	<b>1.138</b>	<b>0.807</b>
	LTE Band 4	Right Cheek	0.391	0.341	0.051	0.353	0.724	<b>0.783</b>	<b>1.468</b>	<b>1.456</b>	<b>0.795</b>
		Right Tilted	0.055	0.299	0.022	0.405	0.873	<b>0.376</b>	<b>1.333</b>	<b>1.227</b>	<b>0.482</b>
		Left Cheek	0.354	0.636	0.052	0.605	0.430	<b>1.042</b>	<b>1.389</b>	<b>1.420</b>	<b>1.011</b>
		Left Tilted	0.152	0.504	0.023	0.661	0.511	<b>0.679</b>	<b>1.324</b>	<b>1.167</b>	<b>0.836</b>
	LTE Band 5	Right Cheek	0.293	0.341	0.051	0.353	0.724	<b>0.685</b>	<b>1.370</b>	<b>1.358</b>	<b>0.697</b>
		Right Tilted	0.068	0.299	0.022	0.405	0.873	<b>0.389</b>	<b>1.346</b>	<b>1.240</b>	<b>0.495</b>
		Left Cheek	0.210	0.636	0.052	0.605	0.430	<b>0.898</b>	<b>1.245</b>	<b>1.276</b>	<b>0.867</b>
		Left Tilted	0.101	0.504	0.023	0.661	0.511	<b>0.628</b>	<b>1.273</b>	<b>1.116</b>	<b>0.785</b>
	LTE Band 7	Right Cheek	0.353	0.341	0.051	0.353	0.724	<b>0.745</b>	<b>1.430</b>	<b>1.418</b>	<b>0.757</b>
		Right Tilted	0.114	0.299	0.022	0.405	0.873	<b>0.435</b>	<b>1.392</b>	<b>1.286</b>	<b>0.541</b>
		Left Cheek	0.153	0.636	0.052	0.605	0.430	<b>0.841</b>	<b>1.188</b>	<b>1.219</b>	<b>0.810</b>
		Left Tilted	0.112	0.504	0.023	0.661	0.511	<b>0.639</b>	<b>1.284</b>	<b>1.127</b>	<b>0.796</b>
	LTE Band 12	Right Cheek	0.309	0.341	0.051	0.353	0.724	<b>0.701</b>	<b>1.386</b>	<b>1.374</b>	<b>0.713</b>
		Right Tilted	0.055	0.299	0.022	0.405	0.873	<b>0.376</b>	<b>1.333</b>	<b>1.227</b>	<b>0.482</b>
		Left Cheek	0.223	0.636	0.052	0.605	0.430	<b>0.911</b>	<b>1.258</b>	<b>1.289</b>	<b>0.880</b>
		Left Tilted	0.069	0.504	0.023	0.661	0.511	<b>0.596</b>	<b>1.241</b>	<b>1.084</b>	<b>0.753</b>
	LTE Band 13	Right Cheek	0.333	0.341	0.051	0.353	0.724	<b>0.725</b>	<b>1.410</b>	<b>1.398</b>	<b>0.737</b>
		Right Tilted	0.082	0.299	0.022	0.405	0.873	<b>0.403</b>	<b>1.360</b>	<b>1.254</b>	<b>0.509</b>
		Left Cheek	0.181	0.636	0.052	0.605	0.430	<b>0.869</b>	<b>1.216</b>	<b>1.247</b>	<b>0.838</b>
		Left Tilted	0.102	0.504	0.023	0.661	0.511	<b>0.629</b>	<b>1.274</b>	<b>1.117</b>	<b>0.786</b>
	LTE Band 17	Right Cheek	0.291	0.341	0.051	0.353	0.724	<b>0.683</b>	<b>1.368</b>	<b>1.356</b>	<b>0.695</b>
		Right Tilted	0.050	0.299	0.022	0.405	0.873	<b>0.371</b>	<b>1.328</b>	<b>1.222</b>	<b>0.477</b>
		Left Cheek	0.214	0.636	0.052	0.605	0.430	<b>0.902</b>	<b>1.249</b>	<b>1.280</b>	<b>0.871</b>
		Left Tilted	0.067	0.504	0.023	0.661	0.511	<b>0.594</b>	<b>1.239</b>	<b>1.082</b>	<b>0.751</b>
	LTE Band 25	Right Cheek	0.384	0.341	0.051	0.353	0.724	<b>0.776</b>	<b>1.461</b>	<b>1.449</b>	<b>0.788</b>
		Right Tilted	0.065	0.299	0.022	0.405	0.873	<b>0.386</b>	<b>1.343</b>	<b>1.237</b>	<b>0.492</b>
		Left Cheek	0.526	0.636	0.052	0.605	0.430	<b>1.214</b>	<b>1.561</b>	<b>1.592</b>	<b>1.183</b>
		Left Tilted	0.122	0.504	0.023	0.661	0.511	<b>0.649</b>	<b>1.294</b>	<b>1.137</b>	<b>0.806</b>
	LTE Band 26	Right Cheek	0.295	0.341	0.051	0.353	0.724	<b>0.687</b>	<b>1.372</b>	<b>1.360</b>	<b>0.699</b>
		Right Tilted	0.066	0.299	0.022	0.405	0.873	<b>0.387</b>	<b>1.344</b>	<b>1.238</b>	<b>0.493</b>
		Left Cheek	0.315	0.636	0.052	0.605	0.430	<b>1.003</b>	<b>1.350</b>	<b>1.381</b>	<b>0.972</b>
		Left Tilted	0.104	0.504	0.023	0.661	0.511	<b>0.631</b>	<b>1.276</b>	<b>1.119</b>	<b>0.788</b>
	LTE Band 66	Right Cheek	0.457	0.341	0.051	0.353	0.724	<b>0.849</b>	<b>1.534</b>	<b>1.522</b>	<b>0.861</b>
		Right Tilted	0.089	0.299	0.022	0.405	0.873	<b>0.410</b>	<b>1.367</b>	<b>1.261</b>	<b>0.516</b>
		Left Cheek	0.525	0.636	0.052	0.605	0.430	<b>1.213</b>	<b>1.560</b>	<b>1.591</b>	<b>1.182</b>
		Left Tilted	0.137	0.504	0.023	0.661	0.511	<b>0.664</b>	<b>1.309</b>	<b>1.152</b>	<b>0.821</b>



**15.2 Hotspot Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Front	0.560	0.108	0.243	0.140	0.221	<b>0.911</b>	<b>0.921</b>	<b>0.889</b>	<b>0.943</b>
		Back	0.675	0.158	0.285	0.140	0.188	<b>1.118</b>	<b>1.003</b>	<b>1.021</b>	<b>1.100</b>
		Left side	0.202	0.018	0.084	0.006	0.060	<b>0.304</b>	<b>0.268</b>	<b>0.280</b>	<b>0.292</b>
		Right side	0.393	0.059	0.039	0.015	0.021	<b>0.491</b>	<b>0.429</b>	<b>0.473</b>	<b>0.447</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	0.266	0.003	0.373			<b>0.642</b>	<b>0.266</b>	<b>0.269</b>	<b>0.639</b>
	GSM1900	Front	0.610	0.108	0.243	0.140	0.221	<b>0.961</b>	<b>0.971</b>	<b>0.939</b>	<b>0.993</b>
		Back	0.698	0.158	0.285	0.140	0.188	<b>1.141</b>	<b>1.026</b>	<b>1.044</b>	<b>1.123</b>
		Left side	0.273	0.018	0.084	0.006	0.060	<b>0.375</b>	<b>0.339</b>	<b>0.351</b>	<b>0.363</b>
		Right side	0.185	0.059	0.039	0.015	0.021	<b>0.283</b>	<b>0.221</b>	<b>0.265</b>	<b>0.239</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	0.663	0.003	0.373			<b>1.039</b>	<b>0.663</b>	<b>0.666</b>	<b>1.036</b>
WCDMA	WCDMA II	Front	0.937	0.108	0.243	0.140	0.221	<b>1.288</b>	<b>1.298</b>	<b>1.266</b>	<b>1.320</b>
		Back	1.019	0.158	0.285	0.140	0.188	<b>1.462</b>	<b>1.347</b>	<b>1.365</b>	<b>1.444</b>
		Left side	0.444	0.018	0.084	0.006	0.060	<b>0.546</b>	<b>0.510</b>	<b>0.522</b>	<b>0.534</b>
		Right side	0.332	0.059	0.039	0.015	0.021	<b>0.430</b>	<b>0.368</b>	<b>0.412</b>	<b>0.386</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	1.015	0.003	0.373			<b>1.391</b>	<b>1.015</b>	<b>1.018</b>	<b>1.388</b>
	WCDMA V	Front	0.921	0.108	0.243	0.140	0.221	<b>1.272</b>	<b>1.282</b>	<b>1.250</b>	<b>1.304</b>
		Back	1.059	0.158	0.285	0.140	0.188	<b>1.502</b>	<b>1.387</b>	<b>1.405</b>	<b>1.484</b>
		Left side	0.213	0.018	0.084	0.006	0.060	<b>0.315</b>	<b>0.279</b>	<b>0.291</b>	<b>0.303</b>
		Right side	0.456	0.059	0.039	0.015	0.021	<b>0.554</b>	<b>0.492</b>	<b>0.536</b>	<b>0.510</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	0.311	0.003	0.373			<b>0.687</b>	<b>0.311</b>	<b>0.314</b>	<b>0.684</b>
CDMA	CDMA BC0	Front	0.970	0.108	0.243	0.140	0.221	<b>1.321</b>	<b>1.331</b>	<b>1.299</b>	<b>1.353</b>
		Back	1.032	0.158	0.285	0.140	0.188	<b>1.475</b>	<b>1.360</b>	<b>1.378</b>	<b>1.457</b>
		Left side	0.290	0.018	0.084	0.006	0.060	<b>0.392</b>	<b>0.356</b>	<b>0.368</b>	<b>0.380</b>
		Right side	0.550	0.059	0.039	0.015	0.021	<b>0.648</b>	<b>0.586</b>	<b>0.630</b>	<b>0.604</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	0.383	0.003	0.373			<b>0.759</b>	<b>0.383</b>	<b>0.386</b>	<b>0.756</b>
	CDMA BC1	Front	0.869	0.108	0.243	0.140	0.221	<b>1.220</b>	<b>1.230</b>	<b>1.198</b>	<b>1.252</b>
		Back	0.966	0.158	0.285	0.140	0.188	<b>1.409</b>	<b>1.294</b>	<b>1.312</b>	<b>1.391</b>
		Left side	0.314	0.018	0.084	0.006	0.060	<b>0.416</b>	<b>0.380</b>	<b>0.392</b>	<b>0.404</b>
		Right side	0.195	0.059	0.039	0.015	0.021	<b>0.293</b>	<b>0.231</b>	<b>0.275</b>	<b>0.249</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	1.002	0.003	0.373			<b>1.378</b>	<b>1.002</b>	<b>1.005</b>	<b>1.375</b>



WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	LTE Band 2	Front	1.058	0.108	0.243	0.140	0.221	1.409	1.419	1.387	1.441
		Back	1.101	0.158	0.285	0.140	0.188	1.544	1.429	1.447	1.526
		Left side	0.427	0.018	0.084	0.006	0.060	0.529	0.493	0.505	0.517
		Right side	0.238	0.059	0.039	0.015	0.021	0.336	0.274	0.318	0.292
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	1.100	0.003	0.373			1.476	1.100	1.103	1.473
	LTE Band 4	Front	0.797	0.108	0.243	0.140	0.221	1.148	1.158	1.126	1.180
		Back	0.911	0.158	0.285	0.140	0.188	1.354	1.239	1.257	1.336
		Left side	0.330	0.018	0.084	0.006	0.060	0.432	0.396	0.408	0.420
		Right side	0.186	0.059	0.039	0.015	0.021	0.284	0.222	0.266	0.240
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	0.853	0.003	0.373			1.229	0.853	0.856	1.226
	LTE Band 5	Front	0.913	0.108	0.243	0.140	0.221	1.264	1.274	1.242	1.296
		Back	0.899	0.158	0.285	0.140	0.188	1.342	1.227	1.245	1.324
		Left side	0.258	0.018	0.084	0.006	0.060	0.360	0.324	0.336	0.348
		Right side	0.636	0.059	0.039	0.015	0.021	0.734	0.672	0.716	0.690
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	0.274	0.003	0.373			0.650	0.274	0.277	0.647
	LTE Band 7	Front	0.970	0.108	0.243	0.140	0.221	1.321	1.331	1.299	1.353
		Back	1.021	0.158	0.285	0.140	0.188	1.464	1.349	1.367	1.446
		Left side	0.063	0.018	0.084	0.006	0.060	0.165	0.129	0.141	0.153
		Right side	0.311	0.059	0.039	0.015	0.021	0.409	0.347	0.391	0.365
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	0.893	0.003	0.373			1.269	0.893	0.896	1.266
	LTE Band 12	Front	0.995	0.108	0.243	0.140	0.221	1.346	1.356	1.324	1.378
		Back	0.986	0.158	0.285	0.140	0.188	1.429	1.314	1.332	1.411
		Left side	0.163	0.018	0.084	0.006	0.060	0.265	0.229	0.241	0.253
		Right side	0.632	0.059	0.039	0.015	0.021	0.730	0.668	0.712	0.686
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	0.331	0.003	0.373			0.707	0.331	0.334	0.704
	LTE Band 13	Front	0.788	0.108	0.243	0.140	0.221	1.139	1.149	1.117	1.171
		Back	0.815	0.158	0.285	0.140	0.188	1.258	1.143	1.161	1.240
		Left side	0.412	0.018	0.084	0.006	0.060	0.514	0.478	0.490	0.502
		Right side	0.739	0.059	0.039	0.015	0.021	0.837	0.775	0.819	0.793
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	0.460	0.003	0.373			0.836	0.460	0.463	0.833
	LTE Band 17	Front	1.003	0.108	0.243	0.140	0.221	1.354	1.364	1.332	1.386
		Back	0.994	0.158	0.285	0.140	0.188	1.437	1.322	1.340	1.419
		Left side	0.165	0.018	0.084	0.006	0.060	0.267	0.231	0.243	0.255
		Right side	0.638	0.059	0.039	0.015	0.021	0.736	0.674	0.718	0.692
		Top side		0.082	0.006	0.077	0.230	0.088	0.307	0.312	0.083
		Bottom side	0.334	0.003	0.373			0.710	0.334	0.337	0.707



WWAN Band		Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE	LTE Band 25	Front	1.051	0.108	0.243	0.140	0.221	<b>1.402</b>	<b>1.412</b>	<b>1.380</b>	<b>1.434</b>
		Back	1.098	0.158	0.285	0.140	0.188	<b>1.541</b>	<b>1.426</b>	<b>1.444</b>	<b>1.523</b>
		Left side	0.408	0.018	0.084	0.006	0.060	<b>0.510</b>	<b>0.474</b>	<b>0.486</b>	<b>0.498</b>
		Right side	0.228	0.059	0.039	0.015	0.021	<b>0.326</b>	<b>0.264</b>	<b>0.308</b>	<b>0.282</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	1.175	0.003	0.373			<b>1.551</b>	<b>1.175</b>	<b>1.178</b>	<b>1.548</b>
	LTE Band 26	Front	0.896	0.108	0.243	0.140	0.221	<b>1.247</b>	<b>1.257</b>	<b>1.225</b>	<b>1.279</b>
		Back	0.875	0.158	0.285	0.140	0.188	<b>1.318</b>	<b>1.203</b>	<b>1.221</b>	<b>1.300</b>
		Left side	0.251	0.018	0.084	0.006	0.060	<b>0.353</b>	<b>0.317</b>	<b>0.329</b>	<b>0.341</b>
		Right side	0.618	0.059	0.039	0.015	0.021	<b>0.716</b>	<b>0.654</b>	<b>0.698</b>	<b>0.672</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	0.274	0.003	0.373			<b>0.650</b>	<b>0.274</b>	<b>0.277</b>	<b>0.647</b>
	LTE Band 66	Front	0.785	0.108	0.243	0.140	0.221	<b>1.136</b>	<b>1.146</b>	<b>1.114</b>	<b>1.168</b>
		Back	0.768	0.158	0.285	0.140	0.188	<b>1.211</b>	<b>1.096</b>	<b>1.114</b>	<b>1.193</b>
		Left side	0.354	0.018	0.084	0.006	0.060	<b>0.456</b>	<b>0.420</b>	<b>0.432</b>	<b>0.444</b>
		Right side	0.201	0.059	0.039	0.015	0.021	<b>0.299</b>	<b>0.237</b>	<b>0.281</b>	<b>0.255</b>
		Top side		0.082	0.006	0.077	0.230	<b>0.088</b>	<b>0.307</b>	<b>0.312</b>	<b>0.083</b>
		Bottom side	1.020	0.003	0.373			<b>1.396</b>	<b>1.020</b>	<b>1.023</b>	<b>1.393</b>



**15.3 Product Specific Conditions**

WWAN Band		Exposure Position	1	2	3	4	5	6	1+4+5+6 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN Ant 1 10g SAR (W/kg)	2.4GHz WLAN Ant 2 10g SAR (W/kg)	5GHz WLAN Ant 1 10g SAR (W/kg)	5GHz WLAN Ant 2 10g SAR (W/kg)	Bluetooth Ant 1 Estimated 10g SAR (W/kg)	
WCDMA	WCDMA II	Front	-	-	-	0.817	1.187	0.672	2.676
		Back	-	-	-	0.356	0.428	0.672	1.456
		Left side	-	-	-	0.110	0.175	0.672	0.957
		Right side	-	-	-	0.030	0.057	0.672	0.759
		Top side	-	-	-	0.726	1.469	0.672	2.867
		Bottom side	3.270	-	-	-	-	-	3.270
CDMA	CDMA2000 BC1	Front	-	-	-	0.817	1.187	0.672	2.676
		Back	-	-	-	0.356	0.428	0.672	1.456
		Left side	-	-	-	0.110	0.175	0.672	0.957
		Right side	-	-	-	0.030	0.057	0.672	0.759
		Top side	-	-	-	0.726	1.469	0.672	2.867
		Bottom side	3.761	-	-	-	-	-	3.761
LTE	LTE Band 2	Front	-	-	-	0.817	1.187	0.672	2.676
		Back	-	-	-	0.356	0.428	0.672	1.456
		Left side	-	-	-	0.110	0.175	0.672	0.957
		Right side	-	-	-	0.030	0.057	0.672	0.759
		Top side	-	-	-	0.726	1.469	0.672	2.867
		Bottom side	3.364	-	-	-	-	-	3.364
	LTE Band 4	Front	-	-	-	0.817	1.187	0.672	2.676
		Back	-	-	-	0.356	0.428	0.672	1.456
		Left side	-	-	-	0.110	0.175	0.672	0.957
		Right side	-	-	-	0.030	0.057	0.672	0.759
		Top side	-	-	-	0.726	1.469	0.672	2.867
		Bottom side	3.166	-	-	-	-	-	3.166
	LTE Band 25	Front	-	-	-	0.817	1.187	0.672	2.676
		Back	-	-	-	0.356	0.428	0.672	1.456
		Left side	-	-	-	0.110	0.175	0.672	0.957
		Right side	-	-	-	0.030	0.057	0.672	0.759
		Top side	-	-	-	0.726	1.469	0.672	2.867
		Bottom side	3.359	-	-	-	-	-	3.359

**Remark:**

1. According to KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN SAR ("") was excluded, due to Hotspot SAR was < 1.2W/kg.
2. According to KDB 941225 D06 v02r01, for Bluetooth and 5GHz WLAN SAR ("") was excluded, due to transmitting antenna located larger 25mm from that surface or edge



**15.4 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1						
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	0.560	0.108	0.243	0.146	0.221	0.026	<b>0.911</b>	<b>0.927</b>	<b>0.889</b>	<b>0.949</b>	<b>0.953</b>
		Back	0.675	0.158	0.314	0.161	0.195	0.038	<b>1.147</b>	<b>1.031</b>	<b>1.028</b>	<b>1.150</b>	<b>1.069</b>
	GSM1900	Front	0.610	0.108	0.243	0.146	0.221	0.026	<b>0.961</b>	<b>0.977</b>	<b>0.939</b>	<b>0.999</b>	<b>1.003</b>
		Back	0.698	0.158	0.314	0.161	0.195	0.038	<b>1.170</b>	<b>1.054</b>	<b>1.051</b>	<b>1.173</b>	<b>1.092</b>
WCDMA	WCDMA II	Front	0.937	0.108	0.243	0.146	0.221	0.026	<b>1.288</b>	<b>1.304</b>	<b>1.266</b>	<b>1.326</b>	<b>1.330</b>
		Back	1.019	0.158	0.314	0.161	0.195	0.038	<b>1.491</b>	<b>1.375</b>	<b>1.372</b>	<b>1.494</b>	<b>1.413</b>
	WCDMA V	Front	0.921	0.108	0.243	0.146	0.221	0.026	<b>1.272</b>	<b>1.288</b>	<b>1.250</b>	<b>1.310</b>	<b>1.314</b>
		Back	1.059	0.158	0.314	0.161	0.195	0.038	<b>1.531</b>	<b>1.415</b>	<b>1.412</b>	<b>1.534</b>	<b>1.453</b>
CDMA	CDMA BC0	Front	0.943	0.108	0.243	0.146	0.221	0.026	<b>1.294</b>	<b>1.310</b>	<b>1.272</b>	<b>1.332</b>	<b>1.336</b>
		Back	1.069	0.158	0.314	0.161	0.195	0.038	<b>1.541</b>	<b>1.425</b>	<b>1.422</b>	<b>1.544</b>	<b>1.463</b>
	CDMA BC1	Front	0.874	0.108	0.243	0.146	0.221	0.026	<b>1.225</b>	<b>1.241</b>	<b>1.203</b>	<b>1.263</b>	<b>1.267</b>
		Back	0.928	0.158	0.314	0.161	0.195	0.038	<b>1.400</b>	<b>1.284</b>	<b>1.281</b>	<b>1.403</b>	<b>1.322</b>
LTE	LTE Band 2	Front	1.058	0.108	0.243	0.146	0.221	0.026	<b>1.409</b>	<b>1.425</b>	<b>1.387</b>	<b>1.447</b>	<b>1.451</b>
		Back	1.101	0.158	0.314	0.161	0.195	0.038	<b>1.573</b>	<b>1.457</b>	<b>1.454</b>	<b>1.576</b>	<b>1.495</b>
	LTE Band 4	Front	0.797	0.108	0.243	0.146	0.221	0.026	<b>1.148</b>	<b>1.164</b>	<b>1.126</b>	<b>1.186</b>	<b>1.190</b>
		Back	0.911	0.158	0.314	0.161	0.195	0.038	<b>1.383</b>	<b>1.267</b>	<b>1.264</b>	<b>1.386</b>	<b>1.305</b>
	LTE Band 5	Front	0.913	0.108	0.243	0.146	0.221	0.026	<b>1.264</b>	<b>1.280</b>	<b>1.242</b>	<b>1.302</b>	<b>1.306</b>
		Back	0.899	0.158	0.314	0.161	0.195	0.038	<b>1.371</b>	<b>1.255</b>	<b>1.252</b>	<b>1.374</b>	<b>1.293</b>
	LTE Band 7	Front	0.970	0.108	0.243	0.146	0.221	0.026	<b>1.321</b>	<b>1.337</b>	<b>1.299</b>	<b>1.359</b>	<b>1.363</b>
		Back	1.021	0.158	0.314	0.161	0.195	0.038	<b>1.493</b>	<b>1.377</b>	<b>1.374</b>	<b>1.496</b>	<b>1.415</b>
	LTE Band 12	Front	0.995	0.108	0.243	0.146	0.221	0.026	<b>1.346</b>	<b>1.362</b>	<b>1.324</b>	<b>1.384</b>	<b>1.388</b>
		Back	0.986	0.158	0.314	0.161	0.195	0.038	<b>1.458</b>	<b>1.342</b>	<b>1.339</b>	<b>1.461</b>	<b>1.380</b>
	LTE Band 13	Front	0.788	0.108	0.243	0.146	0.221	0.026	<b>1.139</b>	<b>1.155</b>	<b>1.117</b>	<b>1.177</b>	<b>1.181</b>
		Back	0.815	0.158	0.314	0.161	0.195	0.038	<b>1.287</b>	<b>1.171</b>	<b>1.168</b>	<b>1.290</b>	<b>1.209</b>
	LTE Band 17	Front	1.003	0.108	0.243	0.146	0.221	0.026	<b>1.354</b>	<b>1.370</b>	<b>1.332</b>	<b>1.392</b>	<b>1.396</b>
		Back	0.994	0.158	0.314	0.161	0.195	0.038	<b>1.466</b>	<b>1.350</b>	<b>1.347</b>	<b>1.469</b>	<b>1.388</b>
	LTE Band 25	Front	1.051	0.108	0.243	0.146	0.221	0.026	<b>1.402</b>	<b>1.418</b>	<b>1.380</b>	<b>1.440</b>	<b>1.444</b>
		Back	1.098	0.158	0.314	0.161	0.195	0.038	<b>1.570</b>	<b>1.454</b>	<b>1.451</b>	<b>1.573</b>	<b>1.492</b>
	LTE Band 26	Front	0.896	0.108	0.243	0.146	0.221	0.026	<b>1.247</b>	<b>1.263</b>	<b>1.225</b>	<b>1.285</b>	<b>1.289</b>
		Back	0.875	0.158	0.314	0.161	0.195	0.038	<b>1.347</b>	<b>1.231</b>	<b>1.228</b>	<b>1.350</b>	<b>1.269</b>
	LTE Band 66	Front	0.785	0.108	0.243	0.146	0.221	0.026	<b>1.136</b>	<b>1.152</b>	<b>1.114</b>	<b>1.174</b>	<b>1.178</b>
		Back	0.768	0.158	0.314	0.161	0.195	0.038	<b>1.240</b>	<b>1.124</b>	<b>1.121</b>	<b>1.243</b>	<b>1.162</b>



15.5 Spot Check Verification Data Section

<Head SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID: IHDT56WB4)					Spot Check Model (FCC ID: IHDT56WB1)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm		810	1909.8	22.90	24.50		0.171	0.247	22.50	24.50		0.127	0.201	-18.6%
WCDMA II	RMC 12.2Kbps	Left Cheek	0mm		9400	1880	22.25	24.00		0.256	0.383	22.42	24.00		0.226	0.325	-15.1%
LTE Band 2	20M_QPSK_1_0	Left Cheek	0mm		19100	1900	22.78	24.00		0.288	0.381	22.90	24.00		0.248	0.319	-16.3%
LTE Band 4	20M_QPSK_1_0	Right Cheek	0mm		20175	1732.5	22.76	24.00		0.294	0.391	22.83	24.00		0.337	0.441	12.8%
LTE Band 25	20M_QPSK_1_0	Left Cheek	0mm		26590	1905	22.61	24.00		0.382	0.526	22.88	24.00		0.332	0.430	-18.3%
LTE Band 66	20M_QPSK_1_0	Left Cheek	0mm		132572	1770	22.74	24.00		0.393	0.525	22.89	24.00		0.335	0.433	-17.5%
WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	11	2462	15.85	16.50	100.00	0.548	0.636	15.85	16.50	100.00	0.600	0.697	9.6%
WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 2	1	2412	15.90	16.50	100.00	0.045	0.052	15.90	16.50	100.00	0.038	0.044	-15.4%
WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 1	54	5270	14.79	15.00	89.62	0.396	0.464	14.79	15.00	89.62	0.453	0.531	14.4%
WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 2	54	5270	14.86	15.00	90.48	0.399	0.455	14.86	15.00	90.48	0.462	0.527	15.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	106	5530	14.91	15.00	86.51	0.527	0.622	14.91	15.00	86.51	0.615	0.726	16.7%
WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	106	5530	14.88	15.00	85.71	0.444	0.533	14.88	15.00	85.71	0.524	0.629	18.0%
WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	155	5775	14.63	15.00	86.51	0.525	0.661	14.63	15.00	86.51	0.461	0.580	-12.3%
WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	155	5775	14.79	15.00	85.71	0.713	0.873	14.79	15.00	85.71	0.722	0.884	1.3%

<Hotspot SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID: IHDT56WB4)					Spot Check Model (FCC ID: IHDT56WB1)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
GSM1900	GPRS (4 Tx slots)	Back	10mm		810	1909.8	22.90	24.50		0.483	0.698	22.50	24.50		0.414	0.656	-6.0%
WCDMA II	RMC 12.2Kbps	Back	10mm		9262	1852.4	21.55	23.00		0.730	1.019	21.24	23.00		0.707	1.060	4.0%
LTE Band 2	20M_QPSK_1_0	Back	10mm		18700	1860	21.49	23.00		0.778	1.101	21.91	23.00		0.807	1.037	-5.8%
LTE Band 4	20M_QPSK_100_0	Back	10mm		20175	1732.5	20.60	22.00		0.660	0.911	21.16	22.00		0.627	0.761	-16.5%
LTE Band 25	20M_QPSK_1_0	Bottom Side	10mm		26140	1860	21.63	23.00		0.857	1.175	21.73	23.00		0.826	1.107	-5.8%
LTE Band 66	20M_QPSK_50_0	Bottom Side	10mm		132572	1770	20.94	22.00		0.799	1.020	20.89	22.00		0.680	0.878	-13.9%
WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	1	2412	15.90	16.50	100.00	0.138	0.158	15.90	16.50	100.00	0.112	0.129	-18.4%
WLAN2.4GHz	802.11b 1Mbps	Bottom side	10mm	Ant 2	11	2462	15.60	16.50	100.00	0.303	0.373	15.60	16.50	100.00	0.333	0.410	9.9%
WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1	36	5180	18.16	19.00	94.16	0.109	0.140	18.16	19.00	94.16	0.112	0.144	2.9%
WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 2	36	5180	18.10	19.00	94.85	0.073	0.095	18.10	19.00	94.85	0.072	0.093	-2.1%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	155	5775	18.18	19.00	86.51	0.100	0.140	18.18	19.00	86.51	0.084	0.117	-16.4%
WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 2	155	5775	18.30	19.00	85.71	0.168	0.230	18.30	19.00	85.71	0.195	0.267	16.1%



<Product specific SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID: IHDT56WB4)					Spot Check Model (FCC ID: IHDT56WB1)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	
WCDMA II	RMC 12.2Kbps	Bottom Side	0mm		9262	1852.4	22.51	24.00		2.320	3.270	22.42	24.00		2.500	3.597	10.0%
LTE Band 2	20M_QPSK_1_0	Bottom Side	0mm		19100	1900	22.78	24.00		2.540	3.364	22.90	24.00		2.680	3.453	2.6%
LTE Band 4	20M_QPSK_1_0	Bottom Side	0mm		20175	1732.5	22.76	24.00		2.380	3.166	22.83	24.00		2.530	3.312	4.6%
LTE Band 25	20M_QPSK_1_0	Bottom Side	0mm		26140	1860	22.63	24.00		2.450	3.359	22.74	24.00		2.720	3.637	8.3%
WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1	64	5320	18.26	19.00	94.16	0.585	0.736	18.26	19.00	94.16	0.664	0.836	13.6%
WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 2	64	5320	18.13	19.00	94.85	0.718	0.925	18.13	19.00	94.85	0.590	0.760	-17.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	138	5690	18.25	19.00	86.51	0.594	0.817	18.25	19.00	86.51	0.500	0.688	-15.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 2	138	5690	18.00	19.00	85.71	1.000	1.469	18.00	19.00	85.71	0.969	1.424	-3.1%

<Body-Worn SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID: IHDT56WB4)					Spot Check Model (FCC ID: IHDT56WB1)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
GSM1900	GPRS (4 Tx slots)	Back	10mm		810	1909.8	22.90	24.50		0.483	0.698	22.50	24.50		0.414	0.656	-6.0%
WCDMA II	RMC 12.2Kbps	Back	10mm		9262	1852.4	21.55	23.00		0.730	1.019	21.24	23.00		0.707	1.060	4.0%
LTE Band 2	20M_QPSK_1_0	Back	10mm		18700	1860	21.49	23.00		0.778	1.101	21.91	23.00		0.807	1.037	-5.8%
LTE Band 4	20M_QPSK_100_0	Back	10mm		20175	1732.5	20.60	22.00		0.660	0.911	21.16	22.00		0.627	0.761	-16.5%
LTE Band 25	20M_QPSK_1_0	Back	10mm		26140	1860	21.63	23.00		0.801	1.098	21.73	23.00		0.760	1.018	-7.3%
LTE Band 66	20M_QPSK_50_0	Front	10mm		132322	1745	21.14	22.00		0.644	0.785	20.96	22.00		0.666	0.846	7.8%
WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	1	2412	15.90	16.50	100.00	0.138	0.158	15.90	16.50	100.00	0.112	0.129	-18.4%
WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	11	2462	15.60	16.50	100.00	0.255	0.314	15.60	16.50	100.00	0.278	0.342	8.9%
Bluetooth	1Mbps	Back	10mm	Ant 1	78	2480	14.16	16.00	76.60	0.023	0.038	14.16	16.00	76.60	0.022	0.037	-2.6%
WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1	64	5320	18.26	19.00	94.16	0.085	0.107	18.26	19.00	94.16	0.092	0.116	8.4%
WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 2	56	5280	18.00	19.00	94.85	0.147	0.195	18.00	19.00	94.85	0.130	0.172	-11.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	138	5690	18.25	19.00	86.51	0.117	0.161	18.25	19.00	86.51	0.112	0.154	-4.3%
WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	138	5690	18.00	19.00	85.71	0.133	0.195	18.00	19.00	85.71	0.146	0.214	9.7%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	155	5775	18.18	19.00	86.51	0.100	0.140	18.18	19.00	86.51	0.084	0.117	-16.4%
WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	155	5775	18.30	19.00	85.71	0.161	0.221	18.30	19.00	85.71	0.176	0.241	9.0%

Note:

The SAR verification of the worst configurations in GSM1900, WCDMA B2, LTE B2 / B4 / B5 / B66, 2.4GHz WLAN / Bluetooth and 5GHz WLAN is reported in this section, the deviation among the verification and the original results is within ±20% and justify the referenced SAR results are representative of the performance of this device



## 16. Supplemental tuner tests results

### General Note:

- The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
- To evaluate all of the tuner states, the 136 tuner states are divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination. The bands which are dynamically tuned are split into two separate antennas, so each antenna system will have its own test plan to cover the corresponding 136 tuner states.
- The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

### 16.1 Supplemental Head SAR results

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
									Auto-Tune (State 23)	Default (State 14)	1	17	33	49	65	81	97	113	129
WCDMA B5	RMC12.2Kbps	826.4	4132	N/A	N/A	Right Cheek	0 mm	0.168	0.246	0.232	0.024	0.137	0.078	0.164	0.091	0.006	0.106	0.041	0.085
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
LTE B5	QPSK	836.5	20525	1	0	Right Cheek	0 mm	0.211	0.305	0.283	0.077	0.075	0.088	0.211	0.118	0.139	0.132	0.089	0.121
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
LTE B7	QPSK	2560	21350	1	0	Right Cheek	0 mm	0.23	0.399	0.352	0.331	0.389	0.336	0.104	0.192	0.18	0.214	0.212	0.221
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
LTE B12	QPSK	707.5	23095	1	0	Right Cheek	0 mm	0.212	0.302	0.208	0.029	0.012	0.035	0.011	0.172	0.221	0.104	0.289	0.127
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
LTE B13	QPSK	782	23230	1	0	Right Cheek	0 mm	0.229	0.302	0.235	0.054	0.053	0.026	0.018	0.009	0.018	0.183	0.112	0.201
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
LTE B17	QPSK	710	23790	1	0	Right Cheek	0 mm	0.203	0.281	0.188	0.036	0.017	0.047	0.019	0.094	0.031	0.111	0.261	0.104
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
LTE B26	QPSK	831.5	26865	1	0	Left Cheek	0 mm	0.23	0.291	0.266	0.21	0.288	0.062	0.092	0.014	0.01	0.002	0.072	0.05
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)										
CDMA BC0	1xRTT RC3 SO55	824.7	1013	N/A	N/A	Right Cheek	0 mm	0.179	0.268	0.255	0.197	0.265	0.071	0.12	0.02	0.021	0.006	0.003	0.024



**16.2 Supplemental Body SAR results**

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
									Auto-Tune (State 11)	Default (State 14)	9	25	41	57	73	89	105	121
WCDMA B5	RMC12.2Kbps	826.4	4132	N/A	N/A	Back	10 mm	0.762	1.127	1.074	1.068	0.954	0.495	0.832	0.152	0.188	0.053	0.038
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
LTE B5	QPSK	836.5	20525	1	0	Front	10 mm	0.645	1.152	1.023	1.149	0.791	0.608	0.924	0.149	0.282	0.049	0.067
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
LTE B7	QPSK	2535	21100	1	0	Back	10 mm	0.695	1.427	1.367	0.865	1.017	0.962	1.034	1.013	1.167	1.237	1.351
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
LTE B12	QPSK	707.5	23095	1	0	Front	10 mm	0.721	1.268	0.991	0.382	0.261	0.482	0.281	0.807	0.431	0.962	0.597
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
LTE B13	QPSK	782	23230	1	0	Back	10 mm	0.596	1.037	0.721	0.759	1.035	0.495	0.827	0.265	0.455	0.162	0.204
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
LTE B17	QPSK	710	23790	1	0	Front	10 mm	0.723	1.214	0.905	0.441	0.346	0.537	0.339	0.783	0.441	1.013	0.631
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
LTE B26	QPSK	831.5	26865	1	0	Front	10 mm	0.646	1.067	1.039	0.994	0.448	0.781	0.572	0.342	0.608	0.161	0.364
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)									
CDMA BC0	1xRTT RC3 SO32	836.52	384	1	0	Back	10 mm	0.794	1.221	0.938	0.818	0.337	0.833	0.409	0.442	0.502	0.197	0.418

Test Engineer : Iran Wang Galen Chang Steven Chang Kurt Liu Bevis Chang and Tom Jiang

## **17. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/ $\kappa$ <sup>(b)</sup>	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.00	N	1	1	1	6.0	6.0
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.00	R	1.732	1	1	0.6	0.6
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	2.90	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.00	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.10	R	1.732	1	1	3.5	3.5
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						11.6%	11.6%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						23.2%	23.1%

**Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.00	R	1.732	1	1	2.3	2.3
<b>Test Sample Related</b>							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.60	R	1.732	1	1	3.8	3.8
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						12.7%	12.6%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						25.4%	25.3%

**Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz**



## **18. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [9] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [10] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.