

HAC_E_Dipole_1880_170531

DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2017/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn577; Calibrated: 2016/9/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:
 dx=0.5000 mm, dy=0.5000 mm



Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 139.9 V/m; Power Drift = 0.01 dB
 PMR not calibrated. PMF = 1.000 is applied.
 E-field emissions = 90.35 V/m
 Average value of Total=(89.06+90.35) / 2 = 89.705 V/m

PMF scaled E-field

Grid 1 M3 88.02 V/m	Grid 2 M3 89.06 V/m	Grid 3 M3 87.43 V/m
Grid 4 M3 69.58 V/m	Grid 5 M3 70.89 V/m	Grid 6 M3 70.20 V/m
Grid 7 M3 88.60 V/m	Grid 8 M3 90.35 V/m	Grid 9 M3 88.72 V/m

Cursor:

Total = 90.35 V/m
 E Category: M3
 Location: 0, 31, 9.7 mm

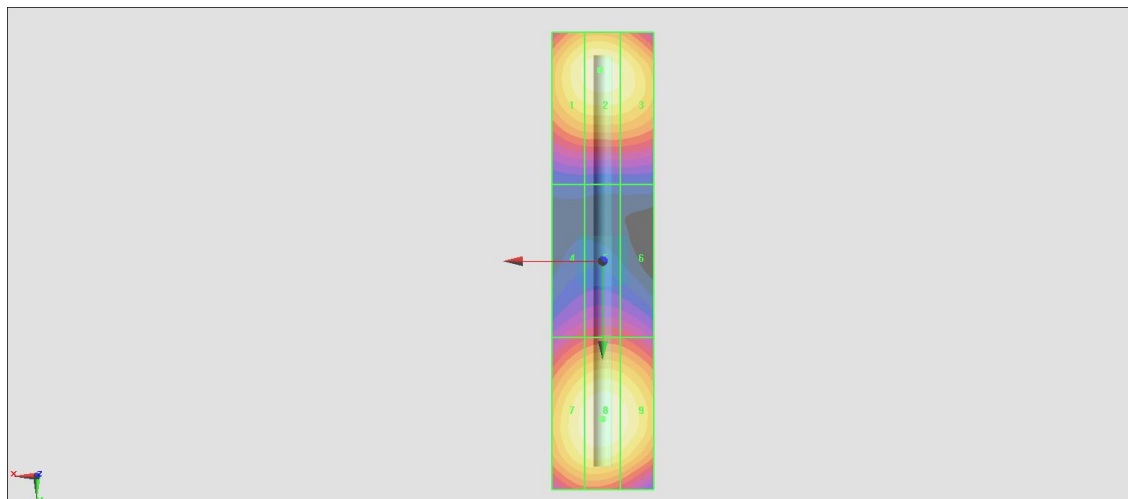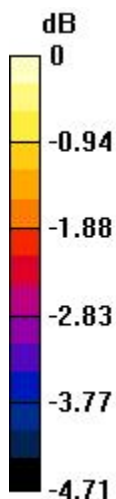

0 dB = 90.35 V/m = 39.12 dBV/m