



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 9889, 9890
FCC ID : IHDT56WE3
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 19, 2017 and testing was completed on Mar. 08, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Specification of Accessory 6

 1.6 Modification of EUT 7

 1.7 Testing Location 7

 1.8 Applicable Standards..... 7

 1.9 Re-use of Measured Data 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System..... 11

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

3 TEST RESULT 13

 3.1 Radiated Band Edges and Spurious Emission Measurement 13

 3.2 AC Conducted Emission Measurement..... 17

 3.3 Antenna Requirements 21

4 LIST OF MEASURING EQUIPMENT 22

5 UNCERTAINTY OF EVALUATION 23

APPENDIX A. RADIATED SPURIOUS EMISSION

APPENDIX B. DUTY CYCLE PLOTS

APPENDIX C. SETUP PHOTOGRAPHS

APPENDIX D. REFERENCE REPORT



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|-----------------------|--------|---|
| 3.1 | 15.247(d) | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 7.76 dB at 36.790 MHz |
| 3.2 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 12.68 dB at 0.552 MHz |
| 3.3 | 15.203 & 15.247(b) | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | 9889, 9890 |
| FCC ID | IHDT56WE3 |
| EUT supports Radios application | GSM/GPRS/EDGE/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE/Bluetooth v4.2 LE |
| IMEI Code | Radiation: 355647080006330/355647080006348 Conduction: 355647080005456/355647080005464 for Sample 1 355648080001560 for Sample 2 |
| HW Version | WKHMA1B2-2 |
| SW Version | NRD90M.04 for Dual SIM mobile NRD90M.05 for Single SIM mobile |
| EUT Stage | Identical Prototype |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1(model name: 9889) is dual SIM slot, sample 2(model name: 9890) is single SIM slot.



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx/Rx Channel Frequency Range | 2412 MHz ~ 2462 MHz |
| Antenna Type / Gain | PIFA Antenna |
| Type of Modulation | 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) |

1.5 Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------------|---|------------|-------------------|
| AC Adapter IN | Brand Name | Motorola (AcBel) | Model Name | C-P49 SPN5946A |
| | Power Rating | I/P: 100-240 Vac, 300mA, O/P: 5.2 Vdc, 2000mA | | |
| AC Adapter US | Brand Name | Motorola (AcBel) | Model Name | C-P35 SPN5945A |
| | Power Rating | I/P: 100-240 Vac, 300mA, O/P: 5.2 Vdc, 2000mA | | |
| AC Adapter EU | Brand Name | Motorola (AcBel) | Model Name | C-P36 SPN5944A |
| | Power Rating | I/P: 100-240 Vac, 300mA, O/P: 5.2 Vdc, 2000mA | | |
| AC Adapter UK | Brand Name | Motorola (AcBel) | Model Name | C-P37 SPN5940A |
| | Power Rating | I/P: 100-240 Vac, 300mA, O/P: 5.2 Vdc, 2000mA | | |
| AC Adapter AR | Brand Name | Motorola (AcBel) | Model Name | C-P47 SPN5942A |
| | Power Rating | I/P: 100-240 Vac, 500mA, O/P: 5.2 Vdc, 2000mA | | |
| Battery | Brand Name | Motorola (Sunwoda) | Model Name | HC60 |
| | Power Rating | 3.8Vdc,3780/4000mAh (Min/Typ) | Type | Li-ion |
| Earphone | Brand Name | Motorola (hetong) | Model Name | PY-13A1602-01KC39 |
| | Signal Line Type | 1.3 meter, non-shielded cable, without ferrite core | | |
| USB Cable | Brand Name | Motorola (Sai Bao) | Model Name | SYD-A017A |
| | Signal Line Type | 1.0 meter, shielded cable, without ferrite core | | |



1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

| | | | |
|---------------------------|--|-----------|-----------------------------|
| Test Site | Sporton International (KunShan) INC. | | |
| Test Site Location | No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958 | | |
| Test Site No. | Sporton Site No. | | FCC Registration No. |
| | CO01-KS | 03CH02-KS | 418269 |

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Re-use of Measured Data

1.6.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 9889, 9890, FCC ID: IHDT56WE3) is electrically identical to the reference device (Model: 9888, FCC ID: IHDT56WE1) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

1.6.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FR711809C for the reference device Model: 9888, FCC ID: IHDT56WE1):

1.6.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, the test result were consistent with FCC ID: IHDT56WE1.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

1.6.4 Reference detail Section:

| Equipment Class | Reference FCC ID | Folder Test/RF Exposure | Report Title/Section |
|-----------------|------------------|-------------------------|----------------------|
| DSS | IHDT56WE1 | Part15C(FR711809A) | Conducted item |
| DTS (BLE) | IHDT56WE1 | Part15C(FR711809B) | Conducted item |
| DTS (WLAN) | IHDT56WE1 | Part15C(FR711809C) | Conducted item |



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst case was recorded in this report.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 1 | 2412 | 7 | 2442 |
| | 2 | 2417 | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | 2457 |
| | 5 | 2432 | 11 | 2462 |
| | 6 | 2437 | - | - |



2.2 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

| Modulation | Data Rate |
|--------------|-----------|
| 802.11b | 1 Mbps |
| 802.11g | 6 Mbps |
| 802.11n HT20 | MCS0 |


| Test Cases | |
|-----------------------------|---|
| AC Conducted Emission | Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) + SIM 1 for Sample 1 |
| | Mode 2: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) for Sample 2 |

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

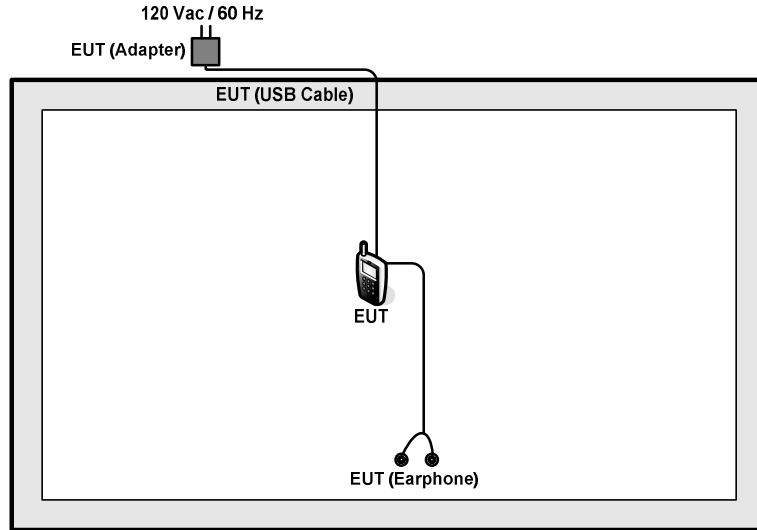

<AC Conducted Emission Mode>

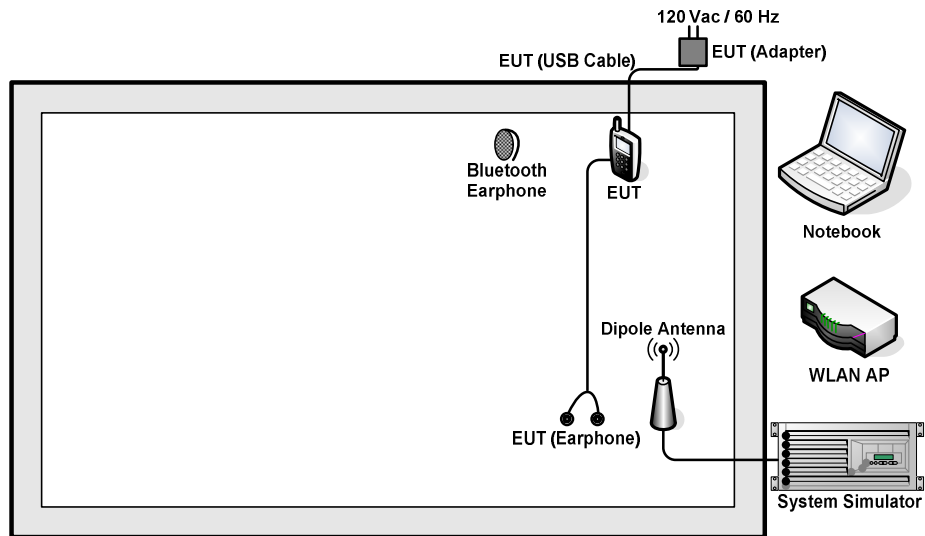



2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|------------|------------|----------------|------------|--|
| 1. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8 m |
| 2. | WLAN AP | Linksys | WRT600N | Q87-WRT600NV11 | N/A | Unshielded, 1.8 m |
| 3. | Notebook | Lenovo | G480 | N/A | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 4. | Bluetooth Earphone | Lenovo | LBH308 | N/A | N/A | N/A |

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.1.4 Test Setup


For radiated emissions below 30MHz

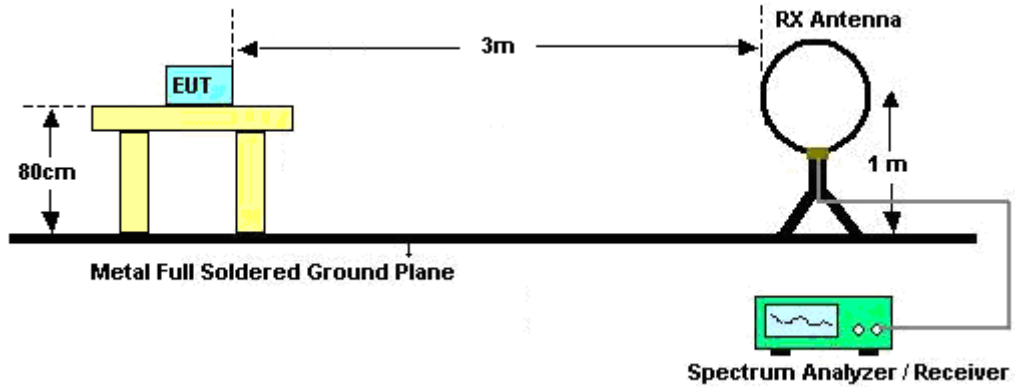

For radiated emissions from 30MHz to 1GHz

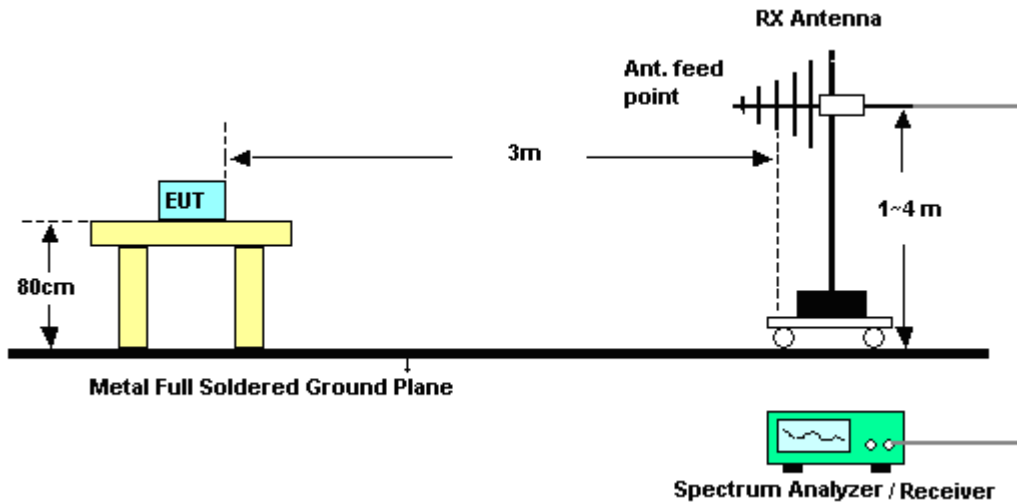

For radiated emissions above 1GHz

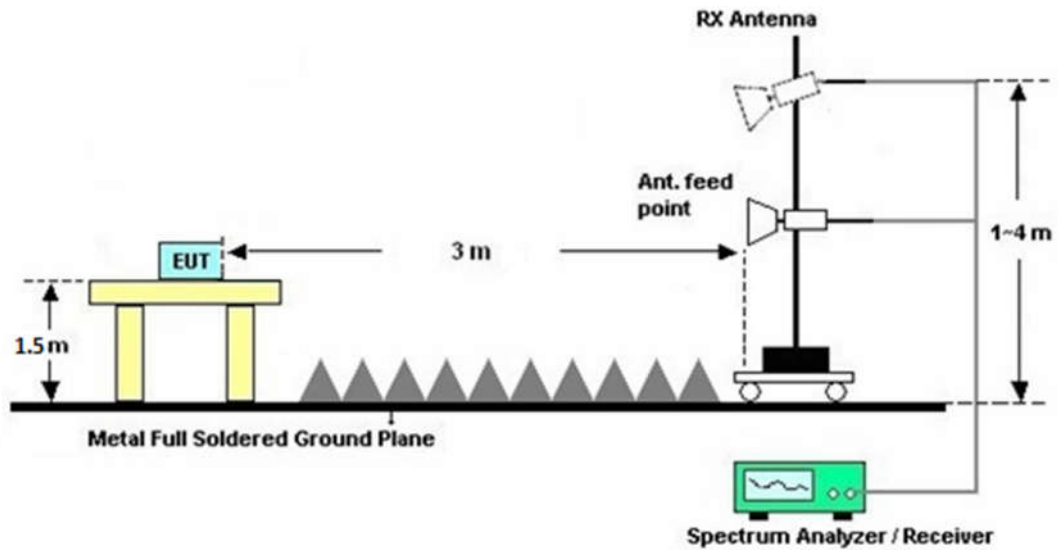

3.1.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission (MHz) | Conducted Limit (dBµV) | |
|--------------------------------|------------------------|-----------|
| | Quasi-Peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.2.4 Test Setup

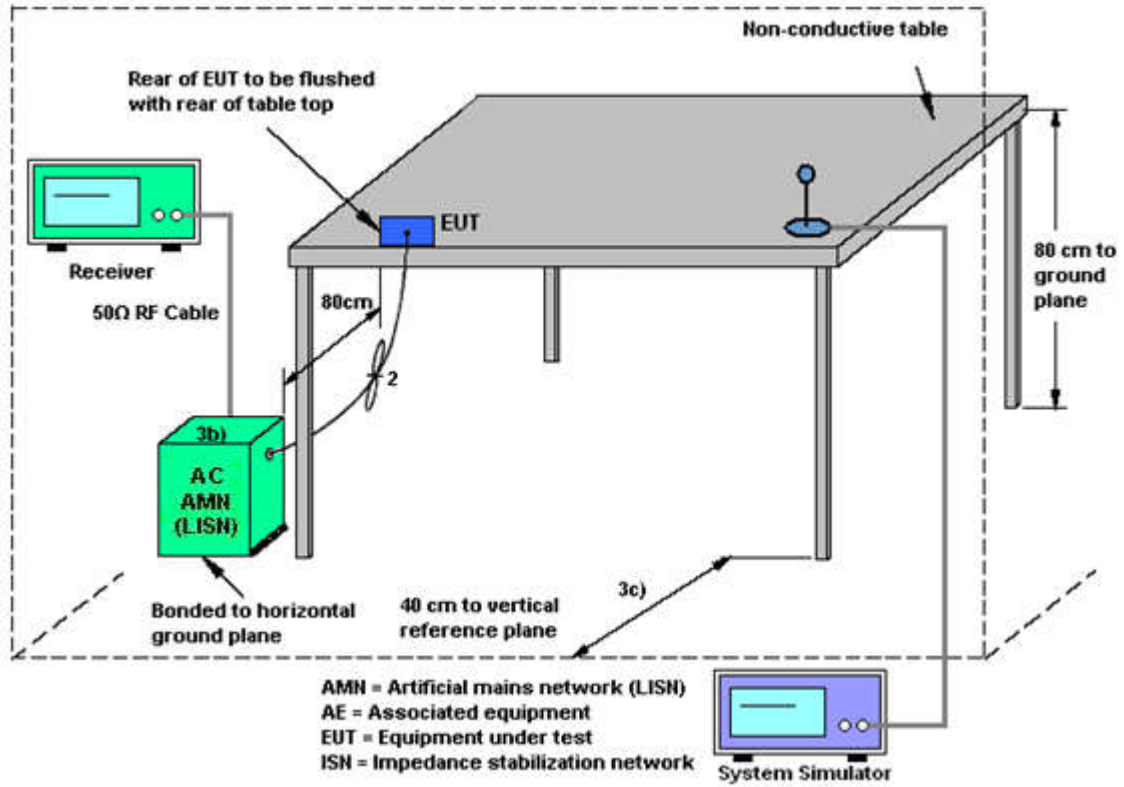



3.2.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 20~22°C |
| Test Engineer : | Peter Wei | Relative Humidity : | 40~42% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) + SIM 1 for Sample 1 | | |

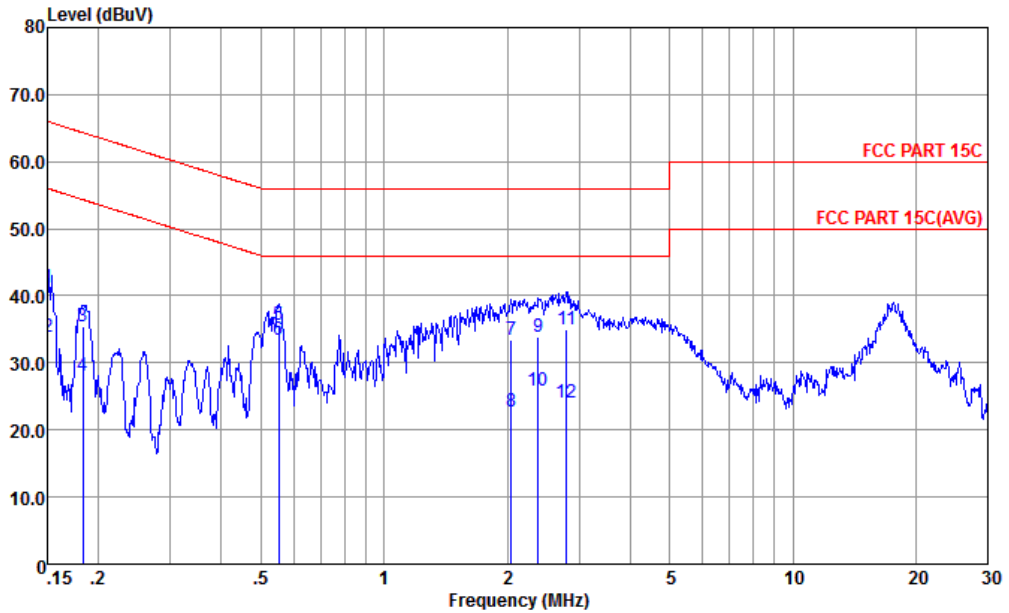


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 1
 IMEI : 355647080005456/355647080005464 #11

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|-----|-------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.150 | 41.32 | -24.68 | 66.00 | 30.40 | 0.53 | 10.39 | QP |
| 2 | 0.150 | 33.92 | -22.08 | 56.00 | 23.00 | 0.53 | 10.39 | Average |
| 3 | 0.183 | 35.46 | -28.87 | 64.33 | 24.80 | 0.31 | 10.35 | QP |
| 4 | 0.183 | 28.16 | -26.17 | 54.33 | 17.50 | 0.31 | 10.35 | Average |
| 5 | 0.552 | 35.62 | -20.38 | 56.00 | 25.21 | 0.23 | 10.18 | QP |
| 6 * | 0.552 | 33.32 | -12.68 | 46.00 | 22.91 | 0.23 | 10.18 | Average |
| 7 | 2.044 | 33.37 | -22.63 | 56.00 | 23.00 | 0.18 | 10.19 | QP |
| 8 | 2.044 | 22.67 | -23.33 | 46.00 | 12.30 | 0.18 | 10.19 | Average |
| 9 | 2.384 | 33.78 | -22.22 | 56.00 | 23.40 | 0.18 | 10.20 | QP |
| 10 | 2.384 | 25.88 | -20.12 | 46.00 | 15.50 | 0.18 | 10.20 | Average |
| 11 | 2.794 | 35.00 | -21.00 | 56.00 | 24.61 | 0.18 | 10.21 | QP |
| 12 | 2.794 | 24.00 | -22.00 | 46.00 | 13.61 | 0.18 | 10.21 | Average |



| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 20~22°C |
| Test Engineer : | Peter Wei | Relative Humidity : | 40~42% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Function Type : | GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) + SIM 1 for Sample 1 | | |

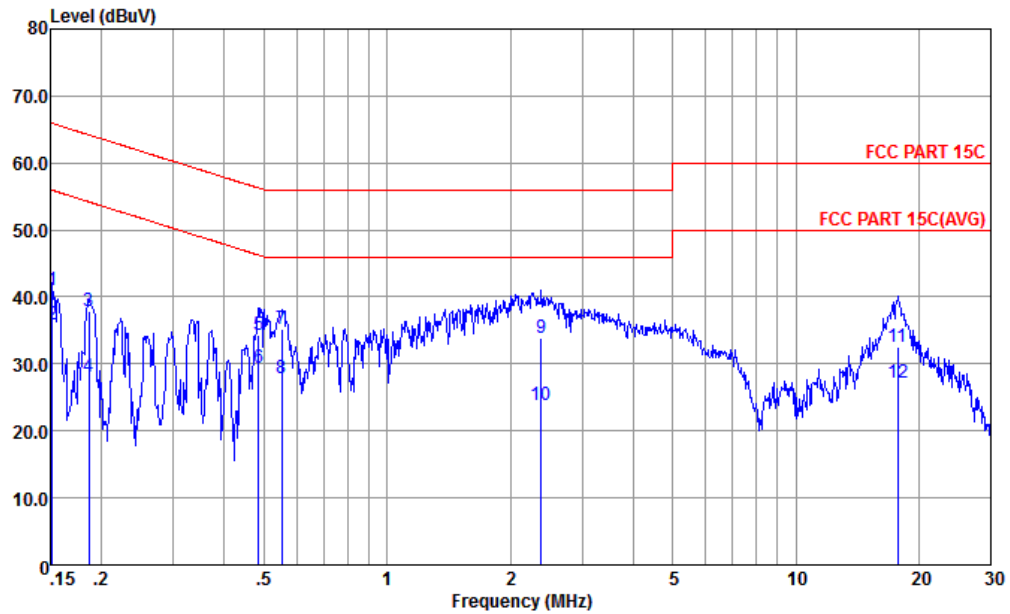

Site : C001-KS
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL
 mode : Mode 1
 IMEI : 355647080005456/355647080005464 #11

| | Freq | Level | Over Limit | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|------------|-------|-------|------|-------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.152 | 40.99 | -24.92 | 65.91 | 30.30 | 0.30 | 10.39 | QP |
| 2 | 0.152 | 35.89 | -20.02 | 55.91 | 25.20 | 0.30 | 10.39 | Average |
| 3 | 0.186 | 37.86 | -26.34 | 64.20 | 27.20 | 0.31 | 10.35 | QP |
| 4 | 0.186 | 28.16 | -26.04 | 54.20 | 17.50 | 0.31 | 10.35 | Average |
| 5 | 0.484 | 34.41 | -21.86 | 56.27 | 23.90 | 0.32 | 10.19 | QP |
| 6 * | 0.484 | 29.41 | -16.86 | 46.27 | 18.90 | 0.32 | 10.19 | Average |
| 7 | 0.552 | 35.11 | -20.89 | 56.00 | 24.60 | 0.33 | 10.18 | QP |
| 8 | 0.552 | 27.81 | -18.19 | 46.00 | 17.30 | 0.33 | 10.18 | Average |
| 9 | 2.384 | 33.98 | -22.02 | 56.00 | 23.40 | 0.38 | 10.20 | QP |
| 10 | 2.384 | 23.78 | -22.22 | 46.00 | 13.20 | 0.38 | 10.20 | Average |
| 11 | 17.755 | 32.58 | -27.42 | 60.00 | 21.60 | 0.26 | 10.72 | QP |
| 12 | 17.755 | 27.18 | -22.82 | 50.00 | 16.20 | 0.26 | 10.72 | Average |



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--------------------------------------|--------------|-----------|------------------|----------------------------|------------------|---------------|---------------|--------------------------|
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz; Max 30dBm | Aug. 09, 2016 | Mar. 08, 2017 | Aug. 08, 2017 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY551502 08 | 10Hz~44GHz, MAX 30dB | Apr. 22, 2016 | Mar. 08, 2017 | Apr. 21, 2017 | Radiation (03CH02-KS) |
| Loop Antenna | R&S | HFH2-Z2 | 100321 | 9kHz~30MHz | Nov. 23, 2016 | Mar. 08, 2017 | Nov. 22, 2017 | Radiation (03CH01-KS) |
| Bilog Antenna | TeseQ | CBL6112D | 37879 | 30MHz~2GHz | Aug. 20, 2016 | Mar. 08, 2017 | Aug. 19, 2017 | Radiation (03CH02-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 75957 | 1GHz~18GHz | Oct. 22, 2016 | Mar. 08, 2017 | Oct. 21, 2017 | Radiation (03CH02-KS) |
| SHF-EHF Horn | Schwarzbeck | BBHA 9170 | BBHA1702 49 | 15GHz~40GHz | Feb. 15, 2017 | Mar. 08, 2017 | Feb. 14, 2018 | Radiation (03CH02-KS) |
| Amplifier | com-power | PA-103A | 161069 | 1kHz~1000MHz / 32 dB | Apr. 22, 2016 | Mar. 08, 2017 | Apr. 21, 2017 | Radiation (03CH02-KS) |
| Amplifier | Agilent | 8449B | 3008A023 84 | 1GHz~26.5GHz | Oct. 13, 2016 | Mar. 08, 2017 | Oct. 12, 2017 | Radiation (03CH02-KS) |
| SHF-EHF Horn | Schwarzbeck | BBHA 9170 | BBHA1702 49 | 15GHz~40GHz | Feb. 15, 2017 | Mar. 08, 2017 | Feb. 14, 2018 | Radiation (03CH02-KS) |
| AC Power Source | Chroma | 61601 | 616010002 473 | N/A | NCR | Mar. 08, 2017 | NCR | Radiation (03CH02-KS) |
| Turn Table | MF | MF7802 | N/A | 0~360 degree | NCR | Mar. 08, 2017 | NCR | Radiation (03CH02-KS) |
| Antenna Mast | MF | MF7802 | N/A | 1 m~4 m | NCR | Mar. 08, 2017 | NCR | Radiation (03CH02-KS) |
| EMI Receiver | R&S | ESCI7 | 100768 | 9kHz~7GHz | Apr. 29, 2016 | Feb. 27, 2017 | Apr. 28, 2017 | Conduction (CO01-KS) |
| AC LISN | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 13, 2016 | Feb. 27, 2017 | Oct. 12, 2017 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060105 | 9kHz~30MHz | Oct. 13, 2016 | Feb. 27, 2017 | Oct. 12, 2017 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP00000 0811 | AC 0V~300V, 45Hz~1000Hz | Oct. 13, 2016 | Feb. 27, 2017 | Oct. 12, 2017 | Conduction (CO01-KS) |

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.3dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.2dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.7dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.3dB |
|---|-------|



Appendix A. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|-----------------------------|--------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b CH 01 2412MHz | | 2388.52 | 42.59 | -31.41 | 74 | 43.95 | 25.4 | 4.76 | 31.52 | 380 | 269 | P | H |
| | | 2387.48 | 32.89 | -21.11 | 54 | 34.25 | 25.4 | 4.76 | 31.52 | 380 | 269 | A | H |
| | * | 2412 | 101.47 | - | - | 102.65 | 25.54 | 4.78 | 31.5 | 380 | 269 | P | H |
| | * | 2410 | 98.32 | - | - | 99.5 | 25.54 | 4.78 | 31.5 | 380 | 269 | A | H |
| | | 2387.61 | 41.42 | -32.58 | 74 | 42.78 | 25.4 | 4.76 | 31.52 | 387 | 302 | P | V |
| | | 2388.91 | 31.23 | -22.77 | 54 | 32.59 | 25.4 | 4.76 | 31.52 | 387 | 302 | A | V |
| | * | 2412 | 99.51 | - | - | 100.69 | 25.54 | 4.78 | 31.5 | 387 | 302 | P | V |
| | * | 2410 | 96.39 | - | - | 97.57 | 25.54 | 4.78 | 31.5 | 387 | 302 | A | V |
| 802.11b CH 06 2437MHz | | 2388.65 | 42.16 | -31.84 | 74 | 43.52 | 25.4 | 4.76 | 31.52 | 376 | 268 | P | H |
| | | 2387.87 | 30.72 | -23.28 | 54 | 32.08 | 25.4 | 4.76 | 31.52 | 376 | 268 | A | H |
| | * | 2438 | 101.91 | - | - | 102.74 | 25.83 | 4.82 | 31.48 | 376 | 268 | P | H |
| | * | 2438 | 98.77 | - | - | 99.6 | 25.83 | 4.82 | 31.48 | 376 | 268 | A | H |
| | | 2485.72 | 43.31 | -30.69 | 74 | 43.8 | 26.11 | 4.86 | 31.46 | 376 | 268 | P | H |
| | | 2483.5 | 32.17 | -21.83 | 54 | 32.66 | 26.11 | 4.86 | 31.46 | 376 | 268 | A | H |
| | | 2365.51 | 40.65 | -33.35 | 74 | 42.17 | 25.29 | 4.73 | 31.54 | 334 | 317 | P | V |
| | | 2387.61 | 29.66 | -24.34 | 54 | 31.02 | 25.4 | 4.76 | 31.52 | 334 | 317 | A | V |
| | * | 2438 | 97.76 | - | - | 98.59 | 25.83 | 4.82 | 31.48 | 334 | 317 | P | V |
| | * | 2438 | 94.58 | - | - | 95.41 | 25.83 | 4.82 | 31.48 | 334 | 317 | A | V |
| | | 2487.46 | 42 | -32 | 74 | 42.49 | 26.11 | 4.86 | 31.46 | 334 | 317 | P | V |
| | 2483.5 | 31.23 | -22.77 | 54 | 31.72 | 26.11 | 4.86 | 31.46 | 334 | 317 | A | V | |



| | | | | | | | | | | | | | |
|-----------------------------|---|---------|--------|--------|----|--------|-------|------|-------|-----|-----|---|---|
| 802.11b CH 11 2462MHz | | 2483.62 | 47.37 | -26.63 | 74 | 47.86 | 26.11 | 4.86 | 31.46 | 118 | 266 | P | H |
| | | 2483.5 | 38.4 | -15.6 | 54 | 38.89 | 26.11 | 4.86 | 31.46 | 118 | 266 | A | H |
| | * | 2460 | 101.33 | | | 101.99 | 25.97 | 4.84 | 31.47 | 118 | 266 | P | H |
| | * | 2460 | 97.89 | | | 98.55 | 25.97 | 4.84 | 31.47 | 118 | 266 | A | H |
| | | 2483.5 | 45.7 | -28.3 | 74 | 46.19 | 26.11 | 4.86 | 31.46 | 354 | 306 | P | V |
| | | 2483.68 | 36.05 | -17.95 | 54 | 36.54 | 26.11 | 4.86 | 31.46 | 354 | 306 | A | V |
| | * | 2462 | 96.4 | | | 97.06 | 25.97 | 4.84 | 31.47 | 354 | 306 | P | V |
| | * | 2464 | 93.18 | | | 93.84 | 25.97 | 4.84 | 31.47 | 354 | 306 | A | V |
| Remark | <ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11b CH 01 2412MHz | | 4824 | 49.82 | -24.18 | 74 | 71.43 | 30.9 | 6.87 | 59.38 | 100 | 255 | P | H |
| | | 4824 | 43.8 | -30.2 | 74 | 65.41 | 30.9 | 6.87 | 59.38 | 150 | 360 | P | V |
| 802.11b CH 06 2437MHz | | 4872 | 48.78 | -25.22 | 74 | 70.05 | 31.01 | 6.86 | 59.14 | 150 | 360 | P | H |
| | | 7308 | 42.31 | -31.69 | 74 | 57.05 | 35.34 | 8.47 | 58.55 | 150 | 360 | P | H |
| | | 4872 | 43.27 | -30.73 | 74 | 64.54 | 31.01 | 6.86 | 59.14 | 150 | 360 | P | V |
| | | 7308 | 41.48 | -32.52 | 74 | 56.22 | 35.34 | 8.47 | 58.55 | 150 | 360 | P | V |
| 802.11b CH 11 2462MHz | | 4926 | 45.77 | -28.23 | 74 | 66.71 | 31.12 | 6.84 | 58.9 | 150 | 360 | P | H |
| | | 7386 | 42.09 | -31.91 | 74 | 57.03 | 35.55 | 8.49 | 58.98 | 150 | 360 | P | H |
| | | 4926 | 43.25 | -30.75 | 74 | 64.19 | 31.12 | 6.84 | 58.9 | 150 | 360 | P | V |
| | | 7386 | 41.45 | -32.55 | 74 | 56.39 | 35.55 | 8.49 | 58.98 | 150 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz) and 802.11g CH 06 (2437MHz).



| | | | | | | | | | | | | | |
|-----------------------------|---|---------|-------|--------|----|-------|-------|------|-------|-----|-----|---|---|
| 802.11g CH 11 2462MHz | * | 2460 | 99.27 | - | - | 99.93 | 25.97 | 4.84 | 31.47 | 323 | 261 | P | H |
| | * | 2460 | 91.5 | - | - | 92.16 | 25.97 | 4.84 | 31.47 | 323 | 261 | A | H |
| | | 2483.74 | 56.98 | -17.02 | 74 | 57.47 | 26.11 | 4.86 | 31.46 | 323 | 261 | P | H |
| | | 2483.5 | 43.33 | -10.67 | 54 | 43.82 | 26.11 | 4.86 | 31.46 | 323 | 261 | A | H |
| | * | 2460 | 94.51 | - | - | 95.17 | 25.97 | 4.84 | 31.47 | 294 | 316 | P | V |
| | * | 2460 | 86.69 | - | - | 87.35 | 25.97 | 4.84 | 31.47 | 294 | 316 | A | V |
| | | 2483.92 | 51.74 | -22.26 | 74 | 52.23 | 26.11 | 4.86 | 31.46 | 294 | 316 | P | V |
| | | 2483.5 | 39.05 | -14.95 | 54 | 39.54 | 26.11 | 4.86 | 31.46 | 294 | 316 | A | V |
| Remark | <ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz) and CH 06 (2437MHz) and CH 11 (2462MHz).



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-------------------------------|---------|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT20 CH 01 2412MHz | | 2389.95 | 54.34 | -19.66 | 74 | 55.7 | 25.4 | 4.76 | 31.52 | 134 | 259 | P | H |
| | | 2389.95 | 38.83 | -15.17 | 54 | 40.19 | 25.4 | 4.76 | 31.52 | 134 | 259 | A | H |
| | * | 2410 | 99.77 | - | - | 100.95 | 25.54 | 4.78 | 31.5 | 134 | 259 | P | H |
| | * | 2410 | 92.14 | - | - | 93.32 | 25.54 | 4.78 | 31.5 | 134 | 259 | A | H |
| | | 2389.95 | 48.59 | -25.41 | 74 | 49.95 | 25.4 | 4.76 | 31.52 | 100 | 288 | P | V |
| | | 2389.95 | 34.13 | -19.87 | 54 | 35.49 | 25.4 | 4.76 | 31.52 | 100 | 288 | A | V |
| | * | 2410 | 94.47 | - | - | 95.65 | 25.54 | 4.78 | 31.5 | 100 | 288 | P | V |
| | * | 2410 | 86.89 | - | - | 88.07 | 25.54 | 4.78 | 31.5 | 100 | 288 | A | V |
| 802.11n HT20 CH 06 2437MHz | | 2388.52 | 43.5 | -30.5 | 74 | 44.86 | 25.4 | 4.76 | 31.52 | 187 | 253 | P | H |
| | | 2389.95 | 33.85 | -20.15 | 54 | 35.21 | 25.4 | 4.76 | 31.52 | 187 | 253 | A | H |
| | * | 2440 | 100.53 | - | - | 101.36 | 25.83 | 4.82 | 31.48 | 187 | 253 | P | H |
| | * | 2438 | 92.78 | - | - | 93.61 | 25.83 | 4.82 | 31.48 | 187 | 253 | A | H |
| | | 2483.86 | 46.28 | -27.72 | 74 | 46.77 | 26.11 | 4.86 | 31.46 | 187 | 253 | P | H |
| | | 2483.56 | 36.2 | -17.8 | 54 | 36.69 | 26.11 | 4.86 | 31.46 | 187 | 253 | A | H |
| | | 2389.43 | 41.53 | -32.47 | 74 | 42.89 | 25.4 | 4.76 | 31.52 | 100 | 293 | P | V |
| | | 2389.69 | 31.78 | -22.22 | 54 | 33.14 | 25.4 | 4.76 | 31.52 | 100 | 293 | A | V |
| | * | 2442 | 96.71 | - | - | 97.54 | 25.83 | 4.82 | 31.48 | 100 | 293 | P | V |
| | * | 2438 | 88.77 | - | - | 89.6 | 25.83 | 4.82 | 31.48 | 100 | 293 | A | V |
| | | 2483.8 | 44.76 | -29.24 | 74 | 45.25 | 26.11 | 4.86 | 31.46 | 100 | 293 | P | V |
| | 2483.56 | 33.41 | -20.59 | 54 | 33.9 | 26.11 | 4.86 | 31.46 | 100 | 293 | A | V | |



| | | | | | | | | | | | | | |
|---|---|---------|-------|--------|-------|-------|-------|-------|-------|-----|-----|---|---|
| 802.11n HT20 CH 11 2462MHz | * | 2462 | 98.48 | - | - | 99.14 | 25.97 | 4.84 | 31.47 | 162 | 259 | P | H |
| | * | 2460 | 90.62 | - | - | 91.28 | 25.97 | 4.84 | 31.47 | 162 | 259 | A | H |
| | | 2483.86 | 57.18 | -16.82 | 74 | 57.67 | 26.11 | 4.86 | 31.46 | 162 | 259 | P | H |
| | | 2483.5 | 42.65 | -11.35 | 54 | 43.14 | 26.11 | 4.86 | 31.46 | 162 | 259 | A | H |
| | * | 2460 | 95.56 | - | - | 96.22 | 25.97 | 4.84 | 31.47 | 100 | 257 | P | V |
| | * | 2460 | 87.92 | - | - | 88.58 | 25.97 | 4.84 | 31.47 | 100 | 257 | A | V |
| | | 2483.56 | 54.19 | -19.81 | 74 | 54.68 | 26.11 | 4.86 | 31.46 | 100 | 257 | P | V |
| | 2483.56 | 40.7 | -13.3 | 54 | 41.19 | 26.11 | 4.86 | 31.46 | 100 | 257 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-------------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT20 CH 01 2412MHz | | 4824 | 42.96 | -31.04 | 74 | 64.57 | 30.9 | 6.87 | 59.38 | 150 | 360 | P | H |
| | | 4824 | 40.96 | -33.04 | 74 | 62.57 | 30.9 | 6.87 | 59.38 | 150 | 360 | P | V |
| 802.11n HT20 CH 06 2437MHz | | 4872 | 35.92 | -38.08 | 74 | 57.19 | 31.01 | 6.86 | 59.14 | 150 | 360 | P | H |
| | | 7308 | 41.51 | -32.49 | 74 | 56.25 | 35.34 | 8.47 | 58.55 | 150 | 360 | P | H |
| | | 4872 | 37.06 | -36.94 | 74 | 58.33 | 31.01 | 6.86 | 59.14 | 150 | 360 | P | V |
| | | 7308 | 40.73 | -33.27 | 74 | 55.47 | 35.34 | 8.47 | 58.55 | 150 | 360 | P | V |
| 802.11n HT20 CH 11 2462MHz | | 4926 | 39.97 | -34.03 | 74 | 60.91 | 31.12 | 6.84 | 58.9 | 150 | 360 | P | H |
| | | 7386 | 40.92 | -33.08 | 74 | 55.86 | 35.55 | 8.49 | 58.98 | 150 | 360 | P | H |
| | | 4926 | 37.62 | -36.38 | 74 | 58.56 | 31.12 | 6.84 | 58.9 | 150 | 360 | P | V |
| | | 7386 | 42.4 | -31.6 | 74 | 57.34 | 35.55 | 8.49 | 58.98 | 150 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|-------------------------|--|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 2.4GHz 802.11g LF | | 30 | 20.63 | -19.37 | 40 | 25.34 | 26.3 | 0.09 | 31.1 | 100 | 297 | P | H |
| | | 98.87 | 19.11 | -24.39 | 43.5 | 31.76 | 17.7 | 0.37 | 30.72 | - | - | P | H |
| | | 144.46 | 21.13 | -22.37 | 43.5 | 33.7 | 17.36 | 0.95 | 30.88 | - | - | P | H |
| | | 159.01 | 21.96 | -21.54 | 43.5 | 34.26 | 17.02 | 1.62 | 30.94 | - | - | P | H |
| | | 265.71 | 22.37 | -23.63 | 46 | 33.3 | 18.43 | 1.93 | 31.29 | - | - | P | H |
| | | 718.7 | 24.66 | -21.34 | 46 | 26.04 | 26.99 | 2.49 | 30.86 | - | - | P | H |
| | | 36.79 | 32.24 | -7.76 | 40 | 41.06 | 22.14 | 0.12 | 31.08 | 100 | 214 | P | V |
| | | 48.43 | 23.95 | -16.05 | 40 | 38.87 | 15.93 | 0.62 | 31.47 | - | - | P | V |
| | | 99.84 | 19.07 | -24.43 | 43.5 | 31.58 | 17.8 | 0.39 | 30.7 | - | - | P | V |
| | | 463.59 | 24.22 | -21.78 | 46 | 29.46 | 23.52 | 2.84 | 31.6 | - | - | P | V |
| | | 561.56 | 28.69 | -17.31 | 46 | 32.4 | 24.96 | 2.83 | 31.5 | - | - | P | V |
| | | 848.68 | 28.81 | -17.19 | 46 | 29.07 | 28.49 | 2.44 | 31.19 | - | - | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | |



Note symbol

| | |
|-----|--|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| ! | Test result is over limit line. |
| P/A | Peak or Average |
| H/V | Horizontal or Vertical |



A calculation example for radiated spurious emission is shown as below:

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 2 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| CH 01 | | | | | | | | | | | | | |
| 2412MHz | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix B. Duty Cycle Plots

| Band | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|--------------|---------------|-------|----------|-------------|
| 802.11b | 100.00 | - | - | 10Hz |
| 802.11g | 97.46 | 1.391 | 0.719 | 1kHz |
| 802.11n HT20 | 97.39 | 1.300 | 0.769 | 1kHz |






802.11g

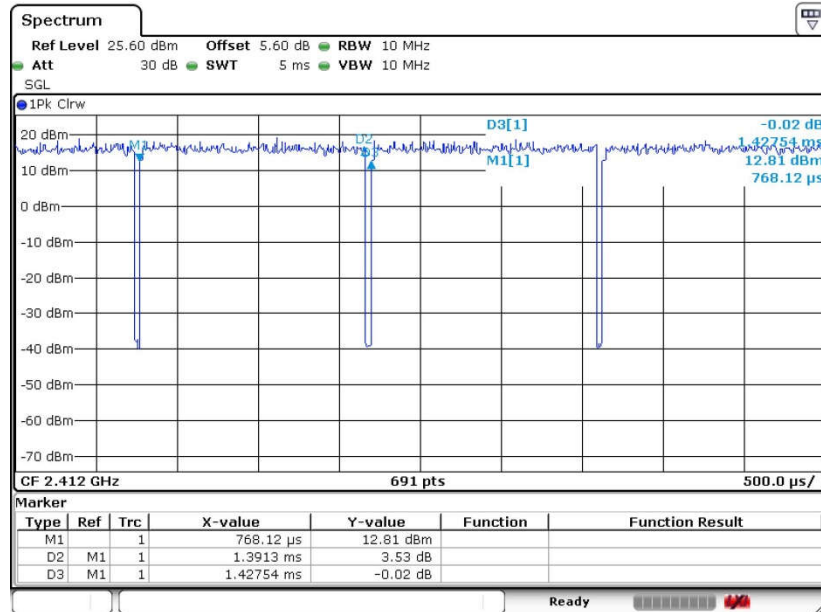

802.11n20

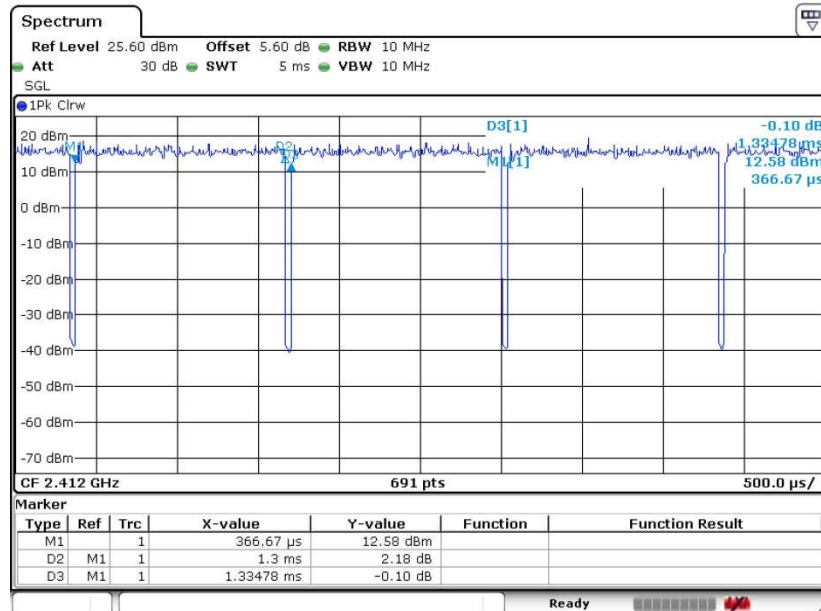



Appendix D. Reference Report

Please refer to Sporton report number FR711809C which is issued separately.