



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10566
FCC ID : IHDT56WG1
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Mar. 22, 2017 and testing was completed on Apr. 24, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Specification of Accessory 7

 1.6. Modification of EUT 7

 1.7. Test Location 8

 1.8. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 21

5. UNCERTAINTY OF EVALUATION 22

APPENDIX A. SETUP PHOTOGRAPHS

APPENDIX B. PRODUCT EQUALITY DECLARATION



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC710416-02	Rev. 01	Initial issue of report	Jun. 21, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 15.69 dB at 0.494 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 10.95 dB at 949.560 MHz



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10566
FCC ID	IHDT56WG1
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/ WLAN2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0+EDR/Bluetooth v4.0/v4.1/v4.2 LE
IMEI Code	Conduction: 353314080084559/353314080084567 for Sample 1 353314080087834 for Sample 2 Radiation: 353314080084252/353314080084260 for Sample 1 353314080087412 for Sample 2
HW Version	98737_1_12
SW Version	Blur-Version.24.10.9.Watson.europe.en.EN
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1 is dual SIM slot, sample 2 is single SIM slot. According to the difference, the sample 1 to perform full test and the sample 2 to verify worse mode for EMC test.
3. This is a variant report for 10566. The product equality declaration can be reference of Appendix B. According to the differences, we only evaluate worse mode of Radiation emission and Conducted emission from original report. All other test cases were quoted on original test report (Sporton Report Number FC710416).



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS: PIFA Antenna FM: External headset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: BPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Uplink is not supported) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS : BPSK FM : FM

1.5. Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	Motorola (Chenyang)	Model Name	C-P56 SPN5987A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA		
Battery	Brand Name	Motorola (SCUD)	Model Name	HC40
	Power Rating	3.8Vdc,2245/2350mAh (Min/Typ)	Type	Li-ion
Earphone	Brand Name	Motorola(Juwei)	Model Name	JWEP0987-W09R
	Signal Line Type	1.22 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola (Liqi)	Model Name	LQ-025280
	Signal Line Type	1.04 meter, shielded cable, without ferrite core		

1.6. Modification of EUT

No modifications are made to the EUT during all test items.



1.7. Test Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-KS	03CH02-KS	418269

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. For FCC 15 Subpart B - Unintentional Radiators, device supporting USB interface or similar peripherals (defined as the Section 15.3 (r) Peripheral device) acting as a peripheral for personal computers shall be authorized as “The Class B personal computers and peripherals” per the Section 15.101 (a) Equipment authorization of unintentional radiators.
3. For other Unintentional Radiators features of this EUT, test reports are be issued separately. Per the Note of the Section 15.101, when device supports features (USB, FM Radio, digital devices...etc) more than one category of authorization, type of authorization shall be appropriately chosen for FCC 15B compliance rule, and the Section 15.101 (b), only those receivers that operate (tune) within the frequency range of 30-960 MHz, CB receivers and radar detectors are subject to the authorizations shown in paragraph (a) of the Section 15.101. However, receivers indicated as being subject to Declaration of Conformity that are contained within a transceiver, the transmitter portion of which is subject to certification, shall be authorized under the verification procedure.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Data application transferred mode (EUT with notebook)	☒	☒	☒


Abbreviations:

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz



Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1	Mode 1 : WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx + SIM1 for Sample 1 Mode 2 : WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx for Sample 2
Radiated Emissions < 1GHz	1	Mode 1 : WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx + SIM1 for Sample 1 Mode 2 : WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx for Sample 2
Radiated Emissions ≥ 1GHz	1	Mode 1 : WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx for Sample 2
Remark: <ol style="list-style-type: none">1. The worst case of AC is mode 1; only the test data of this mode was reported.2. The worst case of RE < 1G is mode 2; only the test data of this mode was reported.		

2.2. Connection Diagram of Test System

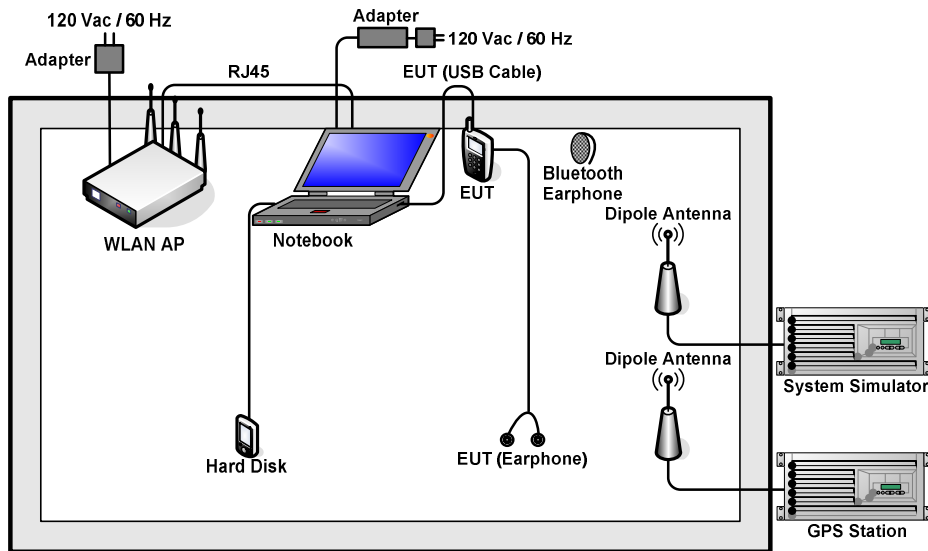



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
5.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
6.	Notebook	DELL	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	Bluetooth Earphone	Lenovo	LBH301	N/A	N/A	N/A
8.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
9.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
10.	SD Card	Kingston	4GB	N/A	N/A	N/A
11.	Hard Disk	Lenovo	F310	FCC DoC	Shielded, 1.2 m	N/A

2.4. EUT Operation Test Setup

The EUT was in WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

The EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx + SIM1 for Sample 1		

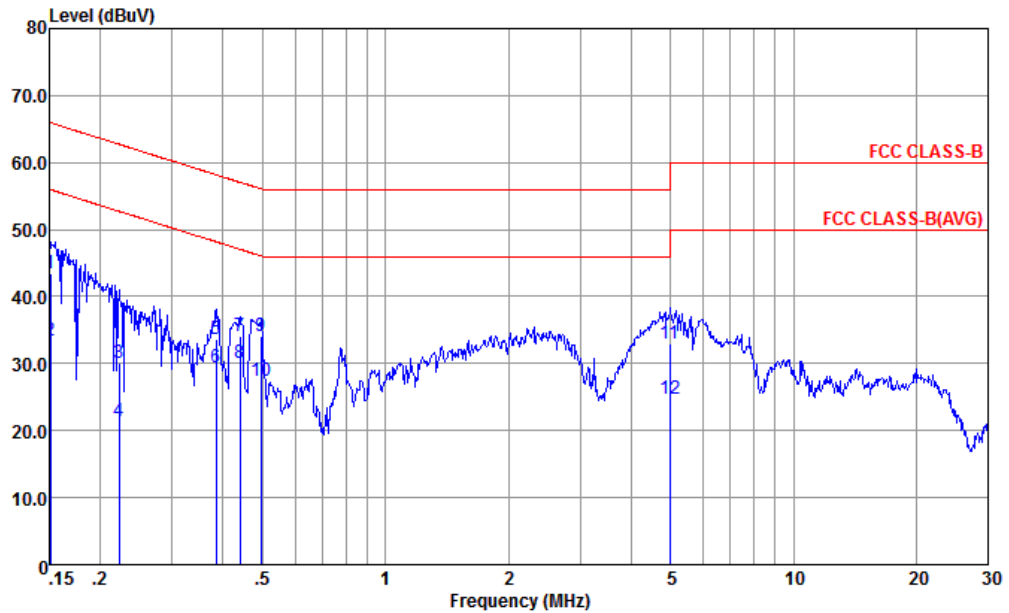


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-20151024 LINE

Mode : Mode 1
 IMEI : 353314080084559/67

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	43.52	-22.44	65.96	32.60	0.53	10.39	QP
2	0.151	33.52	-22.44	55.96	22.60	0.53	10.39	Average
3	0.222	30.13	-32.61	62.74	19.60	0.22	10.31	QP
4	0.222	21.43	-31.31	52.74	10.90	0.22	10.31	Average
5	0.385	33.73	-24.44	58.17	23.29	0.23	10.21	QP
6	0.385	29.33	-18.84	48.17	18.89	0.23	10.21	Average
7	0.440	34.02	-23.05	57.07	23.60	0.23	10.19	QP
8 *	0.440	30.02	-17.05	47.07	19.60	0.23	10.19	Average
9	0.494	34.02	-22.08	56.10	23.60	0.23	10.19	QP
10	0.494	27.32	-18.78	46.10	16.90	0.23	10.19	Average
11	4.978	33.03	-22.97	56.00	22.60	0.19	10.24	QP
12	4.978	24.73	-21.27	46.00	14.30	0.19	10.24	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx + SIM1 for Sample 1		

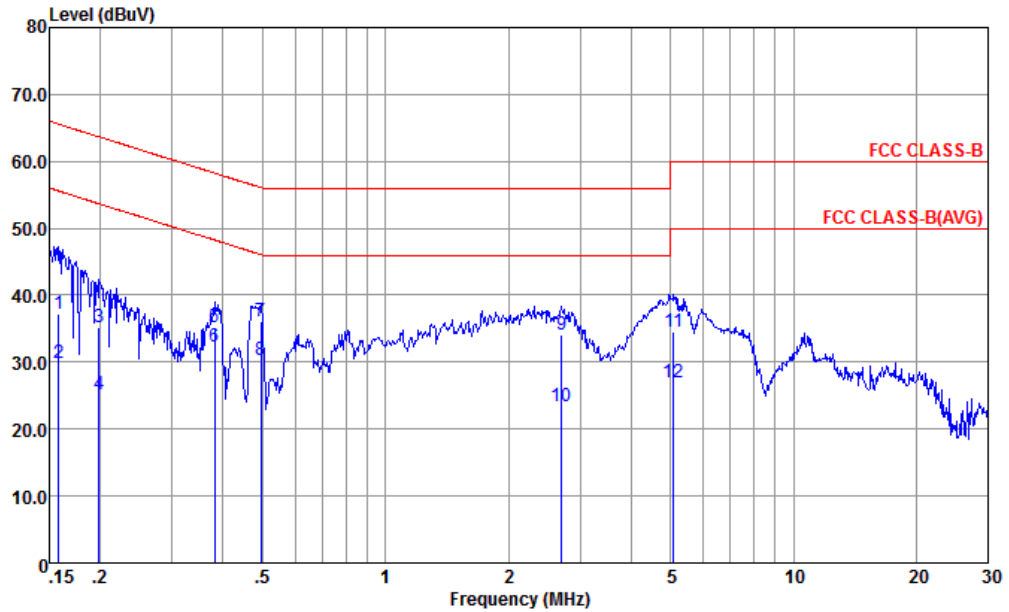

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL

Mode : Mode 1
 IMEI : 353314080084559/67

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.158	37.28	-28.28	65.56	26.60	0.30	10.38	QP
2	0.158	29.78	-25.78	55.56	19.10	0.30	10.38	Average
3	0.199	35.24	-28.43	63.67	24.60	0.31	10.33	QP
4	0.199	25.24	-28.43	53.67	14.60	0.31	10.33	Average
5	0.381	35.13	-23.12	58.25	24.60	0.32	10.21	QP
6	0.381	32.33	-15.92	48.25	21.80	0.32	10.21	Average
7	0.494	36.11	-19.99	56.10	25.60	0.32	10.19	QP
8 *	0.494	30.41	-15.69	46.10	19.90	0.32	10.19	Average
9	2.707	34.18	-21.82	56.00	23.60	0.37	10.21	QP
10	2.707	23.48	-22.52	46.00	12.90	0.37	10.21	Average
11	5.085	34.50	-25.50	60.00	23.89	0.36	10.25	QP
12	5.085	26.90	-23.10	50.00	16.29	0.36	10.25	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

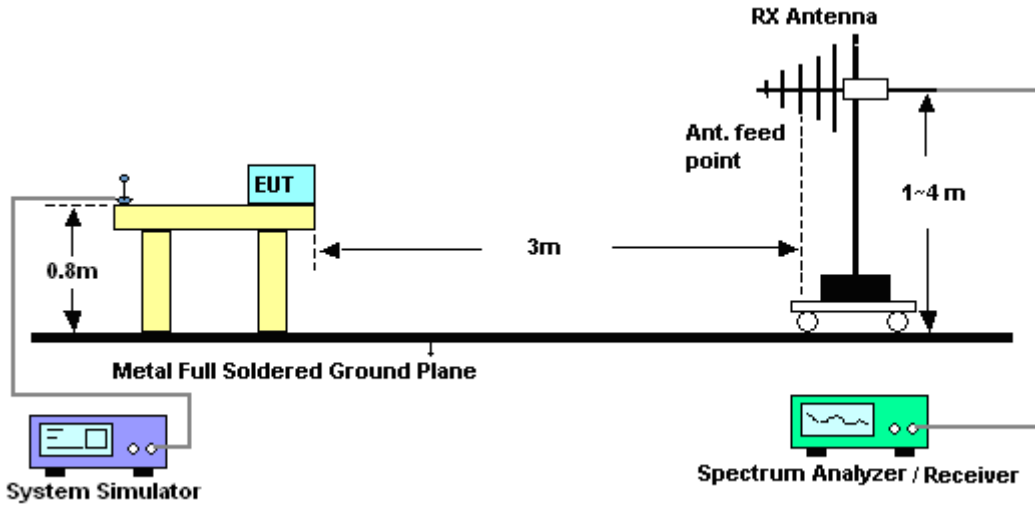


For radiated emissions above 1GHz

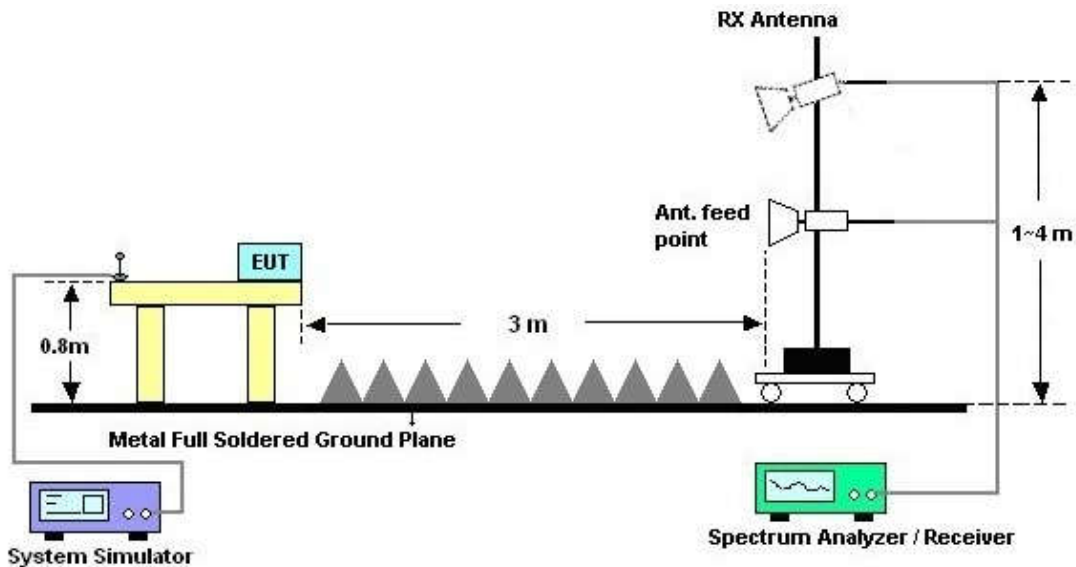



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Carl Ni	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx for Sample 2		

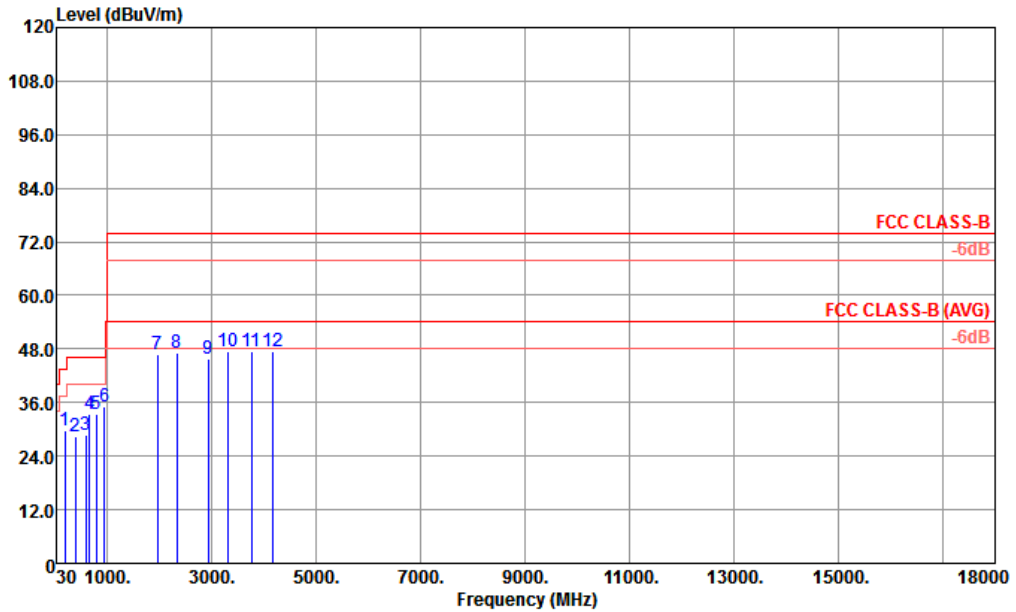


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 02 LF ANT HORIZONTAL
 Mode : 2
 IMEI : 353314080087412 #15

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	195.87	29.87	-13.63	43.50	45.17	15.94	0.41	31.65	---	---	Peak
2	398.60	28.34	-17.66	46.00	32.58	25.47	0.92	30.63	---	---	Peak
3	597.45	28.64	-17.36	46.00	32.66	24.60	0.90	29.52	---	---	Peak
4	669.23	33.41	-12.59	46.00	35.62	25.76	1.08	29.05	---	---	Peak
5	796.30	33.43	-12.57	46.00	33.67	26.52	1.46	28.22	---	---	Peak
6	949.56	35.05	-10.95	46.00	31.96	28.50	1.71	27.12	100	58	Peak
7	1960.00	46.76	-27.24	74.00	45.32	29.81	4.47	32.84	---	---	Peak
8	2342.00	47.26	-26.74	74.00	42.07	31.09	5.64	31.54	---	---	Peak
9	2938.00	45.74	-28.26	74.00	39.80	32.20	3.00	29.26	---	---	Peak
10	3318.00	47.35	-26.65	74.00	38.63	33.18	5.97	30.43	---	---	Peak
11	3768.00	47.44	-26.56	74.00	36.54	34.63	6.44	30.17	---	---	Peak
12	4164.00	47.45	-26.55	74.00	36.52	35.27	6.60	30.94	---	---	Peak



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Carl Ni	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN(2.4G) Idle + Battery + Earphone + USB Cable (Data Link with Notebook) + GPS Rx for Sample 2		

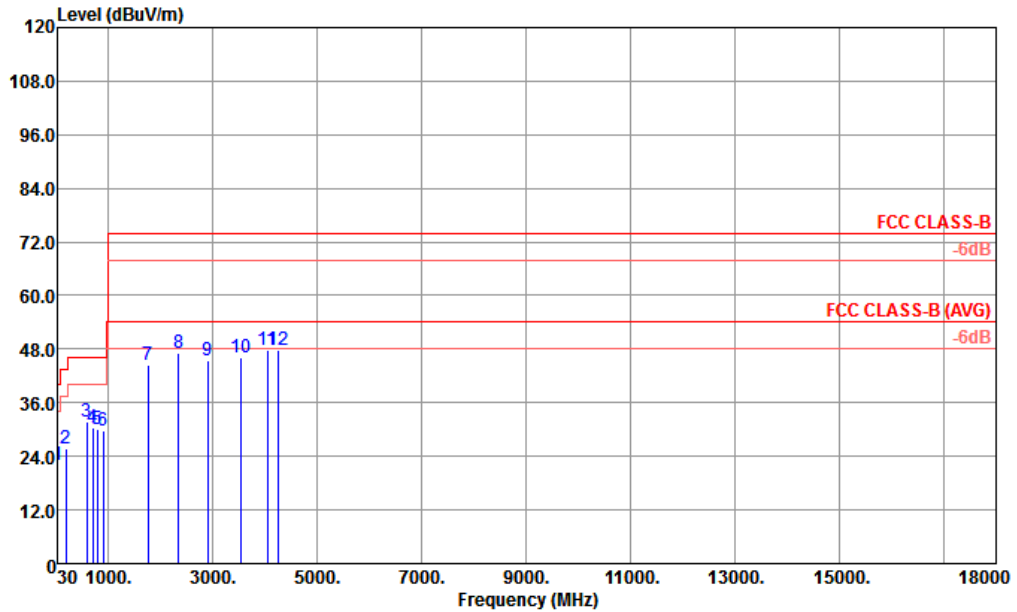

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 02 LF ANT VERTICAL
 Mode : 2
 IMEI : 353314080087412 #15

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg
1	32.91	22.06	-17.94	40.00	28.80	25.23	0.11	32.08	--- --- Peak
2	195.87	25.78	-17.72	43.50	41.08	15.94	0.41	31.65	--- --- Peak
3	596.48	31.66	-14.34	46.00	35.68	24.60	0.90	29.52	100 155 Peak
4	705.12	30.46	-15.54	46.00	31.64	26.44	1.20	28.82	--- --- Peak
5	796.30	30.16	-15.84	46.00	30.40	26.52	1.46	28.22	--- --- Peak
6	906.88	29.61	-16.39	46.00	27.69	27.62	1.71	27.41	--- --- Peak
7	1760.00	44.49	-29.51	74.00	45.59	29.07	4.49	34.66	--- --- Peak
8	2358.00	47.03	-26.97	74.00	41.82	31.13	5.62	31.54	--- --- Peak
9	2908.00	45.50	-28.50	74.00	39.92	32.10	2.95	29.47	--- --- Peak
10	3537.00	46.25	-27.75	74.00	36.89	33.49	6.04	30.17	--- --- Peak
11	4056.00	47.93	-26.07	74.00	37.32	35.10	6.24	30.73	--- --- Peak
12	4266.00	47.87	-26.13	74.00	37.62	35.38	5.96	31.09	--- --- Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Apr. 29, 2016	Apr. 09, 2017	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Apr. 09, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Apr. 09, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Apr. 09, 2017	Oct. 12, 2017	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Apr. 24, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44G,MAX 30dB	Apr.18, 2017	Apr. 24, 2017	Apr. 17, 2018	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Apr. 24, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Apr. 24, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug.09,2016	Apr. 24, 2017	Aug.08,2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 13, 2016	Apr. 24, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 24, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Apr. 24, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Apr. 24, 2017	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
---	-------



Appendix B. Product Equality Declaration

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Tel: 18150396560

Date: June 13, 2017

Product Equality Declaration

We, Motorola Mobility LLC, declare on our sole responsibility for the product of **XT1750** as below, the detailed differences between Original and Variant project are list in the table:


Object	Original	Variant
Motor	Hongzhifa: 1027;Flat;Work height 3.05;Lead 8 mm;At the bottom of the conductive glue, foam thickness of 0.20 mm	AWA: LC-B681
Front Camera	JSL: 2M,FF,C2590,6*6*4.42,ZIF	Broadsands: BLX2375W-S98737AA1-F
Back Camera	Syoptical: 5M,FF,HI-553,6.5*6.5*4.66,BTB	Broadsands: BLX5005W-S98737AA1-CB
LCD	TXD: 5 inches, 480*854, 10 star light, BTB	Holitech: HTB050W361
Touch panel	Holitech: 5 inches, G + F partition 2 MSG2256A, second generation 0.7 asahi	Biel: WTS5002B
USB	STARW: XJ-007075	Liqi: s98736,micro USB, Line 1 m long
Adapter	Acbel: C-P56, C-P57 C-P58 C-P59 C-P60 C-P45	Chenyang: C-P56, C-P57 -P58 C-P59 C-P60 C-P45
headphones	NEW LEADER: NLD-EM127T-97SF	Juwei: s98736,White double channel headphones, hands-free line length of 1.1 m
RCV	Xichun	Bosheng: MRFD1206A123008
speaker	Xichun	Haosheng: XHS151124SW35P33-10-RH
Memory	Samsung : KMFXN0012M-B214	Hynix : H9TQ64A8GTCCUR-KUM
Filtering duplex class	Murata: SAFFB1G56KB0F0A	TAIYO: F6QA1G581M2QZ
Filtering duplex class	Kyocera: SD18-0897R8UBQ1	MURATA: SAYEY897MCA0B0A
The acceleration sensor chip	KIONIX: KXTJ2-1009-HQ	BOSCH : BMA253
High frequency crystal class	TXC: OZ26000004	EPSON: X1E000291001400
Headphone jack	Jie huang: JAF00-05152-0151	Jie huang: PH12-6BS5F3MB
Booth connector	Qiande: TF-1502-001	Qiande: CAF11-08153-011401-CUS
Booth connector	Jie huang : CAF99-08153-010609	Jie huang: S34-0B08F15C
ZIF connector	Kyocera: 04 6298 706 200 883+;04 6298 706 220 883+	UJU : PF050-B06B-C09-A
ZIF connector	UJU: PF030-O25B-C10-H	HIROSE: FH26W-25S-0.3SHW(60)
Other connector	Sinopow: C-10020059	MURATA: MM8030-2610RK0
LED driver	Orientchip: OCP8132AVAD	SGMC: SGM3756YTDI6G/TR
LED driver	AWINIC: AW9961DNR	SILERGY: SYWT78DUC
Low noise put	Maxscend: MXDLN16G	AWINIC: AW5005DNR
barron	ACX: BD2012-20L0820T/LF	WALSIN: RFBLN2012090BM5T25
Filtering duplex class	Kyocera: SD18-1950R8UBQ1	ACX: DP1608-V1524CAT
Filtering duplex class	Walsin: RFDIP1608060TM7T62	MURATA: SAYEY1G95HA0F0A
The main antenna	WELLETRONICS COMMUNICATION TECHNOLOGY CO.,LTD: V2.0	WELLETRONICS COMMUNICATION TECHNOLOGY CO.,LTD: V2.2

Triad antenna	WELLETRONICS COMMUNICATION TECHNOLOGY CO.,LTD: V2.0	WELLETRONICS COMMUNICATION TECHNOLOGY CO.,LTD: Two samples V2.3 Version V2.2 agree with the original antenna in-kind, screen printing is unified with the main antenna, are upgraded to V2.2 (previous consulting certification, is reported to the printing does not need to change) V2.3 is to optimize the factory feedback antenna case become warped, antenna made small optimization, two for the report Mass production using V2.2 (antenna case become warped with other solutions, antenna do not change)
---------------	---	--

Except above, the others are all the same.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,



Contact Person: Lin BiaoChun

COMPANY: Motorola Mobility LLC.

Tel:86- 18150396560

E-Mail: Linbc@lenovo.com