



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10742, 10741
FCC ID : IHDT56WH2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 17, 2017 and testing was completed on Apr. 22, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Specification of Accessory 6

 1.6 Modification of EUT 7

 1.7 Testing Location 7

 1.8 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 13

 2.6 EUT Operation Test Setup 13

 2.7 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 6dB and 99% Bandwidth Measurement 14

 3.2 Output Power Measurement 16

 3.3 Power Spectral Density Measurement 18

 3.4 Conducted Band Edges and Spurious Emission Measurement 20

 3.5 Radiated Band Edges and Spurious Emission Measurement 33

 3.6 AC Conducted Emission Measurement 37

 3.7 Antenna Requirements 41

4 LIST OF MEASURING EQUIPMENT 42

5 UNCERTAINTY OF EVALUATION 43

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR731705-01C	Rev. 01	Initial issue of report	May 31, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.17 dB at 2483.560 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.46 dB at 0.598 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10742, 10741
FCC ID	IHDT56WH2
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE
IMEI Code	Conducted: 355656080018674/355656080018682 Conduction: 355656080016330/36100856553A08 Radiation: 355656080017718/355656080017726
HW Version	DVT2
SW Version	sanders_n-userdebug 7.1.1 NPS26.85 1826 intcfg.test-keys
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two different types of EUT sample 1 and sample 2. Sample 1 is dual SIM card mobile (Model Name: 10742) and sample 2 is single SIM card mobile (Model Name: 10741). The differences between two samples are only for SIM slot. According to the difference, we choose sample 1 to perform full test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 18.34 dBm (0.0682 W) 802.11g : 22.48 dBm (0.1770 W) 802.11n HT20 : 21.88 dBm (0.1542 W) 802.11n HT40 : 22.45 dBm (0.1758 W)
99% Occupied Bandwidth	802.11b : 12.69MHz 802.11g : 18.88MHz 802.11n HT20 : 19.48MHz 802.11n HT40 : 37.46MHz
Antenna Type / Gain	PIFA Antenna with gain 1.01 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Specification of Accessory

Specification of Accessory			
AC Adapter	Brand Name	Motorola (Salom)	Model Name SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA	
Battery	Brand Name	Motorola (ATL)	Model Name HG30
	Power Rating	3.8Vdc,3000mAh (Min/Typ)	Type Li-ion, ATL404296
Earphone	Brand Name	Motorola(JuWei)	Model Name JWEP0998-W09R
	Signal Line Type	1.23 meter, non-shielded cable, without ferrite core	
USB Cable	Brand Name	Motorola (hetong)	Model Name HT-SJX-17030102
	Signal Line Type	1.02 meter, shielded cable, without ferrite core	



1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	Sporton International (KunShan) INC.			
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

802.11b mode Peak Power (dBm)					
Channel	Freq. (MHz)	Data Rate (MHz)			
		1M bps	2M bps	5.5M bps	11M bps
CH 01	2412 MHz	18.34	18.32	18.01	18.08
CH 06	2437 MHz	18.31	18.29	17.99	18.05
CH 11	2462 MHz	18.28	18.27	17.97	18.02

802.11g mode Peak Power (dBm)									
Channel	Freq. (MHz)	Data Rate (MHz)							
		6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
CH 01	2412 MHz	22.31	22.28	22.26	22.25	22.16	22.13	22.12	22.09
CH 06	2437 MHz	22.36	22.34	22.33	22.31	22.19	22.17	22.16	22.14
CH 11	2462 MHz	22.48	22.45	22.43	22.42	22.28	22.25	22.23	22.21

802.11n HT20 mode Peak Power (dBm)									
Channel	Freq. (MHz)	Data Rate (MHz)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	21.76	21.64	21.59	21.60	21.53	21.54	21.61	21.27
CH 06	2437 MHz	21.88	21.66	21.57	21.49	21.62	21.47	21.54	21.41
CH 11	2462 MHz	21.56	21.46	21.32	21.41	21.44	21.27	21.40	21.34

802.11n HT40 mode Peak Power (dBm)									
Channel	Freq. (MHz)	Data Rate (MHz)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	22.45	22.24	22.35	22.40	22.22	22.03	22.18	22.21
CH 06	2437 MHz	22.41	22.07	22.16	22.27	22.23	21.97	22.13	22.25
CH 09	2452 MHz	22.07	21.64	21.41	21.79	21.13	21.20	21.22	21.25



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + Battery + USB Cable (Charging from Adapter) + SIM1 for Sample 1
Remark: For radiated test cases, the tests were performed with adapter, battery, earphone and USB cable for sample 1.	

2.4 Connection Diagram of Test System


<WLAN 2.4GHz 802.11b/g/n HT20 Tx Mode>



<WLAN 2.4GHz 802.11n HT40 Tx Mode>

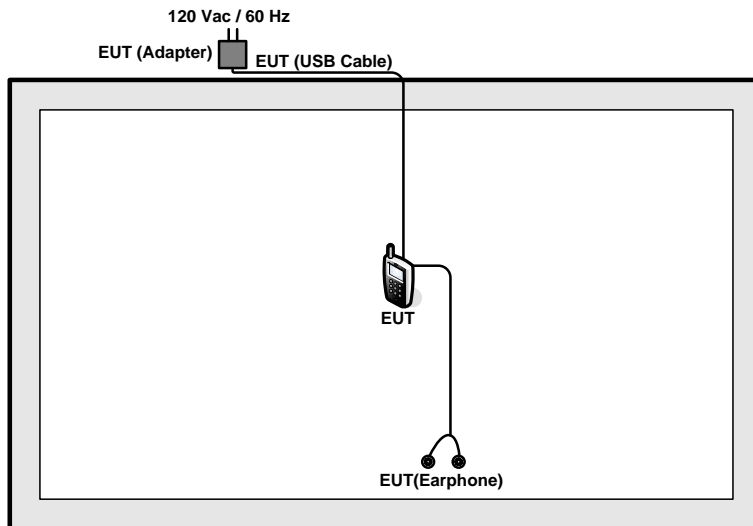

<AC Conducted Emission Mode>

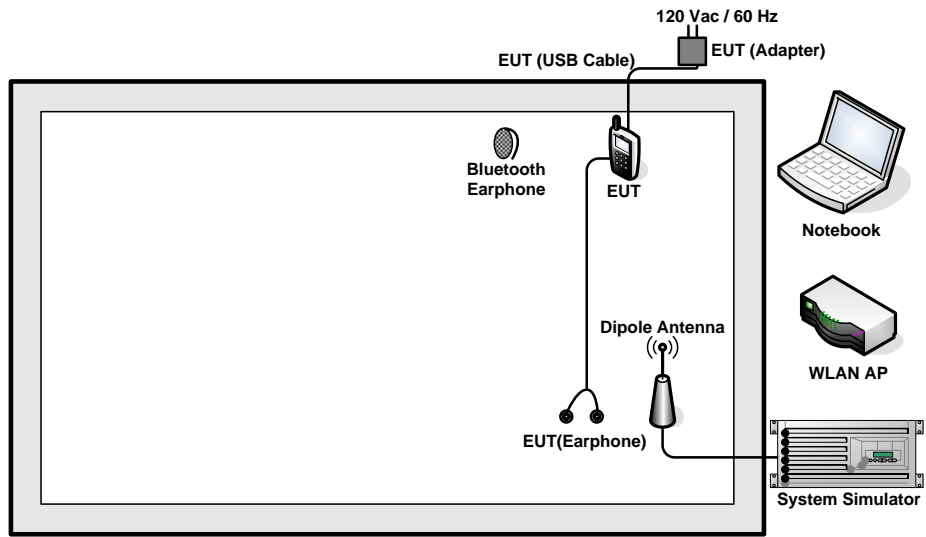



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	QTLBH-106	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

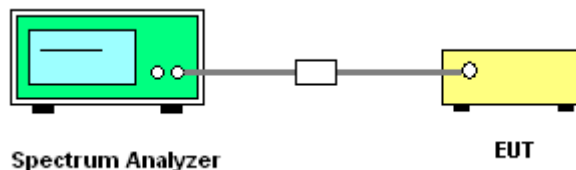



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

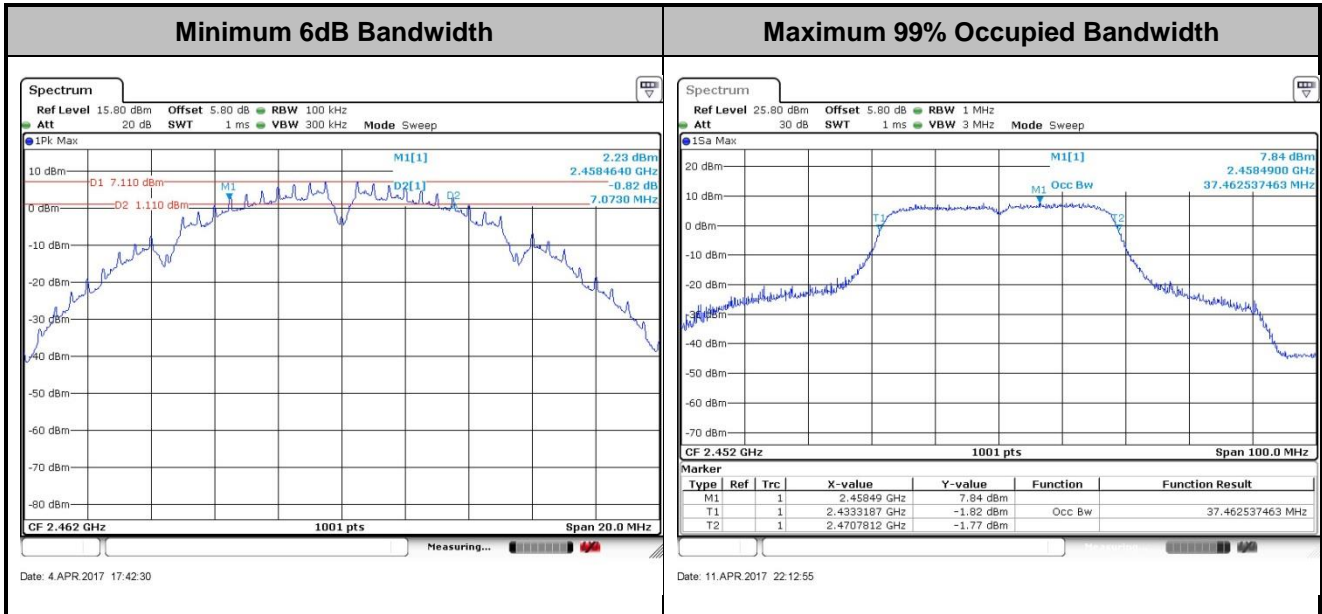

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

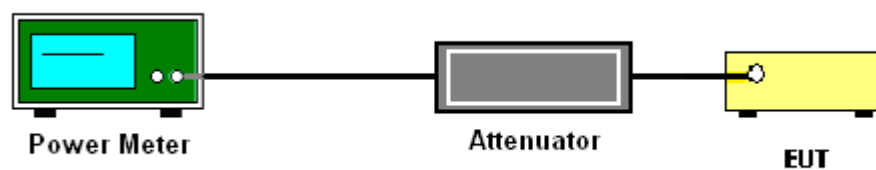



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

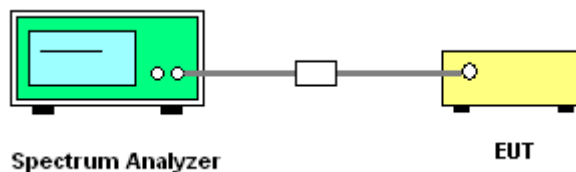



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

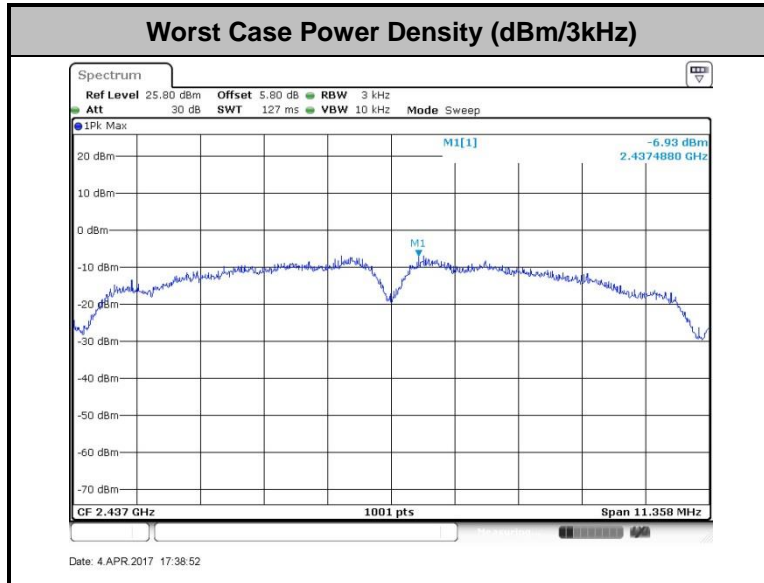

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

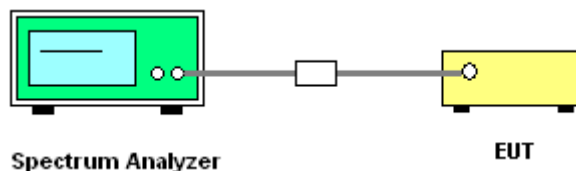



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	54~55%
Test Channel :	01	Test Engineer :	Ivan Zhang

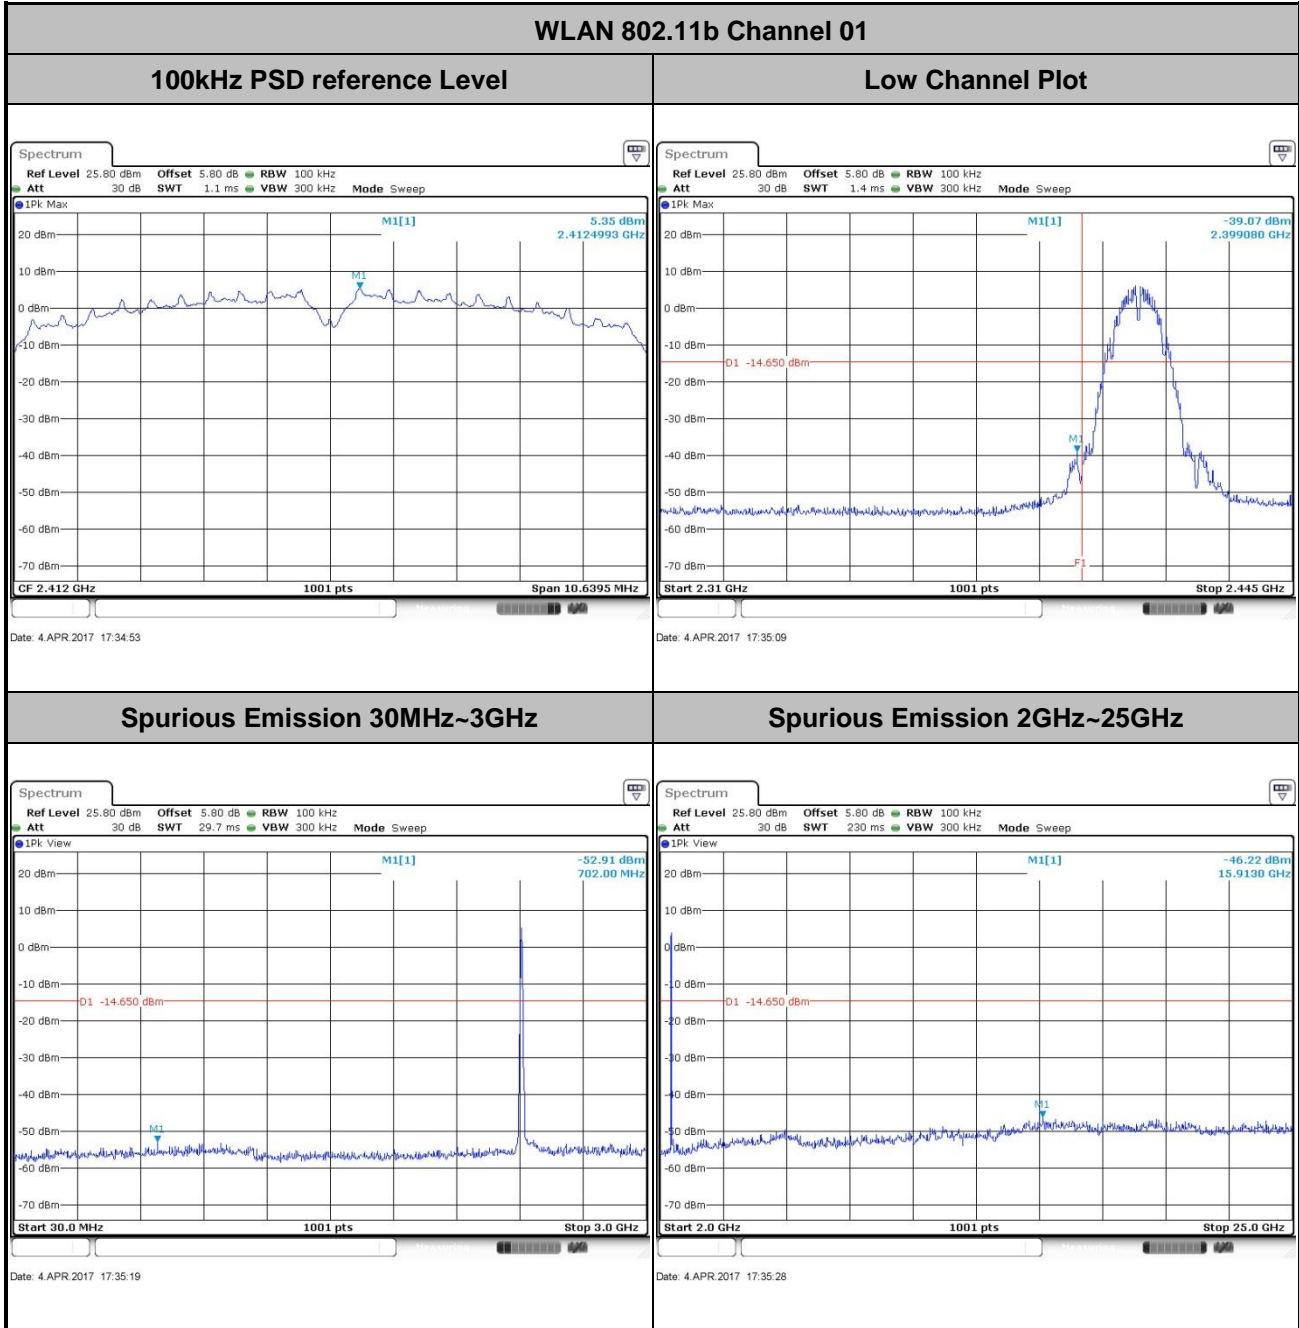





Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Zhang

WLAN 802.11b Channel 06


100kHz PSD reference Level

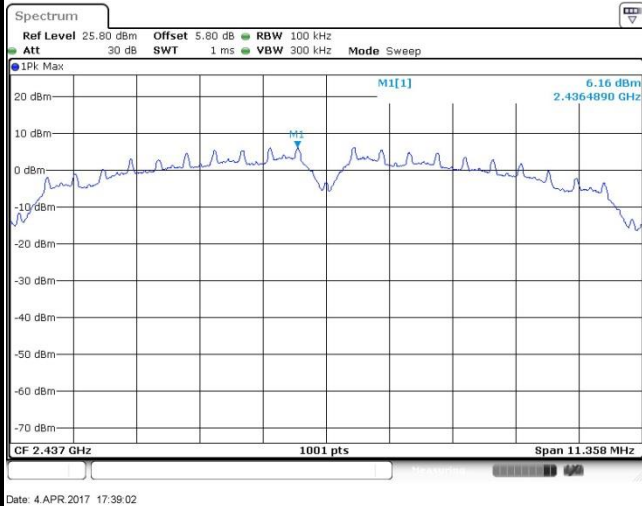

Spurious Emission 30MHz~3GHz

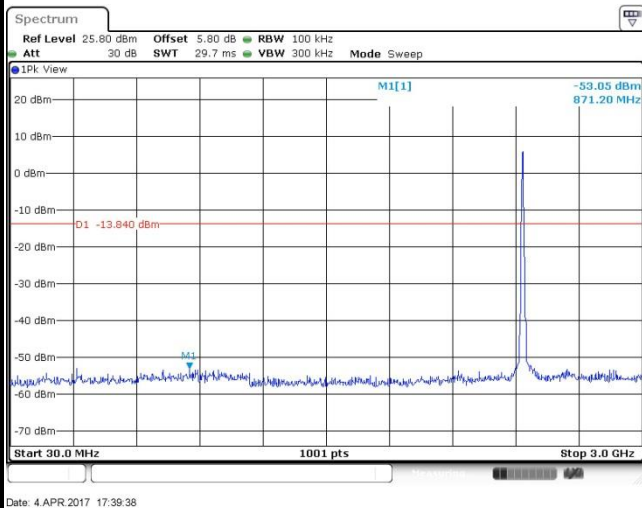

Spurious Emission 2GHz~25GHz

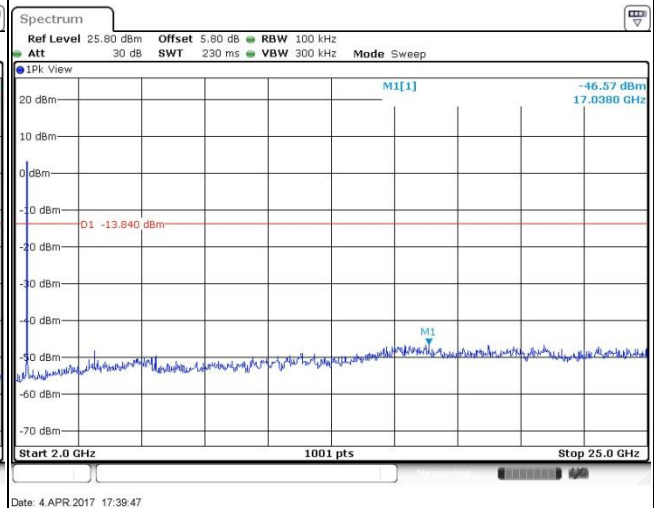




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	11	Test Engineer :	Ivan Zhang


WLAN 802.11b Channel 11

100kHz PSD reference Level

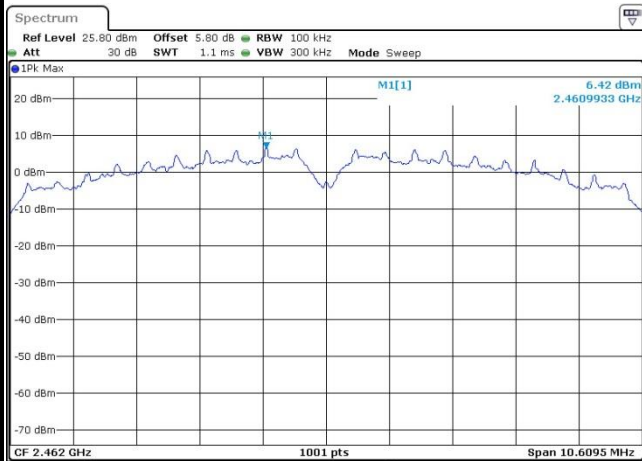


Date: 4 APR 2017 17:43:22

High Channel Plot

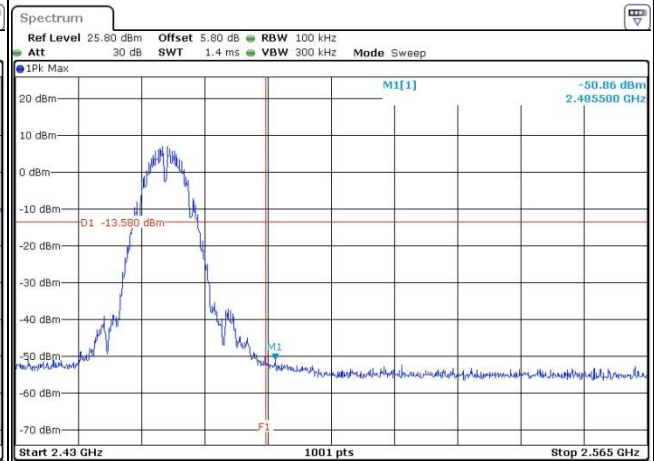


Date: 4 APR 2017 17:43:34

Spurious Emission 30MHz~3GHz

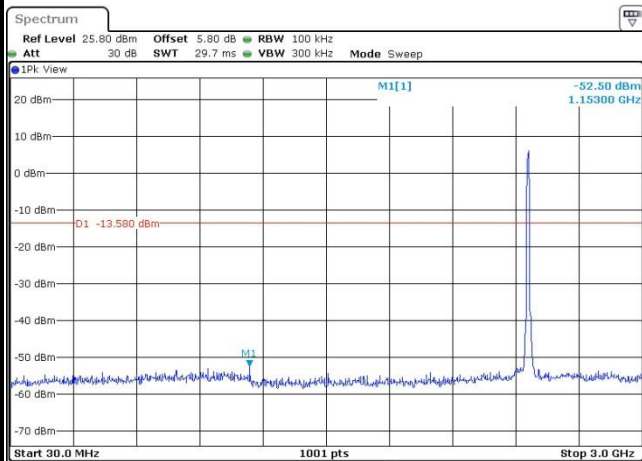

Date: 4 APR 2017 18:05:15

Spurious Emission 2GHz~25GHz

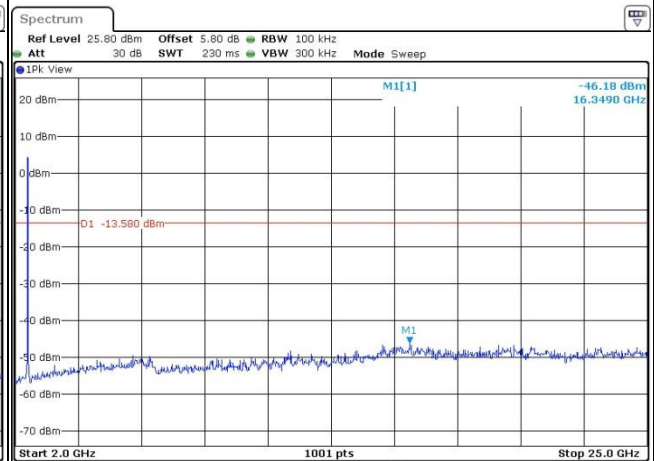


Date: 4 APR 2017 18:05:23



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	54~55%
Test Channel :	01	Test Engineer :	Ivan Zhang


WLAN 802.11g Channel 01

100kHz PSD reference Level

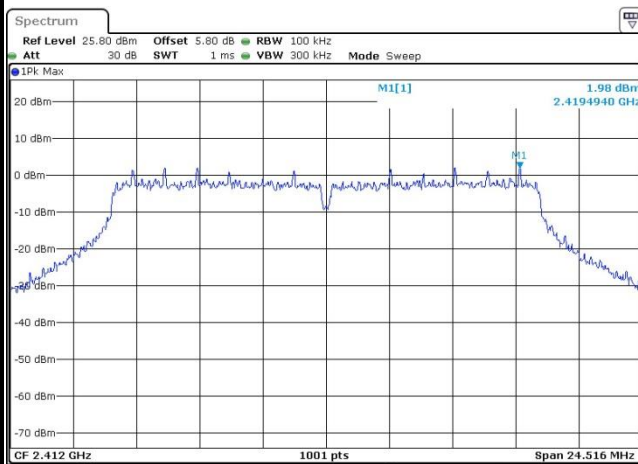


Date: 4 APR 2017 17:46:30

Low Channel Plot

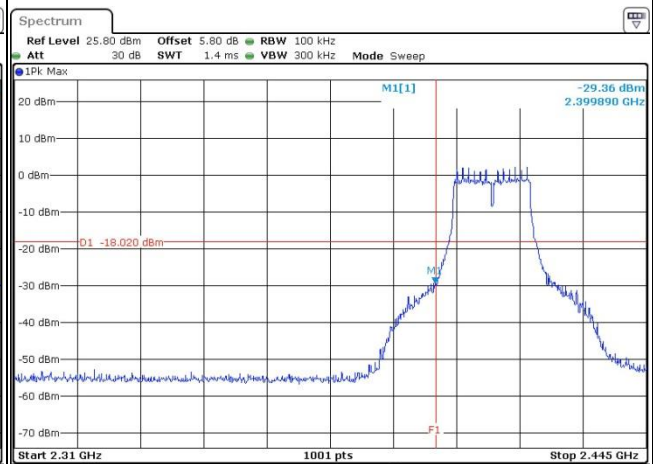


Date: 4 APR 2017 17:46:45

Spurious Emission 30MHz~3GHz

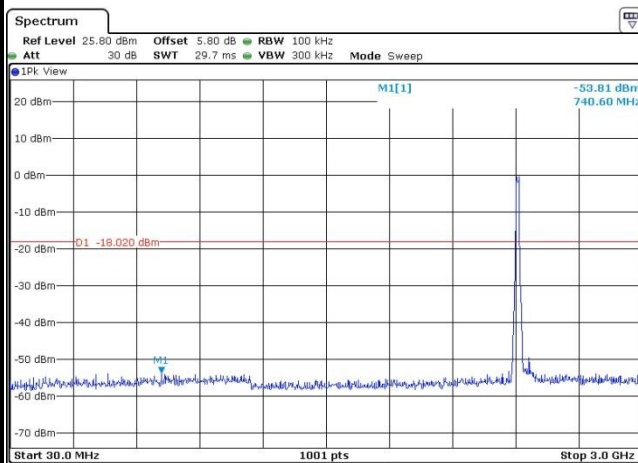

Date: 4 APR 2017 17:52:45

Spurious Emission 2GHz~25GHz

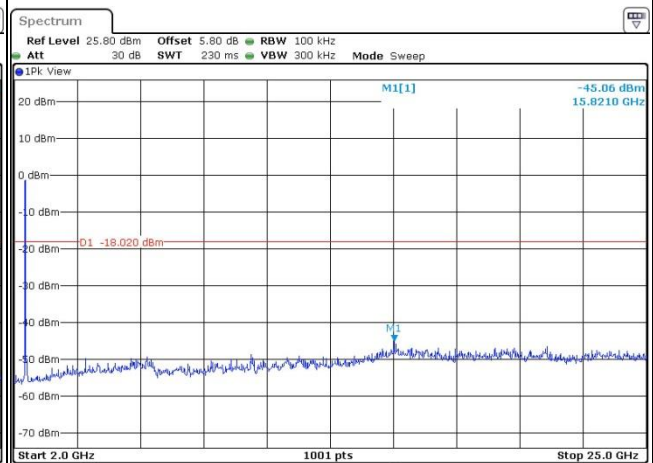


Date: 4 APR 2017 17:52:27




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Zhang

WLAN 802.11g Channel 06


100kHz PSD reference Level

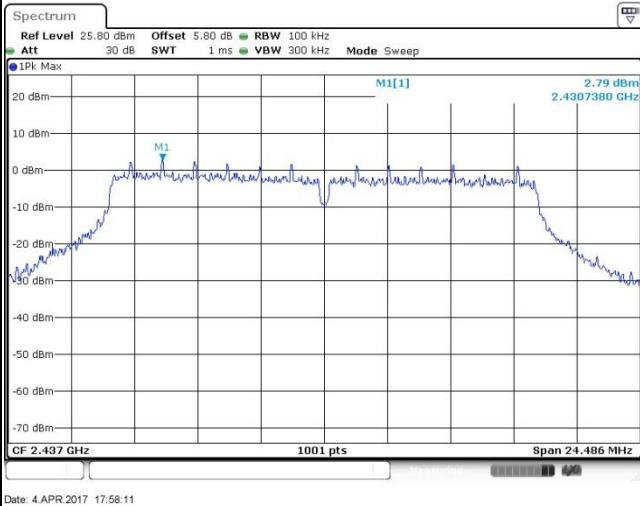

Spurious Emission 30MHz~3GHz

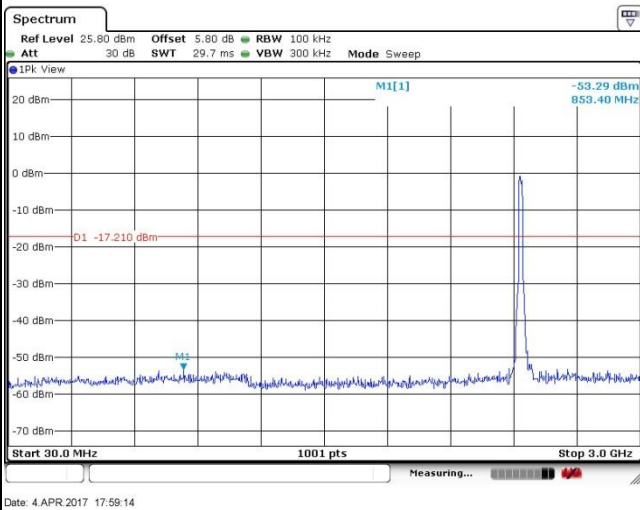

Spurious Emission 2GHz~25GHz

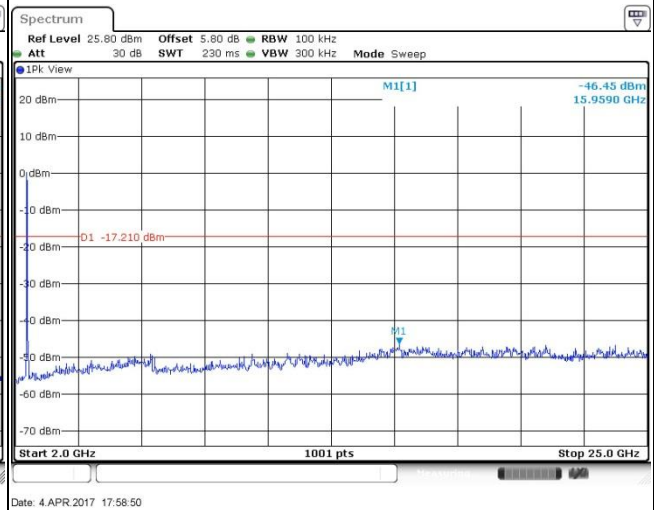




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	11	Test Engineer :	Ivan Zhang


WLAN 802.11g Channel 11

100kHz PSD reference Level

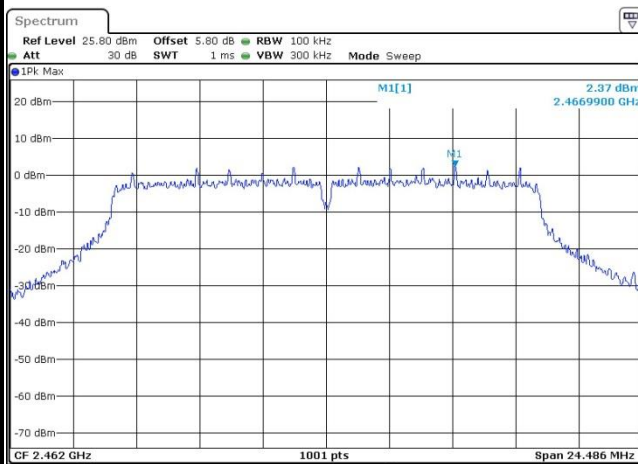


Date: 4 APR 2017 18:02:23

High Channel Plot

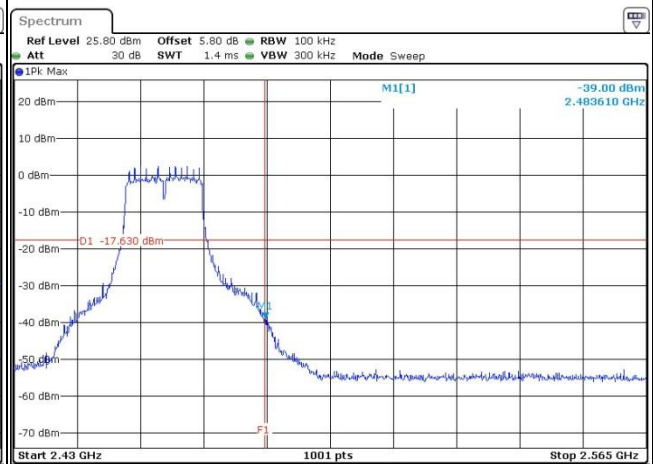


Date: 4 APR 2017 18:02:38

Spurious Emission 30MHz~3GHz

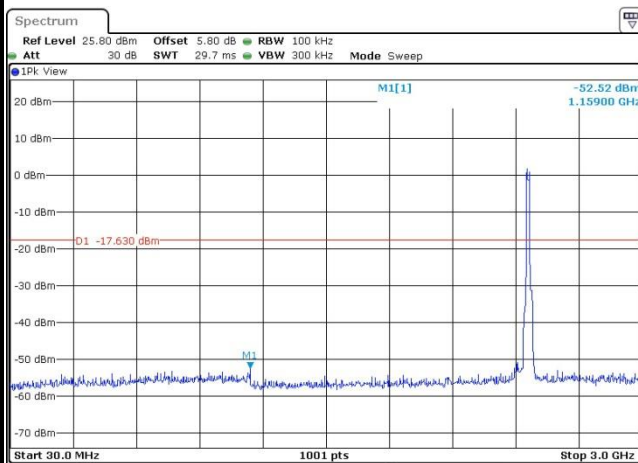

Date: 4 APR 2017 18:03:08

Spurious Emission 2GHz~25GHz

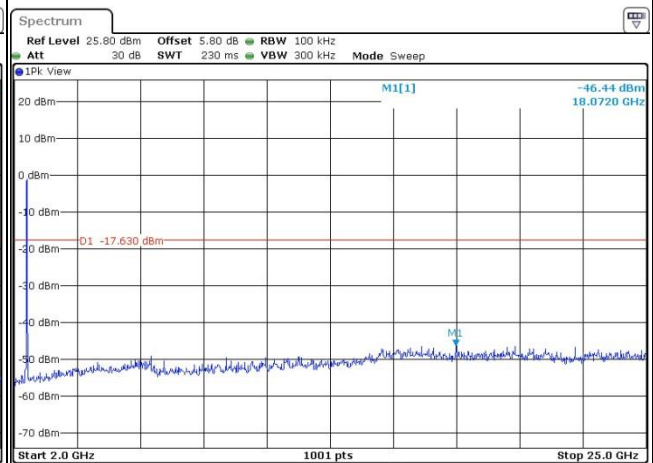


Date: 4 APR 2017 18:03:16



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	54~55%
Test Channel :	01	Test Engineer :	Ivan Zhang


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

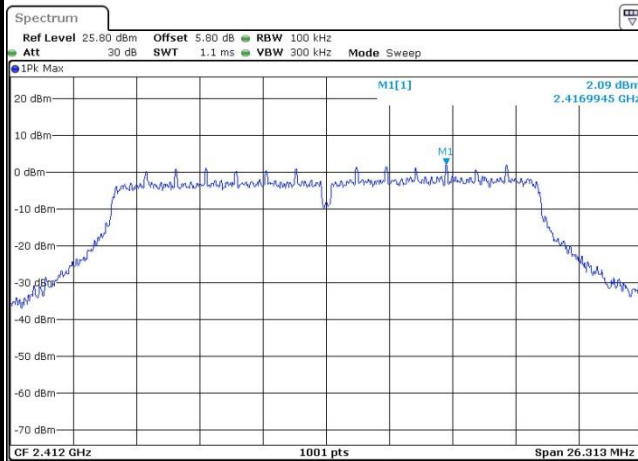


Date: 11.APR.2017 21:15:03

Low Channel Plot

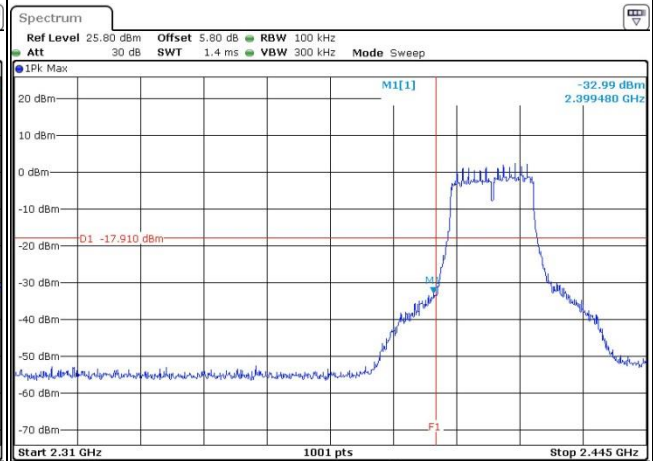


Date: 11.APR.2017 21:16:18

Spurious Emission 30MHz~3GHz

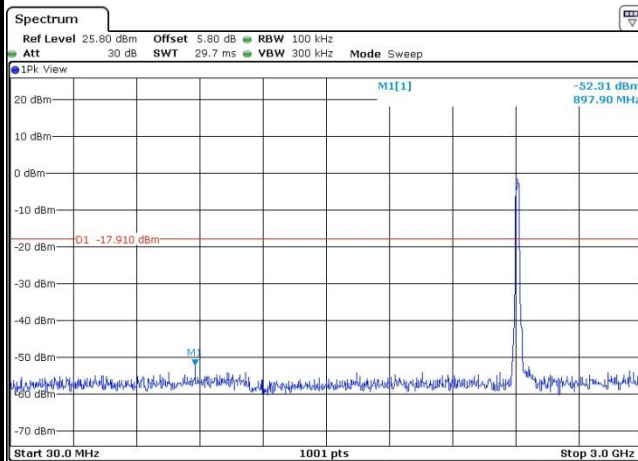

Date: 11.APR.2017 21:22:17

Spurious Emission 2GHz~25GHz

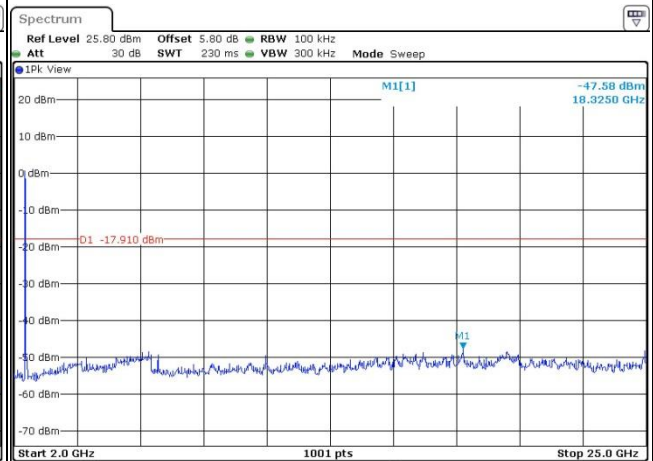


Date: 11.APR.2017 21:18:42



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Zhang


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

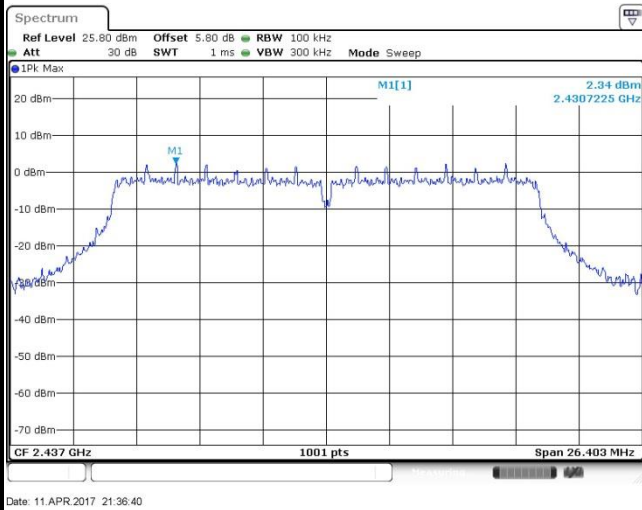


Date: 11.APR.2017 21:36:40

Spurious Emission 30MHz~3GHz

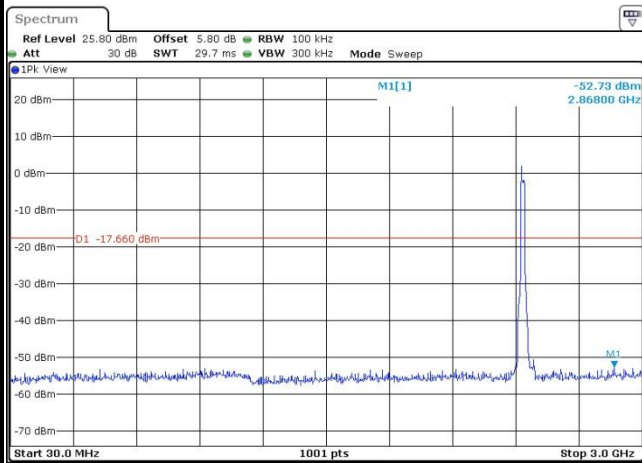

Date: 11.APR.2017 21:38:41

Spurious Emission 2GHz~25GHz

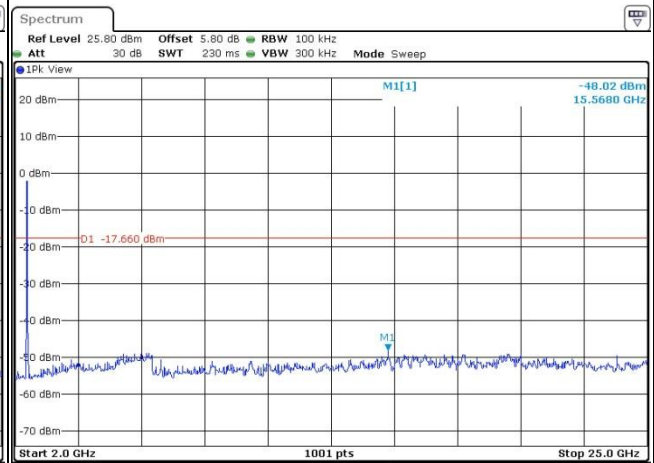


Date: 11.APR.2017 21:38:49



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	11	Test Engineer :	Ivan Zhang


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

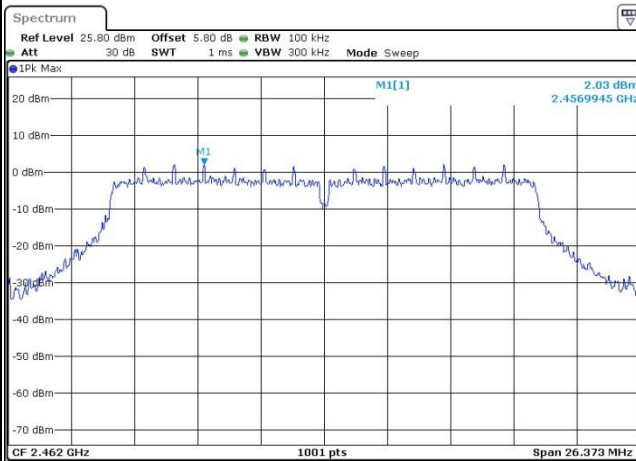


Date: 11.APR.2017 21:43:47

High Channel Plot

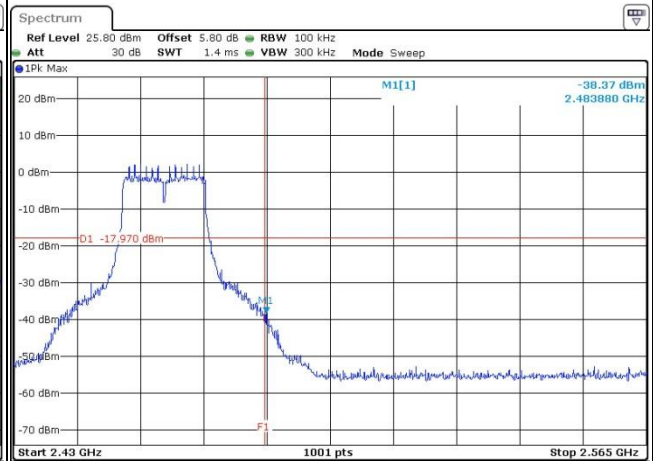


Date: 11.APR.2017 21:44:07

Spurious Emission 30MHz~3GHz

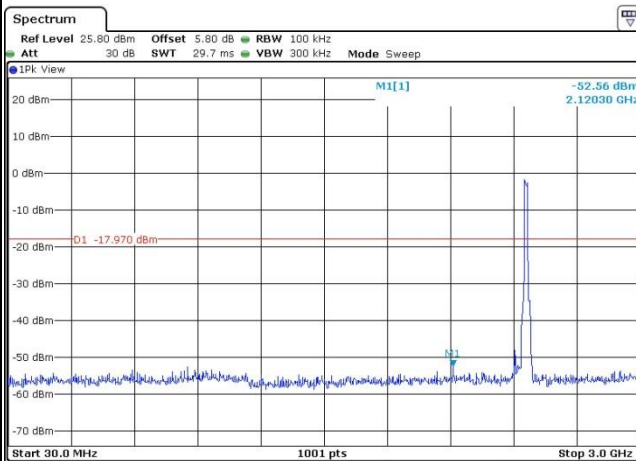

Date: 11.APR.2017 21:47:08


Spurious Emission 2GHz~25GHz

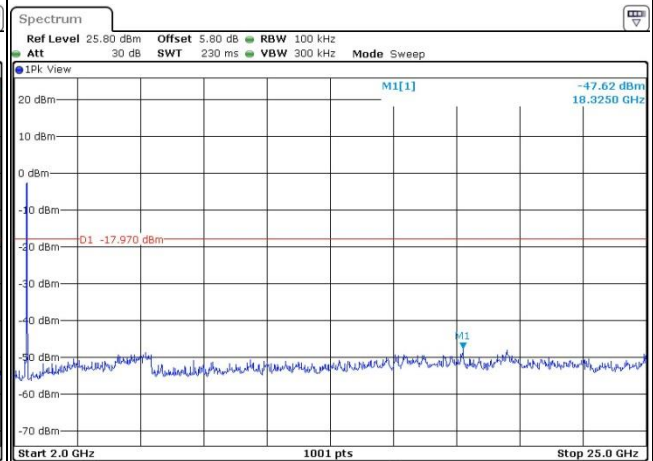

Date: 11.APR.2017 21:47:37



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	03	Test Engineer :	Ivan Zhang

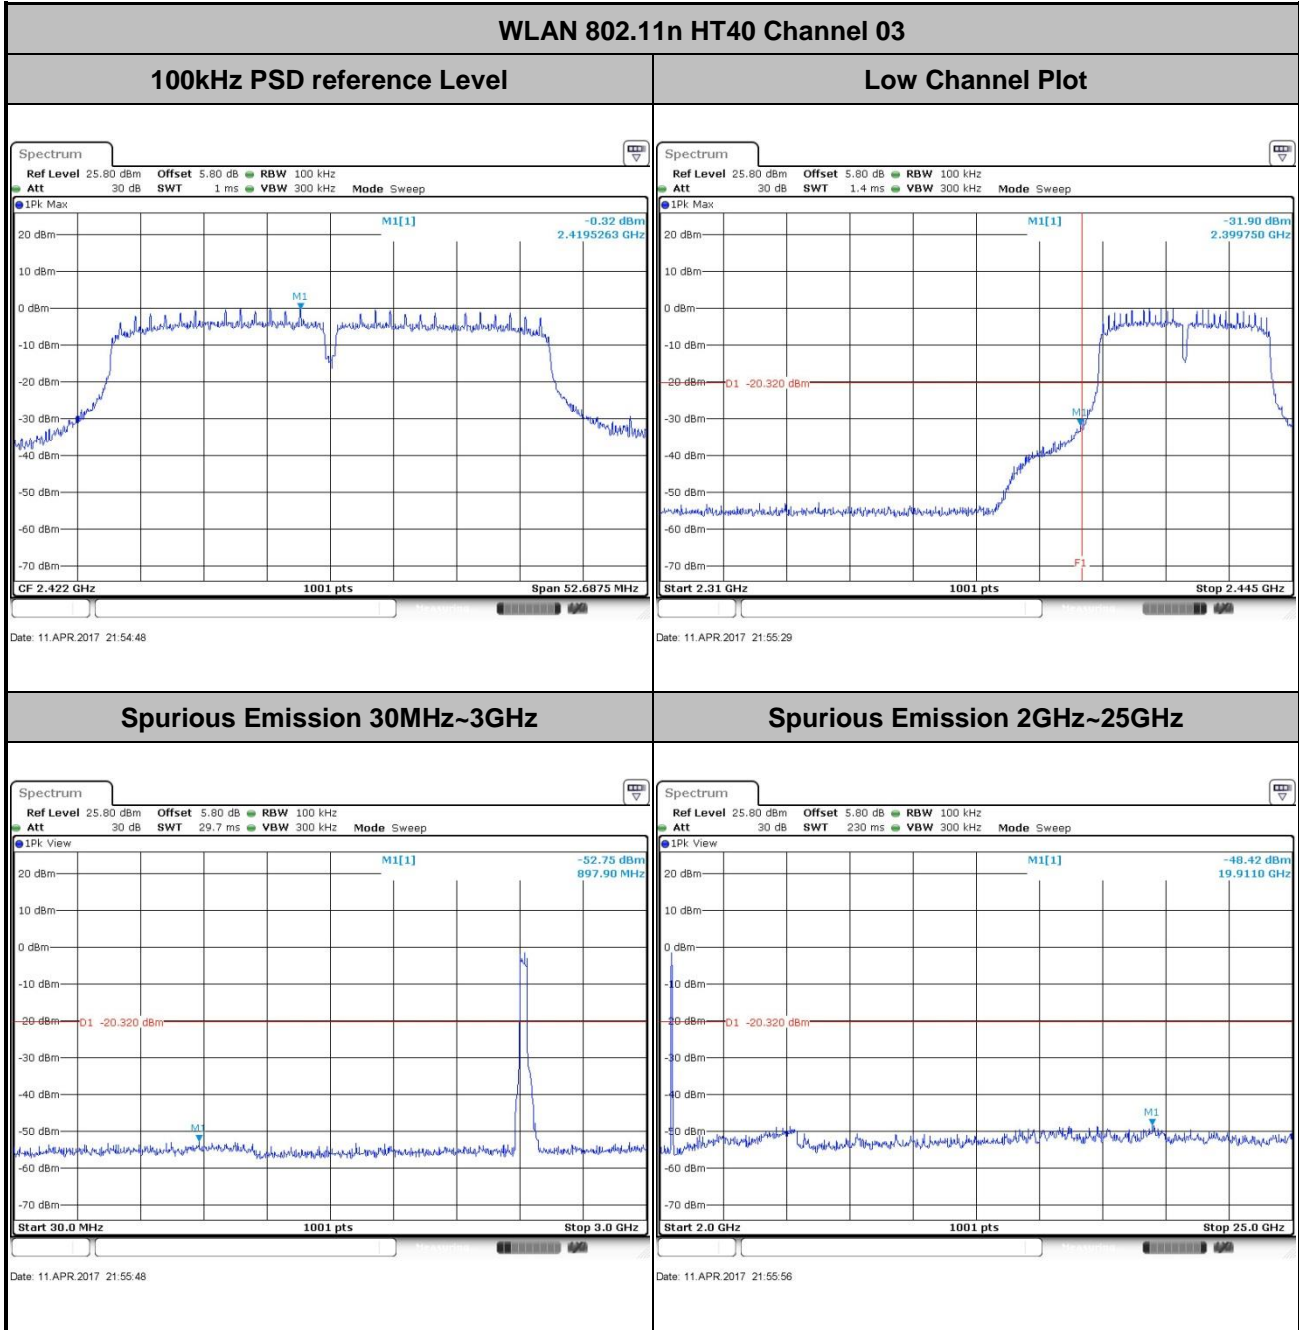





Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	54~55%
Test Channel :	06	Test Engineer :	Ivan Zhang

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

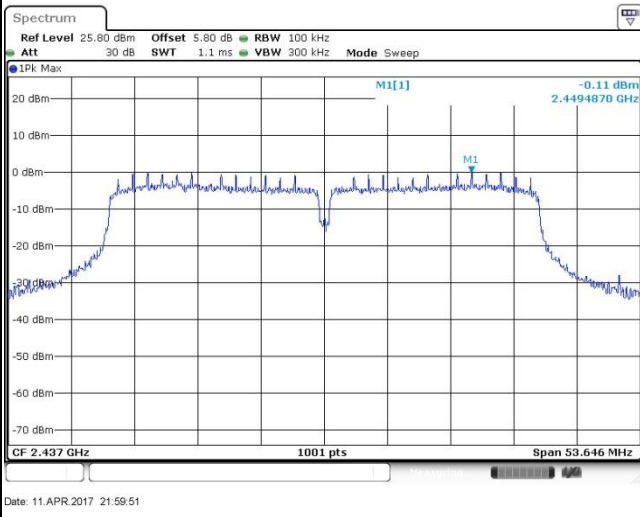

Spurious Emission 30MHz~3GHz

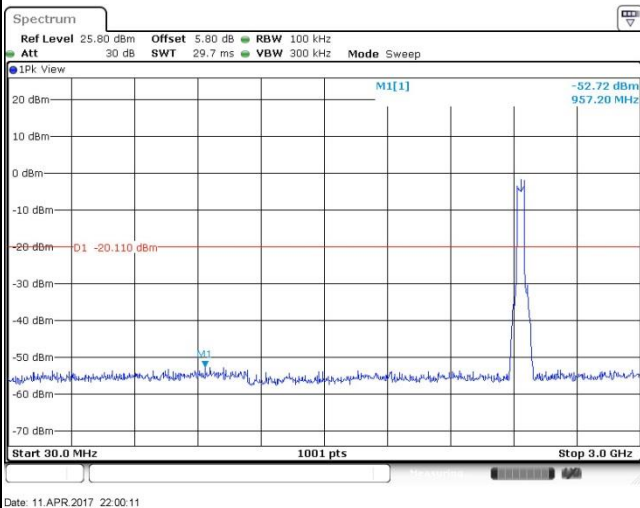

Spurious Emission 2GHz~25GHz

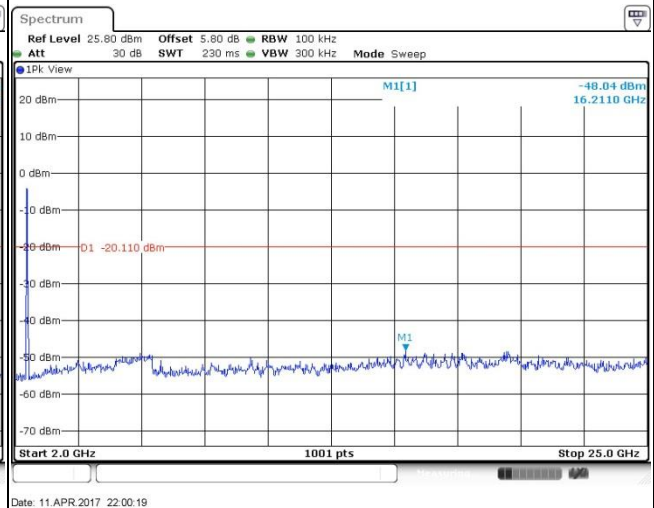



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	54~55%
Test Channel :	09	Test Engineer :	Ivan Zhang


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level




Date: 11.APR.2017 22:05:09

High Channel Plot

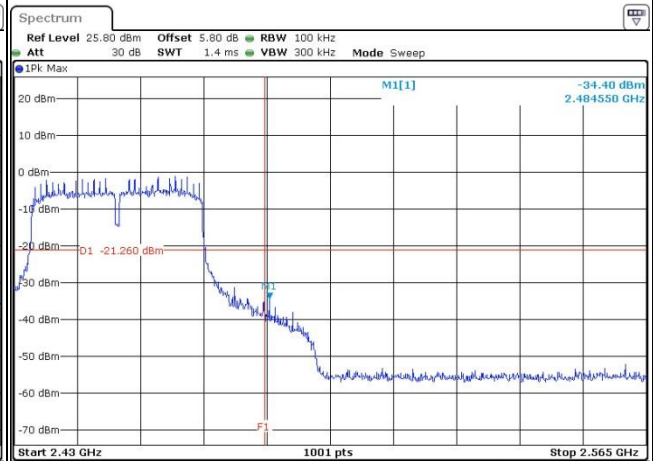


Date: 11.APR.2017 22:05:29

Spurious Emission 30MHz~3GHz

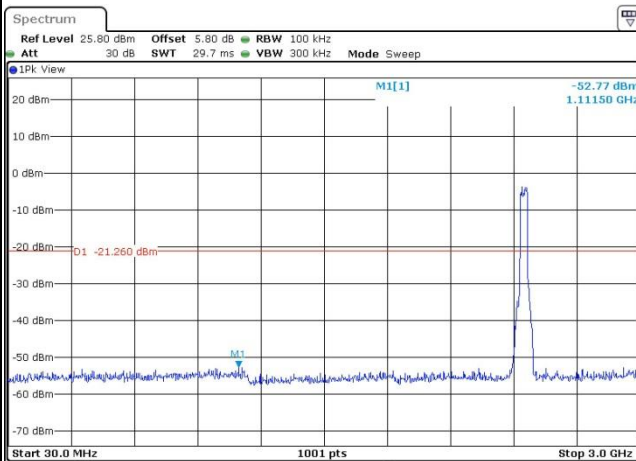

Date: 11.APR.2017 22:06:48

Spurious Emission 2GHz~25GHz

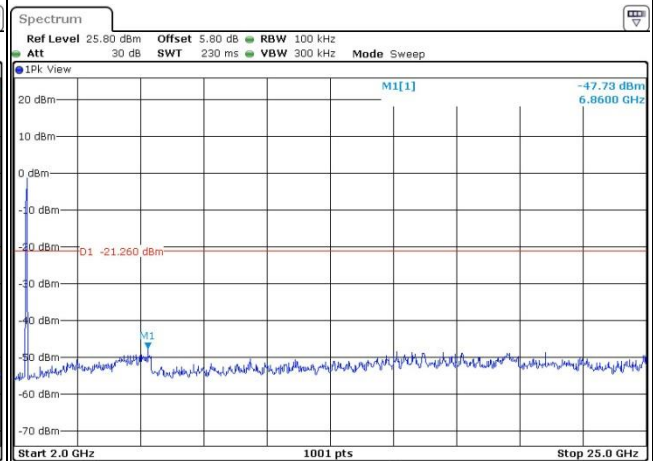

Date: 11.APR.2017 22:06:56



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

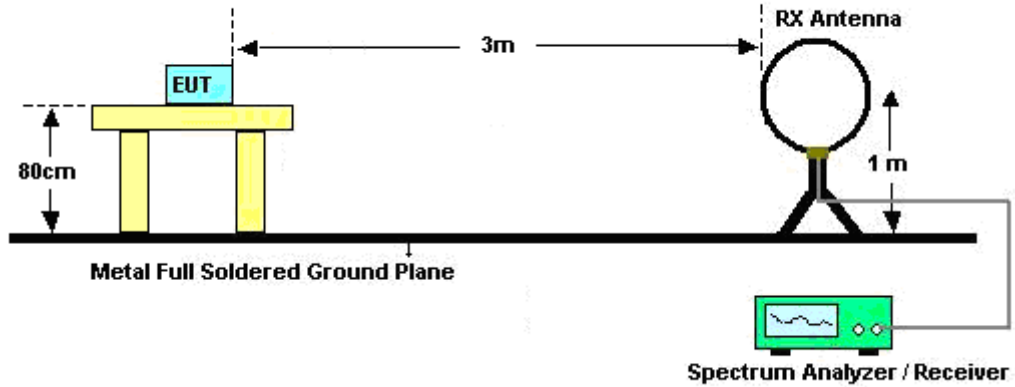

For radiated emissions from 30MHz to 1GHz

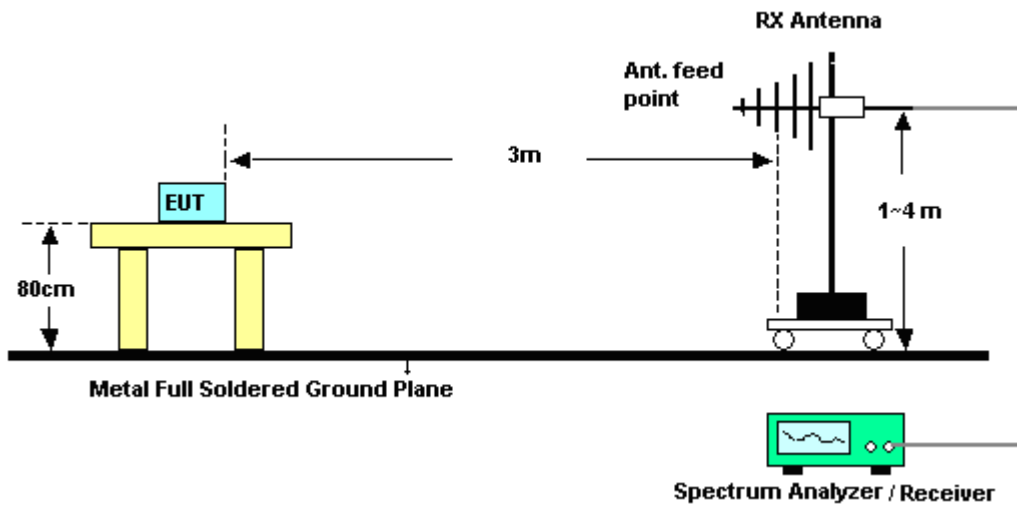

For radiated emissions above 1GHz

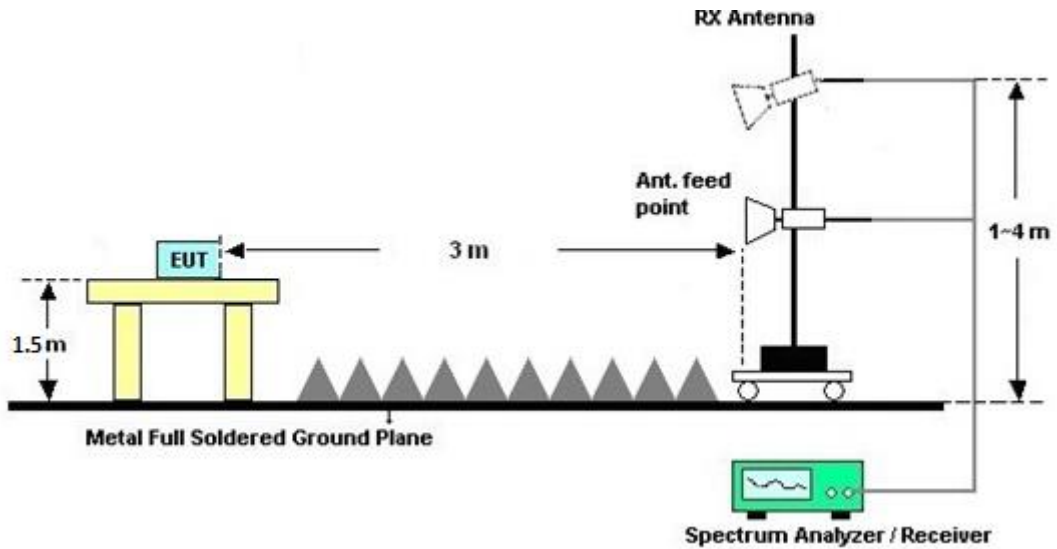

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

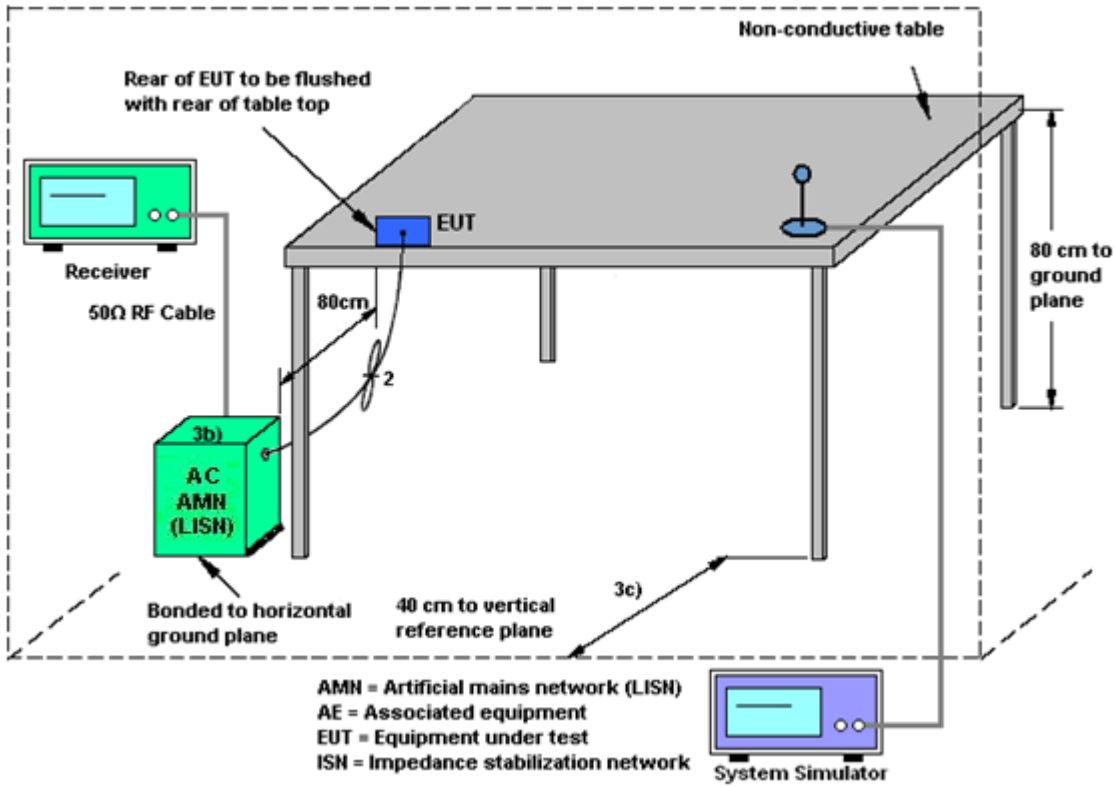



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Morris Li	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + Battery + USB Cable (Charging from Adapter) + SIM1 for Sample 1		

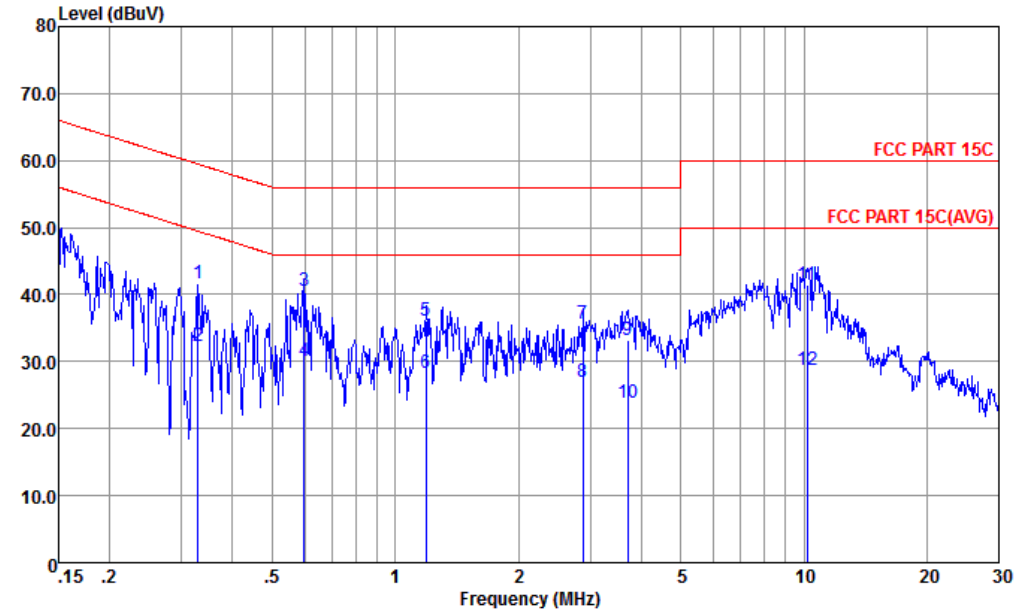


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-161017-060103 LINE

IMEI : 355656080016330/36100856553A08 #7

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.329	41.71	-17.78	59.49	31.20	0.27	10.24	QP
2	0.329	32.31	-17.18	49.49	21.80	0.27	10.24	Average
3 *	0.598	40.54	-15.46	56.00	30.10	0.26	10.18	QP
4	0.598	30.14	-15.86	46.00	19.70	0.26	10.18	Average
5	1.191	36.14	-19.86	56.00	25.70	0.25	10.19	QP
6	1.191	28.24	-17.76	46.00	17.80	0.25	10.19	Average
7	2.884	35.72	-20.28	56.00	25.30	0.21	10.21	QP
8	2.884	26.92	-19.08	46.00	16.50	0.21	10.21	Average
9	3.700	33.14	-22.86	56.00	22.70	0.21	10.23	QP
10	3.700	23.84	-22.16	46.00	13.40	0.21	10.23	Average
11	10.179	41.44	-18.56	60.00	30.79	0.30	10.35	QP
12	10.179	28.84	-21.16	50.00	18.19	0.30	10.35	Average



Test Mode :	Mode 1	Temperature :	20~22
Test Engineer :	Morris Li	Relative Humidity :	44~46
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + Battery + USB Cable (Charging from Adapter) + SIM1 for Sample 1		

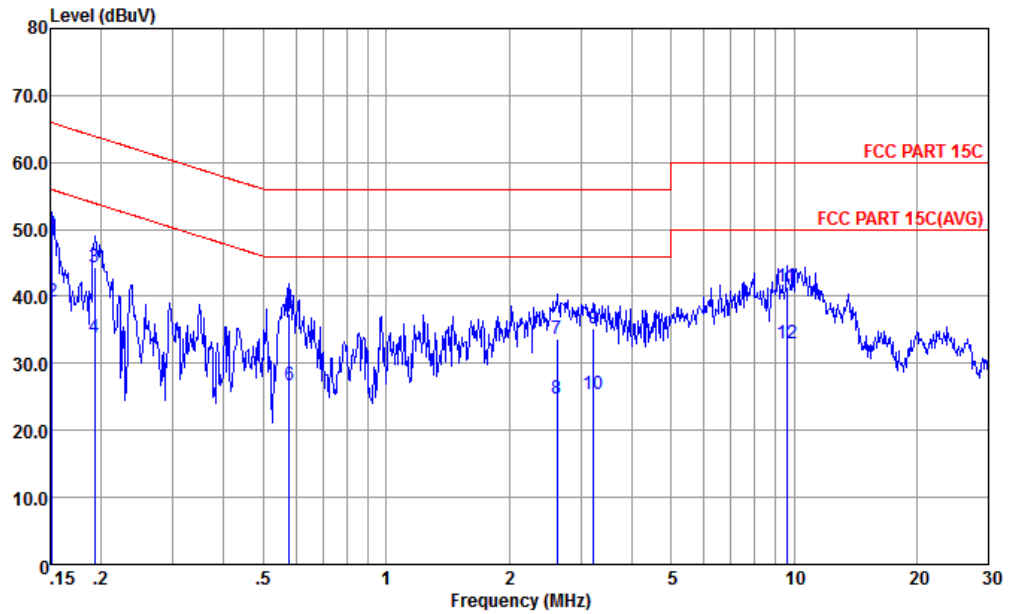

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-161017-060103 NEUTRAL

IMEI : 355656080016330/36100856553A08 #7

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.152	49.23	-16.68	65.91	38.50	0.34	10.39	QP
2	0.152	39.13	-16.78	55.91	28.40	0.34	10.39	Average
3	0.192	44.37	-19.56	63.93	33.70	0.33	10.34	QP
4	0.192	33.87	-20.06	53.93	23.20	0.33	10.34	Average
5	0.579	37.46	-18.54	56.00	26.90	0.38	10.18	QP
6	0.579	26.76	-19.24	46.00	16.20	0.38	10.18	Average
7	2.622	33.71	-22.29	56.00	23.10	0.40	10.21	QP
8	2.622	24.81	-21.19	46.00	14.20	0.40	10.21	Average
9	3.224	35.22	-20.78	56.00	24.61	0.39	10.22	QP
10	3.224	25.32	-20.68	46.00	14.71	0.39	10.22	Average
11	9.603	41.42	-18.58	60.00	30.79	0.29	10.34	QP
12	9.603	32.92	-17.08	50.00	22.29	0.29	10.34	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Apr. 04, 2017~ Apr. 11, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Apr. 04, 2017~ Apr. 11, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Apr. 04, 2017~ Apr. 11, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Apr. 07, 2017~ Apr. 14, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Apr. 07, 2017~ Apr. 14, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Apr. 07, 2017~ Apr. 14, 2017	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Apr. 07, 2017~ Apr. 14, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120 D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Apr. 07, 2017~ Apr. 14, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Apr. 07, 2017~ Apr. 14, 2017	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Apr. 07, 2017~ Apr. 14, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
High Gain Amplifier	MITEQ	AMF-7D-0 0101800-3 0-10P	1943529	1GHz~18GHz	Jan. 19, 2017	Apr. 07, 2017~ Apr. 14, 2017	Jan. 18, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Apr. 07, 2017~ Apr. 14, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-3 5-HG	1887435	18GHz~40GHz	Oct. 13, 2016	Apr. 07, 2017~ Apr. 14, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 07, 2017~ Apr. 14, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 07, 2017~ Apr. 14, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 07, 2017~ Apr. 14, 2017	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	Apr. 29, 2016	Apr. 22, 2017	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Apr. 22, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Apr. 22, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Apr. 22, 2017	Oct. 12, 2017	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Ivan Zhang	Temperature:	24~25	°C
Test Date:	Apr. 04, 2017~Apr. 11, 2017	Relative Humidity:	54~55	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.49	7.09	0.50	Pass
11b	1Mbps	1	6	2437	12.69	7.57	0.50	Pass
11b	1Mbps	1	11	2462	12.24	7.07	0.50	Pass
11g	6Mbps	1	1	2412	18.83	16.34	0.50	Pass
11g	6Mbps	1	6	2437	18.88	16.32	0.50	Pass
11g	6Mbps	1	11	2462	18.43	16.32	0.50	Pass
HT20	MCS0	1	1	2412	19.13	17.54	0.50	Pass
HT20	MCS0	1	6	2437	19.48	17.60	0.50	Pass
HT20	MCS0	1	11	2462	19.38	17.58	0.50	Pass
HT40	MCS0	1	3	2422	36.76	35.13	0.50	Pass
HT40	MCS0	1	6	2437	37.26	35.76	0.50	Pass
HT40	MCS0	1	9	2452	37.46	35.49	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.34	30.00	1.01	19.35	36.00	Pass
11b	1Mbps	1	6	2437	18.31	30.00	1.01	19.32	36.00	Pass
11b	1Mbps	1	11	2462	18.28	30.00	1.01	19.29	36.00	Pass
11g	6Mbps	1	1	2412	22.31	30.00	1.01	23.32	36.00	Pass
11g	6Mbps	1	6	2437	22.36	30.00	1.01	23.37	36.00	Pass
11g	6Mbps	1	11	2462	22.48	30.00	1.01	23.49	36.00	Pass
HT20	MCS0	1	1	2412	21.76	30.00	1.01	22.77	36.00	Pass
HT20	MCS0	1	6	2437	21.88	30.00	1.01	22.89	36.00	Pass
HT20	MCS0	1	11	2462	21.56	30.00	1.01	22.57	36.00	Pass
HT40	MCS0	1	3	2422	22.45	30.00	1.01	23.46	36.00	Pass
HT40	MCS0	1	6	2437	22.41	30.00	1.01	23.42	36.00	Pass
HT40	MCS0	1	9	2452	22.07	30.00	1.01	23.08	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.11	15.18
11b	1Mbps	1	6	2437	0.11	15.14
11b	1Mbps	1	11	2462	0.11	15.12
11g	6Mbps	1	1	2412	0.60	14.19
11g	6Mbps	1	6	2437	0.60	14.27
11g	6Mbps	1	11	2462	0.60	14.29
HT20	MCS0	1	1	2412	0.62	13.24
HT20	MCS0	1	6	2437	0.62	13.34
HT20	MCS0	1	11	2462	0.62	13.16
HT40	MCS0	1	3	2422	0.64	13.82
HT40	MCS0	1	6	2437	0.64	14.02
HT40	MCS0	1	9	2452	0.64	13.14

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-8.11	1.01	8.00	Pass
11b	1Mbps	1	6	2437	-6.93	1.01	8.00	Pass
11b	1Mbps	1	11	2462	-7.57	1.01	8.00	Pass
11g	6Mbps	1	1	2412	-12.21	1.01	8.00	Pass
11g	6Mbps	1	6	2437	-11.08	1.01	8.00	Pass
11g	6Mbps	1	11	2462	-11.95	1.01	8.00	Pass
HT20	MCS0	1	1	2412	-12.23	1.01	8.00	Pass
HT20	MCS0	1	6	2437	-12.20	1.01	8.00	Pass
HT20	MCS0	1	11	2462	-12.31	1.01	8.00	Pass
HT40	MCS0	1	3	2422	-15.22	1.01	8.00	Pass
HT40	MCS0	1	6	2437	-13.32	1.01	8.00	Pass
HT40	MCS0	1	9	2452	-14.63	1.01	8.00	Pass



Appendix B. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2388.65	44.02	-29.98	74	45.38	25.4	4.76	31.52	123	120	P	H
		2389.95	33.82	-20.18	54	35.18	25.4	4.76	31.52	123	120	A	H
	*	2412	101.47	-	-	102.65	25.54	4.78	31.5	123	120	P	H
	*	2410	98.34	-	-	99.52	25.54	4.78	31.5	123	120	A	H
		2388.52	42.95	-31.05	74	44.31	25.4	4.76	31.52	386	75	P	V
		2389.95	32.57	-21.43	54	33.93	25.4	4.76	31.52	386	75	A	V
	*	2412	100.26	-	-	101.44	25.54	4.78	31.5	386	75	P	V
	*	2410	97.14	-	-	98.32	25.54	4.78	31.5	386	75	A	V
802.11b CH 06 2437MHz		2389.17	43.17	-30.83	74	44.53	25.4	4.76	31.52	118	104	P	H
		2389.69	32.92	-21.08	54	34.28	25.4	4.76	31.52	118	104	A	H
	*	2436	99.71	-	-	100.71	25.69	4.8	31.49	118	104	P	H
	*	2438	95.62	-	-	96.45	25.83	4.82	31.48	118	104	A	H
		2485.42	46.28	-27.72	74	46.77	26.11	4.86	31.46	118	104	P	H
		2485.48	35.39	-18.61	54	35.88	26.11	4.86	31.46	118	104	A	H
		2389.82	41.75	-32.25	74	43.11	25.4	4.76	31.52	386	76	P	V
		2389.82	31.59	-22.41	54	32.95	25.4	4.76	31.52	386	76	A	V
	*	2436	97.91	-	-	98.91	25.69	4.8	31.49	386	76	P	V
	*	2436	94.76	-	-	95.76	25.69	4.8	31.49	386	76	A	V
		2486.68	43.02	-30.98	74	43.51	26.11	4.86	31.46	386	76	P	V
		2485.3	32.86	-21.14	54	33.35	26.11	4.86	31.46	386	76	A	V



802.11b CH 11 2462MHz	*	2462	102.73	-	-	103.39	25.97	4.84	31.47	164	111	P	H
	*	2462	99.49	-	-	100.15	25.97	4.84	31.47	164	111	A	H
		2485	47.08	-26.92	74	47.57	26.11	4.86	31.46	164	111	P	H
		2483.74	36.94	-17.06	54	37.43	26.11	4.86	31.46	164	111	A	H
	*	2462	100.96	-	-	101.62	25.97	4.84	31.47	373	78	P	V
	*	2462	97.79	-	-	98.45	25.97	4.84	31.47	373	78	A	V
		2484.04	45.45	-28.55	74	45.94	26.11	4.86	31.46	373	78	P	V
		2483.86	34.81	-19.19	54	35.3	26.11	4.86	31.46	373	78	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	38.77	-35.23	74	60.38	30.9	6.87	59.38	150	360	P	H
		4824	39.34	-34.66	74	60.95	30.9	6.87	59.38	150	360	P	V
802.11b CH 06 2437MHz		4872	39.94	-34.06	74	61.21	31.01	6.86	59.14	150	360	P	H
		7308	41.48	-32.52	74	56.22	35.34	8.47	58.55	150	360	P	H
		4872	42.95	-31.05	74	64.22	31.01	6.86	59.14	150	360	P	V
		7308	42.34	-31.66	74	57.08	35.34	8.47	58.55	150	360	P	V
802.11b CH 11 2462MHz		4926	37.96	-36.04	74	58.9	31.12	6.84	58.9	150	360	P	H
		7386	41.07	-32.93	74	56.01	35.55	8.49	58.98	150	360	P	H
		4926	41.15	-32.85	74	62.09	31.12	6.84	58.9	150	360	P	V
		7386	43.05	-30.95	74	57.99	35.55	8.49	58.98	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.95	53.25	-20.75	74	54.61	25.4	4.76	31.52	149	125	P	H
		2389.95	37.62	-16.38	54	38.98	25.4	4.76	31.52	149	125	A	H
	*	2416	100.42	-	-	101.6	25.54	4.78	31.5	149	125	P	H
	*	2414	92.5	-	-	93.68	25.54	4.78	31.5	149	125	A	H
		2389.82	51.84	-22.16	74	53.2	25.4	4.76	31.52	389	79	P	V
		2389.82	38.19	-15.81	54	39.55	25.4	4.76	31.52	389	79	A	V
	*	2410	100.42	-	-	101.6	25.54	4.78	31.5	389	79	P	V
	*	2408	92.71	-	-	93.89	25.54	4.78	31.5	389	79	A	V
802.11g CH 06 2437MHz		2384.88	44.19	-29.81	74	45.62	25.35	4.75	31.53	144	116	P	H
		2384.75	35.45	-18.55	54	36.88	25.35	4.75	31.53	144	116	A	H
	*	2444	99.13	-	-	99.96	25.83	4.82	31.48	144	116	P	H
	*	2444	91.23	-	-	92.06	25.83	4.82	31.48	144	116	A	H
		2489.2	49.82	-24.18	74	50.13	26.26	4.88	31.45	144	116	P	H
		2489.26	41.24	-12.76	54	41.55	26.26	4.88	31.45	144	116	A	H
		2384.49	42.3	-31.7	74	43.73	25.35	4.75	31.53	377	73	P	V
		2384.75	32.88	-21.12	54	34.31	25.35	4.75	31.53	377	73	A	V
	*	2444	99.43	-	-	100.26	25.83	4.82	31.48	377	73	P	V
	*	2444	91.65	-	-	92.48	25.83	4.82	31.48	377	73	A	V
		2489.44	48.22	-25.78	74	48.53	26.26	4.88	31.45	377	73	P	V
		2489.38	39.6	-14.4	54	39.91	26.26	4.88	31.45	377	73	A	V



802.11g CH 11 2462MHz	*	2458	101.95	-	-	102.61	25.97	4.84	31.47	150	110	P	H
	*	2460	94.16	-	-	94.82	25.97	4.84	31.47	150	110	A	H
		2483.68	64.01	-9.99	74	64.5	26.11	4.86	31.46	150	110	P	H
		2483.5	49.14	-4.86	54	49.63	26.11	4.86	31.46	150	110	A	H
	*	2458	101.16	-	-	101.82	25.97	4.84	31.47	367	71	P	V
	*	2458	93.35	-	-	94.01	25.97	4.84	31.47	367	71	A	V
		2483.5	64.92	-9.08	74	65.41	26.11	4.86	31.46	367	71	P	V
		2483.5	50.16	-3.84	54	50.65	26.11	4.86	31.46	367	71	A	V

Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												
--------	---	--	--	--	--	--	--	--	--	--	--	--	--



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	35.93	-38.07	74	57.54	30.9	6.87	59.38	150	360	P	H
		4824	36.61	-37.39	74	58.22	30.9	6.87	59.38	150	360	P	V
802.11g CH 06 2437MHz		4872	37.14	-36.86	74	58.41	31.01	6.86	59.14	150	360	P	H
		7308	40.55	-33.45	74	55.29	35.34	8.47	58.55	150	360	P	H
		4872	38.41	-35.59	74	59.68	31.01	6.86	59.14	150	360	P	V
		7308	41.23	-32.77	74	55.97	35.34	8.47	58.55	150	360	P	V
802.11g CH 11 2462MHz		4926	36.95	-37.05	74	57.89	31.12	6.84	58.9	150	360	P	H
		7386	40.76	-33.24	74	55.7	35.55	8.49	58.98	150	360	P	H
		4926	36.85	-37.15	74	57.79	31.12	6.84	58.9	150	360	P	V
		7386	42.67	-31.33	74	57.61	35.55	8.49	58.98	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.56	55.37	-18.63	74	56.73	25.4	4.76	31.52	145	128	P	H
		2389.95	37.27	-16.73	54	38.63	25.4	4.76	31.52	145	128	A	H
	*	2414	99.7	-	-	100.88	25.54	4.78	31.5	145	128	P	H
	*	2416	91.52	-	-	92.7	25.54	4.78	31.5	145	128	A	H
		2389.56	56	-18	74	57.36	25.4	4.76	31.52	390	94	P	V
		2389.56	37.57	-16.43	54	38.93	25.4	4.76	31.52	390	94	A	V
	*	2408	98.34	-	-	99.52	25.54	4.78	31.5	390	94	P	V
*	2410	90.6	-	-	91.78	25.54	4.78	31.5	390	94	A	V	
802.11n HT20 CH 06 2437MHz		2385.4	45.61	-28.39	74	47.04	25.35	4.75	31.53	140	114	P	H
		2385.4	37.29	-16.71	54	38.72	25.35	4.75	31.53	140	114	A	H
	*	2444	99.24	-	-	100.07	25.83	4.82	31.48	140	114	P	H
	*	2444	91.39	-	-	92.22	25.83	4.82	31.48	140	114	A	H
		2488.9	50.85	-23.15	74	51.16	26.26	4.88	31.45	140	114	P	H
		2488.66	42.26	-11.74	54	42.57	26.26	4.88	31.45	140	114	A	H
		2385.01	43.69	-30.31	74	45.12	25.35	4.75	31.53	380	84	P	V
		2385.4	34.8	-19.2	54	36.23	25.35	4.75	31.53	380	84	A	V
	*	2444	96.93	-	-	97.76	25.83	4.82	31.48	380	84	P	V
	*	2444	89.29	-	-	90.12	25.83	4.82	31.48	380	84	A	V
	2489.08	48.46	-25.54	74	48.77	26.26	4.88	31.45	380	84	P	V	
	2488.78	39.41	-14.59	54	39.72	26.26	4.88	31.45	380	84	A	V	



802.11n HT20 CH 11 2462MHz		2485	64.27	-9.73	74	64.76	26.11	4.86	31.46	148	114	P	H
		2483.5	49.45	-4.55	54	49.94	26.11	4.86	31.46	148	114	A	H
	*	2460	102.69	-	-	103.35	25.97	4.84	31.47	148	114	P	H
	*	2460	93.57	-	-	94.23	25.97	4.84	31.47	148	114	A	H
	*	2458	99.15	-	-	99.81	25.97	4.84	31.47	369	78	P	V
	*	2458	91.33	-	-	91.99	25.97	4.84	31.47	369	78	A	V
		2484.58	60.97	-13.03	74	61.46	26.11	4.86	31.46	369	78	P	V
		2483.62	46.79	-7.21	54	47.28	26.11	4.86	31.46	369	78	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	36.17	-37.83	74	57.78	30.9	6.87	59.38	150	360	P	H
		4824	35.57	-38.43	74	57.18	30.9	6.87	59.38	150	360	P	V
802.11n HT20 CH 06 2437MHz		4872	36.72	-37.28	74	57.99	31.01	6.86	59.14	150	360	P	H
		7308	40.32	-33.68	74	55.06	35.34	8.47	58.55	150	360	P	H
		4872	36.4	-37.6	74	57.67	31.01	6.86	59.14	150	360	P	V
		7308	41.38	-32.62	74	56.12	35.34	8.47	58.55	150	360	P	V
802.11n HT20 CH 11 2462MHz		4926	36.76	-37.24	74	57.7	31.12	6.84	58.9	150	360	P	H
		7386	40.74	-33.26	74	55.68	35.55	8.49	58.98	150	360	P	H
		4926	36.57	-37.43	74	57.51	31.12	6.84	58.9	150	360	P	V
		7386	40.48	-33.52	74	55.42	35.55	8.49	58.98	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2385.66	62.07	-11.93	74	63.43	25.4	4.76	31.52	118	113	P	H
		2389.95	45.42	-8.58	54	46.78	25.4	4.76	31.52	118	113	A	H
	*	2412	97.09	-	-	98.27	25.54	4.78	31.5	118	113	P	H
	*	2410	88.57	-	-	89.75	25.54	4.78	31.5	118	113	A	H
		2484.76	48.47	-25.53	74	48.96	26.11	4.86	31.46	118	113	P	H
		2484.04	36.6	-17.4	54	37.09	26.11	4.86	31.46	118	113	A	H
		2388.91	60.69	-13.31	74	62.05	25.4	4.76	31.52	345	66	P	V
		2389.95	41.87	-12.13	54	43.23	25.4	4.76	31.52	345	66	A	V
	*	2410	92.87	-	-	94.05	25.54	4.78	31.5	345	66	P	V
	*	2410	84.82	-	-	86	25.54	4.78	31.5	345	66	A	V
		2484.58	42.81	-31.19	74	43.3	26.11	4.86	31.46	345	66	P	V
	2483.74	32.26	-21.74	54	32.75	26.11	4.86	31.46	345	66	A	V	
802.11n HT40 CH 06 2437MHz		2389.43	54.41	-19.59	74	55.77	25.4	4.76	31.52	141	126	P	H
		2389.95	40.01	-13.99	54	41.37	25.4	4.76	31.52	141	126	A	H
	*	2452	96.98	-	-	97.81	25.83	4.82	31.48	141	126	P	H
	*	2452	88.91	-	-	89.74	25.83	4.82	31.48	141	126	A	H
		2484.88	57.43	-16.57	74	57.92	26.11	4.86	31.46	141	126	P	H
		2483.8	43.03	-10.97	54	43.52	26.11	4.86	31.46	141	126	A	H
		2389.3	53.8	-20.2	74	55.16	25.4	4.76	31.52	376	75	P	V
		2389.95	37.33	-16.67	54	38.69	25.4	4.76	31.52	376	75	A	V
	*	2448	96.36	-	-	97.19	25.83	4.82	31.48	376	75	P	V
	*	2452	88.25	-	-	89.08	25.83	4.82	31.48	376	75	A	V
		2484.04	55.97	-18.03	74	56.46	26.11	4.86	31.46	376	75	P	V
	2483.5	40.98	-13.02	54	41.47	26.11	4.86	31.46	376	75	A	V	



802.11n HT40 CH 09 2452MHz		2389.56	42.68	-31.32	74	44.04	25.4	4.76	31.52	110	116	P	H
		2389.43	32.88	-21.12	54	34.24	25.4	4.76	31.52	110	116	A	H
	*	2462	96.86	-	-	97.52	25.97	4.84	31.47	110	116	P	H
	*	2462	88.85	-	-	89.51	25.97	4.84	31.47	110	116	A	H
		2485.78	63.48	-10.52	74	63.97	26.11	4.86	31.46	110	116	P	H
		2483.56	50.83	-3.17	54	51.32	26.11	4.86	31.46	110	116	A	H
		2389.43	42.18	-31.82	74	43.54	25.4	4.76	31.52	376	75	P	V
		2389.95	31.49	-22.51	54	32.85	25.4	4.76	31.52	376	75	A	V
	*	2456	95.08	-	-	95.74	25.97	4.84	31.47	376	75	P	V
	*	2458	87.12	-	-	87.78	25.97	4.84	31.47	376	75	A	V
		2484.58	60.19	-13.81	74	60.68	26.11	4.86	31.46	376	75	P	V
		2483.56	47.42	-6.58	54	47.91	26.11	4.86	31.46	376	75	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n		4842	35.92	-38.08	74	57.42	30.93	6.87	59.3	100	360	P	H
HT40		7266	40.83	-33.17	74	55.49	35.26	8.46	58.38	100	360	P	H
CH 03		4842	35.42	-38.58	74	56.92	30.93	6.87	59.3	100	360	P	V
2422MHz		7266	40.69	-33.31	74	55.35	35.26	8.46	58.38	100	360	P	V
802.11n		4872	36.1	-37.9	74	57.37	31.01	6.86	59.14	150	360	P	H
HT40		7308	40.36	-33.64	74	55.1	35.34	8.47	58.55	150	360	P	H
CH 06		4872	38.25	-35.75	74	59.52	31.01	6.86	59.14	150	360	P	V
2437MHz		7308	41.24	-32.76	74	55.98	35.34	8.47	58.55	150	360	P	V
802.11n		4902	35.99	-38.01	74	57.04	31.08	6.85	58.98	100	360	P	H
HT40		7356	40.1	-33.9	74	54.95	35.47	8.49	58.81	100	360	P	H
CH 09		4902	36.85	-37.15	74	57.9	31.08	6.85	58.98	100	360	P	V
2452MHz		7356	41.13	-32.87	74	55.98	35.47	8.49	58.81	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

15C Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		30.97	24.82	-15.18	40	30.08	25.74	0.08	31.08	-	-	P	H
		163.86	29.67	-13.83	43.5	42.18	16.86	1.58	30.95	-	-	P	H
		211.39	34.41	-9.09	43.5	47.7	16.21	1.62	31.12	106	157	P	H
		216.24	36.09	-9.91	46	49.17	16.42	1.63	31.13	-	-	P	H
		353.98	35.24	-10.76	46	43.16	21.31	2.27	31.5	-	-	P	H
		939.86	31.44	-14.56	46	29.43	29.98	3.29	31.26	-	-	P	H
		37.76	30.2	-9.8	40	39.69	21.46	0.17	31.12	100	261	P	V
		168.71	27.96	-15.54	43.5	40.79	16.7	1.44	30.97	-	-	P	V
		194.9	27.95	-15.55	43.5	41.62	15.86	1.55	31.08	-	-	P	V
		215.27	29.2	-14.3	43.5	42.32	16.38	1.63	31.13	-	-	P	V
		353.98	29.79	-16.21	46	37.71	21.31	2.27	31.5	-	-	P	V
	906.88	30.86	-15.14	46	29.61	29.25	3.13	31.13	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.60	8.23	0.12	300Hz
802.11g	87.06	1.37	0.73	1kHz
802.11n HT20	86.73	1.28	0.78	1kHz
802.11n HT40	86.32	1.23	0.81	1kHz

802.11b

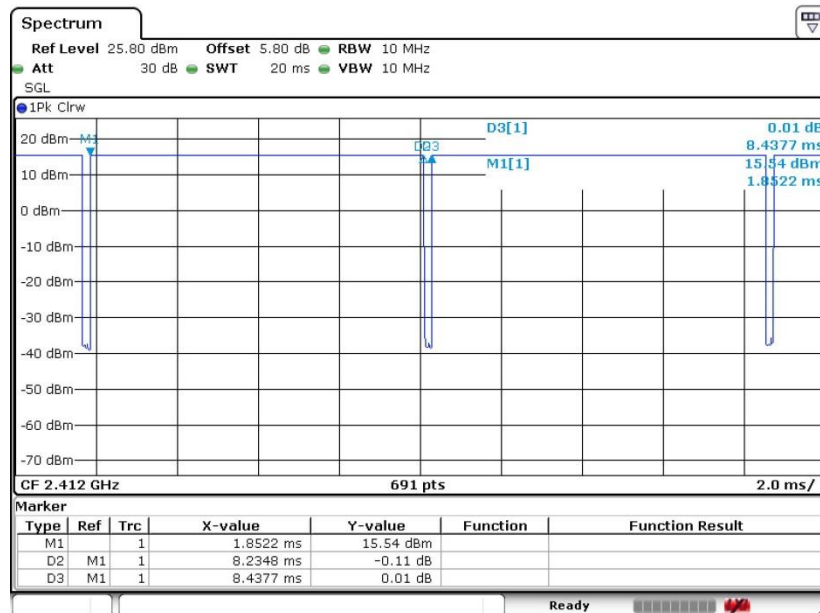




802.11g

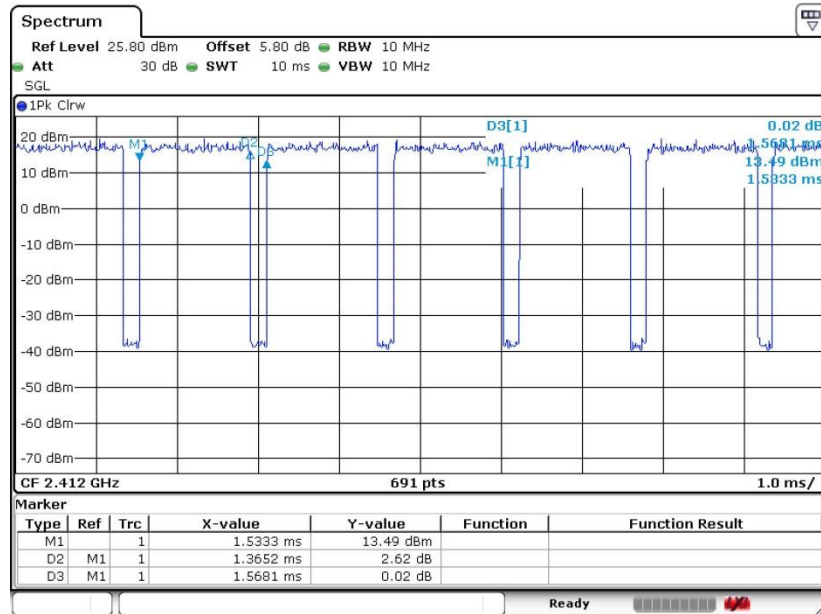

802.11n HT20

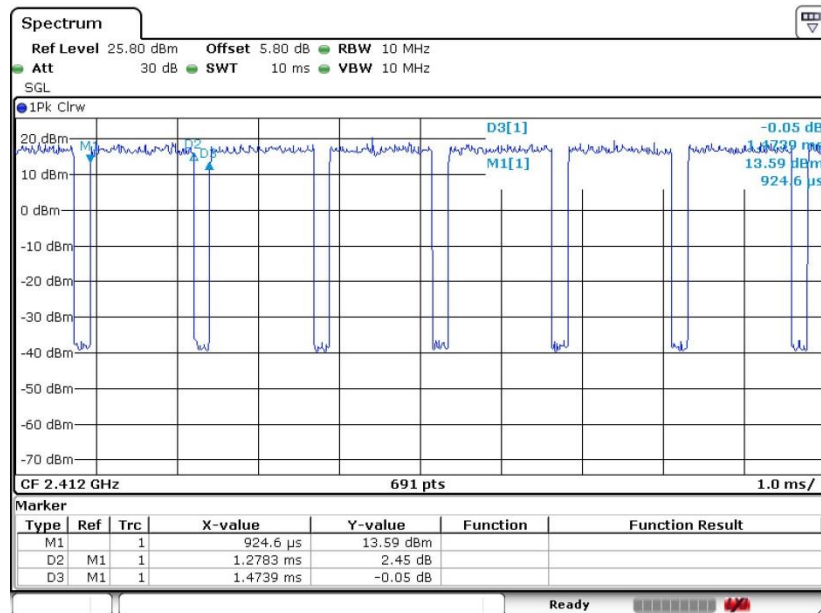



802.11n HT40

