



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 10808  
**FCC ID** : IHDT56WJ2  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

This is a data re-used report which is only valid together with the original test report. The product was received on Mar. 08, 2017 and testing was completed on Apr. 19, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**Sportun International (KunShan) INC.**  
**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1    Applicant.....	5
1.2    Manufacturer .....	5
1.3    Product Feature of Equipment Under Test .....	5
1.4    Product Specification of Equipment Under Test .....	6
1.5    Specification of Accessory .....	7
1.6    Component List .....	8
1.7    Modification of EUT .....	8
1.8    Re-use of Measured Data .....	9
1.9    Maximum ERP Power, Frequency Tolerance, and Emission Designator.....	10
1.10    Testing Location .....	10
1.11    Applicable Standards .....	10
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>11</b>
2.1    Test Mode.....	11
2.2    Connection Diagram of Test System .....	12
2.3    Support Unit used in test configuration .....	13
2.4    Measurement Results Explanation Example .....	13
<b>3 CONDUCTED TEST RESULT.....</b>	<b>14</b>
3.1    Measuring Instruments.....	14
3.2    Test Setup .....	14
3.3    Test Result of Conducted Test.....	14
3.4    Conducted Output Power and ERP .....	15
3.5    Peak-to-Average Ratio .....	16
3.6    99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	17
3.7    Conducted Band Edge .....	18
3.8    Conducted Spurious Emission .....	19
3.9    Frequency Stability .....	20
<b>4 RADIATED TEST ITEMS .....</b>	<b>21</b>
4.1    Measuring Instruments.....	21
4.2    Test Setup .....	21
4.3    Test Result of Radiated Test.....	21
4.4    Field Strength of Spurious Radiation Measurement .....	22
<b>5 LIST OF MEASURING EQUIPMENT .....</b>	<b>23</b>
<b>6 UNCERTAINTY OF EVALUATION .....</b>	<b>24</b>
<b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>	
<b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>	
<b>APPENDIX C. TEST SETUP PHOTOGRAPHS</b>	
<b>APPENDIX D. REFERENCE REPORT</b>	



## REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.5	NA	Peak-to-Average Ratio	Reporting Only	PASS	-
3.6	§2.1049 §22.917(b)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
4.4	§2.1053 §22.917(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 38.40 dB at 1672.000 MHz



## 1 General Description

### 1.1 Applicant

**Motorola Mobility LLC**

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

### 1.2 Manufacturer

**Motorola Mobility LLC**

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

### 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Mobile Cellular Phone
<b>Brand Name</b>	Motorola
<b>Model Name</b>	10808
<b>FCC ID</b>	IHDT56WJ2
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+ (16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
<b>IMEI Code</b>	Conducted: 351894080019137/351894080019145 for Sample 1 Radiation: 351894080017271/351894080017289 for Sample 1
<b>HW Version</b>	DVT2
<b>SW Version</b>	montana_n-userdebug 7.1.1 NPP26.56 1473 intcfg,test-keys
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	<b>GSM/GPRS/EDGE:</b> 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz <b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	<b>GSM/GPRS/EDGE:</b> 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz <b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>WCDMA:</b> Band V: 23.05 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Antenna Gain</b>	Cellular Band: -1.01 dBi
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: BPSK (Uplink) HSDPA/DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+ : 16QAM (uplink is not supported) DC-HSDPA : 64QAM



## 1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Salom)	Model Name	SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA		
AC Adapter 2	Brand Name	Motorola(chenyang)	Model Name	SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA		
AC Adapter 3	Brand Name	Motorola(LiteOn)	Model Name	SC-22
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc or 9Vdc or 12Vdc, 3000mA or 1600mA or 1200mA		
Battery 1	Brand Name	Motorola (ATL)	Model Name	SB18C15119
	Power Rating	3.8Vdc,3000mAh	Type	Li-ion
Battery 2	Brand Name	Motorola (sunwoda)	Model Name	SB18C15118
	Power Rating	3.8Vdc,3000mAh	Type	Li-ion
Earphone 1	Brand Name	Motorola(Lian chuang)	Model Name	SJYN1181B
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core		
Earphone 2	Brand Name	Motorola(Lianyun)	Model Name	TS500-03AMS01WHR-M
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core		
Earphone 3	Brand Name	Motorola(Tianzhi)	Model Name	TJ101817
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core		
USB Cable 1	Brand Name	Motorola(Liqi)	Model Name	L25W-051000100AL
	Signal Line Type	1.0 meter, shielded cable, without core		
USB Cable 2	Brand Name	Motorola(Fukangyuan)	Model Name	F25W-051000100A
	Signal Line Type	1.0 meter, shielded cable, without core		



## 1.6 Component List

**Note:** There are two types of EUT, the details refer the following table. According to the difference, we choose sample 1 to perform full test.

Component	Sample 1	Sample 2
CPU	Qualcomm MSM-8937-4-727NSP-TR-00-1-AA	Qualcomm MSM-8937-4-727NSP-TR-00-1-AA
TLCM	Tianma TL052VVMP09-00/TL052VVMP13-00	Mutto 1010-0502-00009/1010-0502-00010
Memory	Samsung KMRX1000BM-B614	Hynix H9TQ26ACLTMCUR-KUM
Front Camera	sunny D5V16C-0JG	O-film L5695F70
Back Camera	sunny AL6S05S-0JG	Q-tech F3P3MBK
Battery	ATL SB18C15119	Sunwoda SB18C15118

## 1.7 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.8 Re-use of Measured Data

### 1.8.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 10808, FCC ID: IHDT56WJ2) is electrically identical to the reference device (Model: 10807, 11154, FCC ID: IHDT56WJ4) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

### 1.8.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., some difference of population/depopulation to enable support of different cellular bands, please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sportun RF Report No. FG730825-02A for the reference device Model: 10807, 11154, FCC ID: IHDT56WJ4):

### 1.8.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, Conducted Band-edge and Conducted spurious emission, the test result were consistent with FCC ID: IHDT56WJ4. And re-test WCDMA Band V.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

### 1.8.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE (2G/3G)	IHDT56WJ4	Part22H.24E. 27L (FG730825-02A)	All sections applicable for GSM 850/ GSM 1900/WCDMA II



## 1.9 Maximum ERP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	WCDMA Band V RMC 12.2Kbps	BPSK	0.0975	0.0118 ppm	4M13F9W

## 1.10 Testing Location

Test Site	Sportun International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sportun Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.11 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for WCDMA Band V.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

## 2.2 Connection Diagram of Test System

For 22H

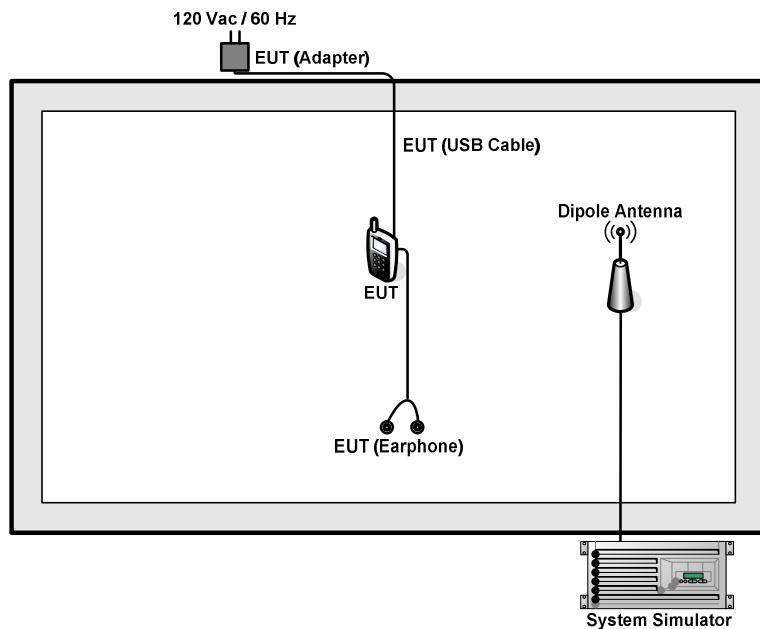



## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

$$= 4.5 + 10 = 14.5 \text{ (dB)}$$


### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

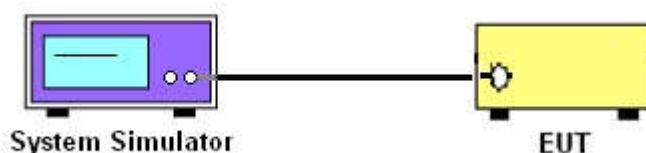

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

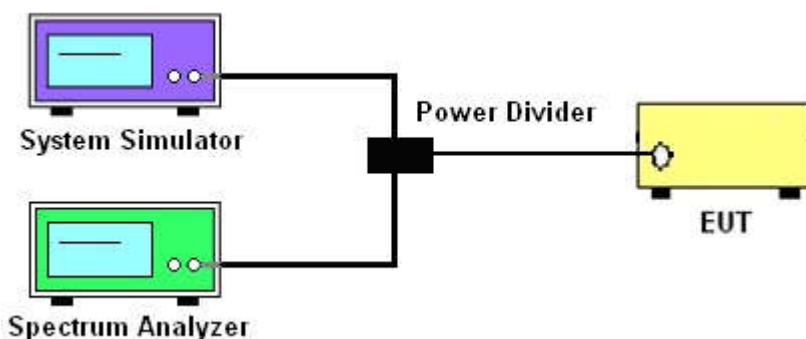

##### 3.2.3 Frequency Stability

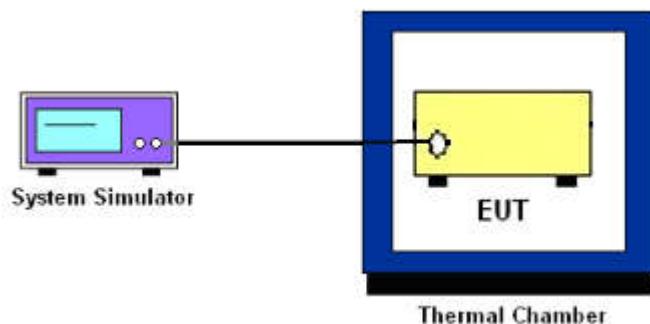

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and ERP

#### 3.4.1 Description of the Conducted Output Power and ERP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for WCDMA.



## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.

Record the maximum PAPR level associated with a probability of 0.1%.



### 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.7 Conducted Band Edge

### 3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.



## 3.8 Conducted Spurious Emission

### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^\circ\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^\circ\text{C}$  steps up to  $50^\circ\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $20\pm 5^\circ\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

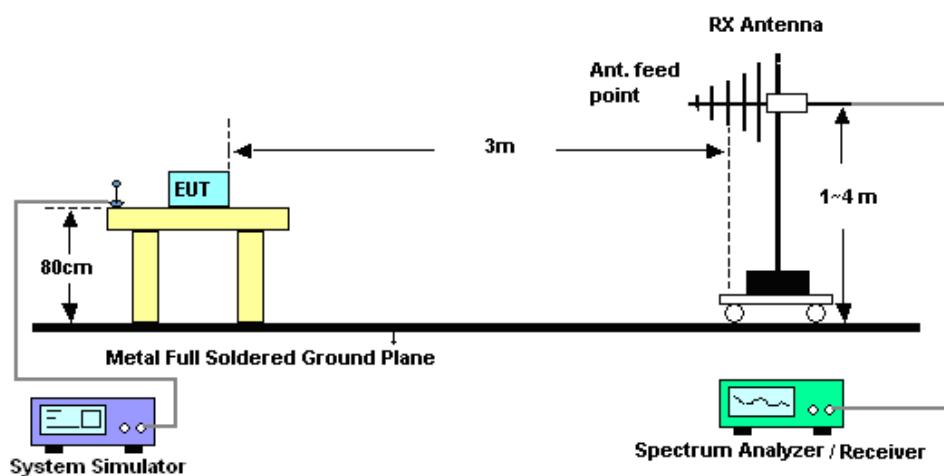

#### 4.2.2 For radiated test above 1GHz

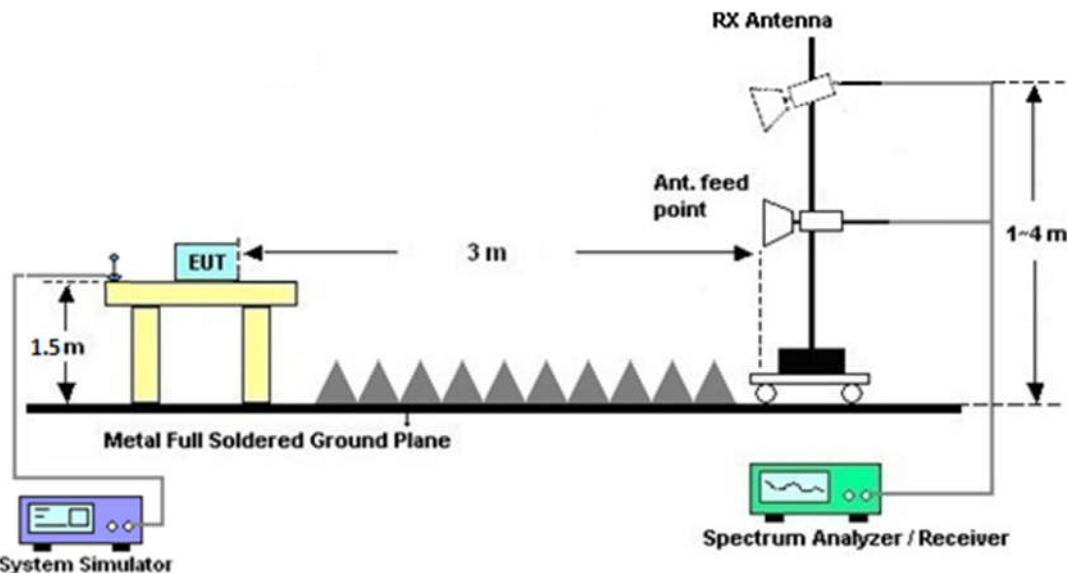

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
12. ERP (dBm) = EIRP - 2.15
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13 \text{ dBm.}$$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Apr. 19, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Apr. 19, 2017	Oct. 12, 2017	Conducted (TH01-KS)
Radio communication	Anritsu	MT8820C	6201300652	2G/3G/LTE Band	Aug. 08, 2016	Apr. 19, 2017	Aug. 07, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Apr. 12, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Apr. 12, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Apr. 12, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Apr. 12, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Apr. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 12, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 12, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 12, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (25 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)


Conducted Power (*Unit: dBm)			
Band	WCDMA Band V		
Channel	4132	4182	4233
Frequency	826.4	836.4	846.6
AMR 12.2Kbps	22.89	23.00	23.02
RMC 12.2Kbps	22.90	23.05	23.02
HSDPA Subtest-1	22.05	22.10	22.11
HSDPA Subtest-2	22.08	22.12	22.14
HSDPA Subtest-3	21.61	21.57	21.57
HSDPA Subtest-4	21.41	21.40	21.43
DC-HSDPA Subtest-1	22.07	22.00	21.92
DC-HSDPA Subtest-2	22.08	21.89	21.96
DC-HSDPA Subtest-3	22.04	21.88	22.01
DC-HSDPA Subtest-4	22.02	21.85	21.98
HSUPA Subtest-1	21.30	21.35	21.40
HSUPA Subtest-2	20.58	20.62	20.70
HSUPA Subtest-3	20.72	20.80	20.81
HSUPA Subtest-4	21.55	21.60	21.64
HSUPA Subtest-5	20.55	20.60	20.68

**ERP**

WCDMA Band V ( $G_T - L_{C-} = -1.01\text{dB}$ )			
<b>Channel</b>	4132	4182	4233
	(Low)	(Mid)	(High)
<b>Frequency</b> (MHz)	826.4	836.4	846.6
<b>Conducted Power (dBm)</b>	22.90	23.05	23.02
<b>Conducted Power (Watts)</b>	0.1950	0.2018	0.2004
<b>ERP(dBm)</b>	19.74	19.89	19.86
<b>ERP(Watts)</b>	0.0942	0.0975	0.0968


**Peak-to-Average Ratio**

Mode	WCDMA Band V(dB)	Limit: 13dB
Mod.	RMC 12.2Kbps	Result
Lowest CH	3.16	PASS
Middle CH	2.9	
Highest CH	2.99	

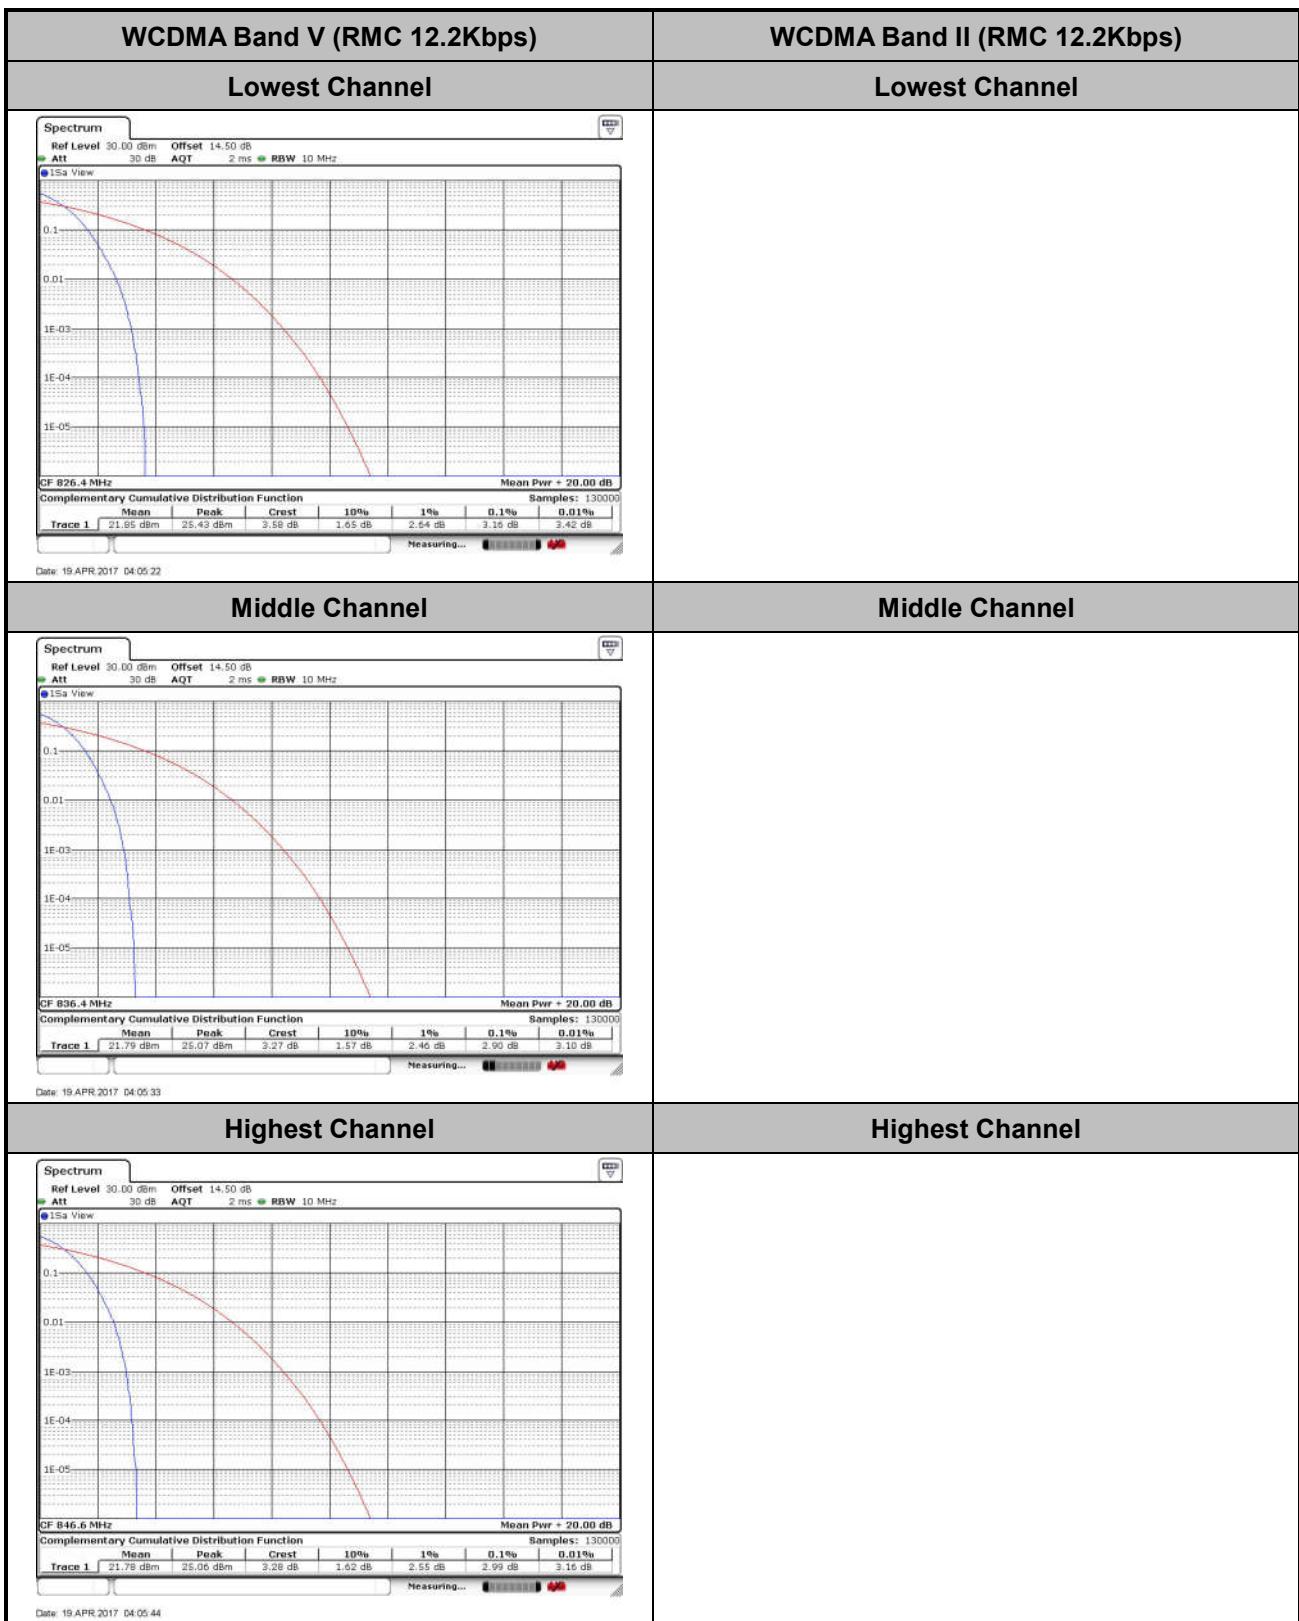

**26dB Bandwidth**


Mode	WCDMA Band V(MHz)
Mod.	RMC 12.2Kbps
Lowest CH	4.715
Middle CH	4.715
Highest CH	4.715

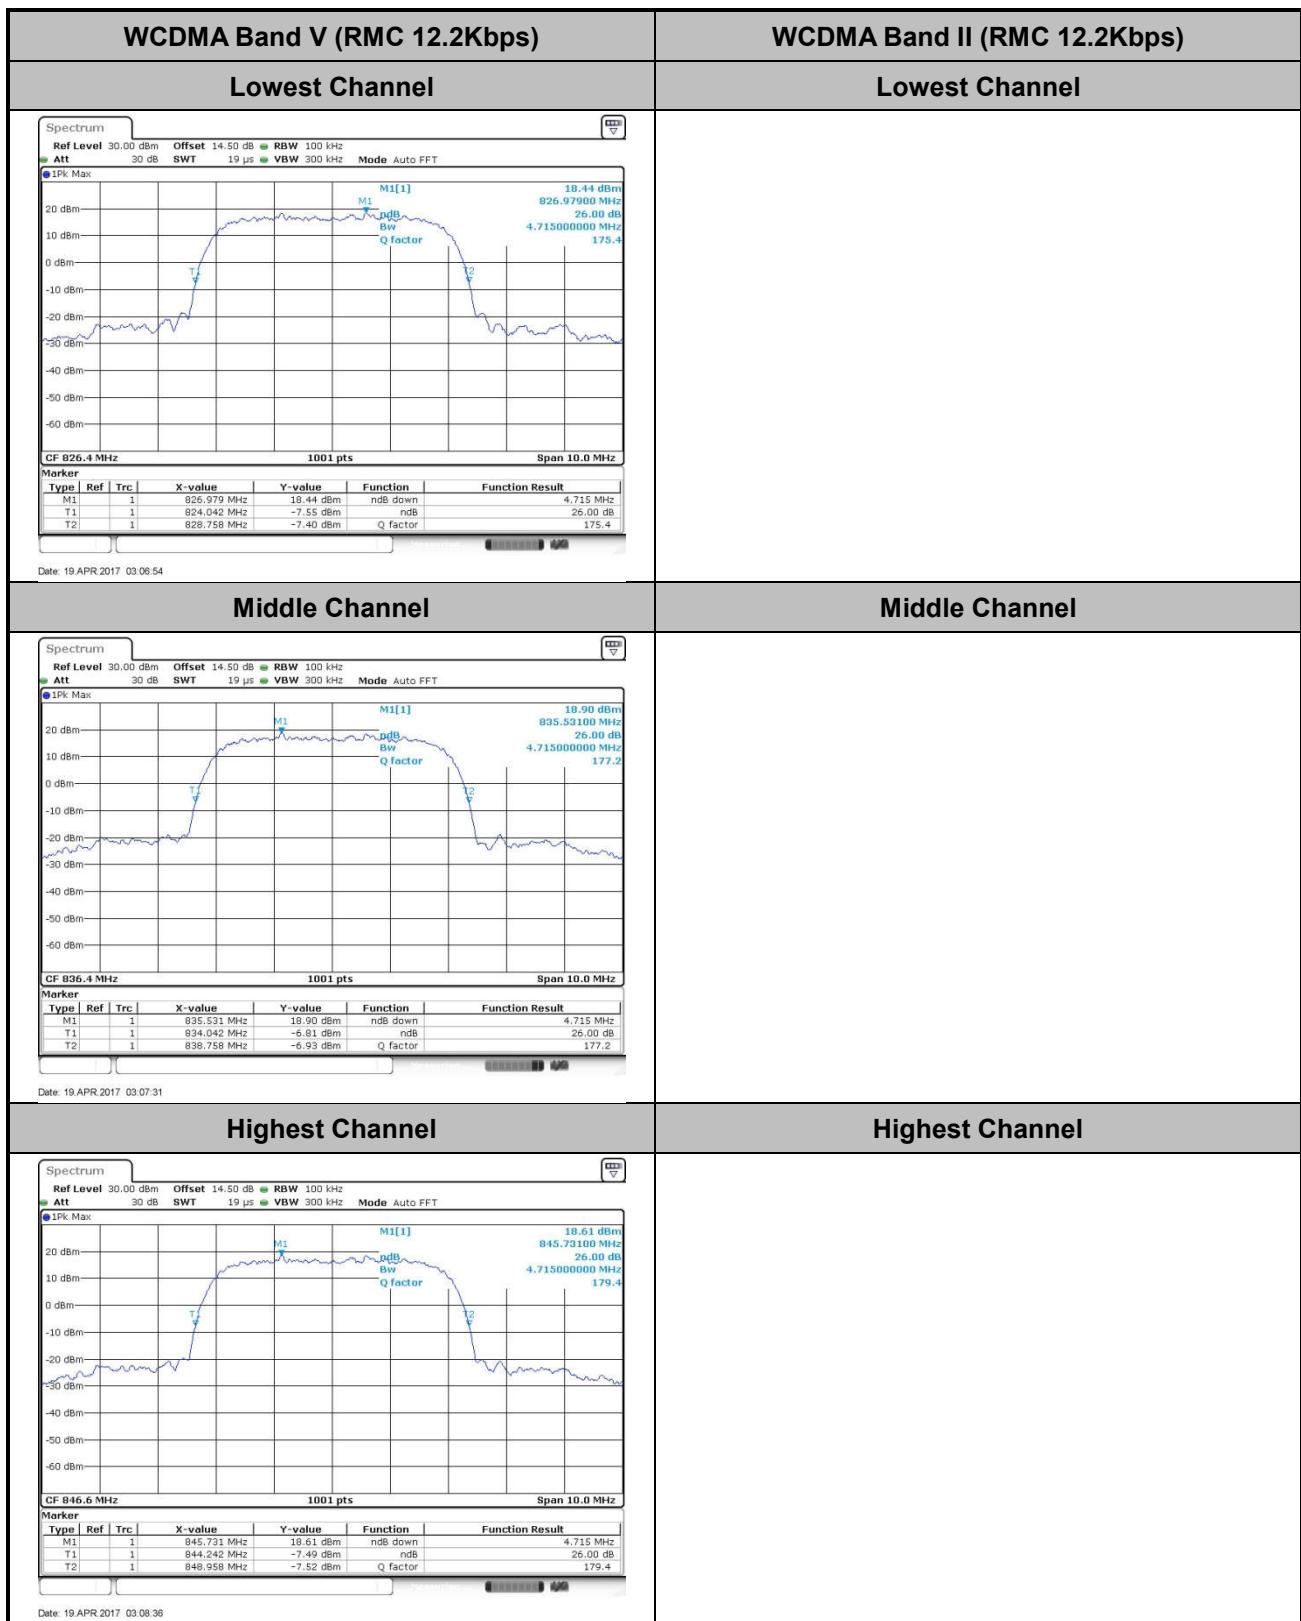




## Occupied Bandwidth

Mode	WCDMA Band V(MHz)
Mod.	<b>RMC 12.2Kbps</b>
Lowest CH	4.13
Middle CH	4.12
Highest CH	4.12

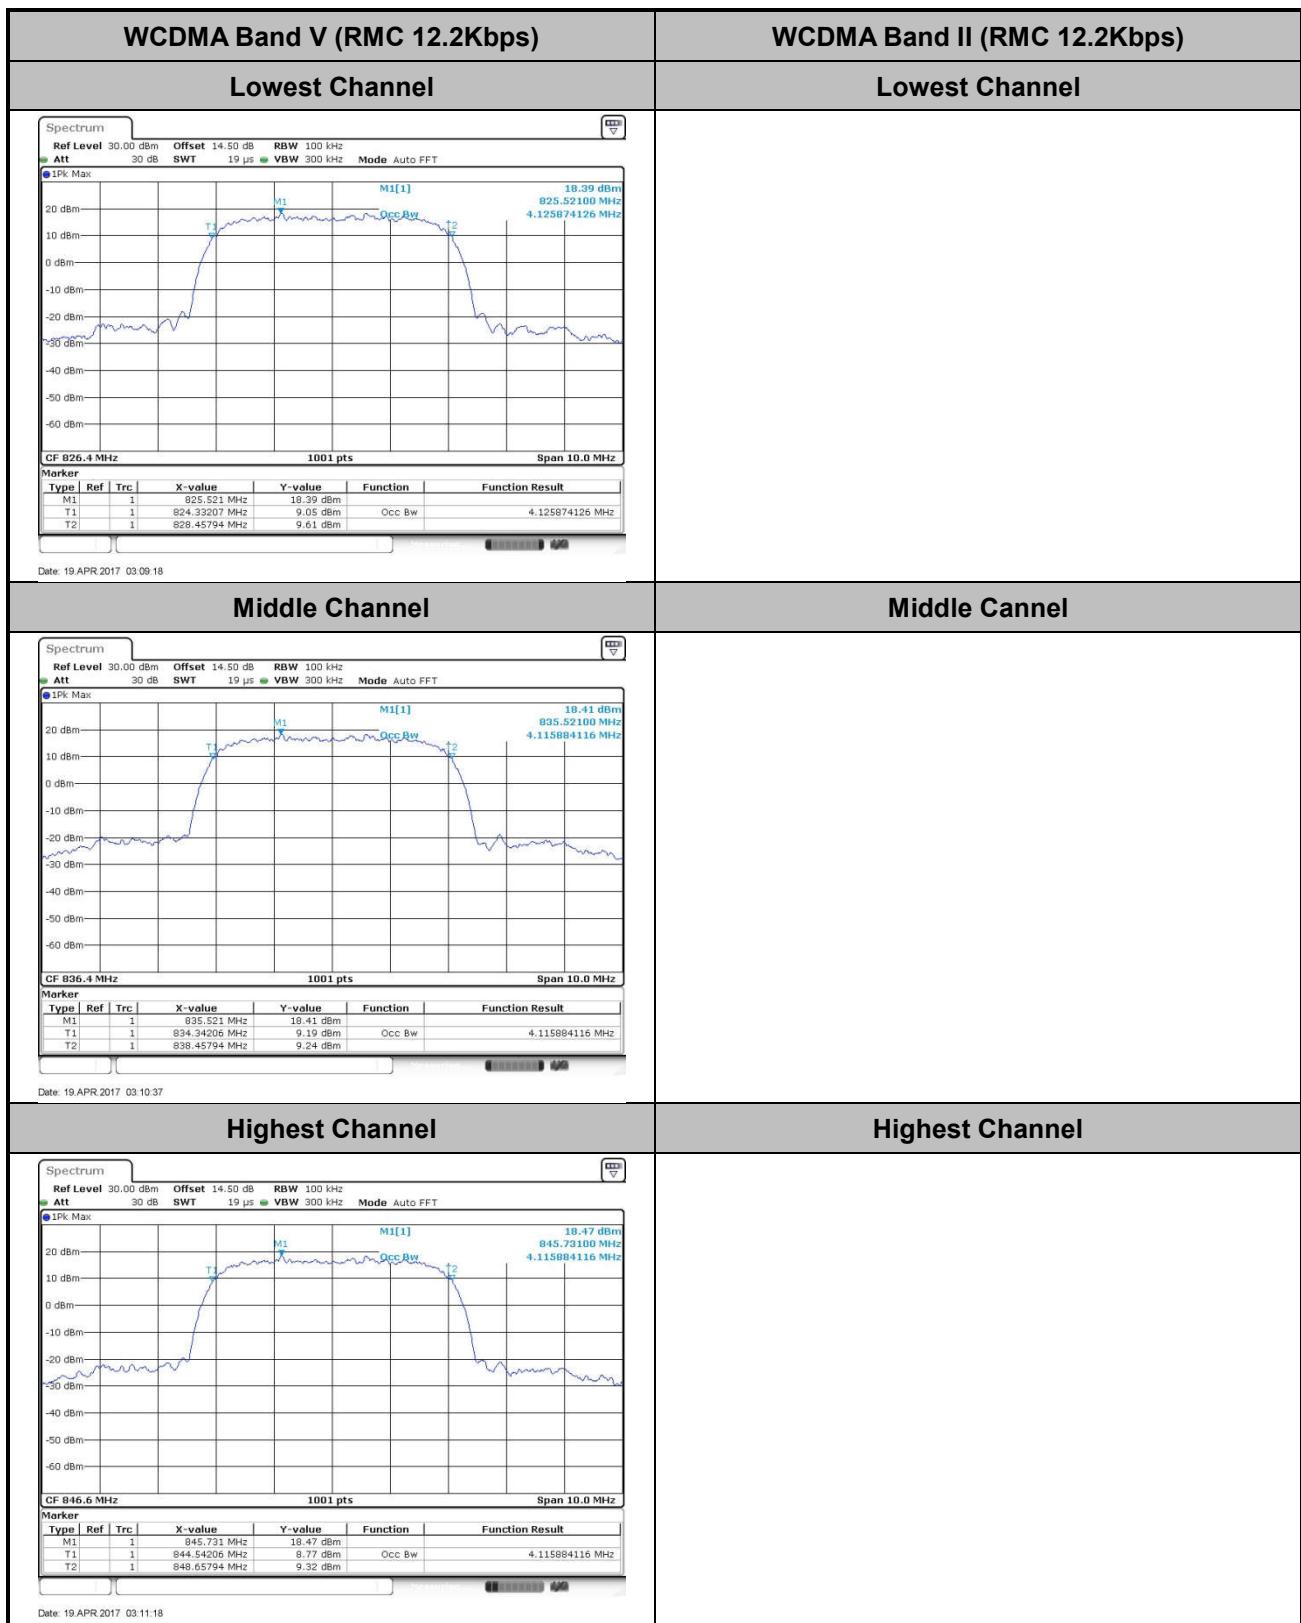






## Conducted Band Edge

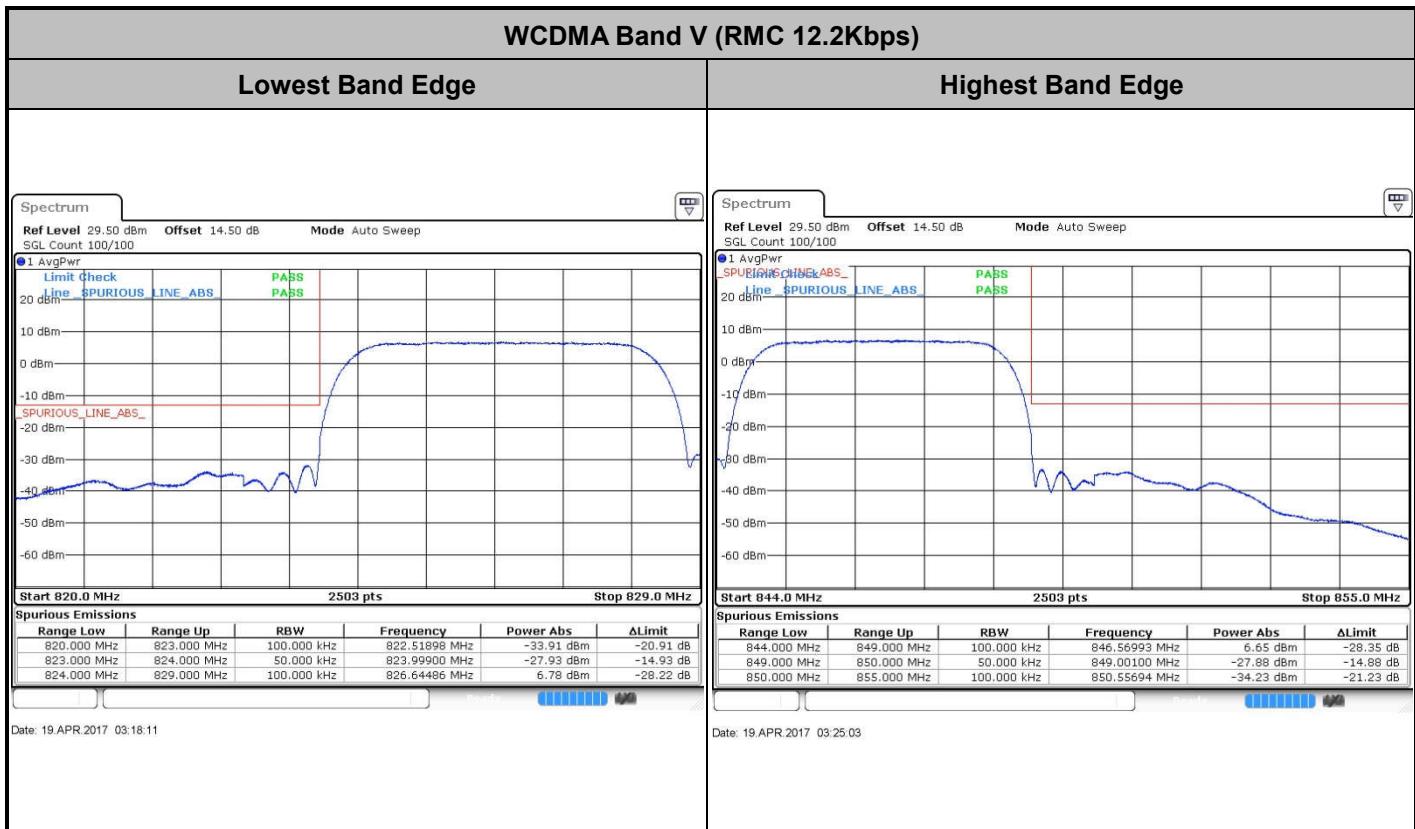



## Conducted Spurious Emission

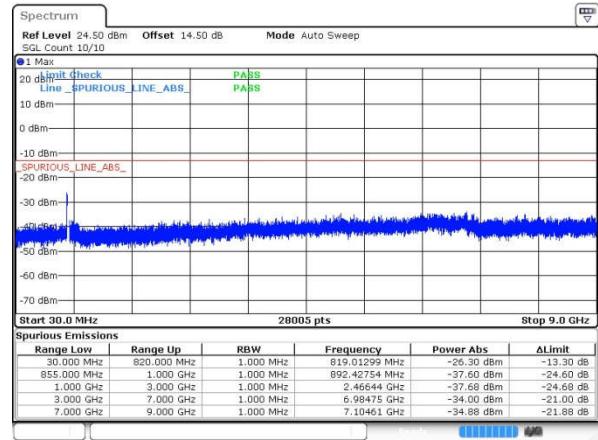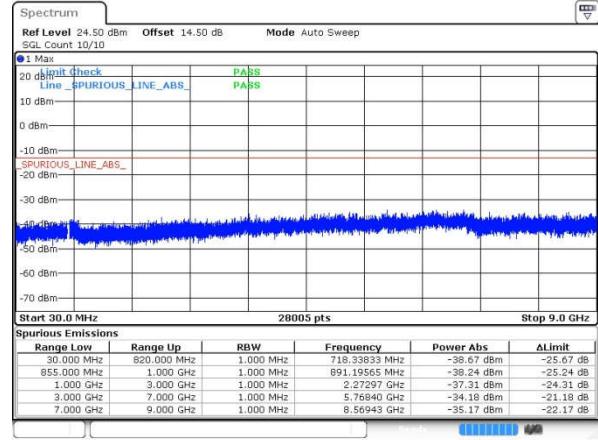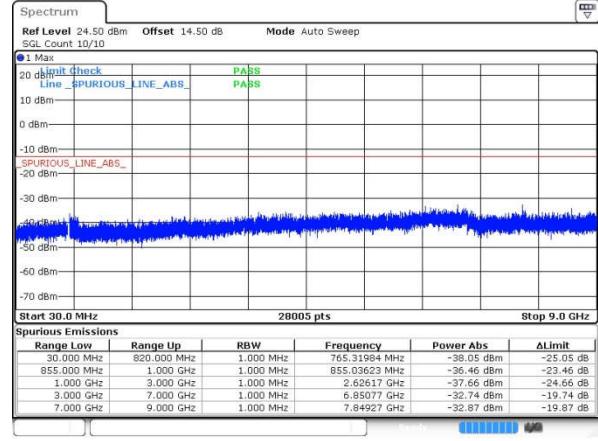WCDMA Band V (RMC 12.2Kbps)		WCDMA Band II (RMC 12.2Kbps)																																																																									
Lowest Channel		Lowest Channel																																																																									
 <p><b>Spectrum</b> Ref Level: 24.50 dBm Offset: 14.50 dB Mode: Auto Sweep SQL Count: 10/10</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>620.000 MHz</td> <td>1.000 MHz</td> <td>619.01299 MHz</td> <td>-26.30 dBm</td> <td>-13.30 dB</td> </tr> <tr> <td>855.000 MHz</td> <td>1.000 GHz</td> <td>1.000 MHz</td> <td>892.42754 MHz</td> <td>-37.60 dBm</td> <td>-24.60 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.46544 GHz</td> <td>-37.68 dBm</td> <td>-24.68 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>6.98475 GHz</td> <td>-34.00 dBm</td> <td>-21.00 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>7.10461 GHz</td> <td>-34.88 dBm</td> <td>-21.88 dB</td> </tr> </tbody> </table> <p>Date: 19 APR 2017 03:36:51</p>		Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	620.000 MHz	1.000 MHz	619.01299 MHz	-26.30 dBm	-13.30 dB	855.000 MHz	1.000 GHz	1.000 MHz	892.42754 MHz	-37.60 dBm	-24.60 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.46544 GHz	-37.68 dBm	-24.68 dB	3.000 GHz	7.000 GHz	1.000 MHz	6.98475 GHz	-34.00 dBm	-21.00 dB	7.000 GHz	9.000 GHz	1.000 MHz	7.10461 GHz	-34.88 dBm	-21.88 dB																																						
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																						
30.000 MHz	620.000 MHz	1.000 MHz	619.01299 MHz	-26.30 dBm	-13.30 dB																																																																						
855.000 MHz	1.000 GHz	1.000 MHz	892.42754 MHz	-37.60 dBm	-24.60 dB																																																																						
1.000 GHz	3.000 GHz	1.000 MHz	2.46544 GHz	-37.68 dBm	-24.68 dB																																																																						
3.000 GHz	7.000 GHz	1.000 MHz	6.98475 GHz	-34.00 dBm	-21.00 dB																																																																						
7.000 GHz	9.000 GHz	1.000 MHz	7.10461 GHz	-34.88 dBm	-21.88 dB																																																																						
 <p><b>Spectrum</b> Ref Level: 24.50 dBm Offset: 14.50 dB Mode: Auto Sweep SQL Count: 10/10</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>520.000 MHz</td> <td>1.000 MHz</td> <td>719.33053 MHz</td> <td>-28.16 dBm</td> <td>-25.16 dB</td> </tr> <tr> <td>855.000 MHz</td> <td>1.000 GHz</td> <td>1.000 MHz</td> <td>891.19565 MHz</td> <td>-38.24 dBm</td> <td>-35.24 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.27297 GHz</td> <td>-37.31 dBm</td> <td>-24.31 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>5.76840 GHz</td> <td>-34.18 dBm</td> <td>-21.18 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>8.56943 GHz</td> <td>-35.17 dBm</td> <td>-22.17 dB</td> </tr> </tbody> </table> <p>Date: 19 APR 2017 03:41:22</p>		Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	520.000 MHz	1.000 MHz	719.33053 MHz	-28.16 dBm	-25.16 dB	855.000 MHz	1.000 GHz	1.000 MHz	891.19565 MHz	-38.24 dBm	-35.24 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.27297 GHz	-37.31 dBm	-24.31 dB	3.000 GHz	7.000 GHz	1.000 MHz	5.76840 GHz	-34.18 dBm	-21.18 dB	7.000 GHz	9.000 GHz	1.000 MHz	8.56943 GHz	-35.17 dBm	-22.17 dB	 <p><b>Spectrum</b> Ref Level: 24.50 dBm Offset: 14.50 dB Mode: Auto Sweep SQL Count: 10/10</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>620.000 MHz</td> <td>1.000 MHz</td> <td>765.21011 MHz</td> <td>-38.05 dBm</td> <td>-25.05 dB</td> </tr> <tr> <td>855.000 MHz</td> <td>1.000 GHz</td> <td>1.000 MHz</td> <td>853.00053 MHz</td> <td>-36.46 dBm</td> <td>-33.46 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.62617 GHz</td> <td>-37.66 dBm</td> <td>-24.66 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>6.85077 GHz</td> <td>-32.74 dBm</td> <td>-19.74 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>7.84927 GHz</td> <td>-32.87 dBm</td> <td>-19.87 dB</td> </tr> </tbody> </table> <p>Date: 19 APR 2017 03:44:07</p>		Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	620.000 MHz	1.000 MHz	765.21011 MHz	-38.05 dBm	-25.05 dB	855.000 MHz	1.000 GHz	1.000 MHz	853.00053 MHz	-36.46 dBm	-33.46 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.62617 GHz	-37.66 dBm	-24.66 dB	3.000 GHz	7.000 GHz	1.000 MHz	6.85077 GHz	-32.74 dBm	-19.74 dB	7.000 GHz	9.000 GHz	1.000 MHz	7.84927 GHz	-32.87 dBm	-19.87 dB
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																						
30.000 MHz	520.000 MHz	1.000 MHz	719.33053 MHz	-28.16 dBm	-25.16 dB																																																																						
855.000 MHz	1.000 GHz	1.000 MHz	891.19565 MHz	-38.24 dBm	-35.24 dB																																																																						
1.000 GHz	3.000 GHz	1.000 MHz	2.27297 GHz	-37.31 dBm	-24.31 dB																																																																						
3.000 GHz	7.000 GHz	1.000 MHz	5.76840 GHz	-34.18 dBm	-21.18 dB																																																																						
7.000 GHz	9.000 GHz	1.000 MHz	8.56943 GHz	-35.17 dBm	-22.17 dB																																																																						
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																						
30.000 MHz	620.000 MHz	1.000 MHz	765.21011 MHz	-38.05 dBm	-25.05 dB																																																																						
855.000 MHz	1.000 GHz	1.000 MHz	853.00053 MHz	-36.46 dBm	-33.46 dB																																																																						
1.000 GHz	3.000 GHz	1.000 MHz	2.62617 GHz	-37.66 dBm	-24.66 dB																																																																						
3.000 GHz	7.000 GHz	1.000 MHz	6.85077 GHz	-32.74 dBm	-19.74 dB																																																																						
7.000 GHz	9.000 GHz	1.000 MHz	7.84927 GHz	-32.87 dBm	-19.87 dB																																																																						



## Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0118	PASS
40	Normal Voltage	0.0110	
30	Normal Voltage	0.0007	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0016	
0	Normal Voltage	0.0082	
-10	Normal Voltage	0.0074	
-20	Normal Voltage	0.0017	
-30	Normal Voltage	0.0090	
20	Maximum Voltage	0.0001	
20	Normal Voltage	0.0075	
20	Battery End Point	0.0056	

**Note:** Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6V. ; Maximum Voltage =4.4



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

WCDMA Band V (RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-51.40	-13	-38.40	-51.51	-53.26	1.19	5.20	H
	2510	-65.34	-13	-52.34	-68.33	-67.56	1.53	5.90	H
	3345	-67.65	-13	-54.65	-71.60	-70.44	1.76	6.70	H
	1672	-52.14	-13	-39.14	-51.12	-54.00	1.19	5.20	V
	2510	-66.09	-13	-53.09	-68.07	-68.31	1.53	5.90	V
	3345	-67.80	-13	-54.80	-71.12	-70.59	1.76	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



## **Appendix D. Reference Report**

Please refer to Sporton report number FG730825-02A which is issued separately.