



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT1924-4,XT1924-5  
**FCC ID** : IHDT56XA5  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Dec. 22, 2017 and testing was completed on Jan. 18, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Laboratory SPORTON INTERNATIONAL INC.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

**Sporton International (Kunshan) Inc.**

**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China**



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 6

    1.6 Specification of Accessory ..... 6

    1.7 Testing Location ..... 7

    1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 11

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example ..... 12

**3 TEST RESULT ..... 13**

    3.1 6dB Bandwidth Measurement ..... 13

    3.2 Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 18

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 28

    3.6 AC Conducted Emission Measurement ..... 32

    3.7 Antenna Requirements ..... 36

**4 LIST OF MEASURING EQUIPMENT ..... 37**

**5 UNCERTAINTY OF EVALUATION ..... 38**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.05 dB at 7311.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.99 dB at 0.156 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1924-4,XT1924-5
FCC ID	IHDT56XA5
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted : 351878090031216/351878090031224 Conduction: 351878090028931/351878090028949 Radiation: 351878090028550/ 351878090028568
HW Version	DVT1B
SW Version	rhannah-userdebug 8.0.0 OPP27.66 1190 intcfg,test-keys
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1(model name XT1924-4) is dual SIM slot, sample 2(model name XT1924-5) is single SIM slot. According to the difference, we choose sample 1 to perform full test.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.25 dBm (0.1679 W) 802.11g : 22.35 dBm (0.1718 W) 802.11n HT20 : 22.39 dBm (0.1734 W)
Antenna Type / Gain	IFA Antenna with gain 0.07 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola (Acbel)	Model Name SPN5945A C-P35
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
AC Adapter 1(EU)	Brand Name	Motorola (Acbel)	Model Name SPN5944A C-P36
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
AC Adapter 1(UK)	Brand Name	Motorola (Acbel)	Model Name SPN5940A C-P37
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
AC Adapter 1(IN)	Brand Name	Motorola (Acbel)	Model Name SA18C19493 C-P49 SPN5946A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
AC Adapter 2(US)	Brand Name	Motorola (Salom)	Model Name SSW-2919UMTJ C-P35 SPN5945A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
AC Adapter 2(EU)	Brand Name	Motorola (Salom)	Model Name SSW-2919EU C-P36 SPN5944A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
AC Adapter 2(UK)	Brand Name	Motorola (Salom)	Model Name SSW-2919UK C-P37 SPN5940A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA	
Battery	Brand Name	Motorola (Amperex)	Model Name HE50
	Power Rating	3.8Vdc,4850/5000mAh	Type Li-ion
Earphone	Brand Name	Motorola (NEW Leaders)	Model Name NLD-EM300V-01SF
	Signal Line Type	1.25 meter, non-shielded cable, without ferrite core	
USB Cable (Black/White)	Brand Name	Motorola (Saibao)	Model Name SLQ-A081A
	Signal Line Type	1.02 meter, shielded cable, without ferrite core	



### 1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

<b>Test Site</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Test Firm Registration No.</b>
	TH01-KS	CO01-KS	630927

**Note:** The test site complies with ANSI C63.4 2014 requirement.

SPORTON INTERNATIONAL INC. is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and under the FCC-recognized accredited testing laboratories by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564 Wenhua 3rd Rd. Guishan Dist. Taoyuan City Taiwan TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH12-HY	TW0007	214511

**Note:**

1. The test site complies with ANSI C63.4 2014 requirement.
2. Test data subcontracted: radiated spurious emissions in section 3.5 of this report.



## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter 1) for Sample 1
	Mode 2: GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter 2) for Sample 1
<b>Remark:</b> The worst case of conducted emission is mode 1; only the test data of it was reported.	

## 2.3 Connection Diagram of Test System

<WLAN 802.11b/g/n HT20 Tx Mode>



<AC Conducted Emission Mode>

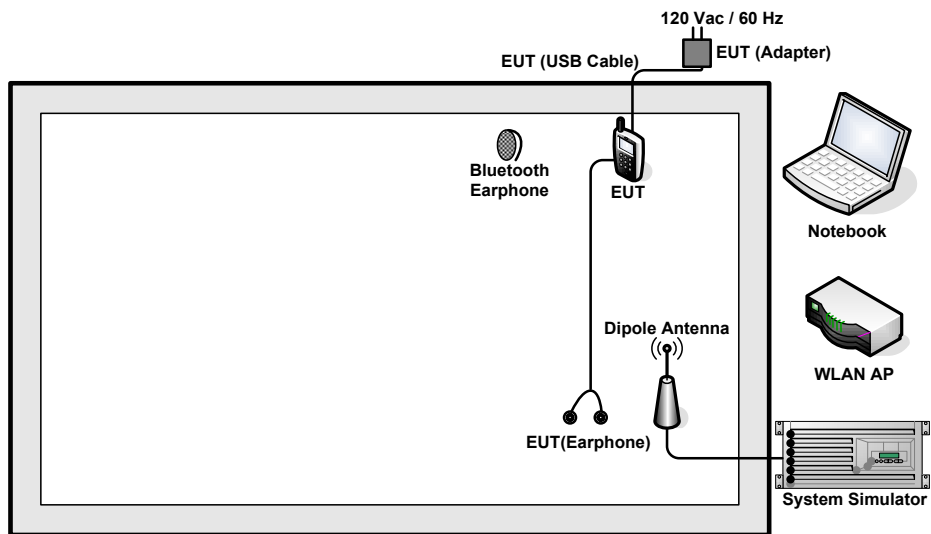

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	N/A	N/A	Shielded cable DC O/P 1.8 m Unshielded AC I/P cable 1.2 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to WLAN link with the Notebook under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

$Offset = RF\ cable\ loss.$

Following shows an offset computation example with cable loss 5.4 dB.

$Offset(dB) = RF\ cable\ loss(dB).$

$= 5.4\ (dB)$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup

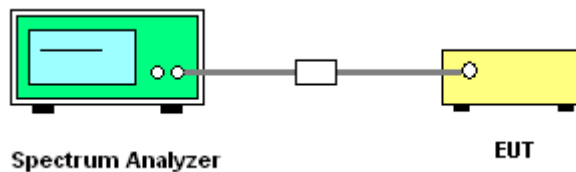



### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

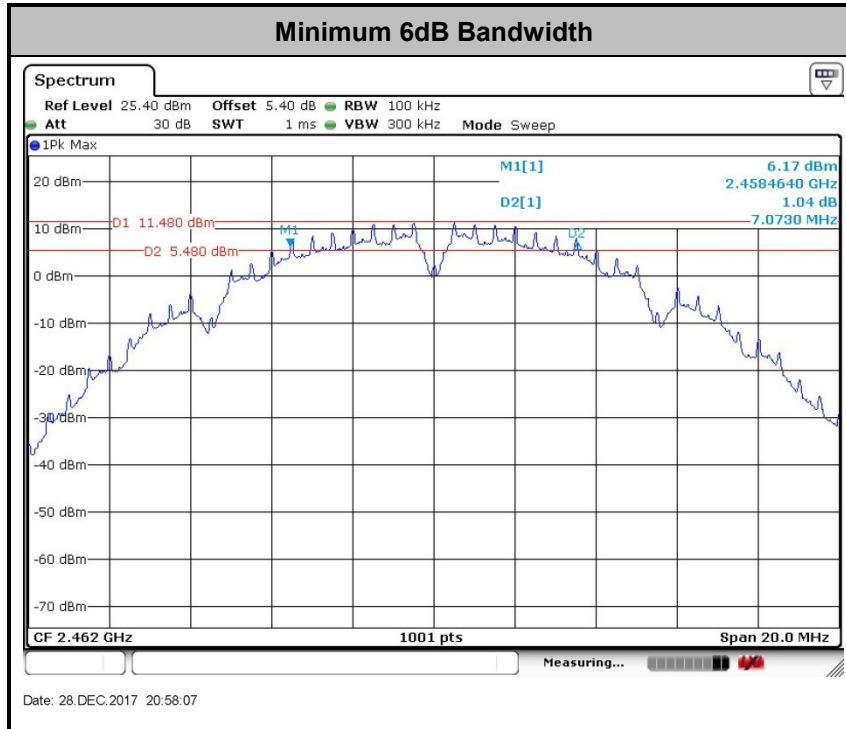

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

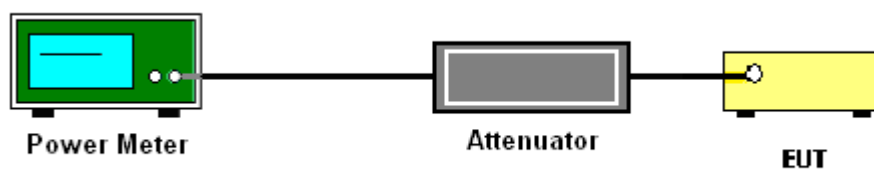

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

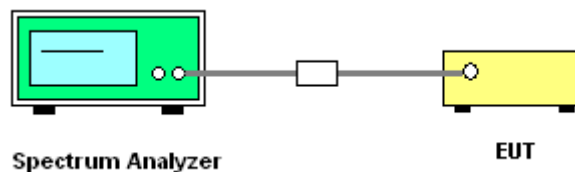






### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

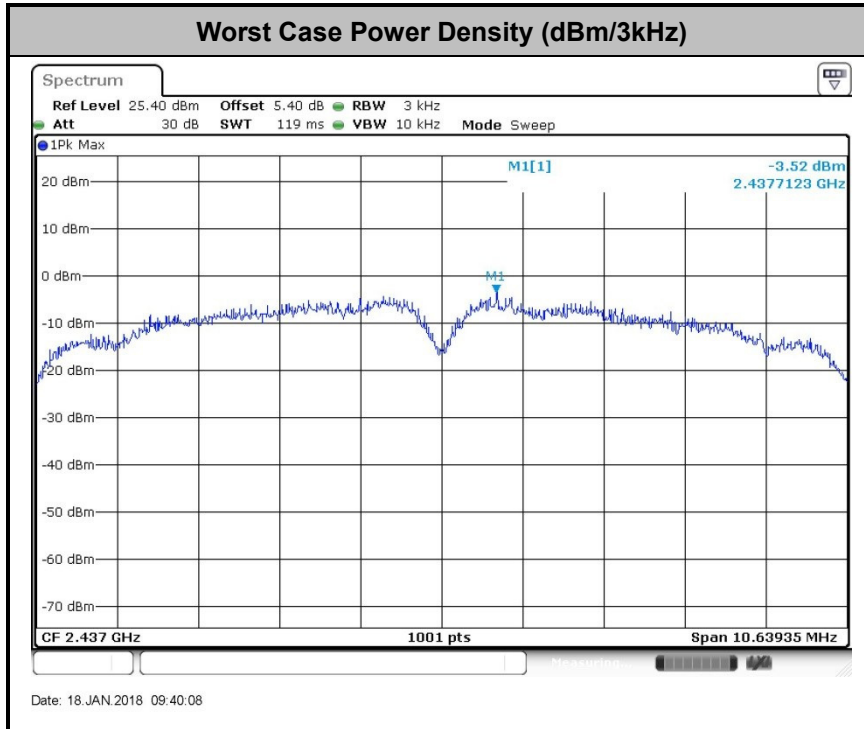

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

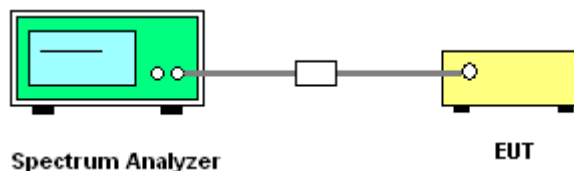



### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

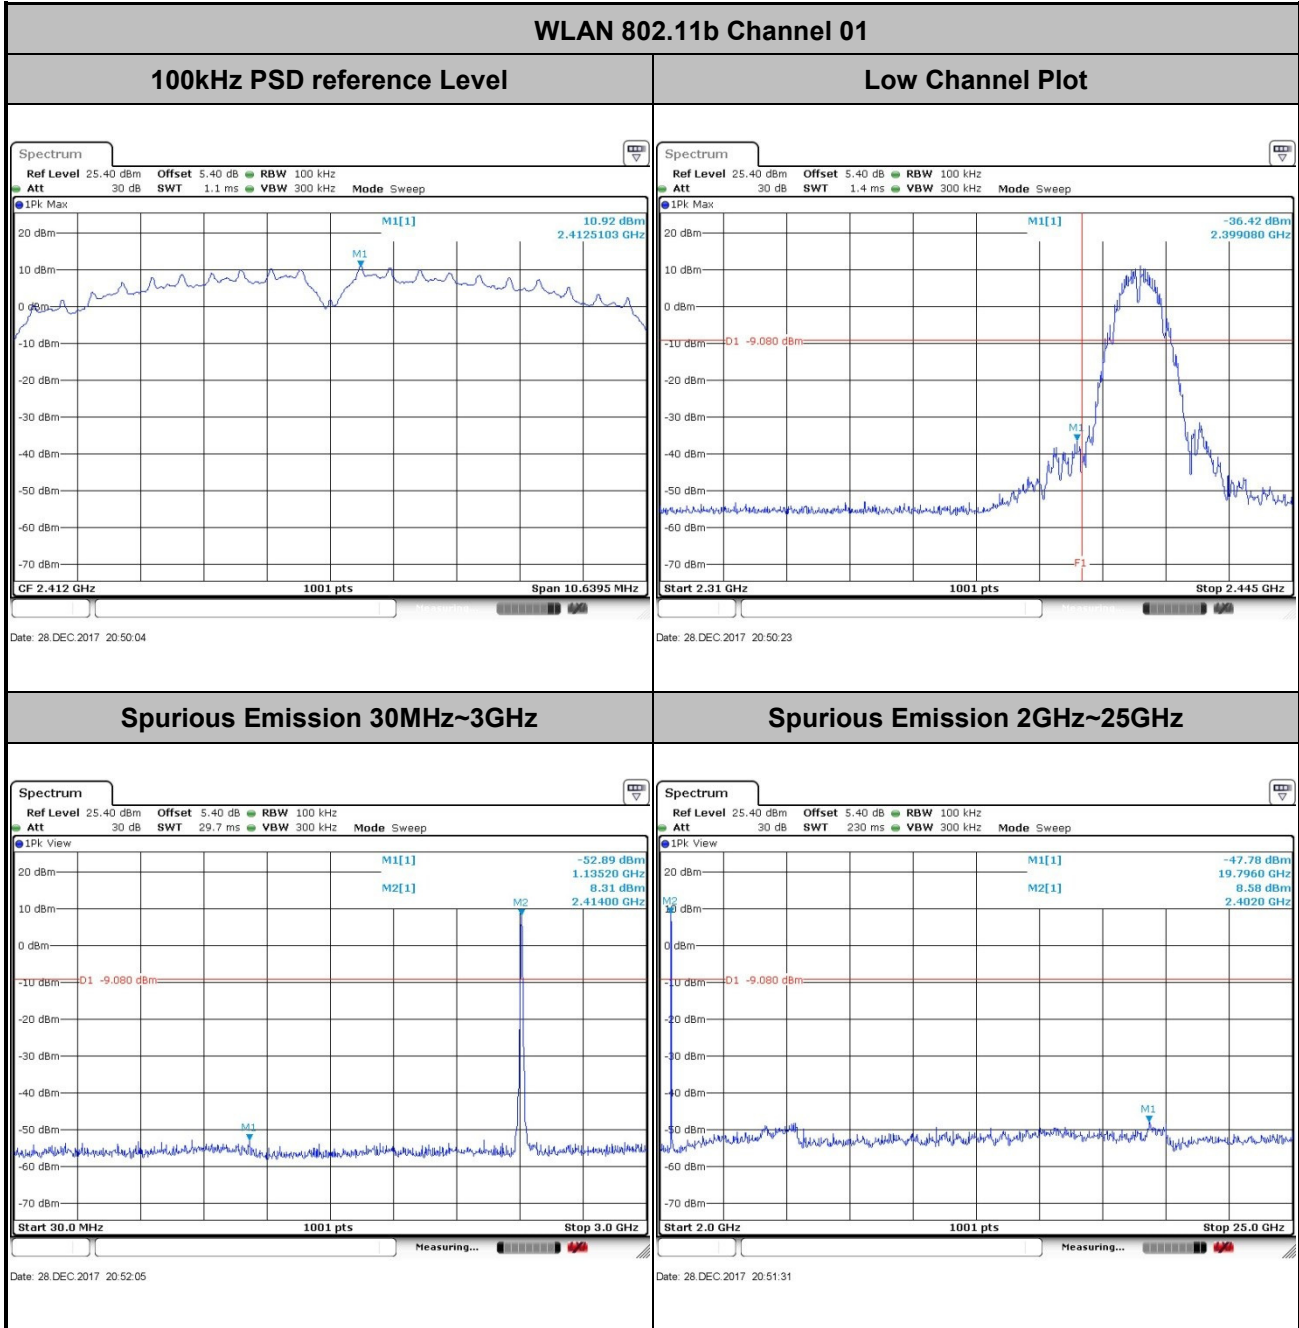





Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11b Channel 06


100kHz PSD reference Level

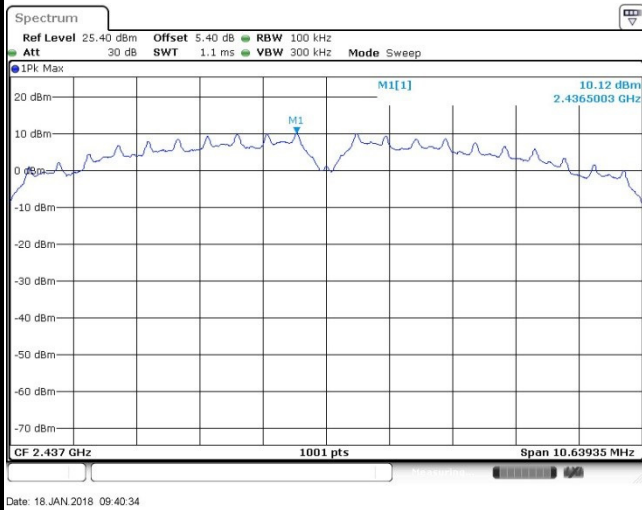

Spurious Emission 30MHz~3GHz

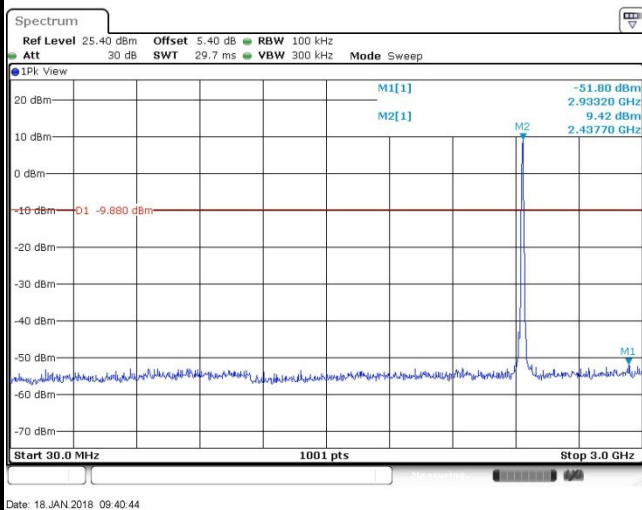

Spurious Emission 2GHz~25GHz

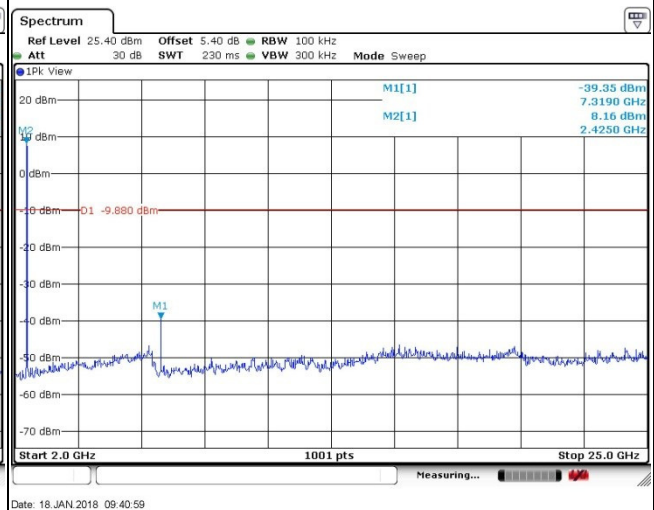




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11b Channel 11

100kHz PSD reference Level

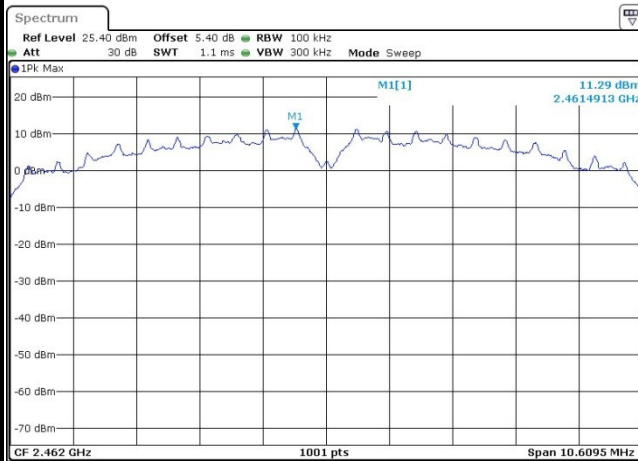


Date: 28 DEC.2017 20:58:43

High Channel Plot

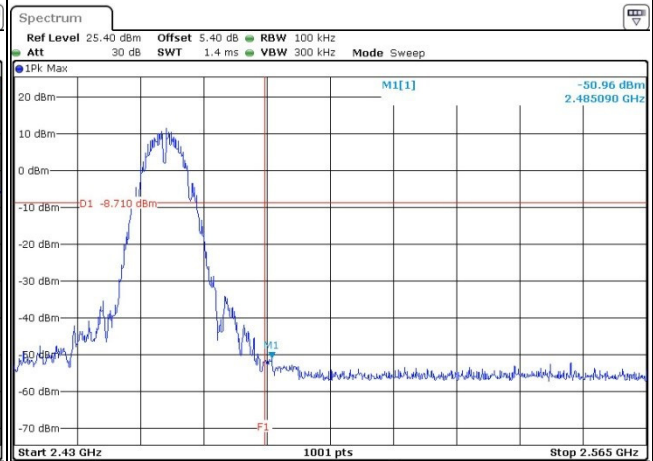


Date: 28 DEC.2017 20:58:57

Spurious Emission 30MHz~3GHz

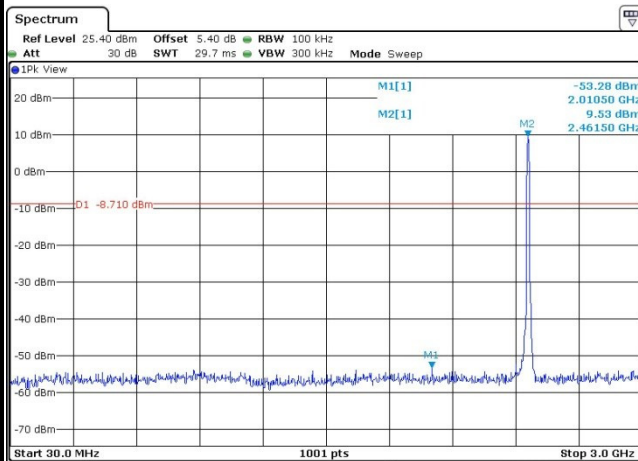

Date: 28 DEC.2017 21:00:31

Spurious Emission 2GHz~25GHz

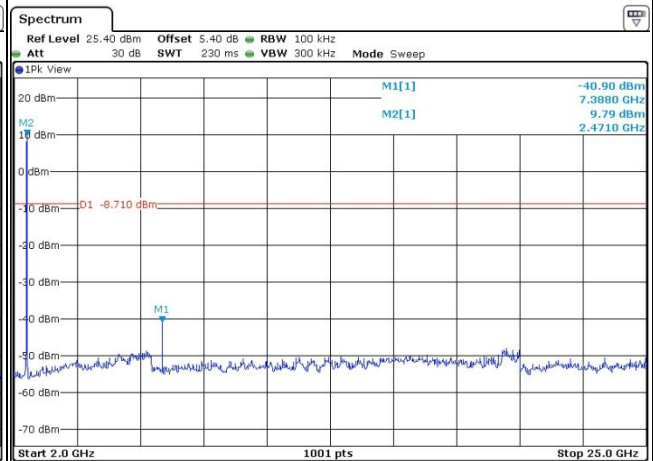


Date: 28 DEC.2017 20:59:28



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11g Channel 01

100kHz PSD reference Level

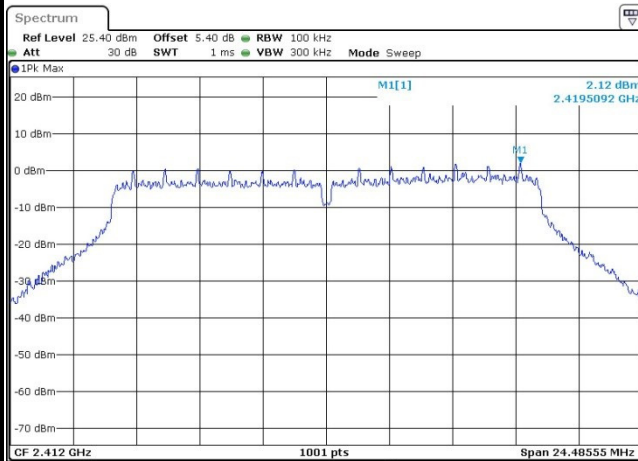


Date: 18 JAN 2018 09:44:25

Low Channel Plot

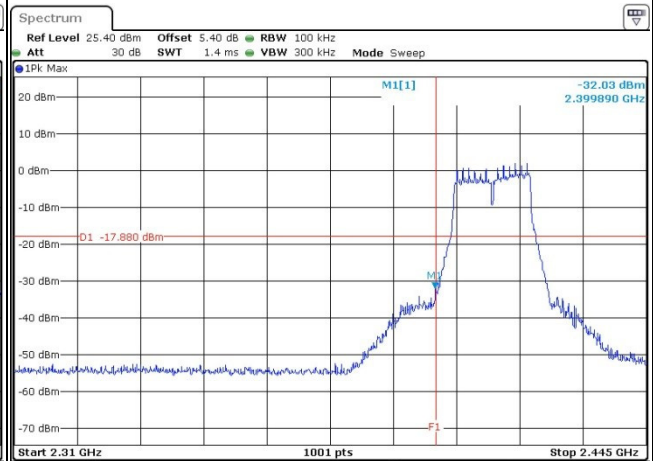


Date: 18 JAN 2018 09:44:40

Spurious Emission 30MHz~3GHz

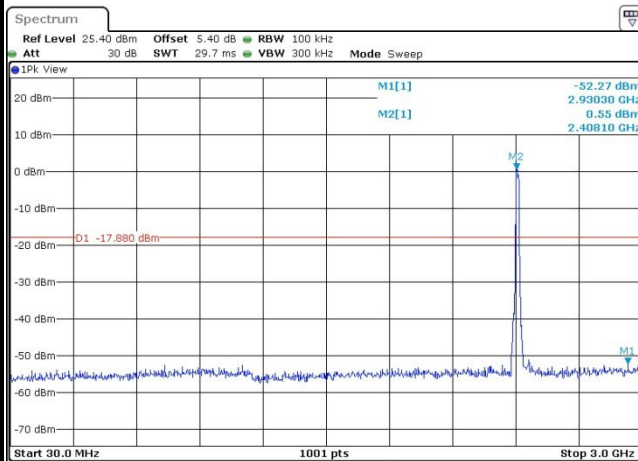

Date: 18 JAN 2018 09:45:04

Spurious Emission 2GHz~25GHz

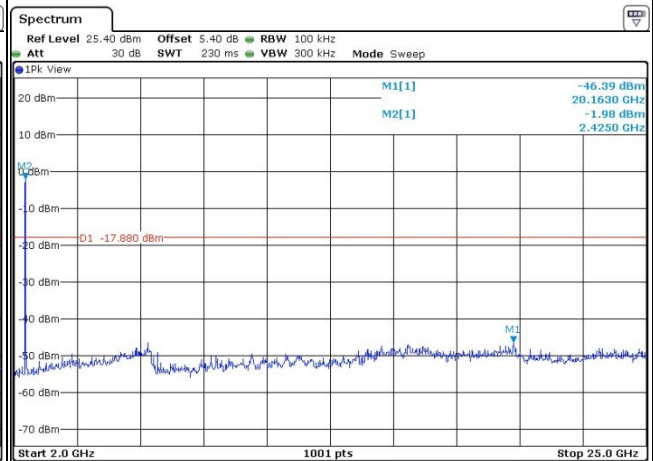


Date: 18 JAN 2018 09:45:22



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11g Channel 06

100kHz PSD reference Level

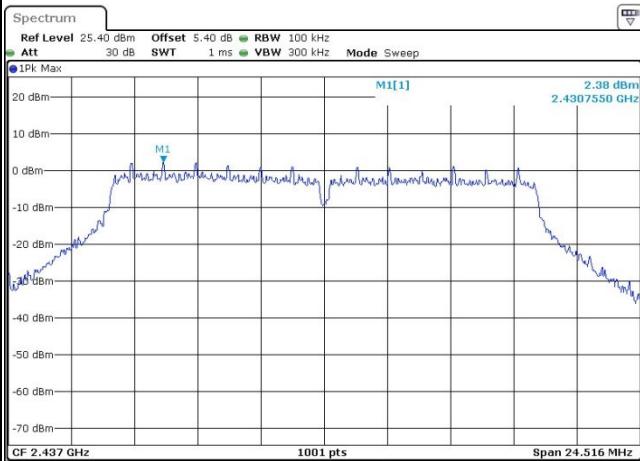


Date: 28 DEC 2017 21:06:17

Spurious Emission 30MHz~3GHz

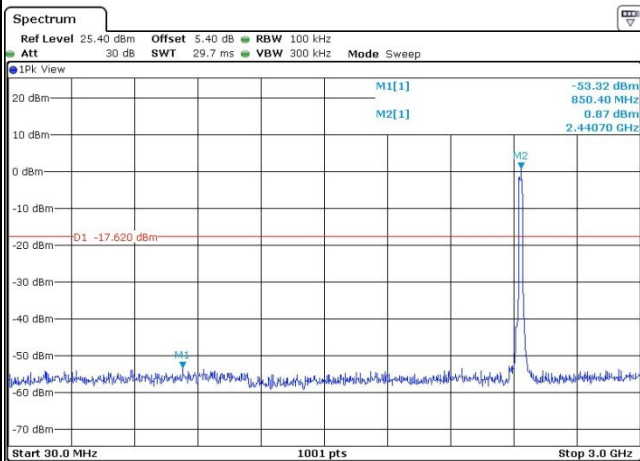

Date: 28 DEC 2017 21:07:25


Spurious Emission 2GHz~25GHz

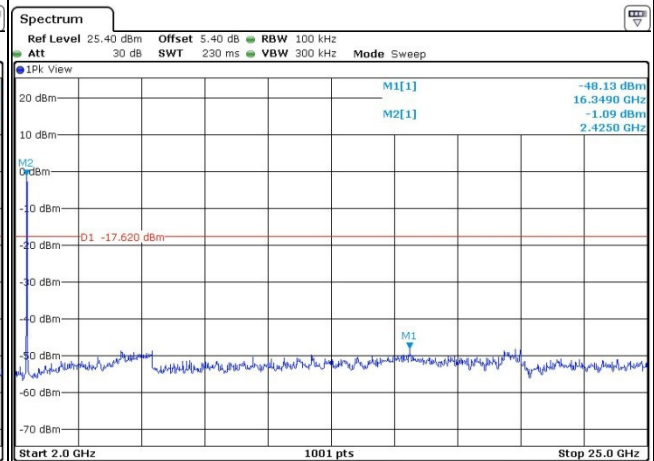

Date: 28 DEC 2017 21:07:04



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

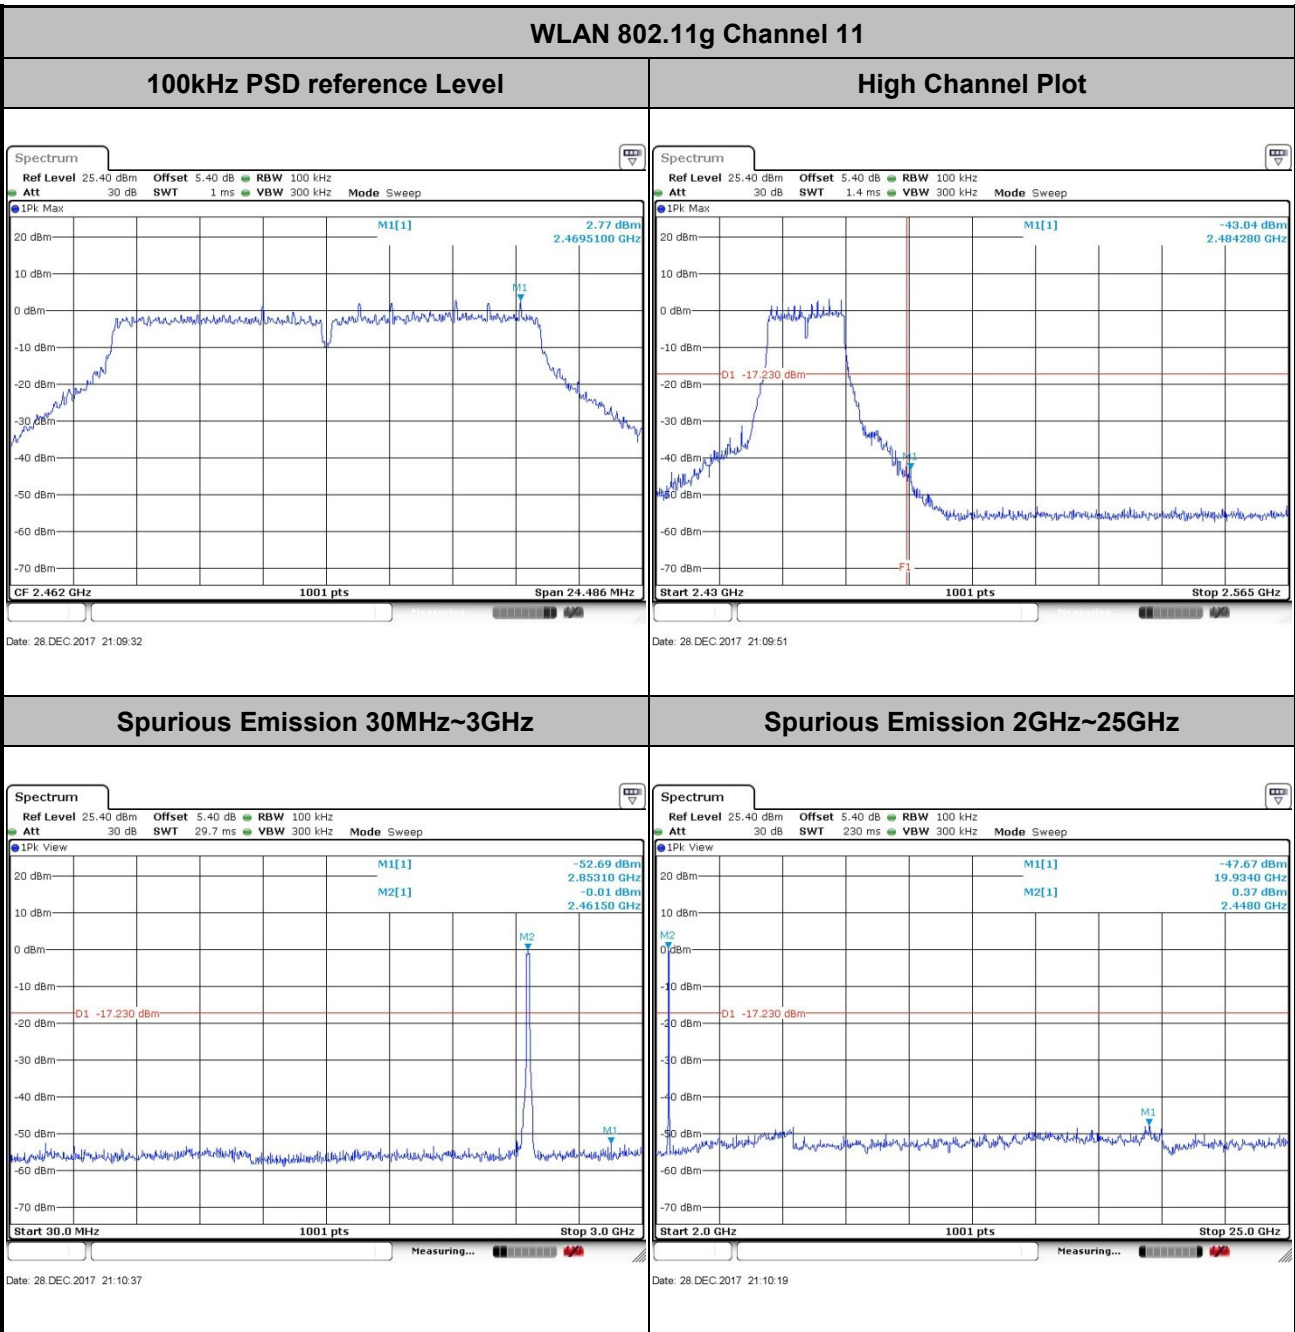






Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

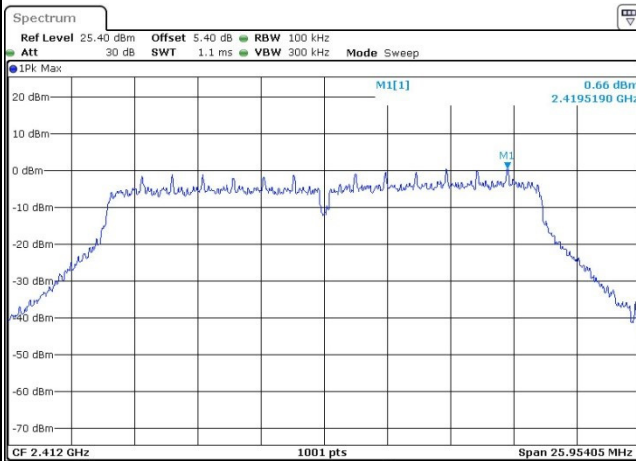


Date: 18 JAN 2018 09:49:32

Low Channel Plot

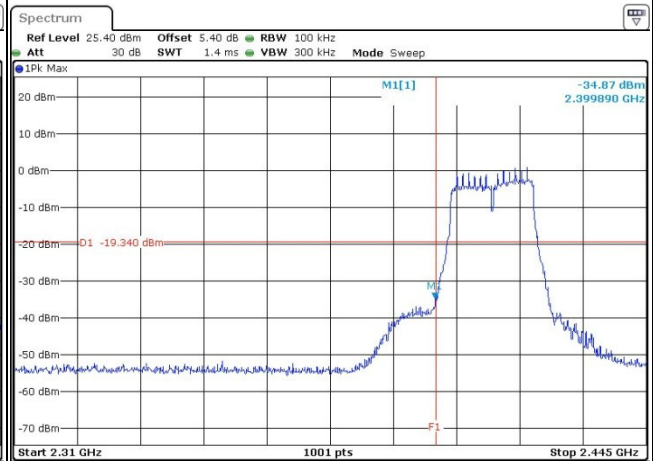


Date: 18 JAN 2018 09:49:52

Spurious Emission 30MHz~3GHz

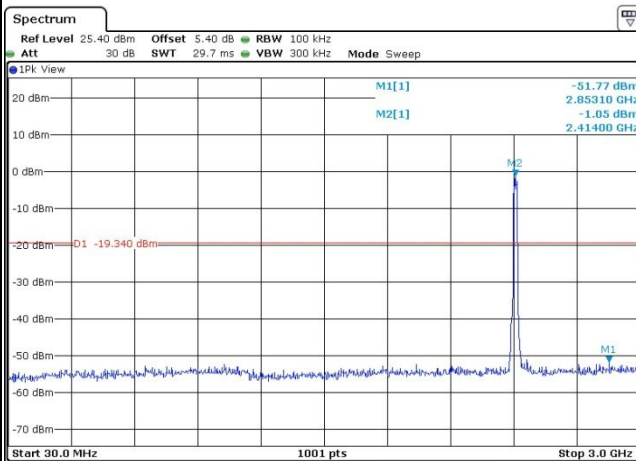

Date: 18 JAN 2018 09:52:14

Spurious Emission 2GHz~25GHz

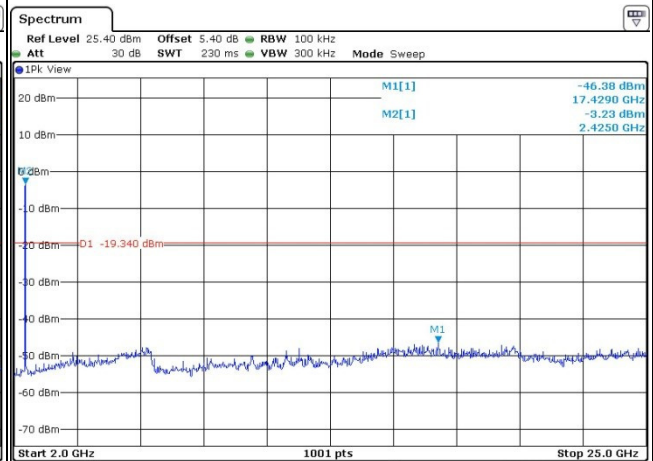


Date: 18 JAN 2018 09:51:31




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

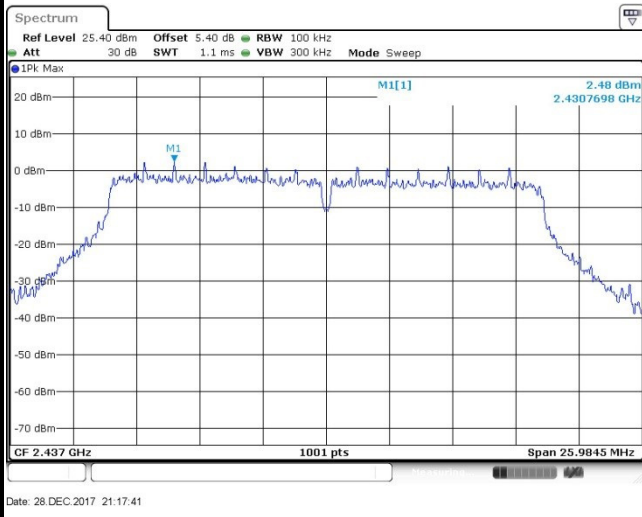

Spurious Emission 30MHz~3GHz

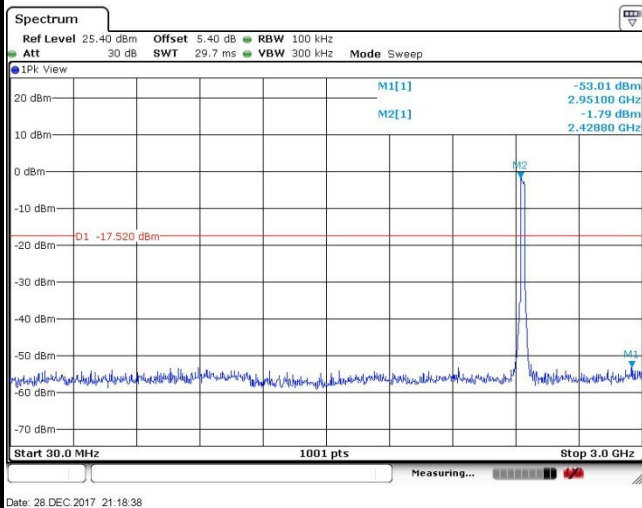

Spurious Emission 2GHz~25GHz

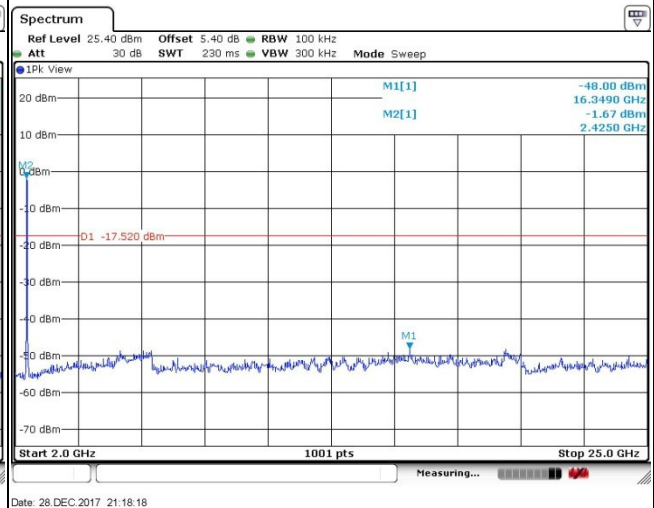




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

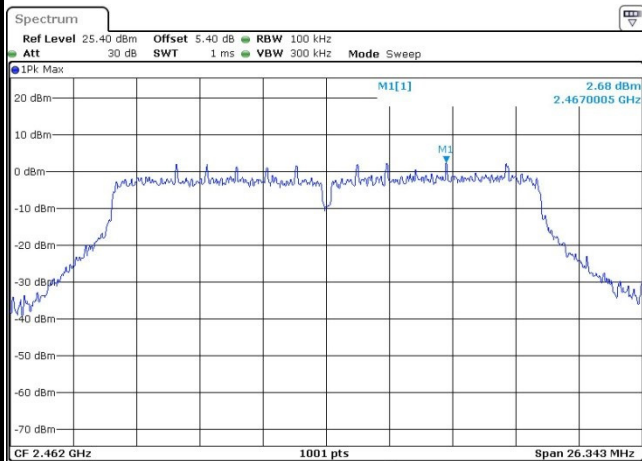


Date: 28 DEC.2017 21:20:50

High Channel Plot

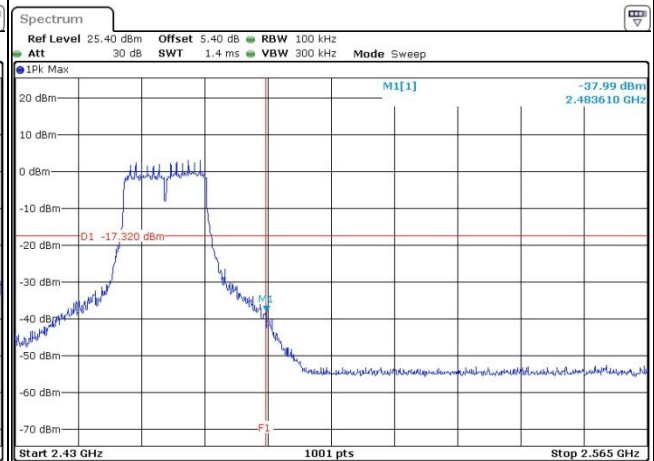


Date: 28 DEC.2017 21:22:38

Spurious Emission 30MHz~3GHz

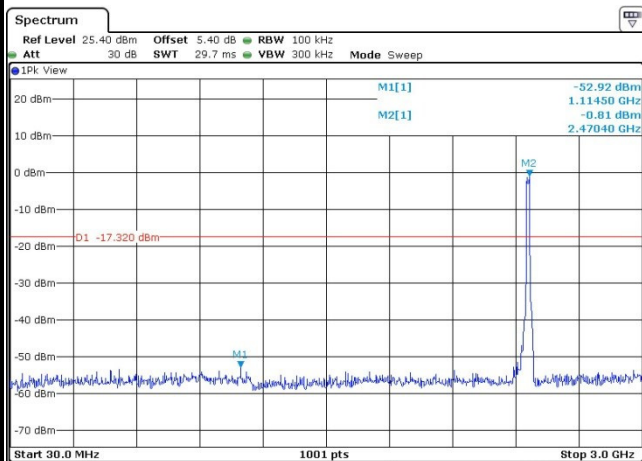

Date: 28 DEC.2017 21:22:02

Spurious Emission 2GHz~25GHz

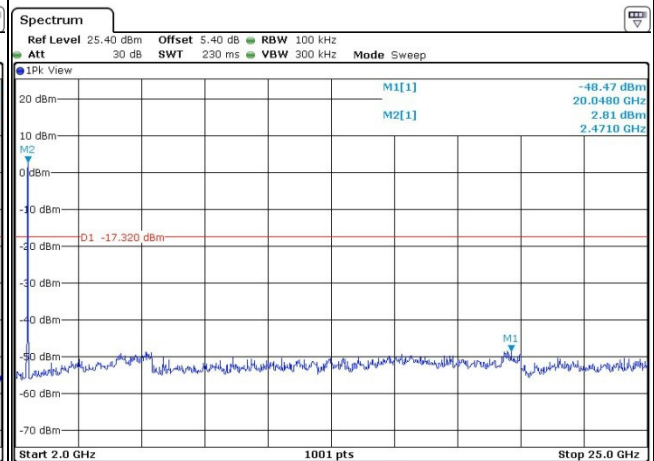

Date: 28 DEC.2017 21:21:35



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### **3.5.3 Test Procedures**


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

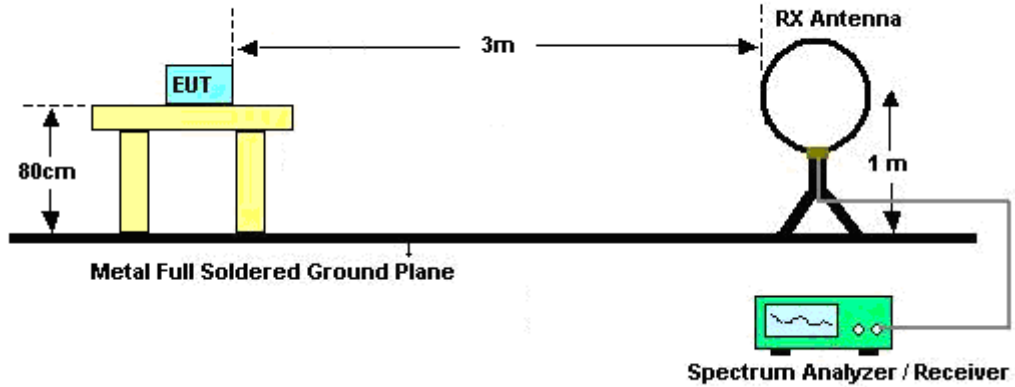

For radiated emissions from 30MHz to 1GHz

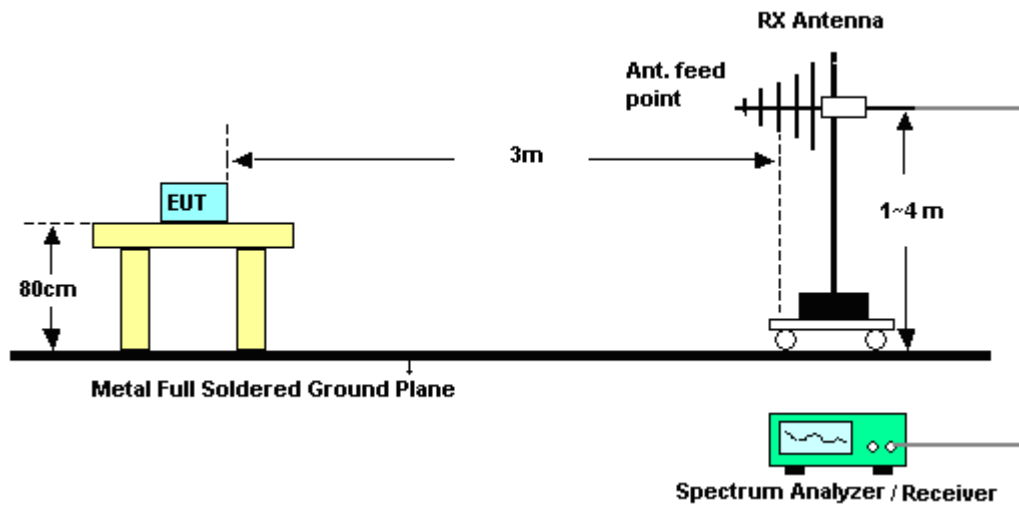

For radiated emissions above 1GHz

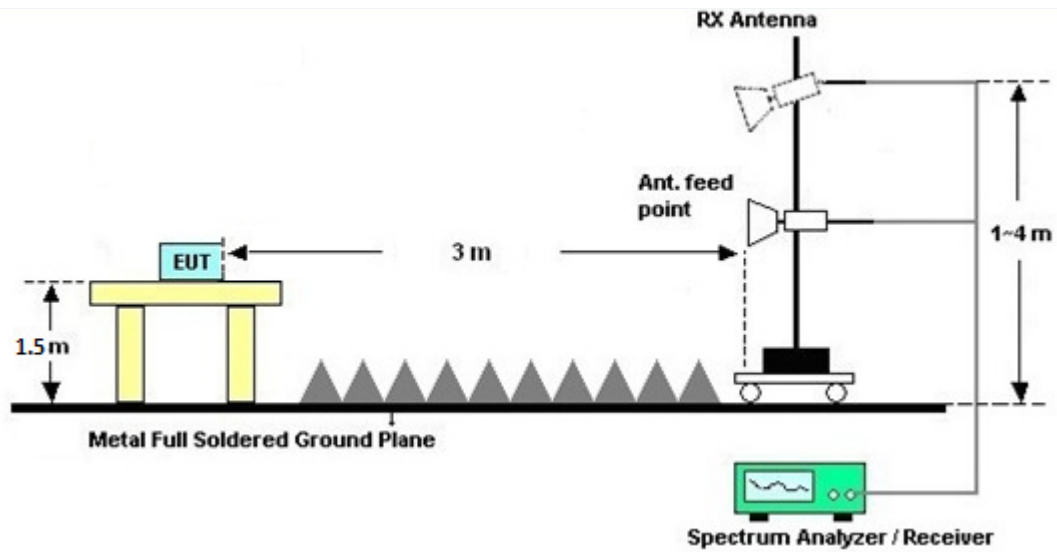

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix C.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.




### 3.6.4 Test Setup

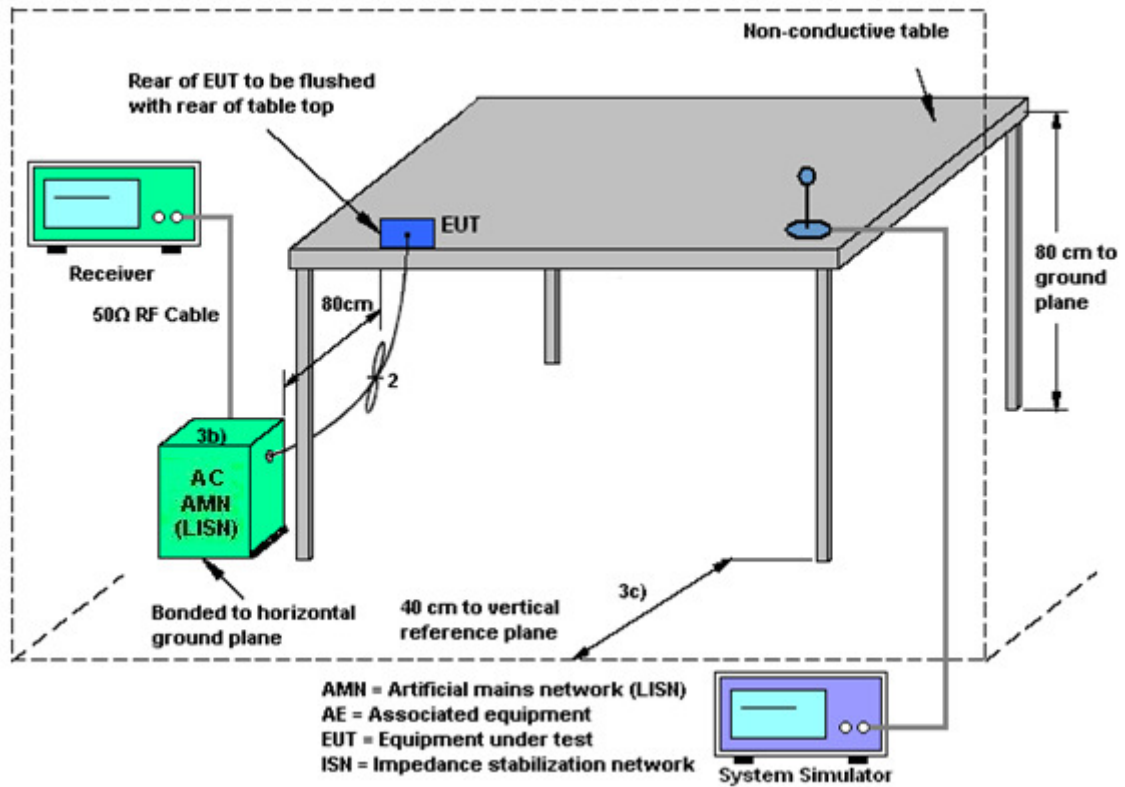



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter 1) for Sample 1		

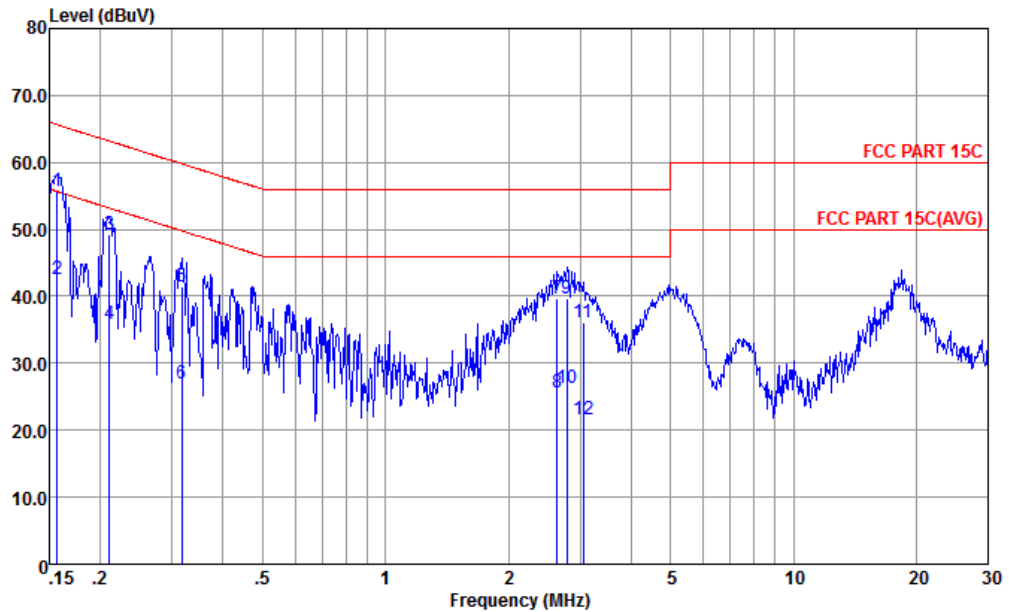


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-171013-060103 LINE  
 mode : Mode 1  
 : 351878090028931/351878090028949 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.156	55.66	-9.99	65.65	44.90	0.17	10.59	QP
2	0.156	42.66	-12.99	55.65	31.90	0.17	10.59	Average
3	0.211	49.26	-13.92	63.18	38.61	0.20	10.45	QP
4	0.211	35.86	-17.32	53.18	25.21	0.20	10.45	Average
5	0.317	41.55	-18.25	59.80	30.90	0.23	10.42	QP
6	0.317	26.95	-22.85	49.80	16.30	0.23	10.42	Average
7	2.636	39.70	-16.30	56.00	29.20	0.31	10.19	QP
8	2.636	25.70	-20.30	46.00	15.20	0.31	10.19	Average
9	2.779	39.70	-16.30	56.00	29.20	0.31	10.19	QP
10	2.779	26.40	-19.60	46.00	15.90	0.31	10.19	Average
11	3.058	36.01	-19.99	56.00	25.51	0.32	10.18	QP
12	3.058	21.71	-24.29	46.00	11.21	0.32	10.18	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter 1) for Sample 1		

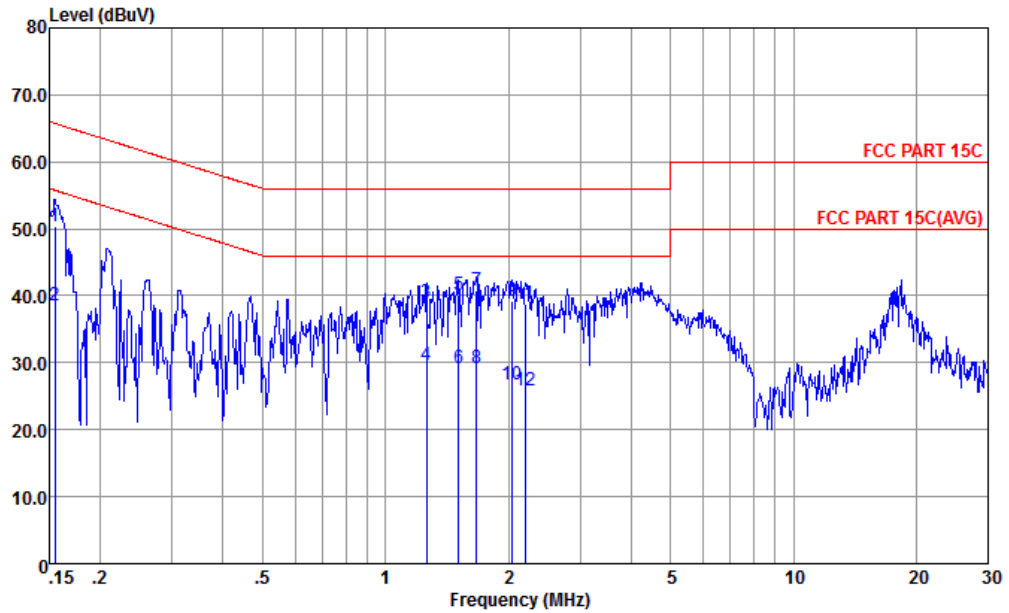

Site : CO01-KS  
Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

mode : Mode 1  
: 351878090028931/351878090028949 #9

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
	MHz	dBuV		dB	dBuV	dB	dB	
1	0.155	50.38	-15.36	65.74	39.50	0.28	10.60	QP
2	0.155	38.48	-17.26	55.74	27.60	0.28	10.60	Average
3	1.262	39.06	-16.94	56.00	28.61	0.31	10.14	QP
4	1.262	29.66	-16.34	46.00	19.21	0.31	10.14	Average
5	1.511	40.09	-15.91	56.00	29.60	0.32	10.17	QP
6	1.511	29.09	-16.91	46.00	18.60	0.32	10.17	Average
7 *	1.671	40.70	-15.30	56.00	30.19	0.32	10.19	QP
8	1.671	29.10	-16.90	46.00	18.59	0.32	10.19	Average
9	2.044	39.13	-16.87	56.00	28.60	0.32	10.21	QP
10	2.044	26.83	-19.17	46.00	16.30	0.32	10.21	Average
11	2.201	38.83	-17.17	56.00	28.30	0.32	10.21	QP
12	2.201	25.83	-20.17	46.00	15.30	0.32	10.21	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Dec. 28, 2017~ Jan. 18, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Dec. 28, 2017~ Jan. 18, 2018	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Dec. 28, 2017~ Jan. 18, 2018	Jan. 18, 2018	Conducted (TH01-KS)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Dec. 31, 2017~ Jan. 04, 2018	Jul. 17, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Dec. 18, 2017	Dec. 31, 2017~ Jan. 04, 2018	Dec. 17, 2018	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Dec. 31, 2017~ Jan. 04, 2018	Nov. 22, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Dec. 31, 2017~ Jan. 04, 2018	Oct. 19, 2018	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-00101800	2025787	1GHZ~18GHZ	Feb. 13, 2017	Dec. 31, 2017~ Jan. 04, 2018	Feb. 12, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2017	Dec. 31, 2017~ Jan. 04, 2018	Mar. 22, 2018	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 12, 2017	Dec. 31, 2017~ Jan. 04, 2018	Jan. 11, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 27, 2017	Dec. 31, 2017~ Jan. 04, 2018	Apr. 26, 2018	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 23, 2017	Dec. 31, 2017~ Jan. 04, 2018	Mar. 22, 2018	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	NCR	Dec. 31, 2017~ Jan. 04, 2018	NCR	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	NCR	Dec. 31, 2017~ Jan. 04, 2018	NCR	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	NCR	Dec. 31, 2017~ Jan. 04, 2018	NCR	Radiation (03CH12-HY)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 20, 2017	Jan. 02, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Jan. 02, 2017	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Jan. 02, 2017	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Jan. 02, 2017	Oct. 11, 2018	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7dB
---	-------



## **Appendix A. Conducted Test Results**

**A1 - DTS Part**

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/12/28~2018/01/18	Relative Humidity:	51~55	%



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.29	7.09	0.50	Pass
11b	1Mbps	1	6	2437	11.74	7.09	0.50	Pass
11b	1Mbps	1	11	2462	12.09	7.07	0.50	Pass
11g	6Mbps	1	1	2412	18.63	16.32	0.50	Pass
11g	6Mbps	1	6	2437	18.83	16.34	0.50	Pass
11g	6Mbps	1	11	2462	18.58	16.32	0.50	Pass
HT20	MCS0	1	1	2412	19.33	17.30	0.50	Pass
HT20	MCS0	1	6	2437	19.53	17.32	0.50	Pass
HT20	MCS0	1	11	2462	19.13	17.56	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	21.67	30.00	0.07	21.74	36.00	Pass
11b	1Mbps	1	6	2437	20.96	30.00	0.07	21.03	36.00	Pass
11b	1Mbps	1	11	2462	22.25	30.00	0.07	22.32	36.00	Pass
11g	6Mbps	1	1	2412	21.58	30.00	0.07	21.65	36.00	Pass
11g	6Mbps	1	6	2437	21.69	30.00	0.07	21.76	36.00	Pass
11g	6Mbps	1	11	2462	22.35	30.00	0.07	22.42	36.00	Pass
HT20	MCS0	1	1	2412	20.48	30.00	0.07	20.55	36.00	Pass
HT20	MCS0	1	6	2437	21.78	30.00	0.07	21.85	36.00	Pass
HT20	MCS0	1	11	2462	22.39	30.00	0.07	22.46	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.09	18.40
11b	1Mbps	1	6	2437	0.09	17.57
11b	1Mbps	1	11	2462	0.09	18.84
11g	6Mbps	1	1	2412	0.60	12.42
11g	6Mbps	1	6	2437	0.60	12.92
11g	6Mbps	1	11	2462	0.60	13.48
HT20	MCS0	1	1	2412	0.61	10.90
HT20	MCS0	1	6	2437	0.61	12.99
HT20	MCS0	1	11	2462	0.61	13.54

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-3.91	0.07	8.00	Pass
11b	1Mbps	1	6	2437	-3.52	0.07	8.00	Pass
11b	1Mbps	1	11	2462	-3.61	0.07	8.00	Pass
11g	6Mbps	1	1	2412	-10.61	0.07	8.00	Pass
11g	6Mbps	1	6	2437	-12.08	0.07	8.00	Pass
11g	6Mbps	1	11	2462	-11.78	0.07	8.00	Pass
HT20	MCS0	1	1	2412	-13.98	0.07	8.00	Pass
HT20	MCS0	1	6	2437	-12.86	0.07	8.00	Pass
HT20	MCS0	1	11	2462	-12.96	0.07	8.00	Pass



## Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.275	54.24	-19.76	74	44.52	27.15	4.03	31.49	117	294	P	H
		2389.8	46.82	-7.18	54	37.1	27.15	4.03	31.49	117	294	A	H
	*	2412	108.23	-	-	98.45	27.19	4.05	31.49	117	294	P	H
	*	2412	105.02	-	-	95.24	27.19	4.05	31.49	117	294	A	H
		2388.645	51.28	-22.72	74	41.56	27.15	4.03	31.49	396	51	P	V
		2390	43.75	-10.25	54	34.03	27.15	4.03	31.49	396	51	A	V
	*	2412	105.53	-	-	95.75	27.19	4.05	31.49	396	51	P	V
	*	2412	102.27	-	-	92.49	27.19	4.05	31.49	396	51	A	V
802.11b CH 06 2437MHz		2317.56	50.68	-23.32	74	41.2	26.99	3.97	31.51	107	302	P	H
		2389.94	41.2	-12.8	54	31.48	27.15	4.03	31.49	107	302	A	H
	*	2437	108.7	-	-	98.8	27.28	4.07	31.48	107	302	P	H
	*	2437	105.47	-	-	95.57	27.28	4.07	31.48	107	302	A	H
		2497.97	51.24	-22.76	74	41.16	27.4	4.11	31.46	107	302	P	H
		2483.69	41.17	-12.83	54	31.14	27.36	4.11	31.47	107	302	A	H
		2348.08	51.81	-22.19	74	42.25	27.03	4	31.5	381	52	P	V
		2389.8	40.52	-13.48	54	30.8	27.15	4.03	31.49	381	52	A	V
	*	2437	105.84	-	-	95.94	27.28	4.07	31.48	381	52	P	V
	*	2437	102.61	-	-	92.71	27.28	4.07	31.48	381	52	A	V
		2490.48	51.15	-22.85	74	41.08	27.4	4.11	31.47	381	52	P	V
	2490.27	40.98	-13.02	54	30.91	27.4	4.11	31.47	381	52	A	V	



802.11b CH 11 2462MHz	*	2462	108.63	-	-	98.67	27.32	4.08	31.47	165	304	P	H
	*	2462	105.41	-	-	95.45	27.32	4.08	31.47	165	304	A	H
		2483.88	51.72	-22.28	74	41.69	27.36	4.11	31.47	165	304	P	H
		2483.5	43.14	-10.86	54	33.11	27.36	4.11	31.47	165	304	A	H
	*	2462	105.16	-	-	95.2	27.32	4.08	31.47	373	50	P	V
	*	2462	101.92	-	-	91.96	27.32	4.08	31.47	373	50	A	V
		2483.68	51.14	-22.86	74	41.11	27.36	4.11	31.47	373	50	P	V
		2483.52	41.84	-12.16	54	31.81	27.36	4.11	31.47	373	50	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 01 2412MHz		4824	44.65	-29.35	74	71.33	31.36	6.17	64.74	100	0	P	H
		4824	44.75	-29.25	74	71.43	31.36	6.17	64.74	100	0	P	V
802.11b CH 06 2437MHz		4874	42.5	-31.5	74	69.01	31.46	6.21	64.7	100	0	P	H
		7311	53.42	-20.58	74	74.06	36.11	7.72	64.82	100	107	P	H
		7311	48.83	-5.17	54	69.47	36.11	7.72	64.82	100	107	A	H
		4874	42.96	-31.04	74	69.47	31.46	6.21	64.7	100	0	P	V
		7311	55.03	-18.97	74	75.67	36.11	7.72	64.82	109	69	P	V
		7311	50.95	-3.05	54	71.59	36.11	7.72	64.82	109	69	A	V
802.11b CH 11 2462MHz		4924	46.48	-27.52	74	72.85	31.56	6.23	64.66	100	0	P	H
		7386	49.86	-24.14	74	70.38	36.33	7.72	64.86	100	0	P	H
		4924	46.2	-27.8	74	72.57	31.56	6.23	64.66	100	0	P	V
		7386	53.14	-20.86	74	73.66	36.33	7.72	64.86	120	72	P	V
		7386	48.76	-5.24	54	69.28	36.33	7.72	64.86	120	72	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		2390	60.86	-13.14	74	51.14	27.15	4.03	31.49	140	304	P	H
		2390	49.4	-4.6	54	39.68	27.15	4.03	31.49	140	304	A	H
	*	2412	103.26	-	-	93.48	27.19	4.05	31.49	140	304	P	H
	*	2412	95.46	-	-	85.68	27.19	4.05	31.49	140	304	A	H
		2389.59	56.02	-17.98	74	46.3	27.15	4.03	31.49	388	50	P	V
		2389.905	45.26	-8.74	54	35.54	27.15	4.03	31.49	388	50	A	V
	*	2412	100.82	-	-	91.04	27.19	4.05	31.49	388	50	P	V
	*	2412	93.29	-	-	83.51	27.19	4.05	31.49	388	50	A	V
802.11g CH 06 2437MHz		2382.66	51.43	-22.57	74	41.75	27.11	4.03	31.49	108	303	P	H
		2384.76	42.09	-11.91	54	32.41	27.11	4.03	31.49	108	303	A	H
	*	2437	104.1	-	-	94.2	27.28	4.07	31.48	108	303	P	H
	*	2437	96.08	-	-	86.18	27.28	4.07	31.48	108	303	A	H
		2491.04	51.44	-22.56	74	41.37	27.4	4.11	31.47	108	303	P	H
		2488.73	42.11	-11.89	54	32.04	27.4	4.11	31.47	108	303	A	H
		2386.16	50.04	-23.96	74	40.32	27.15	4.03	31.49	380	52	P	V
		2380.14	40.62	-13.38	54	30.94	27.11	4.03	31.49	380	52	A	V
	*	2437	101.43	-	-	91.53	27.28	4.07	31.48	380	52	P	V
	*	2437	93.81	-	-	83.91	27.28	4.07	31.48	380	52	A	V
		2491.39	50.78	-23.22	74	40.71	27.4	4.11	31.47	380	52	P	V
		2490.41	41.1	-12.9	54	31.03	27.4	4.11	31.47	380	52	A	V





802.11g CH 11 2462MHz	*	2462	104.58	-	-	94.62	27.32	4.08	31.47	108	292	P	H
	*	2462	96.57	-	-	86.61	27.32	4.08	31.47	108	292	A	H
		2483.64	60.58	-13.42	74	50.55	27.36	4.11	31.47	108	292	P	H
		2483.52	46.58	-7.42	54	36.55	27.36	4.11	31.47	108	292	A	H
	*	2462	101.44	-	-	91.48	27.32	4.08	31.47	379	8	P	V
	*	2462	93.82	-	-	83.86	27.32	4.08	31.47	379	8	A	V
		2483.96	56.1	-17.9	74	46.07	27.36	4.11	31.47	379	8	P	V
		2483.84	42.69	-11.31	54	32.66	27.36	4.11	31.47	379	8	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	38.69	-35.31	74	65.37	31.36	6.17	64.74	100	0	P	H
		4824	38.85	-35.15	74	65.53	31.36	6.17	64.74	100	0	P	V
802.11g CH 06 2437MHz		4874	39.15	-34.85	74	65.66	31.46	6.21	64.7	100	0	P	H
		7311	44.51	-29.49	74	65.15	36.11	7.72	64.82	100	0	P	H
		4874	37.79	-36.21	74	64.3	31.46	6.21	64.7	100	0	P	V
802.11g CH 11 2462MHz		7311	45.1	-28.9	74	65.74	36.11	7.72	64.82	100	0	P	V
		4924	39.52	-34.48	74	65.89	31.56	6.23	64.66	100	0	P	H
		7386	42.57	-31.43	74	63.09	36.33	7.72	64.86	100	0	P	H
		4924	39.45	-34.55	74	65.82	31.56	6.23	64.66	100	0	P	V
802.11g CH 11 2462MHz		7386	42.95	-31.05	74	63.47	36.33	7.72	64.86	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		2390	62.01	-11.99	74	52.29	27.15	4.03	31.49	139	302	P	H
		2389.905	49.98	-4.02	54	40.26	27.15	4.03	31.49	139	302	A	H
	*	2412	102.49	-	-	92.71	27.19	4.05	31.49	139	302	P	H
	*	2412	94.89	-	-	85.11	27.19	4.05	31.49	139	302	A	H
		2389.59	57.3	-16.7	74	47.58	27.15	4.03	31.49	387	51	P	V
		2389.905	46.64	-7.36	54	36.92	27.15	4.03	31.49	387	51	A	V
	*	2412	100.48	-	-	90.7	27.19	4.05	31.49	387	51	P	V
	*	2412	93.11	-	-	83.33	27.19	4.05	31.49	387	51	A	V
802.11n HT20 CH 06 2437MHz		2389.66	52.04	-21.96	74	42.32	27.15	4.03	31.49	139	300	P	H
		2385.46	43.21	-10.79	54	33.53	27.11	4.03	31.49	139	300	A	H
	*	2437	104.12	-	-	94.22	27.28	4.07	31.48	139	300	P	H
	*	2437	96.33	-	-	86.43	27.28	4.07	31.48	139	300	A	H
		2488.94	51.18	-22.82	74	41.11	27.4	4.11	31.47	139	300	P	H
		2489.36	42.56	-11.44	54	32.49	27.4	4.11	31.47	139	300	A	H
		2310.28	51.08	-22.92	74	41.66	26.94	3.97	31.52	381	55	P	V
		2385.18	41.51	-12.49	54	31.83	27.11	4.03	31.49	381	55	A	V
	*	2437	101.91	-	-	92.01	27.28	4.07	31.48	381	55	P	V
	*	2437	94.44	-	-	84.54	27.28	4.07	31.48	381	55	A	V
		2494.68	50.69	-23.31	74	40.61	27.4	4.11	31.46	381	55	P	V
	2488.31	41.76	-12.24	54	31.69	27.4	4.11	31.47	381	55	A	V	



<b>802.11n</b> <b>HT20</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	105	-	-	95.04	27.32	4.08	31.47	100	300	P	H
	*	2462	97.26	-	-	87.3	27.32	4.08	31.47	100	300	A	H
		2484.88	63.96	-10.04	74	53.93	27.36	4.11	31.47	100	300	P	H
		2483.6	49.18	-4.82	54	39.15	27.36	4.11	31.47	100	300	A	H
	*	2462	101.35	-	-	91.39	27.32	4.08	31.47	329	57	P	V
	*	2462	93.59	-	-	83.63	27.32	4.08	31.47	329	57	A	V
		2483.72	60.55	-13.45	74	50.52	27.36	4.11	31.47	329	57	P	V
		2483.68	45.51	-8.49	54	35.48	27.36	4.11	31.47	329	57	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	39.01	-34.99	74	65.69	31.36	6.17	64.74	100	0	P	H
		4824	38.23	-35.77	74	64.91	31.36	6.17	64.74	100	0	P	V
802.11n HT20 CH 06 2437MHz		4874	38.86	-35.14	74	65.37	31.46	6.21	64.7	100	0	P	H
		7311	44.57	-29.43	74	65.21	36.11	7.72	64.82	100	0	P	H
		4874	37.27	-36.73	74	63.78	31.46	6.21	64.7	100	0	P	V
		7311	45.63	-28.37	74	66.27	36.11	7.72	64.82	100	0	P	V
802.11n HT20 CH 11 2462MHz		4924	39.02	-34.98	74	65.39	31.56	6.23	64.66	100	0	P	H
		7386	42.11	-31.89	74	62.63	36.33	7.72	64.86	100	0	P	H
		4924	38.03	-35.97	74	64.4	31.56	6.23	64.66	100	0	P	V
		7386	42.97	-31.03	74	63.49	36.33	7.72	64.86	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz 802.11b LF		30.27	23.18	-16.82	40	28.32	24.57	0.48	30.18	-	-	P	H
		62.13	22.34	-17.66	40	40.3	11.77	0.68	30.44	-	-	P	H
		197.13	22.62	-20.88	43.5	36.78	14.87	1.14	30.27	-	-	P	H
		567.4	27.78	-18.22	46	29.42	25.9	1.92	29.7	-	-	P	H
		747.3	30.64	-15.36	46	29.7	27.87	2.21	29.44	100	0	P	H
		960.1	33.32	-20.68	54	28.48	30.95	2.51	29.04	-	-	P	H
		30.54	24.62	-15.38	40	30.29	24.05	0.48	30.19	-	-	P	V
		89.94	24.45	-19.05	43.5	39.41	14.64	0.76	30.41	-	-	P	V
		258.15	19.84	-26.16	46	28.97	19.63	1.32	30.19	-	-	P	V
		729.1	35.52	-10.48	46	35.17	27.36	2.18	29.48	-	-	P	V
		746.6	36.39	-9.61	46	35.45	27.87	2.21	29.44	100	0	P	V
		960.1	34.35	-19.65	54	29.51	30.95	2.51	29.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.






## Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.91	8.275	0.121	300Hz
802.11g	87.02	1.361	0.735	1kHz
802.11n HT20	86.94	1.274	0.785	1kHz

### 802.11b

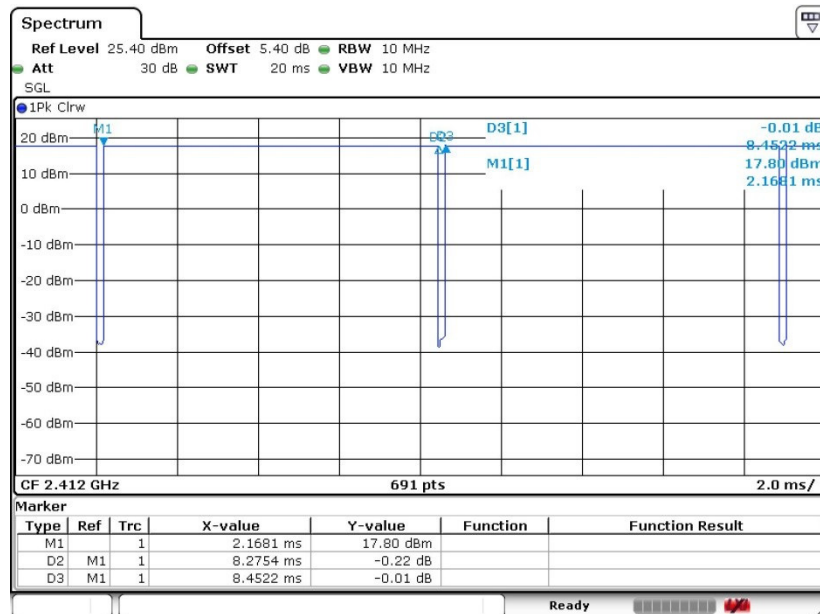



802.11g

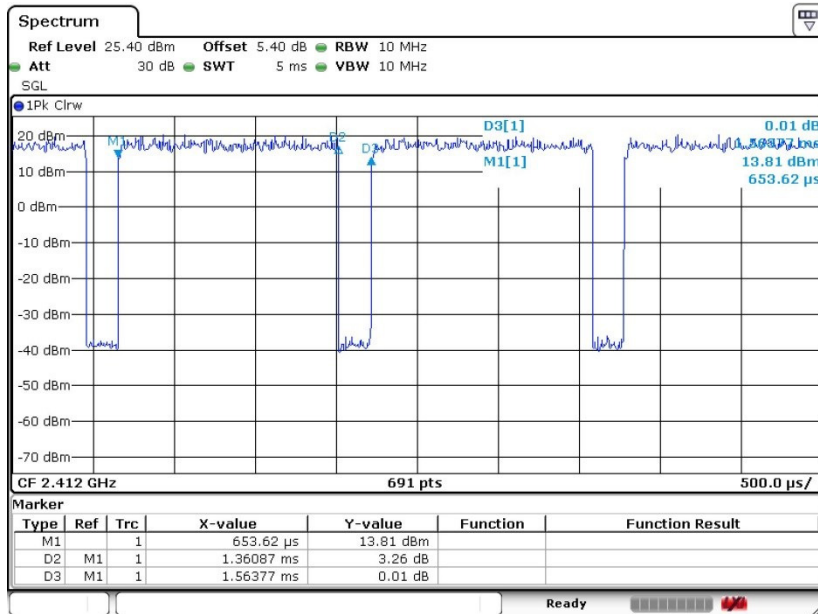

802.11n HT20

