

# FCC SAR Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT1924-4, XT1924-5  
FCC ID : IHDT56XA5  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



**Sporton International (Kunshan) Inc.**

**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China**



Table of Contents

1. Statement of Compliance .....4
2. Administration Data .....5
3. Guidance Applied .....5
4. Equipment Under Test (EUT) Information.....6
4.1 General Information .....6
4.2 Specification of Accessory .....7
4.3 General LTE SAR Test and Reporting Considerations.....8
5. RF Exposure Limits .....10
5.1 Uncontrolled Environment.....10
5.2 Controlled Environment .....10
6. Specific Absorption Rate (SAR) .....11
6.1 Introduction .....11
6.2 SAR Definition .....11
7. System Description and Setup .....12
7.1 E-Field Probe .....13
7.2 Data Acquisition Electronics (DAE) .....13
7.3 Phantom .....14
7.4 Device Holder .....15
8. Measurement Procedures .....16
8.1 Spatial Peak SAR Evaluation.....16
8.2 Power Reference Measurement .....17
8.3 Area Scan .....17
8.4 Zoom Scan .....18
8.5 Volume Scan Procedures .....18
8.6 Power Drift Monitoring .....18
9. Test Equipment List.....19
10. System Verification.....20
10.1 Tissue Simulating Liquids .....20
10.2 Tissue Verification .....21
10.3 System Performance Check Results .....22
11. RF Exposure Positions.....23
11.1 Ear and handset reference point .....23
11.2 Definition of the cheek position .....24
11.3 Definition of the tilt position .....25
11.4 Body Worn Accessory .....26
11.5 Wireless Router.....26
12. Conducted RF Output Power (Unit: dBm).....27
13. Bluetooth Exclusions Applied .....61
14. Antenna Location.....62
15. SAR Test Results .....63
15.1 Head SAR.....65
15.2 Hotspot SAR .....67
15.3 Body Worn Accessory SAR.....70
15.4 Product specific 10g SAR .....72
15.5 Repeated SAR Measurement .....74
16. Simultaneous Transmission Analysis.....75
16.1 Head Exposure Conditions .....76
16.2 Hotspot Exposure Conditions .....77
16.3 Body-Worn Accessory Exposure Conditions.....79
16.4 SPLSR Evaluation and Analysis .....80
17. Uncertainty Assessment .....85
18. References.....86
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Test Setup Photos



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA7D2201	Rev. 01	Initial issue of report	Feb. 12, 2018

### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT1924-4, XT1924-5**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.34	0.99	0.99	1.53
		GSM1900	0.24	1.04	1.04	
	WCDMA	Band V	0.49	1.03	1.03	
		Band IV	0.29	1.05	1.05	
		Band II	0.50	1.09	1.09	
	LTE	Band 5	0.53	0.96	0.96	
		Band 4	0.23	1.12	1.12	
		Band 2	0.50	1.07	1.07	
Band 7		0.40	<b>1.20</b>	<b>1.20</b>		
DTS	WLAN	2.4GHz WLAN	<b>0.96</b>	0.80	0.80	1.48
DSS	Bluetooth	2.4GHz Bluetooth				1.53
Equipment Class	Frequency Band		Highest SAR Summary			
			Product Specific 10g SAR (W/kg) (Gap 0mm)			
Licensed	GSM	GSM1900	2.96			
	WCDMA	Band IV	3.63			
		Band II	3.69			
	LTE	Band 4	3.52			
		Band 2	3.38			
		Band 7	<b>3.77</b>			
Date of Testing:			2017/12/27 ~ 2018/1/1			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



### 2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

### 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



**4. Equipment Under Test (EUT) Information**

**4.1 General Information**

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1924-4, XT1924-5
FCC ID	IHDT56XA5
IMEI Code	WWAN Sample SIM1: 351878090026836 SIM2: 351878090026844 WLAN Sample SIM1: 351878090027339 SIM2: 351878090027347
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) LTE: QPSK, 16QAM WLAN 2.4GHz : 802.11b/g/n HT20 Bluetooth v3.0+EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE, Bluetooth v4.2 LE
HW Version	DVT1B
SW Version	rhannah-userdebug 8.0.0 OPP27.66 1190 intcfg,test-keys
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>802.11n-HT40 is not supported in 2.4GHz WLAN.</li> <li>This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP).</li> <li>This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.</li> <li>This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12.</li> <li>When the phone is in talking mode and receiver worked, all WWAN powers are full power.</li> <li>When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in WLAN 2.4GHz.</li> <li>When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/IV/V and LTE band 2/4/5/7.</li> <li>The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850/1900, WCDMA band II/IV/V and LTE band 2/4/5/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)</li> <li>This device hotspot reduced power and P-sensor reduced power level are the same. So only show one reduced power level for hotspot reduced power and P-sensor reduced power for this application.</li> <li>P-sensor can detect handheld state, for bottom side of product specific 10g SAR condition, WCDMA band II/IV and LTE band 2/4 reduced powers will be active. For GSM1900 and LTE band 7, the power levels are the same as the full power.</li> <li>There are two different types of EUT. They are dual SIM card mobile (XT1924-4) and single SIM card mobile (XT1924-5). It is special to declare. The others are the same including circuit design, PCB board, structure and all components. After pre-scan two types of EUT, we found test result of the sample that dual SIM was the worst, so we chose dual SIM card mobile to perform all tests.</li> <li>For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.</li> </ol>	

**4.2 Specification of Accessory**

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Acbel)	Model Name	SPN5945A C-P35
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 1(EU)	Brand Name	Motorola (Acbel)	Model Name	SPN5944A C-P36
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 1(UK)	Brand Name	Motorola (Acbel)	Model Name	SPN5940A C-P37
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 1(IN)	Brand Name	Motorola (Acbel)	Model Name	SA18C19493 C-P49 SPN5946A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2(US)	Brand Name	Motorola (Salom)	Model Name	SSW-2919UMTJ C-P35 SPN5945A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2(EU)	Brand Name	Motorola (Salom)	Model Name	SSW-2919EU C-P36 SPN5944A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2(UK)	Brand Name	Motorola (Salom)	Model Name	SSW-2919UK C-P37 SPN5940A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
Battery	Brand Name	Motorola (Amperex)	Model Name	HE50
	Power Rating	3.8Vdc,4850/5000mAh	Type	Li-ion
Earphone	Brand Name	Motorola (NEW Leaders)	Model Name	NLD-EM300V-01SF
	Signal Line Type	1.25 meter, non-shielded cable, without ferrite core		
USB Cable (Black/White)	Brand Name	Motorola (Saibao)	Model Name	SLQ-A081A
	Signal Line Type	1.02 meter, shielded cable, without ferrite core		



**4.3 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56XA5																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz																																																														
Uplink Modulations Used	QPSK / 16QAM																																																														
LTE Voice / Data requirements	Data only																																																														
LTE Release Version	R10, Cat4																																																														
CA Support	Not Supported																																																														
LTE MPR permanently built-in by design	<table border="1"> <caption>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</caption> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (<math>N_{RB}</math>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	<p>Yes</p> <ol style="list-style-type: none"> <li>When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 2/4/5/7.</li> <li>The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected LTE band 2/4/5/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)</li> <li>P-sensor can detect handheld state, for bottom side of product specific 10g SAR condition, LTE band 2/4 reduced powers will be active.</li> </ol>																																																														





Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				

**5. RF Exposure Limits**

**5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

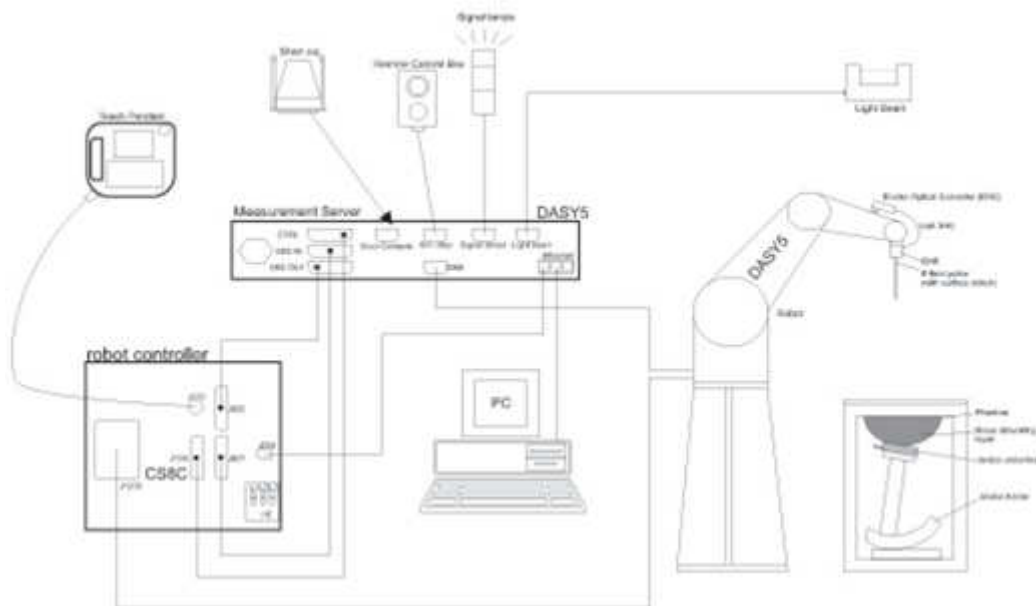

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**7.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 7.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## 8. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**8.4 Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**8.5 Volume Scan Procedures**

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2017/3/20	2018/3/19
SPEAG	1800MHz System Validation Kit	D1750V2	1137	2017/6/5	2018/6/4
SPEAG	1800MHz System Validation Kit	D1900V2	5d170	2017/3/22	2018/3/21
SPEAG	2450MHz System Validation Kit	D2450V2	924	2017/3/21	2018/3/20
SPEAG	2600MHz System Validation Kit	D2600V2	1112	2017/9/18	2018/9/17
SPEAG	Data Acquisition Electronics	DAE4	1210	2017/5/25	2018/5/24
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2017/5/26	2018/5/25
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1644	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1164	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563814	2017/1/19	2018/1/18
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2017/4/18	2018/4/17
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2017/4/18	2018/4/17
SPEAG	DAK Kit	DAK3.5	1146	2017/7/18	2018/7/17
R&S	Signal Generator	SMR40	100455	2017/1/19	2018/1/18
Anritsu	Power Meter	ML2495A	1419002	2017/5/15	2018/5/14
Anritsu	Power Sensor	MA2411B	1339124	2017/5/15	2018/5/14
Anritsu	Power Meter	ML2495A	1218006	2017/10/6	2018/10/5
Anritsu	Power Sensor	MA2411B	1207363	2017/10/6	2018/10/5
WISEWIND	Hygrometer	WISEWIND 0905	0905	2017/4/20	2018/4/19
JM	DIGITAC THERMOMETER	JM222	AA1207166	2017/4/19	2018/4/18
R&S	CBT BLUETOOTH TESTER	CBT	100783	2017/8/8	2018/8/7
EXA	Spectrum Analyzer	N9010A	MY55150244	2017/4/18	2018/4/17
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
AR	Amplifier	5S1G4	333096	Note	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note	
Agilent	Dual Directional Coupler	778D	50422	Note	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note	

**Note:**

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR



**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	Head	22.8	0.907	42.549	0.90	41.50	0.78	2.53	±5	2017/12/27
1750	Head	22.7	1.364	41.493	1.37	40.10	-0.44	3.47	±5	2017/12/27
1900	Head	22.7	1.429	39.831	1.40	40.00	2.07	-0.42	±5	2017/12/27
2450	Head	22.5	1.854	38.045	1.80	39.20	3.00	-2.95	±5	2017/12/31
2600	Head	22.5	2.015	37.501	1.96	39.00	2.81	-3.84	±5	2017/12/31
835	Body	22.6	0.978	54.824	0.97	55.20	0.82	-0.68	±5	2017/12/30
1750	Body	22.7	1.453	54.561	1.49	53.40	-2.48	2.17	±5	2018/1/1
1900	Body	22.7	1.514	52.963	1.52	53.30	-0.39	-0.63	±5	2018/1/1
2450	Body	22.6	1.988	51.946	1.95	52.70	1.95	-1.43	±5	2017/12/30
2600	Body	22.6	2.228	51.634	2.16	52.50	3.15	-1.65	±5	2017/12/30

**10.3 System Performance Check Results**


Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

**<1g SAR>**

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/12/27	835	Head	250	4d151	3857	1210	2.44	9.73	9.76	0.31
2017/12/27	1750	Head	250	1137	3857	1210	9.15	36.60	36.6	0.00
2017/12/27	1900	Head	250	5d170	3857	1210	10.10	40.00	40.4	1.00
2017/12/31	2450	Head	250	924	3857	1210	13.30	52.40	53.2	1.53
2017/12/31	2600	Head	250	1112	3857	1210	13.90	56.40	55.6	-1.42
2017/12/30	835	Body	250	4d151	3857	1210	2.35	9.72	9.4	-3.29
2018/1/1	1750	Body	250	1137	3857	1210	9.20	37.00	36.8	-0.54
2018/1/1	1900	Body	250	5d170	3857	1210	9.88	40.70	39.52	-2.90
2017/12/30	2450	Body	250	924	3857	1210	13.00	50.50	52	2.97
2017/12/30	2600	Body	250	1112	3857	1210	14.50	55.00	58	5.45

**<10g SAR>**

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/1/1	1750	Body	250	1137	3857	1210	4.93	19.70	19.72	0.10
2018/1/1	1900	Body	250	5d170	3857	1210	5.13	21.40	20.52	-4.11
2017/12/30	2600	Body	250	1112	3857	1210	6.48	24.40	25.92	6.23

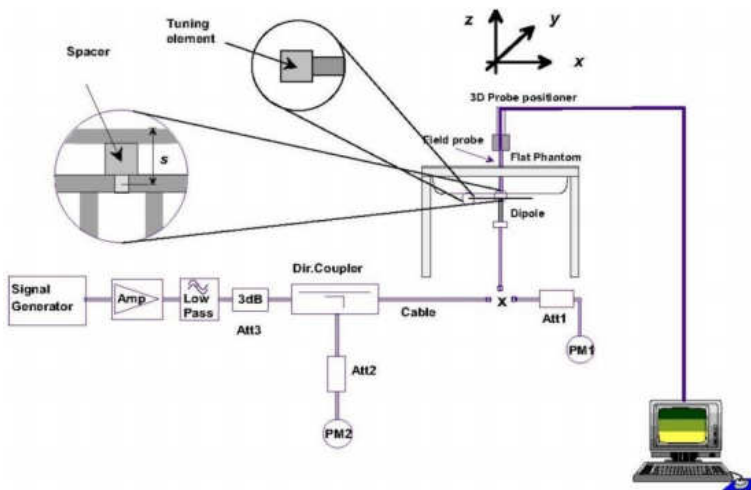

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

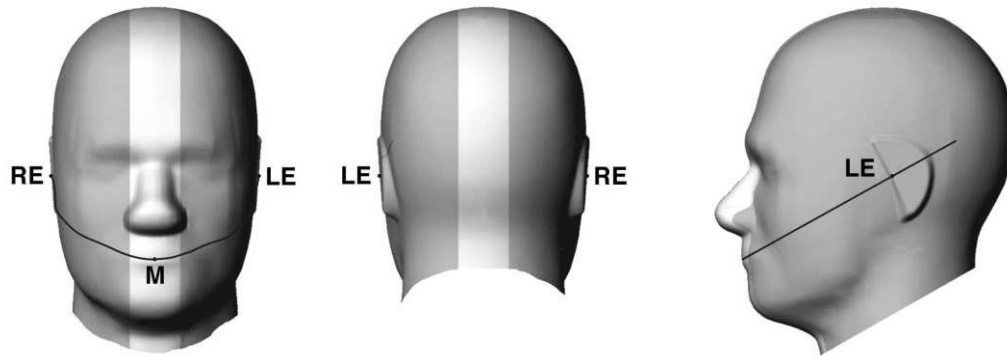


Fig 9.1.1 Front, back, and side views of SAM twin phantom

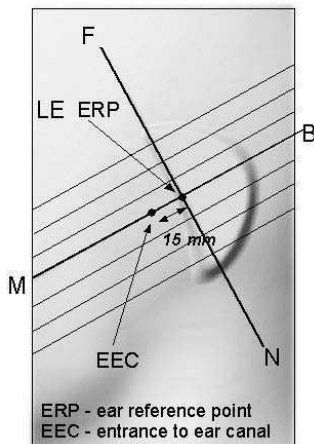


Fig 9.1.2 Close-up side view of phantom showing the ear region.


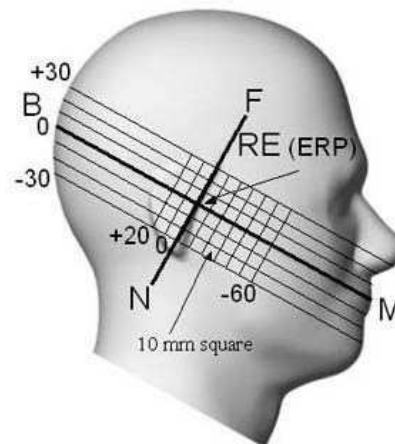


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations




**11.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

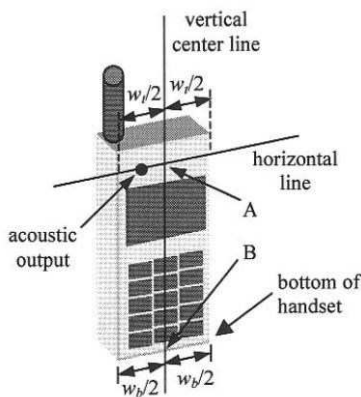

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

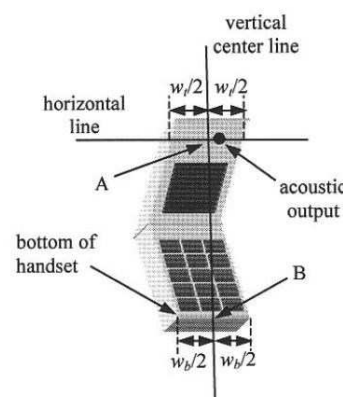

**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

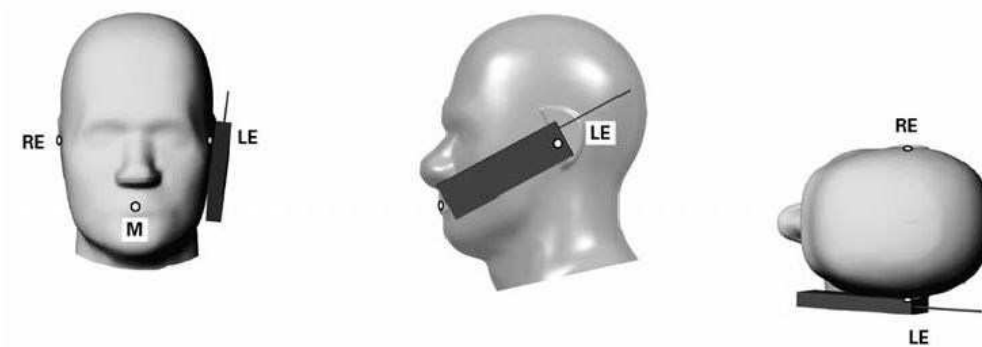

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**



### 11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

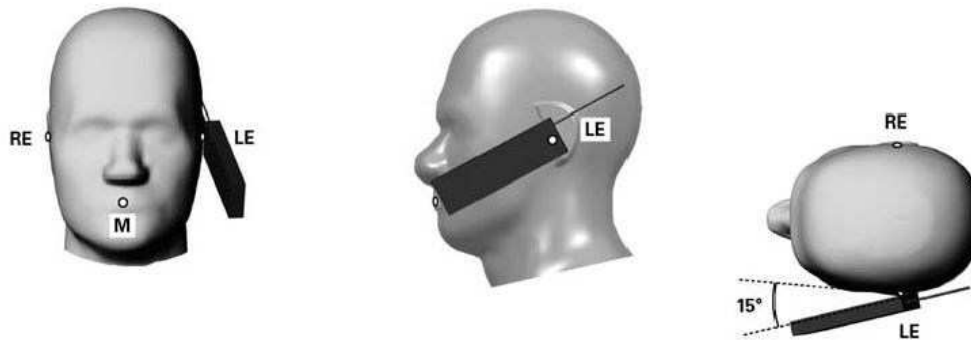


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

### 11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

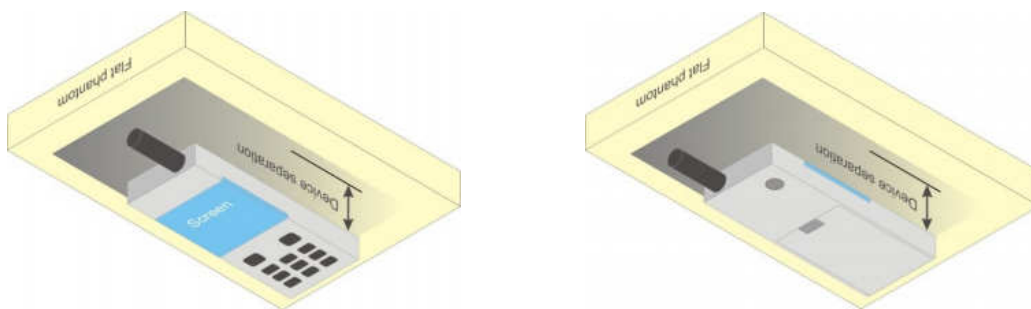


Fig 9.4 Body Worn Position

### 11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

**General Note:**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slot for GSM850, GPRS 4Tx slots for GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by hotspot mode/P-Sensor is implemented in GSM850/1900 band, for SAR testing EUT was set in reduced power mode and GPRS 2 Tx slots for GSM850, GPRS 4 Tx slots for GSM1900, due to its highest frame-average power.

### <Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
	128	189	251		128	189	251		
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8		
GSM 1 Tx slot	32.89	33.32	33.27	33.50	24.28	24.29	24.24	24.50	
GPRS 1 Tx slot	33.28	33.29	33.24	33.50	23.89	24.32	24.27	24.50	
GPRS 2 Tx slots	29.90	29.99	29.92	30.50	23.90	23.99	23.92	24.50	
GPRS 3 Tx slots	27.86	27.98	28.21	28.50	23.60	23.72	23.95	24.24	
GPRS 4 Tx slots	26.59	26.61	26.64	27.00	23.59	23.61	23.64	24.00	
EDGE 1 Tx slot	27.17	27.12	27.08	27.50	18.17	18.12	18.08	18.50	
EDGE 2 Tx slots	27.06	27.00	26.96	27.50	21.06	21.00	20.96	21.50	
EDGE 3 Tx slots	25.69	25.65	25.54	26.50	21.43	21.39	21.28	22.24	
EDGE 4 Tx slots	24.29	24.21	24.16	24.50	21.29	21.21	21.16	21.50	
GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		30.67	30.52	30.54	31.00	21.66	21.51	21.53	22.00
GPRS 1 Tx slot		30.66	30.51	30.53	31.00	21.67	21.52	21.54	22.00
GPRS 2 Tx slots		27.72	27.56	27.67	28.00	21.72	21.56	21.67	22.00
GPRS 3 Tx slots		25.76	26.37	25.73	26.50	21.50	22.11	21.47	22.24
GPRS 4 Tx slots		24.52	25.06	24.55	25.50	21.52	22.06	21.55	22.50
EDGE 1 Tx slot		26.64	26.61	26.38	27.00	17.64	17.61	17.38	18.00
EDGE 2 Tx slots		26.53	26.49	26.26	27.00	20.53	20.49	20.26	21.00
EDGE 3 Tx slots		25.27	25.21	24.96	25.50	21.01	20.95	20.70	21.24
EDGE 4 Tx slots		23.85	23.81	23.57	24.00	20.85	20.81	20.57	21.00

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**<Reduced Power Mode for Hotspot On/P-Sensor On>**

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	31.04	31.10	31.39	31.50	22.04	22.10	22.39	22.50
GPRS 1 Tx slot	31.03	31.08	31.37	31.50	22.03	22.08	22.37	22.50
GPRS 2 Tx slots	27.74	27.89	27.88	28.50	21.74	21.89	21.88	22.50
GPRS 3 Tx slots	25.62	25.70	26.10	26.50	21.36	21.44	21.84	22.24
GPRS 4 Tx slots	24.25	24.25	24.91	25.00	21.25	21.25	21.91	22.00
EDGE 1 Tx slot	25.06	24.93	25.17	25.50	16.06	15.93	16.17	16.50
EDGE 2 Tx slots	24.93	24.80	24.97	25.50	18.93	18.80	18.97	19.50
EDGE 3 Tx slots	23.52	23.40	23.54	24.00	19.26	19.14	19.28	19.74
EDGE 4 Tx slots	22.18	22.02	22.25	23.00	19.18	19.02	19.25	20.00
<b>GSM1900</b>								
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	26.95	26.76	27.03	27.50	17.95	17.76	18.03	18.50
GPRS 1 Tx slot	26.94	26.74	27.01	27.50	17.94	17.74	18.01	18.50
GPRS 2 Tx slots	23.83	23.09	23.37	24.00	17.83	17.09	17.37	18.00
GPRS 3 Tx slots	22.20	21.70	21.97	22.50	17.94	17.44	17.71	18.24
GPRS 4 Tx slots	20.89	20.53	20.71	21.50	17.89	17.53	17.71	18.50
EDGE 1 Tx slot	23.32	23.15	22.86	24.00	14.32	14.15	13.86	15.00
EDGE 2 Tx slots	23.15	22.98	22.78	24.00	17.15	16.98	16.78	18.00
EDGE 3 Tx slots	21.32	21.17	20.89	21.50	17.06	16.91	16.63	17.24
EDGE 4 Tx slots	19.90	19.68	19.57	20.00	16.90	16.68	16.57	17.00

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

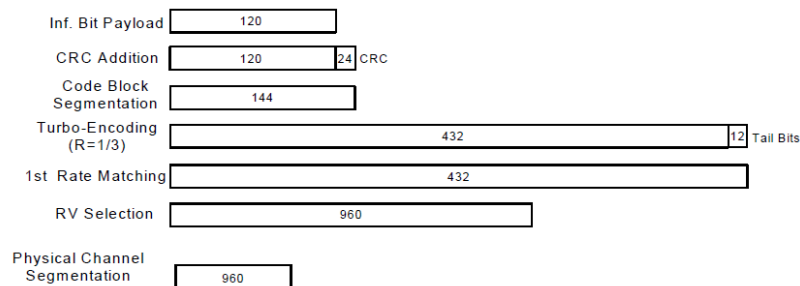

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**





**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**<Full Power Mode>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.60	23.28	23.64	24.00	23.12	23.14	23.22	24.00	23.45	23.50	23.50	24.00
3GPP Rel 99	RMC 12.2Kbps	23.61	23.59	<b>23.66</b>	24.00	23.14	23.16	<b>23.24</b>	24.00	23.47	23.51	<b>23.52</b>	24.00
3GPP Rel 6	HSDPA Subtest-1	22.40	22.19	22.24	23.00	22.01	21.97	22.04	23.00	22.28	22.11	22.09	23.00
3GPP Rel 6	HSDPA Subtest-2	22.09	22.22	22.35	23.00	21.90	21.93	22.06	23.00	22.18	22.13	22.18	23.00
3GPP Rel 6	HSDPA Subtest-3	21.57	21.72	21.88	22.50	21.36	21.52	21.70	22.50	21.68	21.64	21.69	22.50
3GPP Rel 6	HSDPA Subtest-4	21.56	21.72	21.88	22.50	21.36	21.50	21.68	22.50	21.68	21.64	21.69	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.20	22.01	22.09	23.00	21.89	21.78	21.90	23.00	22.01	19.98	19.87	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.25	22.11	22.04	23.00	21.78	21.65	21.65	23.00	22.03	19.87	19.86	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.23	22.02	22.15	22.50	21.90	21.89	21.87	22.50	22.12	20.10	19.86	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.19	22.09	22.07	22.50	21.85	21.74	21.75	22.50	22.09	19.93	20.01	22.50
3GPP Rel 6	HSUPA Subtest-1	21.89	21.99	21.95	23.00	21.68	21.79	21.77	23.00	21.38	21.56	21.54	23.00
3GPP Rel 6	HSUPA Subtest-2	20.95	20.69	20.64	21.50	20.95	20.47	20.44	21.50	20.79	20.93	20.96	21.50
3GPP Rel 6	HSUPA Subtest-3	20.74	20.79	20.77	22.00	20.55	20.50	20.48	22.00	20.68	20.88	20.87	22.00
3GPP Rel 6	HSUPA Subtest-4	21.64	21.39	21.33	22.00	21.43	21.19	21.15	22.00	21.07	21.11	21.44	22.00
3GPP Rel 6	HSUPA Subtest-5	22.00	22.10	22.10	23.00	21.80	21.88	21.90	23.00	22.20	22.20	22.30	23.00





**<Reduced Power Mode for Hotspot On/P-Sensor On>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	17.08	17.02	17.12	17.50	15.64	15.65	15.67	16.50	22.30	22.40	22.40	23.00
3GPP Rel 99	RMC 12.2Kbps	17.10	17.04	17.14	17.50	15.66	15.66	15.68	16.50	22.31	22.41	22.42	23.00
3GPP Rel 6	HSDPA Subtest-1	15.47	15.67	15.74	16.50	14.47	14.48	14.53	15.50	21.47	21.67	21.74	22.00
3GPP Rel 6	HSDPA Subtest-2	15.58	15.69	15.84	16.50	14.50	14.46	14.56	15.50	21.60	21.63	21.76	22.00
3GPP Rel 6	HSDPA Subtest-3	15.08	15.18	15.36	16.00	13.94	14.01	14.18	15.00	21.06	21.22	21.40	21.50
3GPP Rel 6	HSDPA Subtest-4	15.06	15.20	15.38	16.00	14.06	14.01	14.17	15.00	21.06	21.20	21.38	21.50
3GPP Rel 8	DC-HSDPA Subtest-1	15.24	15.42	15.45	16.50	14.20	14.28	14.23	15.50	21.20	21.41	21.45	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	15.10	15.36	15.39	16.50	14.32	14.26	14.20	15.50	21.15	21.32	21.40	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	15.20	15.50	15.52	16.00	14.19	14.19	14.36	15.00	21.24	21.26	21.32	21.50
3GPP Rel 8	DC-HSDPA Subtest-4	15.13	15.43	15.49	16.00	14.23	14.26	14.12	15.00	21.19	21.39	21.44	21.50
3GPP Rel 6	HSUPA Subtest-1	15.40	15.30	15.43	16.50	14.26	14.28	14.25	15.50	21.38	21.49	21.47	22.00
3GPP Rel 6	HSUPA Subtest-2	14.65	14.17	14.14	15.00	13.65	12.98	12.93	14.00	20.45	20.17	20.14	20.50
3GPP Rel 6	HSUPA Subtest-3	14.23	14.26	14.26	15.50	13.15	13.03	12.98	14.50	20.25	20.20	20.18	21.00
3GPP Rel 6	HSUPA Subtest-4	15.15	14.85	14.81	15.50	14.01	13.68	13.63	14.50	20.93	20.89	20.85	21.00
3GPP Rel 6	HSUPA Subtest-5	15.50	15.58	15.60	16.50	14.50	14.39	14.39	15.50	21.50	21.58	21.60	22.00

**<Reduced Power Mode for Product Specific 10g SAR>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6		
3GPP Rel 99	AMR 12.2Kbps	22.47	22.35	22.49	23.00	22.24	22.22	22.27	23.00
3GPP Rel 99	RMC 12.2Kbps	22.48	22.38	22.52	23.00	22.26	22.24	22.29	23.00
3GPP Rel 6	HSDPA Subtest-1	21.18	21.28	21.38	22.00	21.11	21.17	21.16	22.00
3GPP Rel 6	HSDPA Subtest-2	21.19	21.36	21.44	22.00	21.17	21.22	21.25	22.00
3GPP Rel 6	HSDPA Subtest-3	20.71	20.85	20.96	21.50	20.67	20.72	20.77	21.50
3GPP Rel 6	HSDPA Subtest-4	20.75	20.86	20.96	21.50	20.67	20.72	20.77	21.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.08	21.24	21.36	22.00	21.08	21.17	21.15	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.18	21.26	21.41	22.00	21.06	21.05	21.18	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	20.68	20.85	20.92	21.50	20.68	20.68	20.80	21.50
3GPP Rel 8	DC-HSDPA Subtest-4	20.72	20.81	20.95	21.50	20.58	20.68	20.71	21.50
3GPP Rel 6	HSUPA Subtest-1	20.88	21.00	21.48	22.00	20.63	21.27	21.10	22.00
3GPP Rel 6	HSUPA Subtest-2	20.28	20.47	20.10	21.00	20.17	20.03	19.76	21.00
3GPP Rel 6	HSUPA Subtest-3	19.87	20.11	20.11	21.00	19.77	19.96	19.90	21.00
3GPP Rel 6	HSUPA Subtest-4	20.48	20.35	20.38	21.00	20.68	20.12	20.50	21.00
3GPP Rel 6	HSUPA Subtest-5	21.40	21.50	21.50	22.00	21.20	21.30	21.20	22.00



**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.50	22.75	22.59	24	0
20	QPSK	1	49	23.12	23.03	23.01		
20	QPSK	1	99	22.64	22.51	22.64		
20	QPSK	50	0	22.23	22.08	22.20	23	1
20	QPSK	50	24	21.94	22.04	22.16		
20	QPSK	50	50	21.91	22.00	22.09		
20	QPSK	100	0	22.16	22.14	22.15	23	1
20	16QAM	1	0	21.54	21.73	21.63		
20	16QAM	1	49	22.02	22.18	21.74		
20	16QAM	1	99	21.95	21.59	21.44	22	2
20	16QAM	50	0	20.96	20.98	21.18		
20	16QAM	50	24	20.84	21.06	21.16		
20	16QAM	50	50	20.83	21.01	21.25	22	2
20	16QAM	100	0	20.89	21.04	21.14		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.73	22.76	22.99	24	0
15	QPSK	1	37	22.81	23.00	23.21		
15	QPSK	1	74	22.92	22.92	22.79		
15	QPSK	36	0	21.91	22.11	22.09	23	1
15	QPSK	36	20	21.91	22.08	22.12		
15	QPSK	36	39	21.98	22.00	22.17		
15	QPSK	75	0	21.94	21.99	22.15	23	1
15	16QAM	1	0	21.48	21.67	21.71		
15	16QAM	1	37	21.99	22.39	22.48		
15	16QAM	1	74	21.81	21.63	21.46	22	2
15	16QAM	36	0	20.78	21.02	21.03		
15	16QAM	36	20	20.90	21.09	21.13		
15	16QAM	36	39	20.90	20.91	21.27	22	2
15	16QAM	75	0	20.83	20.99	21.21		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.52	22.67	22.58	24	0
10	QPSK	1	25	22.56	22.83	23.00		
10	QPSK	1	49	22.52	22.66	22.68		
10	QPSK	25	0	21.83	22.09	22.20	23	1
10	QPSK	25	12	21.79	22.06	22.18		
10	QPSK	25	25	21.95	21.95	22.01		
10	QPSK	50	0	21.77	21.99	22.12	23	1
10	16QAM	1	0	21.33	21.39	21.46		
10	16QAM	1	25	21.87	21.51	21.63		
10	16QAM	1	49	21.56	21.50	21.56	22	2
10	16QAM	25	0	20.74	20.89	21.14		
10	16QAM	25	12	20.80	21.09	21.15		
10	16QAM	25	25	20.87	20.88	20.91	22	2
10	16QAM	50	0	20.69	20.91	21.00		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.71	22.79	23.05	24	0
5	QPSK	1	12	22.76	23.00	22.96		
5	QPSK	1	24	22.64	22.83	22.78		
5	QPSK	12	0	21.76	22.04	22.04	23	1
5	QPSK	12	7	21.84	22.04	21.91		
5	QPSK	12	13	21.72	21.98	22.00		
5	QPSK	25	0	21.77	21.97	22.08	23	1
5	16QAM	1	0	21.11	21.67	22.27		
5	16QAM	1	12	21.33	21.54	22.29		
5	16QAM	1	24	21.04	21.70	21.34	22	2
5	16QAM	12	0	20.68	20.87	21.05		
5	16QAM	12	7	20.76	20.86	21.02		
5	16QAM	12	13	20.56	20.81	20.83	22	2
5	16QAM	25	0	20.58	21.00	21.00		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.87	21.94	21.96	24	0
3	QPSK	1	8	22.10	22.17	22.11		
3	QPSK	1	14	21.90	21.99	21.89		
3	QPSK	8	0	21.73	20.65	20.63	23	1
3	QPSK	8	4	21.75	20.96	20.90		
3	QPSK	8	7	21.71	20.89	21.00		
3	QPSK	15	0	21.73	20.88	21.00	23	1
3	16QAM	1	0	21.06	21.00	21.02		
3	16QAM	1	8	21.35	21.30	21.30		
3	16QAM	1	14	21.20	21.00	21.03	22	2
3	16QAM	8	0	20.68	20.36	20.20		
3	16QAM	8	4	20.47	20.13	20.13		
3	16QAM	8	7	20.67	20.13	20.10	22	2
3	16QAM	15	0	20.73	21.00	21.02		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.07	22.92	22.96	24	0
1.4	QPSK	1	3	23.02	22.96	23.00		
1.4	QPSK	1	5	22.99	22.86	22.82		
1.4	QPSK	3	0	23.01	22.98	23.07		
1.4	QPSK	3	1	23.03	23.02	23.04		
1.4	QPSK	3	3	23.10	23.01	23.09	23	1
1.4	QPSK	6	0	22.07	21.99	21.99		
1.4	16QAM	1	0	21.47	21.38	21.54	23	1
1.4	16QAM	1	3	21.92	21.46	21.87		
1.4	16QAM	1	5	22.11	21.39	21.63		
1.4	16QAM	3	0	22.08	21.66	21.83		
1.4	16QAM	3	1	22.10	21.89	22.09		
1.4	16QAM	3	3	22.08	21.88	22.01	22	2
1.4	16QAM	6	0	21.00	20.77	20.80		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.84	23.00	23.08	24	0
20	QPSK	1	49	23.24	23.25	23.16		
20	QPSK	1	99	22.83	22.76	22.79		
20	QPSK	50	0	22.16	22.27	22.26	23	1
20	QPSK	50	24	22.13	22.22	22.09		
20	QPSK	50	50	22.12	22.12	21.97		
20	QPSK	100	0	22.12	22.23	22.22	23	1
20	16QAM	1	0	21.59	21.83	22.03		
20	16QAM	1	49	21.57	21.68	22.29		
20	16QAM	1	99	21.51	21.47	21.79	22	2
20	16QAM	50	0	21.14	21.11	21.13		
20	16QAM	50	24	21.15	21.09	21.10		
20	16QAM	50	50	21.13	21.03	20.98	22	2
20	16QAM	100	0	21.03	21.15	21.09		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.96	22.96	23.14	24	0
15	QPSK	1	37	23.18	23.07	23.05		
15	QPSK	1	74	23.16	23.06	22.89		
15	QPSK	36	0	22.04	22.26	22.10	23	1
15	QPSK	36	20	22.01	22.13	22.11		
15	QPSK	36	39	22.09	22.09	21.98		
15	QPSK	75	0	22.10	22.22	22.08	23	1
15	16QAM	1	0	21.64	22.03	21.86		
15	16QAM	1	37	21.79	22.46	21.80		
15	16QAM	1	74	21.58	21.88	21.70	22	2
15	16QAM	36	0	20.94	21.06	20.99		
15	16QAM	36	20	21.11	21.12	21.08		
15	16QAM	36	39	20.96	21.08	21.01	22	2
15	16QAM	75	0	21.09	21.20	21.08		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.03	23.06	23.01	24	0
10	QPSK	1	25	23.01	23.12	23.00		
10	QPSK	1	49	22.89	22.84	23.10		
10	QPSK	25	0	21.98	22.12	22.10	23	1
10	QPSK	25	12	22.04	22.16	22.09		
10	QPSK	25	25	22.00	21.97	21.92		
10	QPSK	50	0	22.05	22.00	22.03	23	1
10	16QAM	1	0	21.89	21.89	21.80		
10	16QAM	1	25	22.21	22.30	22.17		
10	16QAM	1	49	21.57	21.69	21.62	22	2
10	16QAM	25	0	20.85	21.11	21.02		
10	16QAM	25	12	20.86	21.04	21.03		
10	16QAM	25	25	20.86	20.96	20.94	22	2
10	16QAM	50	0	20.92	20.98	21.05		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.05	23.06	22.90	24	0
5	QPSK	1	12	22.99	23.16	23.01		
5	QPSK	1	24	22.78	23.05	22.87		
5	QPSK	12	0	21.99	22.15	22.08	23	1
5	QPSK	12	7	21.95	22.21	22.04		
5	QPSK	12	13	21.99	22.08	22.15		
5	QPSK	25	0	21.98	22.03	21.98	23	1
5	16QAM	1	0	21.36	21.69	21.39		
5	16QAM	1	12	21.59	22.29	21.59		
5	16QAM	1	24	21.03	22.01	21.55	22	2
5	16QAM	12	0	20.70	20.86	20.92		
5	16QAM	12	7	20.96	21.21	20.97		
5	16QAM	12	13	21.00	20.97	21.18	22	2
5	16QAM	25	0	20.99	21.23	21.11		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.00	23.01	22.72	24	0
3	QPSK	1	8	23.00	22.99	22.88		
3	QPSK	1	14	22.83	22.97	22.80		
3	QPSK	8	0	22.08	22.16	21.96	23	1
3	QPSK	8	4	22.04	22.19	22.04		
3	QPSK	8	7	22.05	22.05	21.97		
3	QPSK	15	0	21.89	22.14	21.91	23	1
3	16QAM	1	0	21.54	22.37	21.37		
3	16QAM	1	8	21.69	22.30	21.78		
3	16QAM	1	14	21.37	21.45	21.50	22	2
3	16QAM	8	0	20.97	20.98	20.92		
3	16QAM	8	4	21.09	21.08	21.01		
3	16QAM	8	7	21.03	21.00	20.82	22	2
3	16QAM	15	0	20.90	21.15	20.94		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.99	23.17	22.83	24	0
1.4	QPSK	1	3	23.02	23.23	22.86		
1.4	QPSK	1	5	23.01	23.05	22.85		
1.4	QPSK	3	0	23.08	23.06	22.90		
1.4	QPSK	3	1	23.15	23.20	23.02		
1.4	QPSK	3	3	23.17	23.22	23.01		
1.4	QPSK	6	0	22.05	22.07	22.06	23	1
1.4	16QAM	1	0	21.53	21.51	22.19	23	1
1.4	16QAM	1	3	21.63	21.66	22.23		
1.4	16QAM	1	5	21.50	21.42	21.65		
1.4	16QAM	3	0	21.68	21.79	21.88		
1.4	16QAM	3	1	21.67	22.03	21.97		
1.4	16QAM	3	3	21.91	21.93	22.05		
1.4	16QAM	6	0	20.80	20.88	20.99	22	2





<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.52	22.51	22.77	24	0
10	QPSK	1	25	22.87	22.88	23.02		
10	QPSK	1	49	22.53	22.54	22.67		
10	QPSK	25	0	21.85	21.93	21.92	23	1
10	QPSK	25	12	22.00	21.96	21.95		
10	QPSK	25	25	21.92	21.95	21.90		
10	QPSK	50	0	21.95	21.98	21.99	23	1
10	16QAM	1	0	21.44	21.47	21.60		
10	16QAM	1	25	21.41	22.05	22.09		
10	16QAM	1	49	21.46	21.52	21.55	22	2
10	16QAM	25	0	20.80	20.86	20.93		
10	16QAM	25	12	20.89	20.93	20.99		
10	16QAM	25	25	20.90	20.90	20.91	22	2
10	16QAM	25	0	20.93	20.88	20.93		
10	16QAM	50	0	20.93	20.88	20.93		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.46	22.64	22.57	24	0
5	QPSK	1	12	22.98	23.05	22.83		
5	QPSK	1	24	22.87	22.81	22.64		
5	QPSK	12	0	21.92	21.95	21.87	23	1
5	QPSK	12	7	21.95	21.91	21.87		
5	QPSK	12	13	21.93	21.95	21.84		
5	QPSK	25	0	21.95	21.91	21.84	23	1
5	16QAM	1	0	21.34	21.18	21.25		
5	16QAM	1	12	21.56	21.57	21.82		
5	16QAM	1	24	21.57	21.40	21.50	22	2
5	16QAM	12	0	20.74	20.78	20.89		
5	16QAM	12	7	20.77	21.05	21.00		
5	16QAM	12	13	20.74	21.08	20.98	22	2
5	16QAM	12	0	20.74	21.08	20.98		
5	16QAM	25	0	21.06	20.92	20.98		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.87	22.75	22.73	24	0
3	QPSK	1	8	23.11	22.85	22.86		
3	QPSK	1	14	22.86	22.77	22.74		
3	QPSK	8	0	22.01	21.99	21.89	23	1
3	QPSK	8	4	21.99	21.98	21.94		
3	QPSK	8	7	22.07	22.02	21.91		
3	QPSK	15	0	21.93	21.93	21.88	23	1
3	16QAM	1	0	21.43	22.22	21.52		
3	16QAM	1	8	21.58	21.54	21.82		
3	16QAM	1	14	21.51	21.31	21.80	22	2
3	16QAM	8	0	20.66	20.62	20.53		
3	16QAM	8	4	20.76	20.95	20.81		
3	16QAM	8	7	20.63	20.90	20.68	22	2
3	16QAM	15	0	20.85	20.84	20.86		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.98	22.88	22.98	24	0
1.4	QPSK	1	3	22.95	22.93	22.96		
1.4	QPSK	1	5	22.79	22.83	22.74		
1.4	QPSK	3	0	23.01	22.87	23.00		
1.4	QPSK	3	1	23.15	22.91	23.01		
1.4	QPSK	3	3	22.86	23.01	22.97	23	1
1.4	QPSK	6	0	21.93	21.90	21.92		
1.4	16QAM	1	0	22.13	21.33	22.11	23	1
1.4	16QAM	1	3	22.22	21.44	21.71		
1.4	16QAM	1	5	21.40	21.35	21.34		
1.4	16QAM	3	0	21.89	21.54	21.84		
1.4	16QAM	3	1	21.85	21.87	22.26		
1.4	16QAM	3	3	21.95	21.86	22.03	22	2
1.4	16QAM	6	0	20.85	20.90	20.93		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				20850	21100	21350		
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.48	23.24	23.31	24	0
20	QPSK	1	49	23.60	23.55	23.72		
20	QPSK	1	99	23.16	23.36	23.49		
20	QPSK	50	0	22.52	22.67	22.83	23	1
20	QPSK	50	24	22.47	22.67	22.71		
20	QPSK	50	50	22.50	22.56	22.69		
20	16QAM	1	0	21.85	22.34	22.03	23	1
20	16QAM	1	49	22.04	22.81	22.06		
20	16QAM	1	99	21.91	22.17	22.20		
20	16QAM	50	0	21.49	21.65	21.95	22	2
20	16QAM	50	24	21.40	21.65	21.98		
20	16QAM	50	50	21.50	21.55	21.85		
20	16QAM	100	0	21.42	21.67	21.68		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.52	23.62	23.47	24	0
15	QPSK	1	37	23.54	23.70	23.53		
15	QPSK	1	74	23.21	23.42	23.40		
15	QPSK	36	0	22.47	22.59	22.72	23	1
15	QPSK	36	20	22.45	22.58	22.59		
15	QPSK	36	39	22.37	22.56	22.65		
15	QPSK	75	0	22.33	22.66	22.68	23	1
15	16QAM	1	0	21.89	22.13	22.30		
15	16QAM	1	37	22.05	22.87	22.78		
15	16QAM	1	74	21.90	22.20	22.26	22	2
15	16QAM	36	0	21.46	21.76	21.73		
15	16QAM	36	20	21.51	21.76	21.68		
15	16QAM	36	39	21.54	21.48	21.55		
15	16QAM	75	0	21.42	21.76	21.81		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.30	23.22	23.47	24	0
10	QPSK	1	25	23.35	23.88	23.87		
10	QPSK	1	49	23.03	23.22	23.50		
10	QPSK	25	0	22.44	22.58	22.66	23	1
10	QPSK	25	12	22.43	22.62	22.68		
10	QPSK	25	25	22.37	22.51	22.67		
10	QPSK	50	0	22.42	22.59	22.69	23	1
10	16QAM	1	0	21.88	22.46	22.81		
10	16QAM	1	25	22.56	22.64	22.68		
10	16QAM	1	49	21.92	22.24	22.44	22	2
10	16QAM	25	0	21.36	21.59	21.69		
10	16QAM	25	12	21.44	21.65	21.82		
10	16QAM	25	25	21.35	21.51	21.66	22	2
10	16QAM	50	0	21.51	21.62	21.58		
Channel				20775	21100	21425		
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.29	23.28	23.53	24	0
5	QPSK	1	12	23.38	23.28	23.69		
5	QPSK	1	24	22.95	23.37	23.34		
5	QPSK	12	0	22.35	22.60	22.67	23	1
5	QPSK	12	7	22.41	22.57	22.66		
5	QPSK	12	13	22.34	22.51	22.62		
5	QPSK	25	0	22.34	22.49	22.65	23	1
5	16QAM	1	0	21.85	21.93	22.94		
5	16QAM	1	12	22.27	22.26	22.98		
5	16QAM	1	24	21.82	21.96	22.07	22	2
5	16QAM	12	0	21.26	21.36	21.51		
5	16QAM	12	7	21.23	21.40	21.49		
5	16QAM	12	13	21.36	21.35	21.56	22	2
5	16QAM	25	0	21.26	21.32	21.66		



**<Reduced Power Mode for Hotspot On/P-Sensor On>**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.74	16.05	15.83	17	0
20	QPSK	1	49	16.48	16.3	16.19		
20	QPSK	1	99	15.74	15.93	16.17		
20	QPSK	50	0	16.31	16.29	16.28	17	0
20	QPSK	50	24	16.08	16.3	16.25		
20	QPSK	50	50	16.11	16.22	16.2		
20	QPSK	100	0	16.35	16.31	16.09		
20	16QAM	1	0	15.49	16	15.67	17	0
20	16QAM	1	49	15.89	15.76	15.87		
20	16QAM	1	99	15.65	15.78	15.71		
20	16QAM	50	0	16.18	16.24	16.36	17	0
20	16QAM	50	24	16.03	16.26	16.31		
20	16QAM	50	50	16.21	16.3	16.46		
20	16QAM	100	0	16.15	16.34	16.38		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.89	16.09	16.25	17	0
15	QPSK	1	37	16.17	16.41	16.14		
15	QPSK	1	74	16.24	16.02	16.34		
15	QPSK	36	0	16.06	16.32	16.39	17	0
15	QPSK	36	20	16.23	16.34	16.34		
15	QPSK	36	39	16.13	16.18	16.35		
15	QPSK	75	0	16.15	16.28	16.3		
15	16QAM	1	0	15.65	15.99	15.81	17	0
15	16QAM	1	37	16.12	16.31	16.03		
15	16QAM	1	74	16.36	15.8	15.68		
15	16QAM	36	0	16.02	16.26	16.31	17	0
15	16QAM	36	20	16.2	16.18	16.31		
15	16QAM	36	39	16.19	16.23	16.39		
15	16QAM	75	0	16.21	16.21	16.41		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.09	16.01	16.03	17	0
10	QPSK	1	25	16.19	16.34	16.45		
10	QPSK	1	49	16.19	16.12	16.36		
10	QPSK	25	0	16.09	16.34	16.41	17	0
10	QPSK	25	12	16.04	16.3	16.45		
10	QPSK	25	25	16.17	16.26	16.28		
10	QPSK	50	0	16.06	16.27	16.41	17	0
10	16QAM	1	0	15.74	15.64	15.94		
10	16QAM	1	25	16.18	15.66	16.45		
10	16QAM	1	49	15.61	15.42	15.74	17	0
10	16QAM	25	0	16.09	16.31	16.42		
10	16QAM	25	12	16.16	16.36	16.43		
10	16QAM	25	25	16.16	16.32	16.42	17	0
10	16QAM	50	0	16.14	16.33	16.24		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.83	16.1	16.39	17	0
5	QPSK	1	12	16.04	16.31	16.05		
5	QPSK	1	24	15.97	16.03	15.94		
5	QPSK	12	0	16.05	16.31	16.37	17	0
5	QPSK	12	7	15.98	16.29	16.35		
5	QPSK	12	13	15.99	16.29	16.33		
5	QPSK	25	0	16.09	16.29	16.31	17	0
5	16QAM	1	0	15.57	15.61	16.43		
5	16QAM	1	12	15.65	15.89	16.39		
5	16QAM	1	24	15.35	15.54	15.72	17	0
5	16QAM	12	0	15.9	16.2	16.43		
5	16QAM	12	7	16.1	16.18	16.19		
5	16QAM	12	13	16.11	16.07	16.07	17	0
5	16QAM	25	0	16.11	16.17	16.26		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.97	16.23	16.23	17	0
3	QPSK	1	8	16.16	16.3	15.98		
3	QPSK	1	14	15.84	16.03	16.07		
3	QPSK	8	0	15.89	16.25	16.32	17	0
3	QPSK	8	4	15.99	16.23	16.27		
3	QPSK	8	7	15.99	16.23	16.31		
3	QPSK	15	0	15.93	16.18	16.27	17	0
3	16QAM	1	0	15.14	15.82	16.35		
3	16QAM	1	8	15.53	16.01	16.03		
3	16QAM	1	14	15.24	15.71	15.68	17	0
3	16QAM	8	0	15.82	16.18	16.17		
3	16QAM	8	4	16.06	16.15	16.22		
3	16QAM	8	7	16.05	16.33	16.29	17	0



3	16QAM	15	0	15.97	16.27	16.21		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.95	16.22	16.25	17	0
1.4	QPSK	1	3	15.97	16.26	16.28		
1.4	QPSK	1	5	15.72	16.24	16.17		
1.4	QPSK	3	0	15.95	16.33	16.39		
1.4	QPSK	3	1	16.11	16.36	16.37		
1.4	QPSK	3	3	15.97	16.25	16.3		
1.4	QPSK	6	0	15.9	16.2	16.27	17	0
1.4	16QAM	1	0	16.05	15.81	15.99	17	0
1.4	16QAM	1	3	16.01	15.47	16		
1.4	16QAM	1	5	15.18	15.32	15.74		
1.4	16QAM	3	0	15.52	15.88	16.45		
1.4	16QAM	3	1	15.9	16.18	16.44		
1.4	16QAM	3	3	15.92	16.17	16.46		
1.4	16QAM	6	0	15.91	16.06	15.96	17	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.83	16.08	16.13	17	0
20	QPSK	1	49	16.24	16.28	16.35		
20	QPSK	1	99	15.96	15.93	15.84		
20	QPSK	50	0	16.35	16.3	16.36	17	0
20	QPSK	50	24	16.22	16.29	16.19		
20	QPSK	50	50	16.35	16.18	16.08		
20	QPSK	100	0	16.19	16.3	16.27	17	0
20	16QAM	1	0	15.97	16.03	16		
20	16QAM	1	49	16.37	15.99	16.35		
20	16QAM	1	99	16.01	15.76	15.7	17	0
20	16QAM	50	0	16.21	16.33	16.37		
20	16QAM	50	24	16.25	16.31	16.19		
20	16QAM	50	50	16.28	16.18	16.18	17	0
20	16QAM	100	0	16.26	16.28	16.3		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.22	16.24	16.12	17	0
15	QPSK	1	37	16.13	16.27	16.27		
15	QPSK	1	74	16.04	16.07	15.93		
15	QPSK	36	0	16.23	16.33	16.18	17	0
15	QPSK	36	20	16.09	16.25	16.23		
15	QPSK	36	39	16.26	16.22	16.16		
15	QPSK	75	0	16.23	16.31	16.21	17	0
15	16QAM	1	0	15.85	15.81	15.92		
15	16QAM	1	37	16.23	15.97	16.13		
15	16QAM	1	74	16.09	15.62	15.83	17	0
15	16QAM	36	0	16.14	16.33	16.16		
15	16QAM	36	20	16.2	16.36	16.3		
15	16QAM	36	39	16.27	16.22	16.15	17	0
15	16QAM	75	0	16.32	16.3	16.17		





Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	15.95	16.14	15.98	17	0
10	QPSK	1	25	16.07	16.12	16.11		
10	QPSK	1	49	15.89	15.92	16.16		
10	QPSK	25	0	16.11	16.38	16.24	17	0
10	QPSK	25	12	16.2	16.26	16.25		
10	QPSK	25	25	16.12	16.26	16.24		
10	QPSK	50	0	16.18	16.3	16.21	17	0
10	16QAM	1	0	15.83	15.59	15.66		
10	16QAM	1	25	15.63	16	15.93		
10	16QAM	1	49	15.78	15.84	15.79	17	0
10	16QAM	25	0	16.24	16.4	16.15		
10	16QAM	25	12	16.14	16.3	16.27		
10	16QAM	25	25	16.11	16.17	16.23	17	0
10	16QAM	50	0	16.3	16.25	16.2		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.01	16.08	16.04	17	0
5	QPSK	1	12	16.05	16.21	16.31		
5	QPSK	1	24	16.1	15.92	16.15		
5	QPSK	12	0	16.17	16.31	16.19	17	0
5	QPSK	12	7	16.17	16.36	16.18		
5	QPSK	12	13	16.1	16.24	16.3		
5	QPSK	25	0	16.11	16.28	16.09	17	0
5	16QAM	1	0	15.56	16.21	15.71		
5	16QAM	1	12	15.79	16.32	16.39		
5	16QAM	1	24	15.29	16.03	16.3	17	0
5	16QAM	12	0	15.99	16.25	16.3		
5	16QAM	12	7	16.13	16.3	16.29		
5	16QAM	12	13	16.24	16.31	16.41	17	0
5	16QAM	25	0	16.24	16.31	16.21		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.17	15.98	16	17	0
3	QPSK	1	8	16.34	16.15	15.99		
3	QPSK	1	14	16.22	15.89	16.04		
3	QPSK	8	0	16.15	16.25	16.12	17	0
3	QPSK	8	4	16.12	16.28	16.22		
3	QPSK	8	7	16.15	16.24	16.15		
3	QPSK	15	0	16.09	16.23	16.18	17	0
3	16QAM	1	0	16.02	15.77	15.38		
3	16QAM	1	8	15.72	15.91	15.75		
3	16QAM	1	14	15.35	15.66	15.74	17	0
3	16QAM	8	0	16.25	16.02	16.09		
3	16QAM	8	4	16.17	16.27	16.2		
3	16QAM	8	7	16.23	16.21	16.11	17	0
3	16QAM	15	0	16.04	16.08	16.2		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.2	16.21	16.15	17	0
1.4	QPSK	1	3	16.18	16.29	16.31		
1.4	QPSK	1	5	16.16	16.21	16.21		
1.4	QPSK	3	0	16.22	16.23	16.17		
1.4	QPSK	3	1	16.22	16.48	16.41		
1.4	QPSK	3	3	16.23	16.38	16.41		
1.4	QPSK	6	0	16.2	16.33	16.26	17	0
1.4	16QAM	1	0	15.75	16.47	16.26	17	0
1.4	16QAM	1	3	15.62	16	15.83		
1.4	16QAM	1	5	15.78	15.77	15.99		
1.4	16QAM	3	0	15.98	15.89	16.01		
1.4	16QAM	3	1	16.35	16.14	16.07		
1.4	16QAM	3	3	16.31	16.16	16.15		
1.4	16QAM	6	0	16.24	16.05	16.04	17	0



**<LTE Band 5>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	22.5	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.64	21.53	21.69		
10	QPSK	1	25	21.74	21.83	22	22.5	0
10	QPSK	1	49	21.61	21.7	21.63		
10	QPSK	25	0	21.89	21.87	21.91		
10	QPSK	25	12	21.91	21.85	21.97	22.5	0
10	QPSK	25	25	21.82	21.92	21.88		
10	QPSK	50	0	21.88	21.92	21.89		
10	16QAM	1	0	21.56	21.15	21.62	22.5	0
10	16QAM	1	25	21.64	21.63	22.07		
10	16QAM	1	49	21.46	21.04	21.37		
10	16QAM	25	0	20.9	20.78	20.81	22.5	0
10	16QAM	25	12	21.02	21.09	20.86		
10	16QAM	25	25	20.81	20.94	20.76		
10	16QAM	50	0	20.99	20.93	20.82		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.81	21.64	21.7	22.5	0
5	QPSK	1	12	22.04	22.05	21.84		
5	QPSK	1	24	21.78	21.62	21.57		
5	QPSK	12	0	21.88	21.86	21.79	22.5	0
5	QPSK	12	7	21.89	21.85	21.78		
5	QPSK	12	13	21.86	21.88	21.75		
5	QPSK	25	0	21.87	21.92	21.85		
5	16QAM	1	0	21.99	21.6	21.05	22.5	0
5	16QAM	1	12	21.55	21.51	21.49		
5	16QAM	1	24	21.78	21.1	21.16		
5	16QAM	12	0	20.98	20.78	20.7	22.5	0
5	16QAM	12	7	21.05	20.8	20.81		
5	16QAM	12	13	20.96	20.7	20.78		
5	16QAM	25	0	20.98	20.95	20.87		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.71	21.71	21.68	22.5	0
3	QPSK	1	8	21.9	21.84	21.68		
3	QPSK	1	14	21.65	21.78	21.65		
3	QPSK	8	0	21.82	21.9	21.8	22.5	0
3	QPSK	8	4	21.89	21.94	21.99		
3	QPSK	8	7	21.85	21.88	21.86		
3	QPSK	15	0	21.82	21.88	21.8	22.5	0
3	16QAM	1	0	21.35	21.91	21.8		
3	16QAM	1	8	21.58	22.05	21.54		
3	16QAM	1	14	21.36	21.18	21.46	22.5	0
3	16QAM	8	0	20.89	20.88	20.87		
3	16QAM	8	4	20.96	20.96	20.84		
3	16QAM	8	7	20.91	20.91	20.93	22.5	0
3	16QAM	15	0	20.96	20.9	20.65		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.76	21.82	21.92	22.5	0
1.4	QPSK	1	3	21.9	21.98	21.93		
1.4	QPSK	1	5	21.73	21.98	21.89		
1.4	QPSK	3	0	21.9	22.02	21.95		
1.4	QPSK	3	1	22.02	21.98	21.97		
1.4	QPSK	3	3	21.84	21.98	21.94		
1.4	QPSK	6	0	21.79	21.84	21.91	22.5	0
1.4	16QAM	1	0	22.05	21.36	21.99	22.5	0
1.4	16QAM	1	3	22.19	21.52	22.05		
1.4	16QAM	1	5	21.96	21.47	21.44		
1.4	16QAM	3	0	21.8	21.79	21.77		
1.4	16QAM	3	1	21.87	22	21.92		
1.4	16QAM	3	3	21.85	21.96	21.95		
1.4	16QAM	6	0	20.63	20.71	20.72	22.5	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				20850	21100	21350		
Channel				20850	21100	21350	20.5	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	19.47	19.69	19.69		
20	QPSK	1	49	20.06	20.15	20.21	20.5	0
20	QPSK	1	99	19.56	19.71	19.76		
20	QPSK	50	0	20.19	20.17	20.22		
20	QPSK	50	24	19.87	20.07	20.21	20.5	0
20	QPSK	50	50	19.84	19.95	20.08		
20	QPSK	100	0	19.87	20.01	20.22		
20	16QAM	1	0	19.25	19.47	19.5	20.5	0
20	16QAM	1	49	19.47	19.31	19.41		
20	16QAM	1	99	19.36	19.54	19.22		
20	16QAM	50	0	20.01	20.15	20.24	20.5	0
20	16QAM	50	24	20.02	20.11	20.24		
20	16QAM	50	50	19.88	20.09	20.1		
20	16QAM	100	0	19.79	20.05	20.13	20.5	0
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.89	19.74	20.01	20.5	0
15	QPSK	1	37	19.86	20.19	20.14		
15	QPSK	1	74	19.88	19.59	20.03		
15	QPSK	36	0	19.95	20.01	20.21	20.5	0
15	QPSK	36	20	19.85	20.05	20.15		
15	QPSK	36	39	19.93	20.01	20.11		
15	QPSK	75	0	19.94	20.05	20.2	20.5	0
15	16QAM	1	0	19.02	20.16	19.65		
15	16QAM	1	37	19.4	20.12	19.47		
15	16QAM	1	74	19.55	19.49	19.26	20.5	0
15	16QAM	36	0	19.97	19.97	20.15		
15	16QAM	36	20	19.9	20.09	20.09		
15	16QAM	36	39	19.87	19.96	20.15	20.5	0
15	16QAM	75	0	19.79	19.99	20.13		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.57	19.76	19.86	20.5	0
10	QPSK	1	25	19.8	20.06	20.13		
10	QPSK	1	49	19.62	19.75	19.91		
10	QPSK	25	0	19.82	20.06	20.09	20.5	0
10	QPSK	25	12	19.95	20.03	20.16		
10	QPSK	25	25	19.95	20.01	20.07		
10	QPSK	50	0	19.93	20.02	20.19	20.5	0
10	16QAM	1	0	19.27	19.49	19.84		
10	16QAM	1	25	19.33	19.32	20.22		
10	16QAM	1	49	19.33	19.49	19.67	20.5	0
10	16QAM	25	0	19.95	20.03	20.11		
10	16QAM	25	12	19.91	20.1	20.18		
10	16QAM	25	25	19.9	19.97	20.02	20.5	0
10	16QAM	50	0	19.87	20.07	20.23		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.63	19.83	19.98	20.5	0
5	QPSK	1	12	19.78	19.99	20.19		
5	QPSK	1	24	19.58	19.75	19.8		
5	QPSK	12	0	19.83	19.98	20.14	20.5	0
5	QPSK	12	7	19.92	20.03	20.13		
5	QPSK	12	13	19.87	19.99	20.03		
5	QPSK	25	0	19.85	20.06	20.05	20.5	0
5	16QAM	1	0	19.04	20.05	20.24		
5	16QAM	1	12	19.41	20.21	20.31		
5	16QAM	1	24	19.1	19.36	20.02	20.5	0
5	16QAM	12	0	19.67	19.95	20.17		
5	16QAM	12	7	19.67	20	20.16		
5	16QAM	12	13	19.69	19.96	20.06	20.5	0
5	16QAM	25	0	19.9	20.12	20.08		



<Reduced Power Mode for Product Specific 10g SAR>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.64	21.73	21.64	23	0
20	QPSK	1	49	22.28	22.12	22.04		
20	QPSK	1	99	21.62	21.98	21.70		
20	QPSK	50	0	22.22	22.05	22.16	23	0
20	QPSK	50	24	22.06	22.13	22.15		
20	QPSK	50	50	22.05	22.13	22.19		
20	QPSK	100	0	22.16	22.06	22.15		
20	16QAM	1	0	21.43	21.56	21.77	23	0
20	16QAM	1	49	21.80	21.58	22.29		
20	16QAM	1	99	21.44	21.43	21.62		
20	16QAM	50	0	22.06	22.21	22.09	23	0
20	16QAM	50	24	22.03	22.14	22.21		
20	16QAM	50	50	21.99	22.25	22.20		
20	16QAM	100	0	21.99	22.15	22.12		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.88	21.72	22.06	23	0
15	QPSK	1	37	21.93	22.34	22.25		
15	QPSK	1	74	22.09	21.79	22.02		
15	QPSK	36	0	21.88	22.22	22.22	23	0
15	QPSK	36	20	22.05	22.15	22.25		
15	QPSK	36	39	22.06	22.08	22.20		
15	QPSK	75	0	22.07	22.19	22.24		
15	16QAM	1	0	21.64	21.86	21.64	23	0
15	16QAM	1	37	21.60	22.43	21.77		
15	16QAM	1	74	21.54	21.76	21.54		
15	16QAM	36	0	21.87	22.11	22.15	23	0
15	16QAM	36	20	22.14	22.16	22.31		
15	16QAM	36	39	21.97	22.09	22.09		
15	16QAM	75	0	21.96	22.08	22.09		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.68	21.63	21.76	23	0
10	QPSK	1	25	21.76	22.25	22.20		
10	QPSK	1	49	21.73	21.86	21.76		
10	QPSK	25	0	21.99	22.21	22.25	23	0
10	QPSK	25	12	21.95	22.12	22.22		
10	QPSK	25	25	21.99	22.08	22.05		
10	QPSK	50	0	21.93	22.07	22.13		
10	16QAM	1	0	21.47	21.73	21.79	23	0
10	16QAM	1	25	21.41	22.05	22.30		
10	16QAM	1	49	21.46	21.58	21.59		
10	16QAM	25	0	22.00	22.24	22.20	23	0
10	16QAM	25	12	21.96	22.15	22.21		
10	16QAM	25	25	22.00	22.00	22.06		
10	16QAM	50	0	21.94	21.99	22.02		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.78	21.84	22.09	23	0
5	QPSK	1	12	21.91	22.23	22.06		
5	QPSK	1	24	21.82	21.78	21.67		
5	QPSK	12	0	21.93	22.09	22.13	23	0
5	QPSK	12	7	21.89	22.12	22.07		
5	QPSK	12	13	21.80	22.09	22.02		
5	QPSK	25	0	21.84	22.06	22.14		
5	16QAM	1	0	21.76	21.96	21.48	23	0
5	16QAM	1	12	21.38	21.83	21.59		
5	16QAM	1	24	21.20	21.27	21.20		
5	16QAM	12	0	21.66	22.03	22.22	23	0
5	16QAM	12	7	21.64	22.05	22.19		
5	16QAM	12	13	21.63	21.97	21.96		
5	16QAM	25	0	21.67	21.87	21.88		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.61	21.30	21.70	23	0
3	QPSK	1	8	21.71	21.23	21.54		
3	QPSK	1	14	21.74	21.56	21.83		
3	QPSK	8	0	21.85	22.07	22.10	23	0
3	QPSK	8	4	22.10	22.02	21.98		
3	QPSK	8	7	21.75	21.95	22.04		
3	QPSK	15	0	21.69	22.05	21.84		
3	16QAM	1	0	21.20	21.71	22.01	23	0
3	16QAM	1	8	21.31	22.13	21.98		
3	16QAM	1	14	21.19	22.02	21.48		
3	16QAM	8	0	21.74	22.05	21.99	23	0
3	16QAM	8	4	21.57	22.07	21.88		
3	16QAM	8	7	21.64	22.05	21.81		
3	16QAM	15	0	21.78	21.98	21.75		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.64	21.85	21.99	23	0
1.4	QPSK	1	3	21.69	21.97	21.88		
1.4	QPSK	1	5	21.62	22.01	21.98		
1.4	QPSK	3	0	21.75	22.20	22.15		
1.4	QPSK	3	1	21.80	22.24	22.14		
1.4	QPSK	3	3	21.79	21.95	22.09	23	0
1.4	QPSK	6	0	21.74	22.02	22.00	23	0
1.4	16QAM	1	0	21.21	21.85	21.42		
1.4	16QAM	1	3	21.29	22.15	21.75		
1.4	16QAM	1	5	21.17	22.11	21.61		
1.4	16QAM	3	0	21.73	21.94	21.87		
1.4	16QAM	3	1	21.79	21.97	21.93		
1.4	16QAM	3	3	21.79	21.98	21.98		
1.4	16QAM	6	0	21.47	21.79	21.82	23	0





<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	23	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.86	22.02	22.08		
20	QPSK	1	49	22.12	22.11	21.93	23	0
20	QPSK	1	99	21.78	21.70	21.74		
20	QPSK	50	0	22.13	22.21	22.27		
20	QPSK	50	24	22.24	22.13	22.05	23	0
20	QPSK	50	50	22.17	22.03	22.03		
20	QPSK	100	0	22.15	22.22	22.13		
20	16QAM	1	0	21.61	22.04	22.07	23	0
20	16QAM	1	49	21.69	22.41	22.35		
20	16QAM	1	99	21.73	21.71	21.87		
20	16QAM	50	0	22.15	22.08	22.14	23	0
20	16QAM	50	24	22.13	22.12	22.05		
20	16QAM	50	50	22.27	22.02	21.94		
20	16QAM	100	0	22.13	22.08	22.12		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	21.89	22.09	21.91	23	0
15	QPSK	1	37	22.10	22.07	22.02		
15	QPSK	1	74	22.07	21.72	22.04		
15	QPSK	36	0	21.99	22.12	22.10	23	0
15	QPSK	36	20	22.00	22.17	22.08		
15	QPSK	36	39	21.98	21.96	21.94		
15	QPSK	75	0	22.07	22.12	22.01	23	0
15	16QAM	1	0	21.96	21.84	21.63		
15	16QAM	1	37	22.19	22.22	21.73		
15	16QAM	1	74	21.78	21.65	21.47	23	0
15	16QAM	36	0	21.91	22.08	22.09		
15	16QAM	36	20	21.84	22.11	22.08		
15	16QAM	36	39	22.04	21.94	21.95	23	0
15	16QAM	75	0	22.01	22.08	21.99		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	21.90	21.77	21.92	23	0
10	QPSK	1	25	21.94	21.92	22.00		
10	QPSK	1	49	21.77	21.65	22.01		
10	QPSK	25	0	22.00	22.10	22.03	23	0
10	QPSK	25	12	21.97	22.13	22.00		
10	QPSK	25	25	21.94	22.02	21.92		
10	QPSK	50	0	21.99	22.08	22.03	23	0
10	16QAM	1	0	21.69	21.87	21.59		
10	16QAM	1	25	22.12	22.25	21.59		
10	16QAM	1	49	21.71	21.39	21.65	23	0
10	16QAM	25	0	22.03	22.06	21.92		
10	16QAM	25	12	21.92	22.00	22.02		
10	16QAM	25	25	22.11	21.89	21.93	23	0
10	16QAM	50	0	22.04	22.05	22.04		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.93	22.10	21.85	23	0
5	QPSK	1	12	22.04	22.26	21.95		
5	QPSK	1	24	21.97	22.15	21.88		
5	QPSK	12	0	22.05	22.17	22.02	23	0
5	QPSK	12	7	22.10	22.10	21.98		
5	QPSK	12	13	22.04	22.07	22.09		
5	QPSK	25	0	22.03	22.04	21.92		
5	16QAM	1	0	21.49	22.11	22.02	23	0
5	16QAM	1	12	22.03	21.56	22.15		
5	16QAM	1	24	22.02	21.44	22.16		
5	16QAM	12	0	21.85	21.89	21.96	23	0
5	16QAM	12	7	22.04	21.90	22.11		
5	16QAM	12	13	21.98	21.97	22.20		
5	16QAM	25	0	21.93	21.93	21.94		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.08	22.03	21.75	23	0
3	QPSK	1	8	21.98	21.99	22.00		
3	QPSK	1	14	21.89	21.97	21.91		
3	QPSK	8	0	22.11	22.15	21.99	23	0
3	QPSK	8	4	22.08	22.18	21.97		
3	QPSK	8	7	22.01	22.14	21.89		
3	QPSK	15	0	21.95	22.14	21.93		
3	16QAM	1	0	21.50	22.26	21.31	23	0
3	16QAM	1	8	21.93	22.25	21.49		
3	16QAM	1	14	21.83	22.12	21.48		
3	16QAM	8	0	22.16	22.20	21.88	23	0
3	16QAM	8	4	22.05	22.23	21.94		
3	16QAM	8	7	22.06	22.09	21.98		
3	16QAM	15	0	21.95	22.15	21.87		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.06	21.92	21.90	23	0
1.4	QPSK	1	3	22.03	21.96	21.92		
1.4	QPSK	1	5	22.00	21.69	22.00		
1.4	QPSK	3	0	22.06	22.20	22.12		
1.4	QPSK	3	1	22.12	22.32	22.15		
1.4	QPSK	3	3	22.13	22.14	22.07	23	0
1.4	QPSK	6	0	22.04	22.11	22.12		
1.4	16QAM	1	0	22.40	22.35	22.16	23	0
1.4	16QAM	1	3	22.51	22.31	22.18		
1.4	16QAM	1	5	21.49	22.24	22.19		
1.4	16QAM	3	0	21.98	22.11	21.83		
1.4	16QAM	3	1	22.03	22.06	22.02		
1.4	16QAM	3	3	22.06	22.16	22.03		
1.4	16QAM	6	0	21.97	21.97	22.05	23	0



**<WLAN Conducted Power>**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

**<Full Power Mode>**

**<2.4GHz WLAN>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.40	19.50	97.91
		6	2437	17.57	19.50	
		11	2462	18.84	19.50	
	802.11g 6Mbps	1	2412	12.42	14.00	87.02
		6	2437	12.92	14.00	
		11	2462	13.48	14.00	
	802.11n-HT20 MCS0	1	2412	10.90	12.50	86.94
		6	2437	12.99	14.00	
		11	2462	13.54	14.00	

**<Reduced Power Mode for Receiver On>**

**<2.4GHz WLAN>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.91	17.50	97.91
		6	2437	16.37	17.50	
		11	2462	16.97	17.50	
	802.11g 6Mbps	1	2412	13.15	14.00	87.02
		6	2437	12.92	14.00	
		11	2462	13.48	14.00	
	802.11n-HT20 MCS0	1	2412	10.90	12.50	86.94
		6	2437	12.99	14.00	
		11	2462	13.54	14.00	



13. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	Bluetooth v3.0 + EDR	Bluetooth v4.0/4.1/4.2 LE
2.4GHz Bluetooth	9.0	0.5

Note:

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$


- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.0	5	2.48	2.5

Note:

Per KDB 447498 D01v06, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.5 which is ≤ 3, SAR testing is not required.

**14. Antenna Location**

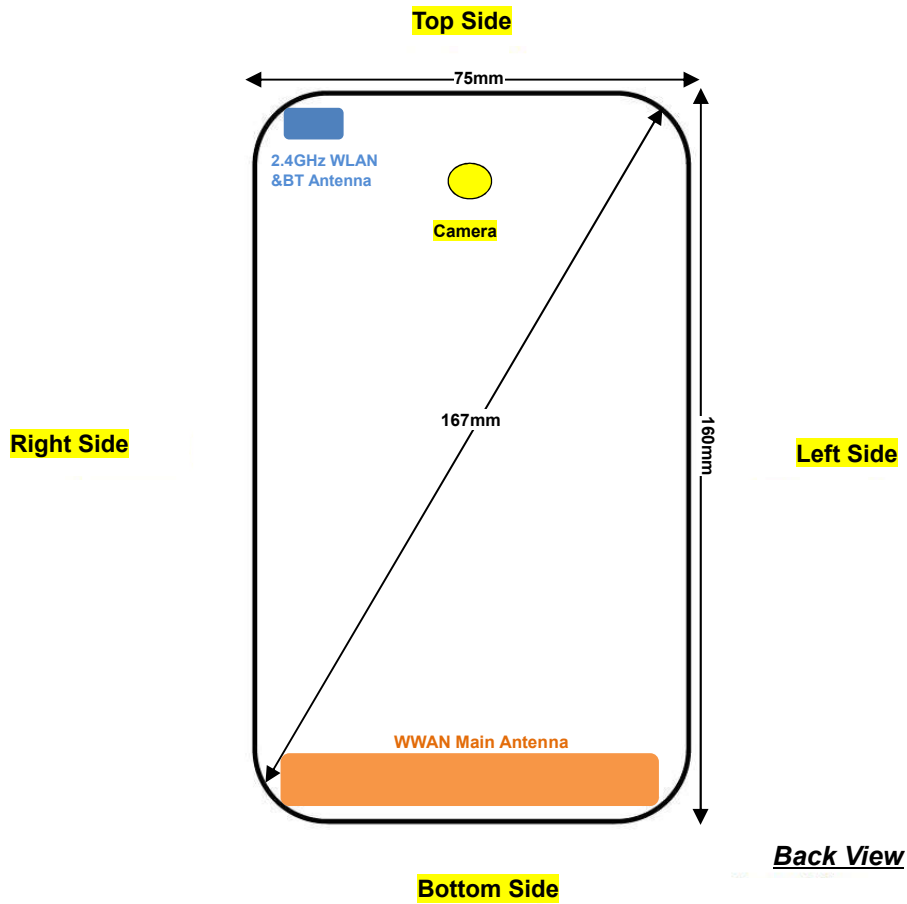

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

**General Note:**

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

## 15. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is  $\geq 0.8$ W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. When the phone is in talking mode and receiver worked, all WWAN powers are full power.
6. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in WLAN 2.4GHz.
7. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/IV/V and LTE band 2/4/5/7.
8. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850/1900, WCDMA band II/IV/V and LTE band 2/4/5/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
9. This device hotspot reduced power and P-sensor reduced power level are the same. So only show one reduced power level for hotspot reduced power and P-sensor reduced power for this application.
10. P-sensor can detect handheld state, for bottom side of product specific 10g SAR condition, WCDMA band II/IV and LTE band 2/4 reduced powers will be active. For GSM1900 and LTE band 7, the power levels are the same as the full power.
11. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
  - a. When hotspot is not worked, GSM1900, WCDMA Band II/IV, LTE Band 4/2/7 product specific 10g SAR is required.
  - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

### GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slot for GSM850, GPRS 4Tx slots for GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode
3. Power reduction which is triggered by hotspot mode/P-sensor is implemented in GSM850/1900 band, SAR testing EUT was set in reduced power mode and GPRS 2 Tx slots for GSM850, GPRS 4 Tx slots for GSM1900, due to its highest frame-average power.

**WCDMA Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.





**15.1 Head SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Right Cheek	Full	189	836.4	29.99	30.50	1.125	0.07	0.280	0.315
	GSM850	GPRS 2 Tx slots	Right Tilted	Full	189	836.4	29.99	30.50	1.125	0.01	0.178	0.200
01	GSM850	GPRS 2 Tx slots	Left Cheek	Full	189	836.4	29.99	30.50	1.125	0.15	0.306	<b>0.344</b>
	GSM850	GPRS 2 Tx slots	Left Tilted	Full	189	836.4	29.99	30.50	1.125	0.07	0.182	0.205
02	GSM1900	GPRS 4 Tx slots	Right Cheek	Full	661	1880	25.06	25.50	1.107	0.1	0.217	<b>0.240</b>
	GSM1900	GPRS 4 Tx slots	Right Tilted	Full	661	1880	25.06	25.50	1.107	-0.01	0.113	0.125
	GSM1900	GPRS 4 Tx slots	Left Cheek	Full	661	1880	25.06	25.50	1.107	0.19	0.147	0.163
	GSM1900	GPRS 4 Tx slots	Left Tilted	Full	661	1880	25.06	25.50	1.107	0.18	0.140	0.155

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC12.2Kbps	Right Cheek	Full	4233	846.6	23.52	24.00	1.117	0.03	0.436	<b>0.487</b>
	WCDMA Band V	RMC12.2Kbps	Right Tilted	Full	4233	846.6	23.52	24.00	1.117	0.1	0.283	0.316
	WCDMA Band V	RMC12.2Kbps	Left Cheek	Full	4233	846.6	23.52	24.00	1.117	0.14	0.435	0.486
	WCDMA Band V	RMC12.2Kbps	Left Tilted	Full	4233	846.6	23.52	24.00	1.117	0.09	0.264	0.295
04	WCDMA Band IV	RMC12.2Kbps	Right Cheek	Full	1513	1752.6	23.24	24.00	1.191	-0.03	0.246	<b>0.293</b>
	WCDMA Band IV	RMC12.2Kbps	Right Tilted	Full	1513	1752.6	23.24	24.00	1.191	-0.06	0.097	0.116
	WCDMA Band IV	RMC12.2Kbps	Left Cheek	Full	1513	1752.6	23.24	24.00	1.191	0.05	0.145	0.173
	WCDMA Band IV	RMC12.2Kbps	Left Tilted	Full	1513	1752.6	23.24	24.00	1.191	0.04	0.101	0.120
05	WCDMA Band II	RMC12.2Kbps	Right Cheek	Full	9538	1907.6	23.66	24.00	1.081	0.05	0.458	<b>0.495</b>
	WCDMA Band II	RMC12.2Kbps	Right Tilted	Full	9538	1907.6	23.66	24.00	1.081	0.1	0.210	0.227
	WCDMA Band II	RMC12.2Kbps	Left Cheek	Full	9538	1907.6	23.66	24.00	1.081	0.02	0.324	0.350
	WCDMA Band II	RMC12.2Kbps	Left Tilted	Full	9538	1907.6	23.66	24.00	1.081	-0.01	0.297	0.321



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 5	10M	QPSK	1	25	Right Cheek	Full	20525	836.5	22.88	24.00	1.294	0.14	0.412	<b>0.533</b>
	LTE Band 5	10M	QPSK	25	12	Right Cheek	Full	20525	836.5	21.96	23.00	1.271	0.12	0.225	0.286
	LTE Band 5	10M	QPSK	1	25	Right Tilted	Full	20525	836.5	22.88	24.00	1.294	-0.02	0.256	0.331
	LTE Band 5	10M	QPSK	25	12	Right Tilted	Full	20525	836.5	21.96	23.00	1.271	0.15	0.138	0.175
	LTE Band 5	10M	QPSK	1	25	Left Cheek	Full	20525	836.5	22.88	24.00	1.294	0.07	0.397	0.514
	LTE Band 5	10M	QPSK	25	12	Left Cheek	Full	20525	836.5	21.96	23.00	1.271	-0.07	0.213	0.271
	LTE Band 5	10M	QPSK	1	25	Left Tilted	Full	20525	836.5	22.88	24.00	1.294	0.06	0.240	0.311
	LTE Band 5	10M	QPSK	25	12	Left Tilted	Full	20525	836.5	21.96	23.00	1.271	-0.05	0.128	0.163
07	LTE Band 4	20M	QPSK	1	49	Right Cheek	Full	20175	1732.5	23.25	24.00	1.189	0.19	0.190	<b>0.226</b>
	LTE Band 4	20M	QPSK	50	0	Right Cheek	Full	20175	1732.5	22.27	23.00	1.183	0.13	0.108	0.128
	LTE Band 4	20M	QPSK	1	49	Right Tilted	Full	20175	1732.5	23.25	24.00	1.189	0.1	0.062	0.074
	LTE Band 4	20M	QPSK	50	0	Right Tilted	Full	20175	1732.5	22.27	23.00	1.183	0	0.034	0.040
	LTE Band 4	20M	QPSK	1	49	Left Cheek	Full	20175	1732.5	23.25	24.00	1.189	0.11	0.084	0.100
	LTE Band 4	20M	QPSK	50	0	Left Cheek	Full	20175	1732.5	22.27	23.00	1.183	0.1	0.048	0.057
	LTE Band 4	20M	QPSK	1	49	Left Tilted	Full	20175	1732.5	23.25	24.00	1.189	0.03	0.066	0.078
	LTE Band 4	20M	QPSK	50	0	Left Tilted	Full	20175	1732.5	22.27	23.00	1.183	0.12	0.036	0.043
08	LTE Band 2	20M	QPSK	1	49	Right Cheek	Full	18700	1860	23.12	24.00	1.225	0.06	0.408	<b>0.500</b>
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Full	18700	1860	22.23	23.00	1.194	0.13	0.239	0.285
	LTE Band 2	20M	QPSK	1	49	Right Tilted	Full	18700	1860	23.12	24.00	1.225	0.14	0.173	0.212
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Full	18700	1860	22.23	23.00	1.194	0.16	0.102	0.122
	LTE Band 2	20M	QPSK	1	49	Left Cheek	Full	18700	1860	23.12	24.00	1.225	0.1	0.237	0.290
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Full	18700	1860	22.23	23.00	1.194	0.09	0.135	0.161
	LTE Band 2	20M	QPSK	1	49	Left Tilted	Full	18700	1860	23.12	24.00	1.225	0.12	0.236	0.289
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Full	18700	1860	22.23	23.00	1.194	-0.03	0.140	0.167
09	LTE Band 7	20M	QPSK	1	49	Right Cheek	Full	21350	2560	23.72	24.00	1.067	0.15	0.376	<b>0.401</b>
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Full	21350	2560	22.83	23.00	1.040	0.09	0.199	0.207
	LTE Band 7	20M	QPSK	1	49	Right Tilted	Full	21350	2560	23.72	24.00	1.067	0.1	0.176	0.188
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Full	21350	2560	22.83	23.00	1.040	0.09	0.089	0.093
	LTE Band 7	20M	QPSK	1	49	Left Cheek	Full	21350	2560	23.72	24.00	1.067	0.06	0.193	0.206
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Full	21350	2560	22.83	23.00	1.040	0.15	0.099	0.103
	LTE Band 7	20M	QPSK	1	49	Left Tilted	Full	21350	2560	23.72	24.00	1.067	0.11	0.148	0.158
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Full	21350	2560	22.83	23.00	1.040	0.19	0.074	0.077

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	11	2462	16.97	17.50	1.130	97.91	1.021	0.05	0.348	0.401
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	11	2462	16.97	17.50	1.130	97.91	1.021	0.12	0.395	0.456
10	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	11	2462	16.97	17.50	1.130	97.91	1.021	0.04	0.835	<b>0.963</b>
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	11	2462	16.97	17.50	1.130	97.91	1.021	0.05	0.726	0.837
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	1	2412	16.91	17.50	1.146	97.91	1.021	-0.1	0.681	0.796
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	1	2412	16.91	17.50	1.146	97.91	1.021	0.05	0.655	0.766



**15.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	5	Reduced	189	836.4	27.89	28.50	1.151	0.05	0.478	0.550
	GSM850	GPRS 2 Tx slots	Back	5	Reduced	189	836.4	27.89	28.50	1.151	0.04	0.704	0.810
	GSM850	GPRS 2 Tx slots	Back	5	Reduced	128	824.2	27.74	28.50	1.191	0.03	0.566	0.674
11	GSM850	GPRS 2 Tx slots	Back	5	Reduced	251	848.8	27.88	28.50	1.153	0.09	0.856	<b>0.987</b>
	GSM850	GPRS 2 Tx slots	Left Side	5	Reduced	189	836.4	27.89	28.50	1.151	0.11	0.359	0.413
	GSM850	GPRS 2 Tx slots	Right Side	5	Reduced	189	836.4	27.89	28.50	1.151	0.08	0.328	0.377
	GSM850	GPRS 2 Tx slots	Bottom Side	5	Reduced	189	836.4	27.89	28.50	1.151	0.04	0.159	0.183
	GSM1900	GPRS 4 Tx slots	Front	5	Reduced	512	1850.2	20.89	21.50	1.151	-0.19	0.263	0.303
	GSM1900	GPRS 4 Tx slots	Back	5	Reduced	512	1850.2	20.89	21.50	1.151	-0.03	0.761	0.876
12	GSM1900	GPRS 4 Tx slots	Back	5	Reduced	661	1880	20.53	21.50	1.250	-0.05	0.833	<b>1.041</b>
	GSM1900	GPRS 4 Tx slots	Back	5	Reduced	810	1909.8	20.71	21.50	1.199	-0.06	0.789	0.946
	GSM1900	GPRS 4 Tx slots	Left Side	5	Reduced	512	1850.2	20.89	21.50	1.151	0.18	0.023	0.026
	GSM1900	GPRS 4 Tx slots	Right Side	5	Reduced	512	1850.2	20.89	21.50	1.151	-0.09	0.059	0.068
	GSM1900	GPRS 4 Tx slots	Bottom Side	5	Reduced	512	1850.2	20.89	21.50	1.151	-0.03	0.566	0.651

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2Kbps	Front	5	Reduced	4233	846.6	22.42	23.00	1.143	0.12	0.745	0.851
	WCDMA Band V	RMC12.2Kbps	Front	5	Reduced	4132	826.4	22.31	23.00	1.172	0.02	0.633	0.742
	WCDMA Band V	RMC12.2Kbps	Front	5	Reduced	4182	836.4	22.41	23.00	1.146	0.11	0.738	0.845
	WCDMA Band V	RMC12.2Kbps	Back	5	Reduced	4233	846.6	22.42	23.00	1.143	0.12	0.861	0.984
	WCDMA Band V	RMC12.2Kbps	Back	5	Reduced	4132	826.4	22.31	23.00	1.172	0.07	0.834	0.978
13	WCDMA Band V	RMC12.2Kbps	Back	5	Reduced	4182	836.4	22.41	23.00	1.146	0.06	0.896	<b>1.026</b>
	WCDMA Band V	RMC12.2Kbps	Left Side	5	Reduced	4233	846.6	22.42	23.00	1.143	0.04	0.535	0.611
	WCDMA Band V	RMC12.2Kbps	Right Side	5	Reduced	4233	846.6	22.42	23.00	1.143	-0.02	0.471	0.538
	WCDMA Band V	RMC12.2Kbps	Bottom Side	5	Reduced	4233	846.6	22.42	23.00	1.143	0.17	0.271	0.310
	WCDMA Band IV	RMC12.2Kbps	Front	5	Reduced	1513	1752.6	15.68	16.50	1.208	0.05	0.314	0.379
14	WCDMA Band IV	RMC12.2Kbps	Back	5	Reduced	1513	1752.6	15.68	16.50	1.208	-0.08	0.872	<b>1.053</b>
	WCDMA Band IV	RMC12.2Kbps	Back	5	Reduced	1312	1712.4	15.66	16.50	1.213	0.17	0.784	0.951
	WCDMA Band IV	RMC12.2Kbps	Back	5	Reduced	1413	1732.6	15.66	16.50	1.213	0.02	0.824	1.000
	WCDMA Band IV	RMC12.2Kbps	Left Side	5	Reduced	1513	1752.6	15.68	16.50	1.208	-0.05	0.018	0.022
	WCDMA Band IV	RMC12.2Kbps	Right Side	5	Reduced	1513	1752.6	15.68	16.50	1.208	-0.13	0.051	0.062
	WCDMA Band IV	RMC12.2Kbps	Bottom Side	5	Reduced	1513	1752.6	15.68	16.50	1.208	-0.11	0.623	0.752
	WCDMA Band II	RMC12.2Kbps	Front	5	Reduced	9538	1907.6	17.14	17.50	1.086	-0.16	0.290	0.315
	WCDMA Band II	RMC12.2Kbps	Back	5	Reduced	9538	1907.6	17.14	17.50	1.086	0.17	0.908	0.986
15	WCDMA Band II	RMC12.2Kbps	Back	5	Reduced	9262	1852.4	17.10	17.50	1.096	0.02	0.998	<b>1.094</b>
	WCDMA Band II	RMC12.2Kbps	Back	5	Reduced	9400	1880	17.04	17.50	1.112	0.05	0.964	1.072
	WCDMA Band II	RMC12.2Kbps	Left Side	5	Reduced	9538	1907.6	17.14	17.50	1.086	-0.05	0.049	0.053
	WCDMA Band II	RMC12.2Kbps	Right Side	5	Reduced	9538	1907.6	17.14	17.50	1.086	-0.04	0.062	0.067
	WCDMA Band II	RMC12.2Kbps	Bottom Side	5	Reduced	9538	1907.6	17.14	17.50	1.086	-0.06	0.602	0.654



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	25	Front	5	Reduced	20525	836.5	21.83	22.50	1.167	-0.01	0.638	0.744
	LTE Band 5	10M	QPSK	25	12	Front	5	Reduced	20525	836.5	21.85	22.50	1.161	0.03	0.456	0.530
16	LTE Band 5	10M	QPSK	1	25	Back	5	Reduced	20525	836.5	21.83	22.50	1.167	0.17	0.823	<b>0.960</b>
	LTE Band 5	10M	QPSK	25	12	Back	5	Reduced	20525	836.5	21.85	22.50	1.161	0.01	0.568	0.660
	LTE Band 5	10M	QPSK	50	0	Back	5	Reduced	20525	836.5	21.92	22.50	1.143	0.01	0.563	0.643
	LTE Band 5	10M	QPSK	1	25	Left Side	5	Reduced	20525	836.5	21.83	22.50	1.167	0.03	0.477	0.557
	LTE Band 5	10M	QPSK	25	12	Left Side	5	Reduced	20525	836.5	21.85	22.50	1.161	0.03	0.316	0.367
	LTE Band 5	10M	QPSK	1	25	Right Side	5	Reduced	20525	836.5	21.83	22.50	1.167	-0.06	0.497	0.580
	LTE Band 5	10M	QPSK	25	12	Right Side	5	Reduced	20525	836.5	21.85	22.50	1.161	-0.03	0.339	0.394
	LTE Band 5	10M	QPSK	1	25	Bottom Side	5	Reduced	20525	836.5	21.83	22.50	1.167	0.18	0.217	0.253
	LTE Band 5	10M	QPSK	25	12	Bottom Side	5	Reduced	20525	836.5	21.85	22.50	1.161	0.15	0.146	0.170
	LTE Band 4	20M	QPSK	1	49	Front	5	Reduced	20175	1732.5	16.28	17.00	1.180	-0.15	0.348	0.411
	LTE Band 4	20M	QPSK	50	0	Front	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.04	0.359	0.422
	LTE Band 4	20M	QPSK	1	49	Back	5	Reduced	20175	1732.5	16.28	17.00	1.180	0.18	0.938	1.107
	LTE Band 4	20M	QPSK	50	0	Back	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.19	0.937	1.101
17	LTE Band 4	20M	QPSK	100	0	Back	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.07	0.951	<b>1.117</b>
	LTE Band 4	20M	QPSK	1	49	Left Side	5	Reduced	20175	1732.5	16.28	17.00	1.180	-0.09	0.018	0.021
	LTE Band 4	20M	QPSK	50	0	Left Side	5	Reduced	20175	1732.5	16.30	17.00	1.175	-0.05	0.019	0.022
	LTE Band 4	20M	QPSK	1	49	Right Side	5	Reduced	20175	1732.5	16.28	17.00	1.180	-0.18	0.049	0.058
	LTE Band 4	20M	QPSK	50	0	Right Side	5	Reduced	20175	1732.5	16.30	17.00	1.175	-0.01	0.048	0.056
	LTE Band 4	20M	QPSK	1	49	Bottom Side	5	Reduced	20175	1732.5	16.28	17.00	1.180	-0.03	0.690	0.814
	LTE Band 4	20M	QPSK	50	0	Bottom Side	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.06	0.685	0.805
	LTE Band 4	20M	QPSK	100	0	Bottom Side	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.05	0.681	0.800
	LTE Band 2	20M	QPSK	1	49	Front	5	Reduced	18700	1860	16.48	17.00	1.127	0.09	0.320	0.361
	LTE Band 2	20M	QPSK	50	0	Front	5	Reduced	18700	1860	16.31	17.00	1.172	-0.18	0.325	0.381
	LTE Band 2	20M	QPSK	1	49	Back	5	Reduced	18700	1860	16.48	17.00	1.127	-0.02	0.915	1.031
	LTE Band 2	20M	QPSK	1	49	Back	5	Reduced	18900	1880	16.30	17.00	1.175	-0.13	0.848	0.996
	LTE Band 2	20M	QPSK	1	49	Back	5	Reduced	19100	1900	16.19	17.00	1.205	-0.09	0.799	0.963
18	LTE Band 2	20M	QPSK	50	0	Back	5	Reduced	18700	1860	16.31	17.00	1.172	-0.17	0.909	<b>1.066</b>
	LTE Band 2	20M	QPSK	50	0	Back	5	Reduced	18900	1880	16.29	17.00	1.178	0.16	0.846	0.996
	LTE Band 2	20M	QPSK	50	0	Back	5	Reduced	19100	1900	16.28	17.00	1.180	0.07	0.789	0.931
	LTE Band 2	20M	QPSK	100	0	Back	5	Reduced	18700	1860	16.35	17.00	1.161	0.07	0.901	1.046
	LTE Band 2	20M	QPSK	1	49	Left Side	5	Reduced	18700	1860	16.48	17.00	1.127	-0.16	0.040	0.045
	LTE Band 2	20M	QPSK	50	0	Left Side	5	Reduced	18700	1860	16.31	17.00	1.172	-0.02	0.037	0.043
	LTE Band 2	20M	QPSK	1	49	Right Side	5	Reduced	18700	1860	16.48	17.00	1.127	-0.18	0.058	0.065
	LTE Band 2	20M	QPSK	50	0	Right Side	5	Reduced	18700	1860	16.31	17.00	1.172	-0.1	0.061	0.072
	LTE Band 2	20M	QPSK	1	49	Bottom Side	5	Reduced	18700	1860	16.48	17.00	1.127	-0.03	0.625	0.704
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Reduced	18700	1860	16.31	17.00	1.172	-0.08	0.638	0.748



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	49	Front	5	Reduced	21350	2560	20.21	20.50	1.069	0.02	0.826	0.883
	LTE Band 7	20M	QPSK	1	49	Front	5	Reduced	20850	2510	20.06	20.50	1.107	-0.09	0.781	0.864
	LTE Band 7	20M	QPSK	1	49	Front	5	Reduced	21100	2535	20.15	20.50	1.084	0.04	0.777	0.842
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	21350	2560	20.22	20.50	1.067	0.06	0.821	0.876
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	20850	2510	20.19	20.50	1.074	0.04	0.786	0.844
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	21100	2535	20.17	20.50	1.079	0.18	0.804	0.867
	LTE Band 7	20M	QPSK	100	0	Front	5	Reduced	21350	2560	20.22	20.50	1.067	0.03	0.833	0.888
19	LTE Band 7	20M	QPSK	1	49	Back	5	Reduced	21350	2560	20.21	20.50	1.069	0.06	1.120	1.197
	LTE Band 7	20M	QPSK	1	49	Back	5	Reduced	20850	2510	20.06	20.50	1.107	0.05	1.080	1.195
	LTE Band 7	20M	QPSK	1	49	Back	5	Reduced	21100	2535	20.15	20.50	1.084	-0.01	1.100	1.192
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	21350	2560	20.22	20.50	1.067	0.1	1.120	1.195
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	20850	2510	20.19	20.50	1.074	0.12	1.110	1.192
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	21100	2535	20.17	20.50	1.079	0.14	1.090	1.176
	LTE Band 7	20M	QPSK	100	0	Back	5	Reduced	21350	2560	20.22	20.50	1.067	0.08	1.120	1.195
	LTE Band 7	20M	QPSK	1	49	Left Side	5	Reduced	21350	2560	20.21	20.50	1.069	-0.08	0.119	0.127
	LTE Band 7	20M	QPSK	50	0	Left Side	5	Reduced	21350	2560	20.22	20.50	1.067	-0.06	0.117	0.125
	LTE Band 7	20M	QPSK	1	49	Right Side	5	Reduced	21350	2560	20.21	20.50	1.069	-0.02	0.410	0.438
	LTE Band 7	20M	QPSK	50	0	Right Side	5	Reduced	21350	2560	20.22	20.50	1.067	-0.03	0.402	0.429
	LTE Band 7	20M	QPSK	1	49	Bottom Side	5	Reduced	21350	2560	20.21	20.50	1.069	0.03	1.030	1.101
	LTE Band 7	20M	QPSK	1	49	Bottom Side	5	Reduced	20850	2510	20.06	20.50	1.107	0.14	0.918	1.016
	LTE Band 7	20M	QPSK	1	49	Bottom Side	5	Reduced	21100	2535	20.15	20.50	1.084	-0.13	0.942	1.021
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Reduced	21350	2560	20.22	20.50	1.067	0.19	0.978	1.043
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Reduced	20850	2510	20.19	20.50	1.074	0.03	0.904	0.971
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Reduced	21100	2535	20.17	20.50	1.079	0.04	0.936	1.010
	LTE Band 7	20M	QPSK	100	0	Bottom Side	5	Reduced	21350	2560	20.22	20.50	1.067	0.06	0.982	1.047

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	Full	11	2462	18.84	19.50	1.164	97.91	1.021	0.567	0.05	0.493	0.586
20	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	11	2462	18.84	19.50	1.164	97.91	1.021	0.906	0.02	0.669	0.795
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5	Full	11	2462	18.84	19.50	1.164	97.91	1.021	0.395			
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	Full	11	2462	18.84	19.50	1.164	97.91	1.021	0.773	0.05	0.661	0.785



**15.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	5	Reduced	189	836.4	27.89	28.50	1.151	0.05	0.478	0.550
	GSM850	GPRS 2 Tx slots	Back	5	Reduced	189	836.4	27.89	28.50	1.151	0.04	0.704	0.810
	GSM850	GPRS 2 Tx slots	Back	5	Reduced	128	824.2	27.74	28.50	1.191	0.03	0.566	0.674
21	GSM850	GPRS 2 Tx slots	Back	5	Reduced	251	848.8	27.88	28.50	1.153	0.09	0.856	<b>0.987</b>
	GSM1900	GPRS 4 Tx slots	Front	5	Reduced	512	1850.2	20.89	21.50	1.151	-0.19	0.263	0.303
	GSM1900	GPRS 4 Tx slots	Back	5	Reduced	512	1850.2	20.89	21.50	1.151	-0.03	0.761	0.876
22	GSM1900	GPRS 4 Tx slots	Back	5	Reduced	661	1880	20.53	21.50	1.250	-0.05	0.833	<b>1.041</b>
	GSM1900	GPRS 4 Tx slots	Back	5	Reduced	810	1909.8	20.71	21.50	1.199	-0.06	0.789	0.946

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2Kbps	Front	5	Reduced	4233	846.6	22.42	23.00	1.143	0.12	0.745	0.851
	WCDMA Band V	RMC12.2Kbps	Front	5	Reduced	4132	826.4	22.31	23.00	1.172	0.02	0.633	0.742
	WCDMA Band V	RMC12.2Kbps	Front	5	Reduced	4182	836.4	22.41	23.00	1.146	0.11	0.738	0.845
	WCDMA Band V	RMC12.2Kbps	Back	5	Reduced	4233	846.6	22.42	23.00	1.143	0.12	0.861	0.984
	WCDMA Band V	RMC12.2Kbps	Back	5	Reduced	4132	826.4	22.31	23.00	1.172	0.07	0.834	0.978
23	WCDMA Band V	RMC12.2Kbps	Back	5	Reduced	4182	836.4	22.41	23.00	1.146	0.06	0.896	<b>1.026</b>
	WCDMA Band IV	RMC12.2Kbps	Front	5	Reduced	1513	1752.6	15.68	16.50	1.208	0.05	0.314	0.379
24	WCDMA Band IV	RMC12.2Kbps	Back	5	Reduced	1513	1752.6	15.68	16.50	1.208	-0.08	0.872	<b>1.053</b>
	WCDMA Band IV	RMC12.2Kbps	Back	5	Reduced	1312	1712.4	15.66	16.50	1.213	0.17	0.784	0.951
	WCDMA Band IV	RMC12.2Kbps	Back	5	Reduced	1413	1732.6	15.66	16.50	1.213	0.02	0.824	1.000
	WCDMA Band II	RMC12.2Kbps	Front	5	Reduced	9538	1907.6	17.14	17.50	1.086	-0.16	0.290	0.315
	WCDMA Band II	RMC12.2Kbps	Back	5	Reduced	9538	1907.6	17.14	17.50	1.086	0.17	0.908	0.986
25	WCDMA Band II	RMC12.2Kbps	Back	5	Reduced	9262	1852.4	17.10	17.50	1.096	0.02	0.998	<b>1.094</b>
	WCDMA Band II	RMC12.2Kbps	Back	5	Reduced	9400	1880	17.04	17.50	1.112	0.05	0.964	1.072





<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	25	Front	5	Reduced	20525	836.5	21.83	22.50	1.167	-0.01	0.638	0.744
	LTE Band 5	10M	QPSK	25	12	Front	5	Reduced	20525	836.5	21.85	22.50	1.161	0.03	0.456	0.530
26	LTE Band 5	10M	QPSK	1	25	Back	5	Reduced	20525	836.5	21.83	22.50	1.167	0.17	0.823	0.960
	LTE Band 5	10M	QPSK	25	12	Back	5	Reduced	20525	836.5	21.85	22.50	1.161	0.01	0.568	0.660
	LTE Band 5	10M	QPSK	50	0	Back	5	Reduced	20525	836.5	21.92	22.50	1.143	0.01	0.563	0.643
	LTE Band 4	20M	QPSK	1	49	Front	5	Reduced	20175	1732.5	16.28	17.00	1.180	-0.15	0.348	0.411
	LTE Band 4	20M	QPSK	50	0	Front	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.04	0.359	0.422
	LTE Band 4	20M	QPSK	1	49	Back	5	Reduced	20175	1732.5	16.28	17.00	1.180	0.18	0.938	1.107
	LTE Band 4	20M	QPSK	50	0	Back	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.19	0.937	1.101
27	LTE Band 4	20M	QPSK	100	0	Back	5	Reduced	20175	1732.5	16.30	17.00	1.175	0.07	0.951	1.117
	LTE Band 2	20M	QPSK	1	49	Front	5	Reduced	18700	1860	16.48	17.00	1.127	0.09	0.320	0.361
	LTE Band 2	20M	QPSK	50	0	Front	5	Reduced	18700	1860	16.31	17.00	1.172	-0.18	0.325	0.381
	LTE Band 2	20M	QPSK	1	49	Back	5	Reduced	18700	1860	16.48	17.00	1.127	-0.02	0.915	1.031
	LTE Band 2	20M	QPSK	1	49	Back	5	Reduced	18900	1880	16.30	17.00	1.175	-0.13	0.848	0.996
	LTE Band 2	20M	QPSK	1	49	Back	5	Reduced	19100	1900	16.19	17.00	1.205	-0.09	0.799	0.963
28	LTE Band 2	20M	QPSK	50	0	Back	5	Reduced	18700	1860	16.31	17.00	1.172	-0.17	0.909	1.066
	LTE Band 2	20M	QPSK	50	0	Back	5	Reduced	18900	1880	16.29	17.00	1.178	0.16	0.846	0.996
	LTE Band 2	20M	QPSK	50	0	Back	5	Reduced	19100	1900	16.28	17.00	1.180	0.07	0.789	0.931
	LTE Band 2	20M	QPSK	100	0	Back	5	Reduced	18700	1860	16.35	17.00	1.161	0.07	0.901	1.046

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	49	Front	5	Reduced	21350	2560	20.21	20.50	1.069	0.02	0.826	0.883
	LTE Band 7	20M	QPSK	1	49	Front	5	Reduced	20850	2510	20.06	20.50	1.107	-0.09	0.781	0.864
	LTE Band 7	20M	QPSK	1	49	Front	5	Reduced	21100	2535	20.15	20.50	1.084	0.04	0.777	0.842
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	21350	2560	20.22	20.50	1.067	0.06	0.821	0.876
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	20850	2510	20.19	20.50	1.074	0.04	0.786	0.844
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	21100	2535	20.17	20.50	1.079	0.18	0.804	0.867
	LTE Band 7	20M	QPSK	100	0	Front	5	Reduced	21350	2560	20.22	20.50	1.067	0.03	0.833	0.888
29	LTE Band 7	20M	QPSK	1	49	Back	5	Reduced	21350	2560	20.21	20.50	1.069	0.06	1.120	1.197
	LTE Band 7	20M	QPSK	1	49	Back	5	Reduced	20850	2510	20.06	20.50	1.107	0.05	1.080	1.195
	LTE Band 7	20M	QPSK	1	49	Back	5	Reduced	21100	2535	20.15	20.50	1.084	-0.01	1.100	1.192
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	21350	2560	20.22	20.50	1.067	0.1	1.120	1.195
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	20850	2510	20.19	20.50	1.074	0.12	1.110	1.192
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	21100	2535	20.17	20.50	1.079	0.14	1.090	1.176
	LTE Band 7	20M	QPSK	100	0	Back	5	Reduced	21350	2560	20.22	20.50	1.067	0.08	1.120	1.195

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	Full	11	2462	18.84	19.50	1.164	97.91	1.021	0.567	0.05	0.493	0.586
30	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	11	2462	18.84	19.50	1.164	97.91	1.021	0.906	0.02	0.669	0.795



**15.4 Product specific 10g SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Full	661	1880	25.06	25.50	1.107	0.05	2.420	2.678
31	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Full	512	1850.2	24.52	25.50	1.253	0.13	2.360	<b>2.957</b>
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Full	810	1909.8	24.55	25.50	1.245	0.15	2.270	2.825

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
32	WCDMA Band IV	RMC12.2Kbps	Bottom Side	0	Reduced	1513	1752.6	22.29	23.00	1.178	0.06	3.080	<b>3.627</b>
	WCDMA Band IV	RMC12.2Kbps	Bottom Side	0	Reduced	1312	1712.4	22.26	23.00	1.186	-0.06	2.850	3.379
	WCDMA Band IV	RMC12.2Kbps	Bottom Side	0	Reduced	1413	1732.6	22.24	23.00	1.191	-0.03	2.990	3.562
	WCDMA Band II	RMC12.2Kbps	Bottom Side	0	Reduced	9538	1907.6	22.52	23.00	1.117	0.18	2.960	3.306
33	WCDMA Band II	RMC12.2Kbps	Bottom Side	0	Reduced	9262	1852.4	22.48	23.00	1.127	0.06	3.270	<b>3.686</b>
	WCDMA Band II	RMC12.2Kbps	Bottom Side	0	Reduced	9400	1880	22.38	23.00	1.153	0.08	3.180	3.668





<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
34	LTE Band 4	20M	QPSK	1	49	Bottom Side	0	Reduced	20175	1732.5	22.11	23.00	1.227	0.05	2.870	<b>3.523</b>
	LTE Band 4	20M	QPSK	50	0	Bottom Side	0	Reduced	20175	1732.5	22.21	23.00	1.199	0.15	2.160	2.591
	LTE Band 4	20M	QPSK	100	0	Bottom Side	0	Reduced	20175	1732.5	22.22	23.00	1.197	0.08	2.240	2.681
35	LTE Band 2	20M	QPSK	1	49	Bottom Side	0	Reduced	18700	1860	22.28	23.00	1.180	0.08	2.860	<b>3.376</b>
	LTE Band 2	20M	QPSK	1	49	Bottom Side	0	Reduced	18900	1880	22.12	23.00	1.225	0.15	2.730	3.343
	LTE Band 2	20M	QPSK	1	49	Bottom Side	0	Reduced	19100	1900	22.04	23.00	1.247	0.11	2.570	3.206
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Reduced	18700	1860	22.22	23.00	1.197	0.06	2.260	2.705
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Reduced	18900	1880	22.05	23.00	1.245	0.04	2.080	2.589
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Reduced	19100	1900	22.16	23.00	1.213	0.18	1.950	2.366
	LTE Band 2	20M	QPSK	100	0	Bottom Side	0	Reduced	18700	1860	22.16	23.00	1.213	0.05	2.180	2.645
36	LTE Band 7	20M	QPSK	1	49	Bottom Side	0	Full	21350	2560	23.72	24.00	1.067	0.13	3.530	<b>3.765</b>
	LTE Band 7	20M	QPSK	1	49	Bottom Side	0	Full	20850	2510	23.60	24.00	1.096	0.12	3.080	3.377
	LTE Band 7	20M	QPSK	1	49	Bottom Side	0	Full	21100	2535	23.55	24.00	1.109	0.05	3.370	3.738
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0	Full	21350	2560	22.83	23.00	1.040	-0.08	2.810	2.922
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0	Full	20850	2510	22.52	23.00	1.117	0.05	2.450	2.736
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0	Full	21100	2535	22.67	23.00	1.079	0.08	2.630	2.838
	LTE Band 7	20M	QPSK	100	0	Bottom Side	0	Full	21350	2560	22.75	23.00	1.059	0.14	2.580	2.733



**15.5 Repeated SAR Measurement**

**<1g SAR>**

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Left Cheek	-	Reduced	11	2462	16.97	17.50	1.130	97.91	1.021	0.04	0.835	1	0.963
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Left Cheek	-	Reduced	11	2462	16.97	17.50	1.130	97.91	1.021	0.04	0.828	1.008	0.955
1st	WCDMA Band V	-	-	-	-	RMC 12.2Kbps	Back	5	Reduced	4182	836.4	22.41	23.00	1.146	-	-	0.06	0.896	1	1.026
2nd	WCDMA Band V	-	-	-	-	RMC 12.2Kbps	Back	5	Reduced	4182	836.4	22.41	23.00	1.146	-	-	0.06	0.891	1.006	1.021
1st	WCDMA Band II	-	-	-	-	RMC 12.2Kbps	Back	5	Reduced	9262	1852.4	17.10	17.50	1.096	-	-	0.02	0.998	1	1.094
2nd	WCDMA Band II	-	-	-	-	RMC 12.2Kbps	Back	5	Reduced	9262	1852.4	17.10	17.50	1.096	-	-	0.02	0.996	1.032	1.092
1st	LTE Band 4	20M	QPSK	100	0	-	Back	5	Reduced	20175	1732.5	16.30	17.00	1.175	-	-	0.07	0.951	1	1.117
2nd	LTE Band 4	20M	QPSK	100	0	-	Back	5	Reduced	20175	1732.5	16.30	17.00	1.175	-	-	0.07	0.948	1.003	1.114
1st	LTE Band 7	20M	QPSK	1	49	-	Back	5	Reduced	21350	2560	20.21	20.50	1.069	-	-	0.06	1.120	1	1.197
2nd	LTE Band 7	20M	QPSK	1	49	-	Back	5	Reduced	21350	2560	20.21	20.50	1.069	-	-	0.01	1.090	1.027	1.165

**<10g SAR>**

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA Band IV	RMC12.2Kbps	-	-	-	-	Bottom Side	0	Reduced	1513	1752.6	22.29	23.00	1.178	0.03	3.080	1	3.627
2nd	WCDMA Band IV	RMC12.2Kbps	-	-	-	-	Bottom Side	0	Reduced	1513	1752.6	22.29	23.00	1.178	0.03	3.050	1.010	3.592
1st	WCDMA Band II	RMC12.2Kbps	-	-	-	-	Bottom Side	0	Reduced	9262	1852.4	22.48	23.00	1.127	0.15	3.270	1	3.686
2nd	WCDMA Band II	RMC12.2Kbps	-	-	-	-	Bottom Side	0	Reduced	9262	1852.4	22.48	23.00	1.127	0.15	3.180	1.028	3.584
1st	LTE Band 7	-	20M	QPSK	1	49	Bottom Side	0	Full	21350	2560	23.72	24.00	1.067	0.05	3.530	1	3.765
2nd	LTE Band 7	-	20M	QPSK	1	49	Bottom Side	0	Full	21350	2560	23.72	24.00	1.067	0.05	3.480	1.014	3.712

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**16. Simultaneous Transmission Analysis**

No.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	WLAN Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	WLAN Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	WLAN Hotspot
5.	GSM Voice + Bluetooth		Yes		
6.	GPRS/EDGE + Bluetooth		Yes	Yes	BT Tethering
7.	WCDMA + Bluetooth		Yes	Yes	BT Tethering
8.	LTE + Bluetooth		Yes	Yes	BT Tethering

**General Note:**

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP).
2. EUT will choose each GSM, WCDMA, and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
4. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
5. The reported SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
7. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Hotspot & Body worn
	Test separation	5 mm
9.0 dBm	Estimated 1g SAR (W/kg)	0.336 W/kg



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	
GSM	GSM850	Right Cheek	0.315	0.401	0.72
		Right Tilted	0.200	0.456	0.66
		Left Cheek	0.344	0.963	1.31
		Left Tilted	0.205	0.837	1.04
	GSM1900	Right Cheek	0.240	0.401	0.64
		Right Tilted	0.125	0.456	0.58
		Left Cheek	0.163	0.963	1.13
		Left Tilted	0.155	0.837	0.99
WCDMA	Band V	Right Cheek	0.487	0.401	0.89
		Right Tilted	0.316	0.456	0.77
		Left Cheek	0.486	0.963	1.45
		Left Tilted	0.295	0.837	1.13
	Band IV	Right Cheek	0.293	0.401	0.69
		Right Tilted	0.116	0.456	0.57
		Left Cheek	0.173	0.963	1.14
		Left Tilted	0.120	0.837	0.96
	Band II	Right Cheek	0.495	0.401	0.90
		Right Tilted	0.227	0.456	0.68
		Left Cheek	0.350	0.963	1.31
		Left Tilted	0.321	0.837	1.16
LTE	Band 5	Right Cheek	0.533	0.401	0.93
		Right Tilted	0.331	0.456	0.79
		Left Cheek	0.514	0.963	1.48
		Left Tilted	0.311	0.837	1.15
	Band 4	Right Cheek	0.226	0.401	0.63
		Right Tilted	0.074	0.456	0.53
		Left Cheek	0.100	0.963	1.06
		Left Tilted	0.078	0.837	0.92
	Band 2	Right Cheek	0.500	0.401	0.90
		Right Tilted	0.212	0.456	0.67
		Left Cheek	0.290	0.963	1.25
		Left Tilted	0.289	0.837	1.13
	Band 7	Right Cheek	0.401	0.401	0.80
		Right Tilted	0.188	0.456	0.64
		Left Cheek	0.206	0.963	1.17
		Left Tilted	0.158	0.837	1.00



**16.2 Hotspot Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	1+2			1+3 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No		
		1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
GSM	GSM850	Front	0.550	0.586	0.336	1.14			0.89
		Back	0.987	0.795	0.336	1.78	0.02	#01	1.32
		Left Side	0.413		0.336	0.41			0.75
		Right Side	0.377	0.795	0.336	1.17			0.71
		Top Side		0.785	0.336	0.79			0.34
	Bottom Side	0.183		0.336	0.18			0.52	
	GSM1900	Front	0.303	0.586	0.336	0.89			0.64
		Back	1.041	0.795	0.336	1.84	0.02	#02	1.38
		Left Side	0.026		0.336	0.03			0.36
		Right Side	0.068	0.795	0.336	0.86			0.40
Top Side			0.785	0.336	0.79			0.34	
Bottom Side	0.651		0.336	0.65			0.99		
WCDMA	Band V	Front	0.851	0.586	0.336	1.44			1.19
		Back	1.026	0.795	0.336	1.82	0.02	#03	1.36
		Left Side	0.611		0.336	0.61			0.95
		Right Side	0.538	0.795	0.336	1.33			0.87
		Top Side		0.785	0.336	0.79			0.34
	Bottom Side	0.310		0.336	0.31			0.65	
	Band IV	Front	0.379	0.586	0.336	0.97			0.72
		Back	1.053	0.795	0.336	1.85	0.02	#04	1.39
		Left Side	0.022		0.336	0.02			0.36
		Right Side	0.062	0.795	0.336	0.86			0.40
		Top Side		0.785	0.336	0.79			0.34
	Bottom Side	0.752		0.336	0.75			1.09	
	Band II	Front	0.315	0.586	0.336	0.90			0.65
		Back	1.094	0.795	0.336	1.89	0.02	#05	1.43
		Left Side	0.053		0.336	0.05			0.39
Right Side		0.067	0.795	0.336	0.86			0.40	
Top Side			0.785	0.336	0.79			0.34	
Bottom Side	0.654		0.336	0.65			0.99		



WWAN Band		Exposure Position	1	2	3	1+2			1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No	
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)				
LTE	Band 5	Front	0.744	0.586	0.336	1.33			1.08
		Back	0.960	0.795	0.336	1.76	0.02	#06	1.30
		Left Side	0.557		0.336	0.56			0.89
		Right Side	0.580	0.795	0.336	1.38			0.92
		Top Side		0.785	0.336	0.79			0.34
		Bottom Side	0.253		0.336	0.25			0.59
	Band 4	Front	0.422	0.586	0.336	1.01			0.76
		Back	1.117	0.795	0.336	1.91	0.02	#07	1.45
		Left Side	0.022		0.336	0.02			0.36
		Right Side	0.058	0.795	0.336	0.85			0.39
		Top Side		0.785	0.336	0.79			0.34
		Bottom Side	0.814		0.336	0.81			1.15
	Band 2	Front	0.381	0.586	0.336	0.97			0.72
		Back	1.066	0.795	0.336	1.86	0.02	#08	1.40
		Left Side	0.045		0.336	0.05			0.38
		Right Side	0.072	0.795	0.336	0.87			0.41
		Top Side		0.785	0.336	0.79			0.34
		Bottom Side	0.748		0.336	0.75			1.08
	Band 7	Front	0.888	0.586	0.336	1.47			1.22
		Back	1.197	0.795	0.336	1.99	0.02	#09	1.53
		Left Side	0.127		0.336	0.13			0.46
		Right Side	0.438	0.795	0.336	1.23			0.77
		Top Side		0.785	0.336	0.79			0.34
		Bottom Side	1.101		0.336	1.10			1.44



**16.3 Body-Worn Accessory Exposure Conditions**


WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)				
GSM	GSM850	Front	0.550	0.586	0.336	1.14	0.89		
		Back	0.987	0.795	0.336	<b>1.78</b>	1.32	<b>0.02</b>	<b>#01</b>
	GSM1900	Front	0.303	0.586	0.336	0.89	0.64		
		Back	1.041	0.795	0.336	<b>1.84</b>	1.38	<b>0.02</b>	<b>#02</b>
WCDMA	Band V	Front	0.851	0.586	0.336	1.44	1.19		
		Back	1.026	0.795	0.336	<b>1.82</b>	1.36	<b>0.02</b>	<b>#03</b>
	Band IV	Front	0.379	0.586	0.336	0.97	0.72		
		Back	1.053	0.795	0.336	<b>1.85</b>	1.39	<b>0.02</b>	<b>#04</b>
	Band II	Front	0.315	0.586	0.336	0.90	0.65		
		Back	1.094	0.795	0.336	<b>1.89</b>	1.43	<b>0.02</b>	<b>#05</b>
LTE	Band 5	Front	0.744	0.586	0.336	1.33	1.08		
		Back	0.960	0.795	0.336	<b>1.76</b>	1.30	<b>0.02</b>	<b>#06</b>
	Band 4	Front	0.422	0.586	0.336	1.01	0.76		
		Back	1.117	0.795	0.336	<b>1.91</b>	1.45	<b>0.02</b>	<b>#07</b>
	Band 2	Front	0.381	0.586	0.336	0.97	0.72		
		Back	1.066	0.795	0.336	<b>1.86</b>	1.40	<b>0.02</b>	<b>#08</b>
	Band 7	Front	0.888	0.586	0.336	1.47	1.22		
		Back	1.197	0.795	0.336	<b>1.99</b>	1.53	<b>0.03</b>	<b>#09</b>

**16.4 SPLSR Evaluation and Analysis**


**General Note:**

- When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.

Case #01	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	0.987	5	7.49	0.45	0.54	129.1	1.78	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

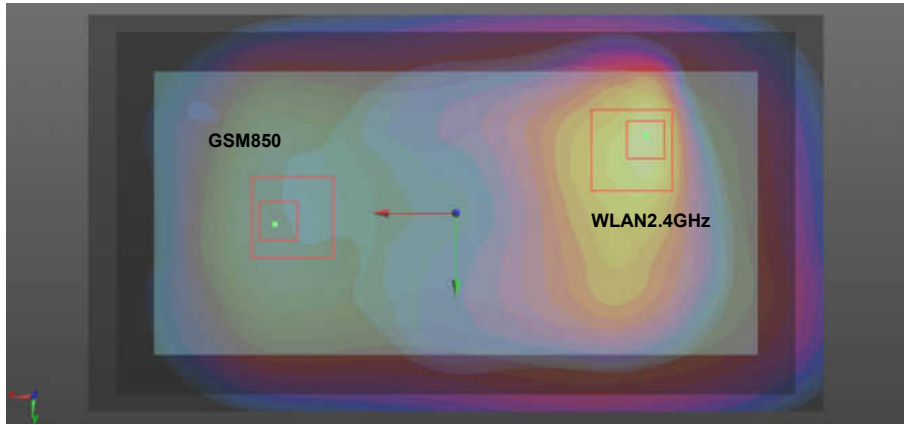


Case #02	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.041	5	8.25	-1.39	0.41	134.2	1.84	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

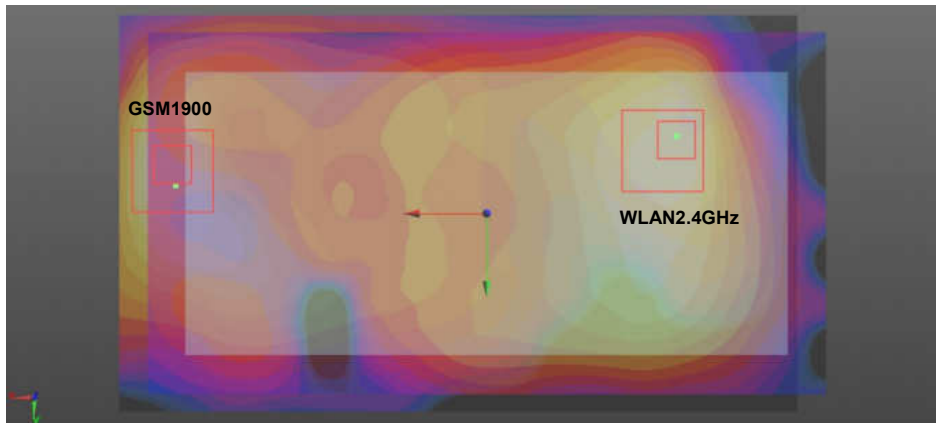





Case #03	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WCDMA V	Back	1.026	5	5.12	-0.02	0.41	105.0	1.82	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

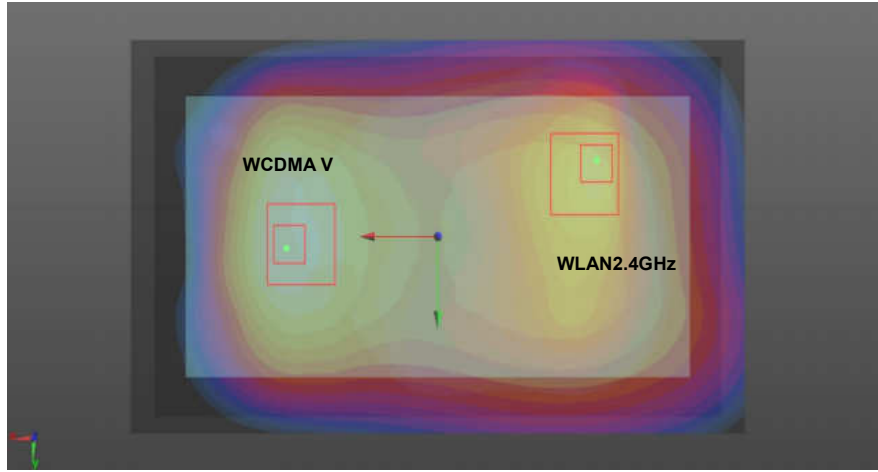


Case #04	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WCDMA IV	Back	1.053	5	8.55	-1.34	0.41	137.2	1.85	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

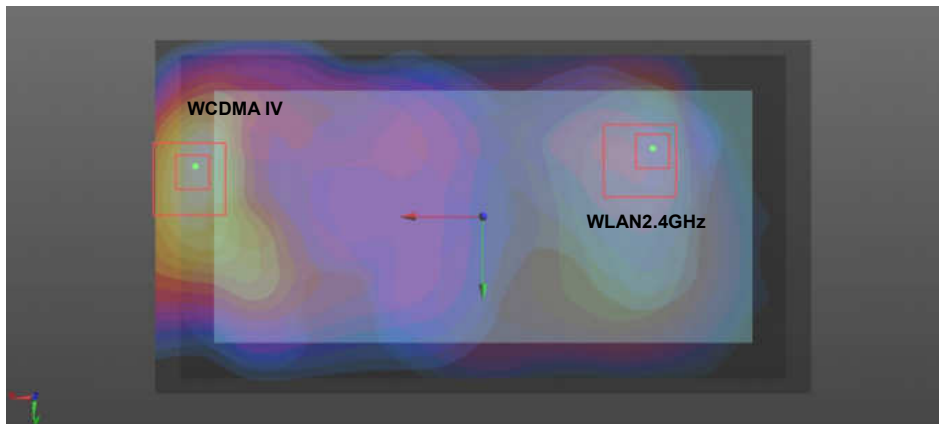


Case #05	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.094	5	6.13	-0.14	0.42	114.6	1.89	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

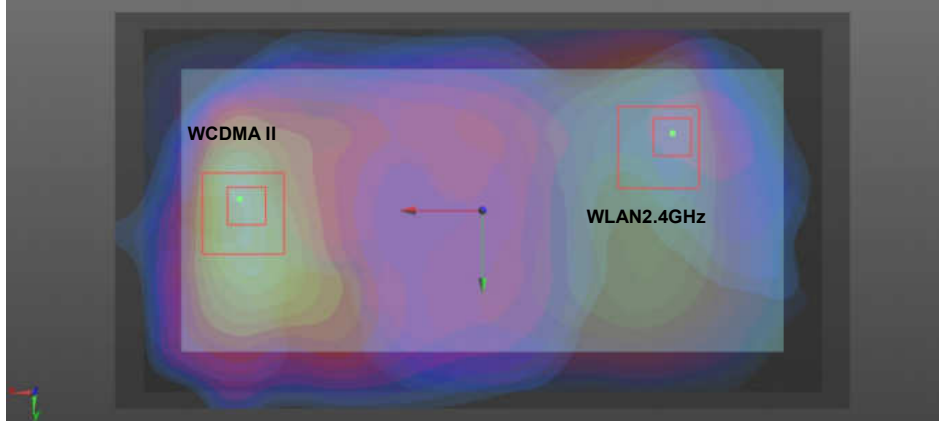


Case #06	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE band5	Back	0.960	5	5.73	-0.01	0.41	111.0	1.76	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

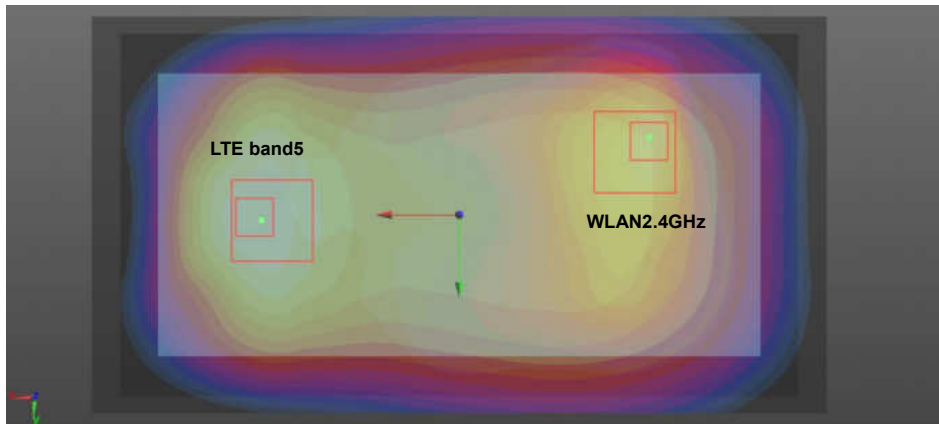


Case #07	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE band4	Back	1.117	5	6.13	0.16	0.42	115.2	1.91	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

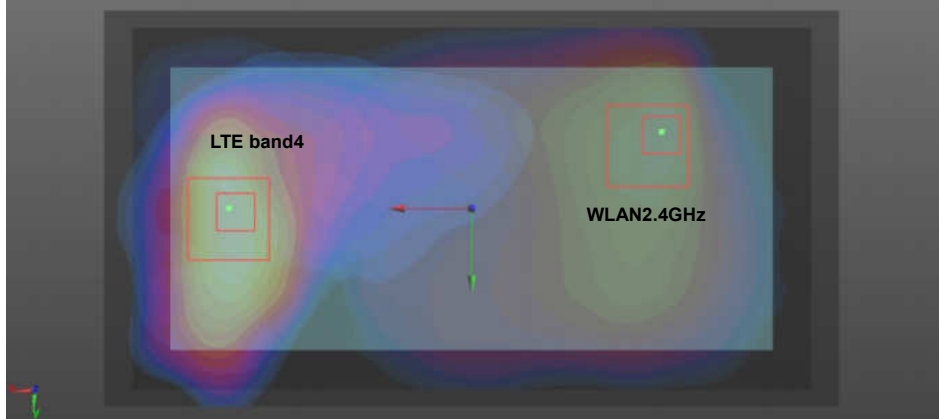

Case #08	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE band2	Back	1.066	5	6.29	-0.13	0.42	116.2	1.86	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

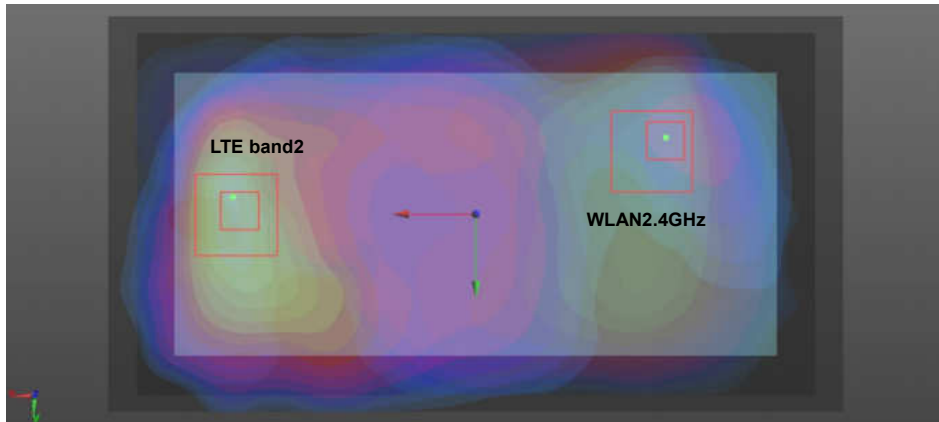

Case #09	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #09	LTE band7 Cube 0	Back	1.197	5	6.8	1.52	0.4	125.2	1.99	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				
	LTE band7 Cube 1		0.757	5	5	-2.08	0.38	101.4	1.55	0.02	Not required
	WLAN2.4GHz		0.795	5	-5.14	-2.24	0.37				

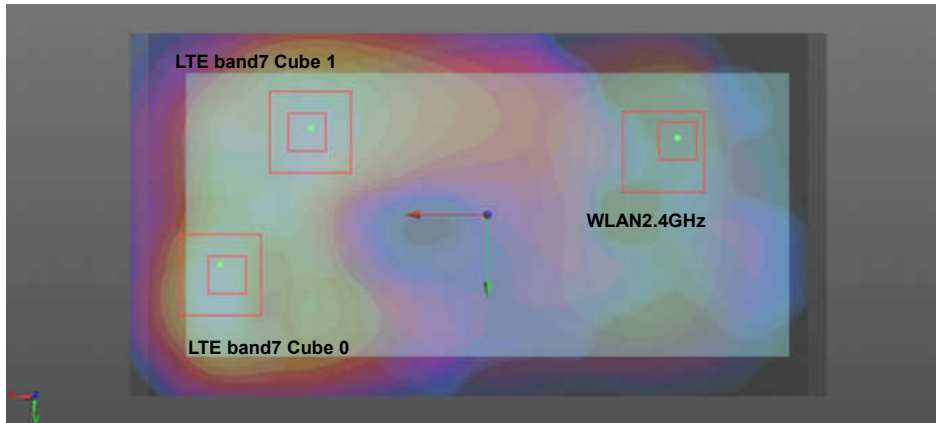

**Test Engineer :** Nick Hu



## **17. Uncertainty Assessment**

Pre KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



---

**Appendix A. Plots of System Performance Check**

The plots are shown as follows.

### System Check\_Head\_835MHz

**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.907 \text{ S/m}$ ;  $\epsilon_r = 42.549$ ;  $\rho = 1000 \text{ kg/m}^3$



Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.73, 9.73, 9.73); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $3.09 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $54.11 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
Peak SAR (extrapolated) =  $3.60 \text{ W/kg}$   
**SAR(1 g) =  $2.44 \text{ W/kg}$ ; SAR(10 g) =  $1.6 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $3.08 \text{ W/kg}$

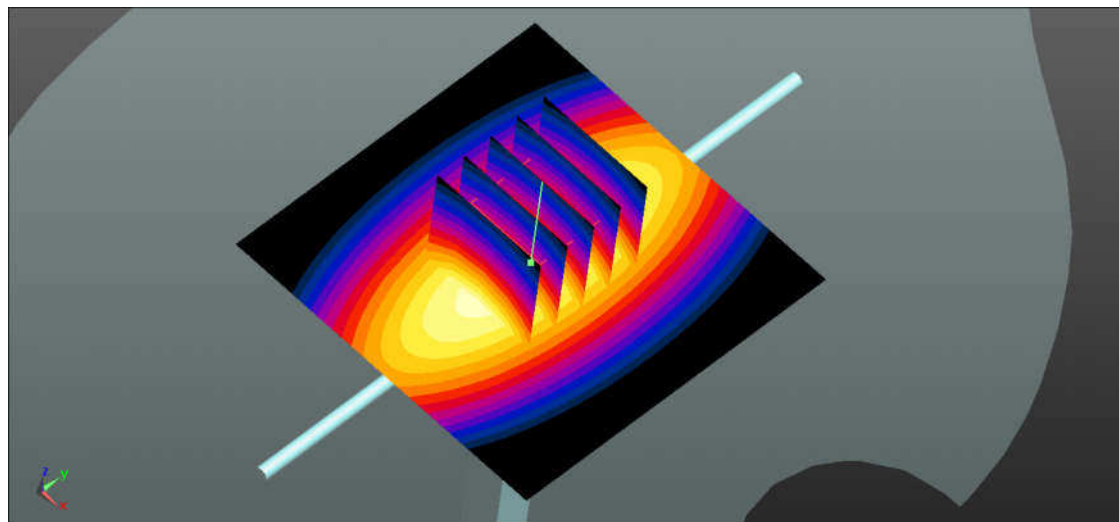

0 dB =  $3.08 \text{ W/kg}$  =  $4.89 \text{ dBW/kg}$



### System Check\_Head\_1750MHz

**DUT: D1750V2 - SN:1137**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.364$  S/m;  $\epsilon_r = 41.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.47, 8.47, 8.47); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.1 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.57 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 9.15 W/kg; SAR(10 g) = 4.74 W/kg**

Maximum value of SAR (measured) = 13.3 W/kg

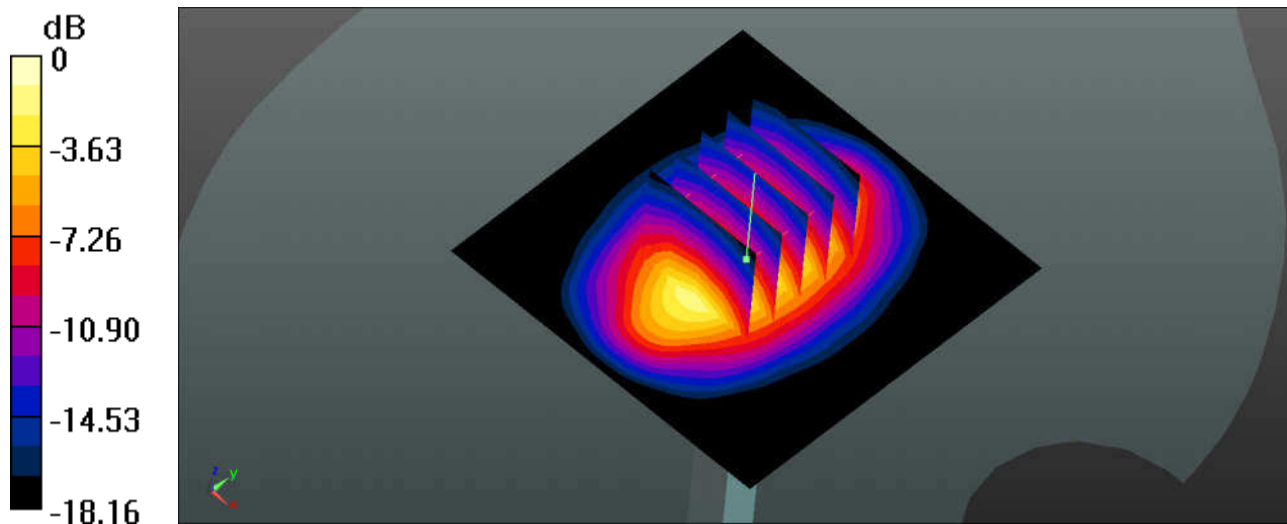

0 dB = 13.3 W/kg = 11.24 dBW/kg

### System Check\_Head\_1900MHz

**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 39.831$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.6 W/kg



**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.3 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.29 W/kg**

Maximum value of SAR (measured) = 14.5 W/kg

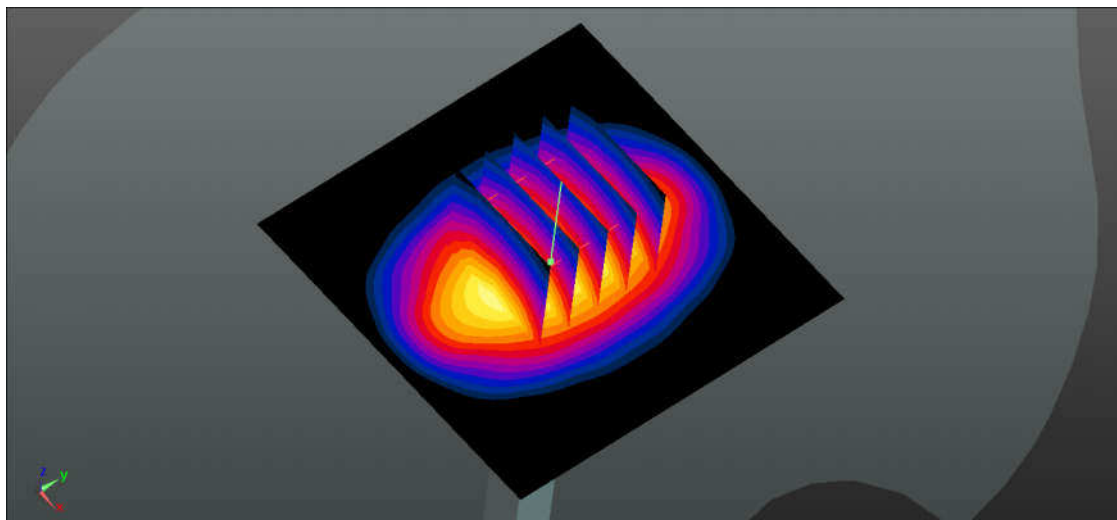

0 dB = 14.5 W/kg = 11.61 dBW/kg

### System Check\_Head\_2450MHz

**DUT: D2450V2 - SN:924**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.854$  S/m;  $\epsilon_r = 38.045$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.71, 7.71, 7.71); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.3 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.39 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 28.4 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.01 W/kg**

Maximum value of SAR (measured) = 20.7 W/kg

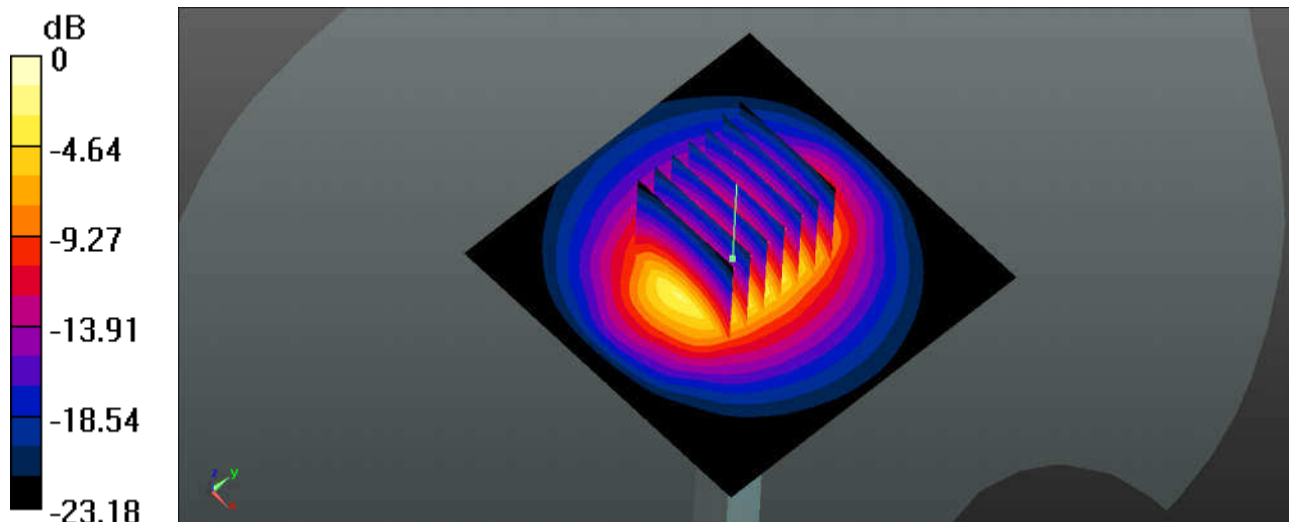

0 dB = 20.7 W/kg = 13.16 dBW/kg

### System Check\_Head\_2600MHz

**DUT: D2450V2 - SN:1112**


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.015$  S/m;  $\epsilon_r = 37.501$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.62, 7.62, 7.62); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 22.2 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 87.71 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 29.1 W/kg  
**SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.3 W/kg**  
Maximum value of SAR (measured) = 21.5 W/kg

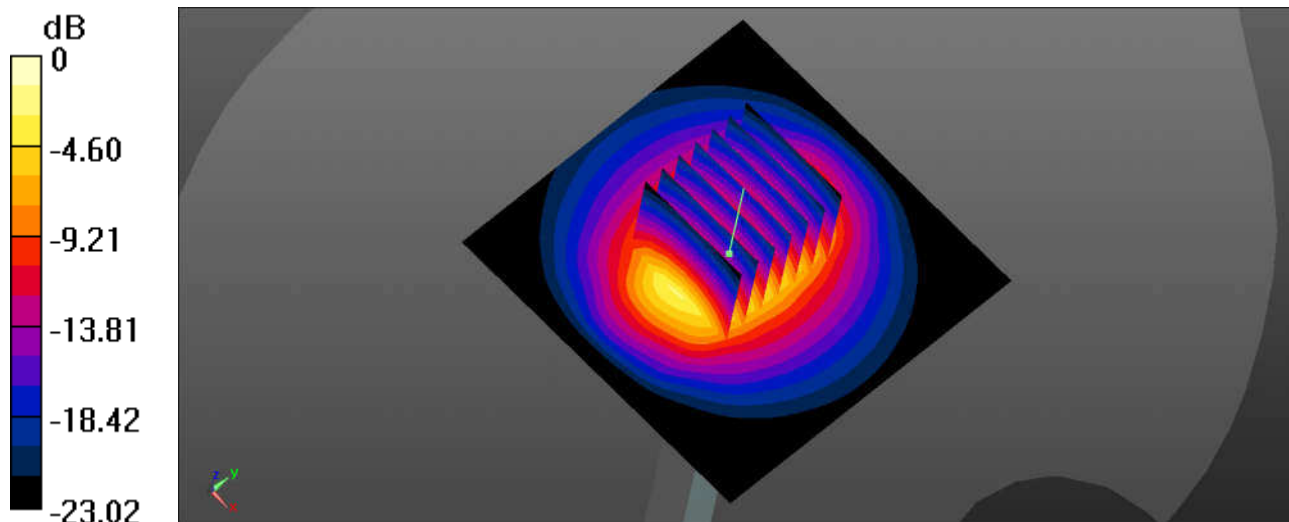

0 dB = 21.5 W/kg = 13.32 dBW/kg

**System Check\_Body\_835MHz**

**DUT: D835V2 - SN:4d151**



Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: MSL\_850 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.978 \text{ S/m}$ ;  $\epsilon_r = 54.824$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(9.72, 9.72, 9.72); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $7.38 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $80.49 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $8.59 \text{ W/kg}$   
**SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.53 W/kg**  
 Maximum value of SAR (measured) =  $7.38 \text{ W/kg}$

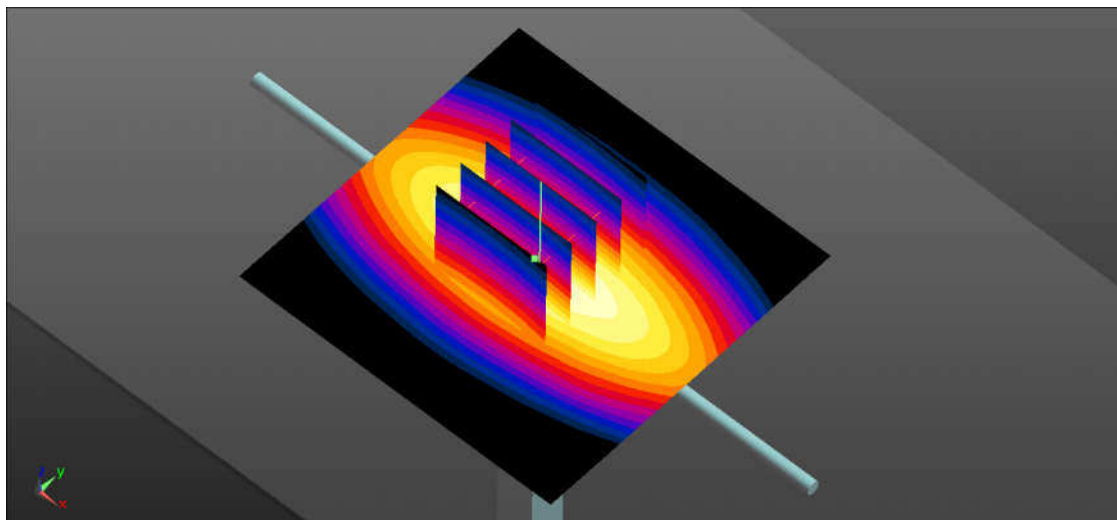

0 dB =  $7.38 \text{ W/kg} = 8.68 \text{ dBW/kg}$

### System Check\_Body\_1750MHz

**DUT: D1750V2 - SN:1137**


Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.453$  S/m;  $\epsilon_r = 54.561$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 13.1 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 82.92 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 16.2 W/kg  
**SAR(1 g) = 9.2 W/kg; SAR(10 g) = 4.93 W/kg**  
Maximum value of SAR (measured) = 13.0 W/kg

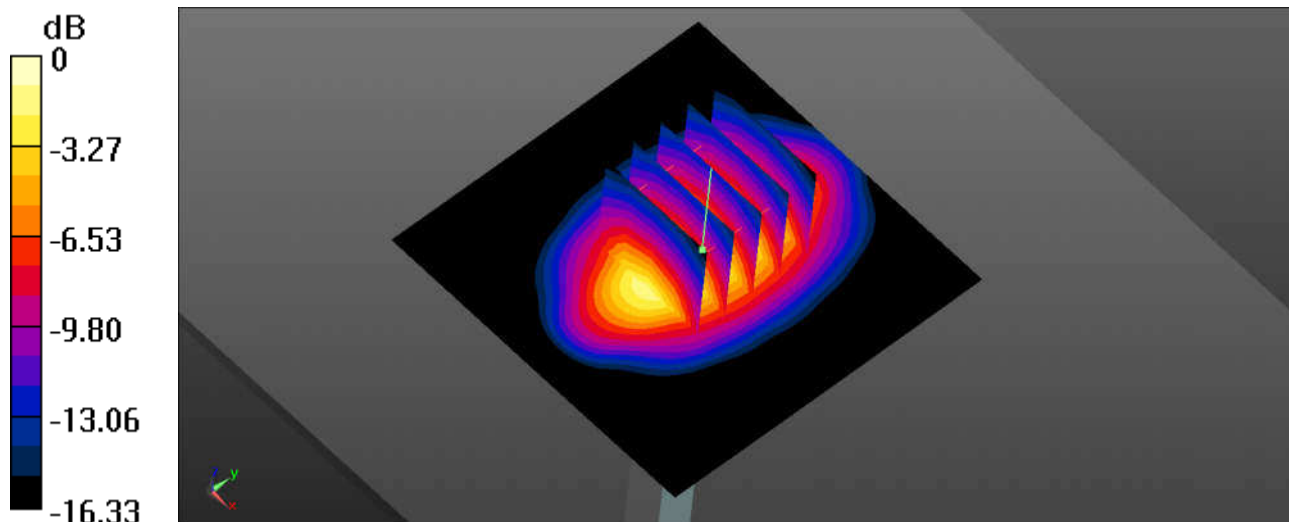

0 dB = 13.0 W/kg = 11.14 dBW/kg

### System Check\_Body\_1900MHz

**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.963$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.08, 8.08, 8.08); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.4 W/kg



**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.33 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 9.88 W/kg; SAR(10 g) = 5.13 W/kg**

Maximum value of SAR (measured) = 14.2 W/kg

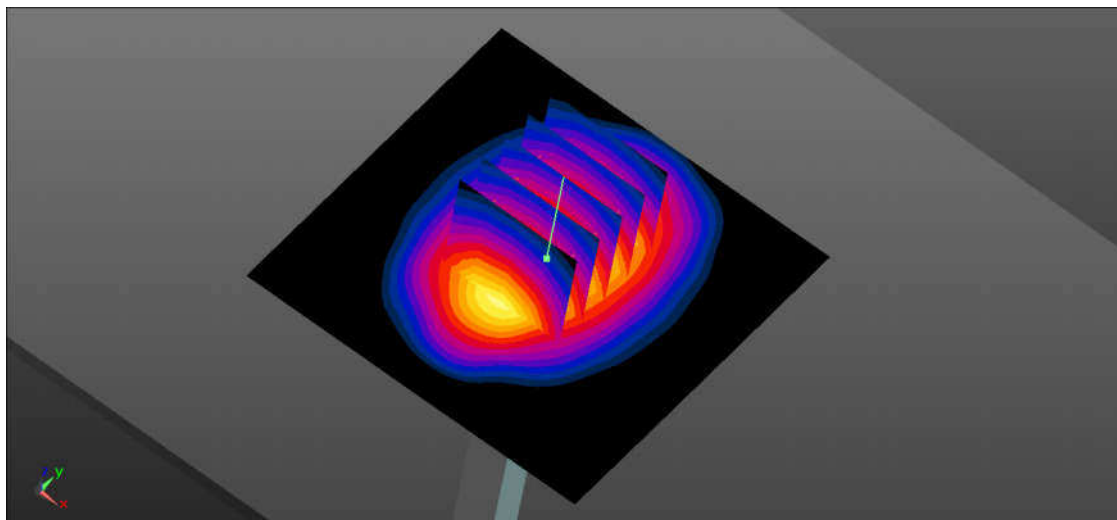

0 dB = 14.2 W/kg = 11.52 dBW/kg

### System Check\_Body\_2450MHz

**DUT: D2450V2 - SN:924**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.988$  S/m;  $\epsilon_r = 51.946$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.7, 7.7, 7.7); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.6 W/kg



**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.09 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 26.0 W/kg

**SAR(1 g) = 13 W/kg; SAR(10 g) = 6.13 W/kg**

Maximum value of SAR (measured) = 19.5 W/kg

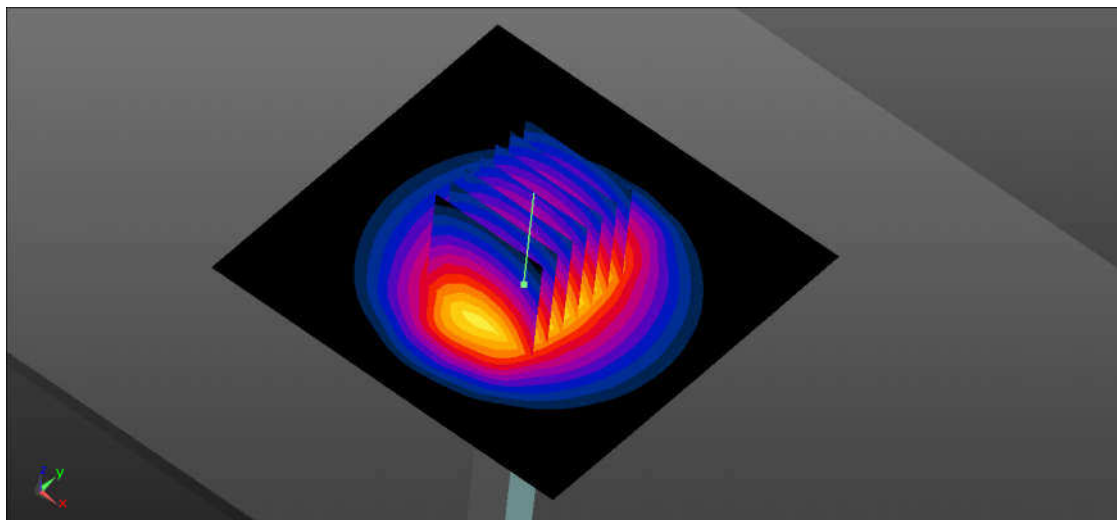

0 dB = 19.5 W/kg = 12.90 dBW/kg



### System Check\_Body\_2600MHz

**DUT: D2450V2 - SN:1112**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.228$  S/m;  $\epsilon_r = 51.634$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.59, 7.59, 7.59); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.4 W/kg



**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.48 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.0 W/kg

**SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.48 W/kg**

Maximum value of SAR (measured) = 22.0 W/kg

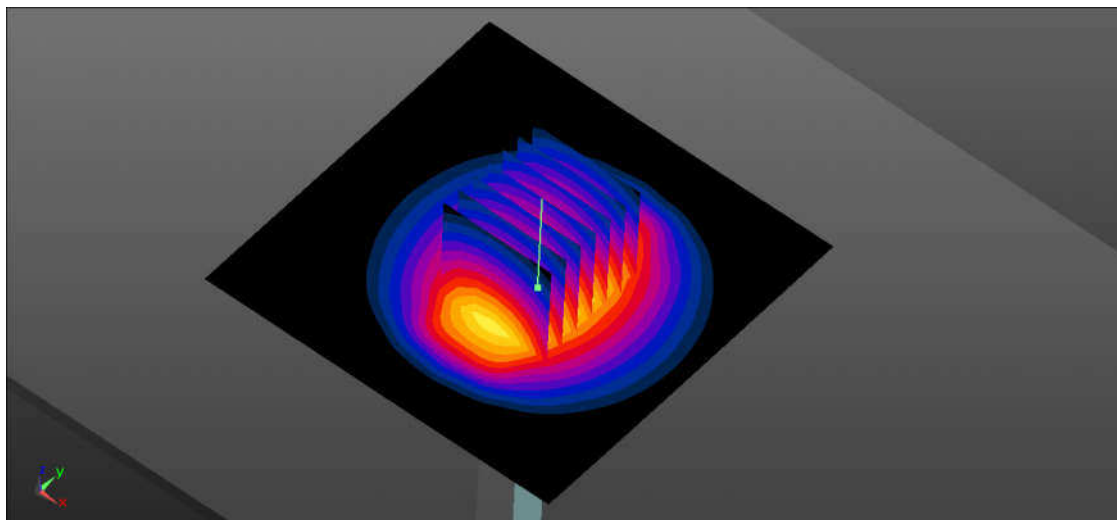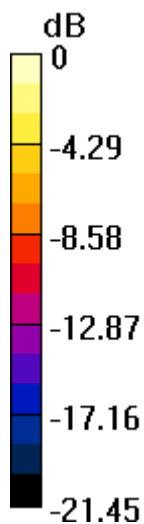

0 dB = 22.0 W/kg = 13.42 dBW/kg



---

**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

### 01\_GSM850\_GPRS 2 Tx slots\_Left Cheek\_0mm\_Ch189

Communication System: UID 0, GPRS/EDGE (2 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:4.15

Medium: HSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.908$  S/m;  $\epsilon_r = 42.531$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.73, 9.73, 9.73); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch189/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.354 W/kg


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.802 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.367 W/kg

**SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.234 W/kg**

Maximum value of SAR (measured) = 0.341 W/kg

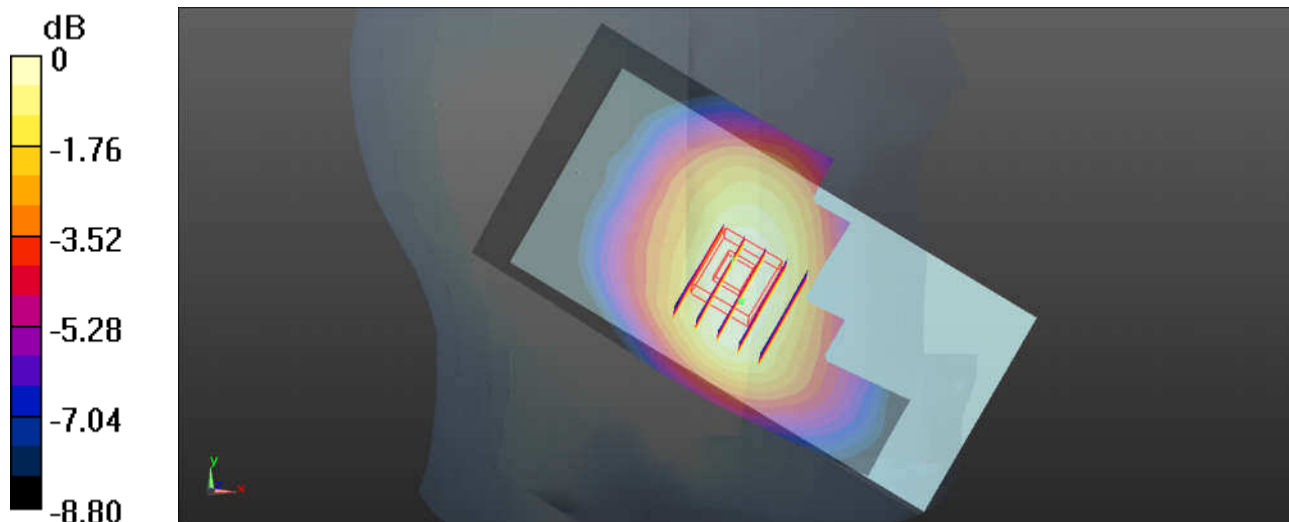

0 dB = 0.341 W/kg = -4.67 dBW/kg

### 02\_GSM1900\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch661

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.407$  S/m;  $\epsilon_r = 39.927$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch661/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.337 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.348 W/kg

**SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

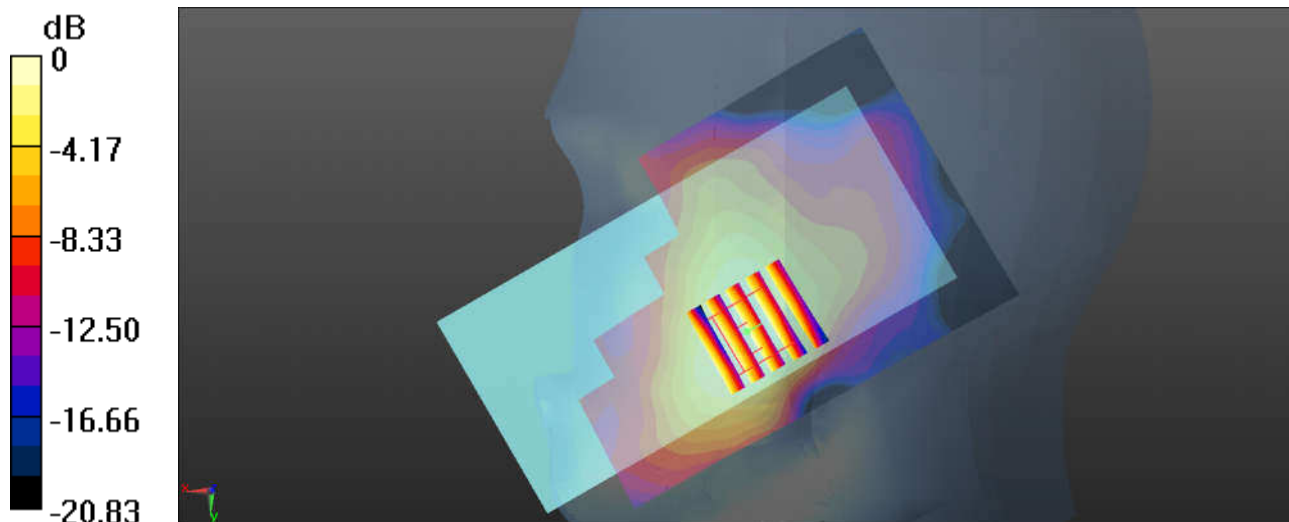

### 03\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch4233



Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_850 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 42.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.73, 9.73, 9.73); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.498 W/kg

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.454 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.536 W/kg  
**SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.333 W/kg**  
Maximum value of SAR (measured) = 0.496 W/kg

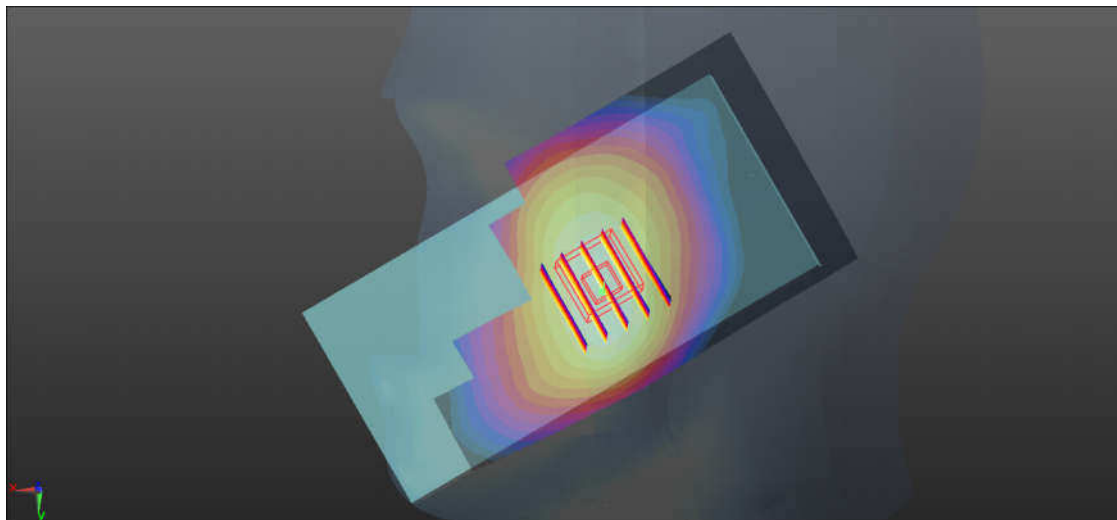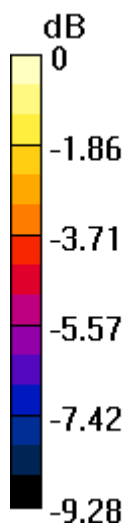

0 dB = 0.496 W/kg = -3.05 dBW/kg

### 04\_WCDMA IV\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.482$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.47, 8.47, 8.47); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1513/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.307 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.468 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.360 W/kg  
**SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.154 W/kg**  
Maximum value of SAR (measured) = 0.303 W/kg

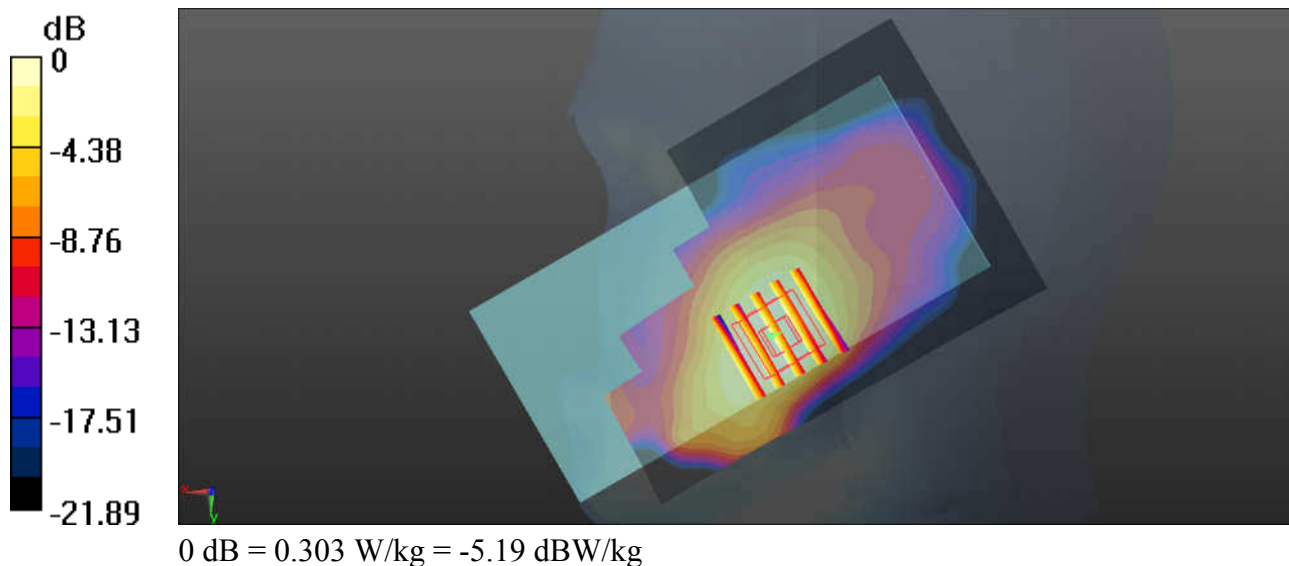

**05\_WCDMA II\_RMC12.2Kbps\_Right Cheek\_0mm\_Ch9538**


Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900 Medium parameters used:  $f = 1907.6 \text{ MHz}$ ;  $\sigma = 1.437 \text{ S/m}$ ;  $\epsilon_r = 39.799$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9538/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.618 \text{ W/kg}$

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.753 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.697 \text{ W/kg}$   
**SAR(1 g) =  $0.458 \text{ W/kg}$ ; SAR(10 g) =  $0.278 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.568 \text{ W/kg}$

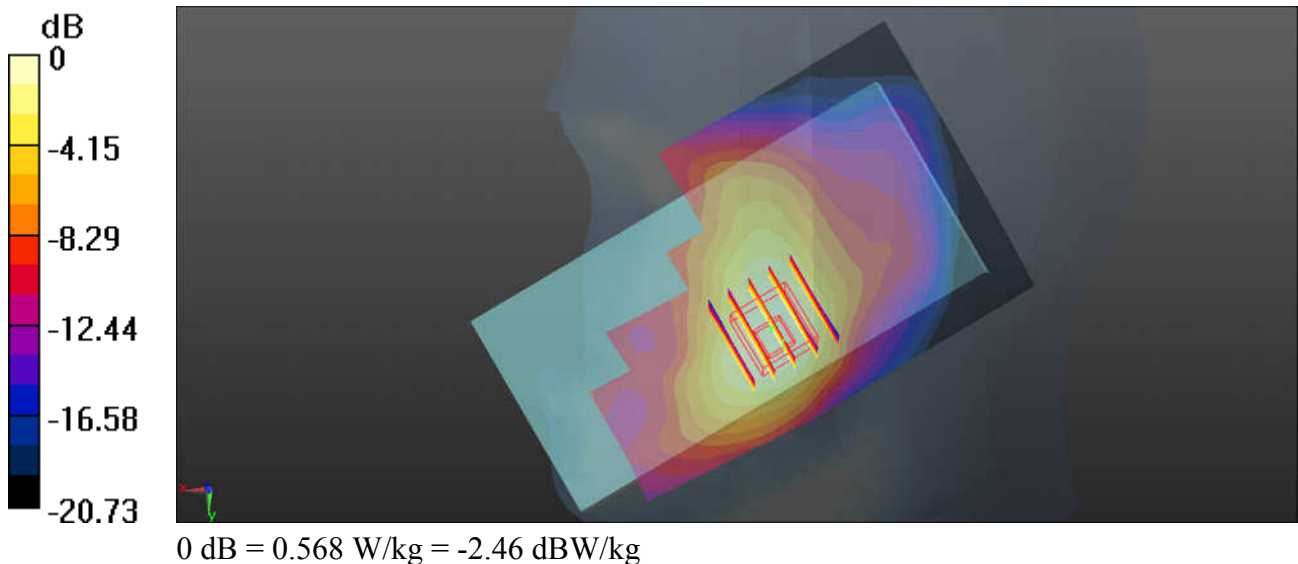

**06\_LTE Band 5\_10M\_QPSK\_1RB\_25Offset\_Right Cheek\_0mm\_Ch20525**

Communication System: UID 0, FDD\_LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
Medium: HSL\_850 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.908$  S/m;  $\epsilon_r = 42.53$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.73, 9.73, 9.73); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.463 W/kg



**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.496 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.506 W/kg

**SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.316 W/kg**

Maximum value of SAR (measured) = 0.465 W/kg

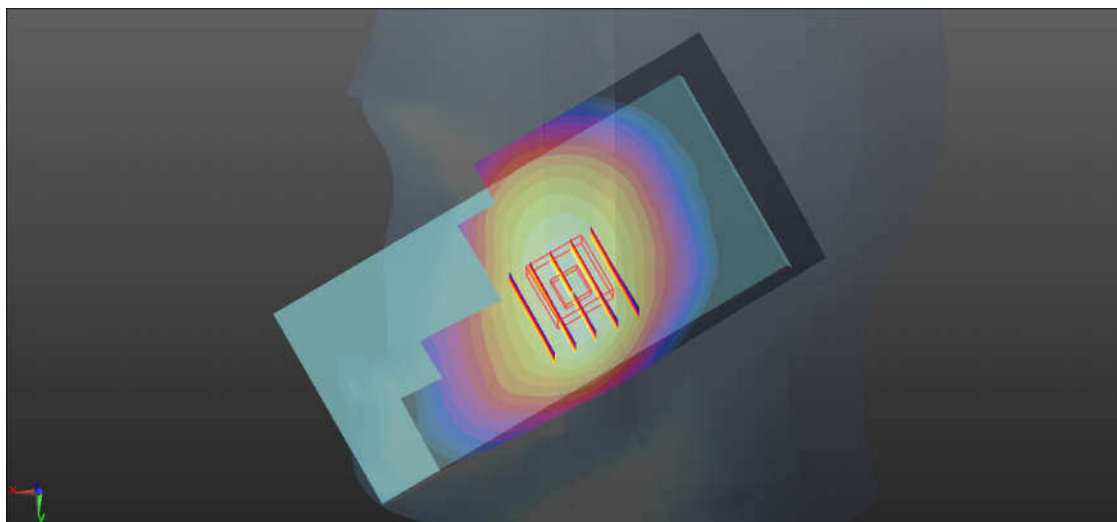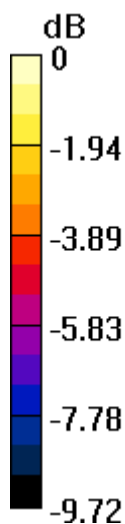

0 dB = 0.465 W/kg = -3.33 dBW/kg



### 07\_LTE Band 4\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch20175


Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 41.559$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.47, 8.47, 8.47); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.232 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.916 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 0.281 W/kg  
**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.119 W/kg**  
Maximum value of SAR (measured) = 0.237 W/kg

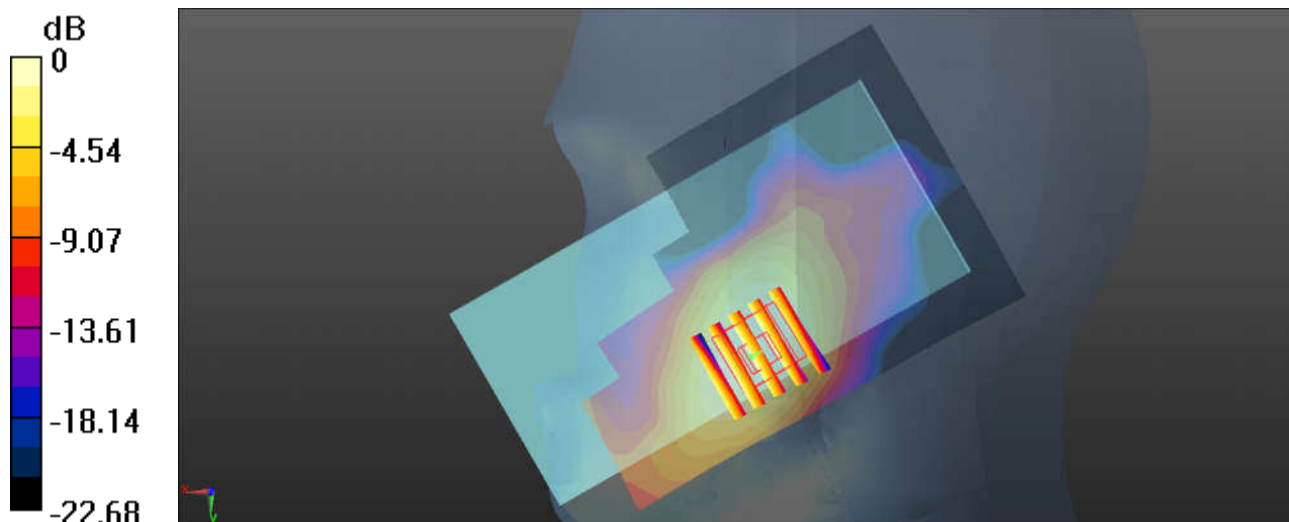

**08\_LTE Band 2\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch18700**

Communication System: UID 0, FDD\_LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.388$  S/m;  $\epsilon_r = 40.009$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18700/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.517 W/kg



**Ch18700/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.107 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.623 W/kg

**SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.248 W/kg**

Maximum value of SAR (measured) = 0.503 W/kg

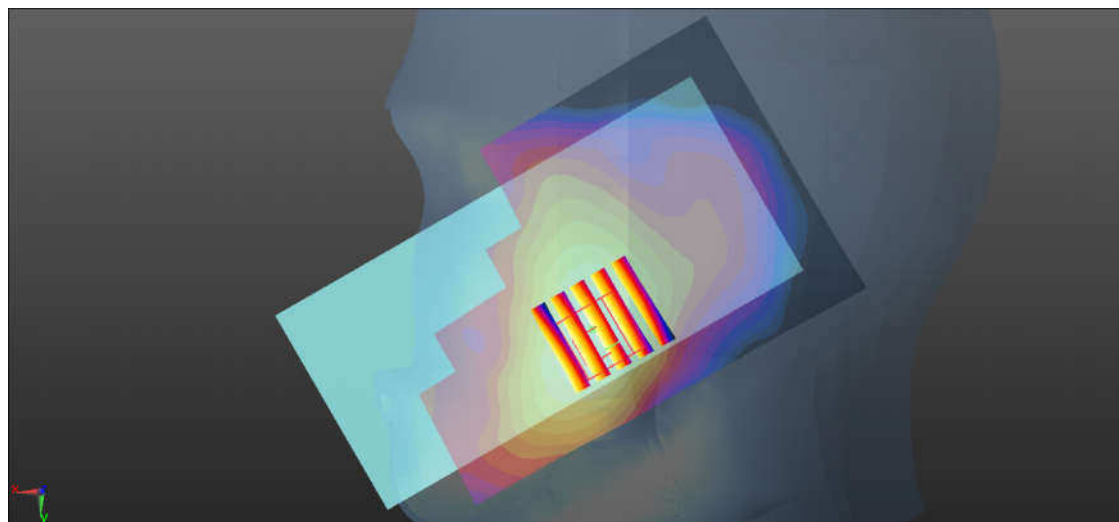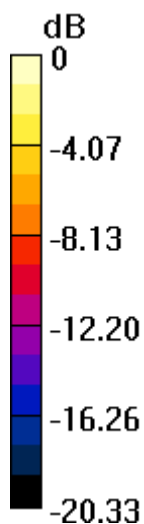

0 dB = 0.503 W/kg = -2.98 dBW/kg

### 09\_LTE Band 7\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch21350


Communication System: UID 0, FDD\_LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.967$  S/m;  $\epsilon_r = 37.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.62, 7.62, 7.62); Calibrated: 2017.5.26;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21350/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.435 W/kg

**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.040 V/m; Power Drift = 0.15 dB  
Peak SAR (extrapolated) = 0.689 W/kg  
**SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.202 W/kg**  
Maximum value of SAR (measured) = 0.417 W/kg

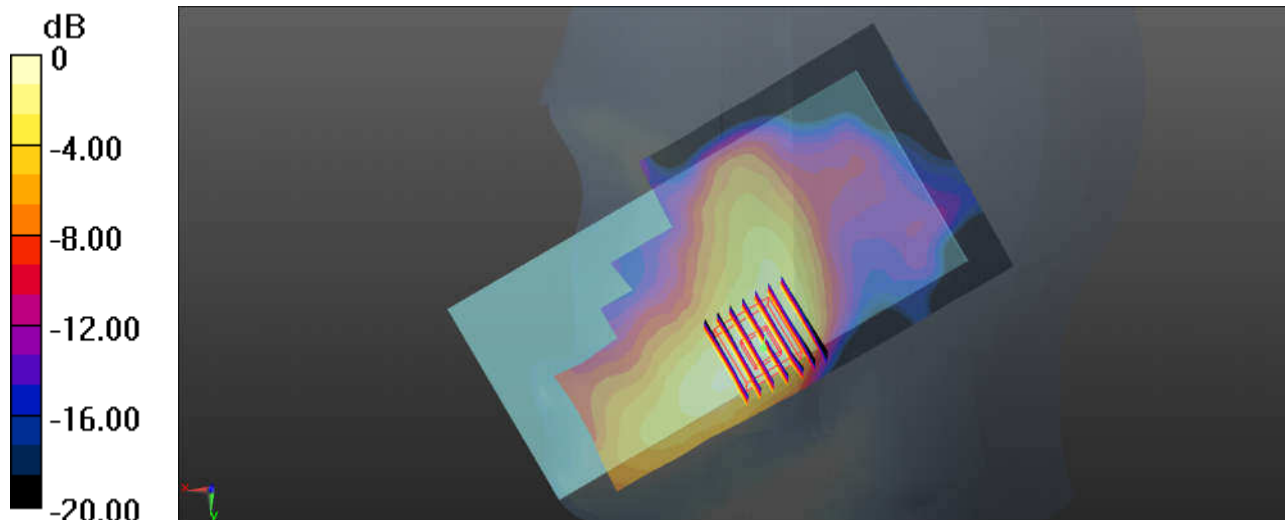

0 dB = 0.417 W/kg = -3.80 dBW/kg

### 10\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_0mm\_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.021

Medium: HSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 37.999$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.71, 7.71, 7.71); Calibrated: 2017.5.26;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.916 W/kg



**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.60 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.377 W/kg**

Maximum value of SAR (measured) = 0.923 W/kg

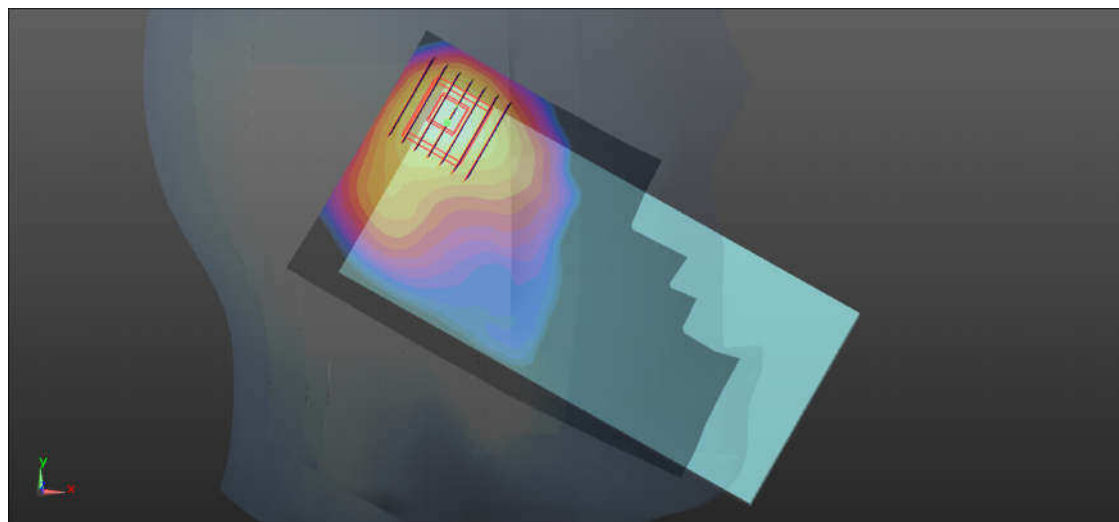

0 dB = 0.923 W/kg = -0.35 dBW/kg

### 11\_GSM850\_GPRS 2 Tx slots\_Back\_5mm\_Ch251

Communication System: UID 0, GPRS/EDGE (2 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium: MSL\_850 Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.992$  S/m;  $\epsilon_r = 54.684$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.72, 9.72, 9.72); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch251/Area Scan (131x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.13 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.522 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

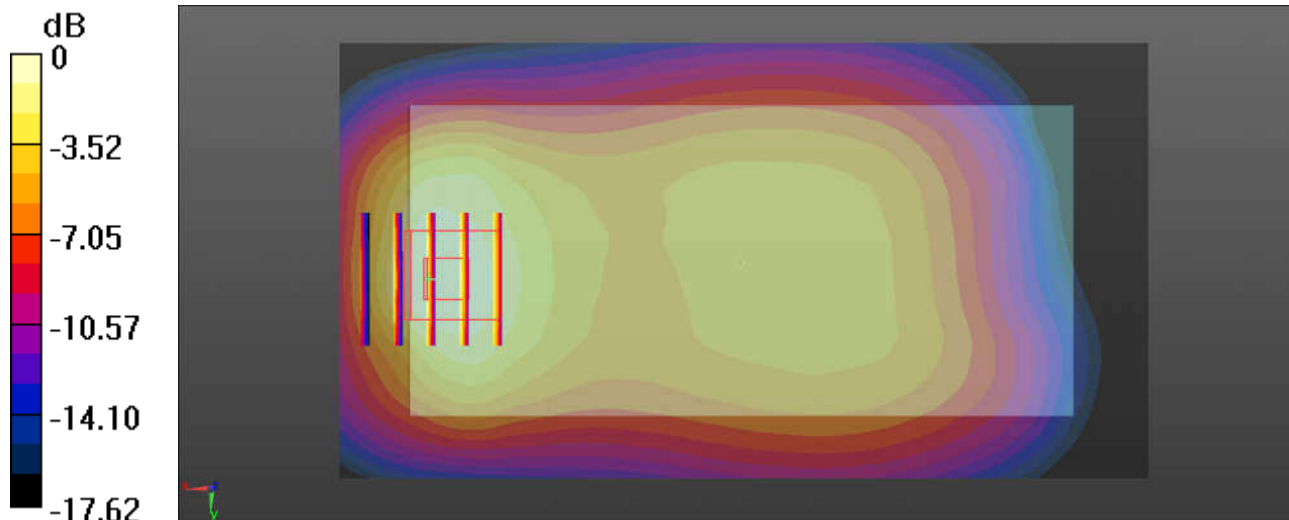

0 dB = 1.11 W/kg = 0.45 dBW/kg

### 12\_GSM1900\_GPRS 4 Tx slots\_Back\_5mm\_Ch661

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  S/m;  $\epsilon_r = 53.031$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.08, 8.08, 8.08); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch661/Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.681 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.374 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

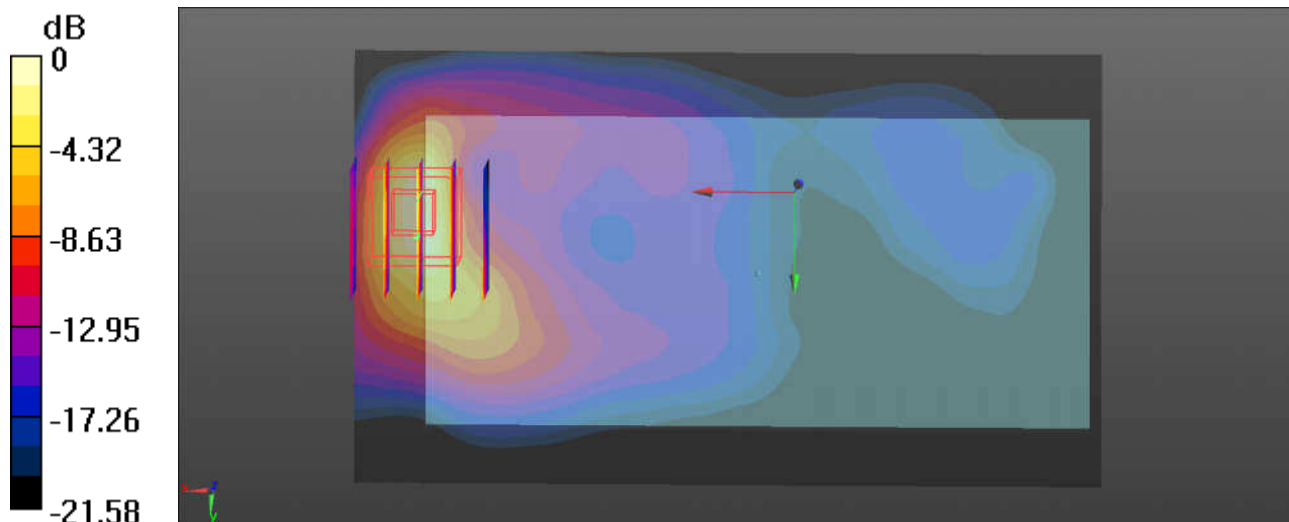

0 dB = 1.29 W/kg = 1.11 dBW/kg

### 13\_WCDMA V\_RMC 12.2Kbps\_Back\_5mm\_Ch4182

Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.979$  S/m;  $\epsilon_r = 54.81$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.72, 9.72, 9.72); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4182/Area Scan (131x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg



**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.99 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 0.896 W/kg; SAR(10 g) = 0.553 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

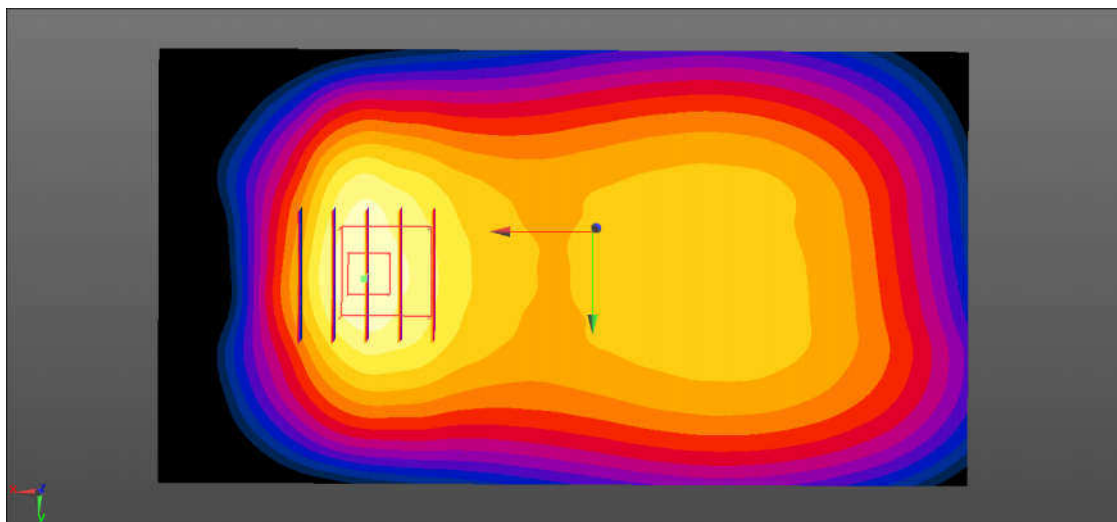

0 dB = 1.18 W/kg = 0.72 dBW/kg

### 14\_WCDMA IV\_RMC 12.2Kbps\_Back\_5mm\_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.456$  S/m;  $\epsilon_r = 54.555$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1513/Area Scan (131x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.06 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.472 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.70 W/kg  
**SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.392 W/kg**  
Maximum value of SAR (measured) = 1.35 W/kg

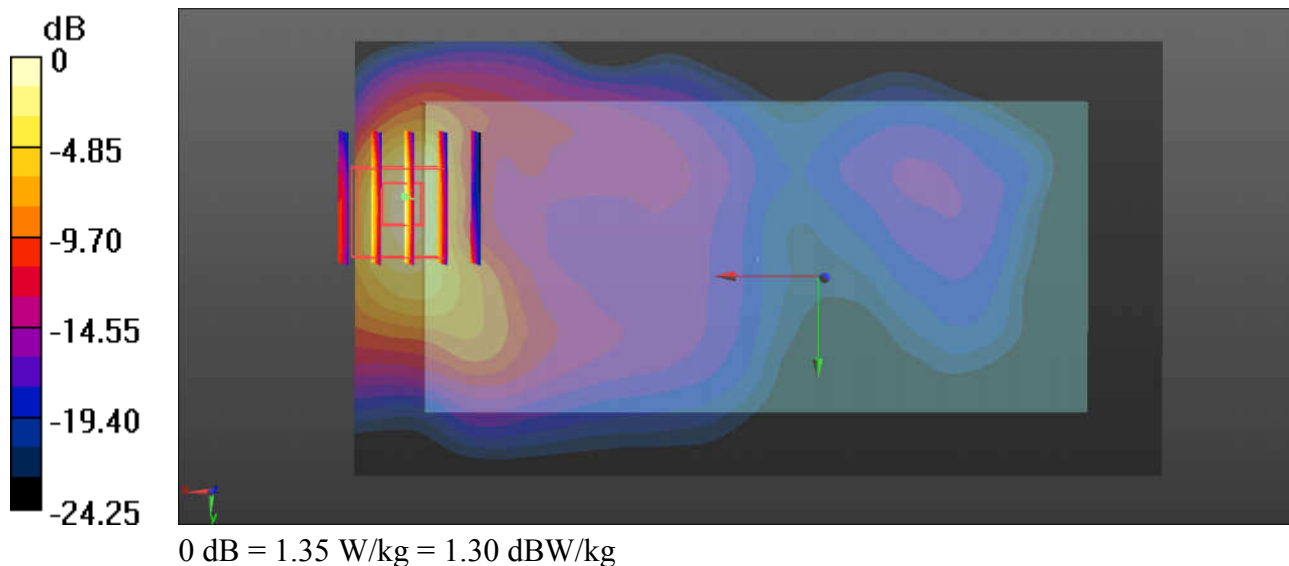



### 15\_WCDMA II\_RMC 12.2Kbps\_Back\_5mm\_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 53.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.08, 8.08, 8.08); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (131x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.11 W/kg

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.293 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.95 W/kg  
**SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.448 W/kg**  
Maximum value of SAR (measured) = 1.38 W/kg

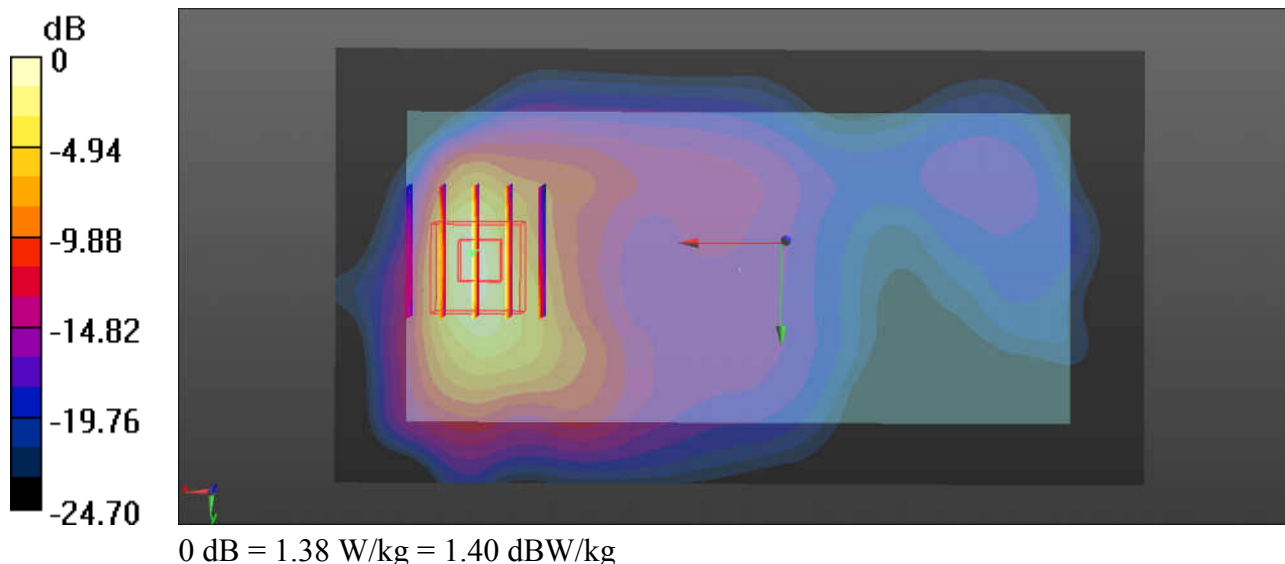

### 16\_LTE Band 5\_10M\_QPSK\_1RB\_25Offset\_Back\_5mm\_Ch20525

Communication System: UID 0, FDD\_LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_850 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.979$  S/m;  $\epsilon_r = 54.808$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.72, 9.72, 9.72); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (131x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg



**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.57 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.505 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

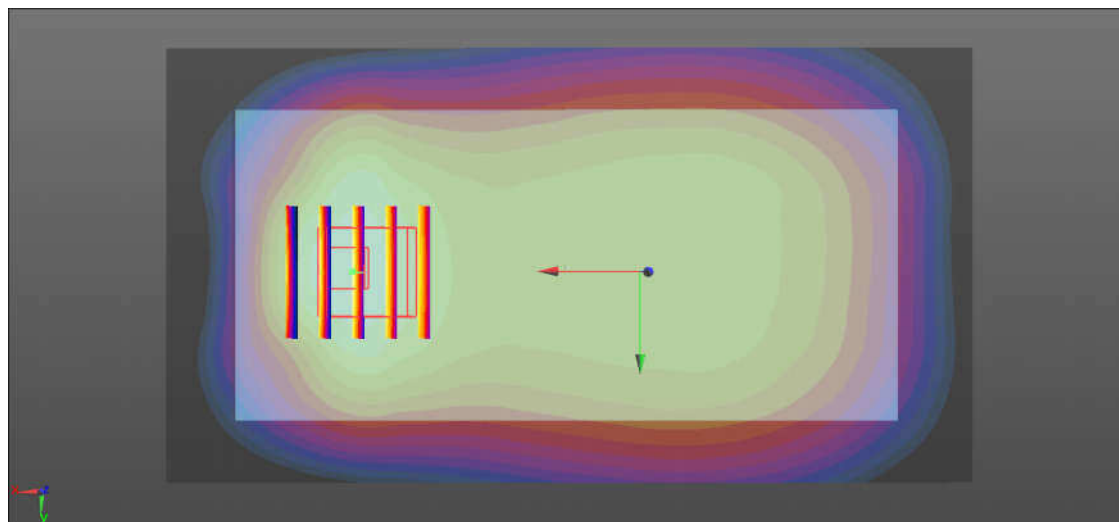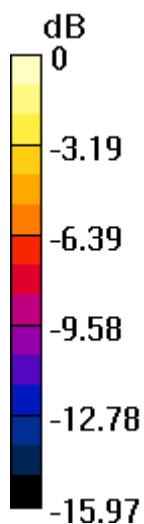

0 dB = 1.05 W/kg = 0.21 dBW/kg

### 17\_LTE Band 4\_20M\_QPSK\_100B\_0Offset\_Back\_5mm\_Ch20175

Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.436$  S/m;  $\epsilon_r = 54.618$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (131x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.08 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.700 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 1.82 W/kg  
**SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.447 W/kg**  
Maximum value of SAR (measured) = 1.32 W/kg

