




FCC SAR TEST REPORT

FCC ID : IHDT56XC3
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Oct. 04, 2018 and testing was started from Oct. 05, 2018 and completed on Nov. 28, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
3.2 General LTE SAR Test and Reporting Considerations 6
3.3 Proximity Sensor Triggering Test..... 7
4. RF Exposure Limits.....10
4.1 Uncontrolled Environment.....10
4.2 Controlled Environment.....10
5. Specific Absorption Rate (SAR).....11
5.1 Introduction 11
5.2 SAR Definition..... 11
6. System Description and Setup12
6.1 E-Field Probe13
6.2 Data Acquisition Electronics (DAE)13
6.3 Phantom.....14
6.4 Device Holder.....15
7. Measurement Procedures16
7.1 Spatial Peak SAR Evaluation16
7.2 Power Reference Measurement.....17
7.3 Area Scan17
7.4 Zoom Scan.....18
7.5 Volume Scan Procedures.....18
7.6 Power Drift Monitoring.....18
8. Test Equipment List19
9. System Verification20
9.1 Tissue Simulating Liquids.....20
9.2 Tissue Verification21
9.3 System Performance Check Results.....22
10. RF Exposure Positions23
10.1 Ear and handset reference point23
10.2 Definition of the cheek position24
10.3 Definition of the tilt position25
10.4 Body Worn Accessory26
10.5 Wireless Router.....26
11. Conducted RF Output Power (Unit: dBm).....27
12. Antenna Location57
13. SAR Test Results58
13.1 Head SAR60
13.2 Hotspot SAR63
13.3 Body Worn Accessory SAR.....67
13.4 Repeated SAR Measurement69
14. Simultaneous Transmission Analysis70
14.1 Head Exposure Conditions71
14.2 Hotspot Exposure Conditions.....72
14.3 Body-Worn Accessory Exposure Conditions74
14.4 SPLSR Evaluation and Analysis.....75
15. Uncertainty Assessment110
16. References.....110
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
FA892624	01	Initial issue of report	Nov. 29, 2018



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Motorola Mobility LLC, Mobile Cellular Phone, are as follows.

Table with 6 columns: Equipment Class, Frequency Band, Head (Separation 0mm), Body-worn (Separation 5mm), Hotspot (Separation 5mm), Highest Simultaneous Transmission 1g SAR (W/kg). Rows include Licensed (GSM850, GSM1900, WCDMA II, WCDMA V, CDMA BC0, CDMA BC1, CDMA BC10, LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 13), DTS (2.4GHz WLAN), NII (5GHz WLAN), and DSS (Bluetooth).

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D06 Hotspot Mode SAR v02r01



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
FCC ID	IHDT56XC3
IMEI Code	359543090002839
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM WLAN 2.4GHz : 802.11b/g/n HT20 WLAN 5GHz : 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	PVT
SW Version	OPP28.148
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	<ol style="list-style-type: none"> This device WLAN 2.4GHz / 5.2GHz / /5.8GHz supports Hotspot operation and Bluetooth support tethering applications. When operating in a call in talk position at the head, the device utilizes the At-Head power table. When operating in a body-worn condition, with proximity of the user's body at the front or back of the device, the device operates in the Body-Worn power table. If neither the At-Head or Body-Worn condition is detected, but the device is operating in WiFi Hotspot mode, the device utilizes the Hotspot power table. When operating in any other radiated condition, the device uses the Default power table. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. The control logic is such that, when this front or back body-worn condition is detected and the device is operating in a mode where on-body operation may be expected, the conducted power is applied in the Body-Worn power table. In this condition (user's body detected at front or back face of the device), the Body-Worn power table is applied regardless whether or not the Wi-Fi hotspot mode is active. Note that the Body-Worn Reduced power tables and detection schemes described above are sufficient to assure that body-worn SAR limits are met, regardless whether the Wi-Fi hotspot feature is active or not. However, because FCC has an additional specific test definition and limit for Wi-Fi hotspot mode operation, the additional Hotspot power table is applied if hand-held operation is indicated (i.e., not At-Head or Body-Worn) when the Wi-Fi hotspot feature is active. This ensures the 4 edges of the device comply with the letter of the Wi-Fi Hotspot requirement. Reduced power for different RF exposure conditions: Head: If audio is present at the earpiece, the device will reduce output powers on the 5GHz WLAN transmitter for held-to-ear and detail descriptions of the power reduction mechanism are included in the operational description. Body worn: The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device, when operating in near-body condition by end user, the device will reduced maximum output powers on the GSM1900, WCDMA B2, CDMA BC1 and LTE B2 / B4 and detail descriptions of the power reduction mechanism are included in the operational description. Hotspot: When the mobile hotspot session is turn on by end user, the device will reduced output powers on the GSM1900, WCDMA B2, CDMA BC1 and LTE B2 / B4 and detail descriptions of the power reduction mechanism are included in the operational description.




3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID	IHDT56XC3											
Equipment Name	Mobile Cellular Phone											
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz											
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz											
uplink modulations used	QPSK / 16QAM											
LTE Voice / Data requirements	Voice and Data											
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3											
		Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)				
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz					
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1				
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1				
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2				
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2				
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3					
256 QAM	≥ 1						≥ 1		≤ 5			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)											
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.											
Power reduction applied to satisfy SAR compliance	Yes, power reduction mechanisms applied to satisfy SAR compliance for LTE B2 / B4.											
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 13												
	Bandwidth 5 MHz						Bandwidth 10 MHz					
	Channel #			Freq.(MHz)			Channel #			Freq.(MHz)		
L	23205			779.5			23230			782		
M	23230			782								
H	23255			784.5								

3.3 Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body (Body-Worn condition) at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
5. When the sensor is active, the device will reduced maximum output powers on the GSM1900, WCDMA B2, CDMA BC1, LTE B2 / B4 transmitter.


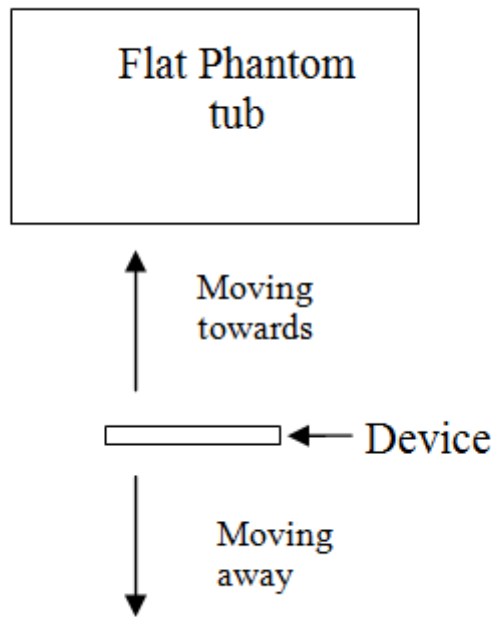


Proximity Sensor Trigger Distance (mm)				
Position	Front		Back	
Position	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	17	22	22



<Sensor triggers distance V.S Measure power>

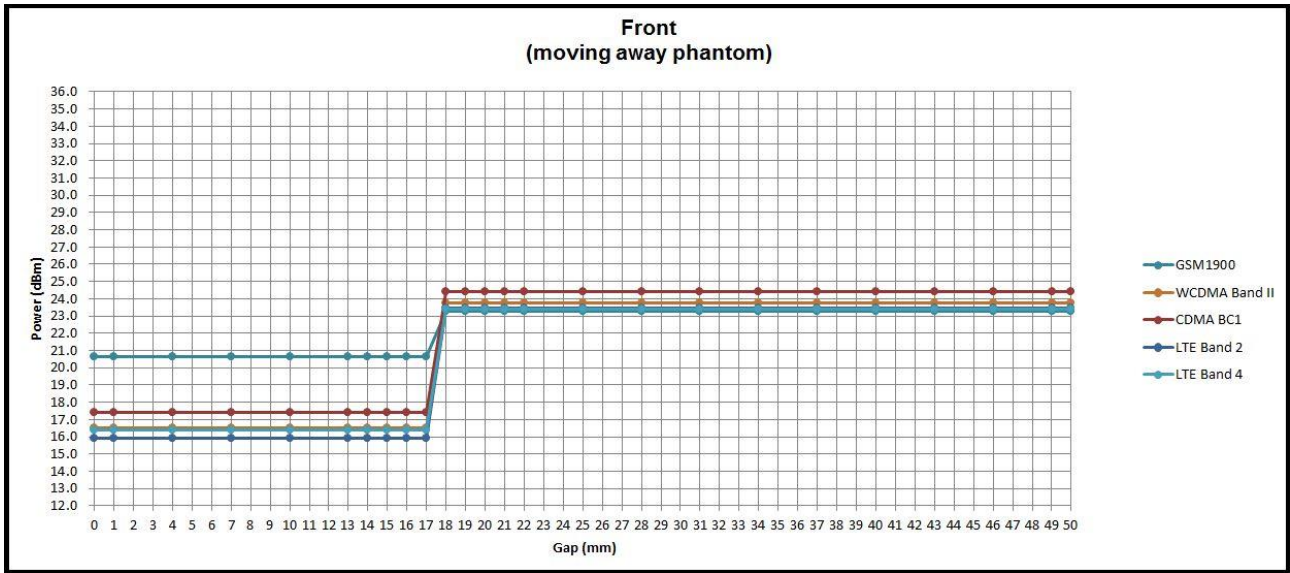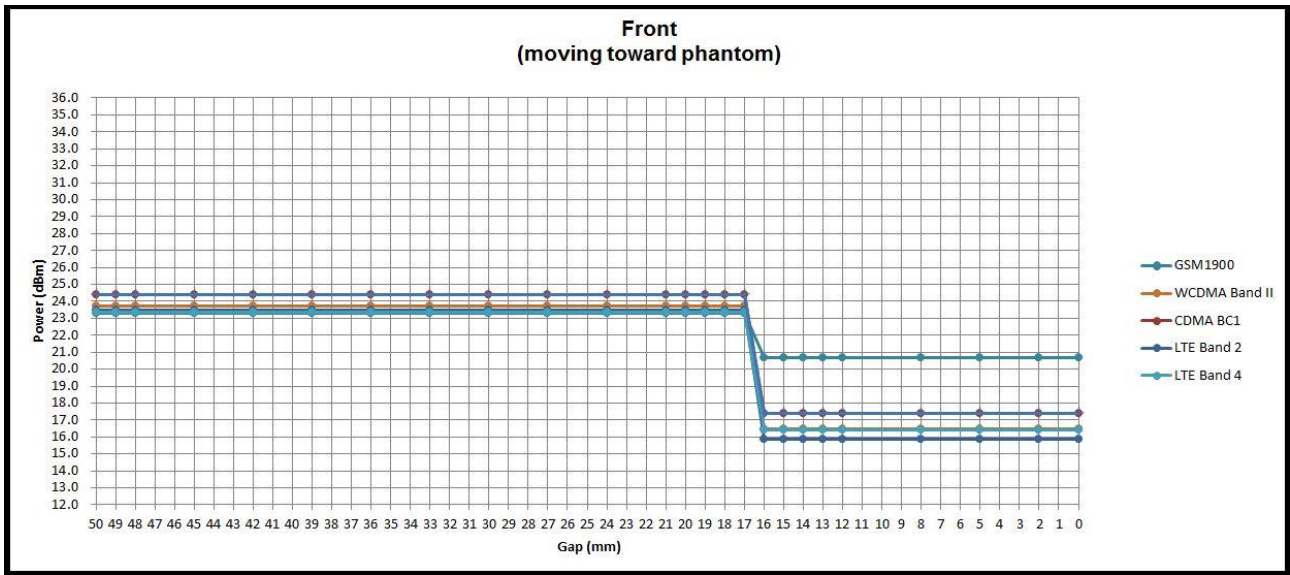

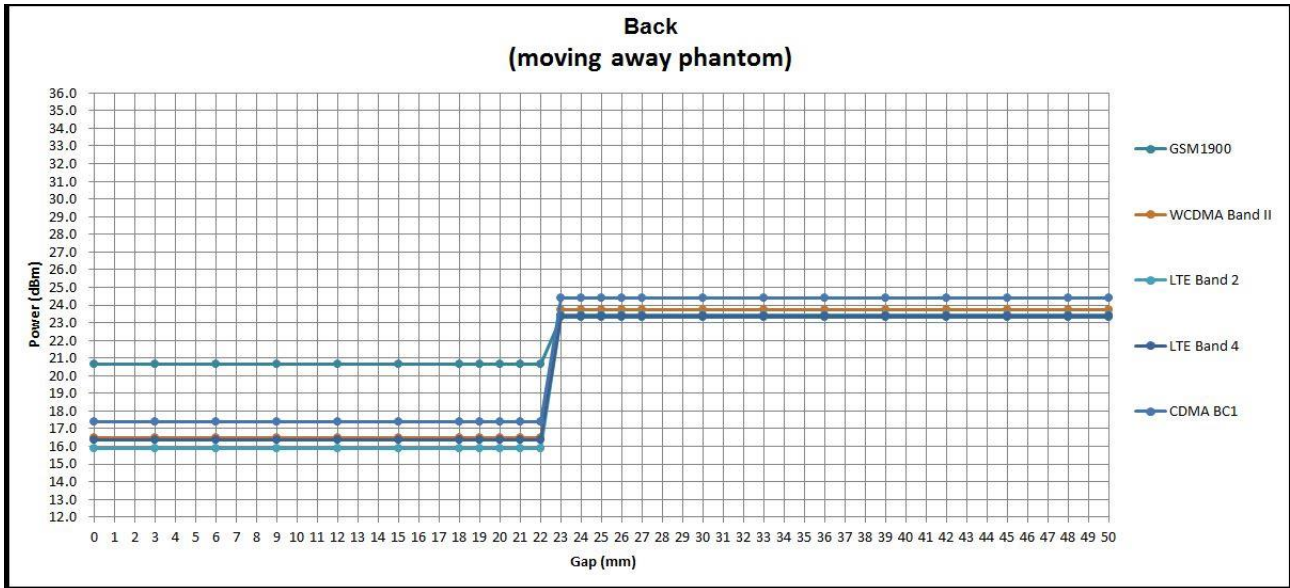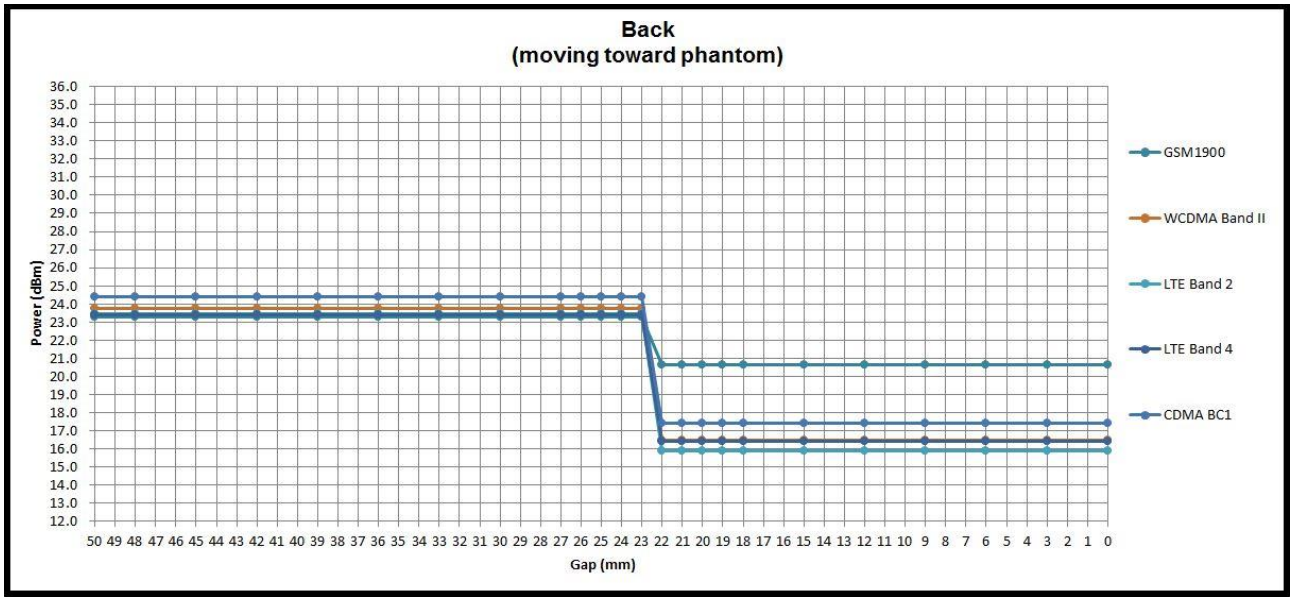



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

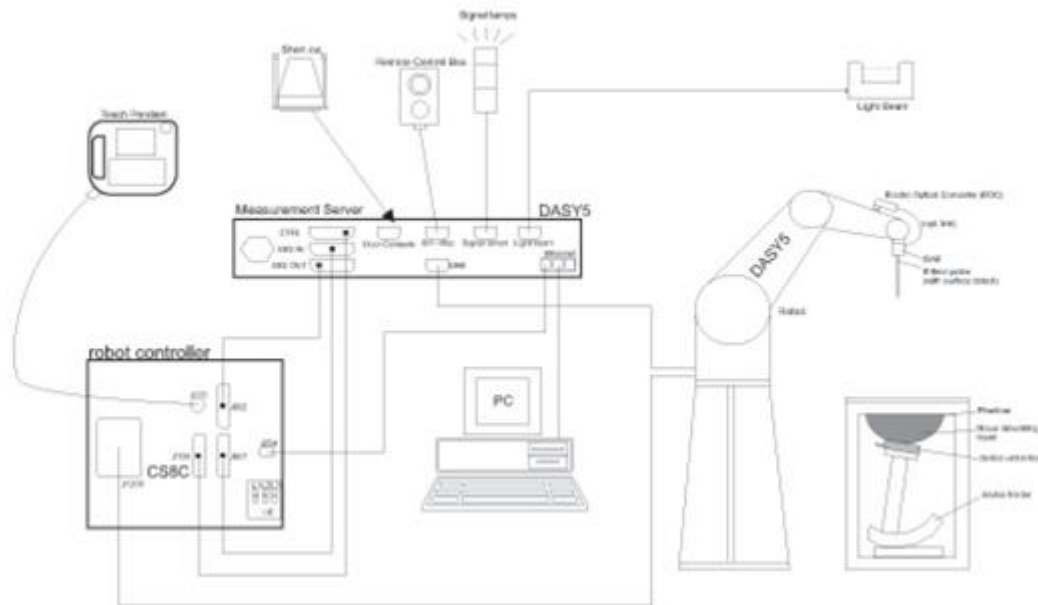


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	Sep. 05, 2018	Sep. 04, 2019
SPEAG	835MHz System Validation Kit	D835V2	4d167	Feb. 27, 2018	Feb. 26, 2019
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 15, 2017	Nov. 14, 2018
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 10, 2019
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 30, 2019
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jun. 28, 2018	Jun. 27, 2019
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 26, 2019
SPEAG	Data Acquisition Electronics	DAE3	495	May. 24, 2018	May. 23, 2019
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 16, 2017	Nov. 15, 2018
SPEAG	Data Acquisition Electronics	DAE4	778	May. 25, 2018	May. 24, 2019
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Data Acquisition Electronics	DAE4	854	Jun. 14, 2018	Jun. 13, 2019
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 24, 2018	Jul. 23, 2019
SPEAG	Data Acquisition Electronics	DAE4	918	Jun. 20, 2018	Jun. 19, 2019
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 03, 2018	Jan. 02, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 31, 2018	May. 30, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2018	Sep. 23, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	7515	Oct. 03, 2018	Oct. 02, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 28, 2018	May. 27, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 26, 2018	Jul. 25, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	7375	Dec. 18, 2017	Dec. 17, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	Feb. 28, 2018	Feb. 27, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	May. 31, 2018	May. 30, 2019
TESTO	Hygro meter	608-H1	34913631	Aug. 27, 2018	Aug. 26, 2019
TESTO	Hygro meter	608-H1	34852481	Sep. 27, 2018	Sep. 26, 2019
RCPTWN	Thermometer	HTC-1	TM685-1	Mar. 16, 2018	Mar. 15, 2019
RCPTWN	Thermometer	HTC-1	TM281-1	Mar. 16, 2018	Mar. 15, 2019
RCPTWN	Thermometer	HTC-1	TM560-1	Mar. 16, 2018	Mar. 15, 2019
Gencom	Thermometer	TE1	TM225-1	Mar. 16, 2018	Mar. 15, 2019
WonDer	Thermometer	WD-5016	TM642-1	Mar. 16, 2018	Mar. 15, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 17, 2018	Apr. 16, 2019
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 21, 2018	May. 20, 2019
R&S	BT Base Station	CBT	100815	Feb. 05, 2018	Feb. 04, 2019
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 07, 2017	Dec. 06, 2018
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 17, 2018	Jan. 16, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 24, 2018	Jul. 23, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Dec. 08, 2017	Dec. 07, 2018
Anritsu	Power Meter	ML2495A	1419002	May. 18, 2018	May. 17, 2019
Anritsu	Power Sensor	MA2411B	1339124	May. 18, 2018	May. 17, 2019
Anritsu	Power Meter	ML2495A	1240001	Sep. 13, 2018	Sep. 12, 2019
Anritsu	Power Sensor	MA2411B	1207349	Sep. 13, 2018	Sep. 12, 2019
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 23, 2018	Jun. 22, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 09, 2018	Aug. 08, 2019
Mini-Circuits	Power Amplifier	ZHL-42W+	15542	Aug. 09, 2018	Aug. 08, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

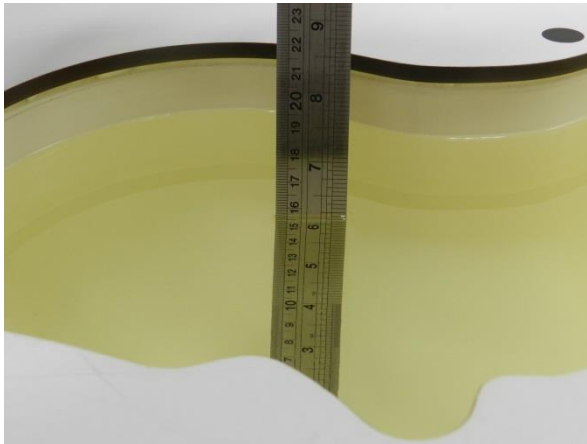


Fig 10.1 Photo of Liquid Height for Head SAR

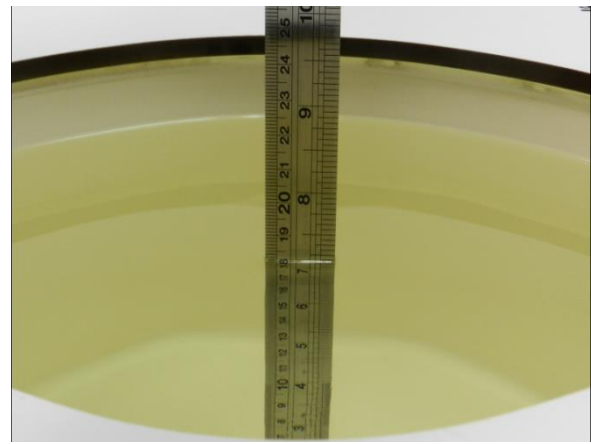


Fig 10.2 Photo of Liquid Height for Body SAR



9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (εr)	Conductivity Target (σ)	Permittivity Target (εr)	Delta (σ) (%)	Delta (εr) (%)	Limit (%)	Date
750	HSL	22.7	0.899	43.100	0.89	41.90	1.01	2.86	±5	2018/10/5
835	HSL	22.1	0.894	42.000	0.90	41.50	-0.67	1.20	±5	2018/10/5
1750	HSL	22.7	1.378	41.339	1.37	40.10	0.58	3.09	±5	2018/10/29
1900	HSL	22.7	1.434	40.008	1.40	40.00	2.43	0.02	±5	2018/10/29
2450	HSL	22.8	1.775	39.495	1.80	39.20	-1.39	0.75	±5	2018/11/16
5250	HSL	22.6	4.640	35.885	4.71	35.95	-1.49	-0.18	±5	2018/11/16
5300	HSL	22.6	4.688	35.801	4.76	35.90	-1.51	-0.28	±5	2018/11/16
5600	HSL	22.6	4.982	35.374	5.07	35.50	-1.74	-0.35	±5	2018/11/16
5750	HSL	22.6	5.139	35.167	5.22	35.35	-1.55	-0.52	±5	2018/11/16
750	MSL	22.9	0.969	54.068	0.96	55.50	0.94	-2.58	±5	2018/10/30
835	MSL	22.9	0.992	56.781	0.97	55.20	2.27	2.86	±5	2018/10/30
835	MSL	22.6	0.940	55.206	0.97	55.20	-3.09	0.01	±5	2018/11/2
835	MSL	22.5	0.941	54.350	0.97	55.20	-2.99	-1.54	±5	2018/11/12
835	MSL	22.4	0.950	54.563	0.97	55.20	-2.06	-1.15	±5	2018/11/14
1750	MSL	22.7	1.517	54.061	1.49	53.40	1.81	1.24	±5	2018/11/13
1900	MSL	22.7	1.571	52.505	1.52	53.30	3.36	-1.49	±5	2018/11/13
1900	MSL	22.5	1.559	52.432	1.52	53.30	2.57	-1.63	±5	2018/11/14
2450	MSL	22.8	1.963	52.579	1.95	52.70	0.67	-0.23	±5	2018/11/16
5250	MSL	22.3	5.412	49.020	5.36	48.95	0.97	0.14	±5	2018/11/16
5600	MSL	22.3	5.796	48.532	5.77	48.50	0.45	0.07	±5	2018/11/16
5750	MSL	22.3	5.956	48.328	5.94	48.28	0.27	0.10	±5	2018/11/16
5750	MSL	22.6	6.179	48.731	5.94	48.28	4.02	0.93	±5	2018/11/28

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/10/5	750	HSL	250	D750V3-1012	ES3DV3 - SN3169	DAE3 Sn495	1.96	8.47	7.84	-7.44
2018/10/5	835	HSL	250	D835V2-4d167	ES3DV3 - SN3169	DAE3 Sn495	2.28	9.26	9.12	-1.51
2018/10/29	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE4 Sn853	8.67	36.70	34.68	-5.50
2018/10/29	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn853	9.92	40.20	39.68	-1.29
2018/11/16	2450	HSL	250	D2450V2-736	EX3DV4 - SN7515	DAE4 Sn918	13.40	52.70	53.6	1.71
2018/11/16	5250	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE4 Sn778	7.71	80.70	77.1	-4.46
2018/11/16	5300	HSL	100	D5GHzV2-1040	EX3DV4 - SN7375	DAE4 Sn854	8.30	82.20	83	0.97
2018/11/16	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE4 Sn778	8.40	83.30	84	0.84
2018/11/16	5750	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE4 Sn778	7.63	80.40	76.3	-5.10
2018/10/30	750	MSL	250	D750V3-1012	EX3DV4 - SN7306	DAE3 Sn577	2.28	8.76	9.12	4.11
2018/10/30	835	MSL	250	D835V2-4d167	EX3DV4 - SN7306	DAE3 Sn577	2.48	9.62	9.92	3.12
2018/11/2	835	MSL	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn1399	2.44	9.62	9.76	1.46
2018/11/12	835	MSL	250	D835V2-4d167	EX3DV4 - SN7515	DAE4 Sn918	2.46	9.62	9.84	2.29
2018/11/14	835	MSL	250	D835V2-4d167	EX3DV4 - SN7515	DAE4 Sn918	2.49	9.62	9.96	3.53
2018/11/13	1750	MSL	250	D1750V2-1068	EX3DV4 - SN7515	DAE4 Sn918	10.10	37.20	40.4	8.60
2018/11/13	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN7515	DAE4 Sn918	9.37	40.20	37.48	-6.77
2018/11/14	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN7515	DAE4 Sn918	10.30	40.20	41.2	2.49
2018/11/16	2450	MSL	250	D2450V2-736	EX3DV4 - SN7515	DAE4 Sn918	12.40	51.50	49.6	-3.69
2018/11/16	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn577	7.88	78.30	78.8	1.68
2018/11/16	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn577	8.39	81.00	83.9	5.80
2018/11/16	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN7306	DAE3 Sn577	7.87	77.40	78.7	2.47
2018/11/28	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3857	DAE4 Sn1279	7.83	77.40	78.3	1.16

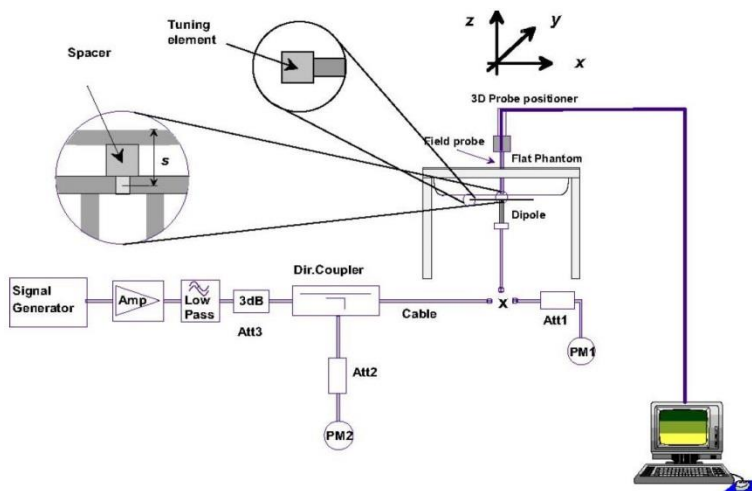


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

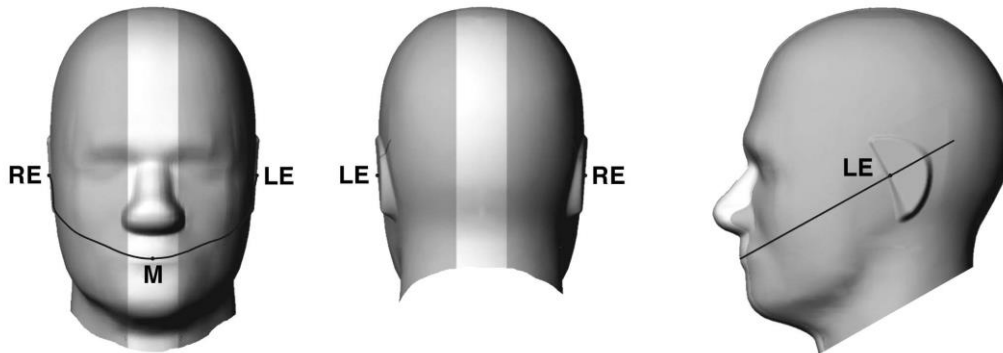


Fig 9.1.1 Front, back, and side views of SAM twin phantom

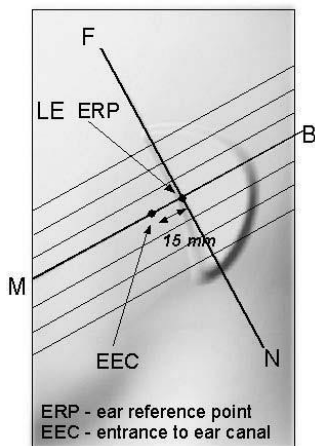


Fig 9.1.2 Close-up side view of phantom showing the ear region.

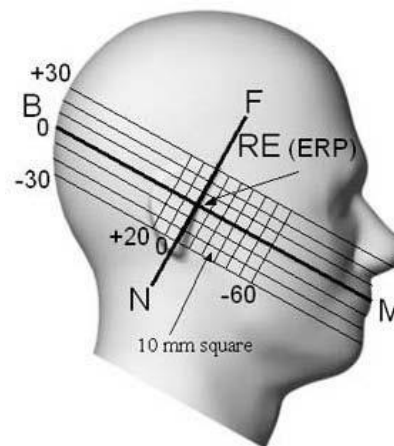


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

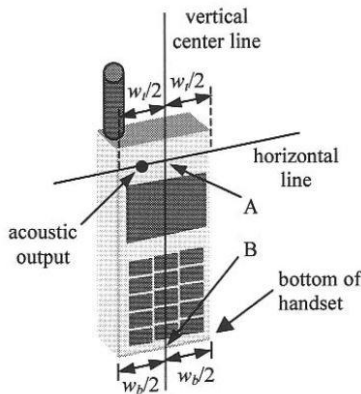


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

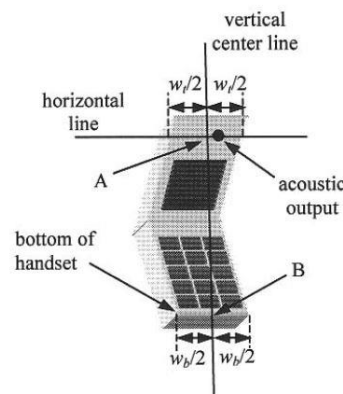


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

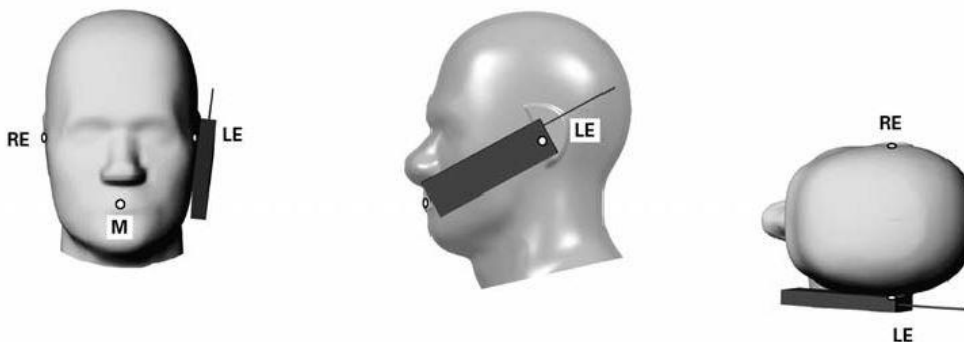


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

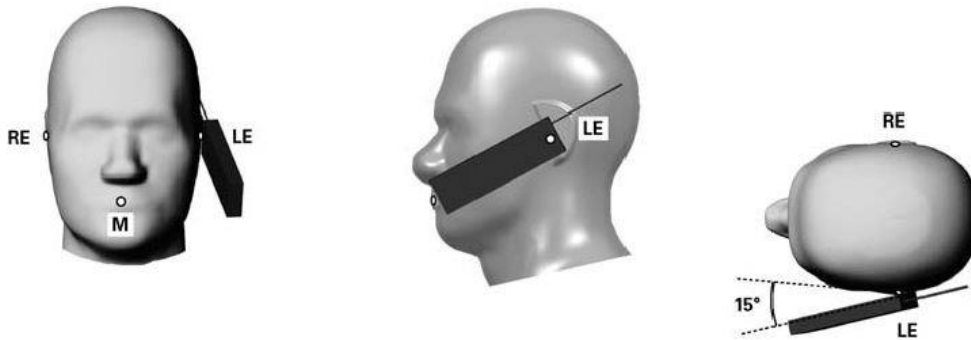


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

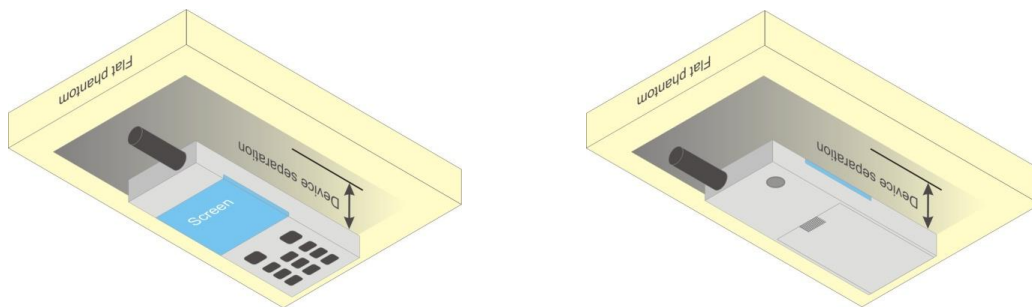


Fig 9.4 Body Worn Position

10.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



11. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.73	32.78	32.85	33.50	23.73	23.78	23.85	24.50
GPRS 1 Tx slot	32.77	32.87	32.95	33.50	23.77	23.87	23.95	24.50
GPRS 2 Tx slots	29.41	29.11	29.09	30.50	23.41	23.11	23.09	24.50
GPRS 3 Tx slots	27.45	27.02	27.06	28.50	23.19	22.76	22.80	24.24
GPRS 4 Tx slots	26.42	26.44	26.55	27.50	23.42	23.44	23.55	24.50
EDGE 1 Tx slot	26.11	26.22	26.29	27.00	17.11	17.22	17.29	18.00
EDGE 2 Tx slots	26.01	26.06	26.19	27.00	20.01	20.06	20.19	21.00
EDGE 3 Tx slots	24.72	24.67	24.81	25.50	20.46	20.41	20.55	21.24
EDGE 4 Tx slots	23.30	23.30	23.39	24.00	20.30	20.30	20.39	21.00

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.78	29.98	29.65	30.00	20.78	20.98	20.65	21.00
GPRS 1 Tx slot	29.93	29.88	29.84	30.00	20.93	20.88	20.84	21.00
GPRS 2 Tx slots	27.08	26.71	26.76	28.00	21.08	20.71	20.76	22.00
GPRS 3 Tx slots	24.87	24.85	24.50	26.00	20.61	20.59	20.24	21.74
GPRS 4 Tx slots	23.28	23.29	23.32	25.00	20.28	20.29	20.32	22.00
EDGE 1 Tx slot	25.34	25.14	24.96	26.00	16.34	16.14	15.96	17.00
EDGE 2 Tx slots	25.13	24.42	24.20	26.00	19.13	18.42	18.20	20.00
EDGE 3 Tx slots	23.72	22.70	22.53	24.50	19.46	18.44	18.27	20.24
EDGE 4 Tx slots	22.14	21.02	21.04	23.00	19.14	18.02	18.04	20.00



<Hotspot Power Mode>

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
	1850.2	1880	1909.8		1850.2	1880	1909.8	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	24.86	24.96	24.98	25.50	15.86	15.96	15.98	16.50
GPRS 1 Tx slot	24.88	24.98	24.99	25.50	15.88	15.98	15.99	16.50
GPRS 2 Tx slots	22.10	22.11	21.94	23.50	16.10	16.11	15.94	17.50
GPRS 3 Tx slots	19.60	19.70	19.53	21.50	15.34	15.44	15.27	17.24
GPRS 4 Tx slots	19.49	19.46	19.39	20.50	16.49	16.46	16.39	17.50
EDGE 1 Tx slot	20.89	20.99	20.98	21.50	11.89	11.99	11.98	12.50
EDGE 2 Tx slots	20.77	20.79	20.80	21.50	14.77	14.79	14.80	15.50
EDGE 3 Tx slots	19.44	19.49	19.32	20.00	15.18	15.23	15.06	15.74
EDGE 4 Tx slots	17.72	17.80	17.81	18.50	14.72	14.80	14.81	15.50

<Near to body Power Mode>

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
	1850.2	1880	1909.8		1850.2	1880	1909.8	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	25.80	25.86	25.96	27.00	16.80	16.86	16.96	18.00
GPRS 1 Tx slot	25.81	25.87	25.99	27.00	16.81	16.87	16.99	18.00
GPRS 2 Tx slots	22.41	22.42	22.60	25.00	16.41	16.42	16.60	19.00
GPRS 3 Tx slots	21.32	21.35	21.35	23.00	17.06	17.09	17.09	18.74
GPRS 4 Tx slots	20.66	20.61	20.51	22.00	17.66	17.61	17.51	19.00
EDGE 1 Tx slot	21.96	21.98	21.95	23.00	12.96	12.98	12.95	14.00
EDGE 2 Tx slots	21.83	21.94	21.86	23.00	15.83	15.94	15.86	17.00
EDGE 3 Tx slots	20.22	20.13	20.17	21.50	15.96	15.87	15.91	17.24
EDGE 4 Tx slots	19.10	19.13	19.23	20.00	16.10	16.13	16.23	17.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

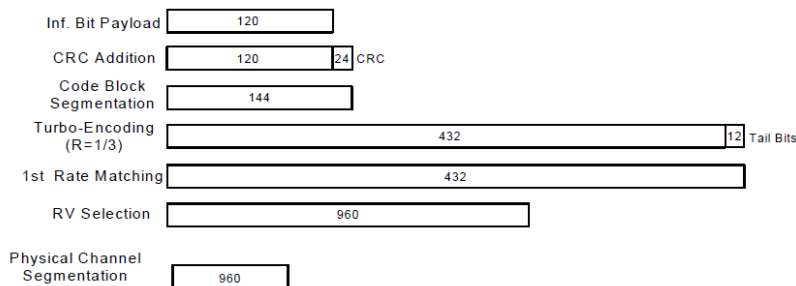


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parm
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.72	23.58	23.63	24.00	23.93	23.89	23.96	24.00
3GPP Rel 99	RMC 12.2Kbps	23.74	23.59	23.65	24.00	23.94	23.91	23.97	24.00
3GPP Rel 6	HSDPA Subtest-1	22.68	22.56	22.66	23.00	22.86	22.85	22.89	23.00
3GPP Rel 6	HSDPA Subtest-2	22.69	22.50	22.57	23.00	22.94	22.92	22.91	23.00
3GPP Rel 6	HSDPA Subtest-3	22.23	22.07	22.03	22.50	22.32	22.29	22.41	22.50
3GPP Rel 6	HSDPA Subtest-4	22.21	22.05	22.15	22.50	22.36	22.33	22.32	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.62	22.49	22.60	23.00	22.79	22.78	22.82	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.63	22.45	22.51	23.00	22.87	22.93	22.84	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.16	22.01	21.97	22.50	22.25	22.30	22.34	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.17	21.98	22.08	22.50	22.29	22.34	22.25	22.50
3GPP Rel 6	HSUPA Subtest-1	22.62	22.42	22.48	23.00	21.89	21.96	21.90	23.00
3GPP Rel 6	HSUPA Subtest-2	20.58	20.58	20.42	21.00	20.46	20.52	20.63	21.00
3GPP Rel 6	HSUPA Subtest-3	21.75	21.75	21.66	22.00	21.94	21.91	21.89	22.00
3GPP Rel 6	HSUPA Subtest-4	20.79	20.73	20.46	21.00	20.91	20.95	20.93	21.00
3GPP Rel 6	HSUPA Subtest-5	22.92	22.71	22.77	23.00	22.91	22.92	22.89	23.00



<Hotspot Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)
TX Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	15.11	15.05	15.00	16.50
3GPP Rel 99	RMC 12.2Kbps	15.17	15.12	15.00	16.50
3GPP Rel 6	HSDPA Subtest-1	14.34	14.28	14.12	15.50
3GPP Rel 6	HSDPA Subtest-2	14.38	14.32	14.17	15.50
3GPP Rel 6	HSDPA Subtest-3	13.58	13.53	13.37	15.00
3GPP Rel 6	HSDPA Subtest-4	13.58	13.53	13.37	15.00
3GPP Rel 8	DC-HSDPA Subtest-1	14.33	14.21	14.11	15.50
3GPP Rel 8	DC-HSDPA Subtest-2	14.22	14.16	14.09	15.50
3GPP Rel 8	DC-HSDPA Subtest-3	13.50	13.47	13.36	15.00
3GPP Rel 8	DC-HSDPA Subtest-4	13.48	13.36	13.25	15.00
3GPP Rel 6	HSUPA Subtest-1	14.08	14.07	14.00	15.50
3GPP Rel 6	HSUPA Subtest-2	12.08	12.06	12.02	13.50
3GPP Rel 6	HSUPA Subtest-3	13.06	13.01	12.96	14.50
3GPP Rel 6	HSUPA Subtest-4	12.10	12.11	12.05	13.50
3GPP Rel 6	HSUPA Subtest-5	14.10	14.10	14.00	15.50

<Near to body Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)
TX Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	16.43	16.44	16.41	17.00
3GPP Rel 99	RMC 12.2Kbps	16.44	16.49	16.48	17.00
3GPP Rel 6	HSDPA Subtest-1	15.34	15.32	15.15	16.00
3GPP Rel 6	HSDPA Subtest-2	15.36	15.50	15.14	16.00
3GPP Rel 6	HSDPA Subtest-3	14.86	14.80	14.63	15.50
3GPP Rel 6	HSDPA Subtest-4	14.88	14.81	14.62	15.50
3GPP Rel 8	DC-HSDPA Subtest-1	15.33	15.30	15.16	16.00
3GPP Rel 8	DC-HSDPA Subtest-2	15.30	15.46	15.11	16.00
3GPP Rel 8	DC-HSDPA Subtest-3	14.82	14.75	14.54	15.50
3GPP Rel 8	DC-HSDPA Subtest-4	14.77	14.53	14.36	15.50
3GPP Rel 6	HSUPA Subtest-1	15.22	15.19	15.09	16.00
3GPP Rel 6	HSUPA Subtest-2	13.46	13.47	13.41	14.00
3GPP Rel 6	HSUPA Subtest-3	14.45	14.49	14.41	15.00
3GPP Rel 6	HSUPA Subtest-4	13.49	13.45	13.21	14.00
3GPP Rel 6	HSUPA Subtest-5	15.40	15.25	15.12	16.00



<CDMA2000 Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

<Default Power Mode >

Band	CDMA BC0			Tune-up Limit (dBm)	CDMA BC1			Tune-up Limit (dBm)	CDMA BC10			Tune-up Limit (dBm)
	1013	384	777		25	600	1175		476	580	684	
TX Channel	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
Frequency (MHz)												
RC1 SO55	24.05	24.08	24.04	24.50	24.36	24.33	24.38	24.50	24.04	24.09	24.07	24.50
RC3 SO55	24.00	24.11	24.06	24.50	24.38	24.34	24.39	24.50	24.08	24.14	24.10	24.50
RC3 SO32 (F+SCH)	24.05	24.08	24.06	24.50	24.31	24.30	24.33	24.50	24.13	24.11	24.08	24.50
RC3 SO32 (+SCH)	24.08	24.10	24.10	24.50	24.30	24.28	24.31	24.50	24.11	24.09	24.08	24.50
RTAP 153.6Kbps	24.01	24.07	24.06	24.50	24.37	24.35	24.41	24.50	24.08	24.06	24.03	24.50
RETAP 4096Bits	24.09	24.08	24.05	24.50	24.32	24.29	24.33	24.50	24.07	24.11	24.10	24.50

<Hotspot Power Mode>

Band	CDMA BC1			Tune-up Limit (dBm)
	25	600	1175	
TX Channel	1851.25	1880	1908.75	
Frequency (MHz)				
RC1 SO55	17.15	17.05	17.11	17.50
RC3 SO55	17.18	17.09	17.20	17.50
RC3 SO32 (F+SCH)	17.10	17.01	17.13	17.50
RC3 SO32 (+SCH)	17.05	16.98	17.12	17.50
RTAP 153.6Kbps	17.12	17.03	17.16	17.50
RETAP 4096Bits	17.06	16.99	17.08	17.50

<Near to body Power Mode>

Band	CDMA BC1			Tune-up Limit (dBm)
	25	600	1175	
TX Channel	1851.25	1880	1908.75	
Frequency (MHz)				
RC1 SO55	17.28	17.20	17.31	18.00
RC3 SO55	17.34	17.22	17.38	18.00
RC3 SO32 (F+SCH)	17.22	17.18	17.30	18.00
RC3 SO32 (+SCH)	17.19	17.18	17.25	18.00
RTAP 153.6Kbps	17.24	17.17	17.28	18.00
RETAP 4096Bits	17.15	17.13	17.21	18.00



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.30	23.42	23.56	24	0
20	QPSK	1	49	23.45	23.50	23.63		
20	QPSK	1	99	23.16	23.07	23.47		
20	QPSK	50	0	22.51	22.43	22.68	23	1
20	QPSK	50	24	22.52	22.42	22.49		
20	QPSK	50	50	22.54	22.35	22.52		
20	QPSK	100	0	22.53	22.51	22.55		
20	16QAM	1	0	22.05	22.23	21.91	23	1
20	16QAM	1	49	22.01	22.69	21.98		
20	16QAM	1	99	21.75	21.95	21.97		
20	16QAM	50	0	21.69	21.40	21.54	22	2
20	16QAM	50	24	21.62	21.42	21.59		
20	16QAM	50	50	21.55	21.27	21.61		
20	16QAM	100	0	21.61	21.40	21.46		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.33	23.17	23.09	24	0
15	QPSK	1	37	23.58	23.37	23.39		
15	QPSK	1	74	23.10	23.23	23.41		
15	QPSK	36	0	22.56	22.44	22.47	23	1
15	QPSK	36	20	22.50	22.38	22.47		
15	QPSK	36	39	22.31	22.32	22.46		
15	QPSK	75	0	22.51	22.35	22.50		
15	16QAM	1	0	22.41	21.79	21.82	23	1
15	16QAM	1	37	22.83	21.89	21.99		
15	16QAM	1	74	22.05	21.62	21.85		
15	16QAM	36	0	21.48	21.42	21.49	22	2
15	16QAM	36	20	21.30	21.30	21.37		
15	16QAM	36	39	21.35	21.25	21.52		
15	16QAM	75	0	21.35	21.27	21.39		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.41	23.12	23.16	24	0
10	QPSK	1	25	23.55	23.55	23.61		
10	QPSK	1	49	23.09	23.09	23.19		
10	QPSK	25	0	22.52	22.43	22.48	23	1
10	QPSK	25	12	22.58	22.38	22.54		
10	QPSK	25	25	22.45	22.38	22.46		
10	QPSK	50	0	22.55	22.32	22.50		
10	16QAM	1	0	21.94	22.04	22.01	23	1
10	16QAM	1	25	22.33	22.46	22.06		
10	16QAM	1	49	22.03	21.83	22.18		
10	16QAM	25	0	21.65	21.35	21.49	22	2
10	16QAM	25	12	21.82	21.34	21.56		
10	16QAM	25	25	21.38	21.23	21.45		
10	16QAM	50	0	21.59	21.37	21.51		
10	16QAM	50	0	21.59	21.37	21.51		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.39	23.05	23.25	24	0
5	QPSK	1	12	23.54	23.47	23.32		
5	QPSK	1	24	23.36	23.01	23.07		
5	QPSK	12	0	22.43	22.39	22.51	23	1
5	QPSK	12	7	22.40	22.28	22.45		
5	QPSK	12	13	22.35	22.35	22.41		
5	QPSK	25	0	22.39	22.32	22.47	23	1
5	16QAM	1	0	22.43	22.59	22.59		
5	16QAM	1	12	22.62	22.56	22.01		
5	16QAM	1	24	22.39	21.71	21.82	22	2
5	16QAM	12	0	21.42	21.12	21.52		
5	16QAM	12	7	21.43	21.23	21.37		
5	16QAM	12	13	21.29	21.18	21.37	22	2
5	16QAM	12	13	21.29	21.18	21.37		
5	16QAM	25	0	21.42	21.35	21.42		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.52	23.48	23.50	24	0
3	QPSK	1	8	23.57	23.43	23.36		
3	QPSK	1	14	23.55	23.50	23.41		
3	QPSK	8	0	22.71	22.60	22.72	23	1
3	QPSK	8	4	22.75	22.51	22.59		
3	QPSK	8	7	22.75	22.45	22.63		
3	QPSK	15	0	22.73	22.60	22.67	23	1
3	16QAM	1	0	22.87	22.34	22.05		
3	16QAM	1	8	22.83	22.38	22.10		
3	16QAM	1	14	22.04	21.95	21.77	22	2
3	16QAM	8	0	21.68	21.61	21.72		
3	16QAM	8	4	21.74	21.61	21.63		
3	16QAM	8	7	21.74	21.55	21.73	22	2
3	16QAM	8	7	21.74	21.55	21.73		
3	16QAM	15	0	21.77	21.64	21.63		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.55	23.36	23.50	24	0
1.4	QPSK	1	3	23.59	23.33	23.48		
1.4	QPSK	1	5	23.53	23.35	23.39		
1.4	QPSK	3	0	23.53	23.43	23.63	24	0
1.4	QPSK	3	1	23.56	23.52	23.60		
1.4	QPSK	3	3	23.54	23.56	23.62		
1.4	QPSK	6	0	22.53	22.46	22.56	23	1
1.4	16QAM	1	0	22.17	21.92	22.67	23	1
1.4	16QAM	1	3	22.53	22.06	22.69		
1.4	16QAM	1	5	21.91	22.26	22.19		
1.4	16QAM	3	0	22.23	22.36	22.48	23	1
1.4	16QAM	3	1	22.45	22.69	22.61		
1.4	16QAM	3	3	22.54	22.52	22.41		
1.4	16QAM	6	0	21.47	21.36	21.53	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.35	23.45	23.63	24	0
20	QPSK	1	49	23.37	23.38	23.64		
20	QPSK	1	99	23.40	23.14	23.11		
20	QPSK	50	0	22.43	22.37	22.64	23	1
20	QPSK	50	24	22.39	22.35	22.66		
20	QPSK	50	50	22.50	22.37	22.53		
20	QPSK	100	0	22.43	22.43	22.65		
20	16QAM	1	0	21.64	22.32	22.38	23	1
20	16QAM	1	49	21.69	22.52	22.61		
20	16QAM	1	99	21.85	22.00	21.84		
20	16QAM	50	0	21.50	21.36	21.62	22	2
20	16QAM	50	24	21.46	21.35	21.63		
20	16QAM	50	50	21.49	21.38	21.58		
20	16QAM	100	0	21.40	21.50	21.60		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.43	23.38	23.66	24	0
15	QPSK	1	37	23.42	23.64	23.63		
15	QPSK	1	74	23.84	23.39	23.65		
15	QPSK	36	0	22.73	22.70	23.00	23	1
15	QPSK	36	20	22.74	22.66	22.80		
15	QPSK	36	39	22.76	22.69	22.79		
15	QPSK	75	0	22.75	22.71	22.88		
15	16QAM	1	0	22.16	22.41	22.68	23	1
15	16QAM	1	37	22.92	22.68	22.94		
15	16QAM	1	74	23.00	22.39	22.94		
15	16QAM	36	0	21.66	21.79	21.96	22	2
15	16QAM	36	20	21.80	21.58	21.88		
15	16QAM	36	39	21.81	21.69	21.82		
15	16QAM	75	0	21.73	21.73	21.88		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.33	23.31	23.56	24	0
10	QPSK	1	25	23.68	23.68	23.82		
10	QPSK	1	49	23.52	23.39	23.45		
10	QPSK	25	0	22.67	22.63	22.82	23	1
10	QPSK	25	12	22.68	22.57	22.81		
10	QPSK	25	25	22.69	22.64	22.84		
10	QPSK	50	0	22.70	22.62	22.76		
10	16QAM	1	0	22.08	22.31	22.55	23	1
10	16QAM	1	25	22.34	22.71	22.93		
10	16QAM	1	49	22.07	21.82	22.21		
10	16QAM	25	0	21.84	21.63	21.89	22	2
10	16QAM	25	12	21.76	21.58	21.88		
10	16QAM	25	25	21.76	21.64	21.72		
10	16QAM	50	0	21.78	21.63	21.74		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.31	23.48	23.74	24	0
5	QPSK	1	12	23.74	23.79	23.82		
5	QPSK	1	24	23.56	23.48	23.70		
5	QPSK	12	0	22.63	22.77	22.79	23	1
5	QPSK	12	7	22.84	22.69	22.86		
5	QPSK	12	13	22.80	22.65	22.87		
5	QPSK	25	0	22.80	22.67	22.73	23	1
5	16QAM	1	0	22.74	22.70	22.86		
5	16QAM	1	12	22.86	22.69	22.73		
5	16QAM	1	24	22.08	22.33	22.17	22	2
5	16QAM	12	0	21.60	21.60	21.67		
5	16QAM	12	7	21.92	21.70	21.87		
5	16QAM	12	13	21.79	21.58	21.89	22	2
5	16QAM	12	13	21.79	21.58	21.89		
5	16QAM	25	0	21.76	21.59	21.94		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.61	23.70	23.65	24	0
3	QPSK	1	8	23.79	23.63	23.84		
3	QPSK	1	14	23.83	23.66	23.81		
3	QPSK	8	0	22.84	22.92	22.83	23	1
3	QPSK	8	4	22.98	22.88	22.88		
3	QPSK	8	7	22.92	22.91	22.87		
3	QPSK	15	0	22.94	22.88	22.86	23	1
3	16QAM	1	0	22.22	22.10	22.68		
3	16QAM	1	8	22.21	22.66	22.48		
3	16QAM	1	14	22.16	22.66	22.55	22	2
3	16QAM	8	0	21.66	21.87	21.83		
3	16QAM	8	4	21.98	21.95	21.85		
3	16QAM	8	7	21.96	21.96	21.88	22	2
3	16QAM	8	7	21.96	21.96	21.88		
3	16QAM	15	0	21.98	21.89	21.95		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.84	23.75	23.71	24	0
1.4	QPSK	1	3	23.83	23.85	23.86		
1.4	QPSK	1	5	23.73	23.58	23.60		
1.4	QPSK	3	0	23.86	23.85	23.90		
1.4	QPSK	3	1	23.83	23.78	23.86		
1.4	QPSK	3	3	23.87	23.81	23.92		
1.4	QPSK	6	0	22.94	22.98	22.84	23	1
1.4	16QAM	1	0	22.39	22.99	22.23	23	1
1.4	16QAM	1	3	22.49	22.97	22.81		
1.4	16QAM	1	5	22.31	22.24	22.97		
1.4	16QAM	3	0	22.61	22.80	22.87		
1.4	16QAM	3	1	22.89	22.83	22.78		
1.4	16QAM	3	3	22.86	22.80	22.74		
1.4	16QAM	6	0	21.71	21.69	21.86	22	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.48	23.46	23.42	24	0
10	QPSK	1	25	23.32	23.42	23.38		
10	QPSK	1	49	23.36	23.40	23.31		
10	QPSK	25	0	22.80	22.79	22.59	23	1
10	QPSK	25	12	22.71	22.71	22.59		
10	QPSK	25	25	22.60	22.77	22.49		
10	QPSK	50	0	22.78	22.57	22.52		
10	16QAM	1	0	22.09	22.13	22.07	23	1
10	16QAM	1	25	22.52	22.42	22.75		
10	16QAM	1	49	22.27	22.15	21.92		
10	16QAM	25	0	21.20	21.29	21.33	22	2
10	16QAM	25	12	21.42	21.31	21.25		
10	16QAM	25	25	21.38	21.30	21.27		
10	16QAM	50	0	21.28	21.22	21.23		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.27	23.26	23.30	24	0
5	QPSK	1	12	23.25	23.27	23.37		
5	QPSK	1	24	23.27	23.21	23.25		
5	QPSK	12	0	22.82	22.92	22.84	23	1
5	QPSK	12	7	22.85	22.96	22.84		
5	QPSK	12	13	22.81	22.93	22.70		
5	QPSK	25	0	22.81	22.96	22.85		
5	16QAM	1	0	22.99	22.77	22.98	23	1
5	16QAM	1	12	22.54	22.63	22.95		
5	16QAM	1	24	22.44	22.91	21.79		
5	16QAM	12	0	21.16	21.28	21.30	22	2
5	16QAM	12	7	21.20	21.24	21.25		
5	16QAM	12	13	21.14	21.16	21.20		
5	16QAM	25	0	21.10	21.27	21.40		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.16	23.17	23.16	24	0
3	QPSK	1	8	23.20	23.15	23.21		
3	QPSK	1	14	23.14	23.17	23.15		
3	QPSK	8	0	22.95	22.95	23.00	23	1
3	QPSK	8	4	22.90	22.93	22.83		
3	QPSK	8	7	22.71	22.97	22.87		
3	QPSK	15	0	22.78	22.98	22.90		
3	16QAM	1	0	22.97	22.92	22.38	23	1
3	16QAM	1	8	22.34	22.92	22.34		
3	16QAM	1	14	22.57	22.94	21.99		
3	16QAM	8	0	21.19	21.15	21.21	22	2
3	16QAM	8	4	21.14	21.10	21.13		
3	16QAM	8	7	21.09	21.05	21.04		
3	16QAM	15	0	20.95	20.97	20.95		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.07	23.11	23.08	24	0
1.4	QPSK	1	3	22.97	23.08	22.96		
1.4	QPSK	1	5	22.89	23.08	22.91		
1.4	QPSK	3	0	23.14	23.09	23.17		
1.4	QPSK	3	1	23.18	23.17	23.08		
1.4	QPSK	3	3	23.11	23.19	23.06		
1.4	QPSK	6	0	22.94	22.95	22.83	23	1
1.4	16QAM	1	0	22.62	22.55	22.32	23	1
1.4	16QAM	1	3	22.54	22.90	22.79		
1.4	16QAM	1	5	22.37	22.54	22.53		
1.4	16QAM	3	0	22.63	22.73	22.69		
1.4	16QAM	3	1	22.71	22.80	22.62		
1.4	16QAM	3	3	22.59	22.78	22.57		
1.4	16QAM	6	0	21.16	21.19	21.11	22	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.25			24	0
10	QPSK	1	25	23.21				
10	QPSK	1	49	23.03				
10	QPSK	25	0	22.19			23	1
10	QPSK	25	12	22.04				
10	QPSK	25	25	22.04				
10	QPSK	50	0	22.09				
10	16QAM	1	0	21.45			23	1
10	16QAM	1	25	21.52				
10	16QAM	1	49	21.34				
10	16QAM	25	0	21.22			22	2
10	16QAM	25	12	21.04				
10	16QAM	25	25	21.12				
10	16QAM	50	0	21.02				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.11	22.71	22.87	24	0
5	QPSK	1	12	23.17	23.24	23.09		
5	QPSK	1	24	23.11	22.87	22.88		
5	QPSK	12	0	22.13	22.09	21.97	23	1
5	QPSK	12	7	22.16	22.11	22.02		
5	QPSK	12	13	22.15	21.97	21.98		
5	QPSK	25	0	22.06	22.00	22.03		
5	16QAM	1	0	21.71	21.46	21.67	23	1
5	16QAM	1	12	21.76	22.23	21.84		
5	16QAM	1	24	21.88	21.19	21.38		
5	16QAM	12	0	20.73	20.98	20.86	22	2
5	16QAM	12	7	21.03	21.09	21.09		
5	16QAM	12	13	21.03	20.92	20.99		
5	16QAM	25	0	21.15	21.05	21.00		



<Hotspot Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	14.85	15.12	14.83	16	0
20	QPSK	1	49	15.38	15.14	15.12		
20	QPSK	1	99	15.15	15.10	15.08		
20	QPSK	50	0	15.24	15.08	15.10	16	0
20	QPSK	50	24	15.13	15.03	15.01		
20	QPSK	50	50	15.06	14.92	14.98		
20	QPSK	100	0	15.08	15.06	15.02	16	0
20	16QAM	1	0	14.70	14.78	14.57		
20	16QAM	1	49	14.74	15.05	14.58		
20	16QAM	1	99	14.53	14.99	15.19	16	0
20	16QAM	50	0	15.04	15.06	15.12		
20	16QAM	50	24	15.31	14.70	15.02		
20	16QAM	50	50	15.21	14.72	15.01	16	0
20	16QAM	100	0	15.08	15.20	15.01		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	14.94	14.94	15.07	16	0
15	QPSK	1	37	15.36	15.36	15.03		
15	QPSK	1	74	15.07	15.07	15.04		
15	QPSK	36	0	15.15	15.15	15.02	16	0
15	QPSK	36	20	15.05	15.05	15.06		
15	QPSK	36	39	14.99	14.99	14.96		
15	QPSK	75	0	15.17	15.17	15.04	16	0
15	16QAM	1	0	15.04	15.04	14.60		
15	16QAM	1	37	15.37	15.37	14.59		
15	16QAM	1	74	15.19	15.19	14.44	16	0
15	16QAM	36	0	15.15	15.15	15.09		
15	16QAM	36	20	15.13	15.13	15.15		
15	16QAM	36	39	15.06	15.06	15.17	16	0
15	16QAM	75	0	15.18	15.18	15.13		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	14.89	14.92	14.92	16	0
10	QPSK	1	25	15.34	15.15	15.08		
10	QPSK	1	49	14.98	14.74	14.78		
10	QPSK	25	0	15.09	15.14	15.05	16	0
10	QPSK	25	12	15.09	15.13	14.99		
10	QPSK	25	25	15.07	15.04	15.06		
10	QPSK	50	0	15.09	15.09	14.97	16	0
10	16QAM	1	0	14.87	14.81	14.58		
10	16QAM	1	25	15.35	15.29	14.82		
10	16QAM	1	49	14.56	14.53	14.72	16	0
10	16QAM	25	0	15.21	15.17	15.05		
10	16QAM	25	12	15.20	15.24	15.12		
10	16QAM	25	25	15.08	15.08	15.01	16	0
10	16QAM	50	0	15.10	15.17	15.06		



FCC SAR TEST REPORT

Report No. : FA892624

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	14.88	14.90	14.78	16	0
5	QPSK	1	12	14.98	14.93	14.90		
5	QPSK	1	24	14.91	14.70	14.69		
5	QPSK	12	0	15.09	15.09	14.96	16	0
5	QPSK	12	7	15.07	15.00	14.99		
5	QPSK	12	13	15.01	15.07	14.91		
5	QPSK	25	0	15.07	15.09	15.00		
5	16QAM	1	0	15.20	15.15	14.34	16	0
5	16QAM	1	12	15.12	14.98	14.70		
5	16QAM	1	24	14.99	14.64	14.72		
5	16QAM	12	0	15.21	14.99	15.20	16	0
5	16QAM	12	7	15.29	14.89	15.23		
5	16QAM	12	13	15.24	14.86	15.14		
5	16QAM	25	0	15.07	15.06	15.01		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.12	15.00	15.15	16	0
3	QPSK	1	8	15.10	14.92	15.07		
3	QPSK	1	14	15.10	14.91	14.78		
3	QPSK	8	0	15.08	15.00	15.12	16	0
3	QPSK	8	4	15.03	15.05	15.09		
3	QPSK	8	7	15.03	15.04	15.11		
3	QPSK	15	0	15.11	15.02	15.07		
3	16QAM	1	0	14.56	15.16	15.19	16	0
3	16QAM	1	8	13.66	15.16	15.14		
3	16QAM	1	14	13.48	15.12	14.80		
3	16QAM	8	0	13.36	15.18	15.15	16	0
3	16QAM	8	4	13.41	15.02	15.02		
3	16QAM	8	7	13.40	15.21	15.04		
3	16QAM	15	0	13.36	15.18	14.86		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.01	14.99	15.11	16	0
1.4	QPSK	1	3	14.73	15.06	15.17		
1.4	QPSK	1	5	14.87	14.99	15.08		
1.4	QPSK	3	0	15.01	15.00	15.13		
1.4	QPSK	3	1	14.92	15.15	15.17		
1.4	QPSK	3	3	14.87	15.12	15.12		
1.4	QPSK	6	0	14.88	15.02	15.03	16	0
1.4	16QAM	1	0	14.59	14.57	15.27	16	0
1.4	16QAM	1	3	14.72	14.77	14.91		
1.4	16QAM	1	5	14.52	13.80	14.56		
1.4	16QAM	3	0	14.97	13.37	15.02		
1.4	16QAM	3	1	14.87	13.40	14.97		
1.4	16QAM	3	3	15.04	13.35	14.95		
1.4	16QAM	6	0	14.95	13.44	15.08	16	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.09	16.13	16.05	17	0
20	QPSK	1	49	16.29	16.39	16.35		
20	QPSK	1	99	15.94	16.10	16.15		
20	QPSK	50	0	16.17	16.27	16.25	17	0
20	QPSK	50	24	16.07	16.15	16.24		
20	QPSK	50	50	16.14	16.04	16.03		
20	QPSK	100	0	16.15	16.21	16.18		
20	16QAM	1	0	15.63	15.86	15.70	17	0
20	16QAM	1	49	16.32	16.34	15.63		
20	16QAM	1	99	16.38	15.47	15.27		
20	16QAM	50	0	16.11	16.27	16.18	17	0
20	16QAM	50	24	16.20	16.27	16.17		
20	16QAM	50	50	16.21	16.19	16.09		
20	16QAM	100	0	16.20	16.08	16.07		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.93	15.63	15.70	17	0
15	QPSK	1	37	16.03	16.32	15.63		
15	QPSK	1	74	15.94	16.38	15.27		
15	QPSK	36	0	16.17	16.11	16.18	17	0
15	QPSK	36	20	16.07	16.20	16.17		
15	QPSK	36	39	16.14	16.21	16.09		
15	QPSK	75	0	16.18	16.20	16.07		
15	16QAM	1	0	15.86	16.19	15.99	17	0
15	16QAM	1	37	16.34	16.08	16.25		
15	16QAM	1	74	15.47	16.08	16.15		
15	16QAM	36	0	16.27	15.99	16.04	17	0
15	16QAM	36	20	16.27	15.45	16.16		
15	16QAM	36	39	16.19	16.33	15.86		
15	16QAM	75	0	16.08	15.99	16.03		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.16	16.08	16.09	17	0
10	QPSK	1	25	15.86	15.99	16.07		
10	QPSK	1	49	16.34	15.45	15.98		
10	QPSK	25	0	15.47	16.33	15.98	17	0
10	QPSK	25	12	16.27	15.99	15.59		
10	QPSK	25	25	16.27	15.45	16.26		
10	QPSK	50	0	16.19	16.33	16.25		
10	16QAM	1	0	16.08	16.25	16.25	17	0
10	16QAM	1	25	16.08	16.08	16.15		
10	16QAM	1	49	16.15	16.14	16.04		
10	16QAM	25	0	16.04	15.87	16.16	17	0
10	16QAM	25	12	16.16	16.22	15.86		
10	16QAM	25	25	15.86	16.19	16.34		
10	16QAM	50	0	16.03	16.16	15.47		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.01	15.98	16.08	17	0
5	QPSK	1	12	16.25	16.28	16.27		
5	QPSK	1	24	15.97	15.98	16.10		
5	QPSK	12	0	15.95	16.22	16.19	17	0
5	QPSK	12	7	16.09	16.16	16.26		
5	QPSK	12	13	16.15	16.14	16.26		
5	QPSK	25	0	16.09	16.12	16.27		
5	16QAM	1	0	15.57	15.62	15.81	17	0
5	16QAM	1	12	15.85	15.89	16.38		
5	16QAM	1	24	15.33	15.47	16.31		
5	16QAM	12	0	16.00	16.00	16.14	17	0
5	16QAM	12	7	16.19	16.10	16.13		
5	16QAM	12	13	16.11	16.15	16.23		
5	16QAM	25	0	16.25	16.25	16.29		
5	16QAM	25	0	16.25	16.25	16.29		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.97	16.30	16.19	17	0
3	QPSK	1	8	15.94	16.25	16.12		
3	QPSK	1	14	15.94	16.18	16.08		
3	QPSK	8	0	16.00	16.30	16.08	17	0
3	QPSK	8	4	16.24	16.17	16.05		
3	QPSK	8	7	16.17	16.20	16.12		
3	QPSK	15	0	16.00	16.15	16.10		
3	16QAM	1	0	15.41	15.59	15.52	17	0
3	16QAM	1	8	15.55	15.46	15.59		
3	16QAM	1	14	15.55	15.51	15.46		
3	16QAM	8	0	16.03	16.02	15.81	17	0
3	16QAM	8	4	16.15	16.16	16.04		
3	16QAM	8	7	16.28	16.17	16.13		
3	16QAM	8	7	16.28	16.17	16.13		
3	16QAM	15	0	16.16	16.01	16.17		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.01	16.20	16.05	17	0
1.4	QPSK	1	3	16.17	16.21	16.19		
1.4	QPSK	1	5	16.06	16.12	16.13		
1.4	QPSK	3	0	16.06	16.19	16.15		
1.4	QPSK	3	1	16.22	16.22	16.18		
1.4	QPSK	3	3	16.23	16.32	16.15		
1.4	QPSK	6	0	16.09	16.09	16.11	17	0
1.4	16QAM	1	0	16.17	16.01	16.31	17	0
1.4	16QAM	1	3	16.37	16.35	15.68		
1.4	16QAM	1	5	16.29	16.36	15.45		
1.4	16QAM	3	0	16.04	16.35	15.92		
1.4	16QAM	3	1	16.32	16.37	15.94		
1.4	16QAM	3	3	16.32	16.25	16.09		
1.4	16QAM	6	0	16.25	16.18	15.89		



<Near to body Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.89	15.82	15.63	16.5	0
20	QPSK	1	49	15.86	15.62	15.62		
20	QPSK	1	99	15.56	15.77	15.57		
20	QPSK	50	0	15.83	15.66	15.79	16.5	0
20	QPSK	50	24	15.70	15.59	15.51		
20	QPSK	50	50	15.52	15.60	15.51		
20	QPSK	100	0	15.60	15.56	15.42		
20	16QAM	1	0	15.18	15.75	15.26	16.5	0
20	16QAM	1	49	15.41	15.83	15.03		
20	16QAM	1	99	15.23	15.67	15.13		
20	16QAM	50	0	15.72	15.83	15.45	16.5	0
20	16QAM	50	24	15.70	15.72	15.63		
20	16QAM	50	50	15.60	15.50	15.63		
20	16QAM	100	0	15.59	15.56	15.54		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.60	15.62	15.58	16.5	0
15	QPSK	1	37	15.73	15.77	15.49		
15	QPSK	1	74	15.58	15.29	15.48		
15	QPSK	36	0	15.73	15.71	15.53	16.5	0
15	QPSK	36	20	15.71	15.61	15.48		
15	QPSK	36	39	15.53	15.41	15.49		
15	QPSK	75	0	15.67	15.54	15.54		
15	16QAM	1	0	15.19	15.83	15.09	16.5	0
15	16QAM	1	37	15.37	15.81	15.78		
15	16QAM	1	74	15.03	15.10	15.65		
15	16QAM	36	0	15.50	15.74	15.43	16.5	0
15	16QAM	36	20	15.60	15.55	15.48		
15	16QAM	36	39	15.52	15.43	15.59		
15	16QAM	75	0	15.55	15.55	15.66		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	15.50	15.56	15.49	16.5	0
10	QPSK	1	25	15.77	15.63	15.61		
10	QPSK	1	49	15.40	15.34	15.45		
10	QPSK	25	0	15.74	15.64	15.61	16.5	0
10	QPSK	25	12	15.74	15.61	15.60		
10	QPSK	25	25	15.62	15.45	15.54		
10	QPSK	50	0	15.75	15.56	15.67		
10	16QAM	1	0	15.32	15.35	15.12	16.5	0
10	16QAM	1	25	15.30	15.27	15.25		
10	16QAM	1	49	15.12	15.18	15.15		
10	16QAM	25	0	15.77	15.68	15.56	16.5	0
10	16QAM	25	12	15.87	15.65	15.54		
10	16QAM	25	25	15.71	15.38	15.56		
10	16QAM	50	0	15.76	15.69	15.57		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.51	15.42	15.33	16.5	0
5	QPSK	1	12	15.61	15.51	15.39		
5	QPSK	1	24	15.32	15.27	15.13		
5	QPSK	12	0	15.61	15.65	15.44	16.5	0
5	QPSK	12	7	15.60	15.56	15.44		
5	QPSK	12	13	15.64	15.53	15.31		
5	QPSK	25	0	15.68	15.54	15.43		
5	16QAM	1	0	15.18	15.68	15.47	16.5	0
5	16QAM	1	12	15.36	15.31	15.50		
5	16QAM	1	24	15.14	15.27	15.04		
5	16QAM	12	0	15.43	15.57	15.39	16.5	0
5	16QAM	12	7	15.60	15.51	15.50		
5	16QAM	12	13	15.45	15.38	15.37		
5	16QAM	25	0	15.69	15.58	15.28		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.65	15.74	15.33	16.5	0
3	QPSK	1	8	15.53	15.51	15.35		
3	QPSK	1	14	15.42	15.26	15.30		
3	QPSK	8	0	15.71	15.60	15.43	16.5	0
3	QPSK	8	4	15.65	15.57	15.38		
3	QPSK	8	7	15.64	15.59	15.40		
3	QPSK	15	0	15.62	15.54	15.43		
3	16QAM	1	0	15.56	15.72	15.54	16.5	0
3	16QAM	1	8	15.01	15.59	15.48		
3	16QAM	1	14	15.03	15.59	15.05		
3	16QAM	8	0	15.56	15.60	15.41	16.5	0
3	16QAM	8	4	15.61	15.66	15.29		
3	16QAM	8	7	15.71	15.67	15.40		
3	16QAM	15	0	15.66	15.52	15.22		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.54	15.42	15.39	16.5	0
1.4	QPSK	1	3	15.60	15.48	15.45		
1.4	QPSK	1	5	15.55	15.38	15.26		
1.4	QPSK	3	0	15.67	15.63	15.52		
1.4	QPSK	3	1	15.81	15.68	15.60		
1.4	QPSK	3	3	15.68	15.71	15.35		
1.4	QPSK	6	0	15.57	15.64	15.45	16.5	0
1.4	16QAM	1	0	15.26	15.04	15.33	16.5	0
1.4	16QAM	1	3	15.47	15.32	15.14		
1.4	16QAM	1	5	15.19	15.11	15.01		
1.4	16QAM	3	0	15.48	15.50	15.33		
1.4	16QAM	3	1	15.70	15.83	15.51		
1.4	16QAM	3	3	15.54	15.49	15.25		
1.4	16QAM	6	0	15.46	15.45	15.30	16.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.09	16.13	16.05	17	0
20	QPSK	1	49	16.29	16.39	16.35		
20	QPSK	1	99	15.94	16.10	16.15		
20	QPSK	50	0	16.17	16.27	16.25	17	0
20	QPSK	50	24	16.07	16.15	16.24		
20	QPSK	50	50	16.14	16.04	16.03		
20	QPSK	100	0	16.15	16.21	16.18		
20	16QAM	1	0	15.63	15.86	15.70	17	0
20	16QAM	1	49	16.32	16.34	15.63		
20	16QAM	1	99	16.38	15.47	15.27		
20	16QAM	50	0	16.11	16.27	16.18	17	0
20	16QAM	50	24	16.20	16.27	16.17		
20	16QAM	50	50	16.21	16.19	16.09		
20	16QAM	100	0	16.20	16.08	16.07		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.93	15.63	15.70	17	0
15	QPSK	1	37	16.03	16.32	15.63		
15	QPSK	1	74	15.94	16.38	15.27		
15	QPSK	36	0	16.17	16.11	16.18	17	0
15	QPSK	36	20	16.07	16.20	16.17		
15	QPSK	36	39	16.14	16.21	16.09		
15	QPSK	75	0	16.18	16.20	16.07		
15	16QAM	1	0	15.86	16.19	15.99	17	0
15	16QAM	1	37	16.34	16.08	16.25		
15	16QAM	1	74	15.47	16.08	16.15		
15	16QAM	36	0	16.27	15.99	16.04	17	0
15	16QAM	36	20	16.27	15.45	16.16		
15	16QAM	36	39	16.19	16.33	15.86		
15	16QAM	75	0	16.08	15.99	16.03		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.16	16.08	16.09	17	0
10	QPSK	1	25	15.86	15.99	16.07		
10	QPSK	1	49	16.34	15.45	15.98		
10	QPSK	25	0	15.47	16.33	15.98	17	0
10	QPSK	25	12	16.27	15.99	15.59		
10	QPSK	25	25	16.27	15.45	16.26		
10	QPSK	50	0	16.19	16.33	16.25		
10	16QAM	1	0	16.08	16.25	16.25	17	0
10	16QAM	1	25	16.08	16.08	16.15		
10	16QAM	1	49	16.15	16.14	16.04		
10	16QAM	25	0	16.04	15.87	16.16	17	0
10	16QAM	25	12	16.16	16.22	15.86		
10	16QAM	25	25	15.86	16.19	16.34		
10	16QAM	50	0	16.03	16.16	15.47		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.01	15.98	16.08	17	0
5	QPSK	1	12	16.25	16.28	16.27		
5	QPSK	1	24	15.97	15.98	16.10		
5	QPSK	12	0	15.95	16.22	16.19	17	0
5	QPSK	12	7	16.09	16.16	16.26		
5	QPSK	12	13	16.15	16.14	16.26		
5	QPSK	25	0	16.09	16.12	16.27		
5	16QAM	1	0	15.57	15.62	15.81	17	0
5	16QAM	1	12	15.85	15.89	16.38		
5	16QAM	1	24	15.33	15.47	16.31		
5	16QAM	12	0	16.00	16.00	16.14	17	0
5	16QAM	12	7	16.19	16.10	16.13		
5	16QAM	12	13	16.11	16.15	16.23		
5	16QAM	25	0	16.25	16.25	16.29		
5	16QAM	25	0	16.25	16.25	16.29		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.97	16.30	16.19	17	0
3	QPSK	1	8	15.94	16.25	16.12		
3	QPSK	1	14	15.94	16.18	16.08		
3	QPSK	8	0	16.00	16.30	16.08	17	0
3	QPSK	8	4	16.24	16.17	16.05		
3	QPSK	8	7	16.17	16.20	16.12		
3	QPSK	15	0	16.00	16.15	16.10		
3	16QAM	1	0	15.41	15.59	15.52	17	0
3	16QAM	1	8	15.55	15.46	15.59		
3	16QAM	1	14	15.55	15.51	15.46		
3	16QAM	8	0	16.03	16.02	15.81	17	0
3	16QAM	8	4	16.15	16.16	16.04		
3	16QAM	8	7	16.28	16.17	16.13		
3	16QAM	8	7	16.28	16.17	16.13		
3	16QAM	15	0	16.16	16.01	16.17		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.01	16.20	16.05	17	0
1.4	QPSK	1	3	16.17	16.21	16.19		
1.4	QPSK	1	5	16.06	16.12	16.13		
1.4	QPSK	3	0	16.06	16.19	16.15		
1.4	QPSK	3	1	16.22	16.22	16.18		
1.4	QPSK	3	3	16.23	16.32	16.15		
1.4	QPSK	6	0	16.09	16.09	16.11	17	0
1.4	16QAM	1	0	16.17	16.01	16.31	17	0
1.4	16QAM	1	3	16.37	16.35	15.68		
1.4	16QAM	1	5	16.29	16.36	15.45		
1.4	16QAM	3	0	16.04	16.35	15.92		
1.4	16QAM	3	1	16.32	16.37	15.94		
1.4	16QAM	3	3	16.32	16.25	16.09		
1.4	16QAM	6	0	16.25	16.18	15.89		

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Default Power Mode>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.78	18.00	97.63
		6	2437	17.84	18.00	
		11	2462	17.95	18.00	
	802.11g 6Mbps	1	2412	10.22	10.50	87.22
		6	2437	10.30	10.50	
		11	2462	10.29	10.50	
	802.11n-HT20 MCS0	1	2412	9.45	9.50	86.20
		6	2437	9.24	9.50	
		11	2462	9.26	9.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	15.76	16.00	87.58
		40	5200	15.70	16.00	
		44	5220	15.80	16.00	
		48	5240	15.68	16.00	
	802.11n-HT20 MCS0	36	5180	9.83	10.00	86.53
		40	5200	9.73	10.00	
		44	5220	9.92	10.00	
		48	5240	9.76	10.00	
	802.11n-HT40 MCS0	38	5190	9.73	10.00	85.76
		46	5230	9.99	10.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.57	16.00	87.58
		56	5280	15.65	16.00	
		60	5300	15.75	16.00	
		64	5320	15.73	16.00	
	802.11n-HT20 MCS0	52	5260	9.74	10.00	86.53
		56	5280	9.88	10.00	
		60	5300	9.99	10.00	
		64	5320	9.98	10.00	
	802.11n-HT40 MCS0	54	5270	9.58	10.00	85.76
		62	5310	9.78	10.00	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	15.79	16.00	87.58
		116	5580	15.70	16.00	
		124	5620	15.65	16.00	
		132	5660	15.64	16.00	
		144	5720	15.90	16.00	
	802.11n-HT20 MCS0	100	5500	9.79	10.00	86.53
		116	5580	9.94	10.00	
		124	5620	9.81	10.00	
		132	5660	9.83	10.00	
		144	5720	9.99	10.00	
	802.11n-HT40 MCS0	102	5510	9.77	10.00	85.76
		110	5550	9.67	10.00	
		126	5630	9.57	10.00	
		134	5670	9.68	10.00	
142		5710	9.88	10.00		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	15.66	16.00	87.58
		157	5785	15.70	16.00	
		165	5825	15.82	16.00	
	802.11n-HT20 MCS0	149	5745	9.85	10.00	86.53
		157	5785	9.98	10.00	
		165	5825	9.89	10.00	
	802.11n-HT40 MCS0	151	5755	9.91	10.00	85.76
		159	5795	9.75	10.00	

<At-head Power Mode>

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	12.28	13.00	87.58
		40	5200	12.25	13.00	
		44	5220	12.26	13.00	
		48	5240	12.23	13.00	
	802.11n-HT20 MCS0	36	5180	9.83	10.00	86.53
		40	5200	9.86	10.00	
		44	5220	9.92	10.00	
		48	5240	9.76	10.00	
	802.11n-HT40 MCS0	38	5190	9.73	10.00	85.76
		46	5230	9.99	10.00	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	12.30	13.00	87.58
		56	5280	12.23	13.00	
		60	5300	12.31	13.00	
		64	5320	12.20	13.00	
	802.11n-HT20 MCS0	52	5260	9.74	10.00	86.53
		56	5280	9.79	10.00	
		60	5300	9.99	10.00	
		64	5320	9.98	10.00	
	802.11n-HT40 MCS0	54	5270	9.58	10.00	85.76
		62	5310	9.78	10.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	12.19	13.00	87.58
		116	5580	12.35	13.00	
		124	5620	12.19	13.00	
		132	5660	12.25	13.00	
		144	5720	12.33	13.00	
	802.11n-HT20 MCS0	100	5500	9.79	10.00	86.53
		116	5580	9.94	10.00	
		124	5620	9.72	10.00	
		132	5660	9.70	10.00	
		144	5720	9.99	10.00	
	802.11n-HT40 MCS0	102	5510	9.77	10.00	85.76
		110	5550	9.67	10.00	
		126	5630	9.52	10.00	
		134	5670	9.68	10.00	
142		5710	9.88	10.00		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	12.21	13.00	87.58
		157	5785	12.23	13.00	
		165	5825	12.25	13.00	
	802.11n-HT20 MCS0	149	5745	9.85	10.00	86.53
		157	5785	9.98	10.00	
		165	5825	9.89	10.00	
	802.11n-HT40 MCS0	151	5755	9.91	10.00	85.76
		159	5795	9.75	10.00	



<Hotspot Power Mode>

<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		36	5180	14.91	15.00
		40	5200	14.88	15.00	
		44	5220	14.90	15.00	
		48	5240	14.63	15.00	
802.11n-HT20 MCS0		36	5180	9.83	10.00	86.53
		40	5200	9.86	10.00	
		44	5220	9.92	10.00	
		48	5240	9.76	10.00	
802.11n-HT40 MCS0		38	5190	9.73	10.00	85.76
		46	5230	9.99	10.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0		149	5745	14.68	15.00
		157	5785	14.88	15.00	
		165	5825	14.69	15.00	
802.11n-HT20 MCS0		149	5745	9.85	10.00	86.53
		157	5785	9.98	10.00	
		165	5825	9.89	10.00	
802.11n-HT40 MCS0		151	5755	9.91	10.00	85.76
		159	5795	9.75	10.00	

<2.4GHz Bluetooth default power mode>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	11.19	9.16	9.17
	CH 39	2441	10.09	8.13	8.14
	CH 78	2480	10.35	8.28	8.29
Tune-up Limit			12.00	10.00	10.00


Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	1.72
	CH 19	2440	0.72
	CH 39	2480	1.14
Tune-up Limit			2.00

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.13% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

12. Antenna Location

<Mobile Phone>

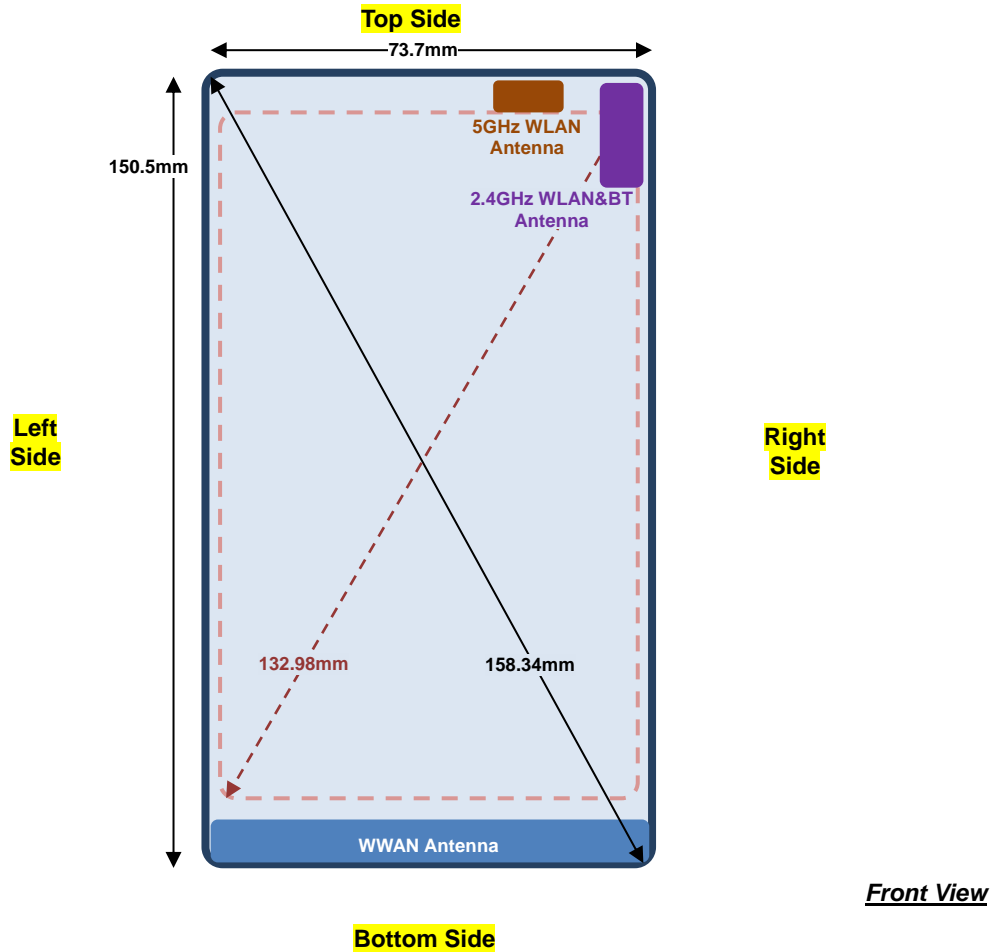

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	> 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. While operating in "Front" and "Back" configuration by end user, the device will limit different maximum output powers on the GSM1900, WCDMA B2, CDMA BC1 and LTE B2 / B4 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
6. While operating in body-adjacent exposure configuration during a mobile hotspot session, the device will reduced output powers on the GSM1900, WCDMA B2, CDMA BC1 and LTE B2 / B4 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
7. The device utilizes independent power reduction mechanisms for SAR compliance for the 5GHz WLAN transmitter for held-to-ear, near to body and hotspot exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description.
8. For front and back position at hotspot exposure condition was choose higher power level for SAR compliance of GSM1900, WCDMA B2, CDMA BC1, LTE B2 and 5.8GHz WLAN.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

**UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

CDMA Note:

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



13.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	251	848.8	26.55	27.50	1.245	0.01	0.472	0.587
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	251	848.8	26.55	27.50	1.245	0.06	0.310	0.386
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	251	848.8	26.55	27.50	1.245	0.02	0.469	0.584
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	251	848.8	26.55	27.50	1.245	0.05	0.316	0.393
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	810	1909.8	23.32	25.00	1.472	0.12	0.227	0.334
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	810	1909.8	23.32	25.00	1.472	0.06	0.181	0.266
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	810	1909.8	23.32	25.00	1.472	0.14	0.360	0.530
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	810	1909.8	23.32	25.00	1.472	0.03	0.182	0.268

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	23.74	24.00	1.062	-0.01	0.529	0.562
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	23.74	24.00	1.062	0.01	0.427	0.453
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	23.74	24.00	1.062	0.18	0.773	0.821
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	23.59	24.00	1.099	0.12	0.868	0.954
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	23.65	24.00	1.084	-0.02	0.829	0.899
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	23.74	24.00	1.062	0.10	0.349	0.371
04	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	23.97	24.00	1.007	-0.05	0.730	0.735
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	23.97	24.00	1.007	0.05	0.453	0.456
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	23.97	24.00	1.007	0.06	0.727	0.732
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	23.97	24.00	1.007	-0.03	0.477	0.480

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	1xRTT RC3 SO55	Right Cheek	0mm	384	836.52	24.11	24.50	1.094	0.00	0.553	0.605
	CDMA BC0	1xRTT RC3 SO55	Right Tilted	0mm	384	836.52	24.11	24.50	1.094	0.05	0.347	0.380
05	CDMA BC0	1xRTT RC3 SO55	Left Cheek	0mm	384	836.52	24.11	24.50	1.094	-0.03	0.561	0.614
	CDMA BC0	1xRTT RC3 SO55	Left Tilted	0mm	384	836.52	24.11	24.50	1.094	0.08	0.351	0.384
	CDMA BC1	1xRTT RC3 SO55	Right Cheek	0mm	1175	1908.75	24.39	24.50	1.026	-0.13	0.626	0.642
	CDMA BC1	1xRTT RC3 SO55	Right Tilted	0mm	1175	1908.75	24.39	24.50	1.026	0.07	0.506	0.519
06	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	1175	1908.75	24.39	24.50	1.026	0.01	0.820	0.841
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	25	1851.25	24.38	24.50	1.028	0.01	0.790	0.812
	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	600	1880	24.34	24.50	1.038	0.01	0.740	0.768
	CDMA BC1	1xRTT RC3 SO55	Left Tilted	0mm	1175	1908.75	24.39	24.50	1.026	0.19	0.531	0.545
	CDMA BC10	1xRTT RC3 SO55	Right Cheek	0mm	580	820.5	24.14	24.50	1.086	0.01	0.610	0.663
	CDMA BC10	1xRTT RC3 SO55	Right Tilted	0mm	580	820.5	24.14	24.50	1.086	-0.06	0.377	0.410
07	CDMA BC10	1xRTT RC3 SO55	Left Cheek	0mm	580	820.5	24.14	24.50	1.086	-0.01	0.648	0.704
	CDMA BC10	1xRTT RC3 SO55	Left Tilted	0mm	580	820.5	24.14	24.50	1.086	0.08	0.416	0.452



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	49	Right Cheek	0mm	19100	1900	23.63	24.00	1.089	-0.13	0.613	0.668
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	19100	1900	22.68	23.00	1.076	0.00	0.369	0.397
	LTE Band 2	20M	QPSK	1	49	Right Tilted	0mm	19100	1900	23.63	24.00	1.089	0.07	0.496	0.540
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	19100	1900	22.68	23.00	1.076	0.02	0.334	0.360
	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	19100	1900	23.63	24.00	1.089	0.06	0.975	1.062
08	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	18700	1860	23.45	24.00	1.135	0.02	1.030	1.169
	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	18900	1880	23.50	24.00	1.122	0.01	1.020	1.144
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	19100	1900	22.68	23.00	1.076	0.05	0.558	0.601
	LTE Band 2	20M	QPSK	100	0	Left Cheek	0mm	19100	1900	22.55	23.00	1.109	0.04	0.594	0.659
	LTE Band 2	20M	QPSK	1	49	Left Tilted	0mm	19100	1900	23.63	24.00	1.089	0.19	0.521	0.567
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	19100	1900	22.68	23.00	1.076	0.05	0.294	0.316
	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	23.45	24.00	1.135	-0.16	0.475	0.539
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	22.37	23.00	1.156	0.02	0.269	0.311
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	23.45	24.00	1.135	0.08	0.494	0.561
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	22.37	23.00	1.156	-0.05	0.275	0.318
09	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	23.45	24.00	1.135	0.18	0.767	0.871
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	22.37	23.00	1.156	-0.04	0.427	0.494
	LTE Band 4	20M	QPSK	100	0	Left Cheek	0mm	20175	1732.5	22.43	23.00	1.140	-0.03	0.424	0.483
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	23.45	24.00	1.135	0.09	0.255	0.289
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	22.37	23.00	1.156	0.18	0.181	0.209
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	23.46	24.00	1.132	-0.13	0.582	0.659
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	20525	836.5	22.79	23.00	1.050	0.06	0.517	0.543
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	23.46	24.00	1.132	-0.05	0.468	0.530
	LTE Band 5	10M	QPSK	25	0	Right Tilted	5mm	20525	836.5	22.79	23.00	1.050	-0.16	0.304	0.319
10	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	23.46	24.00	1.132	0.06	0.602	0.682
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	20525	836.5	22.79	23.00	1.050	-0.06	0.550	0.577
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	23.46	24.00	1.132	-0.13	0.367	0.416
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	20525	836.5	22.79	23.00	1.050	-0.05	0.330	0.346
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	23.25	24.00	1.189	0.07	0.570	0.677
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	22.19	23.00	1.205	-0.02	0.304	0.366
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	23.25	24.00	1.189	0.04	0.372	0.442
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	22.19	23.00	1.205	0.02	0.202	0.243
11	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	23.25	24.00	1.189	-0.06	0.610	0.725
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	22.19	23.00	1.205	-0.04	0.323	0.389
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	23.25	24.00	1.189	0.01	0.377	0.448
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	22.19	23.00	1.205	-0.04	0.204	0.246



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.03	0.440	0.456
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	11	2462	17.95	18.00	1.012	97.63	1.024	0.06	0.390	0.404
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.06	0.995	1.031
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	17.84	18.00	1.038	97.63	1.024	-0.07	0.961	1.021
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.07	0.674	0.698
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	60	5300	12.31	13.00	1.172	87.58	1.142	0.03	0.577	0.772
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	60	5300	12.31	13.00	1.172	87.58	1.142	-0.01	0.652	0.873
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	52	5260	12.30	13.00	1.175	87.58	1.142	-0.02	0.625	0.839
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	60	5300	12.31	13.00	1.172	87.58	1.142	0.04	0.629	0.842
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	52	5260	12.30	13.00	1.175	87.58	1.142	-0.12	0.618	0.829
13	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	60	5300	12.31	13.00	1.172	87.58	1.142	0.09	0.717	0.960
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	52	5260	12.30	13.00	1.175	87.58	1.142	0.11	0.711	0.954
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	116	5580	12.35	13.00	1.161	87.58	1.142	-0.07	0.399	0.529
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	116	5580	12.35	13.00	1.161	87.58	1.142	-0.06	0.467	0.619
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	116	5580	12.35	13.00	1.161	87.58	1.142	0.09	0.492	0.653
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	116	5580	12.35	13.00	1.161	87.58	1.142	0.09	0.630	0.836
14	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	144	5720	12.33	13.00	1.167	87.58	1.142	-0.03	0.742	0.989
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	165	5825	12.25	13.00	1.189	87.58	1.142	0.02	0.569	0.772
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	165	5825	12.25	13.00	1.189	87.58	1.142	-0.03	0.646	0.877
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	157	5785	12.23	13.00	1.194	87.58	1.142	-0.18	0.619	0.844
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	165	5825	12.25	13.00	1.189	87.58	1.142	0.09	0.709	0.962
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	157	5785	12.23	13.00	1.194	87.58	1.142	-0.03	0.661	0.901
15	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	165	5825	12.25	13.00	1.189	87.58	1.142	-0.14	0.719	0.976
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	157	5785	12.23	13.00	1.194	87.58	1.142	0.09	0.679	0.926

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	00	2402	11.19	12.00	1.205	77.13	1.080	0.11	0.069	0.090
	Bluetooth	1Mbps	Right Tilted	0mm	00	2402	11.19	12.00	1.205	77.13	1.080	0.04	0.051	0.066
16	Bluetooth	1Mbps	Left Cheek	0mm	00	2402	11.19	12.00	1.205	77.13	1.080	0.12	0.138	0.180
	Bluetooth	1Mbps	Left Tilted	0mm	00	2402	11.19	12.00	1.205	77.13	1.080	0.01	0.105	0.137

13.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	5mm	251	848.8	26.55	27.50	1.245	0.07	0.554	0.689
	GSM850	GPRS (4 Tx slots)	Back	5mm	251	848.8	26.55	27.50	1.245	-0.01	0.708	0.881
	GSM850	GPRS (4 Tx slots)	Back	5mm	128	824.2	26.42	27.50	1.282	-0.06	0.738	0.946
	GSM850	GPRS (4 Tx slots)	Back	5mm	189	836.4	26.44	27.50	1.276	-0.03	0.750	0.957
	GSM850	GPRS (4 Tx slots)	Left Side	5mm	251	848.8	26.55	27.50	1.245	0.09	1.040	1.294
	GSM850	GPRS (4 Tx slots)	Left Side	5mm	128	824.2	26.42	27.50	1.282	-0.03	0.850	1.090
	GSM850	GPRS (4 Tx slots)	Left Side	5mm	189	836.4	26.44	27.50	1.276	0.02	0.981	1.252
17	GSM850	GPRS (4 Tx slots)	Right Side	5mm	251	848.8	26.55	27.50	1.245	0.04	1.110	1.381
	GSM850	GPRS (4 Tx slots)	Right Side	5mm	128	824.2	26.42	27.50	1.282	-0.03	0.894	1.146
	GSM850	GPRS (4 Tx slots)	Right Side	5mm	189	836.4	26.44	27.50	1.276	-0.01	1.040	1.327
	GSM850	GPRS (4 Tx slots)	Bottom Side	5mm	251	848.8	26.55	27.50	1.245	-0.03	0.141	0.175
	GSM1900	GPRS (4 Tx slots)	Front	5mm	512	1850.2	20.66	22.00	1.361	0.1	0.587	0.799
	GSM1900	GPRS (4 Tx slots)	Back	5mm	512	1850.2	20.66	22.00	1.361	0.06	0.936	1.274
18	GSM1900	GPRS (4 Tx slots)	Back	5mm	661	1880	20.61	22.00	1.377	-0.1	0.935	1.288
	GSM1900	GPRS (4 Tx slots)	Back	5mm	810	1909.8	20.51	22.00	1.409	-0.12	0.806	1.136
	GSM1900	GPRS (4 Tx slots)	Left Side	5mm	512	1850.2	19.49	20.50	1.262	0.01	0.147	0.185
	GSM1900	GPRS (4 Tx slots)	Right Side	5mm	512	1850.2	19.49	20.50	1.262	0.03	0.045	0.057
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	512	1850.2	19.49	20.50	1.262	0.06	0.860	1.085
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	661	1880	19.46	20.50	1.271	0.12	0.999	1.269
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	810	1909.8	19.39	20.50	1.291	0.16	0.869	1.122

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	9400	1880	16.49	17.00	1.125	0.09	0.678	0.762
	WCDMA II	RMC 12.2Kbps	Back	5mm	9400	1880	16.49	17.00	1.125	-0.13	0.966	1.086
19	WCDMA II	RMC 12.2Kbps	Back	5mm	9262	1852.4	16.44	17.00	1.138	-0.13	1.160	1.320
	WCDMA II	RMC 12.2Kbps	Back	5mm	9538	1907.6	16.48	17.00	1.127	-0.1	0.928	1.046
	WCDMA II	RMC 12.2Kbps	Left Side	5mm	9262	1852.4	15.17	16.50	1.358	-0.01	0.201	0.273
	WCDMA II	RMC 12.2Kbps	Right Side	5mm	9262	1852.4	15.17	16.50	1.358	-0.11	0.044	0.060
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	9262	1852.4	15.17	16.50	1.358	0.12	0.968	1.315
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	9400	1880	15.12	16.50	1.374	0.13	0.935	1.285
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	9538	1907.6	15.00	16.50	1.413	0	0.837	1.182
	WCDMA V	RMC 12.2Kbps	Front	5mm	4233	846.6	23.97	24.00	1.007	0.09	0.605	0.609
	WCDMA V	RMC 12.2Kbps	Back	5mm	4233	846.6	23.97	24.00	1.007	0.01	0.916	0.922
	WCDMA V	RMC 12.2Kbps	Back	5mm	4132	826.4	23.94	24.00	1.014	0	0.920	0.933
	WCDMA V	RMC 12.2Kbps	Back	5mm	4182	836.4	23.91	24.00	1.021	-0.02	0.915	0.934
	WCDMA V	RMC 12.2Kbps	Left Side	5mm	4233	846.6	23.97	24.00	1.007	-0.06	1.180	1.188
	WCDMA V	RMC 12.2Kbps	Left Side	5mm	4132	826.4	23.94	24.00	1.014	0	1.170	1.186
20	WCDMA V	RMC 12.2Kbps	Left Side	5mm	4182	836.4	23.91	24.00	1.021	-0.01	1.190	1.215
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	4233	846.6	23.97	24.00	1.007	-0.03	1.130	1.138
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	4132	826.4	23.94	24.00	1.014	0.01	1.150	1.166
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	4182	836.4	23.91	24.00	1.021	0	1.140	1.164
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	4233	846.6	23.97	24.00	1.007	0.11	0.154	0.155



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	RTAP 153.6Kbps	Front	5mm	384	836.52	24.07	24.50	1.104	0.14	0.483	0.533
	CDMA BC0	RTAP 153.6Kbps	Back	5mm	384	836.52	24.07	24.50	1.104	-0.08	0.776	0.857
	CDMA BC0	RTAP 153.6Kbps	Back	5mm	1013	824.7	24.01	24.50	1.119	-0.08	0.786	0.880
	CDMA BC0	RTAP 153.6Kbps	Back	5mm	777	848.31	24.06	24.50	1.107	-0.04	0.859	0.951
	CDMA BC0	RTAP 153.6Kbps	Left Side	5mm	384	836.52	24.07	24.50	1.104	-0.01	0.776	0.857
21	CDMA BC0	RTAP 153.6Kbps	Left Side	5mm	1013	824.7	24.01	24.50	1.119	-0.02	0.924	1.034
	CDMA BC0	RTAP 153.6Kbps	Left Side	5mm	777	848.31	24.06	24.50	1.107	-0.09	0.550	0.609
	CDMA BC0	RTAP 153.6Kbps	Right Side	5mm	384	836.52	24.07	24.50	1.104	0.07	0.769	0.849
	CDMA BC0	RTAP 153.6Kbps	Right Side	5mm	1013	824.7	24.01	24.50	1.119	0.09	0.903	1.011
	CDMA BC0	RTAP 153.6Kbps	Right Side	5mm	777	848.31	24.06	24.50	1.107	0.05	0.651	0.720
	CDMA BC0	RTAP 153.6Kbps	Bottom Side	5mm	384	836.52	24.07	24.50	1.104	0.14	0.121	0.134
	CDMA BC1	RTAP 153.6Kbps	Front	5mm	1175	1908.75	17.28	18.00	1.180	-0.04	0.491	0.580
	CDMA BC1	RTAP 153.6Kbps	Back	5mm	1175	1908.75	17.28	18.00	1.180	0.09	0.889	1.049
	CDMA BC1	RTAP 153.6Kbps	Back	5mm	25	1851.25	17.24	18.00	1.191	-0.01	1.120	1.334
	CDMA BC1	RTAP 153.6Kbps	Back	5mm	600	1880	17.17	18.00	1.211	-0.01	0.968	1.172
	CDMA BC1	RTAP 153.6Kbps	Left Side	5mm	1175	1908.75	17.16	17.50	1.081	-0.03	0.254	0.275
	CDMA BC1	RTAP 153.6Kbps	Right Side	5mm	1175	1908.75	17.16	17.50	1.081	0.03	0.062	0.067
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	1175	1908.75	17.16	17.50	1.081	0.08	1.010	1.092
22	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	25	1851.25	17.12	17.50	1.091	0.09	1.240	1.353
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	600	1880	17.03	17.50	1.114	0.13	1.090	1.215
	CDMA BC10	RTAP 153.6Kbps	Front	5mm	476	817.9	24.08	24.50	1.102	0.1	0.487	0.536
	CDMA BC10	RTAP 153.6Kbps	Back	5mm	476	817.9	24.08	24.50	1.102	-0.09	0.751	0.827
	CDMA BC10	RTAP 153.6Kbps	Back	5mm	580	820.5	24.06	24.50	1.107	-0.1	0.743	0.822
	CDMA BC10	RTAP 153.6Kbps	Back	5mm	684	823.1	24.03	24.50	1.114	-0.14	0.747	0.832
23	CDMA BC10	RTAP 153.6Kbps	Left Side	5mm	476	817.9	24.08	24.50	1.102	-0.04	0.937	1.032
	CDMA BC10	RTAP 153.6Kbps	Left Side	5mm	580	820.5	24.06	24.50	1.107	0	0.924	1.023
	CDMA BC10	RTAP 153.6Kbps	Left Side	5mm	684	823.1	24.03	24.50	1.114	-0.06	0.914	1.018
	CDMA BC10	RTAP 153.6Kbps	Right Side	5mm	476	817.9	24.08	24.50	1.102	-0.01	0.877	0.966
	CDMA BC10	RTAP 153.6Kbps	Right Side	5mm	580	820.5	24.06	24.50	1.107	-0.01	0.870	0.963
	CDMA BC10	RTAP 153.6Kbps	Right Side	5mm	684	823.1	24.03	24.50	1.114	0.05	0.915	1.020
	CDMA BC10	RTAP 153.6Kbps	Bottom Side	5mm	476	817.9	24.08	24.50	1.102	0.15	0.109	0.120



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	18700	1860	15.89	16.50	1.151	-0.12	0.607	0.699
	LTE Band 2	20M	QPSK	50	0	Front	5mm	18700	1860	15.83	16.50	1.167	0.07	0.612	0.714
	LTE Band 2	20M	QPSK	1	0	Back	5mm	18700	1860	15.89	16.50	1.151	-0.12	1.070	1.231
	LTE Band 2	20M	QPSK	1	0	Back	5mm	18900	1880	15.82	16.50	1.169	-0.16	0.997	1.166
	LTE Band 2	20M	QPSK	1	0	Back	5mm	19100	1900	15.63	16.50	1.222	-0.14	0.914	1.117
	LTE Band 2	20M	QPSK	50	0	Back	5mm	18700	1860	15.83	16.50	1.167	-0.15	1.060	1.237
	LTE Band 2	20M	QPSK	50	0	Back	5mm	18900	1880	15.66	16.50	1.213	-0.06	1.000	1.213
	LTE Band 2	20M	QPSK	50	0	Back	5mm	19100	1900	15.79	16.50	1.178	-0.12	0.918	1.081
24	LTE Band 2	20M	QPSK	100	0	Back	5mm	18700	1860	15.60	16.50	1.230	-0.12	1.050	1.292
	LTE Band 2	20M	QPSK	1	49	Left Side	5mm	18700	1860	15.38	16.00	1.153	-0.08	0.182	0.210
	LTE Band 2	20M	QPSK	50	0	Left Side	5mm	18700	1860	15.24	16.00	1.191	-0.04	0.181	0.216
	LTE Band 2	20M	QPSK	1	49	Right Side	5mm	18700	1860	15.38	16.00	1.153	0.04	0.048	0.055
	LTE Band 2	20M	QPSK	50	0	Right Side	5mm	18700	1860	15.24	16.00	1.191	0.03	0.047	0.056
	LTE Band 2	20M	QPSK	1	49	Bottom Side	5mm	18700	1860	15.38	16.00	1.153	0.06	0.910	1.050
	LTE Band 2	20M	QPSK	1	49	Bottom Side	5mm	18900	1880	15.14	16.00	1.219	0.1	0.862	1.051
	LTE Band 2	20M	QPSK	1	49	Bottom Side	5mm	19100	1900	15.12	16.00	1.225	0.18	0.803	0.983
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	18700	1860	15.24	16.00	1.191	0.08	0.922	1.098
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	18900	1880	15.08	16.00	1.236	0.13	0.877	1.084
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	19100	1900	15.10	16.00	1.230	0.09	0.830	1.021
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5mm	18700	1860	15.08	16.00	1.236	0.14	0.897	1.109
	LTE Band 4	20M	QPSK	1	49	Front	5mm	20175	1732.5	16.39	17.00	1.151	-0.06	0.551	0.634
	LTE Band 4	20M	QPSK	50	0	Front	5mm	20175	1732.5	16.27	17.00	1.183	-0.08	0.574	0.679
	LTE Band 4	20M	QPSK	1	49	Back	5mm	20175	1732.5	16.39	17.00	1.151	-0.11	1.120	1.289
25	LTE Band 4	20M	QPSK	50	0	Back	5mm	20175	1732.5	16.27	17.00	1.183	-0.14	1.130	1.337
	LTE Band 4	20M	QPSK	100	0	Back	5mm	20175	1732.5	16.21	17.00	1.199	-0.05	1.114	1.336
	LTE Band 4	20M	QPSK	1	49	Left Side	5mm	20175	1732.5	16.39	17.00	1.151	-0.02	0.177	0.204
	LTE Band 4	20M	QPSK	50	0	Left Side	5mm	20175	1732.5	16.27	17.00	1.183	-0.14	0.179	0.212
	LTE Band 4	20M	QPSK	1	49	Right Side	5mm	20175	1732.5	16.39	17.00	1.151	0	0.081	0.093
	LTE Band 4	20M	QPSK	50	0	Right Side	5mm	20175	1732.5	16.27	17.00	1.183	-0.16	0.081	0.096
	LTE Band 4	20M	QPSK	1	49	Bottom Side	5mm	20175	1732.5	16.39	17.00	1.151	0.11	1.100	1.266
	LTE Band 4	20M	QPSK	50	0	Bottom Side	5mm	20175	1732.5	16.27	17.00	1.183	0.09	1.110	1.313
	LTE Band 4	20M	QPSK	100	0	Bottom Side	5mm	20175	1732.5	16.21	17.00	1.199	0.11	1.100	1.319
	LTE Band 5	10M	QPSK	1	0	Front	5mm	20525	836.5	23.46	24.00	1.132	-0.11	0.607	0.687
	LTE Band 5	10M	QPSK	25	0	Front	5mm	20525	836.5	22.79	23.00	1.050	-0.01	0.365	0.383
	LTE Band 5	10M	QPSK	1	0	Back	5mm	20525	836.5	23.46	24.00	1.132	-0.16	0.944	1.069
	LTE Band 5	10M	QPSK	25	0	Back	5mm	20525	836.5	22.79	23.00	1.050	-0.11	0.521	0.547
	LTE Band 5	10M	QPSK	50	0	Back	5mm	20525	836.5	22.57	23.00	1.104	-0.09	0.506	0.559
26	LTE Band 5	10M	QPSK	1	0	Left Side	5mm	20525	836.5	23.46	24.00	1.132	0.16	1.050	1.189
	LTE Band 5	10M	QPSK	25	0	Left Side	5mm	20525	836.5	22.79	23.00	1.050	0.04	0.610	0.640
	LTE Band 5	10M	QPSK	50	0	Left Side	5mm	20525	836.5	22.57	23.00	1.104	-0.13	0.576	0.636
	LTE Band 5	10M	QPSK	1	0	Right Side	5mm	20525	836.5	23.46	24.00	1.132	-0.04	1.040	1.178
	LTE Band 5	10M	QPSK	25	0	Right Side	5mm	20525	836.5	22.79	23.00	1.050	0.05	0.640	0.672
	LTE Band 5	10M	QPSK	50	0	Right Side	5mm	20525	836.5	22.57	23.00	1.104	0.01	0.633	0.699
	LTE Band 5	10M	QPSK	1	0	Bottom Side	5mm	20525	836.5	23.46	24.00	1.132	-0.17	0.159	0.180
	LTE Band 5	10M	QPSK	25	0	Bottom Side	5mm	20525	836.5	22.79	23.00	1.050	0	0.086	0.090



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	0	Front	5mm	23230	782	23.25	24.00	1.189	0.14	0.652	0.775
	LTE Band 13	10M	QPSK	25	0	Front	5mm	23230	782	22.19	23.00	1.205	0.07	0.345	0.416
	LTE Band 13	10M	QPSK	1	0	Back	5mm	23230	782	23.25	24.00	1.189	0.12	0.811	0.964
	LTE Band 13	10M	QPSK	25	0	Back	5mm	23230	782	22.19	23.00	1.205	-0.1	0.496	0.598
	LTE Band 13	10M	QPSK	50	0	Back	5mm	23230	782	22.09	23.00	1.233	-0.08	0.500	0.617
27	LTE Band 13	10M	QPSK	1	0	Left Side	5mm	23230	782	23.25	24.00	1.189	0.17	0.998	1.186
	LTE Band 13	10M	QPSK	25	0	Left Side	5mm	23230	782	22.19	23.00	1.205	-0.08	0.595	0.717
	LTE Band 13	10M	QPSK	50	0	Left Side	5mm	23230	782	22.09	23.00	1.233	-0.08	0.586	0.723
	LTE Band 13	10M	QPSK	1	0	Right Side	5mm	23230	782	23.25	24.00	1.189	-0.03	0.988	1.174
	LTE Band 13	10M	QPSK	25	0	Right Side	5mm	23230	782	22.19	23.00	1.205	-0.04	0.572	0.689
	LTE Band 13	10M	QPSK	50	0	Right Side	5mm	23230	782	22.09	23.00	1.233	0.01	0.558	0.688
	LTE Band 13	10M	QPSK	1	0	Bottom Side	5mm	23230	782	23.25	24.00	1.189	0.13	0.110	0.131
	LTE Band 13	10M	QPSK	25	0	Bottom Side	5mm	23230	782	22.19	23.00	1.205	-0.09	0.059	0.071

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.12	0.479	0.496
28	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	11	2462	17.95	18.00	1.012	97.63	1.024	0.01	0.633	0.656
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.13	0.378	0.392
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	11	2462	17.95	18.00	1.012	97.63	1.024	0.1	0.320	0.331
	WLAN5GHz	802.11a 6Mbps	Front	5mm	36	5180	14.91	15.00	1.021	87.58	1.142	0.01	0.227	0.265
	WLAN5GHz	802.11a 6Mbps	Back	5mm	36	5180	14.91	15.00	1.021	87.58	1.142	-0.03	0.383	0.447
	WLAN5GHz	802.11a 6Mbps	Right Side	5mm	36	5180	14.91	15.00	1.021	87.58	1.142	-0.02	0.026	0.030
	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	36	5180	14.91	15.00	1.021	87.58	1.142	0.02	0.669	0.780
	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	44	5220	14.9	15.00	1.023	87.58	1.142	-0.18	0.840	0.982
	WLAN5GHz	802.11a 6Mbps	Front	5mm	165	5825	15.82	16.00	1.042	87.58	1.142	-0.13	0.534	0.636
	WLAN5GHz	802.11a 6Mbps	Back	5mm	165	5825	15.82	16.00	1.042	87.58	1.142	-0.1	0.940	1.119
	WLAN5GHz	802.11a 6Mbps	Back	5mm	157	5785	15.70	16.00	1.072	87.58	1.142	0.05	0.858	1.050
	WLAN5GHz	802.11a 6Mbps	Right Side	5mm	157	5785	14.88	15.00	1.028	87.58	1.142	0.03	0.032	0.037
	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	157	5785	14.88	15.00	1.028	87.58	1.142	-0.02	0.936	1.099
	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	149	5745	14.68	15.00	1.076	87.58	1.142	0.03	0.837	1.029
29	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	165	5825	14.69	15.00	1.074	87.58	1.142	-0.02	0.970	1.190

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	00	2402	11.19	12.00	1.205	77.13	1.080	0.06	0.036	0.047
30	Bluetooth	1Mbps	Back	5mm	00	2402	11.19	12.00	1.205	77.13	1.080	-0.12	0.073	0.095
	Bluetooth	1Mbps	Right Side	5mm	00	2402	11.19	12.00	1.205	77.13	1.080	-0.1	0.042	0.055
	Bluetooth	1Mbps	Top Side	5mm	00	2402	11.19	12.00	1.205	77.13	1.080	-0.12	0.019	0.025



13.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	5mm	-	251	848.8	26.55	27.50	1.245	0.07	0.554	0.689
	GSM850	GPRS (4 Tx slots)	Back	5mm	-	251	848.8	26.55	27.50	1.245	-0.01	0.708	0.881
	GSM850	GPRS (4 Tx slots)	Back	5mm	-	128	824.2	26.42	27.50	1.282	-0.06	0.738	0.946
31	GSM850	GPRS (4 Tx slots)	Back	5mm	-	189	836.4	26.44	27.50	1.276	-0.03	0.750	0.957
	GSM1900	GPRS (4 Tx slots)	Front	5mm	-	512	1850.2	20.66	22.00	1.361	0.1	0.587	0.799
	GSM1900	GPRS (4 Tx slots)	Back	5mm	-	512	1850.2	20.66	22.00	1.361	0.06	0.936	1.274
32	GSM1900	GPRS (4 Tx slots)	Back	5mm	-	661	1880	20.61	22.00	1.377	-0.1	0.935	1.288
	GSM1900	GPRS (4 Tx slots)	Back	5mm	-	810	1909.8	20.51	22.00	1.409	-0.12	0.806	1.136
	GSM1900	GPRS (4 Tx slots)	Back	5mm	Headset	661	1880	20.61	22.00	1.377	-0.08	0.923	1.271

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	-	9400	1880	16.49	17.00	1.125	0.09	0.678	0.762
	WCDMA II	RMC 12.2Kbps	Back	5mm	-	9400	1880	16.49	17.00	1.125	-0.13	0.966	1.086
33	WCDMA II	RMC 12.2Kbps	Back	5mm	-	9262	1852.4	16.44	17.00	1.138	-0.13	1.160	1.320
	WCDMA II	RMC 12.2Kbps	Back	5mm	-	9538	1907.6	16.48	17.00	1.127	-0.1	0.928	1.046
	WCDMA II	RMC 12.2Kbps	Back	5mm	Headset	9262	1852.4	16.44	17.00	1.138	-0.17	0.890	1.012
	WCDMA V	RMC 12.2Kbps	Front	5mm	-	4233	846.6	23.97	24.00	1.007	0.09	0.605	0.609
	WCDMA V	RMC 12.2Kbps	Back	5mm	-	4233	846.6	23.97	24.00	1.007	0.01	0.916	0.922
	WCDMA V	RMC 12.2Kbps	Back	5mm	-	4132	826.4	23.94	24.00	1.014	0	0.920	0.933
34	WCDMA V	RMC 12.2Kbps	Back	5mm	-	4182	836.4	23.91	24.00	1.021	-0.02	0.915	0.934

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	1xRTT RC3 SO32	Front	5mm	-	384	836.52	24.08	24.50	1.102	0.14	0.489	0.539
	CDMA BC0	1xRTT RC3 SO32	Back	5mm	-	384	836.52	24.08	24.50	1.102	-0.08	0.822	0.905
	CDMA BC0	1xRTT RC3 SO32	Back	5mm	-	1013	824.7	24.05	24.50	1.109	-0.08	0.834	0.925
35	CDMA BC0	1xRTT RC3 SO32	Back	5mm	-	777	848.31	24.06	24.50	1.107	-0.04	0.909	1.006
	CDMA BC1	1xRTT RC3 SO32	Front	5mm	-	1175	1908.75	17.30	18.00	1.175	-0.15	0.451	0.530
	CDMA BC1	1xRTT RC3 SO32	Back	5mm	-	1175	1908.75	17.30	18.00	1.175	-0.08	0.799	0.939
36	CDMA BC1	1xRTT RC3 SO32	Back	5mm	-	25	1851.25	17.22	18.00	1.197	-0.01	1.080	1.292
	CDMA BC1	1xRTT RC3 SO32	Back	5mm	-	600	1880	17.18	18.00	1.208	0.07	0.938	1.133
	CDMA BC1	1xRTT RC3 SO32	Back	5mm	Headset	25	1851.25	17.22	18.00	1.197	-0.08	1.060	1.269
	CDMA BC10	1xRTT RC3 SO32	Front	5mm	-	476	817.9	24.13	24.50	1.089	0.1	0.493	0.537
	CDMA BC10	1xRTT RC3 SO32	Back	5mm	-	476	817.9	24.13	24.50	1.089	-0.09	0.798	0.869
	CDMA BC10	1xRTT RC3 SO32	Back	5mm	-	580	820.5	24.11	24.50	1.094	-0.1	0.790	0.864
37	CDMA BC10	1xRTT RC3 SO32	Back	5mm	-	684	823.1	24.08	24.50	1.102	-0.14	0.793	0.874



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	-	18700	1860	15.89	16.50	1.151	-0.12	0.607	0.699
	LTE Band 2	20M	QPSK	50	0	Front	5mm	-	18700	1860	15.83	16.50	1.167	0.07	0.612	0.714
	LTE Band 2	20M	QPSK	1	0	Back	5mm	-	18700	1860	15.89	16.50	1.151	-0.12	1.070	1.231
	LTE Band 2	20M	QPSK	1	0	Back	5mm	-	18900	1880	15.82	16.50	1.169	-0.16	0.997	1.166
	LTE Band 2	20M	QPSK	1	0	Back	5mm	-	19100	1900	15.63	16.50	1.222	-0.14	0.914	1.117
	LTE Band 2	20M	QPSK	50	0	Back	5mm	-	18700	1860	15.83	16.50	1.167	-0.15	1.060	1.237
	LTE Band 2	20M	QPSK	50	0	Back	5mm	-	18900	1880	15.66	16.50	1.213	-0.06	1.000	1.213
	LTE Band 2	20M	QPSK	50	0	Back	5mm	-	19100	1900	15.79	16.50	1.178	-0.12	0.918	1.081
38	LTE Band 2	20M	QPSK	100	0	Back	5mm	-	18700	1860	15.60	16.50	1.230	-0.12	1.050	1.292
	LTE Band 2	20M	QPSK	100	0	Back	5mm	Headset	18700	1860	15.60	16.50	1.230	-0.08	0.930	1.144
	LTE Band 4	20M	QPSK	1	49	Front	5mm	-	20175	1732.5	16.39	17.00	1.151	-0.06	0.551	0.634
	LTE Band 4	20M	QPSK	50	0	Front	5mm	-	20175	1732.5	16.27	17.00	1.183	-0.08	0.574	0.679
	LTE Band 4	20M	QPSK	1	49	Back	5mm	-	20175	1732.5	16.39	17.00	1.151	-0.11	1.120	1.289
39	LTE Band 4	20M	QPSK	50	0	Back	5mm	-	20175	1732.5	16.27	17.00	1.183	-0.14	1.130	1.337
	LTE Band 4	20M	QPSK	100	0	Back	5mm	-	20175	1732.5	16.21	17.00	1.199	-0.05	1.114	1.336
	LTE Band 4	20M	QPSK	50	0	Back	5mm	Headset	20175	1732.5	16.27	17.00	1.183	-0.05	1.010	1.195
	LTE Band 5	10M	QPSK	1	0	Front	5mm	-	20525	836.5	23.46	24.00	1.132	-0.11	0.607	0.687
	LTE Band 5	10M	QPSK	25	0	Front	5mm	-	20525	836.5	22.79	23.00	1.050	-0.01	0.365	0.383
40	LTE Band 5	10M	QPSK	1	0	Back	5mm	-	20525	836.5	23.46	24.00	1.132	-0.16	0.944	1.069
	LTE Band 5	10M	QPSK	25	0	Back	5mm	-	20525	836.5	22.79	23.00	1.050	-0.11	0.521	0.547
	LTE Band 5	10M	QPSK	50	0	Back	5mm	-	20525	836.5	22.57	23.00	1.104	-0.09	0.506	0.559
	LTE Band 13	10M	QPSK	1	0	Front	5mm	-	23230	782	23.25	24.00	1.189	0.14	0.652	0.775
	LTE Band 13	10M	QPSK	25	0	Front	5mm	-	23230	782	22.19	23.00	1.205	0.07	0.345	0.416
41	LTE Band 13	10M	QPSK	1	0	Back	5mm	-	23230	782	23.25	24.00	1.189	0.12	0.811	0.964
	LTE Band 13	10M	QPSK	25	0	Back	5mm	-	23230	782	22.19	23.00	1.205	-0.1	0.496	0.598
	LTE Band 13	10M	QPSK	50	0	Back	5mm	-	23230	782	22.09	23.00	1.233	-0.08	0.500	0.617

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	11	2462	17.95	18.00	1.012	97.63	1.024	-0.12	0.479	0.496
42	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	11	2462	17.95	18.00	1.012	97.63	1.024	0.01	0.633	0.656
	WLAN5GHz	802.11a 6Mbps	Front	5mm	-	60	5300	15.75	16.00	1.059	87.58	1.142	0.03	0.365	0.442
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	60	5300	15.75	16.00	1.059	87.58	1.142	0.05	1.011	1.223
43	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	64	5320	15.73	16.00	1.064	87.58	1.142	0.13	1.110	1.349
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	52	5260	15.57	16.00	1.104	87.58	1.142	0.12	0.942	1.188
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Headset	64	5320	15.73	16.00	1.064	87.58	1.142	0.01	0.987	1.199
	WLAN5GHz	802.11a 6Mbps	Front	5mm	-	144	5720	15.90	16.00	1.023	87.58	1.142	0.19	0.371	0.434
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	144	5720	15.90	16.00	1.023	87.58	1.142	0.16	0.740	0.865
44	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	100	5500	15.79	16.00	1.050	87.58	1.142	0.06	1.010	1.211
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	116	5580	15.70	16.00	1.072	87.58	1.142	0.01	0.872	1.067
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Headset	100	5500	15.79	16.00	1.050	87.58	1.142	-0.07	0.956	1.146
	WLAN5GHz	802.11a 6Mbps	Front	5mm	-	165	5825	15.82	16.00	1.042	87.58	1.142	-0.13	0.534	0.636
45	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	165	5825	15.82	16.00	1.042	87.58	1.142	-0.1	0.940	1.119
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	157	5785	15.70	16.00	1.072	87.58	1.142	0.05	0.858	1.050



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	-	00	2402	11.19	12.00	1.205	77.13	1.080	0.06	0.036	0.047
46	Bluetooth	1Mbps	Back	5mm	-	00	2402	11.19	12.00	1.205	77.13	1.080	-0.12	0.073	0.095

13.4 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.06	0.995	-	1.031
2nd	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	11	2462	17.95	18.00	1.012	97.63	1.024	-0.12	0.984	1.01	1.019
1st	WCDMA V	RMC 12.2Kbps	Left Side	5mm	4182	836.4	23.91	24.00	1.021	-	1.000	-0.01	1.190	-	1.215
2nd	WCDMA V	RMC 12.2Kbps	Left Side	5mm	4182	836.4	23.91	24.00	1.021	-	1.000	-0.06	1.170	1.02	1.194
1st	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	25	1851.25	17.12	17.50	1.091	-	1.000	0.09	1.240	-	1.353
2nd	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	25	1851.25	17.12	17.50	1.091	-	1.000	0.11	1.210	1.02	1.321
1st	LTE Band 4	20M_QPSK_50_0	Back	5mm	20175	1732.5	16.27	17.00	1.183	-	1.000	-0.14	1.130	-	1.337
2nd	LTE Band 4	20M_QPSK_50_0	Back	5mm	20175	1732.5	16.27	17.00	1.183	-	1.000	0	1.080	1.05	1.278
1st	LTE Band 13	10M_QPSK_1_0	Left Side	5mm	23230	782	23.25	24.00	1.189	-	1.000	0.17	0.998	-	1.186
2nd	LTE Band 13	10M_QPSK_1_0	Left Side	5mm	23230	782	23.25	24.00	1.189	-	1.000	0.16	0.982	1.02	1.167
1st	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	165	5825	14.69	15.00	1.074	87.58	1.142	-0.02	0.970	-	1.190
2nd	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	165	5825	14.69	15.00	1.074	87.58	1.142	-0.04	0.910	1.07	1.116
1st	WLAN5GHz	802.11a 6Mbps	Back	5mm	64	5320	15.73	16.00	1.064	87.58	1.142	0.13	1.110	-	1.349
2nd	WLAN5GHz	802.11a 6Mbps	Back	5mm	64	5320	15.73	16.00	1.064	87.58	1.142	0.12	1.090	1.02	1.325
1st	WLAN5GHz	802.11a 6Mbps	Back	5mm	100	5500	15.79	16.00	1.050	87.58	1.142	0.06	1.010	-	1.211
2nd	WLAN5GHz	802.11a 6Mbps	Back	5mm	100	5500	15.79	16.00	1.050	87.58	1.142	0.05	0.993	1.02	1.190

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	CDMA + WLAN2.4GHz	Yes	Yes	Yes
5.	LTE + WLAN2.4GHz	Yes	Yes	Yes
6.	GSM Voice + Bluetooth	Yes	Yes	
7.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes
8.	WCDMA+ Bluetooth	Yes	Yes	Yes
9.	CDMA+ Bluetooth	Yes	Yes	Yes
10.	LTE + Bluetooth	Yes	Yes	Yes
11.	GSM Voice + WLAN5GHz	Yes	Yes	
12.	GPRS/EDGE + WLAN5GHz	Yes	Yes	Yes
13.	WCDMA + WLAN5GHz	Yes	Yes	Yes
14.	CDMA + WLAN5GHz	Yes	Yes	Yes
15.	LTE + WLAN5GHz	Yes	Yes	Yes

General Note:

1. This device WLAN 2.4GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
2. WLAN and Bluetooth cannot transmit simultaneously.
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.4



14.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth								
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
GSM	GSM850	Right Cheek	0.587	0.456	0.772	0.090	1.043	1.359	0.677				
		Right Tilted	0.386	0.404	0.877	0.066	0.790	1.263	0.452				
		Left Cheek	0.584	1.031	0.962	0.180	1.615	1.546	0.764	0.03	Case 1		
		Left Tilted	0.393	0.698	0.989	0.137	1.091	1.382	0.530				
	GSM1900	Right Cheek	0.334	0.456	0.772	0.090	0.790	1.106	0.424				
		Right Tilted	0.266	0.404	0.877	0.066	0.670	1.143	0.332				
		Left Cheek	0.530	1.031	0.962	0.180	1.561	1.492	0.710				
		Left Tilted	0.268	0.698	0.989	0.137	0.966	1.257	0.405				
WCDMA	WCDMA II	Right Cheek	0.562	0.456	0.772	0.090	1.018	1.334	0.652				
		Right Tilted	0.453	0.404	0.877	0.066	0.857	1.330	0.519				
		Left Cheek	0.954	1.031	0.962	0.180	1.985	1.916	1.134	0.03	Case 2	0.03	Case 11
		Left Tilted	0.371	0.698	0.989	0.137	1.069	1.360	0.508				
	WCDMA V	Right Cheek	0.735	0.456	0.772	0.090	1.191	1.507	0.825				
		Right Tilted	0.456	0.404	0.877	0.066	0.860	1.333	0.522				
		Left Cheek	0.732	1.031	0.962	0.180	1.763	1.694	0.912	0.03	Case 3	0.03	Case 12
		Left Tilted	0.480	0.698	0.989	0.137	1.178	1.469	0.617				
CDMA	CDMA BC0	Right Cheek	0.605	0.456	0.772	0.090	1.061	1.377	0.695				
		Right Tilted	0.380	0.404	0.877	0.066	0.784	1.257	0.446				
		Left Cheek	0.614	1.031	0.962	0.180	1.645	1.576	0.794	0.03	Case 4		
		Left Tilted	0.384	0.698	0.989	0.137	1.082	1.373	0.521				
	CDMA BC1	Right Cheek	0.642	0.456	0.772	0.090	1.098	1.414	0.732				
		Right Tilted	0.519	0.404	0.877	0.066	0.923	1.396	0.585				
		Left Cheek	0.841	1.031	0.962	0.180	1.872	1.803	1.021	0.03	Case 5	0.03	Case 13
		Left Tilted	0.545	0.698	0.989	0.137	1.243	1.534	0.682				
	CDMA BC10	Right Cheek	0.663	0.456	0.772	0.090	1.119	1.435	0.753				
		Right Tilted	0.410	0.404	0.877	0.066	0.814	1.287	0.476				
		Left Cheek	0.704	1.031	0.962	0.180	1.735	1.666	0.884	0.03	Case 6	0.03	Case 14
		Left Tilted	0.452	0.698	0.989	0.137	1.150	1.441	0.589				
LTE	LTE Band 2	Right Cheek	0.668	0.456	0.772	0.090	1.124	1.440	0.758				
		Right Tilted	0.540	0.404	0.877	0.066	0.944	1.417	0.606				
		Left Cheek	1.169	1.031	0.962	0.180	2.200	2.131	1.349	0.04	Case 7	0.04	Case 15
		Left Tilted	0.567	0.698	0.989	0.137	1.265	1.556	0.704				
	LTE Band 4	Right Cheek	0.539	0.456	0.772	0.090	0.995	1.311	0.629				
		Right Tilted	0.561	0.404	0.877	0.066	0.965	1.438	0.627				
		Left Cheek	0.871	1.031	0.962	0.180	1.902	1.833	1.051	0.03	Case 8	0.03	Case 16
		Left Tilted	0.289	0.698	0.989	0.137	0.987	1.278	0.426				
	LTE Band 5	Right Cheek	0.659	0.456	0.772	0.090	1.115	1.431	0.749				
		Right Tilted	0.530	0.404	0.877	0.066	0.934	1.407	0.596				
		Left Cheek	0.682	1.031	0.962	0.180	1.713	1.644	0.862	0.03	Case 9	0.03	Case 17
		Left Tilted	0.416	0.698	0.989	0.137	1.114	1.405	0.553				
	LTE Band 13	Right Cheek	0.677	0.456	0.772	0.090	1.133	1.449	0.767				
		Right Tilted	0.442	0.404	0.877	0.066	0.846	1.319	0.508				
		Left Cheek	0.725	1.031	0.962	0.180	1.756	1.687	0.905	0.03	Case 10	0.03	Case 18
		Left Tilted	0.448	0.698	0.989	0.137	1.146	1.437	0.585				



14.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4	SPLSR	Case No	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
GSM	GSM850	Front	0.689	0.496	0.636	0.047	1.185	1.325	0.736				
		Back	0.957	0.656	1.119	0.095	1.613	2.076	1.052	0.02	Case 19	0.02	Case 29
		Left side	1.294				1.294	1.294	1.294				
		Right side	1.381	0.392	0.037	0.055	1.773	1.418	1.436	0.04	Case 20		
		Bottom side	0.175				0.175	0.175	0.175				
	GSM1900	Front	0.799	0.496	0.636	0.047	1.295	1.435	0.846				
		Back	1.288	0.656	1.119	0.095	1.944	2.407	1.383	0.02	Case 21	0.03	Case 30
		Left side	0.185				0.185	0.185	0.185				
		Right side	0.057	0.392	0.037	0.055	0.449	0.094	0.112				
		Bottom side	1.269				1.269	1.269	1.269				
WCDMA	WCDMA II	Front	0.762	0.496	0.636	0.047	1.258	1.398	0.809				
		Back	1.320	0.656	1.119	0.095	1.976	2.439	1.415	0.02	Case 22	0.03	Case 31
		Left side	0.273				0.273	0.273	0.273				
		Right side	0.060	0.392	0.037	0.055	0.452	0.097	0.115				
		Bottom side	1.315				1.315	1.315	1.315				
	WCDMA V	Front	0.609	0.496	0.636	0.047	1.105	1.245	0.656				
		Back	0.934	0.656	1.119	0.095	1.590	2.053	1.029			0.02	Case 32
		Left side	1.215				1.215	1.215	1.215				
		Right side	1.166	0.392	0.037	0.055	1.558	1.203	1.221				
		Bottom side	0.155				0.155	0.155	0.155				
CDMA	CDMA BC0	Front	0.533	0.496	0.636	0.047	1.029	1.169	0.580				
		Back	0.951	0.656	1.119	0.095	1.607	2.070	1.046	0.02	Case 23	0.02	Case 33
		Left side	1.034				1.034	1.034	1.034				
		Right side	1.011	0.392	0.037	0.055	1.403	1.048	1.066				
		Bottom side	0.134				0.134	0.134	0.134				
	CDMA BC1	Front	0.580	0.496	0.636	0.047	1.076	1.216	0.627				
		Back	1.334	0.656	1.119	0.095	1.990	2.453	1.429	0.02	Case 24	0.03	Case 34
		Left side	0.275				0.275	0.275	0.275				
		Right side	0.067	0.392	0.037	0.055	0.459	0.104	0.122				
		Bottom side	1.353				1.353	1.353	1.353				
	CDMA BC10	Front	0.536	0.496	0.636	0.047	1.032	1.172	0.583				
		Back	0.832	0.656	1.119	0.095	1.488	1.951	0.927			0.02	Case 35
		Left side	1.032				1.032	1.032	1.032				
		Right side	1.020	0.392	0.037	0.055	1.412	1.057	1.075				
		Bottom side	0.120				0.120	0.120	0.120				



WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4	SPLSR	Case No	SPLSR	Case No	
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)					
LTE	LTE Band 2	Front	0.714	0.496	0.636	0.047	1.210	1.350	0.761				
		Back	1.292	0.656	1.119	0.095	1.948	2.411	1.387	0.02	Case 25	0.03	Case 36
		Left side	0.216				0.216	0.216	0.216				
		Right side	0.056	0.392	0.037	0.055	0.448	0.093	0.111				
		Bottom side	1.109				1.109	1.109	1.109				
	LTE Band 4	Front	0.679	0.496	0.636	0.047	1.175	1.315	0.726				
		Back	1.337	0.656	1.119	0.095	1.993	2.456	1.432	0.02	Case 26	0.03	Case 37
		Left side	0.212				0.212	0.212	0.212				
		Right side	0.096	0.392	0.037	0.055	0.488	0.133	0.151				
		Bottom side	1.319				1.319	1.319	1.319				
	LTE Band 5	Front	0.687	0.496	0.636	0.047	1.183	1.323	0.734				
		Back	1.069	0.656	1.119	0.095	1.725	2.188	1.164	0.02	Case 27	0.02	Case 38
		Left side	1.189				1.189	1.189	1.189				
		Right side	1.178	0.392	0.037	0.055	1.570	1.215	1.233				
		Bottom side	0.180				0.180	0.180	0.180				
	LTE Band 13	Front	0.775	0.496	0.636	0.047	1.271	1.411	0.822				
Back		0.964	0.656	1.119	0.095	1.620	2.083	1.059	0.02	Case 28	0.02	Case 39	
Left side		1.186				1.186	1.186	1.186					
Right side		1.174	0.392	0.037	0.055	1.566	1.211	1.229					
Bottom side		0.131				0.131	0.131	0.131					



14.3 Body-Worn Accessory Exposure Conditions


WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)							
GSM	GSM850	Front	0.689	0.496	0.636	0.047	1.185	1.325	0.736				
		Back	0.957	0.656	1.349	0.095	1.613	2.306	1.052	0.02	Case 40	0.03	Case 54
	GSM1900	Front	0.799	0.496	0.636	0.047	1.295	1.435	0.846				
		Back	1.288	0.656	1.349	0.095	1.944	2.637	1.383	0.02	Case 41	0.03	Case 55
		Back with Headset	1.271	0.656	1.199	0.095	1.927	2.470	1.366	0.02	Case 42	0.03	Case 56
WCDMA	WCDMA II	Front	0.762	0.496	0.636	0.047	1.258	1.398	0.809				
		Back	1.320	0.656	1.349	0.095	1.976	2.669	1.415	0.02	Case 43	0.03	Case 57
		Back with Headset	1.012	0.656	1.199	0.095	1.668	2.211	1.107	0.02	Case 44	0.02	Case 58
	WCDMA V	Front	0.609	0.496	0.636	0.047	1.105	1.245	0.656				
		Back	0.934	0.656	1.349	0.095	1.590	2.283	1.029			0.02	Case 59
CDMA	CDMA BC0	Front	0.539	0.496	0.636	0.047	1.035	1.175	0.586				
		Back	1.006	0.656	1.349	0.095	1.662	2.355	1.101	0.02	Case 45	0.03	Case 60
	CDMA BC1	Front	0.580	0.496	0.636	0.047	1.076	1.216	0.627				
		Back	1.292	0.656	1.349	0.095	1.948	2.641	1.387	0.02	Case 46	0.03	Case 61
		Back with Headset	1.269	0.656	1.199	0.095	1.925	2.468	1.364	0.02	Case 47	0.03	Case 62
	CDMA BC10	Front	0.537	0.496	0.636	0.047	1.033	1.173	0.584				
		Back	0.874	0.656	1.349	0.095	1.530	2.223	0.969			0.02	Case 63
LTE	LTE Band 2	Front	0.714	0.496	0.636	0.047	1.210	1.350	0.761				
		Back	1.292	0.656	1.349	0.095	1.948	2.641	1.387	0.02	Case 48	0.03	Case 64
		Back with Headset	1.144	0.656	1.199	0.095	1.800	2.343	1.239	0.02	Case 49	0.02	Case 65
	LTE Band 4	Front	0.679	0.496	0.636	0.047	1.175	1.315	0.726				
		Back	1.337	0.656	1.349	0.095	1.993	2.686	1.432	0.02	Case 50	0.03	Case 66
		Back with Headset	1.195	0.656	1.199	0.095	1.851	2.394	1.290	0.02	Case 51	0.03	Case 67
	LTE Band 5	Front	0.687	0.496	0.636	0.047	1.183	1.323	0.734				
		Back	1.069	0.656	1.349	0.095	1.725	2.418	1.164	0.02	Case 52	0.03	Case 68
	LTE Band 13	Front	0.775	0.496	0.636	0.047	1.271	1.411	0.822				
		Back	0.964	0.656	1.349	0.095	1.620	2.313	1.059	0.02	Case 53	0.03	Case 69

14.4 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	GSM850	Left Cheek	0.584	0	48.08	-42.12	-2.73	74.7	1.62	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

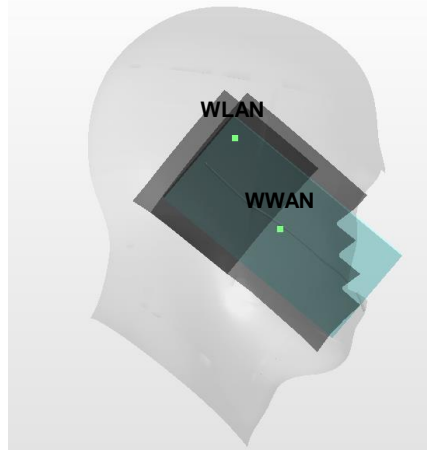


Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WCDMA II	Left Cheek	0.954	0	46.57	-56.73	-2.16	87.3	1.99	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

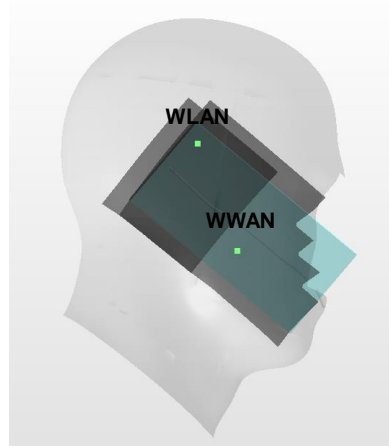


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Left Cheek	0.732	0	48.53	-35.07	-3.17	68.8	1.76	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

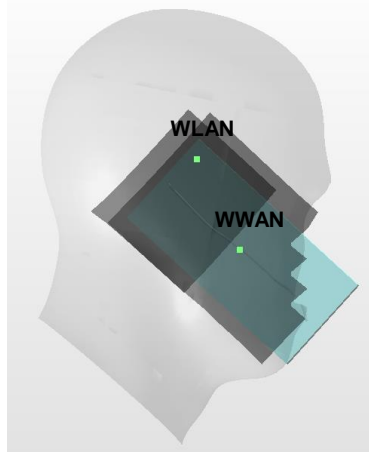


Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Left Cheek	0.614	0	49.33	-33.68	-3.17	68.0	1.65	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

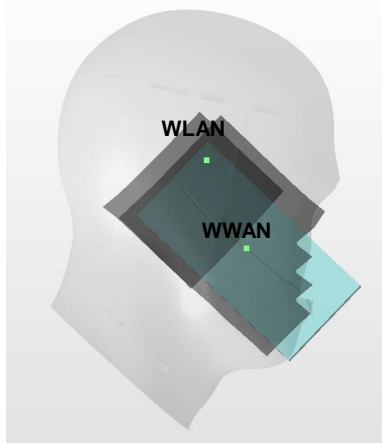


Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Left Cheek	0.841	0	46.56	-56.75	-2.16	87.3	1.87	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

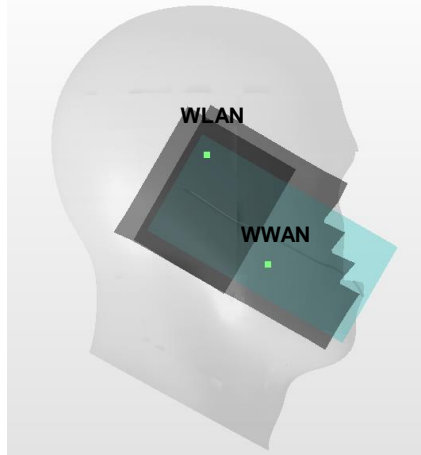


Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Left Cheek	0.704	0	49.33	-33.67	-3.16	68.0	1.74	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

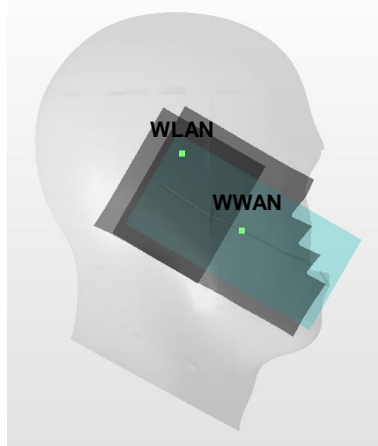


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 2	Left Cheek	1.169	0	46.56	-56.74	-2.19	87.3	2.20	0.04	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

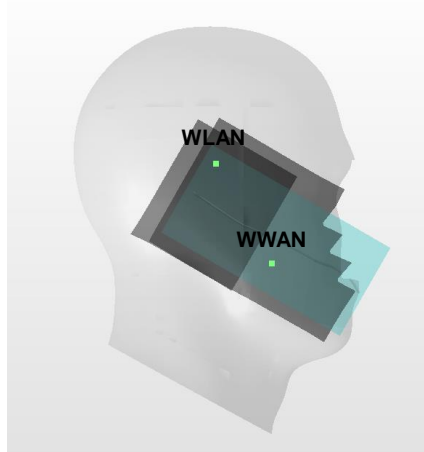


Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 4	Left Cheek	0.871	0	48.42	-59.44	-1.65	90.5	1.90	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

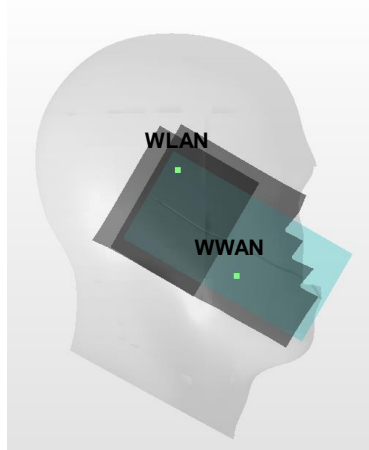


Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 5	Left Cheek	0.682	0	48.88	-35.17	-3.03	69.0	1.71	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

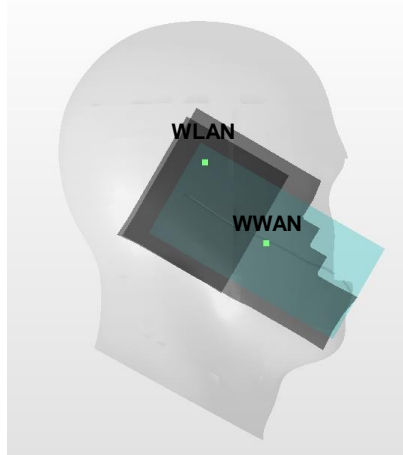


Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 13	Left Cheek	0.725	0	49.39	-33.12	-3.01	67.6	1.76	0.03	Not required
	WLAN2.4G		1.031	0	13.31	23.98	-1.2				

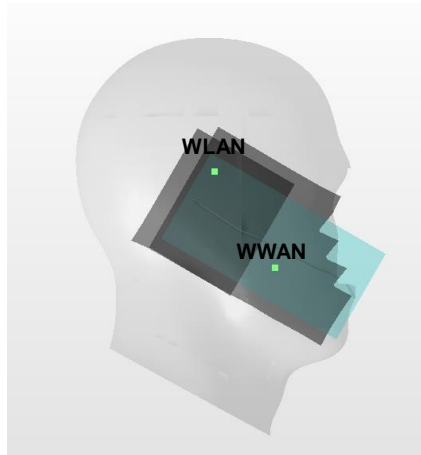


Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Left Cheek	0.954	0	46.57	-56.73	-2.16	81.8	1.92	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

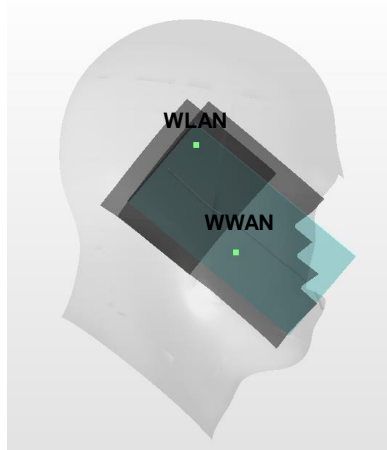


Case 12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Left Cheek	0.732	0	48.53	-35.07	-3.17	67.6	1.69	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

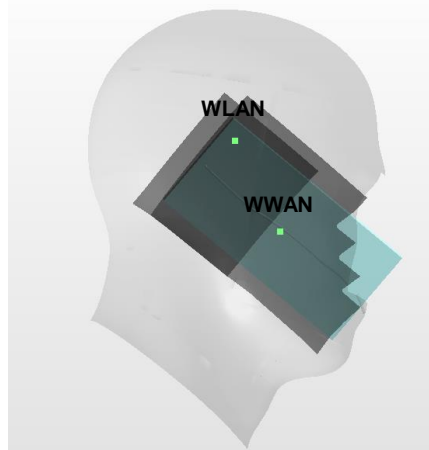


Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
13	CDMA BC1	Left Cheek	0.841	0	47.08	-57.03	-2.06	82.4	1.80	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

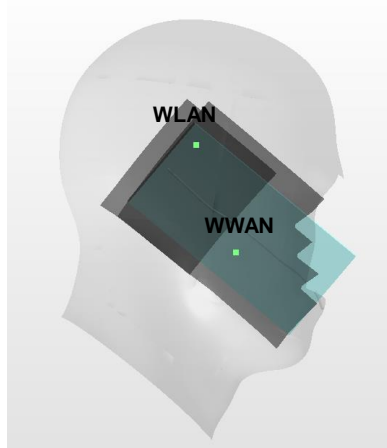


Case	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
14	CDMA BC10	Left Cheek	0.704	0	49.33	-33.67	-3.16	67.4	1.67	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

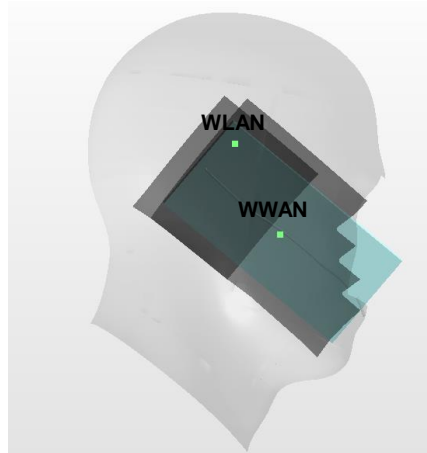


Case 15	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Left Cheek	1.169	0	46.56	-56.74	-2.19	81.8	2.13	0.04	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

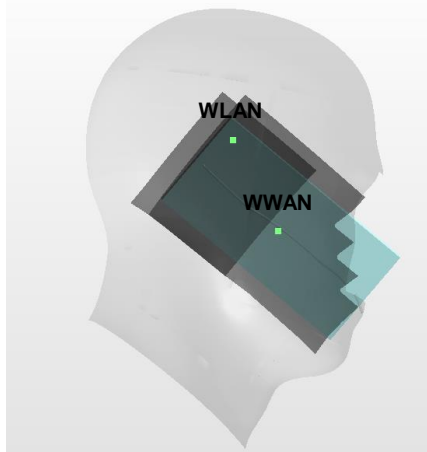


Case 16	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Left Cheek	0.871	0	48.42	-59.44	-1.65	85.1	1.83	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

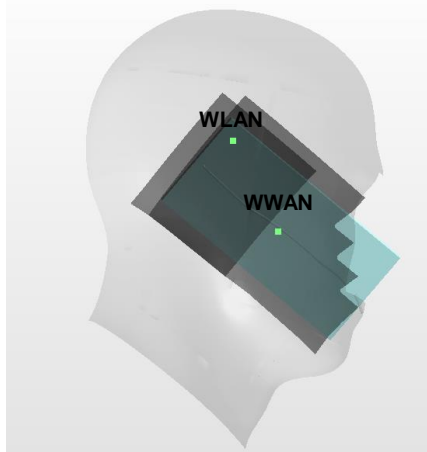


Case 17	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Left Cheek	0.682	0	48.88	-35.17	-3.03	67.9	1.64	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

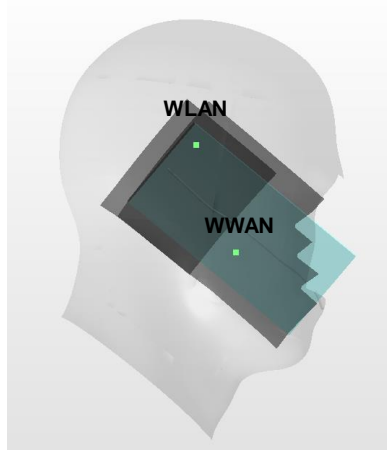


Case 18	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Left Cheek	0.725	0	49.39	-33.12	-3.01	67.1	1.69	0.03	Not required
	WLAN5GHz		0.962	0	-3.67	7.81	-0.19				

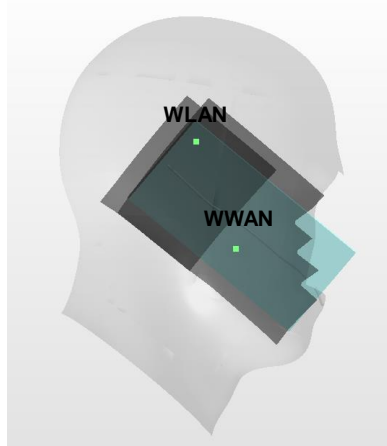


Case 19	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	0.957	5	-1.57	-63.41	-2.47	126.4	1.61	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

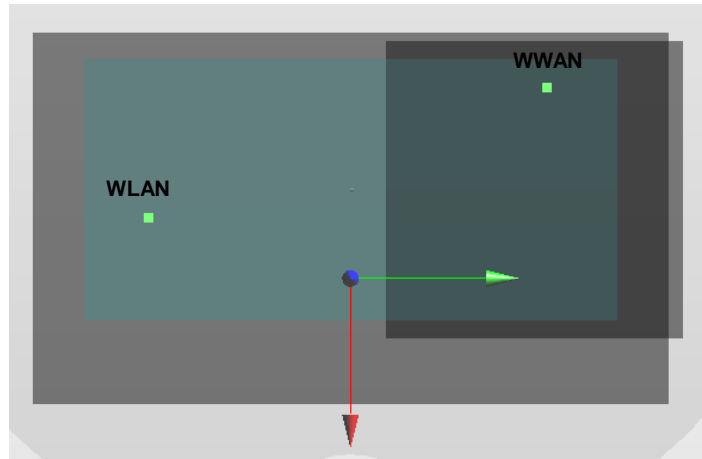


Case 20	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Right side	1.381	5	0.07	-2.7	-2.73	56.3	1.77	0.04	Not required
	WLAN2.4G		0.392	5	0	-59	-1.1				

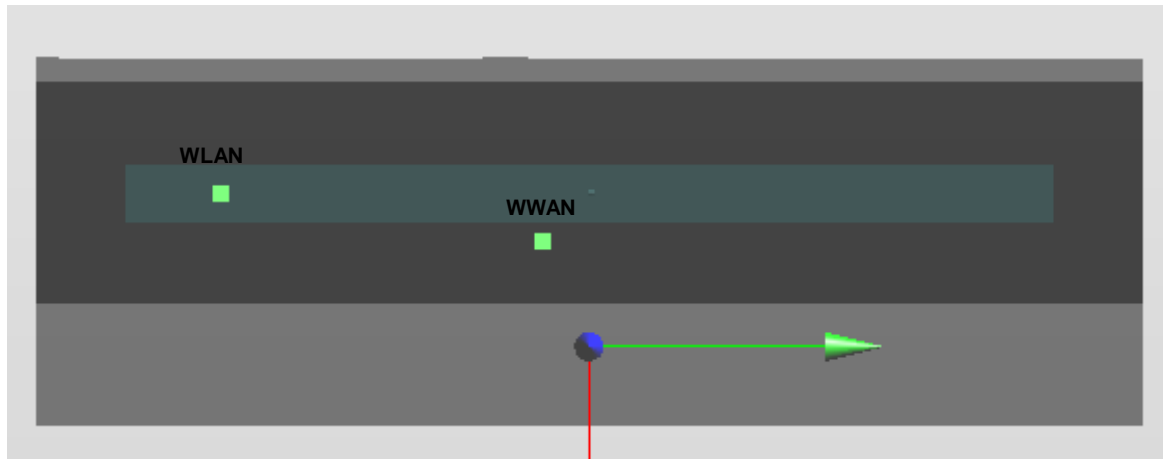


Case 21	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.288	5	-12.4	-73.6	-1.06	134.5	1.94	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

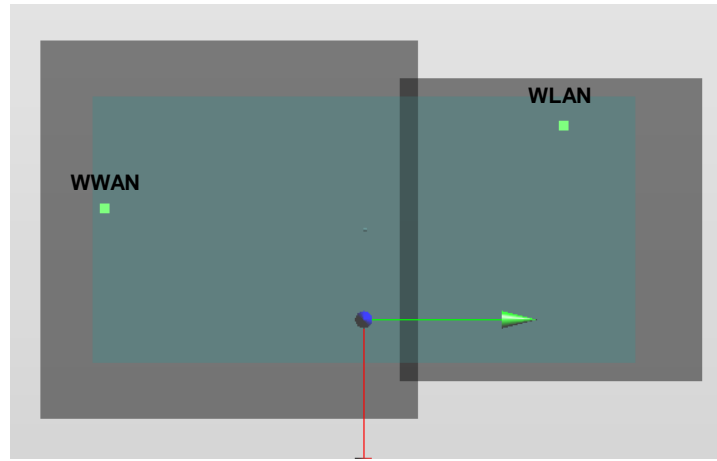


Case 22	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.32	5	-12.4	-72	-1.06	132.9	1.98	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

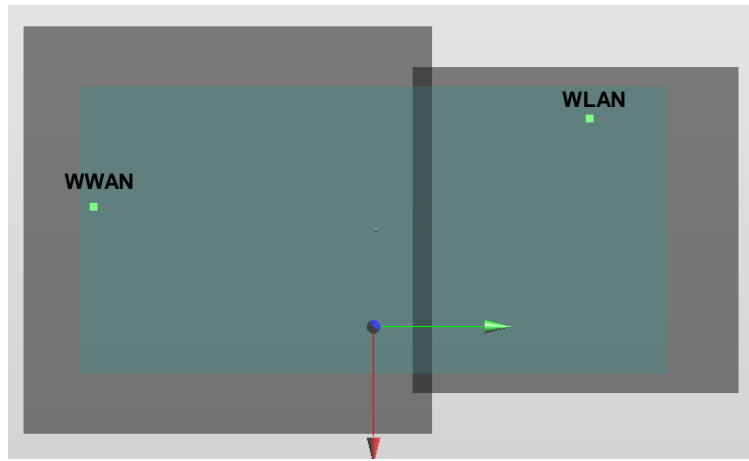


Case 23	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Back	0.951	5	7.9	-63.4	0	129.0	1.61	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

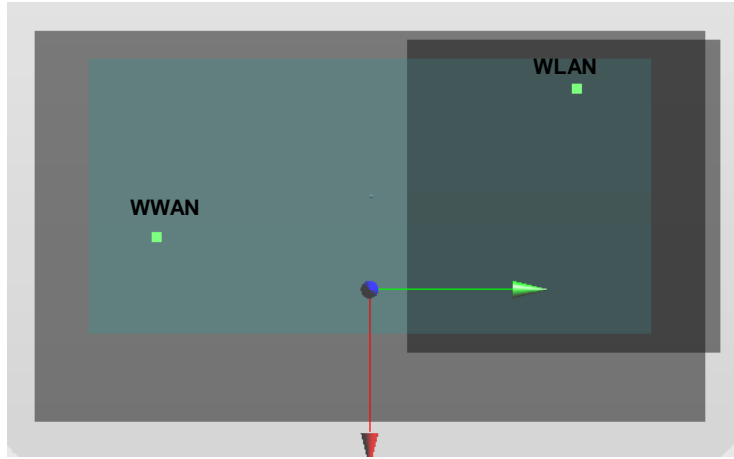


Case 24	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Back	1.334	5	-15.2	-72	-1.06	132.5	1.99	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

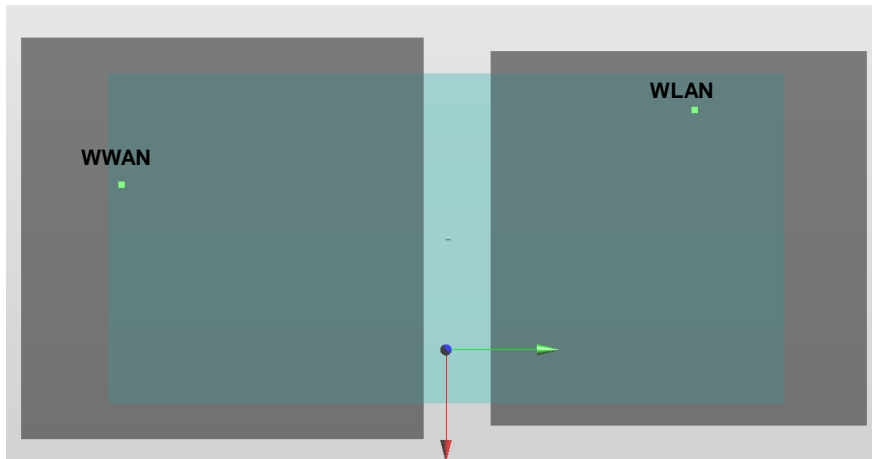


Case 25	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 2				X	Y	Z				
	WLAN2.4G	Back	0.656	5	-30.8	59.6	-1.34	134.3	1.95	0.02	Not required

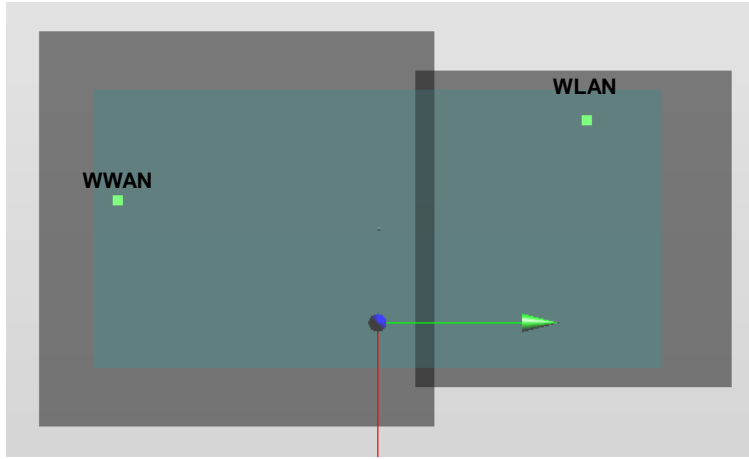


Case 26	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 4				X	Y	Z				
	WLAN2.4G	Back	0.656	5	-30.8	59.6	-1.34	133.1	1.99	0.02	Not required

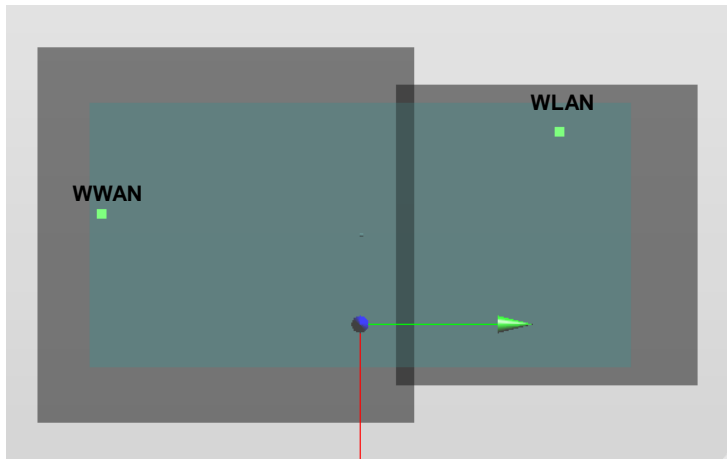


Case 27	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 5				X	Y	Z				
	WLAN2.4G	Back	0.656	5	-30.8	59.6	-1.34	126.7	1.73	0.02	Not required
	LTE 5		1.069	5	-0.15	-63.31	-2.41				

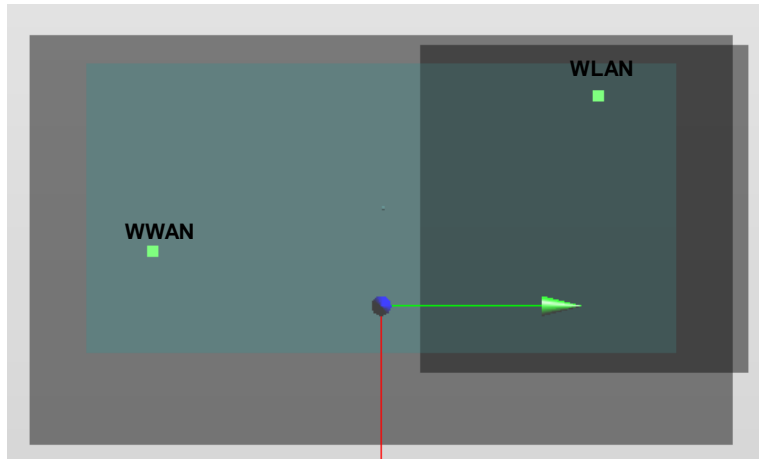


Case 28	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 13				X	Y	Z				
	WLAN2.4G	Back	0.656	5	-30.8	59.6	-1.34	127.6	1.62	0.02	Not required
	LTE 13		0.964	5	2.96	-63.41	-2.49				

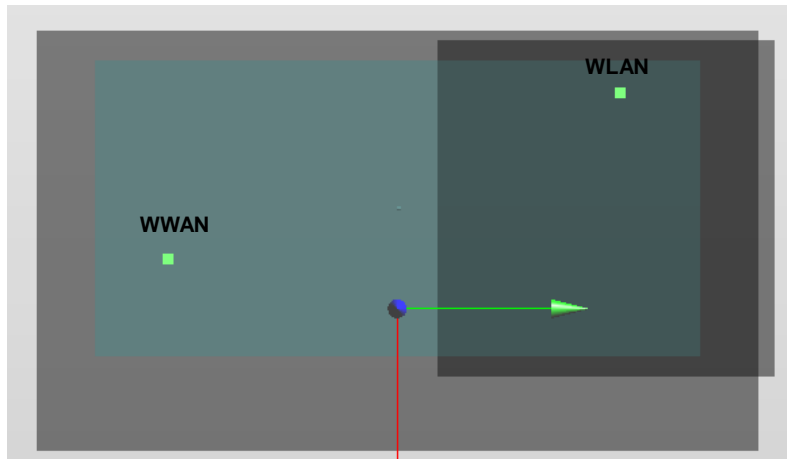


Case 29	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	GSM850	Back	0.957	5	-1.57	-63.41	-2.47	138.9	2.08	0.02	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

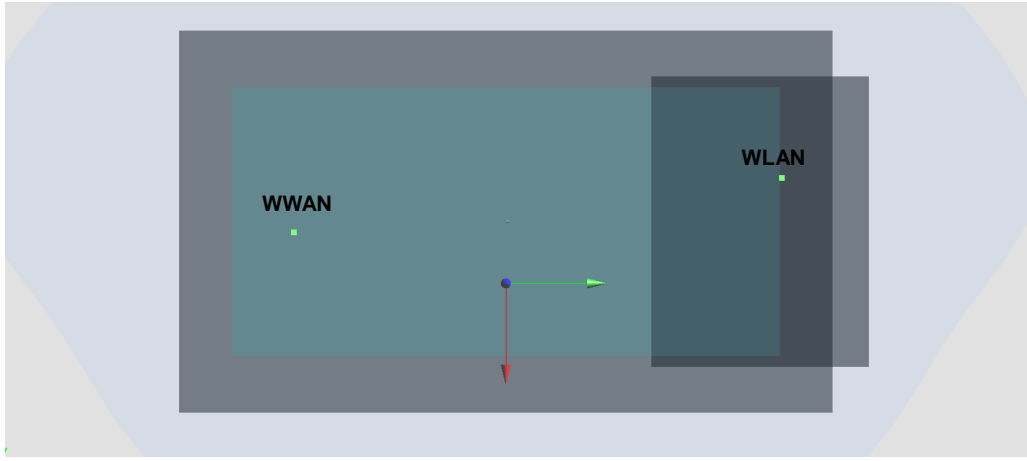


Case 30	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WLAN5GHz				X	Y	Z				
	WLAN5GHz	Back	1.119	5	-10.4	75.2	-0.34	148.8	2.41	0.03	Not required
	GSM1900		1.288	5	-12.4	-73.6	-1.06				

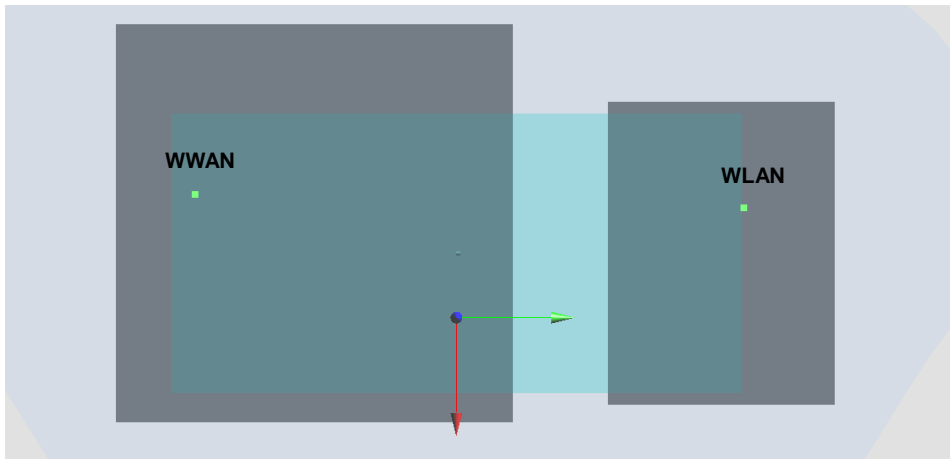


Case 31	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34	147.2	2.44	0.03	Not required
	WCDMA II		1.32	5	-12.4	-72	-1.06				

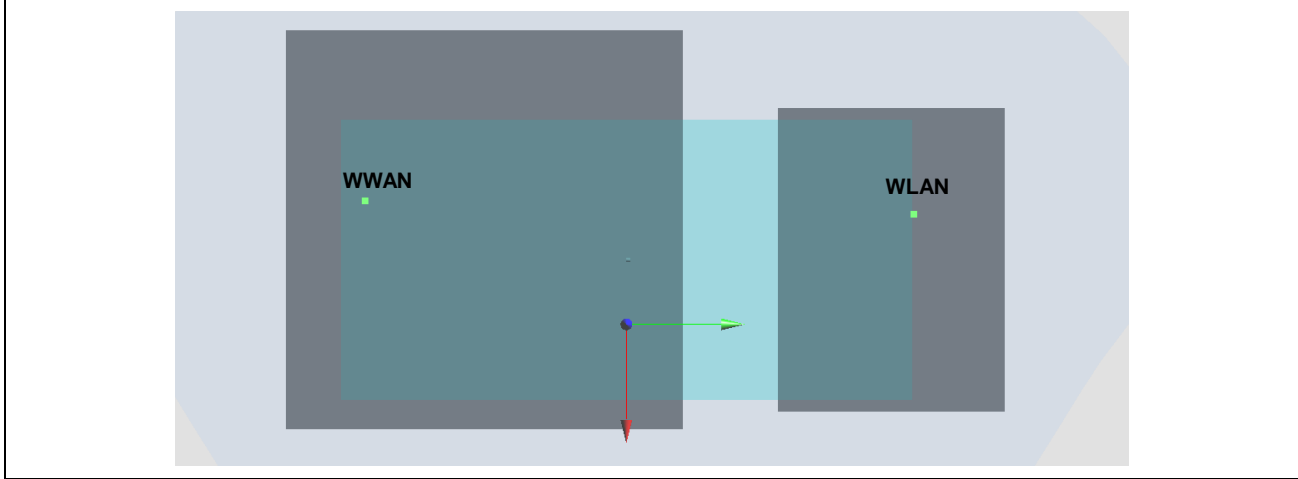


Case 32	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34	138.8	2.05	0.02	Not required
	WCDMA V		0.934	5	-1.76	-63.3	-2.49				

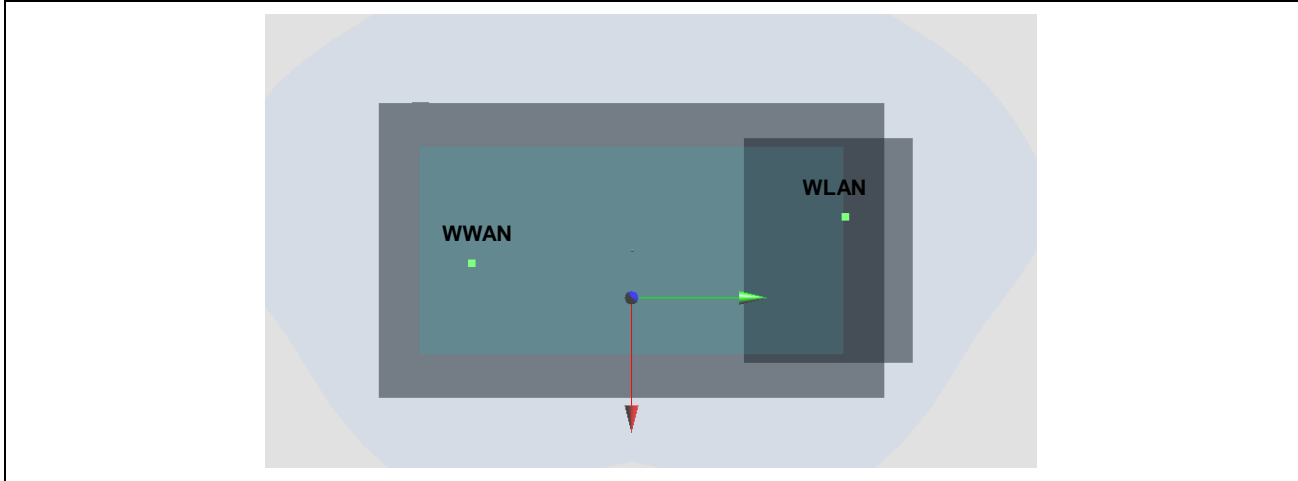


Case 33	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Back	0.951	5	7.9	-63.4	0	139.8	2.07	0.02	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

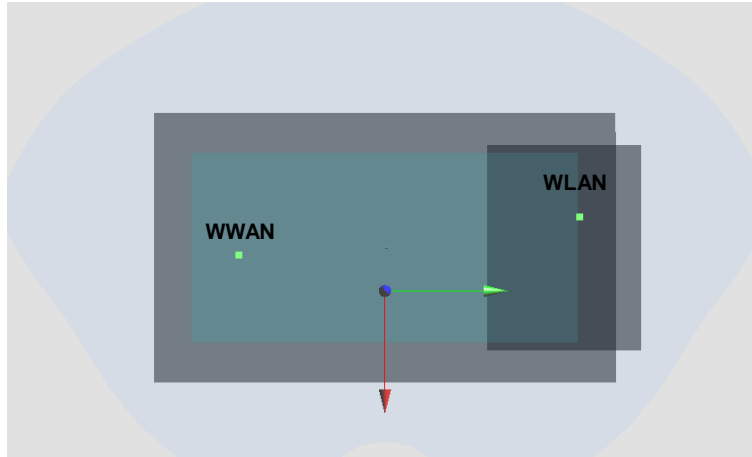


Case 34	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Back	1.334	5	-10.4	-73.9	-1.07	149.1	2.45	0.03	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

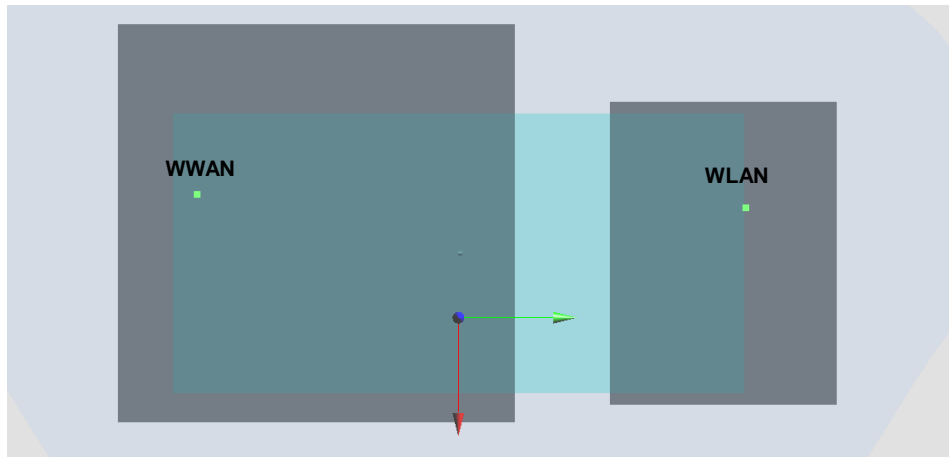


Case 35	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Back	0.832	5	7.9	-63.4	0	139.8	1.95	0.02	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

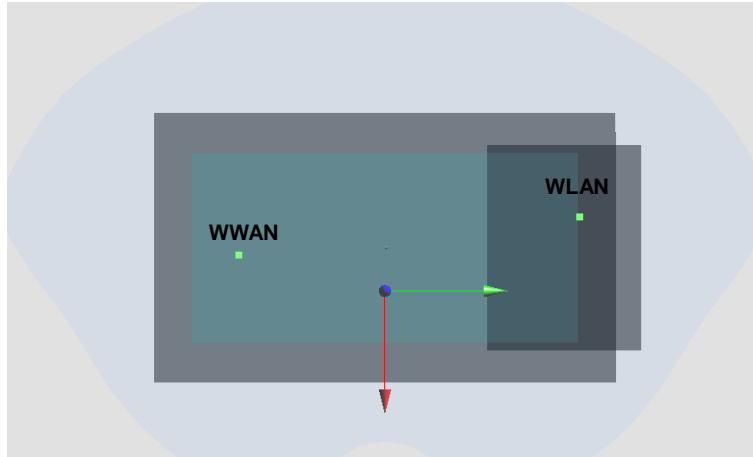


Case 36	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Back	1.292	5	-15.5	-73.8	-1.39	149.1	2.41	0.03	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

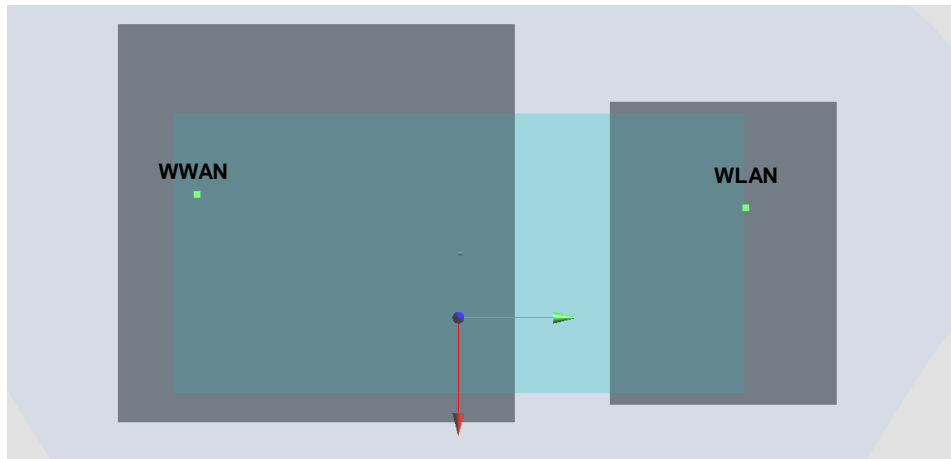


Case 37	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Back	1.337	5	-10.8	-72	-1.05	147.2	2.46	0.03	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

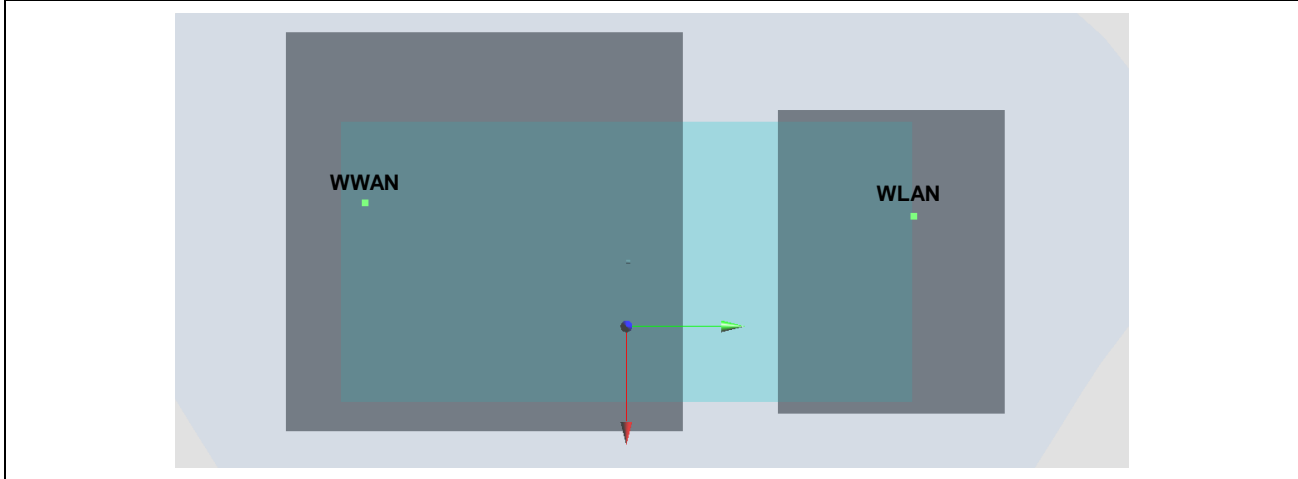


Case 38	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Back	1.069	5	-0.15	-63.31	-2.41	138.9	2.19	0.02	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

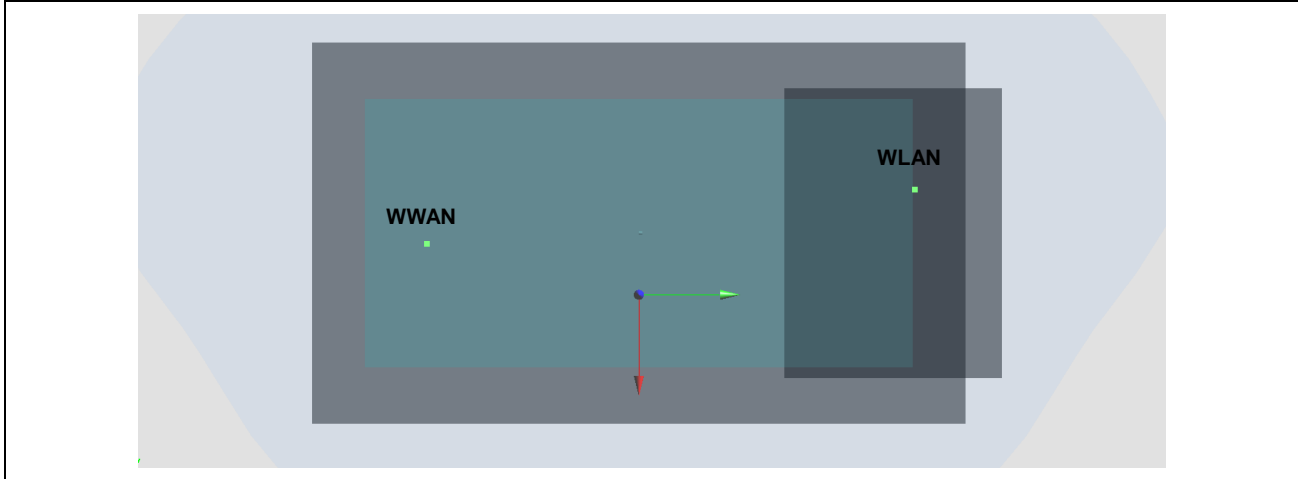


Case 39	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Back	0.964	5	2.96	-63.41	-2.49	139.3	2.08	0.02	Not required
	WLAN5GHz		1.119	5	-10.4	75.2	-0.34				

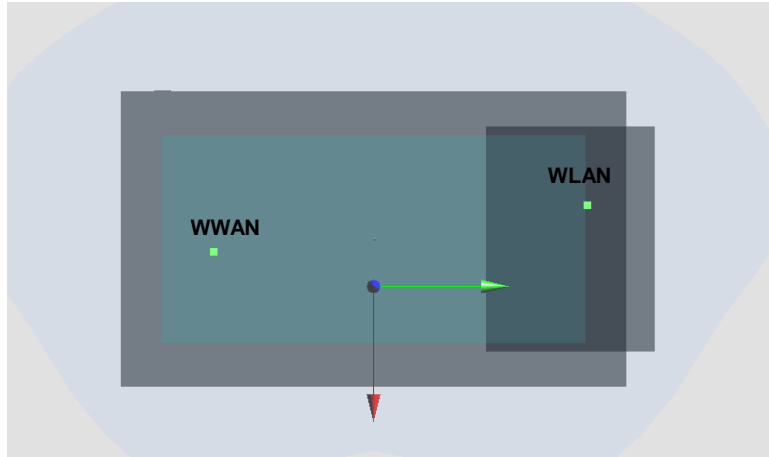


Case 40	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	0.957	5	-1.57	-63.41	-2.47	126.4	1.61	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

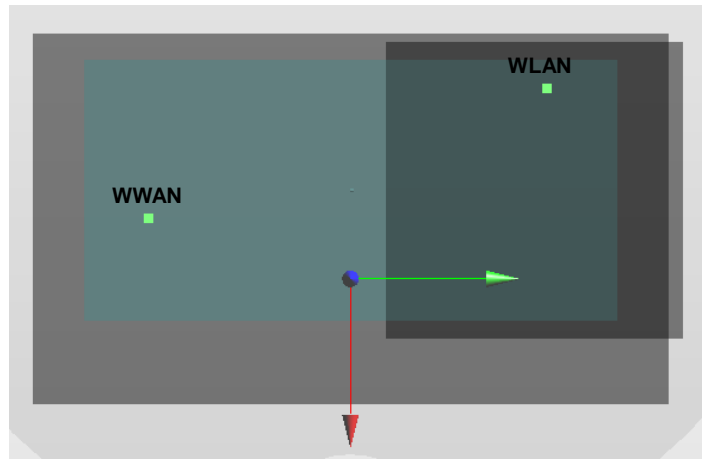


Case 41	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.288	5	-12.4	-73.6	-1.06	134.5	1.94	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

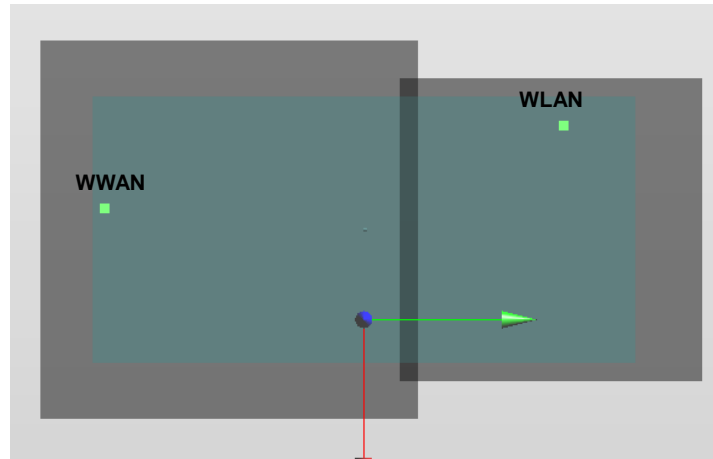


Case 42	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back with Headset	1.271	5	-12.4	-72	-1.06	132.9	1.93	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

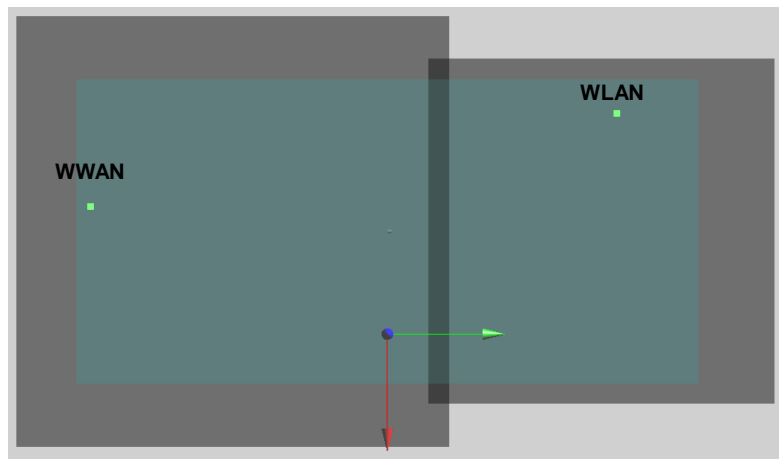


Case 43	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.32	5	-12.4	-72	-1.06	132.9	1.98	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

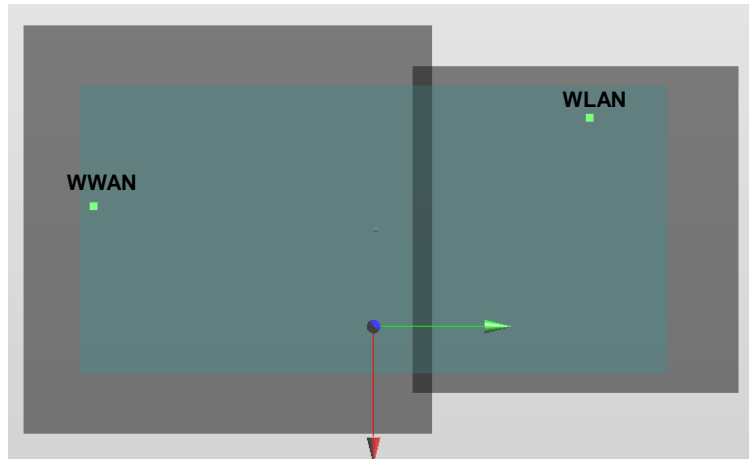


Case 44	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back with Headset	1.012	5	-12.4	-70.5	-1.1	131.4	1.67	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

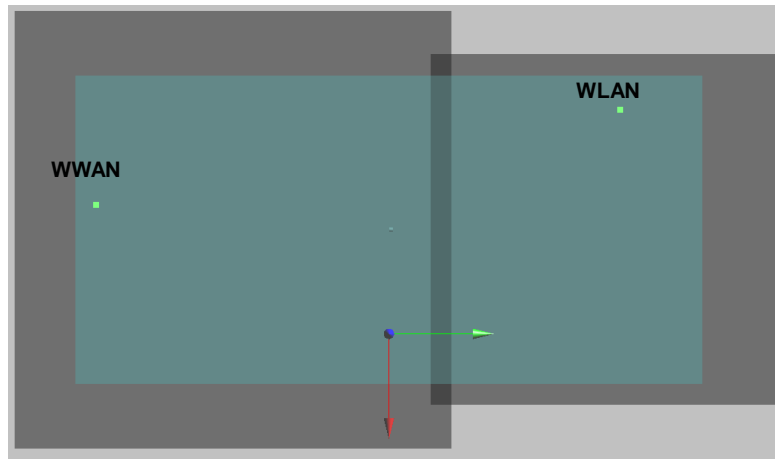


Case 45	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Back	1.006	5	7.9	-63.4	0	129.0	1.66	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

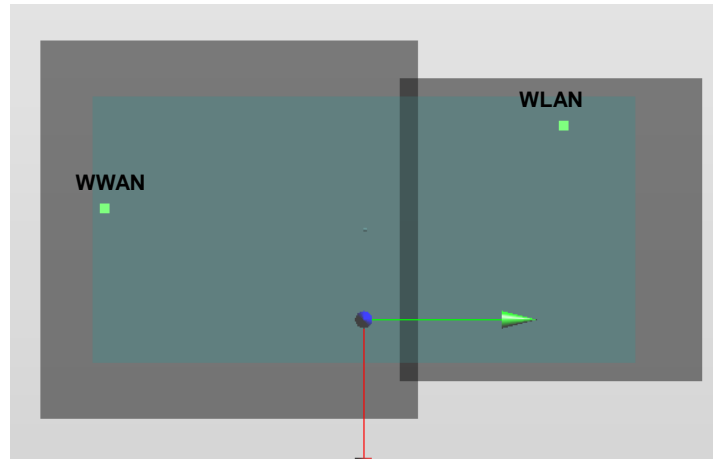


Case 46	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Back	1.292	5	-10.4	-73.9	-1.07	135.0	1.95	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

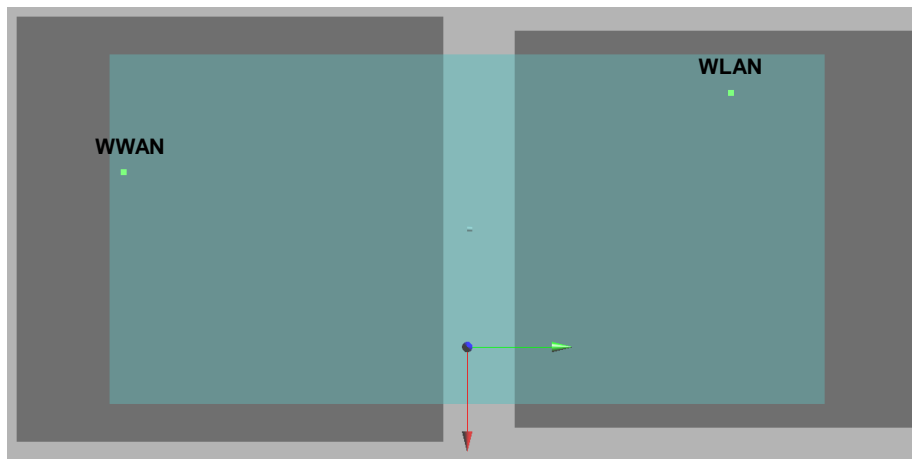


Case 47	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Back with Headset	1.269	5	-10.4	-75.4	-1.05	136.5	1.93	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

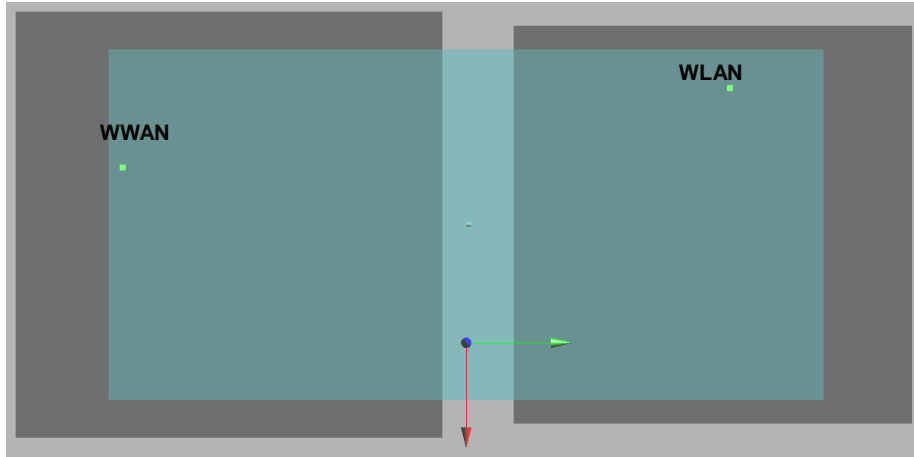


Case 48	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 2	Back	1.292	5	-15.5	-73.8	-1.39	134.3	1.95	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

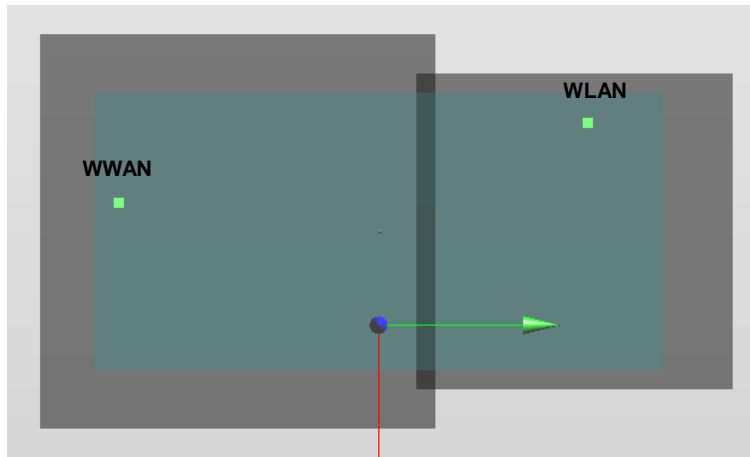


Case 49	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B2				X	Y	Z				
	WLAN2.4G	Back with Headset	0.656	5	-30.8	59.6	-1.34	134.3	1.80	0.02	Not required

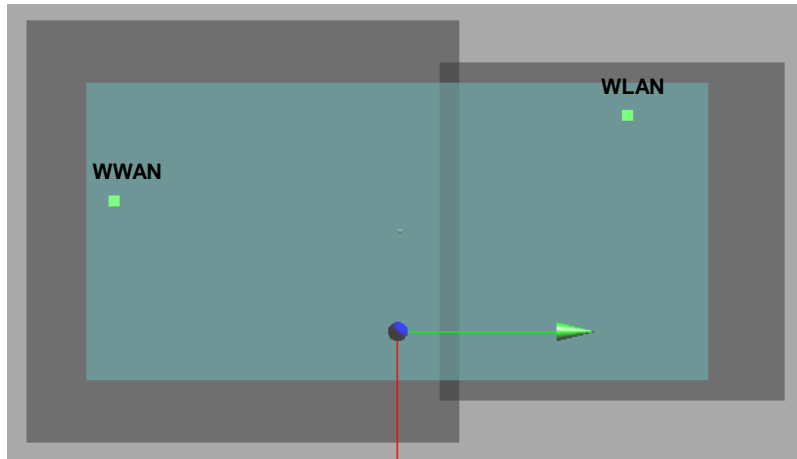


Case 50	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 4				X	Y	Z				
	WLAN2.4G	Back	0.656	5	-30.8	59.6	-1.34	133.1	1.99	0.02	Not required

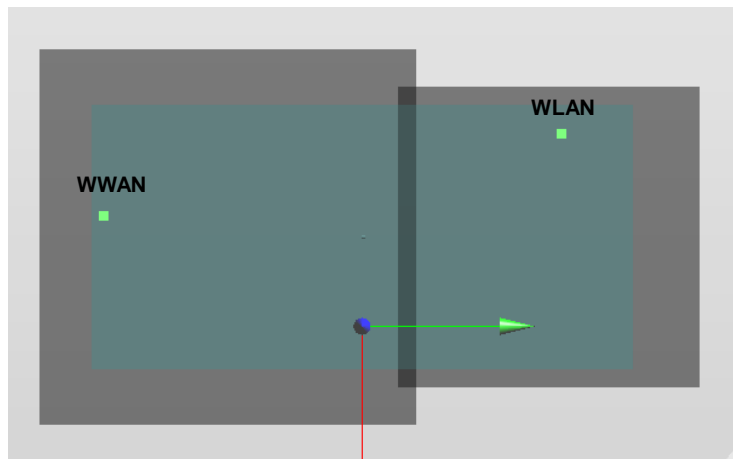


Case 51	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B4	Back with Headset	1.195	5	-10.9	-72	-1.07	133.1	1.85	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

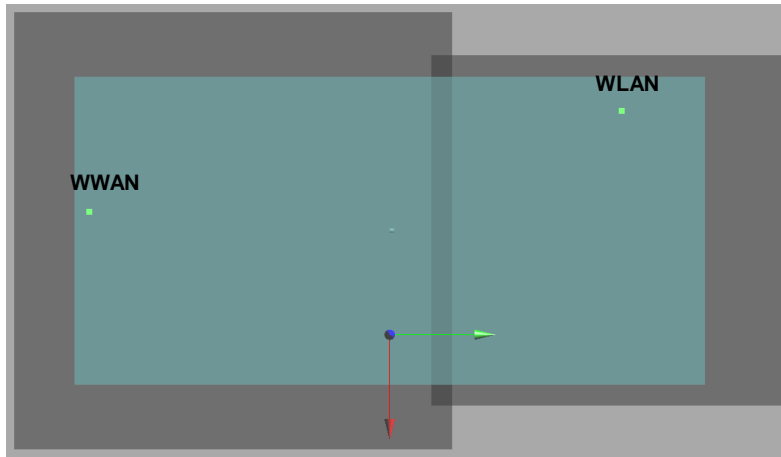


Case 52	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 5	Back	1.069	5	-0.15	-63.31	-2.41	126.7	1.73	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

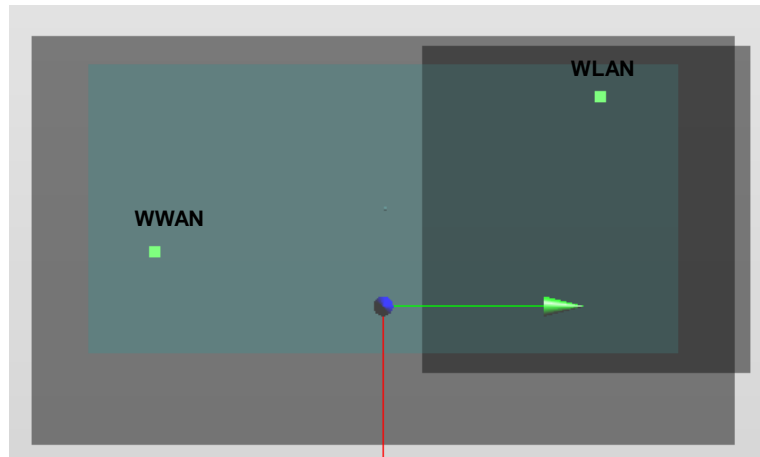


Case 53	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 13	Back	0.964	5	2.96	-63.41	-2.49	127.6	1.62	0.02	Not required
	WLAN2.4G		0.656	5	-30.8	59.6	-1.34				

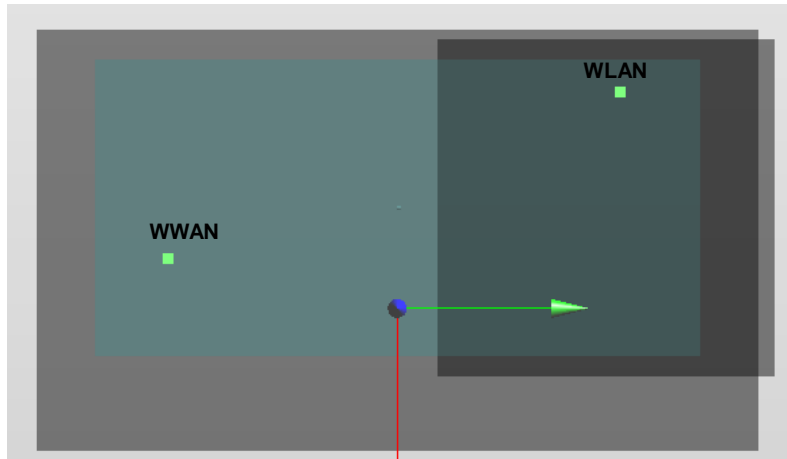


Case 54	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	0.957	5	-1.57	-63.41	-2.47	138.9	2.31	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

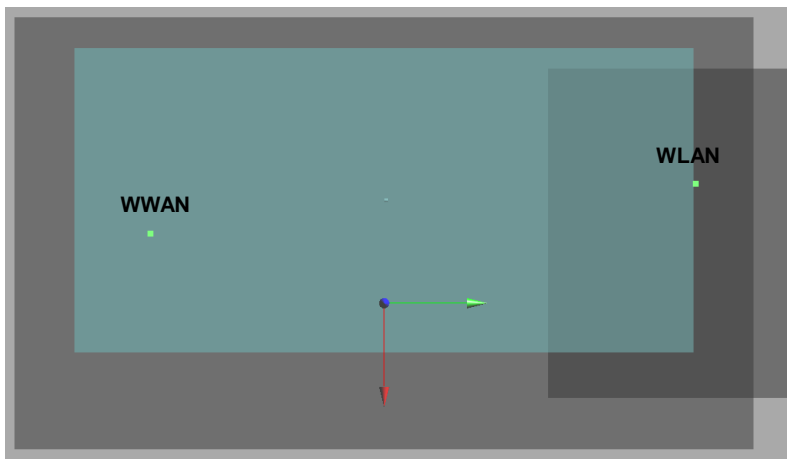


Case 55	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.288	5	-12.4	-72	-1.06	147.2	2.64	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

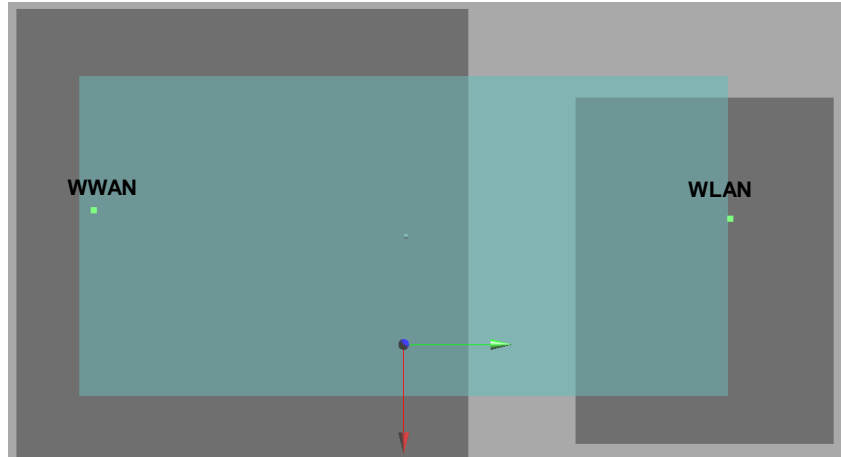


Case 56	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back with Headset	1.271	5	-12.4	-72	-1.06	147.2	2.47	0.03	Not required
	WLAN5GHz		1.199	5	-10.4	75.2	-0.34				

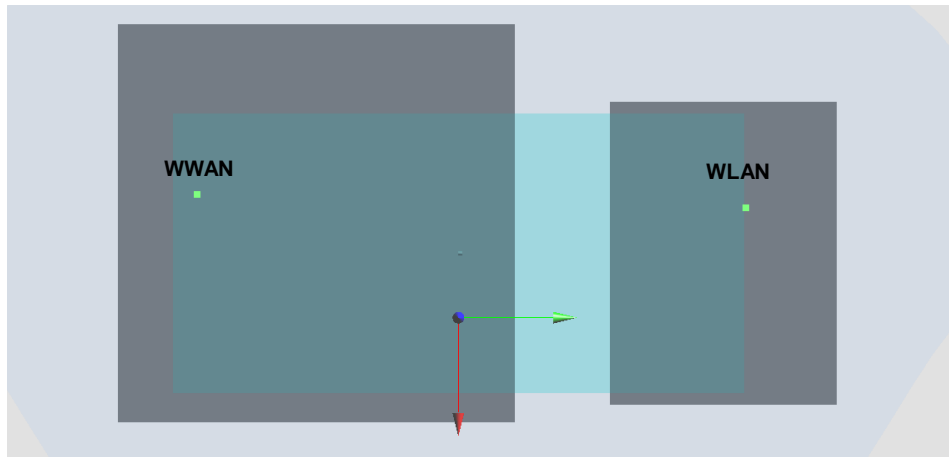


Case 57	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.32	5	-12.4	-72	-1.06	147.2	2.67	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

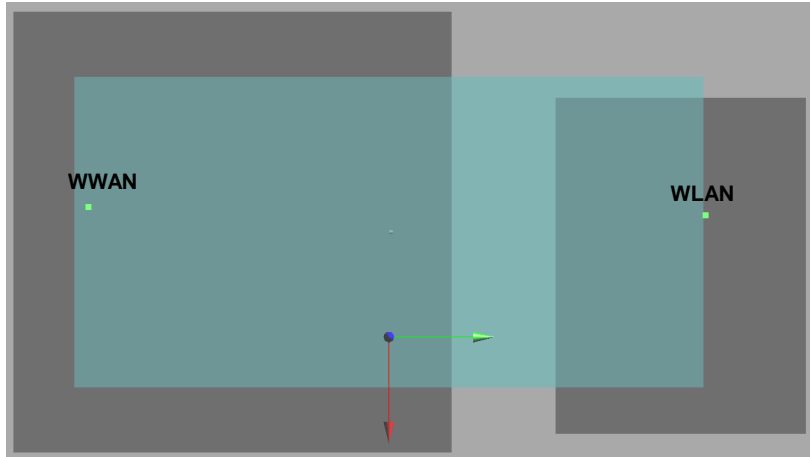


Case 58	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back with Headset	1.012	5	-12.4	-70.5	-1.1	145.7	2.21	0.02	Not required
	WLAN5GHz		1.199	5	-10.4	75.2	-0.34				

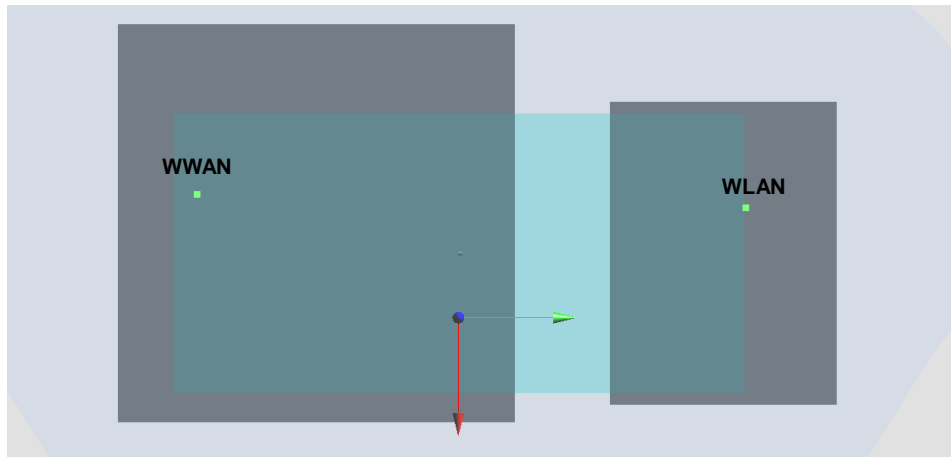


Case 59	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Back	0.934	5	-1.76	-63.3	-2.49	138.8	2.28	0.02	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

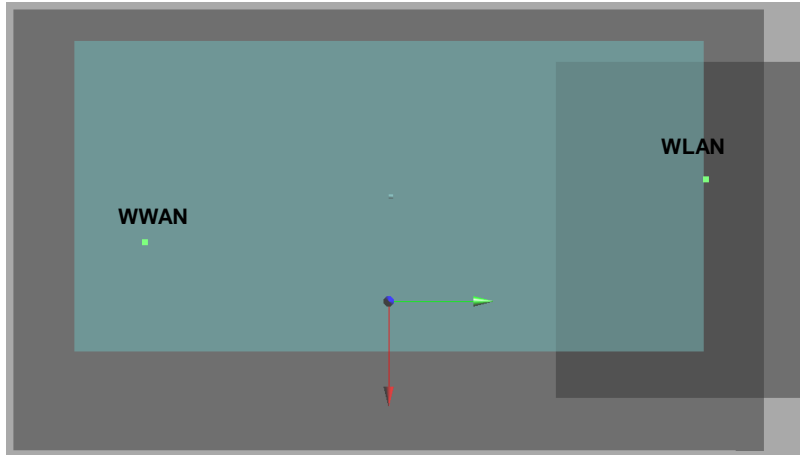


Case 60	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Back	1.006	5	7.9	-63.4	0	139.8	2.36	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

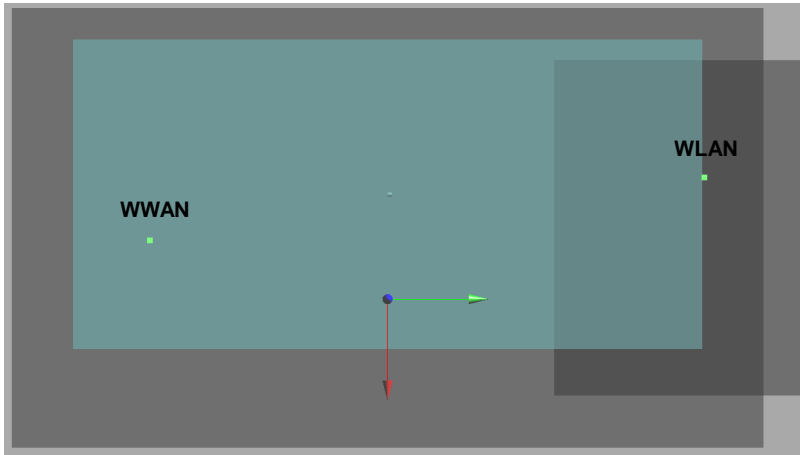


Case 61	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Back	1.292	5	-10.4	-73.9	-1.07	149.1	2.64	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

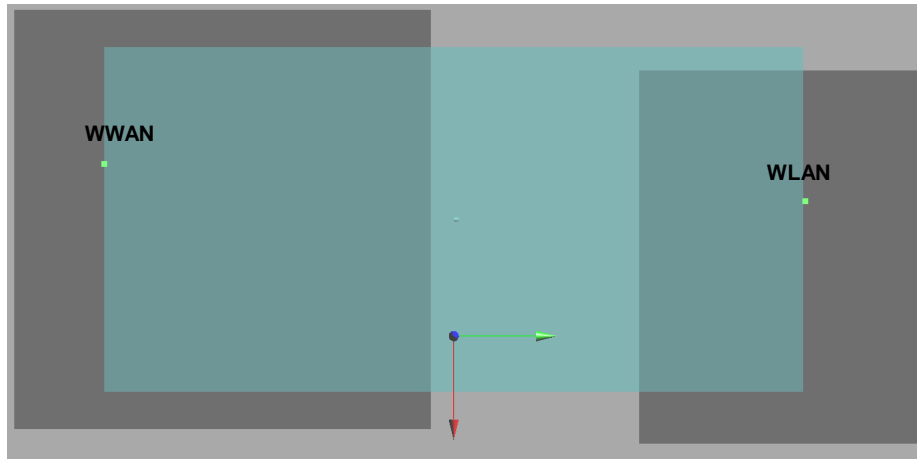


Case 62	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Back with Headset	1.269	5	-10.4	-75.4	-1.05	150.6	2.47	0.03	Not required
	WLAN5GHz		1.199	5	-10.4	75.2	-0.34				

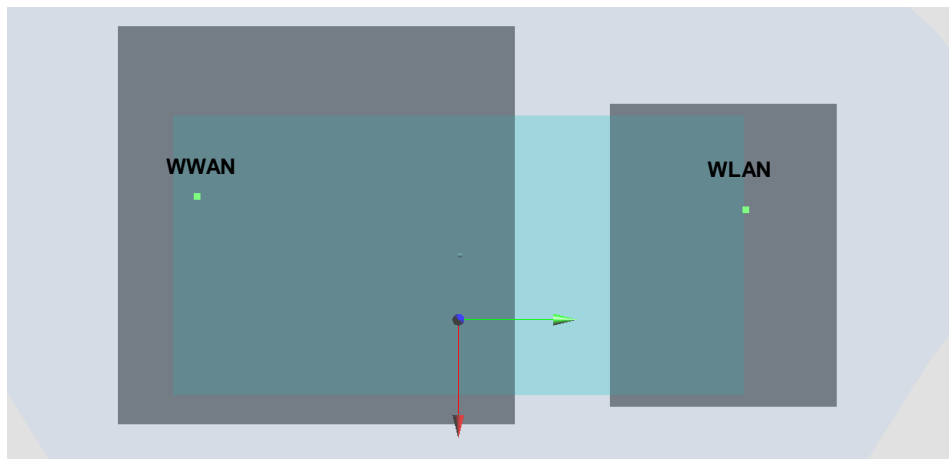


Case 63	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Back	0.874	5	-7.9	-63.4	0	138.6	2.22	0.02	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

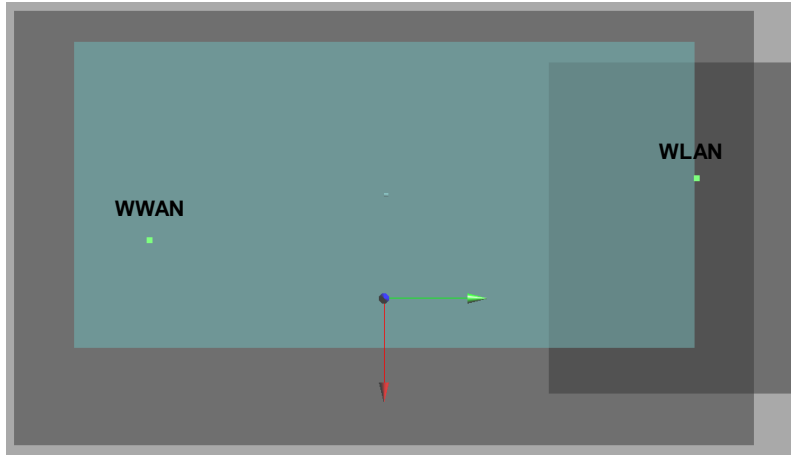


Case 64	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B2	Back	1.292	5	-15.5	-73.8	-1.39	149.1	2.64	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

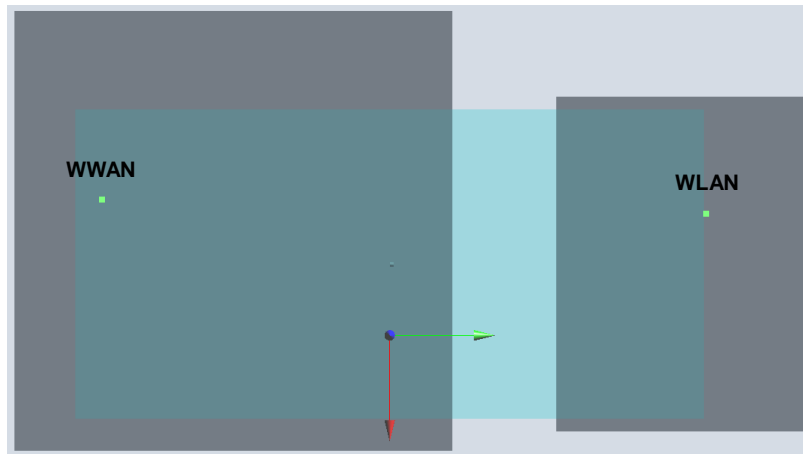


Case 65	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Back with Headset	1.144	5	-10.8	-72	-1.05	147.2	2.34	0.02	Not required
	WLAN5GHz		1.199	5	-10.4	75.2	-0.34				

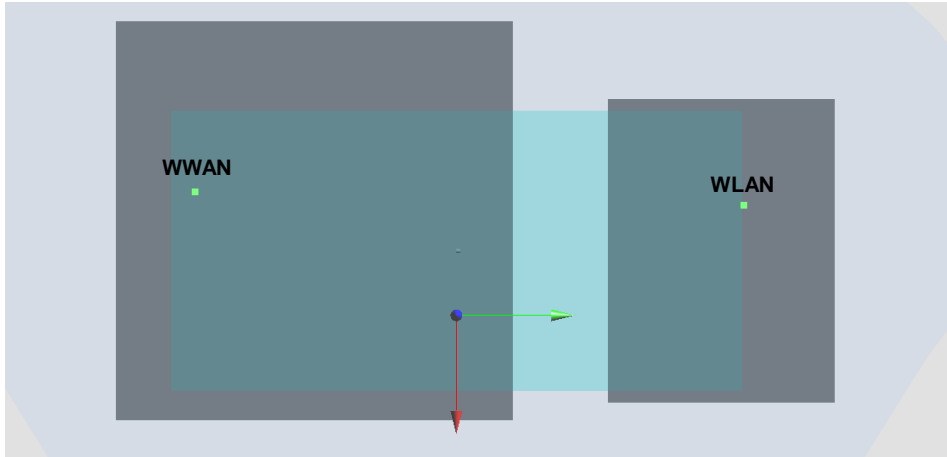


Case 66	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B4	Back	1.337	5	-10.8	-72	-1.05	147.2	2.69	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

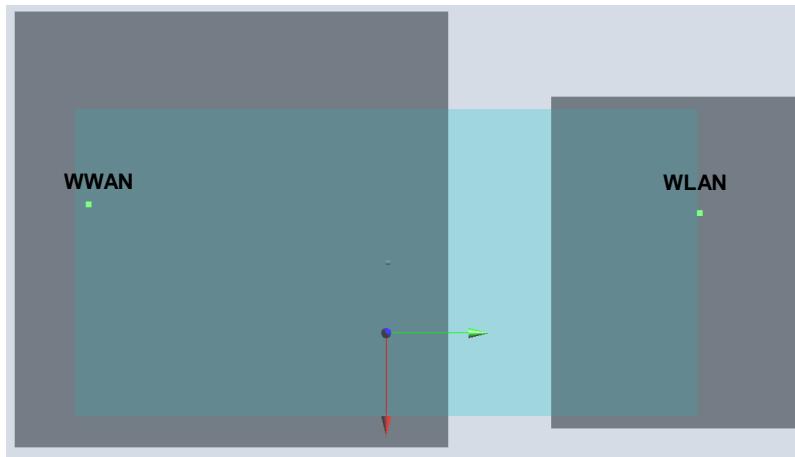


Case 67	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Back with Headset	1.195	5	-10.8	-72	-1.07	147.2	2.39	0.03	Not required
	WLAN5GHz		1.199	5	-10.4	75.2	-0.34				

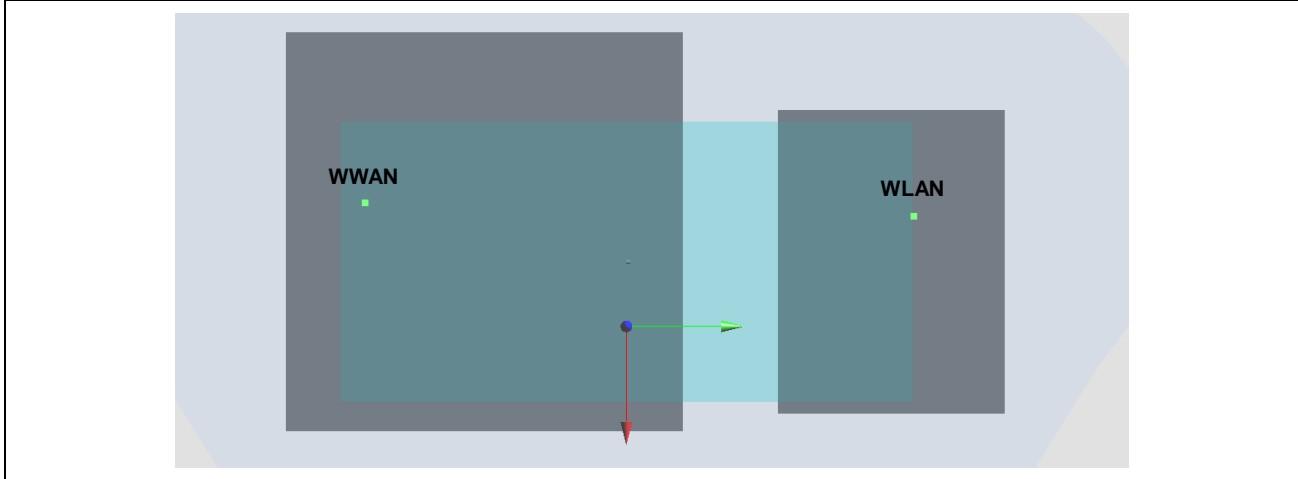

Case 68	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B5	Back	1.069	5	-0.15	-63.31	-2.41	138.9	2.42	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

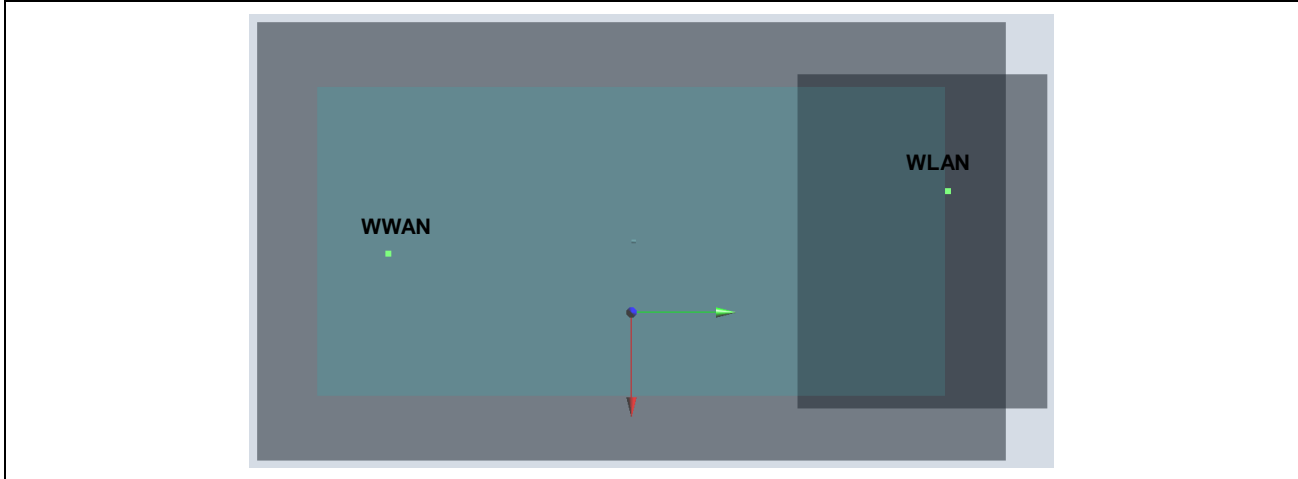

Case 69	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B13	Back	0.964	5	2.96	-63.41	-2.49	139.3	2.31	0.03	Not required
	WLAN5GHz		1.349	5	-10.4	75.2	-0.34				

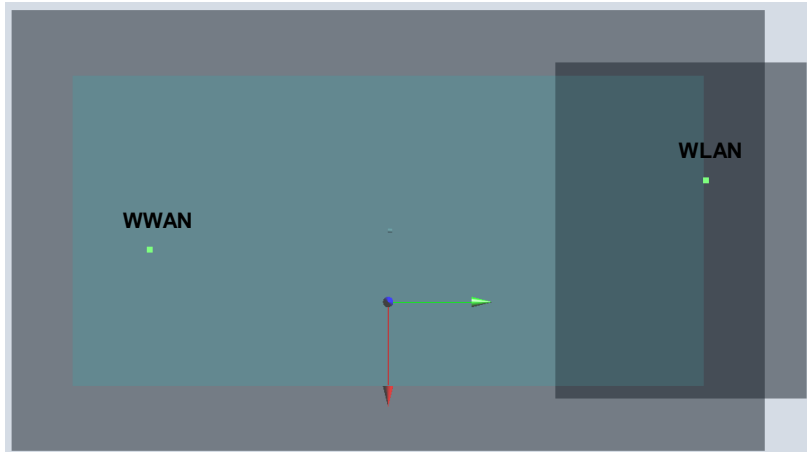

Test Engineer : Bevis Chang Galen Chang Mood Huang Wilson Lin White Huang Jay Jian Willy Yu
 Andy Jiang Randy Lin Neil Hsiang and Ted Hsieh



15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.