



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT1921-5, XT1921-3  
**FCC ID** : IHDT56XC2  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Dec. 20, 2017 and testing was completed on Jan. 18, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56XC2

Page Number : 1 of 30

Report Issued Date : Feb. 13, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.4



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 7

    1.7 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 12

    3.2 Maximum Conducted Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Unwanted Emissions Measurement ..... 18

    3.5 AC Conducted Emission Measurement..... 25

    3.6 Automatically Discontinue Transmission ..... 27

    3.7 Antenna Requirements ..... 28

**4 LIST OF MEASURING EQUIPMENT ..... 29**

**5 UNCERTAINTY OF EVALUATION ..... 30**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7D2018E	Rev. 01	Initial issue of report	Feb. 13, 2018



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 7.31 dB at 11490.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 16.40 dB at 0.566 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Motorola Mobility LLC**  
222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

## 1.2 Manufacturer

**Motorola Mobility LLC**  
222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Mobile Cellular Phone
<b>Brand Name</b>	Motorola
<b>Model Name</b>	XT1921-5, XT1921-3
<b>FCC ID</b>	IHDT56XC2
<b>IMEI Code</b>	990005440074244 (for Radiation) 990005440016179 (for Conduction)
<b>EUT supports Radios application</b>	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/FM/GNSS WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 Bluetooth BR/EDR/LE
<b>HW Version</b>	DVT1B
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
<b>AC Adapter 1</b>	Brand Name : Motorola
	Model Name : C-P35
<b>AC Adapter 2</b>	Brand Name : Motorola
	Model Name : SSW-2919UMTJ C-P35 SPN5945A
<b>AC Adapter 3</b>	Brand Name : Motorola
	Model Name : C-P56
<b>AC Adapter 4</b>	Brand Name : Motorola
	Model Name : C-P56
<b>Battery</b>	Brand Name : Motorola
	Model Name : GK40
<b>USB Cable</b>	Brand Name : Saibao
	Model Name : SWT-A083A



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 15.97 dBm / 0.0395 W 802.11n HT20 : 10.97 dBm / 0.0125 W 802.11n HT40 : 9.90 dBm / 0.0098 W
99% Occupied Bandwidth	802.11a : 19.05 MHz 802.11n HT20 : 19.05 MHz 802.11n HT40 : 36.60 MHz
Antenna Type / Gain	PIFA Antenna with gain -3.59 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	-	-	165	5825

Note: The above Frequency and Channel in "\*" were 802.11n HT40.





## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

<b>AC Conducted Emission</b>	Mode 1 : GSM 1900 Idle + Bluetooth Link + WLAN (5GHz) Link + MP3 + SD Card + USB Cable (Charging from Adapter 1) + Earphone
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter 1.	


Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

## 2.3 Connection Diagram of Test System

<WLAN TX Mode>

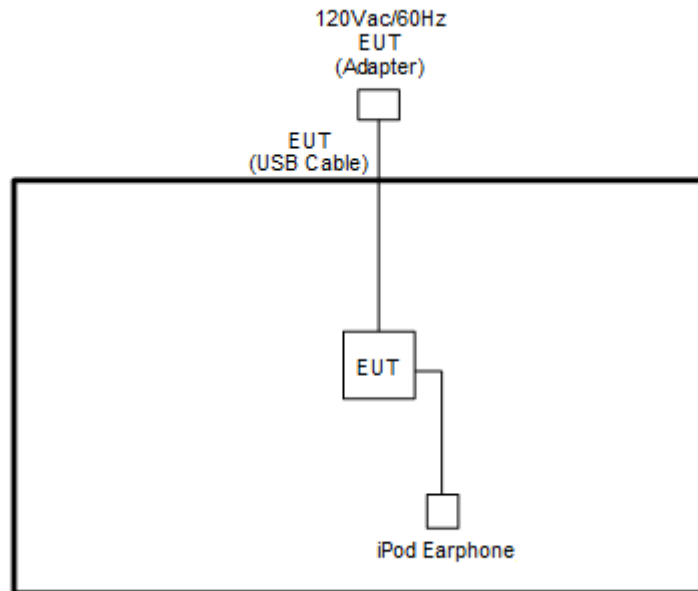

<AC Conducted Emission Mode>

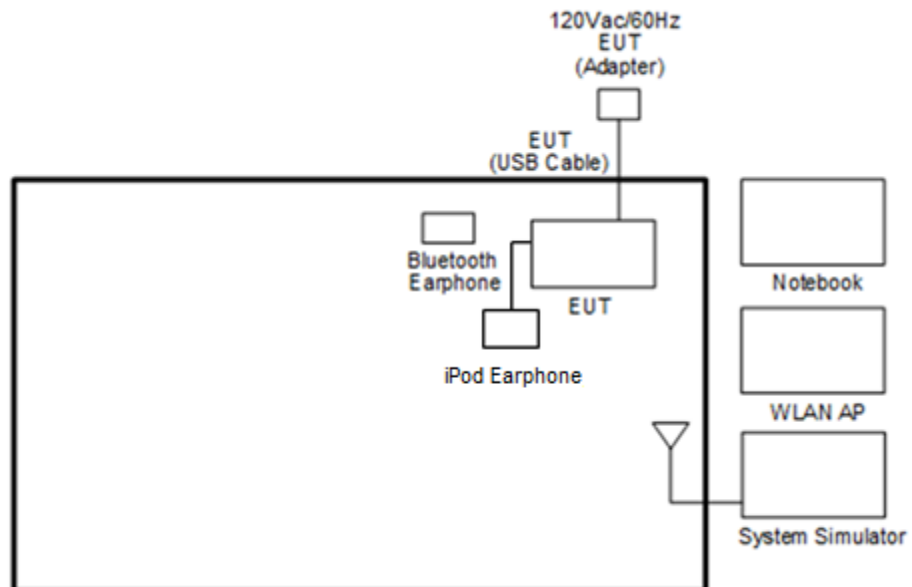



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	iPod Earphone	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

### 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup

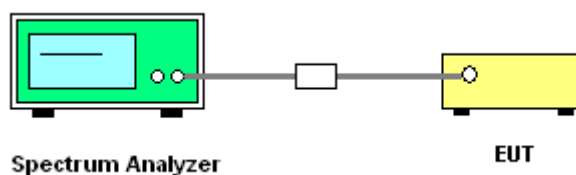

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

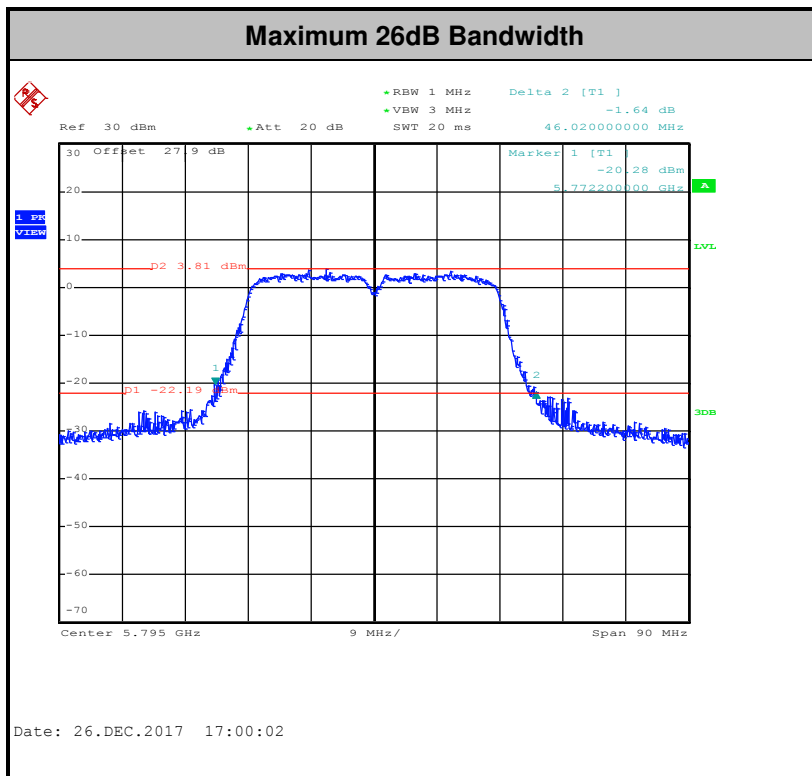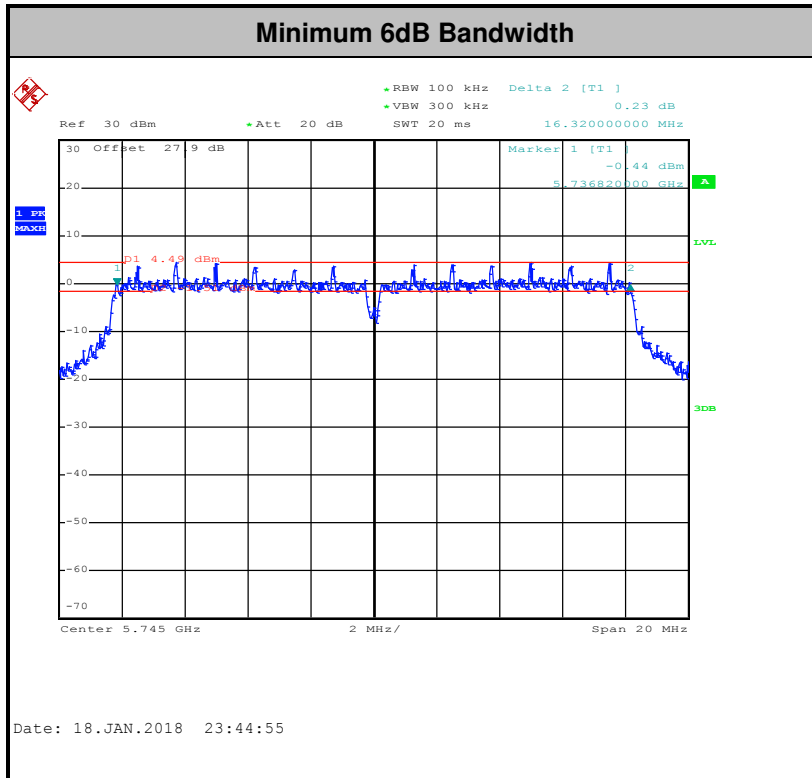

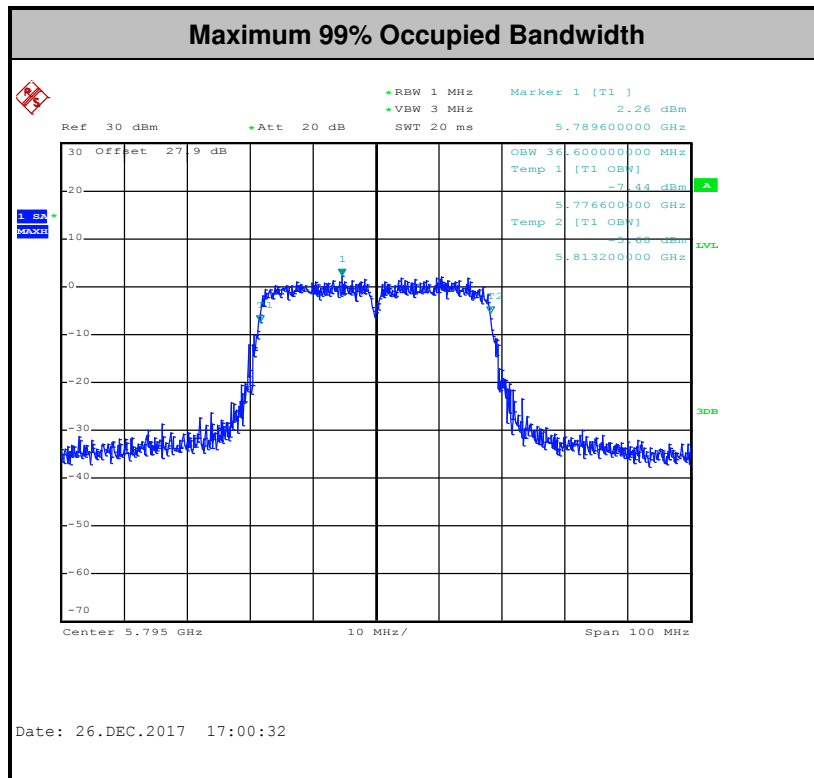

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

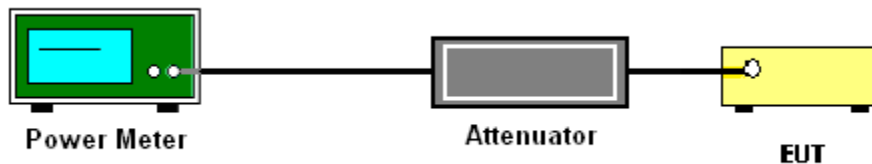

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.


##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.




### 3.3.4 Test Setup

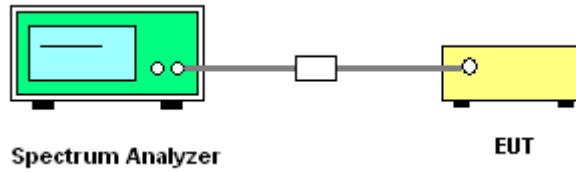

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

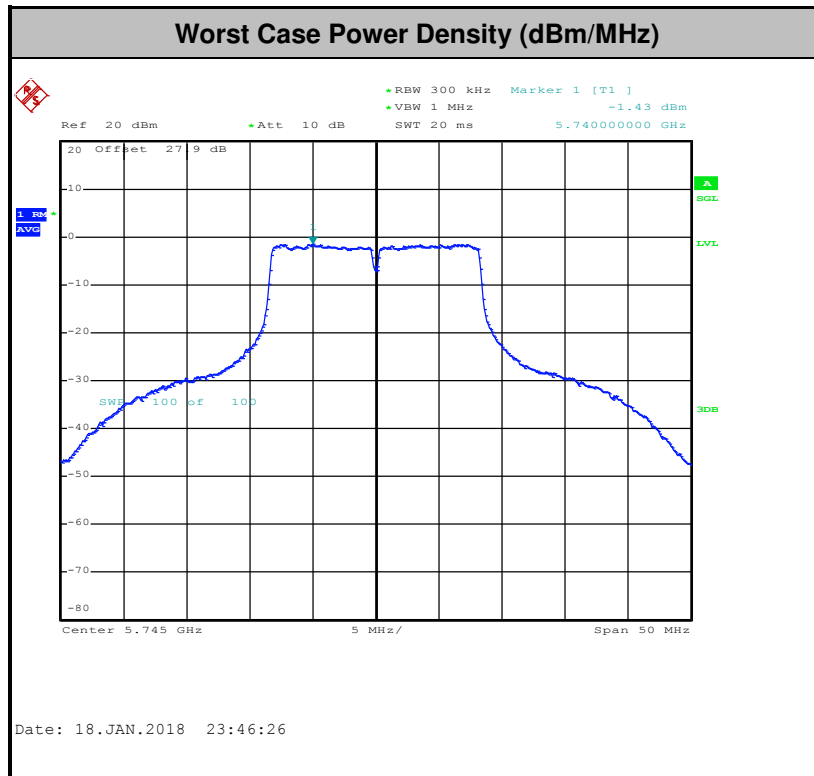



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### **3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

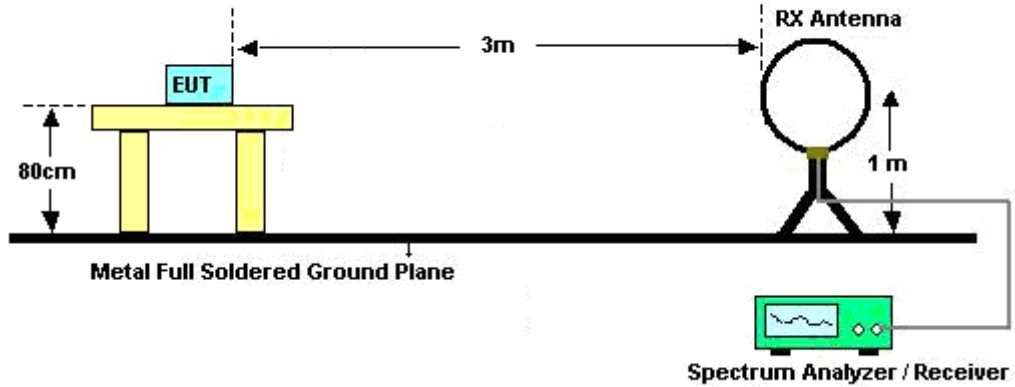

For radiated emissions from 30MHz to 1GHz

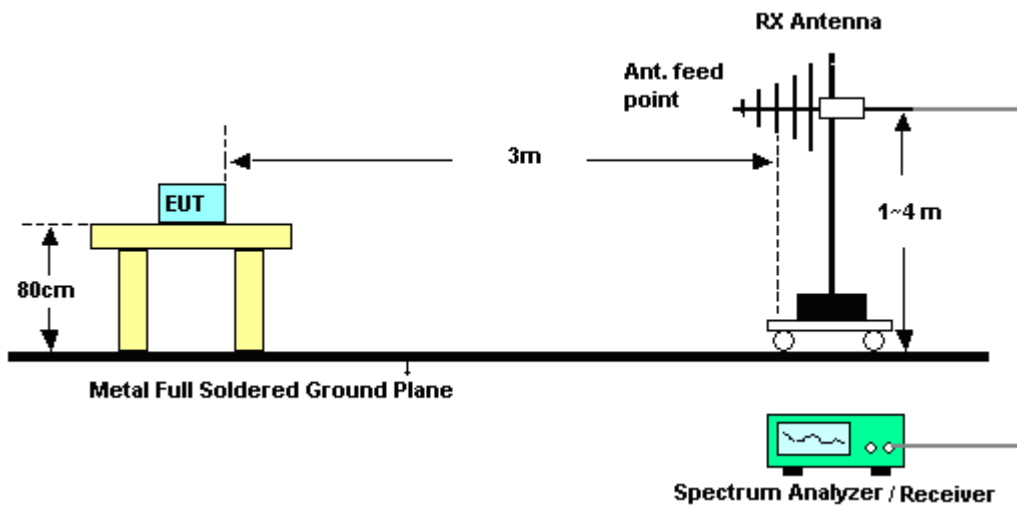

For radiated emissions above 1GHz

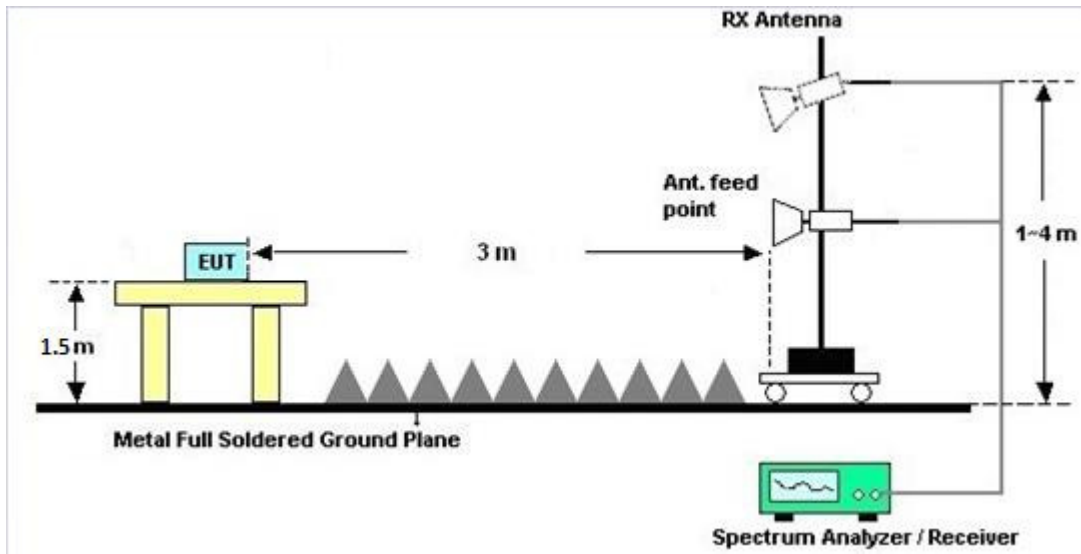



### **Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

#### **3.4.5 Test Result of Radiated Band Edges**

Please refer to Appendix C and D.

#### **3.4.6 Duty Cycle**

Please refer to Appendix E.

#### **3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)**

Please refer to Appendix C and D.





### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

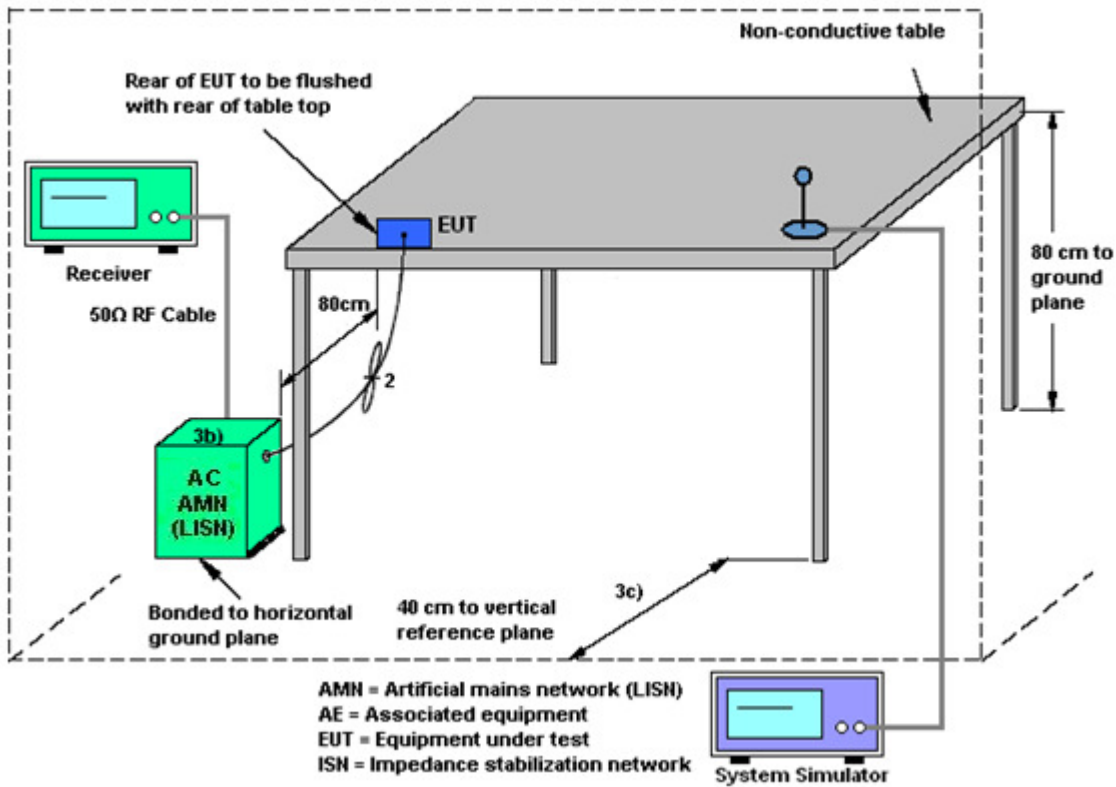

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 26, 2017	Dec. 22, 2017~ Jan. 18, 2018	Sep. 25, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz z	Sep. 26, 2017	Dec. 22, 2017~ Jan. 18, 2018	Sep. 25, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 13, 2017	Dec. 22, 2017~ Jan. 18, 2018	Nov. 12, 2018	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 29, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 20, 2017	Dec. 29, 2017	Sep. 19, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Dec. 29, 2017	Nov. 29, 2018	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Dec. 25, 2017~ Jan. 17, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Dec. 25, 2017~ Jan. 17, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 14, 2017	Dec. 25, 2017~ Jan. 17, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 16, 2017	Dec. 25, 2017~ Jan. 17, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Dec. 25, 2017~ Jan. 17, 2018	Nov. 22, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 10, 2016	Dec. 25, 2017~ Jan. 17, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2017	Dec. 25, 2017~ Jan. 17, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Dec. 25, 2017~ Jan. 17, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Dec. 25, 2017~ Jan. 17, 2018	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz ~ 40GHz	Nov. 27, 2017	Dec. 25, 2017~ Jan. 17, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	Dec. 07, 2017	Dec. 25, 2017~ Jan. 17, 2018	Dec. 06, 2018	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.70
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.50
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Derek Hsu/Reece Lin/ Luffy Lin	Temperature:	21~25	°C
Test Date:	2017/12/22~2018/1/18	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6Mbps	1	149	5745	18.90	41.07	16.32	0.5	Pass
11a	6Mbps	1	157	5785	19.05	41.43	16.36	0.5	Pass
11a	6Mbps	1	165	5825	18.70	39.20	16.32	0.5	Pass
HT20	MCS 0	1	149	5745	18.80	24.30	17.56	0.5	Pass
HT20	MCS 0	1	157	5785	18.85	24.35	17.56	0.5	Pass
HT20	MCS 0	1	165	5825	19.05	24.55	17.58	0.5	Pass
HT40	MCS 0	1	151	5755	36.60	45.18	35.40	0.5	Pass
HT40	MCS 0	1	159	5795	36.60	46.02	35.36	0.5	Pass



**TEST RESULTS DATA**  
**Average Power Table**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	149	5745	0.64	15.97	30.00	-3.59		Pass
11a	6Mbps	1	157	5785	0.64	15.92	30.00	-3.59		Pass
11a	6Mbps	1	165	5825	0.64	15.86	30.00	-3.59		Pass
HT20	MCS 0	1	149	5745	0.65	10.97	30.00	-3.59		Pass
HT20	MCS 0	1	157	5785	0.65	10.81	30.00	-3.59		Pass
HT20	MCS 0	1	165	5825	0.65	10.94	30.00	-3.59		Pass
HT40	MCS 0	1	151	5755	0.52	9.90	30.00	-3.59		Pass
HT40	MCS 0	1	159	5795	0.52	9.83	30.00	-3.59		Pass

***TEST RESULTS DATA***  
***Power Spectral Density***

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6Mbps	1	149	5745	0.64	2.22	1.43	30.00	-3.59	Pass
11a	6Mbps	1	157	5785	0.64	2.22	1.10	30.00	-3.59	Pass
11a	6Mbps	1	165	5825	0.64	2.22	1.29	30.00	-3.59	Pass
HT20	MCS 0	1	149	5745	0.65	2.22	-3.78	30.00	-3.59	Pass
HT20	MCS 0	1	157	5785	0.65	2.22	-4.07	30.00	-3.59	Pass
HT20	MCS 0	1	165	5825	0.65	2.22	-3.81	30.00	-3.59	Pass
HT40	MCS 0	1	151	5755	0.52	2.22	-7.90	30.00	-3.59	Pass
HT40	MCS 0	1	159	5795	0.52	2.22	-8.14	30.00	-3.59	Pass




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Blue Lan	Temperature :	24~26°C
		Relative Humidity :	63~65%

# EUT Information

Report NO : 7D2018  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

ENV216 Auto Test FCC Power Bar - L

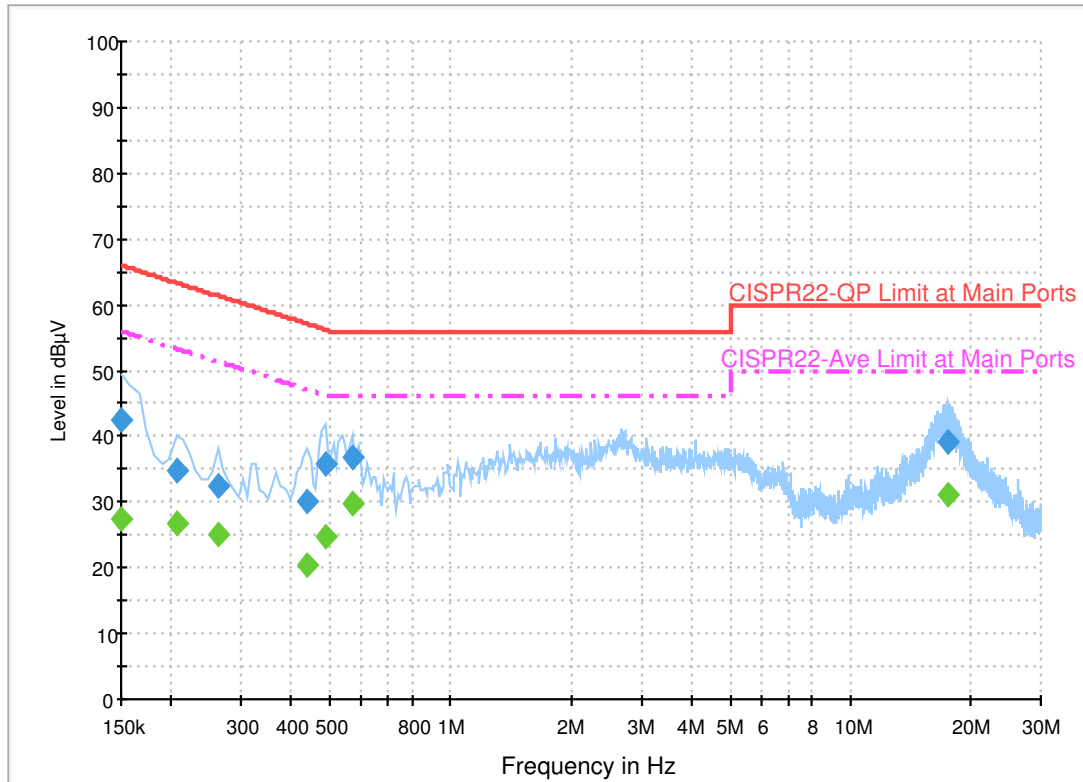

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	42.4	Off	L1	19.5	23.6	66.0
0.206000	34.7	Off	L1	19.5	28.7	63.4
0.262000	32.5	Off	L1	19.5	28.9	61.4
0.438000	30.0	Off	L1	19.5	27.1	57.1
0.486000	35.9	Off	L1	19.5	20.3	56.2
0.566000	36.7	Off	L1	19.5	19.3	56.0
17.654000	39.0	Off	L1	19.8	21.0	60.0


## Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	27.5	Off	L1	19.5	28.5	56.0
0.206000	26.7	Off	L1	19.5	26.7	53.4
0.262000	25.2	Off	L1	19.5	26.2	51.4
0.438000	20.3	Off	L1	19.5	26.8	47.1
0.486000	24.7	Off	L1	19.5	21.5	46.2
0.566000	29.6	Off	L1	19.5	16.4	46.0
17.654000	31.0	Off	L1	19.8	19.0	50.0

# EUT Information

Report NO : 7D2018  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

ENV216 Auto Test FCC Power Bar - N

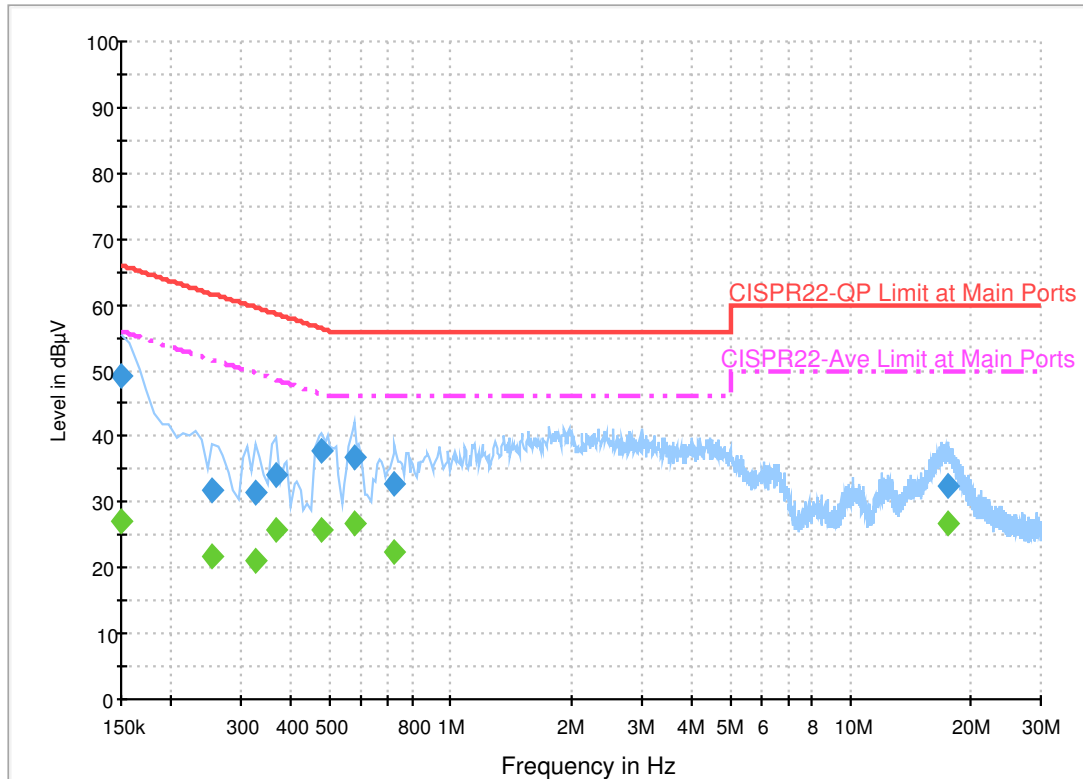

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	49.1	Off	N	19.5	16.9	66.0
0.254000	31.8	Off	N	19.5	29.8	61.6
0.326000	31.6	Off	N	19.5	28.0	59.6
0.366000	34.2	Off	N	19.5	24.4	58.6
0.478000	37.8	Off	N	19.5	18.6	56.4
0.574000	36.8	Off	N	19.5	19.2	56.0
0.726000	32.8	Off	N	19.5	23.2	56.0
17.454000	32.5	Off	N	19.8	27.5	60.0

## Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	27.0	Off	N	19.5	29.0	56.0
0.254000	21.8	Off	N	19.5	29.8	51.6
0.326000	21.1	Off	N	19.5	28.5	49.6
0.366000	25.9	Off	N	19.5	22.7	48.6
0.478000	25.9	Off	N	19.5	20.5	46.4
0.574000	26.6	Off	N	19.5	19.4	46.0
0.726000	22.6	Off	N	19.5	23.4	46.0
17.454000	26.7	Off	N	19.8	23.3	50.0



### Appendix C. Radiated Spurious Emission

Test Engineer :	Hao Hsu, Jacky Hung, and Ken Wu	Temperature :	23~26°C
		Relative Humidity :	50~55%

**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 149 5745MHz		5608.8	50.82	-17.38	68.2	42.06	32.29	9.55	33.08	219	43	P	H	
		5699	53.88	-50.58	104.46	44.81	32.44	9.75	33.12	219	43	P	H	
		5717.4	67.87	-42.2	110.07	58.72	32.47	9.81	33.13	219	43	P	H	
		5724.2	75.93	-44.45	120.38	66.75	32.5	9.81	33.13	219	43	P	H	
	*	5745	111.06	-	-	101.8	32.53	9.88	33.15	219	43	P	H	
	*	5745	102.02	-	-	92.76	32.53	9.88	33.15	219	43	A	H	
														H
														H
			5615.8	49.89	-18.31	68.2	41.1	32.32	9.55	33.08	100	314	P	V
			5691.4	51.24	-47.62	98.86	42.17	32.44	9.75	33.12	100	314	P	V
			5714	60.72	-48.4	109.12	51.57	32.47	9.81	33.13	100	314	P	V
			5724.2	73.95	-46.43	120.38	64.77	32.5	9.81	33.13	100	314	P	V
	*		5745	104.05	-	-	94.79	32.53	9.88	33.15	100	314	P	V
	*		5745	95.14	-	-	85.88	32.53	9.88	33.15	100	314	A	V
														V
													V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
		5613	49.88	-18.32	68.2	41.12	32.29	9.55	33.08	219	44	P	H
		5689.4	51.3	-46.08	97.38	42.23	32.44	9.75	33.12	219	44	P	H
		5719.8	50.06	-60.68	110.74	40.88	32.5	9.81	33.13	219	44	P	H
		5724.2	50.21	-70.17	120.38	41.03	32.5	9.81	33.13	219	44	P	H
	*	5785	110.69	-	-	101.25	32.6	10.01	33.17	219	44	P	H
	*	5785	101.4	-	-	91.96	32.6	10.01	33.17	219	44	A	H
		5850.8	48.66	-71.72	120.38	39.11	32.72	10.02	33.19	219	44	P	H
		5861.2	49.49	-59.57	109.06	39.93	32.75	10.02	33.21	219	44	P	H
		5883	49.58	-49.68	99.26	39.99	32.78	10.02	33.21	219	44	P	H
		5949.4	49.39	-18.81	68.2	39.7	32.91	10.02	33.24	219	44	P	H
													H
													H
802.11a													
CH 157													
5785MHz		5623.2	49.33	-18.87	68.2	40.54	32.32	9.55	33.08	228	118	P	V
		5663.8	49.47	-28.97	78.44	40.52	32.38	9.68	33.11	228	118	P	V
		5720	48.73	-62.07	110.8	39.55	32.5	9.81	33.13	228	118	P	V
		5720.8	48.96	-63.66	112.62	39.78	32.5	9.81	33.13	228	118	P	V
	*	5785	107.62	-	-	98.18	32.6	10.01	33.17	228	118	P	V
	*	5785	98.46	-	-	89.02	32.6	10.01	33.17	228	118	A	V
		5852	48.62	-69.02	117.64	39.07	32.72	10.02	33.19	228	118	P	V
		5864.8	50.64	-57.41	108.05	41.08	32.75	10.02	33.21	228	118	P	V
		5921.6	49.19	-21.52	70.71	39.52	32.88	10.02	33.23	228	118	P	V
		5950	48.74	-19.46	68.2	39.05	32.91	10.02	33.24	228	118	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	110.11	-	-	100.58	32.69	10.02	33.18	230	59	P	H	
	*	5825	100.42	-	-	90.89	32.69	10.02	33.18	230	59	A	H	
		5851	60.25	-59.67	119.92	50.7	32.72	10.02	33.19	230	59	P	H	
		5857.8	56.93	-53.08	110.01	47.37	32.75	10.02	33.21	230	59	P	H	
		5878.6	52.6	-49.93	102.53	43.01	32.78	10.02	33.21	230	59	P	H	
		5927.8	50.85	-17.35	68.2	41.18	32.88	10.02	33.23	230	59	P	H	
														H
														H
	*	5825	106.64	-	-	97.11	32.69	10.02	33.18	395	127	P	V	
	*	5825	97.66	-	-	88.13	32.69	10.02	33.18	395	127	A	V	
		5850.2	58.76	-62.98	121.74	49.21	32.72	10.02	33.19	395	127	P	V	
		5855	56.8	-54	110.8	47.22	32.75	10.02	33.19	395	127	P	V	
		5880.6	50.16	-50.88	101.04	40.57	32.78	10.02	33.21	395	127	P	V	
		5942.2	50.03	-18.17	68.2	40.34	32.91	10.02	33.24	395	127	P	V	
														V
														V
														V
	<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 4 5725~5850MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		11490	52.42	-21.58	74	62.09	40	15.44	65.39	281	343	P	H	
		11490	46.69	-7.31	54	56.36	40	15.44	65.39	281	343	A	H	
		17235	48.25	-19.95	68.2	52.38	40.54	19.24	64.27	100	0	P	H	
													H	
			11490	49.12	-24.88	74	58.79	40	15.44	65.39	100	0	P	V
			17235	48.57	-19.63	68.2	52.7	40.54	19.24	64.27	100	0	P	V
														V
802.11a CH 157 5785MHz		11570	47.37	-26.63	74	57.11	39.86	15.49	65.37	100	0	P	H	
		17355	48.08	-20.12	68.2	51.55	40.96	19.31	64.11	100	0	P	H	
													H	
													H	
			11570	47.4	-26.6	74	57.14	39.86	15.49	65.37	100	0	P	V
			17355	47.99	-20.21	68.2	51.46	40.96	19.31	64.11	100	0	P	V
														V
802.11a CH 165 5825MHz		11650	48.43	-25.57	74	58.21	39.72	15.56	65.34	100	0	P	H	
		17475	49.39	-18.81	68.2	52.21	41.38	19.37	63.95	100	0	P	H	
													H	
													H	
			11650	48.49	-25.51	74	58.27	39.72	15.56	65.34	100	0	P	V
			17475	48.85	-19.35	68.2	51.67	41.38	19.37	63.95	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 149 5745MHz		5645.4	50.1	-18.1	68.2	41.24	32.35	9.61	33.1	234	46	P	H	
		5692.8	50.65	-49.24	99.89	41.58	32.44	9.75	33.12	234	46	P	H	
		5719.4	55.33	-55.3	110.63	46.15	32.5	9.81	33.13	234	46	P	H	
		5725	65.43	-56.77	122.2	56.25	32.5	9.81	33.13	234	46	P	H	
	*	5745	105.47	-	-	96.21	32.53	9.88	33.15	234	46	P	H	
	*	5745	96.41	-	-	87.15	32.53	9.88	33.15	234	46	P	H	
														H
														H
			5603.2	49.98	-18.22	68.2	41.22	32.29	9.55	33.08	302	91	P	V
			5669.2	50.89	-31.56	82.45	41.91	32.41	9.68	33.11	302	91	P	V
			5714	52.16	-56.96	109.12	43.01	32.47	9.81	33.13	302	91	P	V
			5725	59.95	-62.25	122.2	50.77	32.5	9.81	33.13	302	91	P	V
		*	5745	103.14	-	-	93.88	32.53	9.88	33.15	302	91	P	V
		*	5745	94.07	-	-	84.81	32.53	9.88	33.15	302	91	A	V
														V
														V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
		5638.8	50.94	-17.26	68.2	42.08	32.35	9.61	33.1	228	45	P	H
		5662.8	50.54	-27.16	77.7	41.59	32.38	9.68	33.11	228	45	P	H
		5705.8	48.92	-57.91	106.83	39.77	32.47	9.81	33.13	228	45	P	H
		5721.8	47.7	-67.2	114.9	38.52	32.5	9.81	33.13	228	45	P	H
	*	5785	105.24	-	-	95.8	32.6	10.01	33.17	228	45	P	H
	*	5785	96.15	-	-	86.71	32.6	10.01	33.17	228	45	A	H
		5851.2	47.97	-71.49	119.46	38.42	32.72	10.02	33.19	228	45	P	H
		5873	50.19	-55.57	105.76	40.6	32.78	10.02	33.21	228	45	P	H
		5901.8	50.82	-34.51	85.33	41.21	32.81	10.02	33.22	228	45	P	H
		5947.8	49.68	-18.52	68.2	39.99	32.91	10.02	33.24	228	45	P	H
													H
													H
802.11n													
HT20													
CH 157		5606.8	49.4	-18.8	68.2	40.64	32.29	9.55	33.08	301	90	P	V
5785MHz		5693.2	49.48	-50.71	100.19	40.41	32.44	9.75	33.12	301	90	P	V
		5704	49.4	-56.92	106.32	40.3	32.47	9.75	33.12	301	90	P	V
		5724.8	47.54	-74.2	121.74	38.36	32.5	9.81	33.13	301	90	P	V
	*	5785	103.48	-	-	94.04	32.6	10.01	33.17	301	90	P	V
	*	5785	94.03	-	-	84.59	32.6	10.01	33.17	301	90	A	V
		5851.2	49.47	-69.99	119.46	39.92	32.72	10.02	33.19	301	90	P	V
		5872.8	50.34	-55.48	105.82	40.75	32.78	10.02	33.21	301	90	P	V
		5878.8	49.63	-52.75	102.38	40.04	32.78	10.02	33.21	301	90	P	V
		5929.6	49.73	-18.47	68.2	40.06	32.88	10.02	33.23	301	90	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 165 5825MHz	*	5825	105.42	-	-	95.89	32.69	10.02	33.18	233	46	P	H	
	*	5825	95.55	-	-	86.02	32.69	10.02	33.18	233	46	A	H	
		5850	53.01	-69.19	122.2	43.46	32.72	10.02	33.19	233	46	P	H	
		5858.6	50.12	-59.67	109.79	40.56	32.75	10.02	33.21	233	46	P	H	
		5876.8	49.94	-53.92	103.86	40.35	32.78	10.02	33.21	233	46	P	H	
		5926.2	49.25	-18.95	68.2	39.58	32.88	10.02	33.23	233	46	P	H	
														H
														H
	*	5825	103.18	-	-	93.65	32.69	10.02	33.18	298	94	P	V	
	*	5825	93.82	-	-	84.29	32.69	10.02	33.18	298	94	A	V	
		5850	51.02	-71.18	122.2	41.47	32.72	10.02	33.19	298	94	P	V	
		5855.2	49.81	-60.93	110.74	40.23	32.75	10.02	33.19	298	94	P	V	
		5878	51.02	-51.95	102.97	41.43	32.78	10.02	33.21	298	94	P	V	
		5941	49.18	-19.02	68.2	39.49	32.91	10.02	33.24	298	94	P	V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 149 5745MHz		11490	47.98	-26.02	74	53.66	40	15.44	61.4	100	0	P	H	
		17235	47.97	-20.23	68.2	45.62	40.54	19.24	57.79	100	0	P	H	
													H	
													H	
			11490	47.05	-26.95	74	52.73	40	15.44	61.4	100	0	P	V
			17235	48.07	-20.13	68.2	45.72	40.54	19.24	57.79	100	0	P	V
														V
802.11n HT20 CH 157 5785MHz		11570	49.84	-24.16	74	55.73	39.86	15.49	61.52	100	0	P	H	
		17355	47	-21.2	68.2	43.85	40.96	19.31	57.49	100	0	P	H	
													H	
													H	
			11570	47.96	-26.04	74	53.85	39.86	15.49	61.52	100	0	P	V
			17355	47.54	-20.66	68.2	44.39	40.96	19.31	57.49	100	0	P	V
														V
802.11n HT20 CH 165 5825MHz		11650	45.82	-28.18	74	51.91	39.72	15.56	61.65	100	0	P	H	
		17475	48.25	-19.95	68.2	44.31	41.38	19.37	57.19	100	0	P	H	
													H	
													H	
			11650	47.53	-26.47	74	53.62	39.72	15.56	61.65	100	0	P	V
			17475	49.02	-19.18	68.2	45.08	41.38	19.37	57.19	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5640.2	49.93	-18.27	68.2	41.07	32.35	9.61	33.1	239	46	P	H
		5652.4	49.53	-20.45	69.98	40.64	32.38	9.61	33.1	239	46	P	H
		5719.4	62.36	-48.27	110.63	53.18	32.5	9.81	33.13	239	46	P	H
		5724	61.39	-58.53	119.92	52.21	32.5	9.81	33.13	239	46	P	H
	*	5755	102.43	-	-	93.13	32.57	9.88	33.15	239	46	P	H
	*	5755	93.62	-	-	84.32	32.57	9.88	33.15	239	46	A	H
		5851.2	48.42	-71.04	119.46	38.87	32.72	10.02	33.19	239	46	P	H
		5873.6	51.15	-54.44	105.59	41.56	32.78	10.02	33.21	239	46	P	H
		5882	50.3	-49.7	100	40.71	32.78	10.02	33.21	239	46	P	H
		5927.2	50.26	-17.94	68.2	40.59	32.88	10.02	33.23	239	46	P	H
													H
													H
<b>802.11n HT40 CH 151 5755MHz</b>		5646.4	51.38	-16.82	68.2	42.52	32.35	9.61	33.1	302	92	P	V
		5653.8	50.71	-20.31	71.02	41.76	32.38	9.68	33.11	302	92	P	V
		5719.2	58.68	-51.9	110.58	49.5	32.5	9.81	33.13	302	92	P	V
		5722.2	65.82	-50	115.82	56.64	32.5	9.81	33.13	302	92	P	V
	*	5755	99.76	-	-	90.46	32.57	9.88	33.15	302	92	P	V
	*	5755	91.29	-	-	81.99	32.57	9.88	33.15	302	92	A	V
		5853.8	49.28	-64.26	113.54	39.7	32.75	10.02	33.19	302	92	P	V
		5864.2	51.12	-57.1	108.22	41.56	32.75	10.02	33.21	302	92	P	V
		5904	50.21	-33.49	83.7	40.6	32.81	10.02	33.22	302	92	P	V
		5944.4	50.4	-17.8	68.2	40.71	32.91	10.02	33.24	302	92	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
		5603.6	50.38	-17.82	68.2	41.62	32.29	9.55	33.08	233	47	P	H
		5678	51.26	-37.7	88.96	42.28	32.41	9.68	33.11	233	47	P	H
		5704	49.3	-57.02	106.32	40.2	32.47	9.75	33.12	233	47	P	H
		5724.6	49.6	-71.69	121.29	40.42	32.5	9.81	33.13	233	47	P	H
	*	5795	102.43	-	-	92.96	32.63	10.01	33.17	233	47	P	H
	*	5795	93.87	-	-	84.4	32.63	10.01	33.17	233	47	A	H
		5854.4	50.5	-61.67	112.17	40.92	32.75	10.02	33.19	233	47	P	H
		5856	50.5	-60.02	110.52	40.92	32.75	10.02	33.19	233	47	P	H
		5922.6	50.52	-19.45	69.97	40.85	32.88	10.02	33.23	233	47	P	H
		5927.6	49.1	-19.1	68.2	39.43	32.88	10.02	33.23	233	47	P	H
													H
													H
802.11n													
HT40													
CH 159		5615.4	48.67	-19.53	68.2	39.91	32.29	9.55	33.08	295	94	P	V
5795MHz		5681.2	49.82	-41.51	91.33	40.78	32.41	9.75	33.12	295	94	P	V
		5711.8	48.77	-59.74	108.51	39.62	32.47	9.81	33.13	295	94	P	V
		5720.8	47.65	-64.97	112.62	38.47	32.5	9.81	33.13	295	94	P	V
	*	5795	99.31	-	-	89.84	32.63	10.01	33.17	295	94	P	V
	*	5795	90.89	-	-	81.42	32.63	10.01	33.17	295	94	A	V
		5851.2	50.84	-68.62	119.46	41.29	32.72	10.02	33.19	295	94	P	V
		5862.8	49.88	-58.73	108.61	40.32	32.75	10.02	33.21	295	94	P	V
		5882.8	49.66	-49.75	99.41	40.07	32.78	10.02	33.21	295	94	P	V
		5939.2	51.22	-16.98	68.2	41.53	32.91	10.02	33.24	295	94	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		11510	46.69	-27.31	74	52.36	40	15.45	61.4	100	0	P	H
		17265	48.15	-20.05	68.2	45.58	40.66	19.26	57.71	100	0	P	H
													H
													H
		11510	47.32	-26.68	74	52.99	40	15.45	61.4	100	0	P	V
		17265	47.76	-20.44	68.2	45.19	40.66	19.26	57.71	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	45.62	-28.38	74	51.56	39.83	15.51	61.56	100	0	P	H
		17385	47.86	-20.34	68.2	44.49	41.08	19.32	57.4	100	0	P	H
													H
													H
		11590	48.67	-25.33	74	54.61	39.83	15.51	61.56	100	0	P	V
		17385	47.23	-20.97	68.2	43.86	41.08	19.32	57.4	100	0	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Emission below 1GHz  
5GHz WIFI 802.11a (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
5GHz 802.11a LF		53.22	25.86	-14.14	40	44.34	12.98	1.02	32.49			P	H	
		103.71	25.65	-17.85	43.5	40.57	16.15	1.39	32.48			P	H	
		143.94	23.64	-19.86	43.5	37.5	17	1.51	32.44			P	H	
		758.5	30	-16	46	30.83	27.89	3.44	32.3			P	H	
		873.3	32.64	-13.36	46	31.53	29.09	3.67	31.8			P	H	
		930	34.83	-11.17	46	32.53	29.69	3.82	31.38	100	0	P	H	
														H
														H
														H
														H
														H
														H
			49.44	28.82	-11.18	40	45.8	14.48	1.02	32.49			P	V
			121.53	32.66	-10.84	43.5	46.26	17.31	1.51	32.46	100	0	P	V
			241.14	25.79	-20.21	46	38.9	17.25	1.95	32.38			P	V
			853.7	31.9	-14.1	46	31.11	28.87	3.67	31.9			P	V
			906.9	33.14	-12.86	46	31.7	29.09	3.79	31.6			P	V
			936.3	33.25	-12.75	46	30.68	29.91	3.82	31.33			P	V
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Hao Hsu, Jacky Hung, and Ken Wu	Temperature :	23~26°C
		Relative Humidity :	50~55%

### Note symbol

-L	Low channel location
-R	High channel location



Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Band Edge @ 3m), ANT (802.11a CH149 5745MHz). Row 1: 1, Horizontal, Fundamental. Each plot shows Level (dBuV/m) vs Frequency (MHz) with technical details like Site, Condition, Detector, and Project.



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY  Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL  RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Detector : Peak  Project : 7D2018</p>	<p>Site : 03CH11-HY  Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL  RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Detector : Peak  Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 7D2018</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	Left blank







WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	<p>           Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018         </p>	<p>           Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018         </p>



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

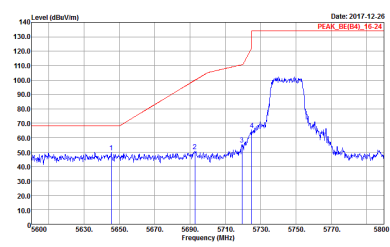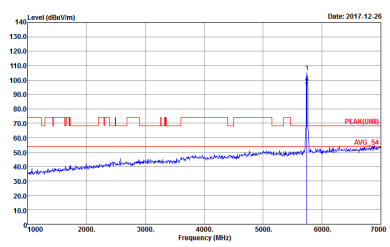WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2017-12-26 PEAK_BE(B4)_16-24</p> <p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL          Detector : RBW:3000.000KHz VSW:3000.000KHz SWT:Auto          Project : 7D2018</p>	 <p>Date: 2017-12-26 PEAK(UMB) Avg_54</p> <p>Site : 03CH11-HY          Condition : PEAK(UMB) 3m HORN 91200-HF HORIZONTAL          Detector : RBW:3000.000KHz VSW:3000.000KHz SWT:Auto          Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	<p>Date: 2017-12-28 PEAK: 85.045, 75.241</p> <p>Site : 03CH11-HY Condition : PEAK_8E(84)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D2018</p>	<p>Date: 2017-12-28</p> <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 7D2018</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII)_3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 7D2018</p>	<p>Site : 03CH11-HY          Condition : PEAK(UNI) 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UMB) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D2018</p>
<p><b>Peak</b></p>	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D2018</p>	<p align="center"><b>Left blank</b></p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 7D2018</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 2 columns: Horizontal and Vertical. It contains two spectral plots showing Level (dBuV/m) vs Frequency (MHz) for Peak and Avg. measurements. The plots show a noisy baseline around 70 dBuV/m with several peaks reaching up to 130 dBuV/m. The horizontal plot has two peaks labeled 1 and 3, while the vertical plot has two peaks labeled 2 and 3. Both plots include a red line for 'PEAK (dB)' and a blue line for 'AVG. (dB)'.

Peak
Avg.



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Project : 7D2018</p>





**Band 4 5725~5850MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11n HT20 CH149 5745MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D2018</p>



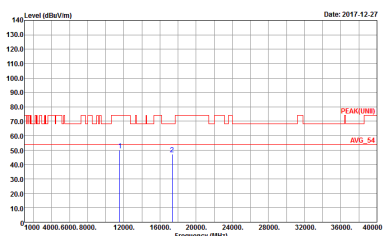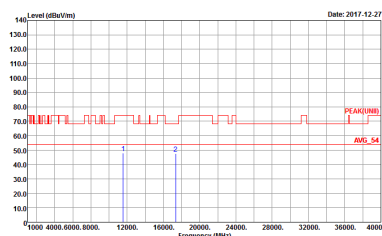

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 7D2018</p>	 <p>Site : 03CH11-HY          Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 7D2018</p>



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**



<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11n HT40 CH151 5755MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Project : 7D2018</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Project : 7D2018</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Project : 7D2018</p>




Emission below 1GHz  
5GHz WIFI 802.11a (LF)

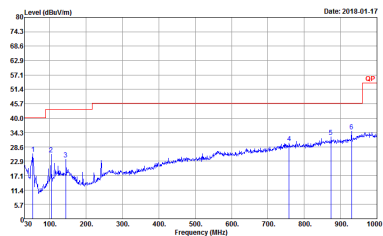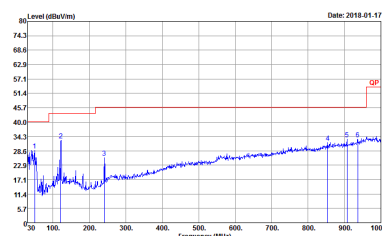WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 7D2018</p>	 <p>Site : 03CH11-HY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 7D2018</p>

## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	86.26	1356	0.737	1kHz	0.64
5GHz 802.11n HT20	86.18	1272	0.786	1kHz	0.65
5GHz 802.11n HT40	88.80	17.76	56.306	10kHz	0.52


### 802.11a

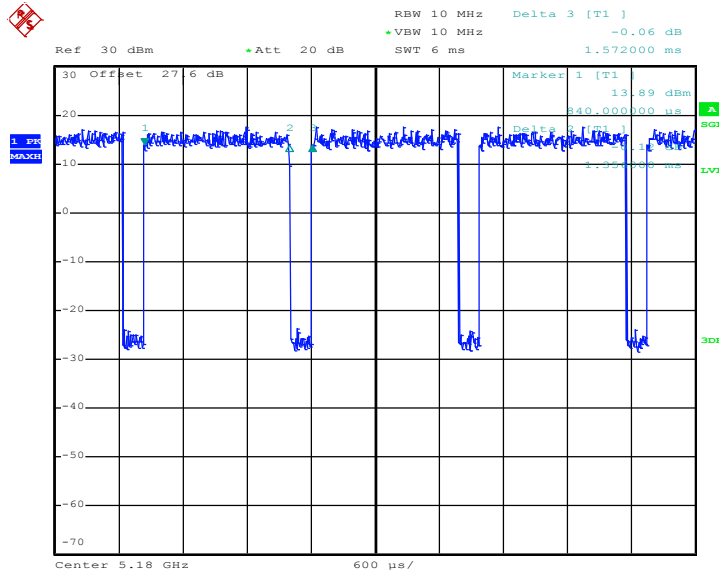

Date: 22.DEC.2017 00:27:25




802.11n HT20

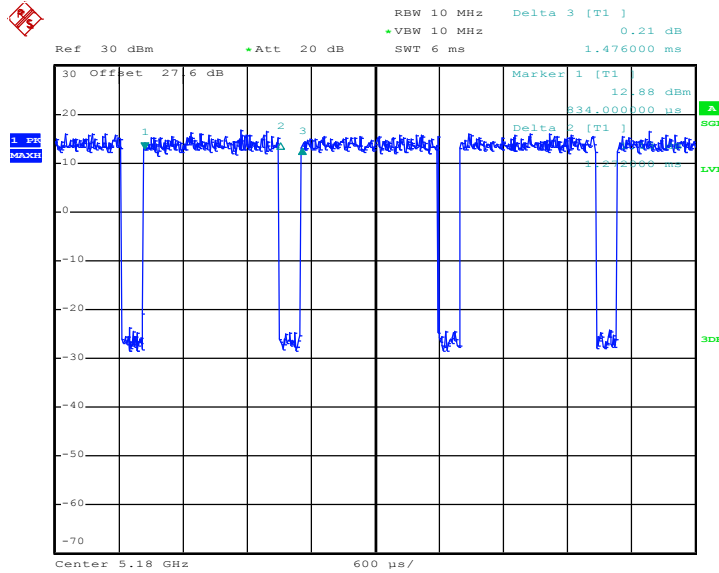

Date: 22.DEC.2017 00:35:52

802.11n HT40

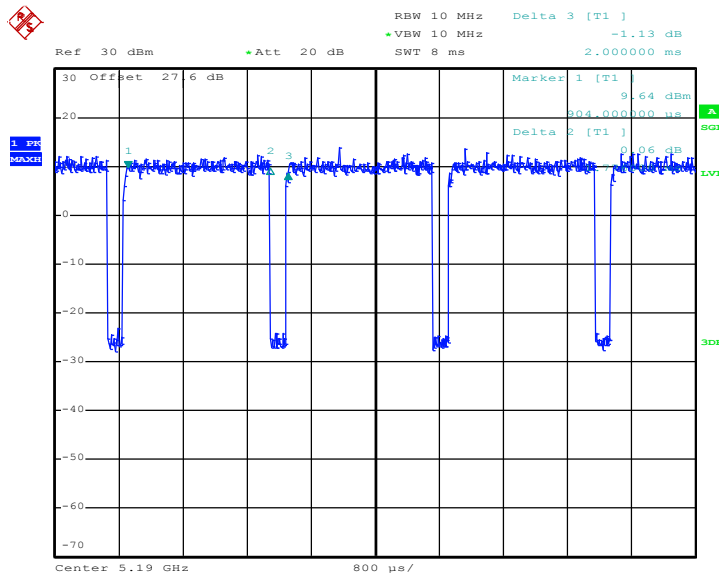

Date: 22.DEC.2017 00:50:07