


FCC SAR Test Report


APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1921-5, XT1921-3
FCC ID : IHDT56XC2
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information..... 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 7
4.3 Proximity Sensor Triggering Test.....10
5. RF Exposure Limits.....13
5.1 Uncontrolled Environment.....13
5.2 Controlled Environment.....13
6. Specific Absorption Rate (SAR).....14
6.1 Introduction 14
6.2 SAR Definition..... 14
7. System Description and Setup15
7.1 E-Field Probe 16
7.2 Data Acquisition Electronics (DAE) 16
7.3 Phantom.....17
7.4 Device Holder.....18
8. Measurement Procedures19
8.1 Spatial Peak SAR Evaluation.....19
8.2 Power Reference Measurement.....20
8.3 Area Scan 20
8.4 Zoom Scan.....21
8.5 Volume Scan Procedures.....21
8.6 Power Drift Monitoring.....21
9. Test Equipment List.....22
10. System Verification23
10.1 Tissue Simulating Liquids.....23
10.2 Tissue Verification 24
10.3 System Performance Check Results.....26
11. RF Exposure Positions27
11.1 Ear and handset reference point 27
11.2 Definition of the cheek position.....28
11.3 Definition of the tilt position.....29
11.4 Body Worn Accessory 30
11.5 Wireless Router.....30
12. Conducted RF Output Power (Unit: dBm).....31
13. Antenna Location105
14. SAR Test Results106
14.1 Head SAR 108
14.2 Hotspot SAR 113
14.3 Body Worn Accessory SAR.....120
14.4 LTE Band 41 Power Class 2 and Power Class 3 Linearity 124
14.5 Repeated SAR Measurement 125
15. Simultaneous Transmission Analysis.....126
15.1 Head Exposure Conditions 127
15.2 Hotspot & Body-worn Exposure Conditions 129
15.3 SPLSR Evaluation and Analysis.....132
16. Uncertainty Assessment177
17. References.....177
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA7D2018	Rev. 01	Initial issue of report	Feb. 13, 2018
FA7D2018	Rev. 02	1. Add sensor trigger test in the report	Mar. 23, 2018



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Motorola Mobility LLC, Mobile Cellular Phone, XT1921-5, XT1921-3, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 5mm)	Hotspot (Separation 5mm)	
		1g SAR (W/kg)			
Licensed	GSM850	0.48	1.19	1.19	1.59
	GSM1900	0.26	0.72	0.72	
	WCDMA II	0.49	1.29	1.29	
	WCDMA IV	0.48	1.45	1.45	
	WCDMA V	0.79	1.05	1.05	
	CDMA BC0	0.60	1.07	1.09	
	CDMA BC1	0.39	1.42	1.39	
	CDMA BC10	0.58	1.01	1.10	
	LTE Band 2	0.39	1.13	1.13	
	LTE Band 4	0.49	1.14	1.14	
	LTE Band 5	0.67	1.01	1.06	
	LTE Band 7	0.42	1.12	1.12	
	LTE Band 12 / 17	0.36	0.77	0.77	
	LTE Band 13	0.54	1.06	1.20	
	LTE Band 25	0.30	1.21	1.21	
	LTE Band 26	0.71	1.18	1.19	
	LTE Band 38	0.25	1.30	1.30	
	LTE Band 41	0.37	1.40	1.40	
	LTE Band 66	0.29	1.20	1.20	
LTE Band 71	0.17	0.43	0.43		
DTS	2.4GHz WLAN	1.35	0.99	0.99	1.59
NII	5GHz WLAN	1.42	1.15	1.35	1.59
DSS	Bluetooth	0.23	0.16	0.16	1.57
Date of Testing:		2017/12/30 ~ 2018/1/30			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



2. Administration Data

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1921-5, XT1921-3
FCC ID	IHDT56XC2
IMEI Code	990005440056357
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20 WLAN 5GHz : 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	DVT1B
SW Version	Sprint:fastboot_james_sprint_oem_sprint_userdebug_8.0.0_OCP27.62_1046_intcfg-test-keys_sprint.tar.gz TMO:fastboot_james_t_oem_t_userdebug_8.0.0_OCP27.62_942_intcfg-test-keys_t.tar.gz
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: <ol style="list-style-type: none"> This device 2.4GHz / 5.8GHz WLAN supports Hotspot operation. When operating in a call in talk position at the head, the device utilizes the At-Head power table. When operating in a body-worn condition, with proximity of the user's body at the front or back of the device, the device operates in the Body-Worn power table. If neither the At-Head or Body-Worn condition is detected, but the device is operating in WiFi Hotspot mode, the device utilizes the Hotspot power table. When operating in any other radiated condition, the device uses the Default power table. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. The control logic is such that, when this front or back body-worn condition is detected and the device is operating in a mode where on-body operation may be expected, the conducted power is applied in the Body-Worn power table. In this condition (user's body detected at front or back face of the device), the Body-Worn power table is applied regardless whether or not the Wi-Fi hotspot mode is active. Note that the Body-Worn Reduced power tables and detection schemes described above are sufficient to assure that body-worn SAR limits are met, regardless whether the Wi-Fi hotspot feature is active or not. However, because FCC has an additional specific test definition and limit for Wi-Fi hotspot mode operation, the additional Hotspot power table is applied if hand-held operation is indicated (i.e., not At-Head or Body-Worn) when the Wi-Fi hotspot feature is active. This ensures the 4 edges of the device comply with the letter of the Wi-Fi Hotspot requirement. Reduced power for different RF exposure conditions: Head: If audio is present at the earpiece, the device will reduce output powers on the WLAN transmitter for held-to-ear and detail descriptions of the power reduction mechanism are included in the operational description. Body worn: The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device, when operating in near-body condition by end user, the device will reduced maximum output powers on the GSM1900, WCDMA B2 / B4 / B5, CDMA BC1 and LTE B2 / B4 / B5 / B7 / B25 / B38 / B41 / B66 and 5GHz WLAN transmitter and detail descriptions of the power reduction mechanism are included in the operational description. Hotspot: When the mobile hotspot session is turn on by end user, the device will reduced output powers on the GSM1900, WCDMA B2 / B4 / B5, CDMA BC1 and LTE B2 / B4 / B5 / B7 / B25 / B38 / B41 / B66 and 5GHz WLAN transmitter and detail descriptions of the power reduction mechanism are included in the operational description. 	



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56XC2																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz																																																														
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, power reduction mechanisms applied to satisfy SAR compliance for LTE B2 / B4 / B5 / B7 / B25 / B38 / B41 / B66																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to section 12.																																																														
LTE Carrier Aggregation Additional Information	(1) This device supports LTE Carrier Aggregation (CA) in the uplink for LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. (2) This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5		23280		787	
M	23230		782		23255		784.5		23280		787		23305		789.5	
H	23255		784.5		23280		787		23305		789.5		23330		792	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23805		712		23830		715	
M	23790		710		23815		713		23840		716		23865		719	
H	23825		713.5		23850		716.5		23875		719.5		23900		722.5	
LTE Band 25																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860				
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880				
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905				




LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133247	675.5	133272	678	133297	680.5	133322	683				
H	133447	695.5	133422	693	133397	690.5	133372	688				

4.3 Proximity Sensor Triggering Test



<Proximity Sensor Triggering Distance>:



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body (Body-Worn condition) at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
5. When the sensor is active, the device will reduced maximum output powers on the GSM1900, WCDMA B2 / B4 / B5, CDMA BC1 and LTE B2 / B4 / B5 / B7 / B25 / B38 / B41 / B66 transmitter.

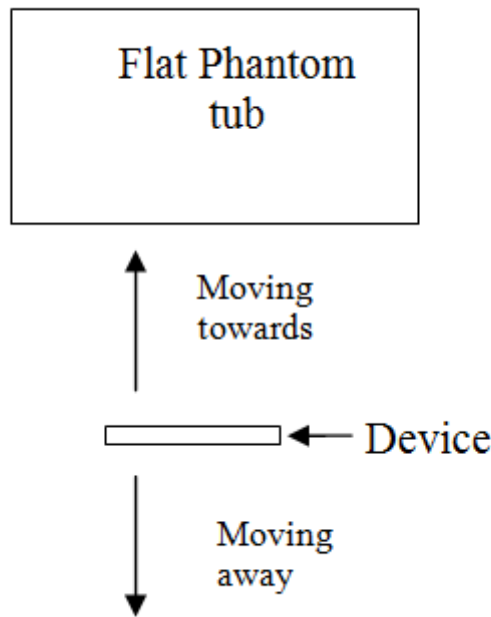

Proximity Sensor Trigger Distance (mm)				
Position	Front		Back	
Position	Moving towards	Moving away	Moving towards	Moving away
Minimum	15.0	17.0	19.0	20.0

<Sensor triggers distance V.S Measure power>

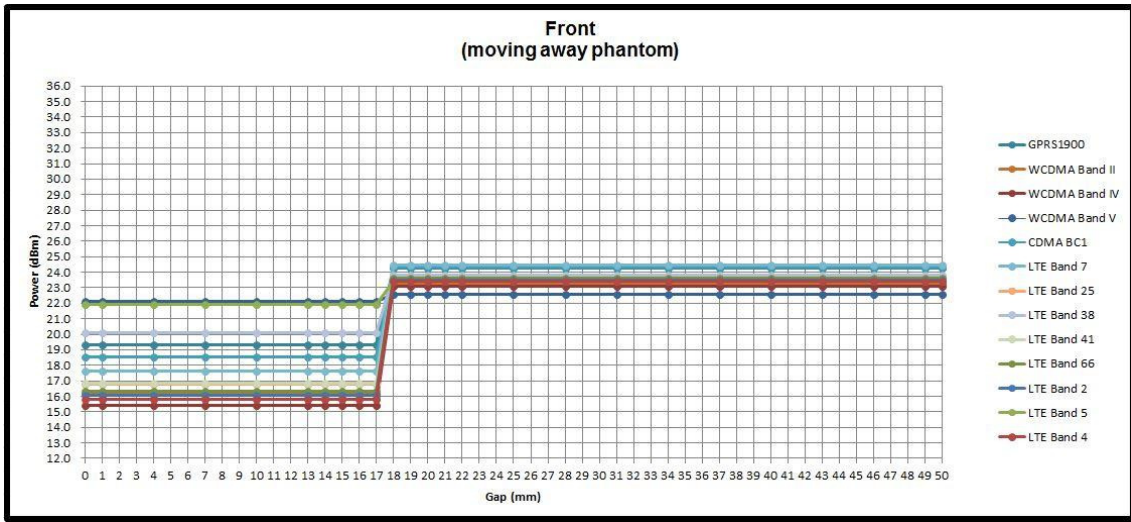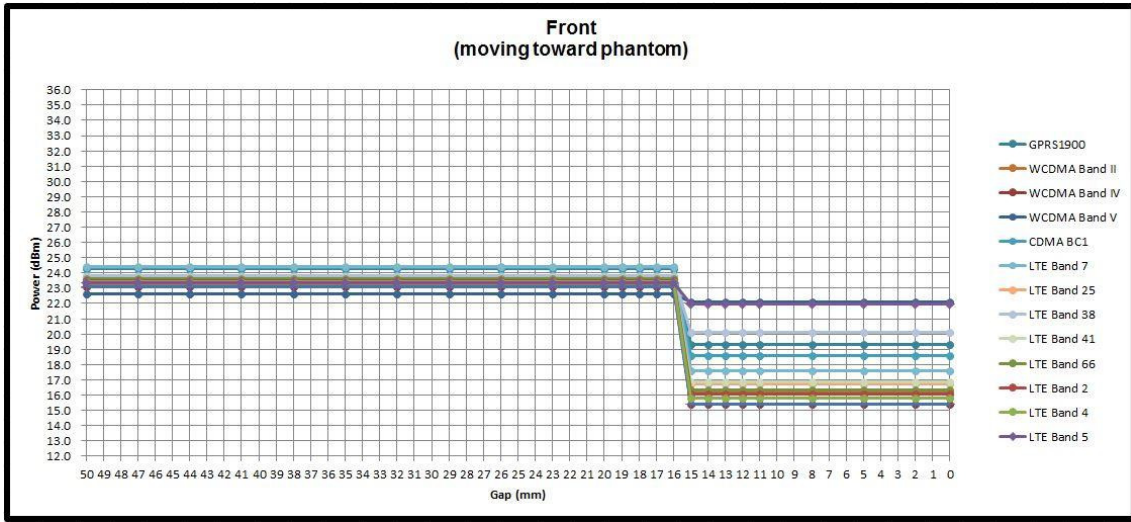

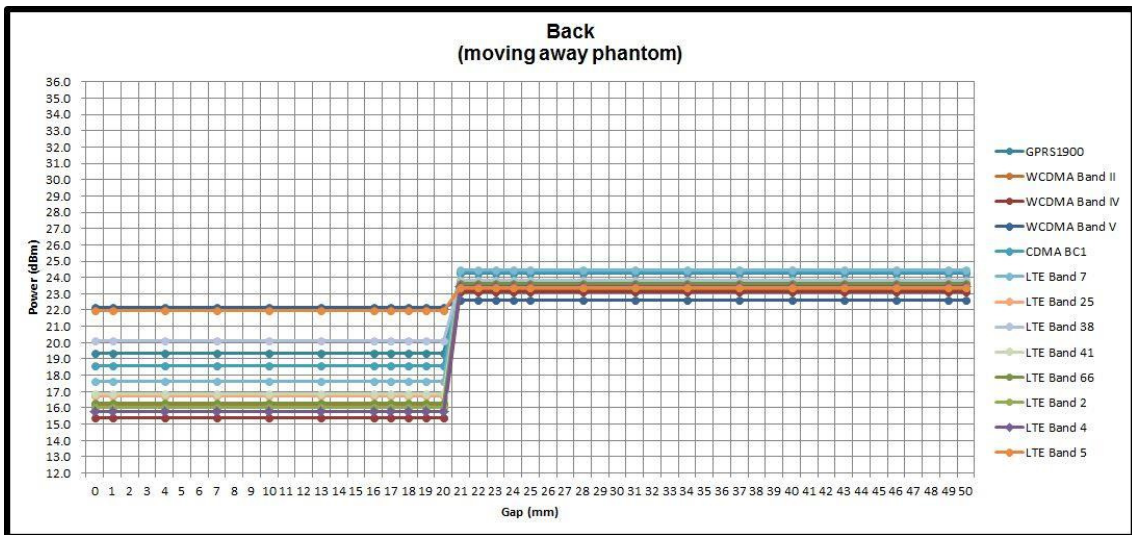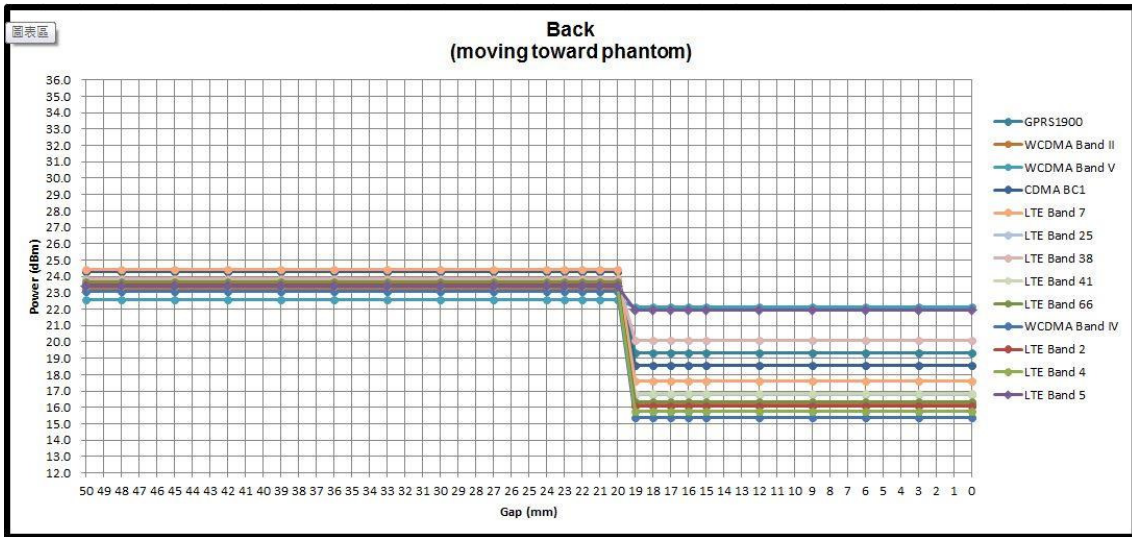



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

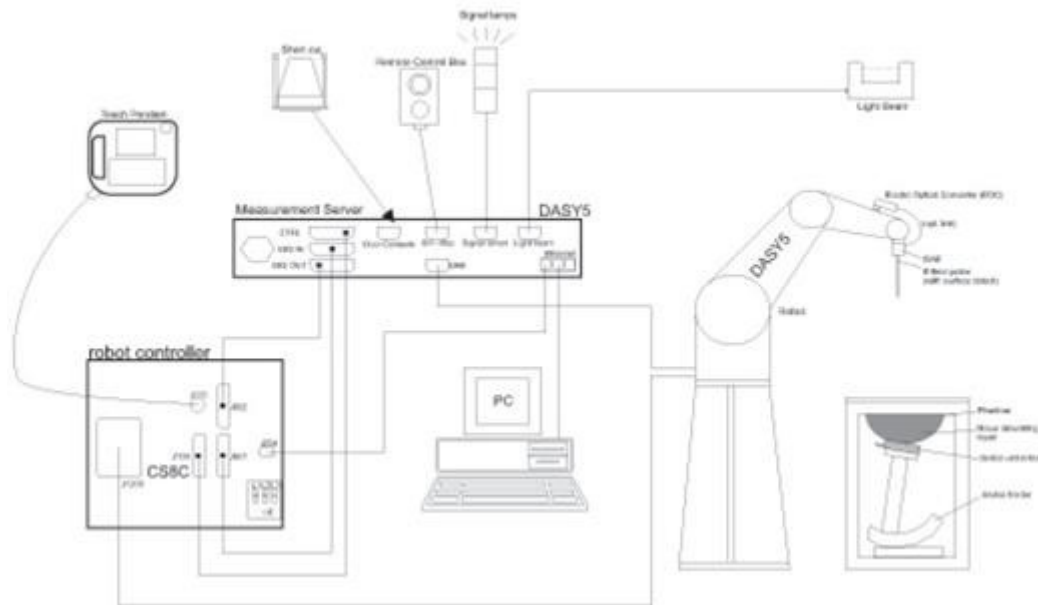


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

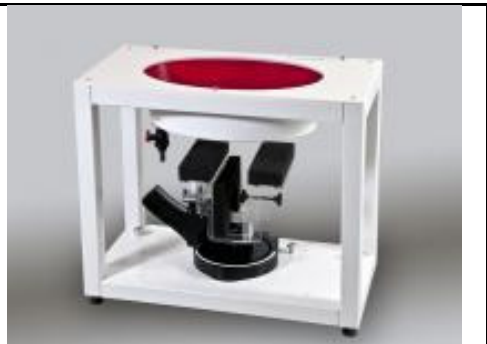Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 22, 2017	May. 21, 2018
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 15, 2017	Nov. 14, 2018
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 28, 2017	Sep. 27, 2018
SPEAG	2450MHz System Validation Kit	D2450V2	736	Sep. 18, 2017	Sep. 17, 2018
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Sep. 18, 2017	Sep. 17, 2018
SPEAG	5GHz System Validation Kit	D5GHzV2	1171	Jul. 18, 2017	Jul. 17, 2018
SPEAG	Data Acquisition Electronics	DAE3	495	May. 22, 2017	May. 21, 2018
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 16, 2017	Nov. 15, 2018
SPEAG	Data Acquisition Electronics	DAE4	778	May. 22, 2017	May. 21, 2018
SPEAG	Data Acquisition Electronics	DAE4	854	May. 02, 2017	May. 01, 2018
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 19, 2017	Jul. 18, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 24, 2017	May. 23, 2018
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 25, 2017	Sep. 24, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 29, 2017	Sep. 28, 2018
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 11, 2017	May. 10, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2017	Jul. 23, 2018
WonDer	Thermometer	WD-5016	TM281-1	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM281-2	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM560-1	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM560-2	Mar. 17, 2017	Mar. 16, 2018
TECPEL	Thermometer	UL-A03	TM225-1	Mar. 21, 2017	Mar. 20, 2018
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 20, 2017	Apr. 19, 2018
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 30, 2017	May. 29, 2018
R&S	BT Base Station	CBT32	100522	Mar. 14, 2017	Mar. 13, 2018
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 07, 2017	Dec. 06, 2018
Agilent	ENA Network Analyzer	E5071C	MY46104758	Aug. 24, 2017	Aug. 23, 2018
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 26, 2017	Sep. 25, 2018
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 06, 2017	Sep. 05, 2018
Anritsu	Power Meter	ML2495A	1419002	May. 15, 2017	May. 14, 2018
Anritsu	Power Sensor	MA2411B	1339124	May. 15, 2017	May. 14, 2018
Anritsu	Power Meter	ML2495A	1218006	Oct. 06, 2017	Oct. 05, 2018
Anritsu	Power Sensor	MA2411B	1207363	Oct. 06, 2017	Oct. 05, 2018
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 23, 2017	Aug. 22, 2018
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 26, 2017	Jun. 25, 2018
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

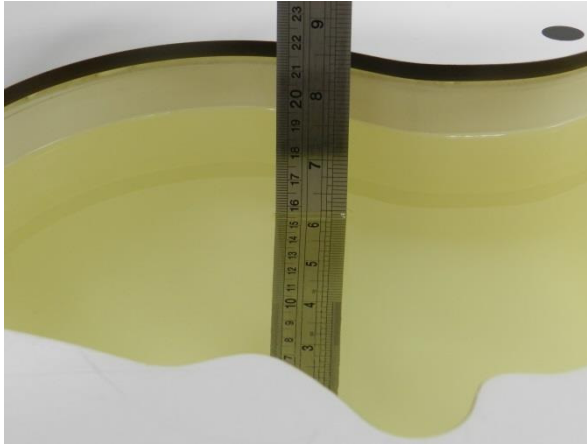


Fig 10.1 Photo of Liquid Height for Head SAR

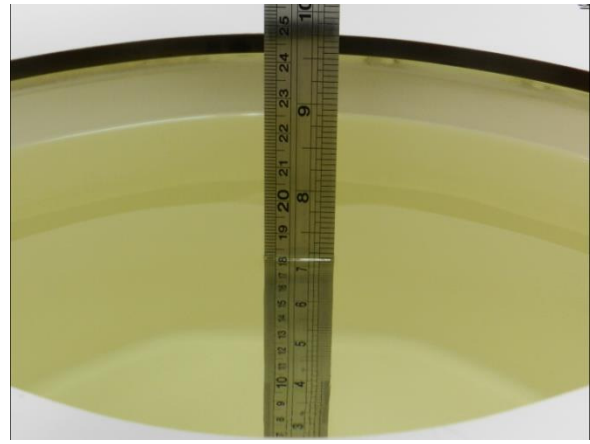


Fig 10.2 Photo of Liquid Height for Body SAR



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.1	0.900	40.782	0.89	41.90	1.12	-2.67	±5	2017/12/30
750	MSL	22.3	0.976	54.334	0.96	55.50	1.67	-2.10	±5	2018/1/9
750	MSL	22.5	0.972	53.878	0.96	55.50	1.25	-2.92	±5	2018/1/29
835	HSL	22.1	0.910	42.472	0.90	41.50	1.11	2.34	±5	2017/12/30
835	HSL	22.6	0.873	43.230	0.90	41.50	-3.00	4.17	±5	2018/1/7
835	MSL	22.5	0.937	56.065	0.97	55.20	-3.40	1.57	±5	2018/1/10
835	MSL	22.2	0.964	56.895	0.97	55.20	-0.62	3.07	±5	2018/1/23
1750	HSL	22.4	1.362	38.748	1.37	40.10	-0.58	-3.37	±5	2018/1/6
1750	MSL	22.3	1.466	55.250	1.49	53.40	-1.61	3.46	±5	2018/1/23
1750	MSL	22.4	1.463	55.130	1.49	53.40	-1.81	3.24	±5	2018/1/28
1900	HSL	22.1	1.439	39.417	1.40	40.00	2.79	-1.46	±5	2018/1/7
1900	MSL	22.4	1.554	51.750	1.52	53.30	2.24	-2.91	±5	2018/1/22
1900	MSL	22.6	1.552	51.708	1.52	53.30	2.11	-2.99	±5	2018/1/25
1900	MSL	22.4	1.550	51.600	1.52	53.30	1.97	-3.19	±5	2018/1/28
2450	HSL	22.2	1.776	38.792	1.80	39.20	-1.33	-1.04	±5	2018/1/11
2450	HSL	22.6	1.762	39.606	1.80	39.20	-2.11	1.04	±5	2018/1/19
2450	MSL	22.2	1.996	54.487	1.95	52.70	2.36	3.39	±5	2018/1/11
2450	MSL	22.6	2.019	53.573	1.95	52.70	3.54	1.66	±5	2018/1/18
2600	HSL	22.2	1.950	38.370	1.96	39.00	-0.51	-1.62	±5	2018/1/8
2600	HSL	22.2	1.950	38.370	1.96	39.00	-0.51	-1.62	±5	2018/1/8
2600	HSL	22.7	1.966	38.516	1.96	39.00	0.31	-1.24	±5	2018/1/26
2600	MSL	22.1	2.210	53.884	2.16	52.50	2.31	2.64	±5	2018/1/23
2600	MSL	22.4	2.225	52.759	2.16	52.50	3.01	0.49	±5	2018/1/30
5250	HSL	22.6	4.513	37.118	4.71	35.95	-4.18	3.25	±5	2018/1/19
5250	MSL	22.5	5.537	47.352	5.36	48.95	3.30	-3.26	±5	2018/1/21
5600	HSL	22.6	4.852	36.677	5.07	35.50	-4.30	3.32	±5	2018/1/19
5600	MSL	22.5	6.012	46.731	5.77	48.50	4.19	-3.65	±5	2018/1/21
5750	HSL	22.6	5.011	36.475	5.22	35.35	-4.00	3.18	±5	2018/1/19
5750	MSL	22.5	6.223	46.468	5.94	48.28	4.76	-3.75	±5	2018/1/21

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/12/30	750	HSL	250	D750V3-1012	EX3DV4 - SN7306	DAE4 Sn853	2.09	8.22	8.36	1.70
2018/1/9	750	MSL	250	D750V3-1012	EX3DV4 - SN3931	DAE4 Sn1399	2.31	8.71	9.24	6.08
2018/1/29	750	MSL	250	D750V3-1012	EX3DV4 - SN3931	DAE4 Sn1399	2.28	8.71	9.12	4.71
2017/12/30	835	HSL	250	D835V2-499	EX3DV4 - SN7306	DAE4 Sn853	2.46	9.45	9.84	4.13
2018/1/7	835	HSL	250	D835V2-499	EX3DV4 - SN3925	DAE4 Sn853	2.27	9.45	9.08	-3.92
2018/1/10	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE4 Sn1399	2.48	9.67	9.92	2.59
2018/1/23	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn854	2.36	9.67	9.44	-2.38
2018/1/6	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3925	DAE4 Sn853	8.58	36.70	34.32	-6.49
2018/1/23	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE4 Sn854	8.80	37.20	35.20	-5.38
2018/1/28	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3931	DAE4 Sn1399	8.61	37.20	34.44	-7.42
2018/1/7	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3925	DAE4 Sn853	9.78	40.50	39.12	-3.41
2018/1/22	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn854	9.68	40.70	38.72	-4.86
2018/1/25	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE4 Sn1399	10.50	40.70	42.00	3.19
2018/1/28	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE4 Sn1399	10.50	40.70	42.00	3.19
2018/1/11	2450	HSL	250	D2450V2-736	ES3DV3 - SN3169	DAE3 Sn495	13.50	52.40	54.00	3.05
2018/1/19	2450	HSL	250	D2450V2-736	EX3DV4 - SN7306	DAE4 Sn778	12.40	52.40	49.60	-5.34
2018/1/11	2450	MSL	250	D2450V2-736	ES3DV3 - SN3169	DAE3 Sn495	12.50	50.80	50.00	-1.57
2018/1/18	2450	MSL	250	D2450V2-736	EX3DV4 - SN7306	DAE4 Sn778	12.60	50.80	50.40	-0.79
2018/1/8	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3925	DAE4 Sn853	13.90	56.80	55.60	-2.11
2018/1/8	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn1399	13.70	56.80	54.80	-3.52
2018/1/26	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn1399	13.80	56.80	55.20	-2.82
2018/1/23	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn1399	14.20	55.00	56.80	3.27
2018/1/30	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn1399	14.30	55.00	57.20	4.00
2018/1/19	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn1399	7.54	81.20	75.40	-7.14
2018/1/21	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn1399	7.21	78.10	72.10	-7.68
2018/1/19	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3925	DAE4 Sn853	7.89	84.90	78.90	-7.07
2018/1/21	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn1399	8.12	81.00	81.20	0.25
2018/1/19	5750	HSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn1399	8.23	82.20	82.30	0.12
2018/1/21	5750	MSL	100	D5GHzV2-1171	EX3DV4 - SN3931	DAE4 Sn1399	7.33	78.70	73.30	-6.86

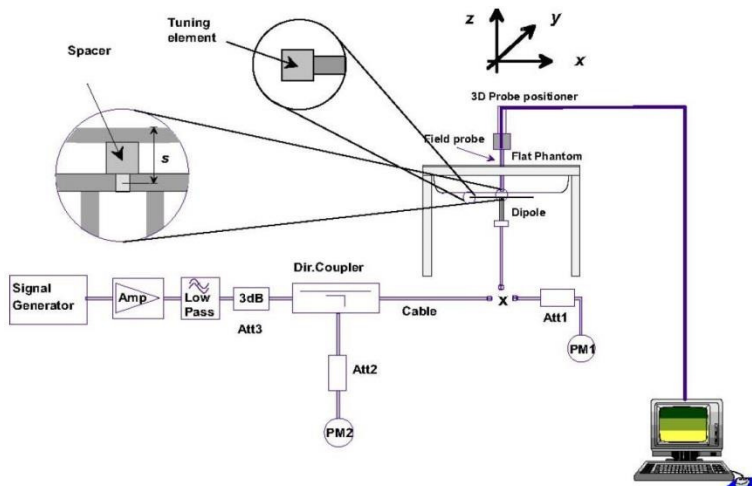


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

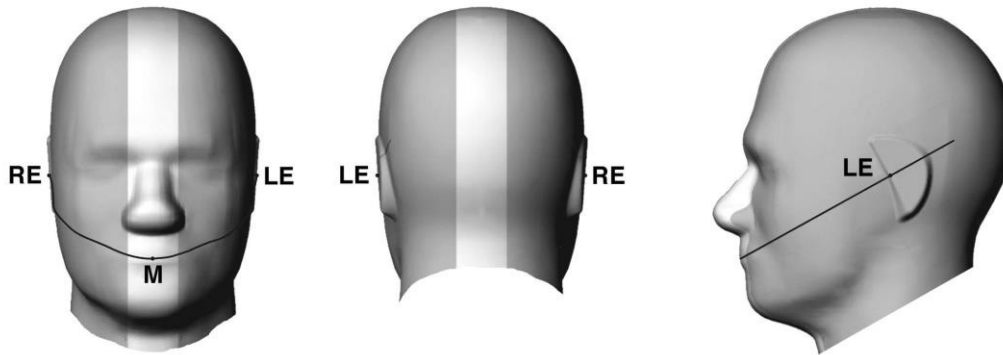


Fig 9.1.1 Front, back, and side views of SAM twin phantom

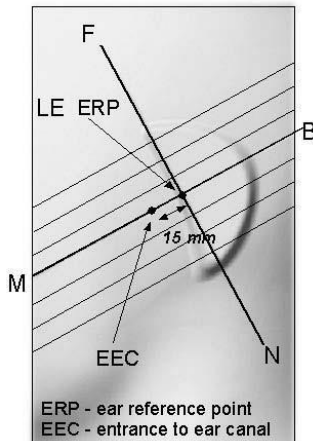


Fig 9.1.2 Close-up side view of phantom showing the ear region.

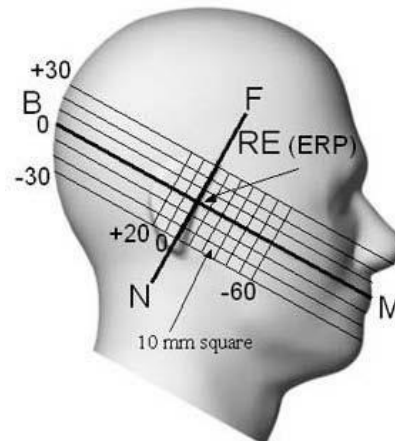


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

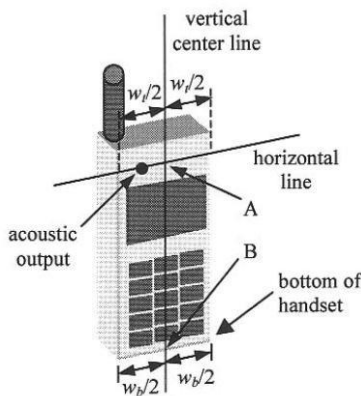


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

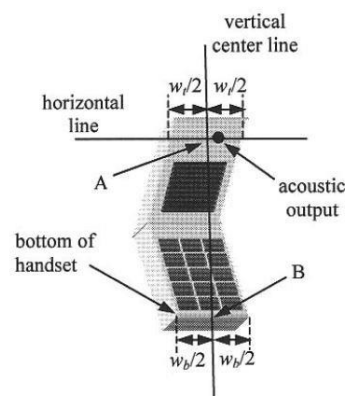


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

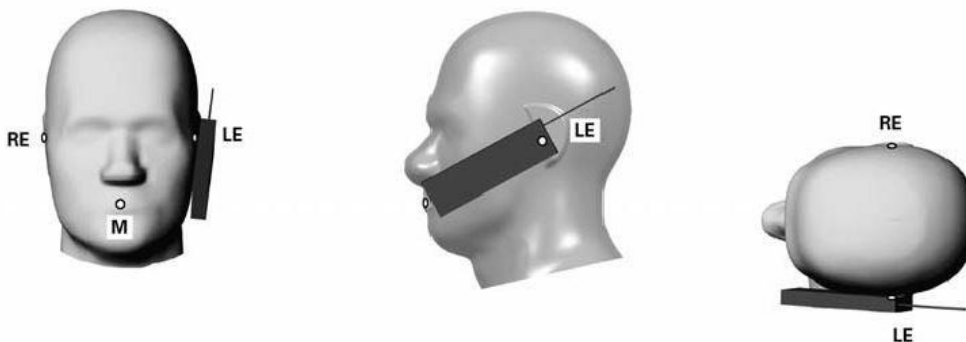


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

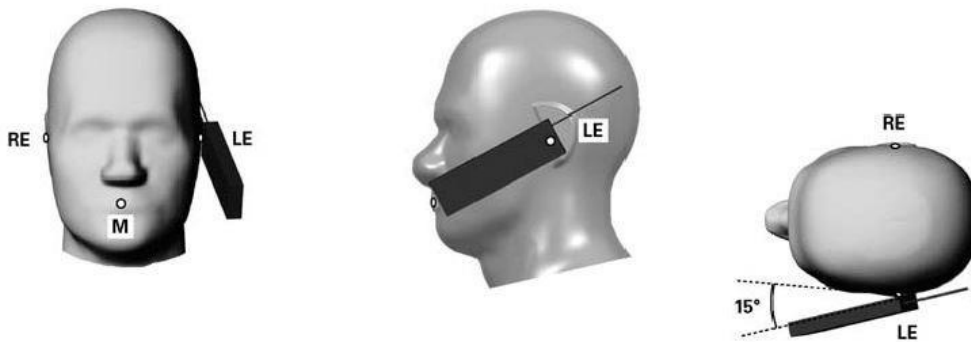


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

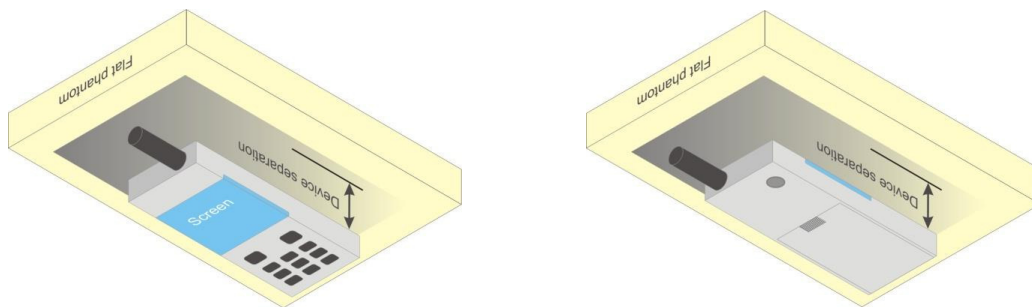


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.10	33.42	33.41	33.50	24.10	24.42	24.41	24.50
GPRS 1 Tx slot	33.14	33.45	33.48	33.50	24.14	24.45	24.48	24.50
GPRS 2 Tx slots	29.88	30.00	30.09	30.50	23.88	24.00	24.09	24.50
GPRS 3 Tx slots	27.68	27.79	27.77	28.00	23.42	23.53	23.51	23.74
GPRS 4 Tx slots	26.25	26.33	26.34	27.50	23.25	23.33	23.34	24.50
EDGE 1 Tx slot	25.65	25.80	25.79	26.00	16.65	16.80	16.79	17.00
EDGE 2 Tx slots	25.37	25.50	25.56	26.00	19.37	19.50	19.56	20.00
EDGE 3 Tx slots	24.50	24.61	24.62	25.00	20.24	20.35	20.36	20.74
EDGE 4 Tx slots	23.12	23.23	23.20	23.50	20.12	20.23	20.20	20.50

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	30.77	30.86	30.62	31.00	21.77	21.86	21.62	22.00
GPRS 1 Tx slot	30.80	30.89	30.67	31.00	21.80	21.89	21.67	22.00
GPRS 2 Tx slots	27.31	27.69	27.40	28.00	21.31	21.69	21.40	22.00
GPRS 3 Tx slots	25.39	25.62	25.40	26.00	21.13	21.36	21.14	21.74
GPRS 4 Tx slots	24.09	24.27	24.02	25.00	21.09	21.27	21.02	22.00
EDGE 1 Tx slot	25.01	25.28	24.96	25.50	16.01	16.28	15.96	16.50
EDGE 2 Tx slots	24.90	25.11	24.78	25.50	18.90	19.11	18.78	19.50
EDGE 3 Tx slots	23.89	24.07	23.84	24.50	19.63	19.81	19.58	20.24
EDGE 4 Tx slots	22.46	22.68	22.34	23.00	19.46	19.68	19.34	20.00



<Near-body and Hotspot Power Mode>

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
	Frequency (MHz)	1850.2	1880		1909.8	1850.2	1880	
GSM 1 Tx slot	24.90	25.12	24.93	25.50	15.90	16.12	15.93	16.50
GPRS 1 Tx slot	24.52	24.85	24.63	25.50	15.52	15.85	15.63	16.50
GPRS 2 Tx slots	21.85	22.13	21.84	22.50	15.85	16.13	15.84	16.50
GPRS 3 Tx slots	19.26	19.48	19.21	20.50	15.00	15.22	14.95	16.24
GPRS 4 Tx slots	19.08	19.34	19.09	19.50	16.08	16.34	16.09	16.50
EDGE 1 Tx slot	18.88	19.27	18.89	20.00	9.88	10.27	9.89	11.00
EDGE 2 Tx slots	18.71	18.44	18.16	20.00	12.71	12.44	12.16	14.00
EDGE 3 Tx slots	18.55	18.07	17.85	19.00	14.29	13.81	13.59	14.74
EDGE 4 Tx slots	16.91	16.52	16.22	17.50	13.91	13.52	13.22	14.50

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

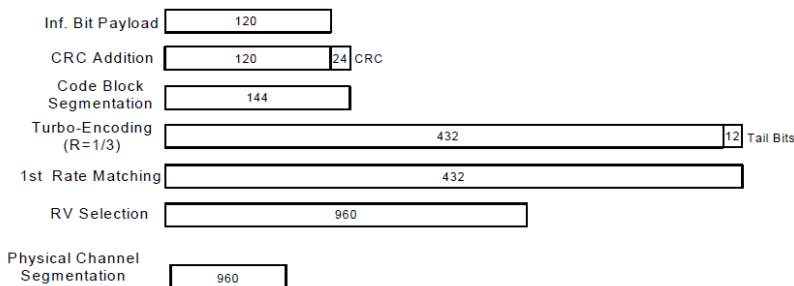


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	22.90	23.21	23.15	24.00	22.82	23.00	23.08	24.00	22.31	22.36	22.54	24.00
3GPP Rel 99	RMC 12.2Kbps	22.92	23.22	23.17	24.00	22.85	23.01	23.10	24.00	22.37	22.40	22.60	24.00
3GPP Rel 6	HSDPA Subtest-1	21.95	22.22	22.18	23.00	21.82	22.02	22.11	23.00	21.38	21.48	21.55	23.00
3GPP Rel 6	HSDPA Subtest-2	21.93	22.20	22.15	23.00	21.81	22.01	22.07	23.00	21.35	21.47	21.54	23.00
3GPP Rel 6	HSDPA Subtest-3	21.37	21.50	21.47	22.50	21.32	21.53	21.59	22.50	20.83	20.93	21.02	22.50
3GPP Rel 6	HSDPA Subtest-4	21.36	21.43	21.45	22.50	21.31	21.52	21.57	22.50	20.81	20.91	21.00	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.75	22.03	22.04	23.00	21.66	21.89	22.11	23.00	21.34	21.34	21.51	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.90	22.09	21.99	23.00	21.72	21.99	21.95	23.00	21.15	21.36	21.44	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.27	21.45	21.40	22.50	21.16	21.39	21.40	22.50	20.72	20.83	20.90	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.31	21.42	21.41	22.50	21.18	21.39	21.41	22.50	20.80	20.84	20.89	22.50
3GPP Rel 6	HSUPA Subtest-1	21.92	22.22	22.05	23.00	21.75	21.92	22.02	23.00	21.38	21.42	21.47	23.00
3GPP Rel 6	HSUPA Subtest-2	19.94	20.21	20.08	21.00	19.78	19.94	20.03	21.00	19.39	19.43	19.50	21.00
3GPP Rel 6	HSUPA Subtest-3	20.97	21.19	21.06	22.00	20.74	20.92	20.99	22.00	20.41	20.42	20.50	22.00
3GPP Rel 6	HSUPA Subtest-4	19.92	20.21	20.06	21.00	19.74	19.92	20.01	21.00	19.41	19.40	19.51	21.00
3GPP Rel 6	HSUPA Subtest-5	21.94	22.21	22.17	23.00	21.85	21.99	22.12	23.00	21.37	21.51	21.56	23.00

<Near-Body and Hotspot Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	16.10	16.42	16.40	16.50	15.05	15.21	15.29	16.00	22.01	21.93	22.03	22.50
3GPP Rel 99	RMC 12.2Kbps	16.20	16.50	16.46	16.50	15.15	15.34	15.40	16.00	22.12	22.04	22.13	22.50
3GPP Rel 6	HSDPA Subtest-1	15.46	15.50	15.34	15.50	14.33	14.47	14.53	15.00	20.79	20.78	20.80	21.50
3GPP Rel 6	HSDPA Subtest-2	15.43	15.50	15.34	15.50	14.29	14.46	14.50	15.00	20.80	20.77	20.79	21.50
3GPP Rel 6	HSDPA Subtest-3	14.94	15.00	14.36	15.00	13.81	14.00	14.20	14.50	20.26	20.26	20.28	21.00
3GPP Rel 6	HSDPA Subtest-4	14.94	15.00	14.37	15.00	13.83	13.94	14.13	14.50	20.26	20.26	20.30	21.00
3GPP Rel 8	DC-HSDPA Subtest-1	15.36	15.43	15.33	15.50	14.31	14.45	14.49	15.00	20.73	20.70	20.77	21.50
3GPP Rel 8	DC-HSDPA Subtest-2	15.34	15.44	15.27	15.50	14.28	14.45	14.46	15.00	20.75	20.68	20.78	21.50
3GPP Rel 8	DC-HSDPA Subtest-3	14.84	14.96	14.30	15.00	13.81	13.91	14.19	14.50	20.16	20.21	20.26	21.00
3GPP Rel 8	DC-HSDPA Subtest-4	14.91	14.95	14.31	15.00	13.80	13.87	14.04	14.50	20.19	20.16	20.30	21.00
3GPP Rel 6	HSUPA Subtest-1	14.44	14.74	14.61	15.50	13.77	13.96	14.08	15.00	19.96	19.92	20.06	21.50
3GPP Rel 6	HSUPA Subtest-2	12.44	12.74	12.62	13.50	11.81	11.97	12.03	13.00	17.95	18.01	18.08	19.50
3GPP Rel 6	HSUPA Subtest-3	13.52	13.74	13.59	14.50	12.81	13.00	13.00	14.00	18.91	18.99	19.00	20.50
3GPP Rel 6	HSUPA Subtest-4	12.44	12.78	12.61	13.50	11.77	12.01	12.10	13.00	17.97	17.99	18.04	19.50
3GPP Rel 6	HSUPA Subtest-5	14.49	14.79	14.75	15.50	13.90	14.08	14.17	15.00	19.89	20.02	20.08	21.50



<CDMA2000 Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

<Default Power Mode>

Band	CDMA BC0			Tune-up Limit (dBm)	CDMA BC1			Tune-up Limit (dBm)	CDMA BC10			Tune-up Limit (dBm)
	1013	384	777		25	600	1175		476	580	684	
TX Channel	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
Frequency (MHz)												
RC1 SO55	23.70	23.86	23.91	24.50	24.11	24.16	24.08	24.50	23.81	23.92	23.95	24.50
RC3 SO55	23.80	23.92	24.00	24.50	24.18	24.32	24.14	24.50	23.89	23.94	24.06	24.50
RC3 SO32 (F+SCH)	23.68	23.81	23.85	24.50	24.15	24.25	24.09	24.50	23.83	23.91	23.94	24.50
RC3 SO32 (+SCH)	23.69	23.85	23.88	24.50	24.12	24.23	24.06	24.50	23.81	23.89	23.90	24.50
RTAP 153.6Kbps	23.79	23.91	23.99	24.50	24.17	24.31	24.13	24.50	23.88	23.93	24.05	24.50
RETAP 4096Bits	23.72	23.87	23.94	24.50	24.15	24.28	24.11	24.50	23.86	23.91	24.02	24.50


<Near-Body and hotspot Power Mode>

Band	CDMA BC1			Tune-up Limit (dBm)
	25	600	1175	
TX Channel	1851.25	1880	1908.75	
Frequency (MHz)				
RC1 SO55	18.29	18.42	18.22	19.00
RC3 SO55	18.31	18.46	18.15	19.00
RC3 SO32 (F+SCH)	18.70	18.56	18.25	19.00
RC3 SO32 (+SCH)	18.33	18.35	18.17	19.00
RTAP 153.6Kbps	18.37	18.46	18.25	19.00
RETAP 4096Bits	18.33	18.36	18.20	19.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

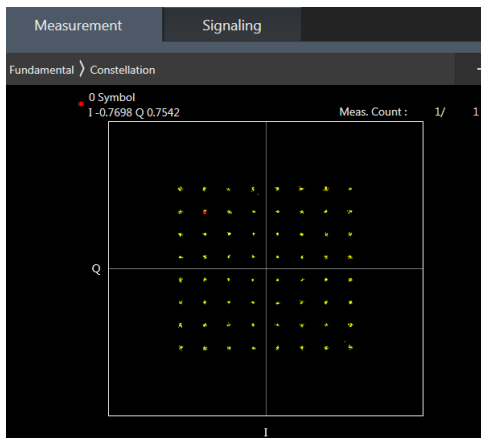

64QAM

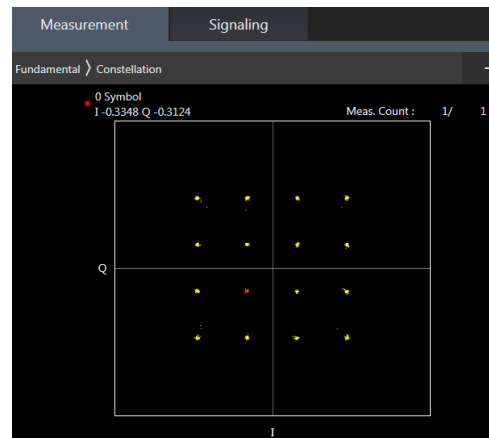

16QAM



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.73	22.84	22.83	24	0
20	QPSK	1	49	22.99	23.46	23.18		
20	QPSK	1	99	22.99	23.10	22.90		
20	QPSK	50	0	22.20	22.51	22.29	23	1
20	QPSK	50	24	22.19	22.46	22.26		
20	QPSK	50	50	22.18	22.32	22.10		
20	QPSK	100	0	22.12	22.36	22.14	23	1
20	16QAM	1	0	22.38	22.66	22.67		
20	16QAM	1	49	22.32	22.02	22.43		
20	16QAM	1	99	22.33	22.34	22.22	23	1
20	16QAM	50	0	21.19	21.42	21.34		
20	16QAM	50	24	21.17	21.43	21.33		
20	16QAM	50	50	21.17	21.38	21.10	23	1
20	16QAM	100	0	21.08	21.35	21.18		
20	64QAM	1	0	22.41	22.18	22.15		
20	64QAM	1	49	22.33	22.63	22.52	23	1
20	64QAM	1	99	22.32	22.34	22.17		
20	64QAM	50	0	21.28	21.52	21.48		
20	64QAM	50	24	21.29	21.54	21.46	22	2
20	64QAM	50	50	21.22	21.42	21.26		
20	64QAM	100	0	21.20	21.47	21.34		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.78	22.87	22.99	24	0
15	QPSK	1	37	23.13	22.98	23.28		
15	QPSK	1	74	23.33	23.43	23.45		
15	QPSK	36	0	22.18	22.29	22.25	23	1
15	QPSK	36	20	22.18	22.36	22.24		
15	QPSK	36	39	22.17	22.37	22.16		
15	QPSK	75	0	22.21	22.33	22.22	23	1
15	16QAM	1	0	22.51	22.77	22.73		
15	16QAM	1	37	22.20	22.56	22.54		
15	16QAM	1	74	22.55	22.62	22.51	23	1
15	16QAM	36	0	21.13	21.30	21.29		
15	16QAM	36	20	21.15	21.36	21.23		
15	16QAM	36	39	21.15	21.38	21.08	23	1
15	16QAM	75	0	21.21	21.28	21.25		
15	64QAM	1	0	22.06	22.11	22.12		
15	64QAM	1	37	22.49	22.35	22.75	23	1
15	64QAM	1	74	22.53	22.60	22.49		
15	64QAM	36	0	21.24	21.36	21.42		
15	64QAM	36	20	21.21	21.42	21.33	22	2
15	64QAM	36	39	21.19	21.44	21.27		
15	64QAM	75	0	21.27	21.38	21.38		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.85	22.93	22.74	24	0
10	QPSK	1	25	23.23	23.39	23.19		
10	QPSK	1	49	23.22	23.41	23.26		
10	QPSK	25	0	22.13	22.42	22.12	23	1
10	QPSK	25	12	22.05	22.39	22.15		
10	QPSK	25	25	22.08	22.30	22.13		
10	QPSK	50	0	22.10	22.30	22.13	23	1
10	16QAM	1	0	22.55	22.76	22.58		
10	16QAM	1	25	22.45	22.52	22.49		
10	16QAM	1	49	22.42	22.62	22.44	23	1
10	16QAM	25	0	21.11	21.46	21.18		
10	16QAM	25	12	21.12	21.36	21.16		
10	16QAM	25	25	21.10	21.23	21.14	23	1
10	16QAM	50	0	21.11	21.37	21.15		
10	64QAM	1	0	21.93	22.01	22.21		
10	64QAM	1	25	22.30	22.67	22.69	23	1
10	64QAM	1	49	22.32	22.59	22.45		
10	64QAM	25	0	21.19	21.56	21.30		
10	64QAM	25	12	21.20	21.46	21.30	22	2
10	64QAM	25	25	21.21	21.38	21.23		
10	64QAM	50	0	21.16	21.39	21.25		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.79	22.97	22.76	24	0
5	QPSK	1	12	23.06	23.35	23.04		
5	QPSK	1	24	23.13	23.32	23.15		
5	QPSK	12	0	22.17	22.47	22.23	23	1
5	QPSK	12	7	22.12	22.43	22.13		
5	QPSK	12	13	22.13	22.29	22.09		
5	QPSK	25	0	22.14	22.44	22.19	23	1
5	16QAM	1	0	22.54	22.82	22.50		
5	16QAM	1	12	22.31	22.73	22.34		
5	16QAM	1	24	22.30	22.69	22.31	23	1
5	16QAM	12	0	21.19	21.53	21.24		
5	16QAM	12	7	21.13	21.42	21.18		
5	16QAM	12	13	21.15	21.36	21.16	23	1
5	16QAM	25	0	21.13	21.43	21.18		
5	64QAM	1	0	22.23	22.40	22.28		
5	64QAM	1	12	22.37	22.66	22.40	23	1
5	64QAM	1	24	22.27	22.51	22.20		
5	64QAM	12	0	21.29	21.56	21.36		
5	64QAM	12	7	21.19	21.49	21.29	22	2
5	64QAM	12	13	21.19	21.39	21.26		
5	64QAM	25	0	21.23	21.54	21.26		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.60	22.90	22.52	24	0
3	QPSK	1	8	23.12	23.39	23.13		
3	QPSK	1	14	23.11	23.27	23.06		
3	QPSK	8	0	22.19	22.37	22.16	23	1
3	QPSK	8	4	22.19	22.40	22.13		
3	QPSK	8	7	22.11	22.37	22.09		
3	QPSK	15	0	22.15	22.36	22.09	23	1
3	16QAM	1	0	22.44	22.72	22.50		
3	16QAM	1	8	22.43	22.66	22.40		
3	16QAM	1	14	22.35	22.55	22.35	23	1
3	16QAM	8	0	21.21	21.43	21.15		
3	16QAM	8	4	21.17	21.48	21.18		
3	16QAM	8	7	21.19	21.45	21.17	23	1
3	16QAM	15	0	21.20	21.42	21.17		
3	64QAM	1	0	22.28	22.31	22.29		
3	64QAM	1	8	22.33	22.76	22.47	23	1
3	64QAM	1	14	22.37	22.58	22.28		
3	64QAM	8	0	21.28	21.58	21.38		
3	64QAM	8	4	21.29	21.54	21.25	22	2
3	64QAM	8	7	21.10	21.41	21.28		
3	64QAM	15	0	21.21	21.53	21.29		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.08	22.78	22.48	24	0
1.4	QPSK	1	3	23.18	23.41	23.11		
1.4	QPSK	1	5	23.06	23.29	22.96		
1.4	QPSK	3	0	23.11	23.37	23.01		
1.4	QPSK	3	1	23.14	23.41	23.09		
1.4	QPSK	3	3	23.13	23.32	23.04		
1.4	QPSK	6	0	22.13	22.36	22.09	23	1
1.4	16QAM	1	0	22.43	22.59	22.40	23	1
1.4	16QAM	1	3	22.42	22.74	22.45		
1.4	16QAM	1	5	22.44	22.68	22.30		
1.4	16QAM	3	0	22.12	22.34	22.05		
1.4	16QAM	3	1	22.14	22.39	22.17		
1.4	16QAM	3	3	22.05	22.37	22.05		
1.4	16QAM	6	0	21.20	21.40	21.18	23	1
1.4	64QAM	1	0	22.15	22.31	22.32	23	1
1.4	64QAM	1	3	22.38	22.62	22.44		
1.4	64QAM	1	5	22.31	22.61	22.26		
1.4	64QAM	3	0	21.30	21.56	21.31		
1.4	64QAM	3	1	21.22	21.52	21.38		
1.4	64QAM	3	3	21.27	21.41	21.36		
1.4	64QAM	6	0	21.24	21.45	21.18	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.50	22.52	22.45	24	0
20	QPSK	1	49	23.11	22.76	23.09		
20	QPSK	1	99	23.06	23.41	23.37		
20	QPSK	50	0	22.05	22.07	22.08	23	1
20	QPSK	50	24	22.07	22.00	22.31		
20	QPSK	50	50	21.99	22.01	22.41		
20	QPSK	100	0	21.92	22.06	22.21		
20	16QAM	1	0	22.25	22.16	22.33	23	1
20	16QAM	1	49	22.12	22.24	22.73		
20	16QAM	1	99	22.39	22.39	22.91		
20	16QAM	50	0	21.04	21.05	21.19	23	1
20	16QAM	50	24	21.04	21.01	21.28		
20	16QAM	50	50	21.00	21.02	21.34		
20	16QAM	100	0	21.06	21.07	21.23		
20	64QAM	1	0	21.91	21.91	21.87	23	1
20	64QAM	1	49	22.36	22.32	22.42		
20	64QAM	1	99	22.25	22.24	22.71		
20	64QAM	50	0	21.11	21.16	21.21	22	2
20	64QAM	50	24	21.08	21.08	21.37		
20	64QAM	50	50	21.06	21.13	21.44		
20	64QAM	100	0	21.05	21.13	21.32		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.58	22.64	22.90	24	0
15	QPSK	1	37	22.40	22.48	23.34		
15	QPSK	1	74	23.03	23.07	23.39		
15	QPSK	36	0	22.06	22.10	22.20	23	1
15	QPSK	36	20	22.01	22.13	22.40		
15	QPSK	36	39	21.97	22.05	22.33		
15	QPSK	75	0	22.09	22.13	22.34		
15	16QAM	1	0	22.22	22.48	22.65	23	1
15	16QAM	1	37	22.42	22.31	22.82		
15	16QAM	1	74	22.43	22.50	22.86		
15	16QAM	36	0	21.05	21.12	21.29	23	1
15	16QAM	36	20	21.02	21.12	21.44		
15	16QAM	36	39	21.00	21.10	21.29		
15	16QAM	75	0	21.07	21.14	21.33		
15	64QAM	1	0	21.81	21.85	22.05	23	1
15	64QAM	1	37	22.04	22.24	22.39		
15	64QAM	1	74	22.25	22.34	22.56		
15	64QAM	36	0	21.05	21.19	21.31	22	2
15	64QAM	36	20	21.07	21.20	21.45		
15	64QAM	36	39	21.07	21.11	21.36		
15	64QAM	75	0	21.18	21.18	21.44		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.84	22.73	23.06	24	0
10	QPSK	1	25	23.07	23.15	23.32		
10	QPSK	1	49	23.40	23.39	23.40		
10	QPSK	25	0	22.16	22.13	22.24	23	1
10	QPSK	25	12	22.10	22.09	22.41		
10	QPSK	25	25	22.24	22.23	22.53		
10	QPSK	50	0	22.22	22.17	22.47	23	1
10	16QAM	1	0	22.51	22.75	22.78		
10	16QAM	1	25	22.30	22.41	22.62		
10	16QAM	1	49	22.78	22.89	22.98	23	1
10	16QAM	25	0	21.21	21.19	21.29		
10	16QAM	25	12	21.15	21.15	21.39		
10	16QAM	25	25	21.22	21.20	21.50	23	1
10	16QAM	50	0	21.20	21.14	21.47		
10	64QAM	1	0	21.81	21.81	22.07		
10	64QAM	1	25	22.01	22.19	22.29	23	1
10	64QAM	1	49	22.18	22.36	22.51		
10	64QAM	25	0	21.06	21.20	21.30		
10	64QAM	25	12	21.07	21.14	21.35	22	2
10	64QAM	25	25	21.10	21.02	21.42		
10	64QAM	50	0	21.15	21.22	21.40		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.81	22.67	22.91	24	0
5	QPSK	1	12	23.05	23.00	23.25		
5	QPSK	1	24	23.08	23.05	23.32		
5	QPSK	12	0	22.08	22.21	22.44	23	1
5	QPSK	12	7	22.13	22.15	22.45		
5	QPSK	12	13	22.15	22.14	22.34		
5	QPSK	25	0	22.14	22.18	22.38	23	1
5	16QAM	1	0	22.57	22.55	22.87		
5	16QAM	1	12	22.34	22.52	22.75		
5	16QAM	1	24	22.34	22.35	22.75	23	1
5	16QAM	12	0	21.09	21.23	21.50		
5	16QAM	12	7	21.21	21.17	21.55		
5	16QAM	12	13	21.19	21.11	21.42	23	1
5	16QAM	25	0	21.20	21.21	21.44		
5	64QAM	1	0	21.99	22.04	22.39		
5	64QAM	1	12	22.45	22.41	22.88	23	1
5	64QAM	1	24	22.38	22.34	22.61		
5	64QAM	12	0	21.17	21.26	21.54		
5	64QAM	12	7	21.20	21.25	21.58	22	2
5	64QAM	12	13	21.25	21.17	21.44		
5	64QAM	25	0	21.23	21.24	21.47		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.55	22.56	22.96	24	0
3	QPSK	1	8	23.23	23.14	23.40		
3	QPSK	1	14	23.10	23.07	23.29		
3	QPSK	8	0	22.10	22.10	22.45	23	1
3	QPSK	8	4	22.16	22.15	22.42		
3	QPSK	8	7	22.14	22.12	22.41		
3	QPSK	15	0	22.12	22.17	22.37	23	1
3	16QAM	1	0	22.37	22.66	22.80		
3	16QAM	1	8	22.39	22.51	22.69		
3	16QAM	1	14	22.28	22.49	22.67	23	1
3	16QAM	8	0	21.11	21.19	21.52		
3	16QAM	8	4	21.24	21.22	21.42		
3	16QAM	8	7	21.16	21.16	21.39	22	2
3	16QAM	15	0	21.20	21.15	21.38		
3	64QAM	1	0	21.85	21.86	21.97		
3	64QAM	1	8	21.95	22.18	22.30	23	1
3	64QAM	1	14	22.29	22.42	22.59		
3	64QAM	8	0	21.04	21.27	21.21		
3	64QAM	8	4	21.06	21.30	21.45	22	2
3	64QAM	8	7	21.17	21.13	21.31		
3	64QAM	15	0	21.15	21.14	21.35		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.53	22.50	22.80	24	0
1.4	QPSK	1	3	23.18	23.17	23.40		
1.4	QPSK	1	5	22.96	23.13	23.31		
1.4	QPSK	3	0	23.04	23.04	23.40		
1.4	QPSK	3	1	23.05	23.07	23.40		
1.4	QPSK	3	3	23.01	23.10	23.33		
1.4	QPSK	6	0	22.00	22.03	22.41	23	1
1.4	16QAM	1	0	22.42	22.35	22.66	23	1
1.4	16QAM	1	3	22.36	22.48	22.64		
1.4	16QAM	1	5	22.27	22.42	22.70		
1.4	16QAM	3	0	22.07	21.95	22.38		
1.4	16QAM	3	1	22.03	22.04	22.48		
1.4	16QAM	3	3	21.96	22.12	22.32		
1.4	16QAM	6	0	21.09	21.11	21.47	23	1
1.4	64QAM	1	0	21.90	21.87	21.98	23	1
1.4	64QAM	1	3	22.13	22.32	22.33		
1.4	64QAM	1	5	22.21	22.34	22.51		
1.4	64QAM	3	0	21.15	21.21	21.32		
1.4	64QAM	3	1	21.01	21.24	21.51		
1.4	64QAM	3	3	21.14	21.14	21.31		
1.4	64QAM	6	0	21.19	21.12	21.47	22	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.40	22.50	22.56	24	0
10	QPSK	1	25	22.86	23.07	23.01		
10	QPSK	1	49	23.30	23.39	23.38		
10	QPSK	25	0	21.83	21.95	22.00	23	1
10	QPSK	25	12	21.92	22.02	22.03		
10	QPSK	25	25	22.10	22.10	21.99		
10	QPSK	50	0	21.93	22.02	22.04	23	1
10	16QAM	1	0	22.28	22.23	22.41		
10	16QAM	1	25	22.09	22.11	22.18		
10	16QAM	1	49	22.36	22.54	22.69	23	1
10	16QAM	25	0	21.00	22.98	21.03		
10	16QAM	25	12	21.12	21.06	21.05		
10	16QAM	25	25	21.08	21.09	21.11	23	1
10	16QAM	50	0	21.06	21.10	21.07		
10	64QAM	1	0	21.66	21.94	21.80		
10	64QAM	1	25	22.26	22.21	22.33	23	1
10	64QAM	1	49	22.55	22.36	22.46		
10	64QAM	25	0	21.06	21.16	21.19		
10	64QAM	25	12	21.10	21.22	21.16	22	2
10	64QAM	25	25	21.26	21.24	21.28		
10	64QAM	50	0	21.13	21.27	21.24		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.37	22.37	22.41	24	0
5	QPSK	1	12	22.82	23.06	22.94		
5	QPSK	1	24	22.85	22.99	23.08		
5	QPSK	12	0	21.86	22.02	22.04	23	1
5	QPSK	12	7	21.87	22.02	22.07		
5	QPSK	12	13	21.85	21.94	22.06		
5	QPSK	25	0	21.87	21.99	22.08	23	1
5	16QAM	1	0	22.29	22.33	22.25		
5	16QAM	1	12	22.02	22.20	22.15		
5	16QAM	1	24	22.18	22.23	22.40	23	1
5	16QAM	12	0	21.09	21.02	21.05		
5	16QAM	12	7	21.06	21.04	21.14		
5	16QAM	12	13	21.05	21.15	21.08	23	1
5	16QAM	25	0	21.08	21.01	21.12		
5	64QAM	1	0	21.89	21.97	22.11		
5	64QAM	1	12	22.14	22.17	22.35	23	1
5	64QAM	1	24	22.23	22.14	22.34		
5	64QAM	12	0	21.03	21.17	21.21		
5	64QAM	12	7	21.04	21.12	21.26	22	2
5	64QAM	12	13	20.96	21.07	21.17		
5	64QAM	25	0	21.03	21.18	21.26		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.30	22.39	22.47	24	0
3	QPSK	1	8	22.85	23.05	23.02		
3	QPSK	1	14	22.84	22.95	23.01		
3	QPSK	8	0	21.87	21.94	22.02	23	1
3	QPSK	8	4	21.91	21.97	22.12		
3	QPSK	8	7	21.89	21.94	22.08		
3	QPSK	15	0	21.85	21.96	22.09	23	1
3	16QAM	1	0	22.23	22.24	22.30		
3	16QAM	1	8	22.24	22.32	22.36		
3	16QAM	1	14	22.04	22.27	22.46	23	1
3	16QAM	8	0	21.00	21.08	21.08		
3	16QAM	8	4	21.16	21.06	21.12		
3	16QAM	8	7	21.12	21.08	21.13	23	1
3	16QAM	15	0	21.02	21.09	21.10		
3	64QAM	1	0	21.94	22.07	22.04		
3	64QAM	1	8	22.17	22.16	22.36	23	1
3	64QAM	1	14	22.26	22.12	22.24		
3	64QAM	8	0	21.00	21.17	21.28		
3	64QAM	8	4	21.14	21.02	21.36	22	2
3	64QAM	8	7	20.95	21.08	21.18		
3	64QAM	15	0	21.01	21.13	21.22		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.24	22.36	22.37	24	0
1.4	QPSK	1	3	22.89	23.00	23.17		
1.4	QPSK	1	5	22.82	22.95	23.08		
1.4	QPSK	3	0	22.79	22.96	22.92		
1.4	QPSK	3	1	22.86	23.00	23.00		
1.4	QPSK	3	3	22.85	22.95	23.05		
1.4	QPSK	6	0	21.79	21.96	22.03	23	1
1.4	16QAM	1	0	22.17	22.25	22.41	23	1
1.4	16QAM	1	3	22.04	22.34	22.30		
1.4	16QAM	1	5	21.99	22.20	22.37		
1.4	16QAM	3	0	21.89	21.96	22.09		
1.4	16QAM	3	1	21.97	21.97	22.15		
1.4	16QAM	3	3	21.85	21.89	22.02		
1.4	16QAM	6	0	21.06	21.06	21.17	23	1
1.4	64QAM	1	0	21.97	22.03	22.07	23	1
1.4	64QAM	1	3	22.11	22.14	22.30		
1.4	64QAM	1	5	22.24	22.12	22.43		
1.4	64QAM	3	0	21.11	21.08	21.24		
1.4	64QAM	3	1	21.02	21.04	21.25		
1.4	64QAM	3	3	21.05	21.14	21.16		
1.4	64QAM	6	0	21.09	21.24	21.19	22	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.84	22.81	22.81	24	0
20	QPSK	1	49	23.18	22.94	22.99		
20	QPSK	1	99	23.04	23.02	23.45		
20	QPSK	50	0	22.13	22.14	22.09	23	1
20	QPSK	50	24	22.18	22.02	22.04		
20	QPSK	50	50	22.14	21.99	22.09		
20	QPSK	100	0	22.19	22.05	22.07	23	1
20	16QAM	1	0	22.44	22.44	22.36		
20	16QAM	1	49	22.32	22.30	22.28		
20	16QAM	1	99	22.24	22.19	22.17	23	1
20	16QAM	50	0	21.17	21.14	21.11		
20	16QAM	50	24	21.20	21.08	21.06		
20	16QAM	50	50	21.17	21.02	21.09	23	1
20	16QAM	100	0	21.21	21.07	21.04		
20	64QAM	1	0	22.25	22.22	22.13		
20	64QAM	1	49	22.27	22.13	22.22	23	1
20	64QAM	1	99	22.06	22.12	22.18		
20	64QAM	50	0	21.13	21.16	21.26		
20	64QAM	50	24	21.11	21.03	21.20	22	2
20	64QAM	50	50	21.05	21.01	21.25		
20	64QAM	100	0	21.14	21.08	21.22		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.71	22.78	22.71	24	0
15	QPSK	1	37	22.94	22.93	22.33		
15	QPSK	1	74	23.10	23.01	23.03		
15	QPSK	36	0	22.15	22.11	22.11	23	1
15	QPSK	36	20	22.12	22.05	22.13		
15	QPSK	36	39	22.16	22.04	22.12		
15	QPSK	75	0	22.08	22.02	22.07	23	1
15	16QAM	1	0	22.24	22.41	22.31		
15	16QAM	1	37	22.17	22.12	22.35		
15	16QAM	1	74	22.29	22.25	22.19	23	1
15	16QAM	36	0	21.17	21.12	21.12		
15	16QAM	36	20	21.13	21.08	21.09		
15	16QAM	36	39	21.21	21.04	21.10	23	1
15	16QAM	75	0	21.15	21.08	21.13		
15	64QAM	1	0	21.92	22.23	22.08		
15	64QAM	1	37	22.09	22.05	22.16	23	1
15	64QAM	1	74	22.03	22.16	22.22		
15	64QAM	36	0	21.11	21.11	21.23		
15	64QAM	36	20	21.06	21.05	21.20	22	2
15	64QAM	36	39	21.11	21.02	21.25		
15	64QAM	75	0	21.09	21.07	21.27		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.15	23.07	23.05	24	0
10	QPSK	1	25	23.25	23.05	23.20		
10	QPSK	1	49	23.43	23.22	23.33		
10	QPSK	25	0	22.25	22.20	22.23	23	1
10	QPSK	25	12	22.16	22.09	22.16		
10	QPSK	25	25	22.16	22.12	22.14		
10	QPSK	50	0	22.14	22.12	22.19	23	1
10	16QAM	1	0	22.63	22.61	22.67		
10	16QAM	1	25	22.37	22.30	22.42		
10	16QAM	1	49	22.51	22.39	22.39	23	1
10	16QAM	25	0	21.25	21.24	21.26		
10	16QAM	25	12	21.19	21.12	21.19		
10	16QAM	25	25	21.14	21.11	21.13	22	2
10	16QAM	50	0	21.23	21.15	21.24		
10	64QAM	1	0	22.32	22.37	22.56		
10	64QAM	1	25	22.29	22.29	22.56	23	1
10	64QAM	1	49	22.47	22.36	22.53		
10	64QAM	25	0	21.26	21.22	21.37		
10	64QAM	25	12	21.15	21.12	21.38	22	2
10	64QAM	25	25	21.14	21.18	21.29		
10	64QAM	50	0	21.15	21.16	21.35		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.91	22.77	22.82	24	0
5	QPSK	1	12	23.18	23.04	23.10		
5	QPSK	1	24	23.13	23.07	23.12		
5	QPSK	12	0	22.20	22.12	22.14	23	1
5	QPSK	12	7	22.16	22.08	22.16		
5	QPSK	12	13	22.16	22.05	22.12		
5	QPSK	25	0	22.17	22.11	22.14	23	1
5	16QAM	1	0	22.58	22.39	22.47		
5	16QAM	1	12	22.38	22.20	22.25		
5	16QAM	1	24	22.45	22.38	22.34	23	1
5	16QAM	12	0	21.29	21.15	21.18		
5	16QAM	12	7	21.20	21.15	21.18		
5	16QAM	12	13	21.20	21.04	21.14	23	1
5	16QAM	25	0	21.22	21.12	21.19		
5	64QAM	1	0	22.37	22.28	22.59		
5	64QAM	1	12	22.29	22.19	22.52	23	1
5	64QAM	1	24	22.48	22.44	22.44		
5	64QAM	12	0	21.29	21.22	21.45		
5	64QAM	12	7	21.15	21.02	21.41	22	2
5	64QAM	12	13	21.05	21.18	21.38		
5	64QAM	25	0	21.12	21.18	21.43		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.65	22.71	22.72	24	0
10	QPSK	1	25	22.93	22.95	22.93		
10	QPSK	1	49	23.03	23.07	23.26		
10	QPSK	25	0	21.94	21.94	22.05	23	1
10	QPSK	25	12	21.82	21.88	21.94		
10	QPSK	25	25	21.90	21.91	21.97		
10	QPSK	50	0	21.92	21.95	22.02	23	1
10	16QAM	1	0	22.25	22.47	22.40		
10	16QAM	1	25	22.13	22.06	22.21		
10	16QAM	1	49	22.23	22.29	22.24	23	1
10	16QAM	25	0	21.16	21.15	21.22		
10	16QAM	25	12	21.09	21.13	21.15		
10	16QAM	25	25	21.09	21.20	21.13	23	1
10	16QAM	50	0	21.09	21.21	21.20		
10	64QAM	1	0	21.75	22.11	22.17		
10	64QAM	1	25	22.37	22.41	22.36	23	1
10	64QAM	1	49	22.35	22.39	22.27		
10	64QAM	25	0	21.23	21.29	21.31		
10	64QAM	25	12	21.18	21.29	21.20	22	2
10	64QAM	25	25	21.22	21.25	21.24		
10	64QAM	50	0	21.19	21.29	21.23		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.26	22.25	22.38	24	0
5	QPSK	1	12	22.78	22.84	22.89		
5	QPSK	1	24	22.90	22.91	22.95		
5	QPSK	12	0	21.92	21.87	21.94	23	1
5	QPSK	12	7	21.87	21.94	21.94		
5	QPSK	12	13	21.79	21.95	21.91		
5	QPSK	25	0	21.85	21.89	21.94	23	1
5	16QAM	1	0	22.22	22.10	22.26		
5	16QAM	1	12	21.97	22.03	22.15		
5	16QAM	1	24	22.17	22.11	22.13	23	1
5	16QAM	12	0	21.19	21.12	21.17		
5	16QAM	12	7	21.13	21.18	21.20		
5	16QAM	12	13	21.01	21.13	21.19	23	1
5	16QAM	25	0	21.05	21.10	21.21		
5	64QAM	1	0	21.72	22.17	22.18		
5	64QAM	1	12	22.42	22.40	22.37	23	1
5	64QAM	1	24	22.35	22.37	22.29		
5	64QAM	12	0	21.30	21.34	21.39		
5	64QAM	12	7	21.26	21.39	21.28	22	2
5	64QAM	12	13	21.26	21.22	21.20		
5	64QAM	25	0	21.19	21.37	21.27		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.24	22.33	22.29	24	0
3	QPSK	1	8	23.01	22.89	23.01		
3	QPSK	1	14	22.75	22.86	23.05		
3	QPSK	8	0	21.86	21.91	21.97	23	1
3	QPSK	8	4	21.89	21.97	22.03		
3	QPSK	8	7	21.81	21.94	21.92		
3	QPSK	15	0	21.85	21.93	21.96	23	1
3	16QAM	1	0	22.24	22.14	22.25		
3	16QAM	1	8	22.32	22.18	22.29		
3	16QAM	1	14	22.09	22.16	22.42	23	1
3	16QAM	8	0	21.08	21.14	21.28		
3	16QAM	8	4	21.19	21.21	21.30		
3	16QAM	8	7	21.09	21.15	21.16	22	2
3	16QAM	15	0	21.14	21.16	21.20		
3	64QAM	1	0	21.85	22.16	22.11		
3	64QAM	1	8	22.33	22.32	22.38	23	1
3	64QAM	1	14	22.36	22.42	22.19		
3	64QAM	8	0	21.15	21.27	21.21		
3	64QAM	8	4	21.27	21.39	21.28	22	2
3	64QAM	8	7	21.22	21.23	21.31		
3	64QAM	15	0	21.25	21.27	21.22		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.10	22.21	22.32	24	0
1.4	QPSK	1	3	22.76	22.93	22.92		
1.4	QPSK	1	5	22.82	22.80	22.97		
1.4	QPSK	3	0	22.97	22.84	22.98		
1.4	QPSK	3	1	22.92	22.82	22.94		
1.4	QPSK	3	3	22.83	22.85	22.96		
1.4	QPSK	6	0	21.84	21.78	21.87	23	1
1.4	16QAM	1	0	21.88	22.05	22.31	23	1
1.4	16QAM	1	3	22.24	22.16	22.27		
1.4	16QAM	1	5	22.09	22.25	22.11		
1.4	16QAM	3	0	21.94	21.88	21.93		
1.4	16QAM	3	1	21.87	21.90	21.96		
1.4	16QAM	3	3	21.84	21.80	21.87		
1.4	16QAM	6	0	21.06	21.03	21.06	23	1
1.4	64QAM	1	0	21.79	22.14	22.14	23	1
1.4	64QAM	1	3	22.44	22.49	22.37		
1.4	64QAM	1	5	22.37	22.31	22.28		
1.4	64QAM	3	0	21.18	21.36	21.29		
1.4	64QAM	3	1	21.24	21.26	21.18		
1.4	64QAM	3	3	21.24	21.34	21.19		
1.4	64QAM	6	0	21.27	21.34	21.25	22	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	22.52			24	0
10	QPSK	1	25	22.91				
10	QPSK	1	49	22.94				
10	QPSK	25	0	21.93			23	1
10	QPSK	25	12	21.90				
10	QPSK	25	25	21.72				
10	QPSK	50	0	21.98			23	1
10	16QAM	1	0	22.41				
10	16QAM	1	25	22.09				
10	16QAM	1	49	22.15			23	1
10	16QAM	25	0	21.26				
10	16QAM	25	12	21.16				
10	16QAM	25	25	21.02			23	1
10	16QAM	50	0	21.01				
10	64QAM	1	0	21.76				
10	64QAM	1	25	22.34			23	1
10	64QAM	1	49	22.30				
10	64QAM	25	0	21.11				
10	64QAM	25	12	21.09			22	2
10	64QAM	25	25	20.97				
10	64QAM	50	0	21.14				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.18	22.19	22.31	24	0
5	QPSK	1	12	22.78	22.82	22.85		
5	QPSK	1	24	22.86	22.82	22.75		
5	QPSK	12	0	21.81	21.82	21.88	23	1
5	QPSK	12	7	21.80	21.87	21.90		
5	QPSK	12	13	21.76	21.84	21.83		
5	QPSK	25	0	21.82	21.87	21.76	23	1
5	16QAM	1	0	22.11	22.12	22.28		
5	16QAM	1	12	22.02	22.05	22.07		
5	16QAM	1	24	22.28	22.03	21.99	23	1
5	16QAM	12	0	21.05	21.05	21.12		
5	16QAM	12	7	21.12	21.13	21.15		
5	16QAM	12	13	21.00	21.03	21.00	23	1
5	16QAM	25	0	21.11	21.08	21.00		
5	64QAM	1	0	21.82	21.55	21.88		
5	64QAM	1	12	22.07	22.18	22.06	23	1
5	64QAM	1	24	22.18	22.11	22.22		
5	64QAM	12	0	20.91	21.01	21.02		
5	64QAM	12	7	21.04	21.06	21.04	22	2
5	64QAM	12	13	20.94	20.98	20.96		
5	64QAM	25	0	21.05	21.04	20.94		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.52	22.69	22.62	24	0
10	QPSK	1	25	22.91	22.86	23.01		
10	QPSK	1	49	22.94	23.07	23.09		
10	QPSK	25	0	21.93	22.02	21.99	23	1
10	QPSK	25	12	21.90	21.97	21.98		
10	QPSK	25	25	21.72	21.92	21.94		
10	QPSK	50	0	21.98	21.97	21.97	23	1
10	16QAM	1	0	22.41	22.45	22.33		
10	16QAM	1	25	22.09	22.12	22.20		
10	16QAM	1	49	22.15	22.33	22.33	23	1
10	16QAM	25	0	21.16	21.26	21.22		
10	16QAM	25	12	21.10	21.13	21.20		
10	16QAM	25	25	21.02	21.23	21.17	23	1
10	16QAM	50	0	21.21	21.16	21.21		
10	64QAM	1	0	22.14	21.85	22.10		
10	64QAM	1	25	22.18	22.36	22.25	23	1
10	64QAM	1	49	22.38	22.46	22.30		
10	64QAM	25	0	21.38	21.32	21.32		
10	64QAM	25	12	21.20	21.23	21.14	22	2
10	64QAM	25	25	21.24	21.19	21.19		
10	64QAM	50	0	21.23	21.26	21.24		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.38	22.39	22.34	24	0
5	QPSK	1	12	22.83	23.07	22.88		
5	QPSK	1	24	22.93	22.98	23.02		
5	QPSK	12	0	21.89	22.02	22.06	23	1
5	QPSK	12	7	21.82	22.03	21.91		
5	QPSK	12	13	21.88	21.95	21.91		
5	QPSK	25	0	21.95	21.97	21.92	23	1
5	16QAM	1	0	22.20	22.19	22.20		
5	16QAM	1	12	22.10	22.17	22.12		
5	16QAM	1	24	22.24	22.29	22.29	23	1
5	16QAM	12	0	21.10	21.23	21.27		
5	16QAM	12	7	21.08	21.20	21.22		
5	16QAM	12	13	21.08	21.18	21.21	23	1
5	16QAM	25	0	21.09	21.13	21.15		
5	64QAM	1	0	22.23	21.97	22.13		
5	64QAM	1	12	22.27	22.31	22.24	23	1
5	64QAM	1	24	22.23	22.21	22.16		
5	64QAM	12	0	21.13	21.24	21.22		
5	64QAM	12	7	21.12	21.20	21.19	22	2
5	64QAM	12	13	21.13	21.17	21.23		
5	64QAM	25	0	21.14	21.13	21.22		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.89	22.98	23.03	24	0
20	QPSK	1	49	23.51	23.12	23.14		
20	QPSK	1	99	23.03	23.03	22.97		
20	QPSK	50	0	22.13	22.34	22.25	23	1
20	QPSK	50	24	22.07	22.29	22.07		
20	QPSK	50	50	22.35	22.32	22.11		
20	QPSK	100	0	22.23	22.30	22.24	23	1
20	16QAM	1	0	22.36	22.52	22.49		
20	16QAM	1	49	22.20	22.50	22.24		
20	16QAM	1	99	22.15	22.13	21.97	23	1
20	16QAM	50	0	21.14	21.35	21.22		
20	16QAM	50	24	21.08	21.29	21.07		
20	16QAM	50	50	21.21	21.29	21.06	23	1
20	16QAM	100	0	21.14	21.33	21.09		
20	64QAM	1	0	22.40	22.41	22.51		
20	64QAM	1	49	22.39	22.63	22.60	23	1
20	64QAM	1	99	22.20	22.32	21.69		
20	64QAM	50	0	21.18	21.40	21.37		
20	64QAM	50	24	21.17	21.34	21.25	22	2
20	64QAM	50	50	21.23	21.40	21.30		
20	64QAM	100	0	21.28	21.42	21.33		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.72	22.87	22.83	24	0
15	QPSK	1	37	22.87	23.12	22.82		
15	QPSK	1	74	23.21	23.31	22.87		
15	QPSK	36	0	22.16	22.36	22.23	23	1
15	QPSK	36	20	22.14	22.42	22.16		
15	QPSK	36	39	22.29	22.43	22.30		
15	QPSK	75	0	22.21	22.41	22.25	23	1
15	16QAM	1	0	22.33	22.55	22.49		
15	16QAM	1	37	22.18	22.49	22.18		
15	16QAM	1	74	22.38	22.54	21.88	23	1
15	16QAM	36	0	21.12	21.39	21.26		
15	16QAM	36	20	21.14	21.43	21.16		
15	16QAM	36	39	21.20	21.35	21.30	23	1
15	16QAM	75	0	21.27	21.44	21.25		
15	64QAM	1	0	22.01	22.20	22.09		
15	64QAM	1	37	22.41	22.51	22.14	23	1
15	64QAM	1	74	22.39	22.43	21.85		
15	64QAM	36	0	21.20	21.43	21.41		
15	64QAM	36	20	21.20	21.45	21.31	22	2
15	64QAM	36	39	21.29	21.48	21.28		
15	64QAM	75	0	21.37	21.49	21.29		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.07	23.17	23.03	24	0
10	QPSK	1	25	23.29	23.50	23.09		
10	QPSK	1	49	23.34	23.50	23.43		
10	QPSK	25	0	22.18	22.40	22.16	23	1
10	QPSK	25	12	22.23	22.38	22.09		
10	QPSK	25	25	22.10	22.37	22.29		
10	QPSK	50	0	22.23	22.50	22.15	23	1
10	16QAM	1	0	22.60	22.82	22.51		
10	16QAM	1	25	22.38	22.67	22.20		
10	16QAM	1	49	22.59	22.67	22.22	23	1
10	16QAM	25	0	21.17	21.43	21.13		
10	16QAM	25	12	21.21	21.34	21.09		
10	16QAM	25	25	21.12	21.38	21.28	23	1
10	16QAM	50	0	21.23	21.41	21.14		
10	64QAM	1	0	22.39	22.48	22.45		
10	64QAM	1	25	22.53	22.78	22.25	23	1
10	64QAM	1	49	22.51	22.68	22.05		
10	64QAM	25	0	21.29	21.58	21.32		
10	64QAM	25	12	21.28	21.43	21.27	22	2
10	64QAM	25	25	21.19	21.49	21.25		
10	64QAM	50	0	21.25	21.45	21.34		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.90	23.16	22.99	24	0
5	QPSK	1	12	23.08	23.37	23.11		
5	QPSK	1	24	23.19	23.28	23.18		
5	QPSK	12	0	22.23	22.41	22.19	23	1
5	QPSK	12	7	22.16	22.44	22.10		
5	QPSK	12	13	22.16	22.33	22.07		
5	QPSK	25	0	22.20	22.37	22.14	23	1
5	16QAM	1	0	22.66	22.67	22.62		
5	16QAM	1	12	22.38	22.78	22.39		
5	16QAM	1	24	22.42	22.61	22.29	23	1
5	16QAM	12	0	21.27	21.40	21.23		
5	16QAM	12	7	21.21	21.41	21.13		
5	16QAM	12	13	21.19	21.37	21.12	23	1
5	16QAM	25	0	21.18	21.36	21.14		
5	64QAM	1	0	22.36	22.37	22.33		
5	64QAM	1	12	22.45	22.79	22.35	23	1
5	64QAM	1	24	22.52	22.51	22.20		
5	64QAM	12	0	21.33	21.49	21.43		
5	64QAM	12	7	21.27	21.51	21.30	22	2
5	64QAM	12	13	21.22	21.41	21.26		
5	64QAM	25	0	21.29	21.40	21.35		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.81	23.10	22.77	24	0
3	QPSK	1	8	23.16	23.40	23.18		
3	QPSK	1	14	23.15	23.35	23.09		
3	QPSK	8	0	22.20	22.38	22.09	23	1
3	QPSK	8	4	22.22	22.44	22.09		
3	QPSK	8	7	22.14	22.32	22.06		
3	QPSK	15	0	22.18	22.41	22.09	23	1
3	16QAM	1	0	22.48	22.77	22.40		
3	16QAM	1	8	22.68	22.77	22.37		
3	16QAM	1	14	22.36	22.52	22.24	23	1
3	16QAM	8	0	21.23	21.40	21.16		
3	16QAM	8	4	21.23	21.45	21.18		
3	16QAM	8	7	21.22	21.43	21.11	23	1
3	16QAM	15	0	21.20	21.39	21.15		
3	64QAM	1	0	22.32	22.31	22.39		
3	64QAM	1	8	22.40	22.79	22.36	23	1
3	64QAM	1	14	22.53	22.60	22.23		
3	64QAM	8	0	21.41	21.48	21.39		
3	64QAM	8	4	21.21	21.42	21.20	22	2
3	64QAM	8	7	21.23	21.45	21.30		
3	64QAM	15	0	21.37	21.40	21.44		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.69	23.02	22.69	24	0
1.4	QPSK	1	3	23.31	23.44	23.08		
1.4	QPSK	1	5	23.02	23.25	23.10		
1.4	QPSK	3	0	23.16	23.43	23.11		
1.4	QPSK	3	1	23.22	23.41	23.09		
1.4	QPSK	3	3	23.12	23.31	23.04		
1.4	QPSK	6	0	22.12	22.36	22.03	23	1
1.4	16QAM	1	0	22.50	22.65	22.34	23	1
1.4	16QAM	1	3	22.62	22.80	22.38		
1.4	16QAM	1	5	22.48	22.50	22.21		
1.4	16QAM	3	0	22.18	22.35	22.07		
1.4	16QAM	3	1	22.09	22.37	22.08		
1.4	16QAM	3	3	22.14	22.27	21.95		
1.4	16QAM	6	0	21.25	21.45	21.17	23	1
1.4	64QAM	1	0	22.38	22.37	22.23	23	1
1.4	64QAM	1	3	22.47	22.88	22.40		
1.4	64QAM	1	5	22.47	22.61	22.27		
1.4	64QAM	3	0	21.39	21.55	21.49		
1.4	64QAM	3	1	21.27	21.57	21.24		
1.4	64QAM	3	3	21.20	21.49	21.19		
1.4	64QAM	6	0	21.29	21.49	21.45	22	2



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.50	22.48	22.50	24	0
15	QPSK	1	37	23.43	22.62	22.65		
15	QPSK	1	74	23.17	23.14	23.24		
15	QPSK	36	0	22.30	22.33	22.32	23	1
15	QPSK	36	20	22.09	22.05	22.06		
15	QPSK	36	39	21.99	21.89	21.88		
15	QPSK	75	0	22.11	22.18	22.24		
15	16QAM	1	0	22.43	22.36	22.49	23	1
15	16QAM	1	37	21.98	22.14	22.03		
15	16QAM	1	74	22.64	22.66	22.73		
15	16QAM	36	0	21.29	21.38	21.33	23	1
15	16QAM	36	20	21.07	21.06	21.12		
15	16QAM	36	39	21.04	21.00	21.02		
15	16QAM	75	0	21.16	21.20	21.29		
15	64QAM	1	0	21.98	22.03	22.14	23	1
15	64QAM	1	37	22.13	22.38	22.42		
15	64QAM	1	74	22.62	22.74	22.44		
15	64QAM	36	0	21.38	21.51	21.52	22	2
15	64QAM	36	20	21.18	21.31	21.23		
15	64QAM	36	39	20.98	21.18	21.12		
15	64QAM	75	0	21.17	21.32	21.46		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.56	22.54	22.70	24	0
10	QPSK	1	25	22.60	22.89	22.74		
10	QPSK	1	49	23.06	23.17	23.15		
10	QPSK	25	0	22.08	22.18	22.24	23	1
10	QPSK	25	12	22.06	22.28	22.16		
10	QPSK	25	25	22.17	22.28	22.36		
10	QPSK	50	0	22.14	22.28	22.25		
10	16QAM	1	0	22.56	22.54	22.68	23	1
10	16QAM	1	25	22.14	22.42	22.34		
10	16QAM	1	49	22.57	22.55	22.54		
10	16QAM	25	0	21.12	21.20	21.28	23	1
10	16QAM	25	12	21.07	21.30	21.19		
10	16QAM	25	25	21.20	21.26	21.28		
10	16QAM	50	0	21.24	21.31	21.37		
10	64QAM	1	0	22.21	22.13	22.15	23	1
10	64QAM	1	25	22.37	22.57	22.49		
10	64QAM	1	49	22.62	22.73	22.57		
10	64QAM	25	0	21.37	21.41	21.49	22	2
10	64QAM	25	12	21.29	21.48	21.39		
10	64QAM	25	25	21.37	21.46	21.45		
10	64QAM	50	0	21.28	21.46	21.52		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.12	22.24	22.30	24	0
1.4	QPSK	1	3	22.69	22.76	22.85		
1.4	QPSK	1	5	22.53	22.81	22.76		
1.4	QPSK	3	0	22.71	22.71	22.76		
1.4	QPSK	3	1	22.75	22.82	22.82		
1.4	QPSK	3	3	22.71	22.82	22.82		
1.4	QPSK	6	0	22.07	22.22	22.21	23	1
1.4	16QAM	1	0	22.23	22.33	22.36	23	1
1.4	16QAM	1	3	22.20	22.43	22.46		
1.4	16QAM	1	5	22.17	22.51	22.30		
1.4	16QAM	3	0	21.99	22.09	22.13		
1.4	16QAM	3	1	22.08	22.18	22.17		
1.4	16QAM	3	3	22.02	22.12	22.12		
1.4	16QAM	6	0	21.20	21.34	21.24	23	1
1.4	64QAM	1	0	22.22	22.01	22.14	23	1
1.4	64QAM	1	3	22.44	22.31	22.07		
1.4	64QAM	1	5	22.34	22.40	22.36		
1.4	64QAM	3	0	21.33	21.32	21.21		
1.4	64QAM	3	1	21.30	21.10	21.24		
1.4	64QAM	3	3	21.22	21.09	21.36		
1.4	64QAM	6	0	21.30	21.28	21.31	22	2



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.67	22.66	22.82	24	0
20	QPSK	1	49	22.84	22.96	23.01		
20	QPSK	1	99	23.53	23.54	23.63		
20	QPSK	50	0	22.07	22.03	22.08	23	1
20	QPSK	50	24	22.03	22.05	22.14		
20	QPSK	50	50	22.04	22.05	22.27		
20	QPSK	100	0	22.03	22.11	22.10	23	1
20	16QAM	1	0	22.18	22.44	22.33		
20	16QAM	1	49	22.35	22.39	22.41		
20	16QAM	1	99	22.77	22.91	22.79	23	1
20	16QAM	50	0	21.06	21.03	21.09		
20	16QAM	50	24	21.00	21.07	21.13		
20	16QAM	50	50	21.20	21.09	21.23	23	1
20	16QAM	100	0	21.05	21.09	21.17		
20	64QAM	1	0	22.05	22.22	21.94		
20	64QAM	1	49	22.21	22.21	22.30	23	1
20	64QAM	1	99	22.61	22.71	22.81		
20	64QAM	50	0	21.08	21.11	21.12		
20	64QAM	50	24	21.07	21.12	21.20	22	2
20	64QAM	50	50	21.14	21.21	21.27		
20	64QAM	100	0	21.11	21.14	21.24		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.88	22.98	23.19	24	0
15	QPSK	1	37	23.12	22.92	23.23		
15	QPSK	1	74	23.22	23.31	23.26		
15	QPSK	36	0	22.10	22.10	22.19	23	1
15	QPSK	36	20	22.04	22.01	22.06		
15	QPSK	36	39	21.91	21.99	22.10		
15	QPSK	75	0	21.94	22.06	22.13	23	1
15	16QAM	1	0	22.49	22.64	22.70		
15	16QAM	1	37	22.29	22.50	22.51		
15	16QAM	1	74	22.58	22.65	22.66	23	1
15	16QAM	36	0	21.06	21.11	21.27		
15	16QAM	36	20	21.05	21.06	21.12		
15	16QAM	36	39	21.09	21.17	21.07	23	1
15	16QAM	75	0	21.13	21.07	21.13		
15	64QAM	1	0	22.07	22.26	22.07		
15	64QAM	1	37	22.30	22.47	22.59	23	1
15	64QAM	1	74	22.50	22.54	22.82		
15	64QAM	36	0	21.13	21.10	21.25		
15	64QAM	36	20	21.07	21.08	21.12	22	2
15	64QAM	36	39	20.88	21.01	21.19		
15	64QAM	75	0	21.01	21.19	21.13		



Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.32	22.34	22.31	24	0
10	QPSK	1	25	23.12	23.02	23.20		
10	QPSK	1	49	23.30	23.29	23.28		
10	QPSK	25	0	21.96	22.06	22.03	23	1
10	QPSK	25	12	22.14	22.11	22.30		
10	QPSK	25	25	22.13	22.11	22.18		
10	QPSK	50	0	22.09	22.08	22.18	23	1
10	16QAM	1	0	21.90	21.91	21.93		
10	16QAM	1	25	22.25	22.40	22.50		
10	16QAM	1	49	22.72	22.82	22.88	23	1
10	16QAM	25	0	21.02	21.07	21.09		
10	16QAM	25	12	21.12	21.17	21.21		
10	16QAM	25	25	21.13	21.21	21.20	23	1
10	16QAM	50	0	21.13	21.07	21.26		
10	64QAM	1	0	22.29	22.33	22.15		
10	64QAM	1	25	22.27	22.18	22.43	23	1
10	64QAM	1	49	22.32	22.26	22.38		
10	64QAM	25	0	21.17	21.09	21.29		
10	64QAM	25	12	21.22	21.16	21.11	22	2
10	64QAM	25	25	21.11	21.07	21.11		
10	64QAM	50	0	21.16	21.18	21.25		
Channel				21.18	21.19	21.24	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.78	22.80	22.85	24	0
5	QPSK	1	12	23.00	22.99	23.15		
5	QPSK	1	24	23.05	23.04	23.11		
5	QPSK	12	0	22.09	22.09	22.24	23	1
5	QPSK	12	7	22.00	22.07	22.15		
5	QPSK	12	13	22.04	22.06	22.09		
5	QPSK	25	0	22.04	22.14	22.21	23	1
5	16QAM	1	0	22.37	22.60	22.69		
5	16QAM	1	12	22.24	22.27	22.29		
5	16QAM	1	24	22.32	22.33	22.44	23	1
5	16QAM	12	0	21.12	21.16	21.23		
5	16QAM	12	7	21.03	21.15	21.18		
5	16QAM	12	13	21.07	21.10	21.15	23	1
5	16QAM	25	0	21.05	21.17	21.12		
5	64QAM	1	0	22.28	22.36	22.23		
5	64QAM	1	12	22.25	22.22	22.33	23	1
5	64QAM	1	24	22.32	22.29	22.30		
5	64QAM	12	0	21.13	21.18	21.27		
5	64QAM	12	7	21.12	21.20	21.21	22	2
5	64QAM	12	13	21.09	21.14	21.18		
5	64QAM	25	0	21.07	21.20	21.24		



Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.70	22.72	22.72	24	0
3	QPSK	1	8	23.13	23.05	23.12		
3	QPSK	1	14	23.00	22.97	23.02		
3	QPSK	8	0	22.03	22.08	22.18	23	1
3	QPSK	8	4	22.08	22.09	22.11		
3	QPSK	8	7	22.06	22.01	22.11		
3	QPSK	15	0	22.04	22.08	22.16	23	1
3	16QAM	1	0	22.35	22.53	22.53		
3	16QAM	1	8	22.29	22.45	22.47		
3	16QAM	1	14	22.35	22.48	22.37	23	1
3	16QAM	8	0	21.10	21.17	21.24		
3	16QAM	8	4	21.10	21.12	21.19		
3	16QAM	8	7	21.11	21.13	21.09	23	1
3	16QAM	15	0	21.03	21.06	21.14		
3	64QAM	1	0	22.35	22.39	22.14		
3	64QAM	1	8	22.19	22.14	22.34	23	1
3	64QAM	1	14	22.39	22.21	22.27		
3	64QAM	8	0	21.21	21.28	21.18		
3	64QAM	8	4	21.14	21.15	21.19	22	2
3	64QAM	8	7	21.19	21.13	21.09		
3	64QAM	15	0	21.03	21.21	21.34		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.63	22.67	22.74	24	0
1.4	QPSK	1	3	22.98	23.14	23.12		
1.4	QPSK	1	5	23.02	22.96	23.00		
1.4	QPSK	3	0	22.97	23.06	23.11		
1.4	QPSK	3	1	23.04	23.10	23.14		
1.4	QPSK	3	3	23.05	23.03	23.11		
1.4	QPSK	6	0	21.98	22.06	22.08	23	1
1.4	16QAM	1	0	22.27	22.27	22.50	23	1
1.4	16QAM	1	3	22.17	22.28	22.50		
1.4	16QAM	1	5	22.43	22.31	22.36		
1.4	16QAM	3	0	22.02	22.03	22.08		
1.4	16QAM	3	1	22.02	22.12	22.15		
1.4	16QAM	3	3	21.98	22.03	22.04		
1.4	16QAM	6	0	21.08	21.14	21.11	23	1
1.4	64QAM	1	0	22.36	22.45	22.23	23	1
1.4	64QAM	1	3	22.24	22.21	22.38		
1.4	64QAM	1	5	22.22	22.34	22.37		
1.4	64QAM	3	0	21.18	21.24	21.36		
1.4	64QAM	3	1	21.17	21.13	21.25		
1.4	64QAM	3	3	21.12	21.11	21.14		
1.4	64QAM	6	0	21.11	21.27	21.24	22	2



<LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372		
Frequency (MHz)				673	683	688		
20	QPSK	1	0	22.55	22.47	22.48	24	0
20	QPSK	1	49	22.98	22.88	23.24		
20	QPSK	1	99	22.89	22.74	22.84		
20	QPSK	50	0	22.05	21.79	21.75	23	1
20	QPSK	50	24	22.22	22.10	22.03		
20	QPSK	50	50	22.09	21.97	21.98		
20	QPSK	100	0	22.17	21.87	21.92	23	1
20	16QAM	1	0	21.22	21.07	21.05		
20	16QAM	1	49	22.01	21.67	21.95		
20	16QAM	1	99	21.61	21.38	21.51	23	1
20	16QAM	50	0	21.12	21.23	21.29		
20	16QAM	50	24	21.07	21.14	21.12		
20	16QAM	50	50	21.00	21.15	21.09	23	1
20	16QAM	100	0	21.31	21.12	21.31		
20	64QAM	1	0	21.57	21.53	21.34		
20	64QAM	1	49	21.76	21.48	21.52	23	1
20	64QAM	1	99	21.87	21.31	21.51		
20	64QAM	50	0	20.66	20.47	20.19		
20	64QAM	50	24	20.71	20.32	20.41	22	2
20	64QAM	50	50	20.80	20.38	20.39		
20	64QAM	100	0	20.52	20.34	20.22		
Channel				133197	133297	133397		
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	22.63	22.50	22.38	24	0
15	QPSK	1	37	22.72	22.64	22.64		
15	QPSK	1	74	22.75	22.53	22.52		
15	QPSK	36	0	21.84	21.73	21.55	23	1
15	QPSK	36	20	21.92	21.67	21.70		
15	QPSK	36	39	21.76	21.60	21.54		
15	QPSK	75	0	21.82	21.56	21.56	23	1
15	16QAM	1	0	21.85	21.70	21.67		
15	16QAM	1	37	22.29	21.59	21.82		
15	16QAM	1	74	21.82	21.76	21.79	23	1
15	16QAM	36	0	21.25	21.16	21.19		
15	16QAM	36	20	21.19	21.11	21.10		
15	16QAM	36	39	21.00	21.25	21.26	23	1
15	16QAM	75	0	21.23	21.22	21.26		
15	64QAM	1	0	21.62	21.56	21.41		
15	64QAM	1	37	21.80	21.52	21.40	23	1
15	64QAM	1	74	21.92	21.41	21.43		
15	64QAM	36	0	20.66	20.32	20.37		
15	64QAM	36	20	20.62	20.45	20.38	22	2
15	64QAM	36	39	20.71	20.47	20.37		
15	64QAM	75	0	20.60	20.30	20.31		



Channel				133172	133272	133422	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				668	678	693		
10	QPSK	1	0	22.46	22.31	22.31	24	0
10	QPSK	1	25	22.85	22.97	22.78		
10	QPSK	1	49	22.80	23.17	23.13		
10	QPSK	25	0	21.97	21.77	21.71	23	1
10	QPSK	25	12	22.12	21.94	21.91		
10	QPSK	25	25	22.09	22.01	22.01		
10	QPSK	50	0	22.17	21.88	21.88	23	1
10	16QAM	1	0	21.61	21.50	21.49		
10	16QAM	1	25	22.48	22.16	22.06		
10	16QAM	1	49	22.48	22.40	22.17	23	1
10	16QAM	25	0	21.24	21.20	21.32		
10	16QAM	25	12	21.18	21.16	21.17		
10	16QAM	25	25	21.01	21.25	21.16	23	1
10	16QAM	50	0	21.26	21.24	21.26		
10	64QAM	1	0	21.05	21.25	21.14		
10	64QAM	1	25	21.93	21.15	21.15	23	1
10	64QAM	1	49	21.83	21.27	21.28		
10	64QAM	25	0	20.42	20.14	20.10		
10	64QAM	25	12	20.69	20.27	20.17	22	2
10	64QAM	25	25	20.73	20.34	20.20		
10	64QAM	50	0	20.55	20.26	20.18		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	22.98	22.92	22.89	24	0
5	QPSK	1	12	23.24	22.94	22.92		
5	QPSK	1	24	23.09	22.85	22.80		
5	QPSK	12	0	22.16	21.92	21.99	23	1
5	QPSK	12	7	22.10	22.00	21.98		
5	QPSK	12	13	22.01	21.95	21.85		
5	QPSK	25	0	22.08	21.97	21.94	23	1
5	16QAM	1	0	22.36	22.29	22.18		
5	16QAM	1	12	22.29	22.05	22.14		
5	16QAM	1	24	22.44	22.10	22.10	23	1
5	16QAM	12	0	21.07	21.18	21.20		
5	16QAM	12	7	21.03	21.17	21.19		
5	16QAM	12	13	21.05	21.16	21.20	23	1
5	16QAM	25	0	21.23	21.12	21.22		
5	64QAM	1	0	21.61	21.56	21.39		
5	64QAM	1	12	21.86	21.51	21.44	23	1
5	64QAM	1	24	21.85	21.39	21.45		
5	64QAM	12	0	20.71	20.37	20.27		
5	64QAM	12	7	20.70	20.39	20.34	22	2
5	64QAM	12	13	20.80	20.37	20.29		
5	64QAM	25	0	20.61	20.27	20.27		



<Near-Body and Hotspot Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	16.17	16.37	16.50	16.5	0
20	QPSK	1	49	15.96	16.19	16.07		
20	QPSK	1	99	15.89	15.78	15.92		
20	QPSK	50	0	16.06	16.41	16.37	16.5	0
20	QPSK	50	24	16.05	16.35	16.36		
20	QPSK	50	50	16.02	16.24	16.11		
20	QPSK	100	0	15.97	16.28	16.14		
20	16QAM	1	0	16.36	16.44	16.42	16.5	0
20	16QAM	1	49	16.14	16.22	16.27		
20	16QAM	1	99	16.02	16.05	16.13		
20	16QAM	50	0	15.06	15.37	15.36	16.5	0
20	16QAM	50	24	15.03	15.40	15.32		
20	16QAM	50	50	15.03	15.27	15.15		
20	16QAM	100	0	15.01	15.26	15.24		
20	64QAM	1	0	15.34	15.53	15.41	16.5	0
20	64QAM	1	49	15.09	15.41	15.36		
20	64QAM	1	99	15.08	15.03	15.02		
20	64QAM	50	0	14.08	14.43	14.38	14.5	2
20	64QAM	50	24	14.09	14.39	14.40		
20	64QAM	50	50	14.03	14.29	14.19		
20	64QAM	100	0	14.04	14.25	14.26		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	16.25	16.48	16.42	16.5	0
15	QPSK	1	37	15.87	16.23	15.93		
15	QPSK	1	74	16.18	16.32	16.48		
15	QPSK	36	0	16.03	16.23	16.30	16.5	0
15	QPSK	36	20	16.07	16.31	16.35		
15	QPSK	36	39	16.02	16.33	16.17		
15	QPSK	75	0	16.06	16.22	16.25		
15	16QAM	1	0	16.42	16.40	16.48	16.5	0
15	16QAM	1	37	15.99	16.18	16.22		
15	16QAM	1	74	16.43	16.41	16.44		
15	16QAM	36	0	15.00	15.24	15.34	16.5	0
15	16QAM	36	20	15.04	15.30	15.28		
15	16QAM	36	39	15.00	15.35	15.20		
15	16QAM	75	0	15.08	15.21	15.25		
15	64QAM	1	0	15.40	15.73	15.31	16.5	0
15	64QAM	1	37	15.02	15.49	15.29		
15	64QAM	1	74	15.25	15.09	14.92		
15	64QAM	36	0	14.00	14.32	14.20	14.5	2
15	64QAM	36	20	13.99	14.50	14.43		
15	64QAM	36	39	14.06	14.12	14.20		
15	64QAM	75	0	14.24	14.38	14.44		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.16	16.42	16.29	16.5	0
10	QPSK	1	25	16.02	16.39	16.19		
10	QPSK	1	49	16.12	16.29	16.27		
10	QPSK	25	0	15.97	16.32	16.22	16.5	0
10	QPSK	25	12	15.94	16.27	16.20		
10	QPSK	25	25	15.96	16.23	16.13		
10	QPSK	50	0	15.96	16.25	16.14	16.5	0
10	16QAM	1	0	16.35	16.45	16.49		
10	16QAM	1	25	16.25	16.45	16.39		
10	16QAM	1	49	16.34	16.42	16.39	16.5	0
10	16QAM	25	0	15.05	15.36	15.21		
10	16QAM	25	12	15.03	15.32	15.21		
10	16QAM	25	25	15.01	15.21	15.14	16.5	0
10	16QAM	50	0	15.05	15.24	15.19		
10	64QAM	1	0	15.40	15.57	15.56		
10	64QAM	1	25	15.13	15.52	15.30	16.5	0
10	64QAM	1	49	15.09	15.19	15.00		
10	64QAM	25	0	13.94	14.49	14.29		
10	64QAM	25	12	14.18	14.23	14.50	14.5	2
10	64QAM	25	25	14.06	14.15	14.27		
10	64QAM	50	0	14.08	14.12	14.46		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	16.13	16.49	16.37	16.5	0
5	QPSK	1	12	16.05	16.32	16.15		
5	QPSK	1	24	15.94	16.25	16.16		
5	QPSK	12	0	16.05	16.39	16.21	16.5	0
5	QPSK	12	7	15.93	16.33	16.19		
5	QPSK	12	13	15.95	16.21	16.14		
5	QPSK	25	0	15.99	16.36	16.18	16.5	0
5	16QAM	1	0	16.37	16.47	16.34		
5	16QAM	1	12	16.17	16.42	16.49		
5	16QAM	1	24	16.25	16.38	16.46	16.5	0
5	16QAM	12	0	15.11	15.39	15.21		
5	16QAM	12	7	15.09	15.31	15.18		
5	16QAM	12	13	15.04	15.21	15.17	16.5	0
5	16QAM	25	0	15.06	15.36	15.18		
5	64QAM	1	0	15.44	15.64	15.32		
5	64QAM	1	12	15.08	15.43	15.22	16.5	0
5	64QAM	1	24	15.17	15.00	15.17		
5	64QAM	12	0	13.99	14.28	14.33		
5	64QAM	12	7	14.23	14.42	14.48	14.5	2
5	64QAM	12	13	14.12	14.31	14.11		
5	64QAM	25	0	14.22	14.12	14.11		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	16.01	16.34	16.17	16.5	0
3	QPSK	1	8	16.01	16.33	16.14		
3	QPSK	1	14	15.99	16.19	16.12		
3	QPSK	8	0	16.02	16.31	16.18	16.5	0
3	QPSK	8	4	16.01	16.35	16.13		
3	QPSK	8	7	15.95	16.29	16.13		
3	QPSK	15	0	16.00	16.32	16.15	16.5	0
3	16QAM	1	0	16.29	16.21	16.48		
3	16QAM	1	8	16.35	16.44	16.35		
3	16QAM	1	14	16.27	16.40	16.35	16.5	0
3	16QAM	8	0	15.05	15.31	15.20		
3	16QAM	8	4	15.07	15.36	15.19		
3	16QAM	8	7	15.02	15.33	15.16	16.5	0
3	16QAM	15	0	15.00	15.37	15.17		
3	64QAM	1	0	15.23	15.53	15.21		
3	64QAM	1	8	15.29	15.36	15.56	16.5	0
3	64QAM	1	14	15.05	15.18	15.05		
3	64QAM	8	0	14.01	14.26	14.35		
3	64QAM	8	4	14.26	14.46	14.50	14.5	2
3	64QAM	8	7	14.01	14.23	14.08		
3	64QAM	15	0	14.19	14.42	14.15		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.96	16.30	16.05	16.5	0
1.4	QPSK	1	3	16.00	16.23	16.03		
1.4	QPSK	1	5	15.95	16.22	16.09		
1.4	QPSK	3	0	15.97	16.26	16.06		
1.4	QPSK	3	1	16.00	16.29	16.12		
1.4	QPSK	3	3	15.99	16.28	16.08		
1.4	QPSK	6	0	15.95	16.27	16.05	16.5	0
1.4	16QAM	1	0	16.30	16.42	16.30	16.5	0
1.4	16QAM	1	3	16.32	16.31	16.34		
1.4	16QAM	1	5	16.21	16.46	16.29		
1.4	16QAM	3	0	15.99	16.30	16.12		
1.4	16QAM	3	1	16.05	16.32	16.12		
1.4	16QAM	3	3	15.95	16.24	16.10		
1.4	16QAM	6	0	15.09	15.42	15.20	16.5	0
1.4	64QAM	1	0	15.42	15.73	15.43	16.5	0
1.4	64QAM	1	3	14.89	15.28	15.29		
1.4	64QAM	1	5	14.90	14.83	14.84		
1.4	64QAM	3	0	14.50	14.61	14.75		
1.4	64QAM	3	1	14.54	14.57	14.69		
1.4	64QAM	3	3	14.53	14.64	14.55		
1.4	64QAM	6	0	14.02	14.15	14.35	14.5	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.62	15.70	15.88	16.5	0
20	QPSK	1	49	15.65	15.74	15.91		
20	QPSK	1	99	15.59	15.79	16.00		
20	QPSK	50	0	15.76	15.81	15.88	16.5	0
20	QPSK	50	24	15.77	15.68	16.01		
20	QPSK	50	50	15.63	15.67	16.01		
20	QPSK	100	0	15.64	15.76	15.91		
20	16QAM	1	0	15.88	15.87	15.97	16.5	0
20	16QAM	1	49	15.79	15.89	16.08		
20	16QAM	1	99	15.91	16.06	16.21		
20	16QAM	50	0	15.26	15.33	15.38	16.5	0
20	16QAM	50	24	15.27	15.20	15.49		
20	16QAM	50	50	15.14	15.20	15.55		
20	16QAM	100	0	15.14	15.26	15.45		
20	64QAM	1	0	15.34	15.39	15.41	16.5	0
20	64QAM	1	49	15.30	15.34	15.66		
20	64QAM	1	99	15.31	15.49	15.68		
20	64QAM	50	0	14.31	14.34	14.43	14.5	2
20	64QAM	50	24	14.31	14.27	14.50		
20	64QAM	50	50	14.21	14.27	14.48		
20	64QAM	100	0	14.22	14.27	14.47		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.87	15.94	16.09	16.5	0
15	QPSK	1	37	15.77	15.90	15.83		
15	QPSK	1	74	15.64	15.68	16.04		
15	QPSK	36	0	15.76	15.85	16.03	16.5	0
15	QPSK	36	20	15.75	15.84	16.11		
15	QPSK	36	39	15.72	15.79	15.99		
15	QPSK	75	0	15.75	15.79	16.06		
15	16QAM	1	0	15.99	16.11	16.31	16.5	0
15	16QAM	1	37	15.85	15.80	16.18		
15	16QAM	1	74	15.94	16.00	16.29		
15	16QAM	36	0	15.28	15.35	15.56	16.5	0
15	16QAM	36	20	15.25	15.35	15.64		
15	16QAM	36	39	15.24	15.24	15.48		
15	16QAM	75	0	15.26	15.29	15.53		
15	64QAM	1	0	15.38	15.43	15.51	16.5	0
15	64QAM	1	37	15.26	15.54	15.82		
15	64QAM	1	74	15.18	15.32	15.55		
15	64QAM	36	0	14.21	14.47	14.44	14.5	2
15	64QAM	36	20	14.44	14.44	14.42		
15	64QAM	36	39	14.12	14.14	14.41		
15	64QAM	75	0	14.10	14.16	14.34		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.06	16.12	16.29	16.5	0
10	QPSK	1	25	15.79	15.81	16.06		
10	QPSK	1	49	16.14	16.21	16.34		
10	QPSK	25	0	15.88	15.90	15.99	16.5	0
10	QPSK	25	12	15.80	15.80	16.14		
10	QPSK	25	25	15.87	15.90	16.21		
10	QPSK	50	0	15.88	15.83	16.17	16.5	0
10	16QAM	1	0	16.31	16.35	16.44		
10	16QAM	1	25	16.01	16.09	16.32		
10	16QAM	1	49	16.43	16.50	16.42	16.5	0
10	16QAM	25	0	15.41	15.41	15.56		
10	16QAM	25	12	15.36	15.29	15.65		
10	16QAM	25	25	15.38	15.40	15.74	16.5	0
10	16QAM	50	0	15.41	15.35	15.69		
10	64QAM	1	0	15.32	15.36	15.30		
10	64QAM	1	25	15.35	15.30	15.57	16.5	0
10	64QAM	1	49	15.40	15.55	15.61		
10	64QAM	25	0	14.49	14.48	14.46		
10	64QAM	25	12	14.45	14.22	14.45	14.5	2
10	64QAM	25	25	14.17	14.33	14.43		
10	64QAM	50	0	14.05	14.19	14.50		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	15.86	15.97	16.20	16.5	0
5	QPSK	1	12	15.86	15.88	16.02		
5	QPSK	1	24	15.77	15.79	16.07		
5	QPSK	12	0	15.79	15.89	16.21	16.5	0
5	QPSK	12	7	15.84	15.89	16.20		
5	QPSK	12	13	15.84	15.81	16.09		
5	QPSK	25	0	15.88	15.91	16.15	16.5	0
5	16QAM	1	0	16.12	16.22	16.44		
5	16QAM	1	12	16.09	16.09	16.31		
5	16QAM	1	24	16.06	16.03	16.30	16.5	0
5	16QAM	12	0	15.32	15.41	15.77		
5	16QAM	12	7	15.39	15.41	15.72		
5	16QAM	12	13	15.36	15.36	15.64	16.5	0
5	16QAM	25	0	15.41	15.39	15.68		
5	64QAM	1	0	15.30	15.54	15.41		
5	64QAM	1	12	15.12	15.42	15.59	16.5	0
5	64QAM	1	24	15.39	15.38	15.72		
5	64QAM	12	0	14.42	14.48	14.37		
5	64QAM	12	7	14.47	14.42	14.37	14.5	2
5	64QAM	12	13	14.40	14.37	14.44		
5	64QAM	25	0	14.39	14.20	14.43		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.70	15.89	16.17	16.5	0
3	QPSK	1	8	15.81	15.86	16.10		
3	QPSK	1	14	15.76	15.75	16.02		
3	QPSK	8	0	15.78	15.81	16.12	16.5	0
3	QPSK	8	4	15.82	15.86	16.08		
3	QPSK	8	7	15.81	15.82	16.12		
3	QPSK	15	0	15.79	15.89	16.04	16.5	0
3	16QAM	1	0	16.06	16.12	16.44		
3	16QAM	1	8	16.02	16.17	16.33		
3	16QAM	1	14	16.00	16.01	16.32	16.5	0
3	16QAM	8	0	15.35	15.36	15.70		
3	16QAM	8	4	15.41	15.44	15.65		
3	16QAM	8	7	15.37	15.36	15.68	16.5	0
3	16QAM	15	0	15.36	15.42	15.62		
3	64QAM	1	0	15.49	15.20	15.54		
3	64QAM	1	8	15.18	15.43	15.81	16.5	0
3	64QAM	1	14	15.21	15.59	15.66		
3	64QAM	8	0	14.20	14.31	14.42		
3	64QAM	8	4	14.31	14.22	14.43	14.5	2
3	64QAM	8	7	14.01	14.14	14.44		
3	64QAM	15	0	14.28	14.44	14.45		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	15.72	15.76	16.05	16.5	0
1.4	QPSK	1	3	15.70	15.82	16.15		
1.4	QPSK	1	5	15.65	15.80	16.01		
1.4	QPSK	3	0	15.68	15.77	16.11		
1.4	QPSK	3	1	15.73	15.77	16.14		
1.4	QPSK	3	3	15.70	15.82	16.05		
1.4	QPSK	6	0	15.69	15.72	16.11	16.5	0
1.4	16QAM	1	0	15.98	15.97	16.35	16.5	0
1.4	16QAM	1	3	16.00	16.09	16.42		
1.4	16QAM	1	5	15.96	16.08	16.25		
1.4	16QAM	3	0	15.73	15.78	16.10		
1.4	16QAM	3	1	15.77	15.76	16.16		
1.4	16QAM	3	3	15.72	15.82	16.02		
1.4	16QAM	6	0	15.33	15.35	15.75	16.5	0
1.4	64QAM	1	0	15.24	15.38	15.34	16.5	0
1.4	64QAM	1	3	15.43	15.34	15.67		
1.4	64QAM	1	5	15.26	15.29	15.81		
1.4	64QAM	3	0	14.51	14.56	14.66		
1.4	64QAM	3	1	14.55	14.56	14.67		
1.4	64QAM	3	3	14.53	14.59	14.68		
1.4	64QAM	6	0	14.08	14.26	14.50	14.5	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.42	21.45	21.48	23	0
10	QPSK	1	25	21.51	21.61	21.59		
10	QPSK	1	49	22.06	21.95	22.12		
10	QPSK	25	0	21.52	21.61	21.67	23	0
10	QPSK	25	12	21.60	21.64	21.66		
10	QPSK	25	25	21.75	21.76	21.78		
10	QPSK	50	0	21.58	21.74	21.70	23	0
10	16QAM	1	0	21.93	21.93	21.82		
10	16QAM	1	25	21.80	21.78	21.86		
10	16QAM	1	49	21.84	21.90	21.90	22	1
10	16QAM	25	0	20.52	20.64	20.65		
10	16QAM	25	12	20.58	20.68	20.71		
10	16QAM	25	25	20.71	20.73	20.79	22	1
10	16QAM	50	0	20.59	20.75	20.74		
10	64QAM	1	0	21.83	21.78	21.85		
10	64QAM	1	25	21.75	21.76	21.92	22	1
10	64QAM	1	49	21.76	21.82	21.88		
10	64QAM	25	0	21.55	21.76	21.75		
10	64QAM	25	12	21.66	21.84	21.84	22	1
10	64QAM	25	25	21.63	21.62	21.81		
10	64QAM	50	0	21.48	21.88	21.56		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.32	21.33	21.27	23	0
5	QPSK	1	12	21.58	21.66	21.63		
5	QPSK	1	24	21.62	21.63	21.70		
5	QPSK	12	0	21.57	21.66	21.72	23	0
5	QPSK	12	7	21.59	21.68	21.75		
5	QPSK	12	13	21.55	21.61	21.72		
5	QPSK	25	0	21.60	21.72	21.77	23	0
5	16QAM	1	0	21.95	21.81	21.97		
5	16QAM	1	12	21.84	21.87	21.82		
5	16QAM	1	24	21.87	21.91	21.98	22	1
5	16QAM	12	0	20.57	20.75	20.75		
5	16QAM	12	7	20.59	20.72	20.76		
5	16QAM	12	13	20.59	20.63	20.73	22	1
5	16QAM	25	0	20.60	20.73	20.83		
5	64QAM	1	0	21.83	21.78	21.85		
5	64QAM	1	12	21.75	21.83	21.82	22	1
5	64QAM	1	24	21.76	21.82	21.92		
5	64QAM	12	0	21.63	21.76	21.75		
5	64QAM	12	7	21.68	21.76	21.81	22	1
5	64QAM	12	13	21.63	21.67	21.81		
5	64QAM	25	0	21.59	21.74	21.79		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.65	21.29	21.31	23	0
3	QPSK	1	8	21.57	21.69	21.76		
3	QPSK	1	14	21.60	21.69	21.72		
3	QPSK	8	0	21.61	21.65	21.68	23	0
3	QPSK	8	4	21.60	21.70	21.78		
3	QPSK	8	7	21.61	21.62	21.75		
3	QPSK	15	0	21.54	21.68	21.82	23	0
3	16QAM	1	0	21.88	21.91	21.92		
3	16QAM	1	8	21.90	21.98	21.82		
3	16QAM	1	14	21.89	21.96	21.85	22	1
3	16QAM	8	0	20.68	20.71	20.76		
3	16QAM	8	4	20.66	20.75	20.84		
3	16QAM	8	7	20.64	20.71	20.84	22	1
3	16QAM	15	0	20.57	20.72	20.82		
3	64QAM	1	0	21.79	21.86	21.86		
3	64QAM	1	8	21.75	21.84	21.90	22	1
3	64QAM	1	14	21.68	21.81	21.86		
3	64QAM	8	0	21.73	21.70	21.71		
3	64QAM	8	4	21.65	21.74	21.80	22	1
3	64QAM	8	7	21.63	21.70	21.78		
3	64QAM	15	0	21.57	21.70	21.80		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.31	21.28	21.34	23	0
1.4	QPSK	1	3	21.58	21.66	21.75		
1.4	QPSK	1	5	21.56	21.58	21.71		
1.4	QPSK	3	0	21.54	21.69	21.71		
1.4	QPSK	3	1	21.57	21.66	21.73		
1.4	QPSK	3	3	21.56	21.63	21.70		
1.4	QPSK	6	0	21.55	21.63	21.73	23	0
1.4	16QAM	1	0	21.84	21.98	21.94	23	0
1.4	16QAM	1	3	21.91	21.90	21.93		
1.4	16QAM	1	5	21.82	21.87	21.94		
1.4	16QAM	3	0	21.56	21.70	21.75		
1.4	16QAM	3	1	21.59	21.69	21.77		
1.4	16QAM	3	3	21.58	21.61	21.71		
1.4	16QAM	6	0	20.64	20.73	20.81	22	1
1.4	64QAM	1	0	21.76	21.81	21.91	22	1
1.4	64QAM	1	3	21.76	21.84	21.95		
1.4	64QAM	1	5	21.72	21.76	21.86		
1.4	64QAM	3	0	21.62	21.75	21.83		
1.4	64QAM	3	1	21.71	21.80	21.91		
1.4	64QAM	3	3	21.69	21.75	21.84		
1.4	64QAM	6	0	21.56	21.64	21.71	22	1



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.78	17.62	17.55	18.5	0
20	QPSK	1	49	17.86	17.71	17.62		
20	QPSK	1	99	17.72	17.64	17.58		
20	QPSK	50	0	17.69	17.69	17.74	18.5	0
20	QPSK	50	24	17.77	17.65	17.79		
20	QPSK	50	50	17.71	17.62	17.85		
20	QPSK	100	0	17.82	17.65	17.80		
20	16QAM	1	0	17.84	17.88	17.96	18.5	0
20	16QAM	1	49	17.80	17.89	17.89		
20	16QAM	1	99	17.91	17.95	18.11		
20	16QAM	50	0	17.68	17.72	17.75	18.5	0
20	16QAM	50	24	17.75	17.62	17.73		
20	16QAM	50	50	17.73	17.65	17.91		
20	16QAM	100	0	17.80	17.64	17.74		
20	64QAM	1	0	17.93	17.84	17.95	18.5	0
20	64QAM	1	49	17.93	17.79	17.88		
20	64QAM	1	99	17.83	17.85	18.08		
20	64QAM	50	0	17.69	17.68	17.77	18.5	0
20	64QAM	50	24	17.76	17.65	17.77		
20	64QAM	50	50	17.70	17.67	17.87		
20	64QAM	100	0	17.71	17.61	17.77		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.81	17.63	17.79	18.5	0
15	QPSK	1	37	17.35	17.46	17.71		
15	QPSK	1	74	17.64	17.67	17.72		
15	QPSK	36	0	17.70	17.67	17.77	18.5	0
15	QPSK	36	20	17.68	17.65	17.79		
15	QPSK	36	39	17.75	17.65	17.87		
15	QPSK	75	0	17.64	17.61	17.78		
15	16QAM	1	0	17.87	17.89	17.91	18.5	0
15	16QAM	1	37	17.70	17.69	17.86		
15	16QAM	1	74	17.91	17.94	18.04		
15	16QAM	36	0	16.68	16.64	16.75	18.5	0
15	16QAM	36	20	16.63	16.61	16.79		
15	16QAM	36	39	16.72	16.61	16.82		
15	16QAM	75	0	16.67	16.61	16.80		
15	64QAM	1	0	16.79	16.85	16.86	18.5	0
15	64QAM	1	37	16.65	16.53	16.84		
15	64QAM	1	74	16.78	16.86	16.92		
15	64QAM	36	0	17.69	17.64	17.79	18.5	0
15	64QAM	36	20	17.56	17.45	17.62		
15	64QAM	36	39	17.70	17.62	17.87		
15	64QAM	75	0	17.77	17.66	17.78		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.08	17.96	18.13	18.5	0
10	QPSK	1	25	17.68	17.65	17.87		
10	QPSK	1	49	17.95	17.90	18.02		
10	QPSK	25	0	17.78	17.72	17.82	18.5	0
10	QPSK	25	12	17.68	17.63	17.82		
10	QPSK	25	25	17.76	17.75	17.85		
10	QPSK	50	0	17.78	17.71	17.85	18.5	0
10	16QAM	1	0	18.18	18.18	18.34		
10	16QAM	1	25	17.87	17.88	18.00		
10	16QAM	1	49	18.13	18.05	18.24	18.5	0
10	16QAM	25	0	16.81	16.73	16.85		
10	16QAM	25	12	16.70	16.65	16.86		
10	16QAM	25	25	16.67	16.71	16.81	18.5	0
10	16QAM	50	0	16.74	16.68	16.88		
10	64QAM	1	0	17.18	17.09	17.24		
10	64QAM	1	25	16.83	16.79	17.04	18.5	0
10	64QAM	1	49	17.08	16.96	17.13		
10	64QAM	25	0	17.86	17.49	17.81		
10	64QAM	25	12	17.66	17.63	17.77	18.5	0
10	64QAM	25	25	17.83	17.65	17.80		
10	64QAM	50	0	17.57	17.66	17.64		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.88	17.74	17.94	18.5	0
5	QPSK	1	12	17.77	17.62	17.79		
5	QPSK	1	24	17.75	17.68	17.81		
5	QPSK	12	0	17.75	17.68	17.79	18.5	0
5	QPSK	12	7	17.72	17.63	17.79		
5	QPSK	12	13	17.71	17.64	17.78		
5	QPSK	25	0	17.74	17.67	17.86	18.5	0
5	16QAM	1	0	17.96	18.00	18.14		
5	16QAM	1	12	17.85	17.82	17.97		
5	16QAM	1	24	17.84	17.89	18.14	18.5	0
5	16QAM	12	0	16.80	16.73	16.84		
5	16QAM	12	7	16.74	16.66	16.84		
5	16QAM	12	13	16.69	16.65	16.80	18.5	0
5	16QAM	25	0	16.77	16.65	16.78		
5	64QAM	1	0	16.95	16.89	17.02		
5	64QAM	1	12	16.97	16.72	16.87	18.5	0
5	64QAM	1	24	16.86	16.87	16.94		
5	64QAM	12	0	17.59	17.54	17.72		
5	64QAM	12	7	17.48	17.46	17.55	18.5	0
5	64QAM	12	13	17.55	17.81	17.78		
5	64QAM	25	0	17.86	17.84	17.82		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	16.91	17.03	17.01	17.5	0
20	QPSK	1	49	16.66	16.99	16.95		
20	QPSK	1	99	16.63	16.63	16.63		
20	QPSK	50	0	16.76	17.01	16.99	17.5	0
20	QPSK	50	24	16.71	16.97	16.91		
20	QPSK	50	50	16.85	16.95	16.88		
20	QPSK	100	0	16.84	16.96	16.91		
20	16QAM	1	0	17.21	17.35	17.48	17.5	0
20	16QAM	1	49	16.98	17.17	16.91		
20	16QAM	1	99	16.92	16.83	16.91		
20	16QAM	50	0	16.78	17.04	17.02	17.5	0
20	16QAM	50	24	16.73	17.08	16.90		
20	16QAM	50	50	16.86	16.98	16.90		
20	16QAM	100	0	16.83	17.02	16.94		
20	64QAM	1	0	17.09	17.24	17.32	17.5	0
20	64QAM	1	49	16.84	17.14	17.07		
20	64QAM	1	99	16.83	16.78	16.77		
20	64QAM	50	0	15.78	16.07	16.10	16.5	1
20	64QAM	50	24	15.78	16.03	15.92		
20	64QAM	50	50	15.83	16.03	15.89		
20	64QAM	100	0	15.84	16.05	16.00		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	16.94	17.06	17.19	17.5	0
15	QPSK	1	37	16.53	16.82	16.96		
15	QPSK	1	74	16.85	17.01	16.95		
15	QPSK	36	0	16.78	17.02	17.06	17.5	0
15	QPSK	36	20	16.76	17.12	16.96		
15	QPSK	36	39	16.85	17.10	17.09		
15	QPSK	75	0	16.85	17.13	16.99		
15	16QAM	1	0	17.10	17.28	17.31	17.5	0
15	16QAM	1	37	16.91	17.01	17.21		
15	16QAM	1	74	17.12	17.21	17.31		
15	16QAM	36	0	16.81	17.14	17.02	17.5	0
15	16QAM	36	20	16.78	17.15	17.02		
15	16QAM	36	39	16.81	17.09	17.07		
15	16QAM	75	0	16.86	17.10	17.02		
15	64QAM	1	0	17.01	17.21	17.24	17.5	0
15	64QAM	1	37	17.40	16.83	16.48		
15	64QAM	1	74	17.03	17.15	17.04		
15	64QAM	36	0	15.87	16.09	16.11	16.5	1
15	64QAM	36	20	15.84	16.14	16.04		
15	64QAM	36	39	15.89	16.13	16.04		
15	64QAM	75	0	15.91	16.16	16.06		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	17.11	17.34	17.25	17.5	0
10	QPSK	1	25	16.84	17.13	16.95		
10	QPSK	1	49	17.02	17.24	17.12		
10	QPSK	25	0	16.87	17.10	16.93	17.5	0
10	QPSK	25	12	16.83	17.02	16.93		
10	QPSK	25	25	16.69	17.07	17.04		
10	QPSK	50	0	16.83	17.11	16.97	17.5	0
10	16QAM	1	0	17.34	17.50	17.39		
10	16QAM	1	25	17.04	17.32	17.09		
10	16QAM	1	49	17.22	17.44	17.37	17.5	0
10	16QAM	25	0	16.88	17.12	16.95		
10	16QAM	25	12	16.84	17.05	16.88		
10	16QAM	25	25	16.73	17.06	17.05	17.5	0
10	16QAM	50	0	16.85	17.13	16.88		
10	64QAM	1	0	17.16	17.45	17.18		
10	64QAM	1	25	16.92	17.30	17.13	17.5	0
10	64QAM	1	49	17.06	17.36	17.27		
10	64QAM	25	0	15.85	16.18	15.95		
10	64QAM	25	12	15.83	16.09	15.97	16.5	1
10	64QAM	25	25	15.77	16.10	16.07		
10	64QAM	50	0	15.84	16.10	15.97		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	16.98	17.23	17.12	17.5	0
5	QPSK	1	12	16.82	17.03	16.88		
5	QPSK	1	24	16.75	16.97	16.89		
5	QPSK	12	0	16.83	17.06	17.05	17.5	0
5	QPSK	12	7	16.79	17.08	16.94		
5	QPSK	12	13	16.79	17.02	16.92		
5	QPSK	25	0	16.83	17.01	16.97	17.5	0
5	16QAM	1	0	17.16	17.41	17.30		
5	16QAM	1	12	17.00	17.35	17.05		
5	16QAM	1	24	16.99	17.15	17.18	17.5	0
5	16QAM	12	0	16.88	17.10	17.00		
5	16QAM	12	7	16.83	17.12	16.95		
5	16QAM	12	13	16.78	17.06	16.92	17.5	0
5	16QAM	25	0	16.80	17.01	16.93		
5	64QAM	1	0	17.10	17.36	17.24		
5	64QAM	1	12	16.99	17.20	17.08	17.5	0
5	64QAM	1	24	16.93	17.13	17.06		
5	64QAM	12	0	15.94	16.16	16.08		
5	64QAM	12	7	15.88	16.17	15.94	16.5	1
5	64QAM	12	13	15.86	16.12	15.92		
5	64QAM	25	0	15.81	16.05	15.94		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	16.86	17.14	16.61	17.5	0
3	QPSK	1	8	16.84	17.10	16.90		
3	QPSK	1	14	16.68	16.99	16.84		
3	QPSK	8	0	16.78	17.06	16.92	17.5	0
3	QPSK	8	4	16.76	17.09	16.87		
3	QPSK	8	7	16.79	16.98	16.88		
3	QPSK	15	0	16.76	17.07	16.90	17.5	0
3	16QAM	1	0	17.07	17.29	17.15		
3	16QAM	1	8	17.11	17.41	17.13		
3	16QAM	1	14	16.97	17.22	16.98	17.5	0
3	16QAM	8	0	16.87	17.10	16.97		
3	16QAM	8	4	16.86	17.13	16.94		
3	16QAM	8	7	16.78	17.08	16.95	17.5	0
3	16QAM	15	0	16.79	17.10	16.90		
3	64QAM	1	0	17.00	17.28	17.07		
3	64QAM	1	8	16.97	17.27	17.07	17.5	0
3	64QAM	1	14	16.90	17.15	17.03		
3	64QAM	8	0	15.87	16.14	15.91		
3	64QAM	8	4	15.85	16.18	15.92	16.5	1
3	64QAM	8	7	15.82	16.06	15.91		
3	64QAM	15	0	15.83	16.12	15.89		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	16.80	17.05	16.95	17.5	0
1.4	QPSK	1	3	16.76	17.02	16.87		
1.4	QPSK	1	5	16.70	16.96	16.82		
1.4	QPSK	3	0	16.74	17.02	16.86		
1.4	QPSK	3	1	16.77	17.05	16.88		
1.4	QPSK	3	3	16.76	16.97	16.84		
1.4	QPSK	6	0	16.72	17.04	16.86	17.5	0
1.4	16QAM	1	0	16.99	17.28	17.07	17.5	0
1.4	16QAM	1	3	17.01	17.34	17.10		
1.4	16QAM	1	5	16.94	17.17	17.10		
1.4	16QAM	3	0	16.77	17.03	16.89		
1.4	16QAM	3	1	16.80	17.08	16.95		
1.4	16QAM	3	3	16.73	16.93	16.89		
1.4	16QAM	6	0	16.83	17.20	16.94	17.5	0
1.4	64QAM	1	0	16.93	17.20	17.04	17.5	0
1.4	64QAM	1	3	16.96	17.30	17.07		
1.4	64QAM	1	5	16.87	17.08	16.99		
1.4	64QAM	3	0	16.82	17.16	16.96		
1.4	64QAM	3	1	16.92	17.22	17.03		
1.4	64QAM	3	3	16.84	17.07	16.98		
1.4	64QAM	6	0	15.75	16.06	15.84	15.5	2



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	15.63	15.73	15.80	17	0
20	QPSK	1	49	15.68	15.60	15.84		
20	QPSK	1	99	16.21	16.32	16.31		
20	QPSK	50	0	15.78	15.72	15.76	17	0
20	QPSK	50	24	15.75	15.80	15.84		
20	QPSK	50	50	15.82	15.75	15.89		
20	QPSK	100	0	15.73	15.79	15.83	17	0
20	16QAM	1	0	15.90	16.00	16.02		
20	16QAM	1	49	15.91	15.90	16.06		
20	16QAM	1	99	16.37	16.34	16.40	16	1
20	16QAM	50	0	14.80	14.77	14.78		
20	16QAM	50	24	14.72	14.81	14.88		
20	16QAM	50	50	14.80	14.79	14.87	16	1
20	16QAM	100	0	14.77	14.80	14.86		
20	64QAM	1	0	14.97	14.99	14.96		
20	64QAM	1	49	14.81	14.88	14.91	16	1
20	64QAM	1	99	15.26	15.38	15.41		
20	64QAM	50	0	13.83	13.74	13.85		
20	64QAM	50	24	13.71	13.79	13.89	15	2
20	64QAM	50	50	13.80	13.76	13.92		
20	64QAM	100	0	13.72	13.78	13.89		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	15.76	15.76	15.74	17	0
15	QPSK	1	37	15.37	15.45	15.89		
15	QPSK	1	74	15.84	15.95	15.92		
15	QPSK	36	0	15.83	15.87	15.92	17	0
15	QPSK	36	20	15.73	15.78	15.79		
15	QPSK	36	39	15.64	15.72	15.79		
15	QPSK	75	0	15.66	15.79	15.83	17	0
15	16QAM	1	0	16.26	16.31	16.36		
15	16QAM	1	37	15.80	16.00	15.89		
15	16QAM	1	74	16.12	16.12	16.14	16	1
15	16QAM	36	0	14.80	14.84	14.95		
15	16QAM	36	20	14.75	14.80	14.77		
15	16QAM	36	39	14.60	14.68	14.77	16	1
15	16QAM	75	0	14.63	14.82	14.78		
15	64QAM	1	0	14.88	15.09	14.77		
15	64QAM	1	37	15.01	14.68	14.74	16	1
15	64QAM	1	74	15.14	15.40	15.35		
15	64QAM	36	0	13.78	13.75	13.65		
15	64QAM	36	20	13.51	13.72	13.71	15	2
15	64QAM	36	39	13.78	13.64	13.90		
15	64QAM	75	0	13.90	13.82	13.85		



Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	16.84	16.89	16.99	17	0
10	QPSK	1	25	15.77	15.74	15.84		
10	QPSK	1	49	16.12	16.18	16.21		
10	QPSK	25	0	15.67	15.76	15.73	17	0
10	QPSK	25	12	15.82	15.83	15.95		
10	QPSK	25	25	15.81	15.85	15.91		
10	QPSK	50	0	15.80	15.81	15.90	17	0
10	16QAM	1	0	15.36	15.49	15.52		
10	16QAM	1	25	16.01	15.97	16.03		
10	16QAM	1	49	16.45	16.45	16.47	16	1
10	16QAM	25	0	14.71	14.80	14.79		
10	16QAM	25	12	14.86	14.83	14.91		
10	16QAM	25	25	14.85	14.87	14.88	16	1
10	16QAM	50	0	14.83	14.85	14.91		
10	64QAM	1	0	14.88	15.09	14.77		
10	64QAM	1	25	15.01	14.68	14.74	16	1
10	64QAM	1	49	15.14	15.40	15.35		
10	64QAM	25	0	13.78	13.75	13.65		
10	64QAM	25	12	13.51	13.72	13.71	15	2
10	64QAM	25	25	13.78	13.64	13.90		
10	64QAM	50	0	13.90	13.82	13.85		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	16.82	16.73	16.83	17	0
5	QPSK	1	12	15.60	15.74	15.75		
5	QPSK	1	24	15.73	15.73	15.79		
5	QPSK	12	0	15.80	15.86	15.86	17	0
5	QPSK	12	7	15.68	15.80	15.84		
5	QPSK	12	13	15.70	15.76	15.79		
5	QPSK	25	0	15.70	15.83	15.86	17	0
5	16QAM	1	0	16.12	16.21	16.24		
5	16QAM	1	12	15.89	15.98	16.04		
5	16QAM	1	24	15.99	15.96	16.01	16	1
5	16QAM	12	0	14.80	14.89	14.94		
5	16QAM	12	7	14.70	14.85	14.85		
5	16QAM	12	13	14.73	14.78	14.80	16	1
5	16QAM	25	0	14.75	14.84	14.85		
5	64QAM	1	0	14.88	15.09	14.77		
5	64QAM	1	12	15.01	14.68	14.74	16	1
5	64QAM	1	24	15.14	15.40	15.35		
5	64QAM	12	0	13.78	13.75	13.65		
5	64QAM	12	7	13.51	13.72	13.71	15	2
5	64QAM	12	13	13.78	13.64	13.90		
5	64QAM	25	0	13.90	13.82	13.85		



Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	16.79	16.59	16.75	17	0
3	QPSK	1	8	15.78	15.81	15.61		
3	QPSK	1	14	15.77	15.75	15.92		
3	QPSK	8	0	15.98	15.81	15.68	17	0
3	QPSK	8	4	15.55	15.78	16.00		
3	QPSK	8	7	15.67	15.57	15.69		
3	QPSK	15	0	15.50	15.83	15.69	17	0
3	16QAM	1	0	15.96	16.01	16.07		
3	16QAM	1	8	15.88	15.95	15.94		
3	16QAM	1	14	16.09	16.03	15.85	16	1
3	16QAM	8	0	14.67	14.79	15.02		
3	16QAM	8	4	14.61	14.87	14.79		
3	16QAM	8	7	14.88	14.77	14.66	15	2
3	16QAM	15	0	14.74	14.78	14.77		
3	64QAM	1	0	14.84	15.09	14.89		
3	64QAM	1	8	14.91	14.54	14.83	16	1
3	64QAM	1	14	15.08	15.25	15.32		
3	64QAM	8	0	13.70	13.72	13.81		
3	64QAM	8	4	13.38	13.67	13.76	15	2
3	64QAM	8	7	13.81	13.72	14.01		
3	64QAM	15	0	13.82	13.98	14.04		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	16.88	16.64	16.78	17	0
1.4	QPSK	1	3	15.63	15.61	15.79		
1.4	QPSK	1	5	15.82	15.83	15.79		
1.4	QPSK	3	0	15.80	15.85	15.71		
1.4	QPSK	3	1	15.56	15.85	15.66		
1.4	QPSK	3	3	15.79	15.80	15.73		
1.4	QPSK	6	0	15.87	15.76	16.02	17	0
1.4	16QAM	1	0	16.20	16.18	16.28	17	0
1.4	16QAM	1	3	16.09	15.78	16.13		
1.4	16QAM	1	5	16.10	16.15	16.16		
1.4	16QAM	3	0	15.88	15.77	15.85		
1.4	16QAM	3	1	15.80	16.00	15.86		
1.4	16QAM	3	3	15.48	15.77	15.78		
1.4	16QAM	6	0	14.95	15.01	14.82	16	1
1.4	64QAM	1	0	14.80	15.14	14.70	16	1
1.4	64QAM	1	3	14.91	14.87	14.61		
1.4	64QAM	1	5	15.05	15.30	15.49		
1.4	64QAM	3	0	14.03	14.06	14.05		
1.4	64QAM	3	1	14.03	14.03	14.04		
1.4	64QAM	3	3	14.04	14.11	14.02		
1.4	64QAM	6	0	13.71	13.90	13.71	15	2

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

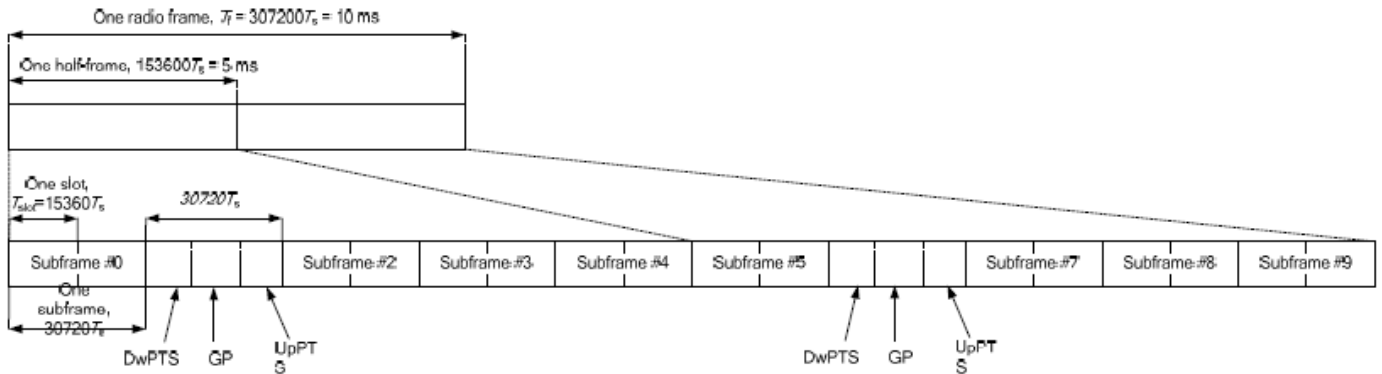


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts		
1	19760 · Ts			20480 · Ts				
2	21952 · Ts			23040 · Ts				
3	24144 · Ts			25600 · Ts				
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts		
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts				
6	19760 · Ts			23040 · Ts				
7	21952 · Ts			12800 · Ts				
8	24144 · Ts			-	-			
9	13168 · Ts			-	-	-	-	

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

- i. The device supports Power Class 2 uplink-downlink configurations 0 and 6, and Power Class 3 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- ii. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition. Please see Section 14.5 for linearity results.



<Default Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.86	23.04	22.95	24	0
20	QPSK	1	49	23.31	23.84	23.45		
20	QPSK	1	99	23.42	23.22	23.52		
20	QPSK	50	0	21.85	21.76	21.98	23	1
20	QPSK	50	24	21.78	21.68	21.96		
20	QPSK	50	50	21.77	21.73	21.98		
20	QPSK	100	0	21.85	21.86	22.00	23	1
20	16QAM	1	0	22.27	22.17	21.96		
20	16QAM	1	49	22.32	22.11	21.91		
20	16QAM	1	99	22.08	21.82	21.96	22	2
20	16QAM	50	0	20.85	20.75	20.96		
20	16QAM	50	24	20.83	20.75	21.04		
20	16QAM	50	50	20.84	20.72	21.06	22	2
20	16QAM	100	0	20.95	20.81	21.08		
20	64QAM	1	0	21.63	21.58	21.61		
20	64QAM	1	49	21.38	21.30	21.38	22	2
20	64QAM	1	99	21.60	21.52	21.53		
20	64QAM	50	0	20.34	20.41	20.47		
20	64QAM	50	24	20.41	20.49	20.47	21	3
20	64QAM	50	50	20.58	20.52	20.52		
20	64QAM	100	0	20.65	20.70	20.62		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.07	22.89	23.04	24	0
15	QPSK	1	37	23.60	23.18	23.33		
15	QPSK	1	74	23.61	23.47	23.51		
15	QPSK	36	0	21.82	21.72	21.91	23	1
15	QPSK	36	20	21.80	21.77	22.02		
15	QPSK	36	39	21.85	21.74	21.93		
15	QPSK	75	0	21.81	21.79	21.96	23	1
15	16QAM	1	0	22.11	22.23	21.90		
15	16QAM	1	37	22.71	21.93	22.38		
15	16QAM	1	74	22.16	22.04	21.97	22	2
15	16QAM	36	0	20.81	20.81	20.82		
15	16QAM	36	20	20.82	20.82	20.98		
15	16QAM	36	39	20.83	20.72	21.01	22	2
15	16QAM	75	0	20.89	20.84	20.85		
15	64QAM	1	0	21.57	21.49	21.69		
15	64QAM	1	37	21.23	21.32	21.14	22	2
15	64QAM	1	74	21.47	21.54	21.61		
15	64QAM	36	0	20.38	20.31	20.37		
15	64QAM	36	20	20.69	20.41	20.56	21	3
15	64QAM	36	39	20.64	20.43	20.58		
15	64QAM	75	0	20.76	20.62	20.70		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.31	23.17	23.22	24	0
10	QPSK	1	25	23.56	23.40	23.48		
10	QPSK	1	49	23.51	23.58	23.61		
10	QPSK	25	0	21.97	21.82	21.99	23	1
10	QPSK	25	12	21.99	21.88	21.84		
10	QPSK	25	25	21.99	21.82	21.91		
10	QPSK	50	0	21.89	21.86	22.01	23	1
10	16QAM	1	0	22.10	22.21	22.06		
10	16QAM	1	25	21.84	21.89	22.11		
10	16QAM	1	49	21.88	22.05	22.44	22	2
10	16QAM	25	0	20.96	20.82	21.05		
10	16QAM	25	12	20.97	20.81	20.86		
10	16QAM	25	25	20.93	20.61	20.96	21	3
10	16QAM	50	0	20.99	20.86	21.08		
10	64QAM	1	0	21.58	21.57	21.65		
10	64QAM	1	25	21.38	21.26	21.32	22	2
10	64QAM	1	49	21.46	21.62	21.58		
10	64QAM	25	0	20.46	20.38	20.35		
10	64QAM	25	12	20.53	20.54	20.59	21	3
10	64QAM	25	25	20.35	20.57	20.58		
10	64QAM	50	0	20.89	20.54	20.71		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.22	23.01	23.22	24	0
5	QPSK	1	12	23.72	23.37	23.52		
5	QPSK	1	24	23.58	23.31	23.54		
5	QPSK	12	0	22.03	21.87	22.00	23	1
5	QPSK	12	7	22.04	21.88	22.04		
5	QPSK	12	13	21.94	21.82	21.99		
5	QPSK	25	0	22.10	21.85	21.99	23	1
5	16QAM	1	0	22.29	21.93	22.35		
5	16QAM	1	12	22.47	21.86	22.14		
5	16QAM	1	24	22.39	22.03	22.05	22	2
5	16QAM	12	0	20.97	20.82	20.99		
5	16QAM	12	7	20.96	20.82	21.00		
5	16QAM	12	13	20.89	20.75	20.95	22	2
5	16QAM	25	0	20.98	20.81	21.00		
5	64QAM	1	0	21.65	21.62	21.57		
5	64QAM	1	12	21.39	21.30	21.14	22	2
5	64QAM	1	24	21.40	21.51	21.43		
5	64QAM	12	0	20.57	20.46	20.63		
5	64QAM	12	7	20.66	20.63	20.48	21	3
5	64QAM	12	13	20.68	20.42	20.70		
5	64QAM	25	0	20.86	20.64	20.72		



<LTE Band 41 (Power Class 2)>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	24.04	24.43	24.29	24.33	24.31	25	0
20	QPSK	1	49	24.26	24.37	24.23	24.29	24.39		
20	QPSK	1	99	24.20	23.93	23.67	23.60	23.74		
20	QPSK	50	0	23.24	23.32	23.29	23.28	23.60	24	1
20	QPSK	50	24	23.32	23.31	23.17	23.18	23.53		
20	QPSK	50	50	23.48	23.51	23.23	23.30	23.05		
20	QPSK	100	0	23.38	23.41	23.30	23.30	22.95	24	1
20	16QAM	1	0	23.21	23.38	23.31	23.28	22.88		
20	16QAM	1	49	23.57	23.44	23.33	23.33	23.23		
20	16QAM	1	99	23.56	23.55	23.51	23.43	23.59	23	2
20	16QAM	50	0	22.56	22.35	22.38	22.34	22.44		
20	16QAM	50	24	22.51	22.33	22.25	22.53	21.96		
20	16QAM	50	50	22.51	22.53	22.25	22.36	22.06	23	2
20	16QAM	100	0	22.49	22.38	22.30	22.50	22.05		
20	64QAM	1	0	22.20	22.39	22.31	22.70	22.71		
20	64QAM	1	49	22.11	22.07	21.99	22.05	22.01	23	2
20	64QAM	1	99	22.41	22.43	22.11	22.23	22.20		
20	64QAM	50	0	21.46	21.26	21.35	21.45	21.29		
20	64QAM	50	24	21.41	21.38	21.34	21.35	20.96	22	3
20	64QAM	50	50	21.62	21.49	21.36	21.29	20.96		
20	64QAM	100	0	21.57	21.44	21.31	21.47	21.03		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.90	24.35	24.24	24.25	24.14	25	0
15	QPSK	1	37	24.11	24.32	24.10	24.19	24.30		
15	QPSK	1	74	24.21	23.83	23.65	23.62	23.71		
15	QPSK	36	0	23.05	23.23	23.21	23.13	23.45	24	1
15	QPSK	36	20	23.26	23.18	22.97	23.11	23.45		
15	QPSK	36	39	23.44	23.33	23.14	23.27	22.92		
15	QPSK	75	0	23.29	23.36	23.15	23.17	22.78	24	1
15	16QAM	1	0	23.15	23.37	23.15	23.24	22.84		
15	16QAM	1	37	23.48	23.44	23.28	23.27	23.21		
15	16QAM	1	74	23.41	23.42	23.43	23.36	23.58	23	2
15	16QAM	36	0	22.54	22.17	22.30	22.15	22.34		
15	16QAM	36	20	22.36	22.31	22.25	22.41	21.80		
15	16QAM	36	39	22.51	22.35	22.08	22.31	21.95	23	2
15	16QAM	75	0	22.49	22.34	22.28	22.45	21.93		
15	64QAM	1	0	22.08	22.25	22.29	22.62	22.53		
15	64QAM	1	37	22.06	22.04	21.98	21.90	21.89	23	2
15	64QAM	1	74	22.30	22.41	21.96	22.14	22.00		
15	64QAM	36	0	21.33	21.17	21.28	21.33	21.25		
15	64QAM	36	20	21.28	21.30	21.18	21.17	20.79	22	3
15	64QAM	36	39	21.45	21.35	21.19	21.28	20.85		
15	64QAM	75	0	21.48	21.28	21.30	21.42	21.00		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.88	24.29	24.23	24.16	24.18	25	0
10	QPSK	1	25	24.15	24.25	24.07	24.27	24.35		
10	QPSK	1	49	24.10	23.88	23.69	23.70	23.73		
10	QPSK	25	0	23.12	23.32	23.11	23.21	23.42	24	1
10	QPSK	25	12	23.14	23.22	23.14	23.10	23.35		
10	QPSK	25	25	23.44	23.38	23.09	23.17	23.01		
10	QPSK	50	0	23.35	23.40	23.28	23.13	22.81	24	1
10	16QAM	1	0	23.16	23.30	23.22	23.16	22.73		
10	16QAM	1	25	23.45	23.35	23.33	23.14	23.05		
10	16QAM	1	49	23.45	23.35	23.49	23.32	23.58	23	2
10	16QAM	25	0	22.38	22.33	22.26	22.23	22.31		
10	16QAM	25	12	22.40	22.33	22.11	22.43	21.91		
10	16QAM	25	25	22.40	22.36	22.12	22.24	21.92	23	2
10	16QAM	50	0	22.36	22.19	22.26	22.50	22.05		
10	64QAM	1	0	22.06	22.31	22.11	22.61	22.69		
10	64QAM	1	25	22.00	21.92	21.90	21.95	21.82	23	2
10	64QAM	1	49	22.40	22.40	21.94	22.08	22.17		
10	64QAM	25	0	21.40	21.09	21.27	21.26	21.13		
10	64QAM	25	12	21.33	21.18	21.16	21.15	20.92	22	3
10	64QAM	25	25	21.51	21.41	21.35	21.19	20.91		
10	64QAM	50	0	21.46	21.33	21.27	21.45	21.03		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.92	24.26	24.12	24.20	24.13	25	0
5	QPSK	1	12	24.24	24.22	24.20	24.27	24.21		
5	QPSK	1	24	24.12	23.74	23.67	23.64	23.66		
5	QPSK	12	0	23.19	23.17	23.11	23.09	23.50	24	1
5	QPSK	12	7	23.14	23.19	23.03	23.04	23.39		
5	QPSK	12	13	23.34	23.34	23.21	23.16	23.02		
5	QPSK	25	0	23.33	23.24	23.14	23.17	22.84	24	1
5	16QAM	1	0	23.21	23.18	23.13	23.11	22.75		
5	16QAM	1	12	23.47	23.30	23.32	23.26	23.04		
5	16QAM	1	24	23.54	23.49	23.43	23.37	23.44	23	2
5	16QAM	12	0	22.46	22.24	22.20	22.33	22.37		
5	16QAM	12	7	22.48	22.19	22.16	22.49	21.82		
5	16QAM	12	13	22.44	22.47	22.17	22.19	22.01	23	2
5	16QAM	25	0	22.42	22.35	22.26	22.32	22.01		
5	64QAM	1	0	22.20	22.27	22.30	22.60	22.64		
5	64QAM	1	12	22.02	21.87	21.85	22.02	21.85	23	2
5	64QAM	1	24	22.33	22.36	22.04	22.17	22.10		
5	64QAM	12	0	21.28	21.16	21.20	21.38	21.19		
5	64QAM	12	7	21.37	21.30	21.18	21.33	20.88	22	3
5	64QAM	12	13	21.48	21.36	21.19	21.18	20.76		
5	64QAM	25	0	21.52	21.26	21.15	21.31	21.00		



<LTE Band 41 (Power Class 3)>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.57	23.28	23.36	23.27	23.28	24	0
20	QPSK	1	49	23.43	23.22	23.34	23.46	23.19		
20	QPSK	1	99	23.60	23.32	23.31	23.33	23.11		
20	QPSK	50	0	22.69	22.38	22.53	22.53	22.25	23	1
20	QPSK	50	24	22.66	22.39	22.29	22.53	21.95		
20	QPSK	50	50	22.77	22.46	22.27	22.52	22.44		
20	QPSK	100	0	22.77	22.35	22.45	22.58	22.51	23	1
20	16QAM	1	0	21.65	21.66	21.62	21.98	21.71		
20	16QAM	1	49	21.92	21.70	21.68	21.93	21.38		
20	16QAM	1	99	22.13	21.97	21.60	21.62	21.75	22	2
20	16QAM	50	0	21.09	20.85	20.95	21.02	20.43		
20	16QAM	50	24	21.10	20.81	20.79	20.83	20.84		
20	16QAM	50	50	21.18	20.92	20.81	20.79	20.82	22	2
20	16QAM	100	0	21.20	20.94	20.83	20.97	20.74		
20	64QAM	1	0	21.35	21.36	21.31	21.45	21.43		
20	64QAM	1	49	21.45	21.15	21.05	21.32	21.30	22	2
20	64QAM	1	99	21.39	21.87	21.56	21.46	21.42		
20	64QAM	50	0	20.41	20.49	20.51	20.45	20.17		
20	64QAM	50	24	20.55	20.24	20.34	20.54	20.20	21	3
20	64QAM	50	50	20.63	20.44	20.43	20.68	20.32		
20	64QAM	100	0	20.57	20.49	20.29	20.58	20.39		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.91	22.58	22.64	22.64	22.50	24	0
15	QPSK	1	37	22.76	22.52	22.62	22.83	22.47		
15	QPSK	1	74	23.10	22.54	22.63	22.61	22.32		
15	QPSK	36	0	21.95	21.67	21.86	21.87	21.55	23	1
15	QPSK	36	20	21.94	21.74	21.63	21.75	21.30		
15	QPSK	36	39	22.06	21.79	21.56	21.80	21.84		
15	QPSK	75	0	22.00	21.74	21.74	21.83	21.82	23	1
15	16QAM	1	0	21.89	21.57	21.52	21.95	21.65		
15	16QAM	1	37	21.91	21.67	21.65	21.93	21.18		
15	16QAM	1	74	22.09	21.84	21.50	21.47	21.65	22	2
15	16QAM	36	0	20.91	20.70	20.86	20.82	20.37		
15	16QAM	36	20	20.91	20.75	20.62	20.63	20.67		
15	16QAM	36	39	21.09	20.89	20.78	20.79	20.80	22	2
15	16QAM	75	0	21.14	20.89	20.76	20.97	20.72		
15	64QAM	1	0	21.31	21.52	21.27	21.66	21.32		
15	64QAM	1	37	21.15	21.32	21.18	21.03	21.22	22	2
15	64QAM	1	74	21.17	21.50	21.18	21.72	21.56		
15	64QAM	36	0	20.55	20.43	20.38	20.58	20.50		
15	64QAM	36	20	20.38	20.39	20.39	20.48	20.30	21	3
15	64QAM	36	39	20.58	20.53	20.32	20.35	20.42		
15	64QAM	75	0	20.55	20.41	20.35	20.64	20.49		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.97	22.57	22.67	22.48	22.59	24	0
10	QPSK	1	25	22.74	22.46	22.54	22.74	22.57		
10	QPSK	1	49	22.96	22.63	22.66	22.70	22.36		
10	QPSK	25	0	22.04	21.60	21.91	21.92	21.63	23	1
10	QPSK	25	12	21.91	21.65	21.58	21.87	21.33		
10	QPSK	25	25	22.15	21.76	21.67	21.77	21.84		
10	QPSK	50	0	22.15	21.68	21.74	21.83	21.89	23	1
10	16QAM	1	0	22.04	21.62	21.62	21.81	21.58		
10	16QAM	1	25	21.72	21.59	21.59	21.83	21.21		
10	16QAM	1	49	21.98	21.95	21.58	21.42	21.56	22	2
10	16QAM	25	0	21.03	20.77	20.86	20.91	20.35		
10	16QAM	25	12	20.92	20.77	20.75	20.82	20.73		
10	16QAM	25	25	20.98	20.83	20.70	20.61	20.71	22	2
10	16QAM	50	0	21.19	20.87	20.64	20.81	20.72		
10	64QAM	1	0	21.11	21.41	21.27	21.66	21.15		
10	64QAM	1	25	21.07	21.20	21.05	21.06	21.13	22	2
10	64QAM	1	49	21.16	21.30	21.08	21.68	21.37		
10	64QAM	25	0	20.53	20.33	20.20	20.55	20.44		
10	64QAM	25	12	20.38	20.35	20.21	20.39	20.22	21	3
10	64QAM	25	25	20.56	20.42	20.16	20.31	20.39		
10	64QAM	50	0	20.40	20.38	20.28	20.62	20.43		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	22.85	22.56	22.60	22.56	22.48	24	0
5	QPSK	1	12	22.65	22.53	22.64	22.79	22.56		
5	QPSK	1	24	23.04	22.68	22.69	22.64	22.36		
5	QPSK	12	0	21.89	21.58	21.90	21.85	21.56	23	1
5	QPSK	12	7	22.03	21.62	21.62	21.93	21.24		
5	QPSK	12	13	22.01	21.79	21.48	21.84	21.80		
5	QPSK	25	0	22.01	21.58	21.71	21.84	21.85	23	1
5	16QAM	1	0	22.02	21.60	21.46	21.89	21.51		
5	16QAM	1	12	21.81	21.68	21.67	21.73	21.36		
5	16QAM	1	24	22.10	21.85	21.53	21.60	21.65	22	2
5	16QAM	12	0	21.08	20.68	20.81	20.92	20.36		
5	16QAM	12	7	20.96	20.70	20.76	20.77	20.75		
5	16QAM	12	13	21.07	20.86	20.81	20.62	20.72	22	2
5	16QAM	25	0	21.09	20.80	20.79	20.79	20.62		
5	64QAM	1	0	21.19	21.47	21.27	21.58	21.32		
5	64QAM	1	12	21.15	21.29	21.01	21.04	21.09	22	2
5	64QAM	1	24	21.11	21.40	21.07	21.58	21.42		
5	64QAM	12	0	20.54	20.35	20.28	20.49	20.36		
5	64QAM	12	7	20.38	20.38	20.31	20.28	20.17	21	3
5	64QAM	12	13	20.39	20.52	20.31	20.17	20.28		
5	64QAM	25	0	20.53	20.23	20.35	20.58	20.37		



<Near-Body and Hotspot Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.07	19.98	20.09	20.5	0
20	QPSK	1	49	19.99	19.97	19.99		
20	QPSK	1	99	20.09	20.11	20.23		
20	QPSK	50	0	19.98	19.84	19.94	20.5	0
20	QPSK	50	24	20.00	19.79	20.03		
20	QPSK	50	50	20.00	19.85	20.04		
20	QPSK	100	0	19.94	19.90	20.00	20.5	0
20	16QAM	1	0	20.01	19.90	19.98		
20	16QAM	1	49	20.20	19.81	20.00		
20	16QAM	1	99	20.28	20.00	20.08	20.5	0
20	16QAM	50	0	18.98	18.87	18.97		
20	16QAM	50	24	19.00	18.85	18.91		
20	16QAM	50	50	19.00	18.89	19.12	20.5	0
20	16QAM	100	0	19.02	18.96	19.10		
20	64QAM	1	0	18.79	18.64	18.59		
20	64QAM	1	49	18.74	18.71	18.69	19.5	1
20	64QAM	1	99	18.90	18.71	18.91		
20	64QAM	50	0	18.01	17.76	17.89		
20	64QAM	50	24	18.02	17.82	17.99	19.5	1
20	64QAM	50	50	18.02	17.89	18.03		
20	64QAM	100	0	17.97	17.93	18.00		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.11	20.05	20.18	20.5	0
15	QPSK	1	37	20.09	20.07	20.09		
15	QPSK	1	74	20.04	20.18	20.32		
15	QPSK	36	0	19.92	19.91	20.01	20.5	0
15	QPSK	36	20	19.92	19.74	19.99		
15	QPSK	36	39	19.97	19.71	19.98		
15	QPSK	75	0	19.96	19.91	19.92	20.5	0
15	16QAM	1	0	19.92	19.96	19.99		
15	16QAM	1	37	20.14	19.82	20.05		
15	16QAM	1	74	20.29	20.10	20.12	20.5	0
15	16QAM	36	0	19.07	18.80	18.98		
15	16QAM	36	20	18.93	18.89	18.99		
15	16QAM	36	39	18.98	18.79	19.11	20.5	0
15	16QAM	75	0	18.99	18.93	19.17		
15	64QAM	1	0	18.69	18.68	18.58		
15	64QAM	1	37	18.73	18.65	18.63	19.5	1
15	64QAM	1	74	18.89	18.80	19.01		
15	64QAM	36	0	18.00	17.77	17.94		
15	64QAM	36	20	18.06	17.89	17.91	19.5	1
15	64QAM	36	39	17.92	17.93	18.13		
15	64QAM	75	0	17.97	17.88	18.10		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	19.99	20.00	20.15	20.5	0
10	QPSK	1	25	20.09	20.04	20.00		
10	QPSK	1	49	20.01	20.02	20.19		
10	QPSK	25	0	19.90	19.82	19.90	20.5	0
10	QPSK	25	12	20.08	19.86	20.05		
10	QPSK	25	25	20.03	19.72	20.03		
10	QPSK	50	0	19.93	19.83	20.04	20.5	0
10	16QAM	1	0	20.00	19.81	19.90		
10	16QAM	1	25	20.18	19.76	19.93		
10	16QAM	1	49	20.19	19.97	20.16	20.5	0
10	16QAM	25	0	19.04	18.88	18.90		
10	16QAM	25	12	19.03	18.75	18.89		
10	16QAM	25	25	19.09	18.93	19.22	20.5	0
10	16QAM	50	0	18.99	18.90	19.14		
10	64QAM	1	0	18.83	18.55	18.59		
10	64QAM	1	25	18.77	18.67	18.62	19.5	1
10	64QAM	1	49	18.99	18.61	18.99		
10	64QAM	25	0	17.92	17.73	17.80		
10	64QAM	25	12	17.94	17.85	18.09	19.5	1
10	64QAM	25	25	18.07	17.86	18.04		
10	64QAM	50	0	17.95	17.92	17.97		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.09	19.95	20.07	20.5	0
5	QPSK	1	12	20.04	19.88	19.93		
5	QPSK	1	24	20.03	20.15	20.13		
5	QPSK	12	0	19.99	19.93	20.04	20.5	0
5	QPSK	12	7	20.09	19.84	20.06		
5	QPSK	12	13	19.97	19.77	20.12		
5	QPSK	25	0	19.95	19.89	20.10	20.5	0
5	16QAM	1	0	19.95	19.88	20.02		
5	16QAM	1	12	20.12	19.74	20.02		
5	16QAM	1	24	20.30	19.92	20.18	20.5	0
5	16QAM	12	0	19.01	18.84	18.90		
5	16QAM	12	7	19.08	18.95	18.95		
5	16QAM	12	13	19.09	18.99	19.03	20.5	0
5	16QAM	25	0	19.03	18.97	19.03		
5	64QAM	1	0	18.82	18.68	18.64		
5	64QAM	1	12	18.77	18.65	18.72	19.5	1
5	64QAM	1	24	18.98	18.63	18.92		
5	64QAM	12	0	17.92	17.75	17.81		
5	64QAM	12	7	18.01	17.86	18.07	19.5	1
5	64QAM	12	13	17.95	17.83	17.93		
5	64QAM	25	0	18.07	17.92	18.05		



<LTE Band 41 (Power Class 2)>

BW [MHz]	Modulation	RB Size	RB Offset	for IC Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	20.01	19.99	19.94	20.42	19.92	21.5	0
20	QPSK	1	49	20.18	20.09	20.13	20.44	20.00		
20	QPSK	1	99	20.47	20.42	20.23	20.47	20.11		
20	QPSK	50	0	20.50	20.39	20.28	20.36	20.34	21.5	0
20	QPSK	50	24	20.37	20.35	20.24	20.12	20.28		
20	QPSK	50	50	20.55	20.47	20.27	20.43	20.28		
20	QPSK	100	0	20.44	20.41	20.24	20.40	20.28	21.5	0
20	16QAM	1	0	20.68	20.24	20.14	19.94	19.77		
20	16QAM	1	49	20.39	20.53	20.16	20.32	19.74		
20	16QAM	1	99	20.80	20.80	20.36	20.52	19.80	21.5	0
20	16QAM	50	0	19.78	19.72	19.69	19.84	19.62		
20	16QAM	50	24	19.78	19.61	19.56	19.68	19.60		
20	16QAM	50	50	19.88	19.82	19.56	19.74	19.71	21.5	0
20	16QAM	100	0	19.83	19.78	19.56	19.64	19.50		
20	64QAM	1	0	19.21	19.30	19.11	19.59	19.53		
20	64QAM	1	49	19.41	19.28	19.41	19.61	19.51	20.5	1
20	64QAM	1	99	19.88	19.63	19.57	19.80	18.93		
20	64QAM	50	0	18.74	18.65	18.64	18.77	18.58		
20	64QAM	50	24	18.78	18.66	18.52	18.68	18.55	20.5	1
20	64QAM	50	50	18.86	18.85	18.58	18.74	18.68		
20	64QAM	100	0	18.80	18.75	18.59	18.77	18.55		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	19.98	19.92	19.93	20.51	19.96	21.5	0
15	QPSK	1	37	20.10	20.00	20.19	20.40	19.91		
15	QPSK	1	74	20.42	20.45	20.15	20.38	20.02		
15	QPSK	36	0	20.54	20.35	20.32	20.44	20.44	21.5	0
15	QPSK	36	20	20.37	20.36	20.23	20.15	20.36		
15	QPSK	36	39	20.64	20.52	20.18	20.47	20.31		
15	QPSK	75	0	20.54	20.33	20.25	20.33	20.32	21.5	0
15	16QAM	1	0	20.62	20.33	20.20	19.88	19.82		
15	16QAM	1	37	20.37	20.48	20.06	20.40	19.68		
15	16QAM	1	74	20.81	20.85	20.40	20.44	19.73	21.5	0
15	16QAM	36	0	19.85	19.70	19.65	19.93	19.64		
15	16QAM	36	20	19.75	19.69	19.64	19.69	19.68		
15	16QAM	36	39	19.96	19.88	19.66	19.80	19.61	21.5	0
15	16QAM	75	0	19.92	19.76	19.47	19.62	19.47		
15	64QAM	1	0	19.28	19.27	19.14	19.64	19.60		
15	64QAM	1	37	19.32	19.20	19.50	19.57	19.50	20.5	1
15	64QAM	1	74	19.93	19.55	19.62	19.79	18.97		
15	64QAM	36	0	18.71	18.64	18.72	18.83	18.50		
15	64QAM	36	20	18.84	18.68	18.46	18.73	18.59	20.5	1
15	64QAM	36	39	18.77	18.76	18.66	18.69	18.66		
15	64QAM	75	0	18.73	18.84	18.68	18.82	18.62		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	20.02	19.99	19.91	20.32	20.06	21.5	0
10	QPSK	1	25	20.25	20.05	20.13	20.50	19.96		
10	QPSK	1	49	20.48	20.45	20.33	20.38	20.11		
10	QPSK	25	0	20.51	20.48	20.38	20.29	20.39	21.5	0
10	QPSK	25	12	20.33	20.44	20.32	20.13	20.22		
10	QPSK	25	25	20.64	20.39	20.34	20.39	20.20		
10	QPSK	50	0	20.37	20.50	20.15	20.38	20.37	21.5	0
10	16QAM	1	0	20.71	20.34	20.22	19.97	19.76		
10	16QAM	1	25	20.42	20.51	20.10	20.22	19.78		
10	16QAM	1	49	20.72	20.82	20.38	20.62	19.81	21.5	0
10	16QAM	25	0	19.88	19.75	19.72	19.84	19.70		
10	16QAM	25	12	19.70	19.55	19.46	19.67	19.70		
10	16QAM	25	25	19.79	19.82	19.52	19.77	19.72	21.5	0
10	16QAM	50	0	19.75	19.75	19.50	19.66	19.49		
10	64QAM	1	0	19.11	19.33	19.17	19.68	19.59		
10	64QAM	1	25	19.45	19.37	19.45	19.55	19.55	20.5	1
10	64QAM	1	49	19.96	19.72	19.54	19.79	19.02		
10	64QAM	25	0	18.68	18.58	18.67	18.82	18.53		
10	64QAM	25	12	18.74	18.63	18.54	18.68	18.53	20.5	1
10	64QAM	25	25	18.94	18.85	18.62	18.78	18.73		
10	64QAM	50	0	18.70	18.79	18.54	18.83	18.51		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.3	2687.5		
5	QPSK	1	0	20.02	19.90	20.03	20.37	20.04	21.5	0
5	QPSK	1	12	20.08	20.06	20.13	20.34	19.93		
5	QPSK	1	24	20.50	20.47	20.21	20.42	20.07		
5	QPSK	12	0	20.40	20.45	20.25	20.37	20.35	21.5	0
5	QPSK	12	7	20.37	20.33	20.25	20.20	20.36		
5	QPSK	12	13	20.46	20.45	20.26	20.42	20.18		
5	QPSK	25	0	20.51	20.39	20.23	20.33	20.20	21.5	0
5	16QAM	1	0	20.62	20.26	20.21	19.92	19.84		
5	16QAM	1	12	20.46	20.43	20.23	20.24	19.76		
5	16QAM	1	24	20.79	20.74	20.32	20.55	19.74	21.5	0
5	16QAM	12	0	19.82	19.79	19.79	19.90	19.66		
5	16QAM	12	7	19.83	19.56	19.54	19.66	19.65		
5	16QAM	12	13	19.85	19.90	19.48	19.72	19.72	21.5	0
5	16QAM	25	0	19.85	19.82	19.60	19.60	19.48		
5	64QAM	1	0	19.27	19.27	19.06	19.59	19.52		
5	64QAM	1	12	19.39	19.24	19.48	19.53	19.46	20.5	1
5	64QAM	1	24	19.92	19.67	19.62	19.86	18.88		
5	64QAM	12	0	18.70	18.68	18.56	18.76	18.49		
5	64QAM	12	7	18.78	18.58	18.45	18.77	18.45	20.5	1
5	64QAM	12	13	18.80	18.82	18.48	18.75	18.59		
5	64QAM	25	0	18.76	18.67	18.60	18.71	18.62		



<LTE Band 41 (Power Class 3)>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	16.82	16.73	16.73	16.90	16.85	17	0
20	QPSK	1	49	16.26	16.11	16.00	16.18	16.09		
20	QPSK	1	99	16.45	16.49	16.19	16.40	16.21		
20	QPSK	50	0	16.36	16.28	16.12	16.39	16.27	17	0
20	QPSK	50	24	16.36	16.29	16.12	16.32	16.13		
20	QPSK	50	50	16.53	16.40	16.23	16.40	16.28		
20	QPSK	100	0	16.45	16.28	16.18	16.41	16.21	17	0
20	16QAM	1	0	15.57	15.56	15.74	15.68	15.61		
20	16QAM	1	49	15.68	15.79	15.51	15.72	15.56		
20	16QAM	1	99	16.12	16.28	15.59	15.67	15.55	17	0
20	16QAM	50	0	15.81	15.68	15.63	15.83	15.65		
20	16QAM	50	24	15.82	15.65	15.54	15.70	15.58		
20	16QAM	50	50	15.91	15.79	15.55	15.79	15.65	17	0
20	16QAM	100	0	15.89	15.73	15.57	15.83	15.64		
20	64QAM	1	0	15.41	15.44	15.12	15.41	15.52		
20	64QAM	1	49	15.46	15.31	15.17	15.38	15.39	16	1
20	64QAM	1	99	15.65	15.64	15.31	15.56	15.50		
20	64QAM	50	0	15.75	15.74	15.64	15.81	15.69		
20	64QAM	50	24	15.83	15.68	15.53	15.64	15.58	16	1
20	64QAM	50	50	15.89	15.87	15.58	15.77	15.70		
20	64QAM	100	0	15.89	15.75	15.61	15.78	15.54		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	16.27	16.13	16.17	16.17	16.02	17	0
15	QPSK	1	37	15.60	15.49	15.31	15.66	15.52		
15	QPSK	1	74	15.87	15.89	15.68	15.85	15.69		
15	QPSK	36	0	15.75	15.75	15.61	15.86	15.71	17	0
15	QPSK	36	20	15.66	15.68	15.58	15.74	15.44		
15	QPSK	36	39	15.83	15.84	15.49	15.74	15.62		
15	QPSK	75	0	15.84	15.61	15.53	15.79	15.58	17	0
15	16QAM	1	0	15.49	15.60	15.80	15.73	15.53		
15	16QAM	1	37	15.73	15.84	15.58	15.73	15.47		
15	16QAM	1	74	16.22	16.27	15.55	15.60	15.65	17	0
15	16QAM	36	0	15.81	15.73	15.57	15.88	15.66		
15	16QAM	36	20	15.83	15.59	15.50	15.80	15.49		
15	16QAM	36	39	15.92	15.81	15.58	15.69	15.71	17	0
15	16QAM	75	0	15.85	15.82	15.60	15.77	15.72		
15	64QAM	1	0	15.49	15.42	15.09	15.46	15.56		
15	64QAM	1	37	15.49	15.35	15.10	15.48	15.35	16	1
15	64QAM	1	74	15.60	15.72	15.26	15.47	15.40		
15	64QAM	36	0	15.85	15.65	15.55	15.85	15.73		
15	64QAM	36	20	15.93	15.59	15.57	15.71	15.51	16	1
15	64QAM	36	39	15.95	15.95	15.51	15.71	15.62		
15	64QAM	75	0	15.80	15.83	15.59	15.82	15.44		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	16.23	16.11	16.06	16.28	16.03	17	0
10	QPSK	1	25	15.68	15.55	15.39	15.54	15.39		
10	QPSK	1	49	15.77	15.94	15.66	15.87	15.65		
10	QPSK	25	0	15.67	15.72	15.59	15.88	15.59	17	0
10	QPSK	25	12	15.82	15.59	15.50	15.70	15.58		
10	QPSK	25	25	16.01	15.71	15.54	15.78	15.52		
10	QPSK	50	0	15.87	15.60	15.64	15.82	15.66	17	0
10	16QAM	1	0	15.52	15.62	15.78	15.60	15.51		
10	16QAM	1	25	15.64	15.86	15.50	15.78	15.47		
10	16QAM	1	49	16.05	16.23	15.67	15.64	15.55	17	0
10	16QAM	25	0	15.80	15.60	15.58	15.91	15.58		
10	16QAM	25	12	15.91	15.75	15.52	15.76	15.56		
10	16QAM	25	25	16.00	15.70	15.56	15.85	15.57	17	0
10	16QAM	50	0	15.84	15.71	15.51	15.79	15.70		
10	64QAM	1	0	15.51	15.44	15.21	15.51	15.48		
10	64QAM	1	25	15.37	15.24	15.25	15.46	15.40	16	1
10	64QAM	1	49	15.60	15.68	15.24	15.59	15.57		
10	64QAM	25	0	15.74	15.83	15.72	15.79	15.74		
10	64QAM	25	12	15.77	15.59	15.49	15.64	15.67	16	1
10	64QAM	25	25	15.93	15.78	15.53	15.72	15.65		
10	64QAM	50	0	15.99	15.84	15.68	15.77	15.48		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	16.15	16.09	16.06	16.26	16.14	17	0
5	QPSK	1	12	15.64	15.55	15.34	15.48	15.49		
5	QPSK	1	24	15.79	15.89	15.55	15.81	15.66		
5	QPSK	12	0	15.85	15.72	15.63	15.84	15.65	17	0
5	QPSK	12	7	15.69	15.59	15.49	15.65	15.60		
5	QPSK	12	13	15.95	15.81	15.43	15.67	15.53		
5	QPSK	25	0	15.87	15.61	15.57	15.89	15.70	17	0
5	16QAM	1	0	15.63	15.56	15.81	15.78	15.56		
5	16QAM	1	12	15.69	15.88	15.52	15.65	15.59		
5	16QAM	1	24	16.06	16.11	15.52	15.76	15.52	17	0
5	16QAM	12	0	15.90	15.61	15.61	15.91	15.63		
5	16QAM	12	7	15.79	15.68	15.50	15.76	15.62		
5	16QAM	12	13	16.00	15.80	15.63	15.79	15.67	17	0
5	16QAM	25	0	15.79	15.83	15.58	15.91	15.70		
5	64QAM	1	0	15.35	15.48	15.22	15.38	15.43		
5	64QAM	1	12	15.55	15.22	15.10	15.48	15.30	16	1
5	64QAM	1	24	15.72	15.62	15.40	15.48	15.57		
5	64QAM	12	0	15.74	15.74	15.70	15.84	15.60		
5	64QAM	12	7	15.79	15.63	15.52	15.62	15.60	16	1
5	64QAM	12	13	15.90	15.97	15.60	15.71	15.68		
5	64QAM	25	0	15.90	15.70	15.51	15.74	15.52		



<LTE Carrier Aggregation combinations>

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

<Inter-Band combinations>

Inter-Band
2 bands / 2 CC
CA_2A-4A
CA_2A-5A
CA_2A-12A
CA_2A-66A
CA_2A-71A
CA_4A-2A
CA_4A-5A
CA_4A-12A
CA_4A-71A
CA_5A-2A
CA_5A-4A
CA_12A-2A
CA_12A-4A
CA_12A-66A
CA_25A-26A
CA_26A-25A
CA_66A-2A
CA_66A-12A
CA_66A-71A
CA_71A-2A
CA_71A-4A
CA_71A-66A

<Intra-Band combinations>

Intra-Band Contiguous	Intra-Band Non- Contiguous
CA_2C	CA_2A-2A
Intra-Band Contiguous	Intra-Band Non- Contiguous
	CA_4A-4A
Intra-Band Contiguous	Intra-Band Non- Contiguous
	CA_25A-25A
Intra-Band Contiguous	Intra-Band Non- Contiguous
CA_41C	CA_41A-41A
Intra-Band Contiguous	Intra-Band Non- Contiguous
CA_66B	CA_66A-66A
CA_66C	



<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. The device supports uplink carrier aggregation for LTE B41C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the above 3GPP requirement.
- vii. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- viii. Uplink CA is only operating with power class 3 for LTE B41, and additional SAR measurement for TLE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA _41C active.
- ix. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.
- x. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Downlink Carrier Aggregation power verification>

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1880	18900	QPSK	1	49	4	20	2132.5	2175	23.45	23.46
		4	20	1732.5	20175	QPSK	1	99	2	20	1960	900	23.38	23.40
		2	20	1880	18900	QPSK	1	49	5	10	881.5	2525	23.45	23.46
		5	10	836.5	20525	QPSK	1	49	2	20	1960	900	23.38	23.39
		2	20	1880	18900	QPSK	1	49	12	10	737.5	5095	23.45	23.46
		12	10	711	23130	QPSK	1	49	2	20	1960	900	23.21	23.26
		2	20	1880	18900	QPSK	1	49	66	20	2155	66886	23.45	23.46
		66	20	1770	132572	QPSK	1	99	2	20	1960	900	23.62	23.63
		2	20	1880	18900	QPSK	1	49	71	20	680.5	133297	23.45	23.46
		71	20	688	133372	QPSK	1	49	2	20	1960	900	23.21	23.24
		4	20	1732.5	20175	QPSK	1	99	5	10	881.5	2525	23.38	23.40
		5	10	836.5	20525	QPSK	1	49	4	20	2132.5	2175	23.38	23.39
		4	20	1732.5	20175	QPSK	1	99	12	10	737.5	5095	23.38	23.40
		12	10	711	23130	QPSK	1	49	4	20	2132.5	2175	23.21	23.26
		4	20	1732.5	20175	QPSK	1	99	71	20	680.5	133297	23.38	23.40
		71	20	688	133372	QPSK	1	49	4	20	2132.5	2175	23.21	23.24
		12	10	711	23130	QPSK	1	49	66	20	2155	66886	23.21	23.26
		66	20	1770	132572	QPSK	1	99	12	10	737.5	5095	23.62	23.63
		25	20	1860	26140	QPSK	1	49	26	15	876.5	8865	23.47	23.51
		26	15	821.5	26765	QPSK	1	37	25	20	1960	8340	23.40	23.43
	66	20	1770	132572	QPSK	1	99	71	20	680.5	133297	23.62	23.63	
	71	20	688	133372	QPSK	1	49	66	20	2155	66886	23.20	23.24	
Intra-Band	Non-Contiguous	2	20	1880	18900	QPSK	1	49	2	5	1987.5	1175	23.45	23.46
		4	20	1732.5	20175	QPSK	1	99	4	5	2152.5	2375	23.38	23.40
		25	20	1860	26140	QPSK	1	49	25	5	1992.5	8665	23.47	23.51
		41	20	2506	39750	QPSK	1	99	41	5	2545.8	40148	23.54	23.60
	66	20	1770	132572	QPSK	1	99	66	5	2112.5	66461	23.62	23.63	
	Contiguous	2	20	1880	18900	QPSK	1	49	2	20	1979.80	1098	23.45	23.46
		41	20	2506	39750	QPSK	1	99	41	20	2524.8	39948	23.54	23.60
66		20	1770	132572	QPSK	1	99	66	5	2154.30	66879	23.62	23.63	
	66	20	1770	132572	QPSK	1	99	66	20	2150.20	66838	23.62	23.63	



<Uplink carrier aggregation power measurement>

CA_41C when operating in default power mode										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	22.14	24
40185	39987	QPSK	1	0	1	99	2	0	22.24	24
40620	40422	QPSK	1	0	1	99	2	0	22.09	24
41055	40857	QPSK	1	0	1	99	2	0	22.01	24
41490	41292	QPSK	1	0	1	99	2	0	22.11	24

CA_41C when operating in near-body and hotspot power mode										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	16.74	17
40185	39987	QPSK	1	0	1	99	2	0	16.82	17
40620	40422	QPSK	1	0	1	99	2	0	16.81	17
41055	40857	QPSK	1	0	1	99	2	0	16.65	17
41490	41292	QPSK	1	0	1	99	2	0	16.78	17

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Default Power Mode>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.49	18.50	97.62
		6	2437	18.46	18.50	
		11	2462	18.28	18.50	
	802.11g 6Mbps	1	2412	10.62	11.00	87.26
		6	2437	10.98	11.00	
		11	2462	10.97	11.00	
	802.11n-HT20 MCS0	1	2412	8.91	9.00	85.91
		6	2437	8.67	9.00	
		11	2462	8.52	9.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	15.90	16.00	86.26
		40	5200	15.66	16.00	
		44	5220	15.87	16.00	
		48	5240	15.97	16.00	
	802.11n-HT20 MCS0	36	5180	10.98	11.00	86.18
		40	5200	10.95	11.00	
		44	5220	10.95	11.00	
		48	5240	10.78	11.00	
	802.11n-HT40 MCS0	38	5190	9.57	10.00	88.80
		46	5230	9.83	10.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.81	16.00	86.26
		56	5280	15.69	16.00	
		60	5300	15.92	16.00	
		64	5320	15.97	16.00	
	802.11n-HT20 MCS0	52	5260	10.83	11.00	86.18
		56	5280	10.81	11.00	
		60	5300	10.95	11.00	
		64	5320	10.97	11.00	
	802.11n-HT40 MCS0	54	5270	9.76	10.00	88.80
		62	5310	9.91	10.00	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	15.82	16.00	86.26
		116	5580	15.82	16.00	
		124	5620	15.78	16.00	
		132	5660	15.79	16.00	
		140	5700	14.76	16.00	
		144	5720	15.89	16.00	
	802.11n-HT20 MCS0	100	5500	10.96	11.00	86.18
		116	5580	10.82	11.00	
		124	5620	10.89	11.00	
		132	5660	10.88	11.00	
		140	5700	10.95	11.00	
		144	5720	10.68	11.00	
	802.11n-HT40 MCS0	102	5510	9.93	10.00	88.80
		110	5550	9.90	10.00	
126		5630	9.88	10.00		
134		5670	9.78	10.00		
142		5710	9.82	10.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	15.97	16.00	86.26
		157	5785	15.92	16.00	
		165	5825	15.86	16.00	
	802.11n-HT20 MCS0	149	5745	10.97	11.00	86.18
		157	5785	10.81	11.00	
		165	5825	10.94	11.00	
	802.11n-HT40 MCS0	151	5755	9.90	10.00	88.80
		159	5795	9.83	10.00	



<At-Head Power Mode>

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.73	14.00	86.26
		40	5200	13.61	14.00	
		44	5220	13.74	14.00	
		48	5240	13.91	14.00	
	802.11n-HT20 MCS0	36	5180	10.98	11.00	86.18
		40	5200	10.95	11.00	
		44	5220	10.95	11.00	
		48	5240	10.78	11.00	
	802.11n-HT40 MCS0	38	5190	9.57	10.00	88.80
		46	5230	9.83	10.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	13.98	14.00	86.26
		56	5280	13.55	14.00	
		60	5300	13.66	14.00	
		64	5320	13.94	14.00	
	802.11n-HT20 MCS0	52	5260	10.83	11.00	86.18
		56	5280	10.81	11.00	
		60	5300	10.95	11.00	
		64	5320	10.97	11.00	
	802.11n-HT40 MCS0	54	5270	9.76	10.00	88.80
		62	5310	9.91	10.00	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	13.85	14.00	86.26
		116	5580	13.95	14.00	
		124	5620	13.64	14.00	
		132	5660	13.73	14.00	
		140	5700	13.88	14.00	
		144	5720	13.96	14.00	
	802.11n-HT20 MCS0	100	5500	10.96	11.00	86.18
		116	5580	10.82	11.00	
		124	5620	10.89	11.00	
		132	5660	10.88	11.00	
		140	5700	10.95	11.00	
		144	5720	10.68	11.00	
	802.11n-HT40 MCS0	102	5510	9.93	10.00	88.80
		110	5550	9.90	10.00	
126		5630	9.88	10.00		
134		5670	9.78	10.00		
142		5710	9.82	10.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	13.90	14.00	86.26
		157	5785	13.91	14.00	
		165	5825	13.76	14.00	
	802.11n-HT20 MCS0	149	5745	10.97	11.00	86.18
		157	5785	10.81	11.00	
		165	5825	10.94	11.00	
	802.11n-HT40 MCS0	151	5755	9.90	10.00	88.80
		159	5795	9.83	10.00	



<Hotspot Power Mode>

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	14.44	14.50	86.26
		157	5785	14.42	14.50	
		165	5825	14.11	14.50	
	802.11n-HT20 MCS0	149	5745	10.97	11.00	86.18
		157	5785	10.81	11.00	
		165	5825	10.94	11.00	
	802.11n-HT40 MCS0	151	5755	9.90	10.00	88.80
		159	5795	9.83	10.00	

<Near to body Power Mode>

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.95	15.00	86.26
		40	5200	14.54	15.00	
		44	5220	14.97	15.00	
		48	5240	14.80	15.00	
	802.11n-HT20 MCS0	36	5180	10.98	11.00	86.18
		40	5200	10.95	11.00	
		44	5220	10.95	11.00	
		48	5240	10.78	11.00	
	802.11n-HT40 MCS0	38	5190	9.57	10.00	88.80
		46	5230	9.83	10.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.84	15.00	86.26
		56	5280	14.51	15.00	
		60	5300	14.92	15.00	
		64	5320	14.77	15.00	
	802.11n-HT20 MCS0	52	5260	10.83	11.00	86.18
		56	5280	10.81	11.00	
		60	5300	10.95	11.00	
		64	5320	10.97	11.00	
	802.11n-HT40 MCS0	54	5270	9.76	10.00	88.80
		62	5310	9.91	10.00	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	14.75	15.00	86.26
		116	5580	14.88	15.00	
		124	5620	14.51	15.00	
		132	5660	14.73	15.00	
		140	5700	14.70	15.00	
		144	5720	14.97	15.00	
	802.11n-HT20 MCS0	100	5500	10.96	11.00	86.18
		116	5580	10.82	11.00	
		124	5620	10.89	11.00	
132		5660	10.88	11.00		
140		5700	10.95	11.00		
144		5720	10.68	11.00		
802.11n-HT40 MCS0	102	5510	9.93	10.00	88.80	
	110	5550	9.90	10.00		
	126	5630	9.88	10.00		
	134	5670	9.78	10.00		
	142	5710	9.82	10.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	14.93	15.00	86.26
		157	5785	14.90	15.00	
		165	5825	14.95	15.00	
	802.11n-HT20 MCS0	149	5745	10.97	11.00	86.18
		157	5785	10.81	11.00	
		165	5825	10.94	11.00	
	802.11n-HT40 MCS0	151	5755	9.90	10.00	88.80
		159	5795	9.83	10.00	

<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	11.82	9.95	9.96
	CH 39	2441	11.36	9.52	9.53
	CH 78	2480	11.01	9.12	9.14
Tune-up Limit			12.00	10.00	10.00


Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	2.89
	CH 19	2440	2.11
	CH 39	2480	1.85
Tune-up Limit			3.00

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.

13. Antenna Location

<Mobile Phone>

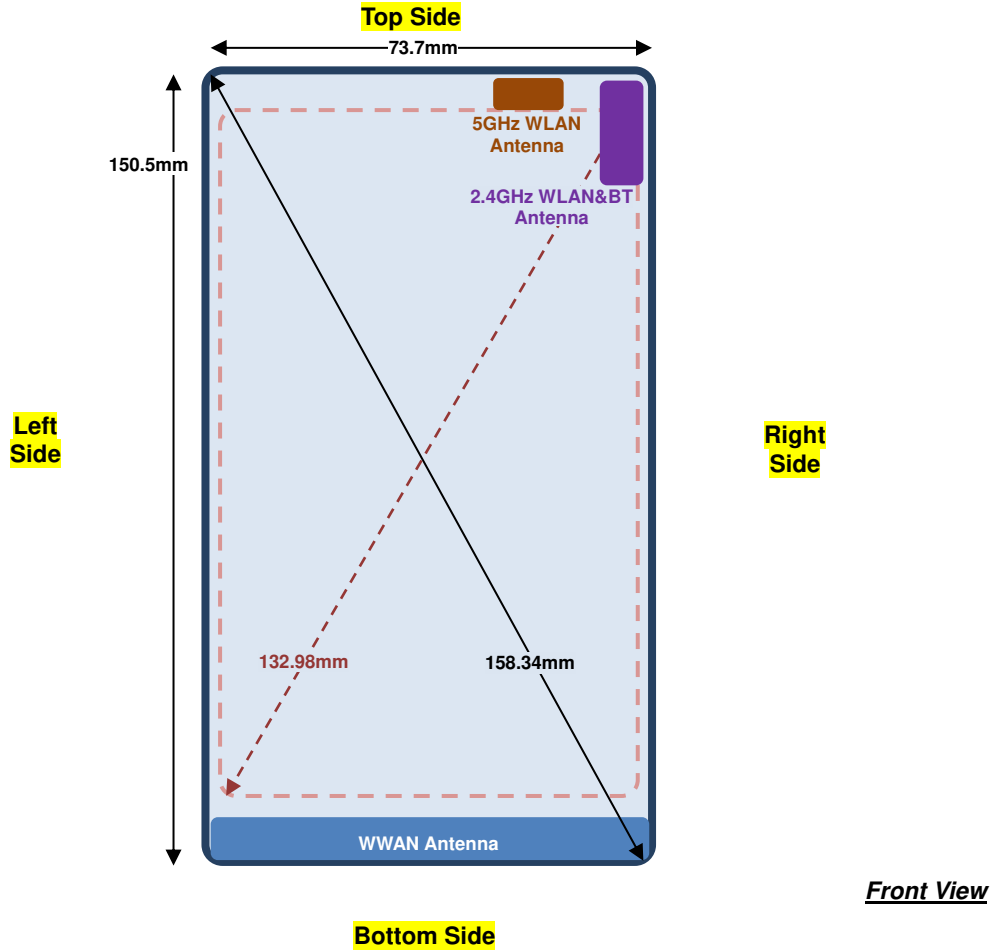

Front View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



14. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
- While operating in "Front" and "Back" configuration by end user, the device will limit different maximum output powers on the GSM1900, WCDMA B2 / B4 / B5, CDMA BC1 and LTE B2 / B4 / B5 / B7 / B25 / B38 / B41 / B66 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
- While operating in body-adjacent exposure configuration during a mobile hotspot session, the device will reduced output powers on the GSM1900, WCDMA B2 / B4 / B5, CDMA BC1 and LTE B2 / B4 / B5 / B7 / B25 / B38 / B41 / B66 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
- The device utilizes independent power reduction mechanisms for SAR compliance for the WLAN transmitter for held-to-ear and near to body exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description.

GSM Note:

- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
- Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

UMTS Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**CDMA Note:**

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
8. For LTE Band 41, SAR was measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with highest SAR when carrier aggregation was not active.
9. For the LTE Band 41 uplink CA SAR testing was selected the highest power configuration (RB configuration) of the largest aggregation bandwidth, in LTE UL CA.
10. The device supports Power Class 2 uplink-downlink configurations 0 and 6, and Power Class 3 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
11. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition. Please see Section 14.5 for linearity results.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	251	848.8	26.34	27.50	1.306	-0.11	0.365	0.477
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	251	848.8	26.34	27.50	1.306	0	0.153	0.200
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	251	848.8	26.34	27.50	1.306	0.01	0.366	0.478
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	251	848.8	26.34	27.50	1.306	0.15	0.169	0.221
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	24.27	25.00	1.183	-0.03	0.175	0.207
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	24.27	25.00	1.183	0.01	0.126	0.149
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	24.27	25.00	1.183	0.11	0.220	0.260
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	24.27	25.00	1.183	0.05	0.142	0.168

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	23.22	24.00	1.197	0.01	0.272	0.326
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	23.22	24.00	1.197	0	0.218	0.261
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	23.22	24.00	1.197	-0.13	0.413	0.494
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	23.22	24.00	1.197	-0.06	0.234	0.280
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	23.10	24.00	1.230	0.06	0.274	0.337
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1513	1752.6	23.10	24.00	1.230	0.06	0.273	0.336
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1513	1752.6	23.10	24.00	1.230	-0.12	0.392	0.482
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1513	1752.6	23.10	24.00	1.230	-0.15	0.196	0.241
05	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	22.60	24.00	1.380	-0.08	0.569	0.785
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	22.60	24.00	1.380	-0.1	0.273	0.377
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	22.60	24.00	1.380	0.08	0.250	0.345
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	22.60	24.00	1.380	0.18	0.039	0.054

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	CDMA BC0	1xRTT RC3 SO55	Right Cheek	0mm	777	848.31	24.00	24.50	1.122	0.05	0.531	0.596
	CDMA BC0	1xRTT RC3 SO55	Right Tilted	0mm	777	848.31	24.00	24.50	1.122	-0.1	0.232	0.260
	CDMA BC0	1xRTT RC3 SO55	Left Cheek	0mm	777	848.31	24.00	24.50	1.122	-0.03	0.519	0.582
	CDMA BC0	1xRTT RC3 SO55	Left Tilted	0mm	777	848.31	24.00	24.50	1.122	-0.04	0.273	0.306
	CDMA BC1	1xRTT RC3 SO55	Right Cheek	0mm	600	1880	24.32	24.50	1.042	-0.04	0.361	0.376
	CDMA BC1	1xRTT RC3 SO55	Right Tilted	0mm	600	1880	24.32	24.50	1.042	-0.19	0.145	0.151
07	CDMA BC1	1xRTT RC3 SO55	Left Cheek	0mm	600	1880	24.32	24.50	1.042	-0.1	0.370	0.386
	CDMA BC1	1xRTT RC3 SO55	Left Tilted	0mm	600	1880	24.32	24.50	1.042	-0.05	0.240	0.250
08	CDMA BC10	1xRTT RC3 SO55	Right Cheek	0mm	684	823.1	24.06	24.50	1.107	-0.07	0.525	0.581
	CDMA BC10	1xRTT RC3 SO55	Right Tilted	0mm	684	823.1	24.06	24.50	1.107	-0.09	0.227	0.251
	CDMA BC10	1xRTT RC3 SO55	Left Cheek	0mm	684	823.1	24.06	24.50	1.107	0.02	0.504	0.558
	CDMA BC10	1xRTT RC3 SO55	Left Tilted	0mm	684	823.1	24.06	24.50	1.107	-0.03	0.311	0.344



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 2	20M	QPSK	1	49	Right Cheek	0mm	18900	1880	23.46	24.00	1.132	-0.12	0.342	0.387
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	18900	1880	22.51	23.00	1.119	0.05	0.189	0.212
	LTE Band 2	20M	QPSK	1	49	Right Tilted	0mm	18900	1880	23.46	24.00	1.132	-0.12	0.184	0.208
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	18900	1880	22.51	23.00	1.119	0.15	0.109	0.122
	LTE Band 2	20M	QPSK	1	49	Left Cheek	0mm	18900	1880	23.46	24.00	1.132	-0.18	0.334	0.378
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	18900	1880	22.51	23.00	1.119	0.02	0.192	0.215
	LTE Band 2	20M	QPSK	1	49	Left Tilted	0mm	18900	1880	23.46	24.00	1.132	-0.17	0.205	0.232
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	18900	1880	22.51	23.00	1.119	0.14	0.123	0.138
	LTE Band 4	20M	QPSK	1	99	Right Cheek	0mm	20175	1732.5	23.41	24.00	1.146	-0.13	0.195	0.223
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	22.07	23.00	1.239	-0.01	0.112	0.139
	LTE Band 4	20M	QPSK	1	99	Right Tilted	0mm	20175	1732.5	23.41	24.00	1.146	0.04	0.187	0.214
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	22.07	23.00	1.239	0.1	0.107	0.133
10	LTE Band 4	20M	QPSK	1	99	Left Cheek	0mm	20175	1732.5	23.41	24.00	1.146	-0.01	0.423	0.485
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	22.07	23.00	1.239	0.12	0.170	0.211
	LTE Band 4	20M	QPSK	1	99	Left Tilted	0mm	20175	1732.5	23.41	24.00	1.146	-0.01	0.148	0.170
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	22.07	23.00	1.239	-0.06	0.088	0.109
11	LTE Band 5	10M	QPSK	1	49	Right Cheek	0mm	20525	836.5	23.39	24.00	1.151	-0.17	0.579	0.666
	LTE Band 5	10M	QPSK	25	25	Right Cheek	0mm	20525	836.5	22.10	23.00	1.230	-0.01	0.285	0.351
	LTE Band 5	10M	QPSK	1	49	Right Tilted	0mm	20525	836.5	23.39	24.00	1.151	-0.06	0.231	0.266
	LTE Band 5	10M	QPSK	25	25	Right Tilted	0mm	20525	836.5	22.10	23.00	1.230	0.06	0.162	0.199
	LTE Band 5	10M	QPSK	1	49	Left Cheek	0mm	20525	836.5	23.39	24.00	1.151	0.16	0.412	0.474
	LTE Band 5	10M	QPSK	25	25	Left Cheek	0mm	20525	836.5	22.10	23.00	1.230	0.14	0.213	0.262
	LTE Band 5	10M	QPSK	1	49	Left Tilted	0mm	20525	836.5	23.39	24.00	1.151	0.1	0.278	0.320
	LTE Band 5	10M	QPSK	25	25	Left Tilted	0mm	20525	836.5	22.10	23.00	1.230	0.09	0.141	0.173
12	LTE Band 7	20M	QPSK	1	99	Right Cheek	0mm	21350	2560	23.45	24.00	1.135	-0.15	0.371	0.421
	LTE Band 7	20M	QPSK	50	24	Right Cheek	0mm	20850	2510	22.18	23.00	1.208	0	0.182	0.220
	LTE Band 7	20M	QPSK	1	99	Right Tilted	0mm	21350	2560	23.45	24.00	1.135	-0.03	0.083	0.094
	LTE Band 7	20M	QPSK	50	24	Right Tilted	0mm	20850	2510	22.18	23.00	1.208	-0.1	0.050	0.060
	LTE Band 7	20M	QPSK	1	99	Left Cheek	0mm	21350	2560	23.45	24.00	1.135	-0.17	0.144	0.163
	LTE Band 7	20M	QPSK	50	24	Left Cheek	0mm	20850	2510	22.18	23.00	1.208	0.07	0.094	0.114
	LTE Band 7	20M	QPSK	1	99	Left Tilted	0mm	21350	2560	23.45	24.00	1.135	-0.1	0.106	0.120
	LTE Band 7	20M	QPSK	50	24	Left Tilted	0mm	20850	2510	22.18	23.00	1.208	0.05	0.051	0.062
	LTE Band 12	10M	QPSK	1	49	Right Cheek	0mm	23095	707.5	23.07	24.00	1.239	-0.09	0.270	0.334
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	21.94	23.00	1.276	-0.09	0.156	0.199
	LTE Band 12	10M	QPSK	1	49	Right Tilted	0mm	23095	707.5	23.07	24.00	1.239	-0.08	0.126	0.156
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	21.94	23.00	1.276	-0.11	0.117	0.149
13	LTE Band 12	10M	QPSK	1	49	Left Cheek	0mm	23095	707.5	23.07	24.00	1.239	0.02	0.288	0.357
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	21.94	23.00	1.276	0.02	0.155	0.198
	LTE Band 12	10M	QPSK	1	49	Left Tilted	0mm	23095	707.5	23.07	24.00	1.239	-0.05	0.194	0.240
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	21.94	23.00	1.276	0.07	0.093	0.119
	LTE Band 13	10M	QPSK	1	49	Right Cheek	0mm	23230	782	22.94	24.00	1.276	-0.08	0.401	0.512
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	21.93	23.00	1.279	-0.02	0.212	0.271
	LTE Band 13	10M	QPSK	1	49	Right Tilted	0mm	23230	782	22.94	24.00	1.276	-0.01	0.202	0.258
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	21.93	23.00	1.279	-0.1	0.106	0.136
14	LTE Band 13	10M	QPSK	1	49	Left Cheek	0mm	23230	782	22.94	24.00	1.276	0.18	0.421	0.537
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	21.93	23.00	1.279	-0.09	0.217	0.278
	LTE Band 13	10M	QPSK	1	49	Left Tilted	0mm	23230	782	22.94	24.00	1.276	-0.08	0.275	0.351
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	21.93	23.00	1.279	-0.07	0.146	0.187



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	49	Right Cheek	0mm	26140	1860	23.51	24.00	1.119	0.1	0.222	0.249
	LTE Band 25	20M	QPSK	50	50	Right Cheek	0mm	26140	1860	22.35	23.00	1.161	0.05	0.185	0.215
	LTE Band 25	20M	QPSK	1	49	Right Tilted	0mm	26140	1860	23.51	24.00	1.119	-0.02	0.180	0.201
	LTE Band 25	20M	QPSK	50	50	Right Tilted	0mm	26140	1860	22.35	23.00	1.161	0.15	0.107	0.124
15	LTE Band 25	20M	QPSK	1	49	Left Cheek	0mm	26140	1860	23.51	24.00	1.119	0.1	0.267	0.299
	LTE Band 25	20M	QPSK	50	50	Left Cheek	0mm	26140	1860	22.35	23.00	1.161	0.14	0.167	0.194
	LTE Band 25	20M	QPSK	1	49	Left Tilted	0mm	26140	1860	23.51	24.00	1.119	-0.17	0.201	0.225
	LTE Band 25	20M	QPSK	50	50	Left Tilted	0mm	26140	1860	22.35	23.00	1.161	0.14	0.120	0.139
	LTE Band 26	15M	QPSK	1	74	Right Cheek	0mm	26865	831.5	23.14	24.00	1.219	-0.07	0.556	0.678
	LTE Band 26	15M	QPSK	36	0	Right Cheek	0mm	26865	831.5	22.33	23.00	1.167	-0.08	0.326	0.380
	LTE Band 26	15M	QPSK	1	74	Right Tilted	0mm	26865	831.5	23.14	24.00	1.219	-0.18	0.357	0.435
	LTE Band 26	15M	QPSK	36	0	Right Tilted	0mm	26865	831.5	22.33	23.00	1.167	-0.13	0.182	0.212
16	LTE Band 26	15M	QPSK	1	74	Left Cheek	0mm	26865	831.5	23.14	24.00	1.219	-0.1	0.581	0.708
	LTE Band 26	15M	QPSK	36	0	Left Cheek	0mm	26865	831.5	22.33	23.00	1.167	0.02	0.307	0.358
	LTE Band 26	15M	QPSK	1	74	Left Tilted	0mm	26865	831.5	23.14	24.00	1.219	-0.1	0.317	0.386
	LTE Band 26	15M	QPSK	36	0	Left Tilted	0mm	26865	831.5	22.33	23.00	1.167	-0.07	0.174	0.203
	LTE Band 66	20M	QPSK	1	99	Right Cheek	0mm	132572	1770	23.63	24.00	1.089	-0.16	0.188	0.205
	LTE Band 66	20M	QPSK	50	50	Right Cheek	0mm	132572	1770	22.27	23.00	1.183	0.07	0.116	0.137
	LTE Band 66	20M	QPSK	1	99	Right Tilted	0mm	132572	1770	23.63	24.00	1.089	-0.19	0.182	0.198
	LTE Band 66	20M	QPSK	50	50	Right Tilted	0mm	132572	1770	22.27	23.00	1.183	-0.02	0.107	0.127
17	LTE Band 66	20M	QPSK	1	99	Left Cheek	0mm	132572	1770	23.63	24.00	1.089	-0.17	0.266	0.290
	LTE Band 66	20M	QPSK	50	50	Left Cheek	0mm	132572	1770	22.27	23.00	1.183	-0.01	0.159	0.188
	LTE Band 66	20M	QPSK	1	99	Left Tilted	0mm	132572	1770	23.63	24.00	1.089	-0.03	0.028	0.030
	LTE Band 66	20M	QPSK	50	50	Left Tilted	0mm	132572	1770	22.27	23.00	1.183	-0.04	0.028	0.033
	LTE Band 71	20M	QPSK	1	49	Right Cheek	0mm	133322	683	22.88	24.00	1.294	-0.15	0.128	0.166
	LTE Band 71	20M	QPSK	50	24	Right Cheek	0mm	133322	683	22.10	23.00	1.230	-0.13	0.098	0.121
	LTE Band 71	20M	QPSK	1	49	Right Tilted	0mm	133322	683	22.88	24.00	1.294	-0.06	0.071	0.092
	LTE Band 71	20M	QPSK	50	24	Right Tilted	0mm	133322	683	22.10	23.00	1.230	-0.12	0.065	0.080
18	LTE Band 71	20M	QPSK	1	49	Left Cheek	0mm	133322	683	22.88	24.00	1.294	-0.12	0.133	0.172
	LTE Band 71	20M	QPSK	50	24	Left Cheek	0mm	133322	683	22.10	23.00	1.230	0.11	0.104	0.128
	LTE Band 71	20M	QPSK	1	49	Left Tilted	0mm	133322	683	22.88	24.00	1.294	0.04	0.068	0.088
	LTE Band 71	20M	QPSK	50	24	Left Tilted	0mm	133322	683	22.10	23.00	1.230	0.18	0.057	0.070



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
19	LTE Band 38	20M	QPSK	1	49	Right Cheek	0mm	38000	2595	23.84	24.00	1.038	62.9	1.006	0	0.237	0.247
	LTE Band 38	20M	QPSK	50	0	Right Cheek	0mm	38150	2610	21.98	23.00	1.265	62.9	1.006	0.05	0.148	0.188
	LTE Band 38	20M	QPSK	1	49	Right Tilted	0mm	38000	2595	23.84	24.00	1.038	62.9	1.006	-0.08	0.037	0.039
	LTE Band 38	20M	QPSK	50	0	Right Tilted	0mm	38150	2610	21.98	23.00	1.265	62.9	1.006	-0.11	0.013	0.017
	LTE Band 38	20M	QPSK	1	49	Left Cheek	0mm	38000	2595	23.84	24.00	1.038	62.9	1.006	0.17	0.079	0.082
	LTE Band 38	20M	QPSK	50	0	Left Cheek	0mm	38150	2610	21.98	23.00	1.265	62.9	1.006	0.02	0.035	0.045
	LTE Band 38	20M	QPSK	1	49	Left Tilted	0mm	38000	2595	23.84	24.00	1.038	62.9	1.006	0.09	0.029	0.030
	LTE Band 38	20M	QPSK	50	0	Left Tilted	0mm	38150	2610	21.98	23.00	1.265	62.9	1.006	0.1	0.025	0.032
20	LTE Band 41_PC3	20M	QPSK	1	99	Right Cheek	0mm	39750	2506	23.60	24.00	1.096	62.9	1.006	-0.13	0.339	0.374
	LTE Band 41_PC3	20M	QPSK	50	50	Right Cheek	0mm	39750	2506	22.77	23.00	1.054	62.9	1.006	-0.14	0.113	0.120
	LTE Band 41_PC3	20M	QPSK	1	99	Right Tilted	0mm	39750	2506	23.60	24.00	1.096	62.9	1.006	0.02	0.074	0.082
	LTE Band 41_PC3	20M	QPSK	50	50	Right Tilted	0mm	39750	2506	22.77	23.00	1.054	62.9	1.006	-0.01	0.029	0.031
	LTE Band 41_PC3	20M	QPSK	1	99	Left Cheek	0mm	39750	2506	23.60	24.00	1.096	62.9	1.006	-0.08	0.197	0.217
	LTE Band 41_PC3	20M	QPSK	50	50	Left Cheek	0mm	39750	2506	22.77	23.00	1.054	62.9	1.006	-0.13	0.063	0.067
	LTE Band 41_PC3	20M	QPSK	1	99	Left Tilted	0mm	39750	2506	23.60	24.00	1.096	62.9	1.006	-0.01	0.142	0.157
	LTE Band 41_PC3	20M	QPSK	50	50	Left Tilted	0mm	39750	2506	22.77	23.00	1.054	62.9	1.006	-0.06	0.044	0.047
	LTE Band 41_PC2	20M	QPSK	1	99	Right Cheek	0mm	39750	2506	24.20	25.00	1.202	42.9	1.009	-0.13	0.266	0.323
	LTE Band 41_UL CA	20M	QPSK	1	99	Right Cheek	0mm	39750 + 39948	2506 + 2525.8	22.14	24.00	1.535	62.9	1.006	0	0.224	0.346

PC3: 1CC uplink, Power Class 3
 PC2: 1CC uplink, Power Class 2
 UL CA: 2CC Uplink, Power Class 3



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.04	0.615	0.631
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.14	0.629	0.646
21	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.09	1.310	1.345
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	OFF	6	2437	18.46	18.50	1.009	97.62	1.024	-0.08	1.210	1.251
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	OFF	11	2462	18.28	18.50	1.052	97.62	1.024	-0.03	1.100	1.185
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.1	0.892	0.916
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	OFF	6	2437	18.46	18.50	1.009	97.62	1.024	0.01	0.771	0.797
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	ON	52	5260	13.98	14.00	1.004	86.26	1.159	0.13	0.661	0.769
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	ON	52	5260	13.98	14.00	1.004	86.26	1.159	0.09	0.715	0.832
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	ON	64	5320	13.94	14.00	1.013	86.26	1.159	0.11	0.579	0.680
22	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	52	5260	13.98	14.00	1.005	86.26	1.159	-0.04	0.719	0.837
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	64	5320	13.94	14.00	1.013	86.26	1.159	0.16	0.623	0.732
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	ON	52	5260	13.98	14.00	1.005	86.26	1.159	0.02	0.712	0.829
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	ON	64	5320	13.94	14.00	1.013	86.26	1.159	0.09	0.614	0.721
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	ON	144	5720	13.96	14.00	1.009	86.26	1.159	0.03	0.976	1.141
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	ON	116	5580	13.95	14.00	1.011	86.26	1.159	0.02	0.714	0.837
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	ON	144	5720	13.96	14.00	1.009	86.26	1.159	0.01	0.960	1.122
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	ON	116	5580	13.95	14.00	1.011	86.26	1.159	0.01	0.757	0.887
23	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	144	5720	13.96	14.00	1.009	86.26	1.159	0.07	1.090	1.274
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	116	5580	13.95	14.00	1.011	86.26	1.159	-0.16	0.897	1.051
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	ON	144	5720	13.96	14.00	1.009	86.26	1.159	0.1	1.010	1.181
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	ON	116	5580	13.95	14.00	1.011	86.26	1.159	-0.03	0.914	1.071
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	ON	157	5785	13.91	14.00	1.020	86.26	1.159	0.14	1.050	1.242
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	ON	149	5745	13.90	14.00	1.023	86.26	1.159	-0.17	1.020	1.209
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	ON	165	5825	13.76	14.00	1.056	86.26	1.159	-0.12	1.130	1.383
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	ON	151	5755	9.90	10.00	1.024	88.8	1.126	0.1	0.340	0.392
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	ON	157	5785	13.91	14.00	1.020	86.26	1.159	-0.03	0.910	1.076
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	ON	149	5745	13.90	14.00	1.023	86.26	1.159	-0.04	0.940	1.114
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	157	5785	13.91	14.00	1.020	86.26	1.159	-0.14	1.130	1.337
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	149	5745	13.90	14.00	1.023	86.26	1.159	-0.05	1.130	1.340
24	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	165	5825	13.76	14.00	1.056	86.26	1.159	-0.02	1.160	1.420
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	ON	151	5755	9.90	10.00	1.024	88.8	1.126	-0.03	0.391	0.451
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	ON	157	5785	13.91	14.00	1.020	86.26	1.159	-0.15	1.010	1.195
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	ON	149	5745	13.90	14.00	1.023	86.26	1.159	0.01	0.910	1.079

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	0	2402	11.82	12.00	1.042	-0.03	0.104	0.108
	Bluetooth	1Mbps	Right Tilted	0mm	0	2402	11.82	12.00	1.042	0.03	0.109	0.114
25	Bluetooth	1Mbps	Left Cheek	0mm	0	2402	11.82	12.00	1.042	0.11	0.216	0.225
	Bluetooth	1Mbps	Left Tilted	0mm	0	2402	11.82	12.00	1.042	0.03	0.158	0.165



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	5mm	OFF	251	848.8	26.34	27.50	1.306	-0.19	0.452	0.590
26	GSM850	GPRS (4 Tx slots)	Back	5mm	OFF	251	848.8	26.34	27.50	1.306	0.06	0.910	1.189
	GSM850	GPRS (4 Tx slots)	Back	5mm	OFF	128	824.2	26.25	27.50	1.334	0.01	0.466	0.621
	GSM850	GPRS (4 Tx slots)	Back	5mm	OFF	189	836.4	26.33	27.50	1.309	-0.02	0.543	0.711
	GSM850	GPRS (4 Tx slots)	Left Side	5mm	OFF	251	848.8	26.34	27.50	1.306	0.06	0.516	0.674
	GSM850	GPRS (4 Tx slots)	Right Side	5mm	OFF	251	848.8	26.34	27.50	1.306	-0.02	0.557	0.728
	GSM850	GPRS (4 Tx slots)	Bottom Side	5mm	OFF	251	848.8	26.34	27.50	1.306	-0.04	0.113	0.148
	GSM1900	GPRS (4 Tx slots)	Front	5mm	ON	661	1880	19.34	19.50	1.038	0.06	0.396	0.411
27	GSM1900	GPRS (4 Tx slots)	Back	5mm	ON	661	1880	19.34	19.50	1.038	0.07	0.689	0.715
	GSM1900	GPRS (4 Tx slots)	Left Side	5mm	ON	661	1880	19.34	19.50	1.038	0.07	0.062	0.064
	GSM1900	GPRS (4 Tx slots)	Right Side	5mm	ON	661	1880	19.34	19.50	1.038	0.03	0.053	0.055
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	ON	661	1880	19.34	19.50	1.038	0.09	0.554	0.575

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	ON	9400	1880	16.50	16.50	1.000	-0.12	0.710	0.710
	WCDMA II	RMC 12.2Kbps	Back	5mm	ON	9400	1880	16.50	16.50	1.000	-0.03	1.170	1.170
28	WCDMA II	RMC 12.2Kbps	Back	5mm	ON	9262	1852.4	16.20	16.50	1.072	-0.09	1.200	1.286
	WCDMA II	RMC 12.2Kbps	Back	5mm	ON	9538	1907.6	16.46	16.50	1.009	-0.07	1.040	1.050
	WCDMA II	RMC 12.2Kbps	Left Side	5mm	ON	9400	1880	16.50	16.50	1.000	-0.12	0.106	0.106
	WCDMA II	RMC 12.2Kbps	Right Side	5mm	ON	9400	1880	16.50	16.50	1.000	0.02	0.089	0.089
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	ON	9400	1880	16.50	16.50	1.000	-0.14	0.976	0.976
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	ON	9262	1852.4	16.20	16.50	1.072	-0.17	0.971	1.040
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	ON	9538	1907.6	16.46	16.50	1.009	-0.16	0.895	0.903
	WCDMA IV	RMC 12.2Kbps	Front	5mm	ON	1513	1752.6	15.40	16.00	1.148	0.02	0.682	0.783
29	WCDMA IV	RMC 12.2Kbps	Back	5mm	ON	1513	1752.6	15.40	16.00	1.148	-0.15	1.260	1.447
	WCDMA IV	RMC 12.2Kbps	Back	5mm	ON	1312	1712.4	15.15	16.00	1.216	-0.12	1.020	1.241
	WCDMA IV	RMC 12.2Kbps	Back	5mm	ON	1413	1732.6	15.34	16.00	1.164	-0.14	1.180	1.374
	WCDMA IV	RMC 12.2Kbps	Left Side	5mm	ON	1513	1752.6	15.40	16.00	1.148	0.13	0.114	0.131
	WCDMA IV	RMC 12.2Kbps	Right Side	5mm	ON	1513	1752.6	15.40	16.00	1.148	0.04	0.062	0.071
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	ON	1513	1752.6	15.40	16.00	1.148	0.12	0.998	1.146
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	ON	1312	1712.4	15.15	16.00	1.216	0.14	0.843	1.025
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	ON	1413	1732.6	15.34	16.00	1.164	0.16	0.945	1.100
	WCDMA V	RMC 12.2Kbps	Front	5mm	ON	4233	846.6	22.13	22.50	1.089	-0.01	0.724	0.788
30	WCDMA V	RMC 12.2Kbps	Back	5mm	ON	4233	846.6	22.13	22.50	1.089	-0.08	0.967	1.053
	WCDMA V	RMC 12.2Kbps	Back	5mm	ON	4132	826.4	22.12	22.50	1.091	-0.08	0.806	0.880
	WCDMA V	RMC 12.2Kbps	Back	5mm	ON	4182	836.4	22.04	22.50	1.112	-0.04	0.890	0.989
	WCDMA V	RMC 12.2Kbps	Left Side	5mm	ON	4233	846.6	22.13	22.50	1.089	0	0.697	0.759
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	ON	4233	846.6	22.13	22.50	1.089	-0.02	0.796	0.867
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	ON	4132	826.4	22.12	22.50	1.091	0	0.777	0.848
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	ON	4182	836.4	22.04	22.50	1.112	-0.03	0.796	0.885
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	ON	4233	846.6	22.13	22.50	1.089	0.1	0.179	0.195



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	RTAP 153.6Kbps	Front	5mm	OFF	777	848.31	23.99	24.50	1.125	-0.03	0.681	0.766
	CDMA BC0	RTAP 153.6Kbps	Back	5mm	OFF	777	848.31	23.99	24.50	1.125	-0.13	0.935	1.052
	CDMA BC0	RTAP 153.6Kbps	Back	5mm	OFF	1013	824.7	23.79	24.50	1.178	-0.19	0.829	0.976
	CDMA BC0	RTAP 153.6Kbps	Back	5mm	OFF	384	836.52	23.91	24.50	1.146	-0.11	0.895	1.025
	CDMA BC0	RTAP 153.6Kbps	Left Side	5mm	OFF	777	848.31	23.99	24.50	1.125	0.1	0.753	0.847
	CDMA BC0	RTAP 153.6Kbps	Left Side	5mm	OFF	1013	824.7	23.79	24.50	1.178	0.12	0.726	0.855
	CDMA BC0	RTAP 153.6Kbps	Left Side	5mm	OFF	384	836.52	23.91	24.50	1.146	0.14	0.756	0.866
	CDMA BC0	RTAP 153.6Kbps	Right Side	5mm	OFF	777	848.31	23.99	24.50	1.125	0.12	0.952	1.071
	CDMA BC0	RTAP 153.6Kbps	Right Side	5mm	OFF	1013	824.7	23.79	24.50	1.178	0.08	0.911	1.073
31	CDMA BC0	RTAP 153.6Kbps	Right Side	5mm	OFF	384	836.52	23.91	24.50	1.146	0.14	0.949	1.087
	CDMA BC0	RTAP 153.6Kbps	Bottom Side	5mm	OFF	777	848.31	23.99	24.50	1.125	0.02	0.129	0.145
	CDMA BC1	RTAP 153.6Kbps	Front	5mm	ON	600	1880	18.46	19.00	1.132	0.04	0.643	0.728
	CDMA BC1	RTAP 153.6Kbps	Back	5mm	ON	600	1880	18.46	19.00	1.132	-0.03	1.160	1.314
32	CDMA BC1	RTAP 153.6Kbps	Back	5mm	ON	25	1851.25	18.37	19.00	1.156	-0.06	1.200	1.387
	CDMA BC1	RTAP 153.6Kbps	Back	5mm	ON	1175	1908.75	18.25	19.00	1.189	-0.07	1.040	1.236
	CDMA BC1	RTAP 153.6Kbps	Left Side	5mm	ON	600	1880	18.46	19.00	1.132	0	0.091	0.103
	CDMA BC1	RTAP 153.6Kbps	Right Side	5mm	ON	600	1880	18.46	19.00	1.132	-0.11	0.090	0.102
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	ON	600	1880	18.46	19.00	1.132	0.14	0.905	1.025
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	ON	25	1851.25	18.37	19.00	1.156	0.06	0.926	1.071
	CDMA BC1	RTAP 153.6Kbps	Bottom Side	5mm	ON	1175	1908.75	18.25	19.00	1.189	0.07	0.818	0.972
	CDMA BC10	RTAP 153.6Kbps	Front	5mm	OFF	580	820.5	23.93	24.50	1.140	-0.12	0.575	0.656
	CDMA BC10	RTAP 153.6Kbps	Back	5mm	OFF	580	820.5	23.93	24.50	1.140	-0.09	0.861	0.982
	CDMA BC10	RTAP 153.6Kbps	Left Side	5mm	OFF	580	820.5	23.93	24.50	1.140	0.11	0.758	0.864
33	CDMA BC10	RTAP 153.6Kbps	Right Side	5mm	OFF	580	820.5	23.93	24.50	1.140	0.11	0.964	1.099
	CDMA BC10	RTAP 153.6Kbps	Bottom Side	5mm	OFF	580	820.5	23.93	24.50	1.140	0.06	0.104	0.119

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	ON	19100	1900	16.50	16.50	1.000	-0.11	0.587	0.587
	LTE Band 2	20M	QPSK	50	0	Front	5mm	ON	18900	1880	16.41	16.50	1.021	-0.07	0.593	0.605
	LTE Band 2	20M	QPSK	1	0	Back	5mm	ON	19100	1900	16.50	16.50	1.000	0.07	1.050	1.050
	LTE Band 2	20M	QPSK	1	0	Back	5mm	ON	18700	1860	16.17	16.50	1.079	-0.08	1.010	1.090
	LTE Band 2	20M	QPSK	1	0	Back	5mm	ON	18900	1880	16.37	16.50	1.030	-0.02	0.921	0.949
	LTE Band 2	20M	QPSK	50	0	Back	5mm	ON	18900	1880	16.41	16.50	1.021	-0.11	1.050	1.072
34	LTE Band 2	20M	QPSK	50	0	Back	5mm	ON	18700	1860	16.06	16.50	1.107	-0.1	1.020	1.129
	LTE Band 2	20M	QPSK	50	0	Back	5mm	ON	19100	1900	16.37	16.50	1.030	-0.05	0.919	0.947
	LTE Band 2	20M	QPSK	100	0	Back	5mm	ON	18900	1880	16.28	16.50	1.052	0.01	1.050	1.105
	LTE Band 2	20M	QPSK	1	0	Left Side	5mm	ON	19100	1900	16.50	16.50	1.000	0.14	0.062	0.062
	LTE Band 2	20M	QPSK	50	0	Left Side	5mm	ON	18900	1880	16.41	16.50	1.021	0.05	0.066	0.067
	LTE Band 2	20M	QPSK	1	0	Right Side	5mm	ON	19100	1900	16.50	16.50	1.000	0.12	0.079	0.079
	LTE Band 2	20M	QPSK	50	0	Right Side	5mm	ON	18900	1880	16.41	16.50	1.021	0.09	0.082	0.084
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	ON	19100	1900	16.50	16.50	1.000	0.03	0.825	0.825
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	ON	18700	1860	16.17	16.50	1.079	0.02	0.801	0.864
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	ON	18900	1880	16.37	16.50	1.030	-0.01	0.739	0.761
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	ON	18900	1880	16.41	16.50	1.021	-0.16	0.822	0.839
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	ON	18700	1860	16.06	16.50	1.107	-0.01	0.811	0.897
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	ON	19100	1900	16.37	16.50	1.030	-0.03	0.730	0.752
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5mm	ON	18900	1880	16.28	16.50	1.052	0.07	0.815	0.857



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	99	Front	5mm	ON	20175	1732.5	15.79	16.50	1.178	-0.05	0.570	0.671
	LTE Band 4	20M	QPSK	50	24	Front	5mm	ON	20175	1732.5	15.68	16.50	1.208	-0.03	0.465	0.562
35	LTE Band 4	20M	QPSK	1	99	Back	5mm	ON	20175	1732.5	15.79	16.50	1.178	-0.03	0.966	1.138
	LTE Band 4	20M	QPSK	50	0	Back	5mm	ON	20175	1732.5	15.81	16.50	1.172	-0.04	0.806	0.945
	LTE Band 4	20M	QPSK	100	0	Back	5mm	ON	20175	1732.5	15.76	16.50	1.186	-0.07	0.788	0.934
	LTE Band 4	20M	QPSK	1	99	Left Side	5mm	ON	20175	1732.5	15.79	16.50	1.178	0.03	0.101	0.119
	LTE Band 4	20M	QPSK	50	0	Left Side	5mm	ON	20175	1732.5	15.81	16.50	1.172	0.04	0.077	0.090
	LTE Band 4	20M	QPSK	1	99	Right Side	5mm	ON	20175	1732.5	15.79	16.50	1.178	-0.13	0.053	0.062
	LTE Band 4	20M	QPSK	50	0	Right Side	5mm	ON	20175	1732.5	15.81	16.50	1.172	-0.12	0.042	0.049
	LTE Band 4	20M	QPSK	1	99	Bottom Side	5mm	ON	20175	1732.5	15.79	16.50	1.178	0.11	0.807	0.950
	LTE Band 4	20M	QPSK	50	0	Bottom Side	5mm	ON	20175	1732.5	15.81	16.50	1.172	-0.04	0.656	0.769
	LTE Band 4	20M	QPSK	100	0	Bottom Side	5mm	ON	20175	1732.5	15.76	16.50	1.186	-0.16	0.629	0.746
	LTE Band 5	10M	QPSK	1	49	Front	5mm	ON	20525	836.5	21.95	23.00	1.274	-0.02	0.604	0.769
	LTE Band 5	10M	QPSK	25	25	Front	5mm	ON	20525	836.5	21.76	23.00	1.330	0.02	0.348	0.463
	LTE Band 5	10M	QPSK	1	49	Back	5mm	ON	20525	836.5	21.95	23.00	1.274	0.05	0.792	1.009
	LTE Band 5	10M	QPSK	25	25	Back	5mm	ON	20525	836.5	21.76	23.00	1.330	-0.05	0.491	0.653
	LTE Band 5	10M	QPSK	50	0	Back	5mm	ON	20525	836.5	21.74	23.00	1.337	-0.1	0.472	0.631
	LTE Band 5	10M	QPSK	1	49	Left Side	5mm	ON	20525	836.5	21.95	23.00	1.274	-0.09	0.702	0.894
	LTE Band 5	10M	QPSK	25	25	Left Side	5mm	ON	20525	836.5	21.76	23.00	1.330	-0.01	0.563	0.749
	LTE Band 5	10M	QPSK	50	0	Left Side	5mm	ON	20525	836.5	21.74	23.00	1.337	-0.02	0.550	0.735
36	LTE Band 5	10M	QPSK	1	49	Right Side	5mm	ON	20525	836.5	21.95	23.00	1.274	-0.09	0.835	1.063
	LTE Band 5	10M	QPSK	25	25	Right Side	5mm	ON	20525	836.5	21.76	23.00	1.330	0.05	0.634	0.844
	LTE Band 5	10M	QPSK	50	0	Right Side	5mm	ON	20525	836.5	21.74	23.00	1.337	-0.01	0.620	0.829
	LTE Band 5	10M	QPSK	1	49	Bottom Side	5mm	ON	20525	836.5	21.95	23.00	1.274	0	0.128	0.163
	LTE Band 5	10M	QPSK	25	25	Bottom Side	5mm	ON	20525	836.5	21.76	23.00	1.330	0.12	0.083	0.110
	LTE Band 7	20M	QPSK	1	49	Front	5mm	ON	20850	2510	17.86	18.50	1.159	-0.07	0.655	0.759
	LTE Band 7	20M	QPSK	50	50	Front	5mm	ON	21350	2560	17.85	18.50	1.161	-0.09	0.588	0.683
	LTE Band 7	20M	QPSK	1	49	Back	5mm	ON	20850	2510	17.86	18.50	1.159	-0.06	0.877	1.016
	LTE Band 7	20M	QPSK	1	49	Back	5mm	ON	21100	2535	17.71	18.50	1.199	-0.05	0.873	1.047
37	LTE Band 7	20M	QPSK	1	49	Back	5mm	ON	21350	2560	17.62	18.50	1.225	-0.06	0.913	1.118
	LTE Band 7	20M	QPSK	50	50	Back	5mm	ON	21350	2560	17.85	18.50	1.161	0.03	0.686	0.797
	LTE Band 7	20M	QPSK	100	0	Back	5mm	ON	20850	2510	17.82	18.50	1.169	-0.04	0.673	0.787
	LTE Band 7	20M	QPSK	1	49	Left Side	5mm	ON	20850	2510	17.86	18.50	1.159	0.05	0.037	0.043
	LTE Band 7	20M	QPSK	50	50	Left Side	5mm	ON	21350	2560	17.85	18.50	1.161	0.04	0.034	0.039
	LTE Band 7	20M	QPSK	1	49	Right Side	5mm	ON	20850	2510	17.86	18.50	1.159	-0.06	0.207	0.240
	LTE Band 7	20M	QPSK	50	50	Right Side	5mm	ON	21350	2560	17.85	18.50	1.161	-0.07	0.159	0.185
	LTE Band 7	20M	QPSK	1	49	Bottom Side	5mm	ON	20850	2510	17.86	18.50	1.159	0.04	0.613	0.710
	LTE Band 7	20M	QPSK	50	50	Bottom Side	5mm	ON	21350	2560	17.85	18.50	1.161	0	0.491	0.570
	LTE Band 12	10M	QPSK	1	49	Front	5mm	OFF	23095	707.5	23.07	24.00	1.239	-0.12	0.335	0.415
	LTE Band 12	10M	QPSK	25	0	Front	5mm	OFF	23095	707.5	21.94	23.00	1.276	0.06	0.178	0.227
38	LTE Band 12	10M	QPSK	1	49	Back	5mm	OFF	23095	707.5	23.07	24.00	1.239	-0.09	0.625	0.774
	LTE Band 12	10M	QPSK	25	0	Back	5mm	OFF	23095	707.5	21.94	23.00	1.276	-0.04	0.338	0.431
	LTE Band 12	10M	QPSK	1	49	Left Side	5mm	OFF	23095	707.5	23.07	24.00	1.239	-0.18	0.570	0.706
	LTE Band 12	10M	QPSK	25	0	Left Side	5mm	OFF	23095	707.5	21.94	23.00	1.276	0.07	0.307	0.392
	LTE Band 12	10M	QPSK	1	49	Right Side	5mm	OFF	23095	707.5	23.07	24.00	1.239	-0.13	0.615	0.762
	LTE Band 12	10M	QPSK	25	0	Right Side	5mm	OFF	23095	707.5	21.94	23.00	1.276	0.09	0.368	0.470
	LTE Band 12	10M	QPSK	1	49	Bottom Side	5mm	OFF	23095	707.5	23.07	24.00	1.239	0.11	0.111	0.138
	LTE Band 12	10M	QPSK	25	0	Bottom Side	5mm	OFF	23095	707.5	21.94	23.00	1.276	0.15	0.064	0.082



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	49	Front	5mm	OFF	23230	782	22.94	24.00	1.276	-0.13	0.549	0.701
	LTE Band 13	10M	QPSK	25	0	Front	5mm	OFF	23230	782	21.93	23.00	1.279	-0.03	0.292	0.374
	LTE Band 13	10M	QPSK	1	49	Back	5mm	OFF	23230	782	22.94	24.00	1.276	-0.18	0.832	1.062
	LTE Band 13	10M	QPSK	25	0	Back	5mm	OFF	23230	782	21.93	23.00	1.279	-0.05	0.431	0.551
	LTE Band 13	10M	QPSK	50	0	Back	5mm	OFF	23230	782	21.98	23.00	1.265	-0.11	0.445	0.563
	LTE Band 13	10M	QPSK	1	49	Left Side	5mm	OFF	23230	782	22.94	24.00	1.276	-0.06	0.827	1.056
	LTE Band 13	10M	QPSK	25	0	Left Side	5mm	OFF	23230	782	21.93	23.00	1.279	0.02	0.472	0.604
	LTE Band 13	10M	QPSK	50	0	Left Side	5mm	OFF	23230	782	21.98	23.00	1.265	0.06	0.425	0.538
39	LTE Band 13	10M	QPSK	1	49	Right Side	5mm	OFF	23230	782	22.94	24.00	1.276	-0.18	0.938	1.197
	LTE Band 13	10M	QPSK	25	0	Right Side	5mm	OFF	23230	782	21.93	23.00	1.279	-0.03	0.494	0.632
	LTE Band 13	10M	QPSK	50	0	Right Side	5mm	OFF	23230	782	21.98	23.00	1.265	0	0.484	0.612
	LTE Band 13	10M	QPSK	1	49	Bottom Side	5mm	OFF	23230	782	22.94	24.00	1.276	0.17	0.124	0.158
	LTE Band 13	10M	QPSK	25	0	Bottom Side	5mm	OFF	23230	782	21.93	23.00	1.279	-0.03	0.064	0.082
	LTE Band 25	20M	QPSK	1	0	Front	5mm	ON	26340	1880	17.03	17.50	1.114	-0.15	0.576	0.642
	LTE Band 25	20M	QPSK	50	0	Front	5mm	ON	26340	1880	17.01	17.50	1.119	-0.07	0.594	0.665
	LTE Band 25	20M	QPSK	1	0	Back	5mm	ON	26340	1880	17.03	17.50	1.114	0.07	1.030	1.148
	LTE Band 25	20M	QPSK	1	0	Back	5mm	ON	26140	1860	16.91	17.50	1.146	-0.08	1.010	1.157
	LTE Band 25	20M	QPSK	1	0	Back	5mm	ON	26590	1905	17.01	17.50	1.119	-0.02	0.948	1.061
	LTE Band 25	20M	QPSK	50	0	Back	5mm	ON	26340	1880	17.01	17.50	1.119	-0.12	1.060	1.187
40	LTE Band 25	20M	QPSK	50	0	Back	5mm	ON	26140	1860	16.76	17.50	1.186	-0.1	1.020	1.209
	LTE Band 25	20M	QPSK	50	0	Back	5mm	ON	26590	1905	16.99	17.50	1.125	-0.05	0.924	1.039
	LTE Band 25	20M	QPSK	100	0	Back	5mm	ON	26340	1880	16.96	17.50	1.132	0.01	1.060	1.200
	LTE Band 25	20M	QPSK	1	0	Left Side	5mm	ON	26340	1880	17.03	17.50	1.114	0.04	0.061	0.068
	LTE Band 25	20M	QPSK	50	0	Left Side	5mm	ON	26340	1880	17.01	17.50	1.119	0.05	0.066	0.074
	LTE Band 25	20M	QPSK	1	0	Right Side	5mm	ON	26340	1880	17.03	17.50	1.114	0.12	0.077	0.086
	LTE Band 25	20M	QPSK	50	0	Right Side	5mm	ON	26340	1880	17.01	17.50	1.119	0.08	0.082	0.092
	LTE Band 25	20M	QPSK	1	0	Bottom Side	5mm	ON	26340	1880	17.03	17.50	1.114	0.03	0.809	0.901
	LTE Band 25	20M	QPSK	1	0	Bottom Side	5mm	ON	26140	1860	16.91	17.50	1.146	0.03	0.802	0.919
	LTE Band 25	20M	QPSK	1	0	Bottom Side	5mm	ON	26590	1905	17.01	17.50	1.119	-0.01	0.761	0.852
	LTE Band 25	20M	QPSK	50	0	Bottom Side	5mm	ON	26340	1880	17.01	17.50	1.119	-0.06	0.823	0.921
	LTE Band 25	20M	QPSK	50	0	Bottom Side	5mm	ON	26140	1860	16.76	17.50	1.186	-0.02	0.813	0.964
	LTE Band 25	20M	QPSK	50	0	Bottom Side	5mm	ON	26590	1905	16.99	17.50	1.125	-0.03	0.735	0.827
	LTE Band 25	20M	QPSK	100	0	Bottom Side	5mm	ON	26340	1880	16.96	17.50	1.132	0.07	0.816	0.924
	LTE Band 26	15M	QPSK	1	74	Front	5mm	OFF	26865	831.5	23.14	24.00	1.219	-0.15	0.600	0.731
	LTE Band 26	15M	QPSK	36	0	Front	5mm	OFF	26865	831.5	22.33	23.00	1.167	0.01	0.345	0.403
	LTE Band 26	15M	QPSK	1	74	Back	5mm	OFF	26865	831.5	23.14	24.00	1.219	-0.05	0.965	1.176
	LTE Band 26	15M	QPSK	36	0	Back	5mm	OFF	26865	831.5	22.33	23.00	1.167	-0.05	0.488	0.569
	LTE Band 26	15M	QPSK	75	0	Back	5mm	OFF	26865	831.5	22.18	23.00	1.208	-0.1	0.469	0.566
	LTE Band 26	15M	QPSK	1	74	Left Side	5mm	OFF	26865	831.5	23.14	24.00	1.219	-0.09	0.958	1.168
	LTE Band 26	15M	QPSK	36	0	Left Side	5mm	OFF	26865	831.5	22.33	23.00	1.167	-0.01	0.560	0.653
	LTE Band 26	15M	QPSK	75	0	Left Side	5mm	OFF	26865	831.5	22.18	23.00	1.208	-0.06	0.547	0.661
41	LTE Band 26	15M	QPSK	1	74	Right Side	5mm	OFF	26865	831.5	23.14	24.00	1.219	-0.11	0.974	1.187
	LTE Band 26	15M	QPSK	36	0	Right Side	5mm	OFF	26865	831.5	22.33	23.00	1.167	0	0.630	0.735
	LTE Band 26	15M	QPSK	75	0	Right Side	5mm	OFF	26865	831.5	22.18	23.00	1.208	-0.01	0.617	0.745
	LTE Band 26	15M	QPSK	1	74	Bottom Side	5mm	OFF	26865	831.5	23.14	24.00	1.219	0	0.127	0.155
	LTE Band 26	15M	QPSK	36	0	Bottom Side	5mm	OFF	26865	831.5	22.33	23.00	1.167	0.16	0.083	0.097



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	99	Front	5mm	ON	132322	1745	16.32	17.00	1.169	-0.1	0.578	0.676
	LTE Band 66	20M	QPSK	50	50	Front	5mm	ON	132572	1770	15.89	17.00	1.291	-0.02	0.485	0.626
	LTE Band 66	20M	QPSK	1	99	Back	5mm	ON	132322	1745	16.32	17.00	1.169	-0.06	0.980	1.146
	LTE Band 66	20M	QPSK	1	99	Back	5mm	ON	132072	1720	16.21	17.00	1.199	-0.07	0.936	1.123
42	LTE Band 66	20M	QPSK	1	99	Back	5mm	ON	132572	1770	16.31	17.00	1.172	0	1.020	1.196
	LTE Band 66	20M	QPSK	50	50	Back	5mm	ON	132572	1770	15.89	17.00	1.291	-0.05	0.840	1.085
	LTE Band 66	20M	QPSK	50	50	Back	5mm	ON	132072	1720	15.82	17.00	1.312	0	0.759	0.996
	LTE Band 66	20M	QPSK	50	50	Back	5mm	ON	132322	1745	15.75	17.00	1.334	0.01	0.780	1.040
	LTE Band 66	20M	QPSK	100	0	Back	5mm	ON	132572	1770	15.83	17.00	1.309	-0.04	0.822	1.076
	LTE Band 66	20M	QPSK	1	99	Left Side	5mm	ON	132322	1745	16.32	17.00	1.169	0.03	0.102	0.119
	LTE Band 66	20M	QPSK	50	50	Left Side	5mm	ON	132572	1770	15.89	17.00	1.291	0.04	0.080	0.103
	LTE Band 66	20M	QPSK	1	99	Right Side	5mm	ON	132322	1745	16.32	17.00	1.169	-0.03	0.054	0.063
	LTE Band 66	20M	QPSK	50	50	Right Side	5mm	ON	132572	1770	15.89	17.00	1.291	-0.15	0.043	0.056
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5mm	ON	132322	1745	16.32	17.00	1.169	0.11	0.818	0.957
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5mm	ON	132072	1720	16.21	17.00	1.199	0.02	0.808	0.969
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5mm	ON	132572	1770	16.31	17.00	1.172	-0.01	0.820	0.961
	LTE Band 66	20M	QPSK	50	50	Bottom Side	5mm	ON	132572	1770	15.89	17.00	1.291	-0.04	0.683	0.882
	LTE Band 66	20M	QPSK	50	50	Bottom Side	5mm	ON	132072	1720	15.82	17.00	1.312	0	0.648	0.850
	LTE Band 66	20M	QPSK	50	50	Bottom Side	5mm	ON	132322	1745	15.75	17.00	1.334	0	0.658	0.877
	LTE Band 66	20M	QPSK	100	0	Bottom Side	5mm	ON	132572	1770	15.83	17.00	1.309	-0.16	0.656	0.859
	LTE Band 71	20M	QPSK	1	49	Front	5mm	OFF	133322	683	22.88	24.00	1.294	-0.1	0.188	0.243
	LTE Band 71	20M	QPSK	50	24	Front	5mm	OFF	133322	683	22.10	23.00	1.230	0.07	0.151	0.186
43	LTE Band 71	20M	QPSK	1	49	Back	5mm	OFF	133322	683	22.88	24.00	1.294	-0.09	0.334	0.432
	LTE Band 71	20M	QPSK	50	24	Back	5mm	OFF	133322	683	22.10	23.00	1.230	0.13	0.268	0.330
	LTE Band 71	20M	QPSK	1	49	Left Side	5mm	OFF	133322	683	22.88	24.00	1.294	-0.05	0.264	0.342
	LTE Band 71	20M	QPSK	50	24	Left Side	5mm	OFF	133322	683	22.10	23.00	1.230	0.18	0.215	0.265
	LTE Band 71	20M	QPSK	1	49	Right Side	5mm	OFF	133322	683	22.88	24.00	1.294	-0.1	0.273	0.353
	LTE Band 71	20M	QPSK	50	24	Right Side	5mm	OFF	133322	683	22.10	23.00	1.230	0.18	0.219	0.269
	LTE Band 71	20M	QPSK	1	49	Bottom Side	5mm	OFF	133322	683	22.88	24.00	1.294	-0.11	0.061	0.079
	LTE Band 71	20M	QPSK	50	24	Bottom Side	5mm	OFF	133322	683	22.10	23.00	1.230	-0.08	0.048	0.059



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	99	Front	5mm	ON	38150	2610	20.23	20.50	1.064	62.9	1.006	0.04	0.420	0.450
	LTE Band 38	20M	QPSK	50	50	Front	5mm	ON	38150	2610	20.04	20.50	1.112	62.9	1.006	-0.09	0.406	0.454
	LTE Band 38	20M	QPSK	1	99	Back	5mm	ON	38150	2610	20.23	20.50	1.064	62.9	1.006	-0.15	1.180	1.263
	LTE Band 38	20M	QPSK	1	99	Back	5mm	ON	37850	2580	20.09	20.50	1.099	62.9	1.006	-0.06	1.150	1.271
44	LTE Band 38	20M	QPSK	1	99	Back	5mm	ON	38000	2595	20.11	20.50	1.094	62.9	1.006	-0.06	1.180	1.299
	LTE Band 38	20M	QPSK	50	50	Back	5mm	ON	38150	2610	20.04	20.50	1.112	62.9	1.006	-0.11	1.010	1.130
	LTE Band 38	20M	QPSK	50	50	Back	5mm	ON	37850	2580	20.00	20.50	1.122	62.9	1.006	-0.04	0.942	1.063
	LTE Band 38	20M	QPSK	50	50	Back	5mm	ON	38000	2595	19.85	20.50	1.161	62.9	1.006	-0.08	0.982	1.147
	LTE Band 38	20M	QPSK	100	0	Back	5mm	ON	38150	2610	20.00	20.50	1.122	62.9	1.006	0.03	0.993	1.121
	LTE Band 38	20M	QPSK	1	99	Left Side	5mm	ON	38150	2610	20.23	20.50	1.064	62.9	1.006	-0.03	0.039	0.042
	LTE Band 38	20M	QPSK	50	50	Left Side	5mm	ON	38150	2610	20.04	20.50	1.112	62.9	1.006	-0.01	0.009	0.010
	LTE Band 38	20M	QPSK	1	99	Right Side	5mm	ON	38150	2610	20.23	20.50	1.064	62.9	1.006	-0.1	0.098	0.105
	LTE Band 38	20M	QPSK	50	50	Right Side	5mm	ON	38150	2610	20.04	20.50	1.112	62.9	1.006	0.05	0.106	0.119
	LTE Band 38	20M	QPSK	1	99	Bottom Side	5mm	ON	38150	2610	20.23	20.50	1.064	62.9	1.006	0.11	0.313	0.335
	LTE Band 38	20M	QPSK	50	50	Bottom Side	5mm	ON	38150	2610	20.04	20.50	1.112	62.9	1.006	0.11	0.320	0.358
	LTE Band 41_PC3	20M	QPSK	1	0	Front	5mm	ON	41055	2636.5	16.90	17.00	1.023	62.9	1.006	0.04	0.431	0.444
	LTE Band 41_PC3	20M	QPSK	50	50	Front	5mm	ON	39750	2506	16.82	17.00	1.042	62.9	1.006	-0.09	0.367	0.385
	LTE Band 41_PC3	20M	QPSK	1	0	Back	5mm	ON	41055	2636.5	16.90	17.00	1.023	62.9	1.006	-0.1	0.693	0.713
	LTE Band 41_PC3	20M	QPSK	1	0	Back	5mm	ON	39750	2506	16.82	17.00	1.042	62.9	1.006	-0.02	0.584	0.612
	LTE Band 41_PC3	20M	QPSK	1	0	Back	5mm	ON	40185	2549.5	16.73	17.00	1.064	62.9	1.006	-0.09	0.586	0.627
	LTE Band 41_PC3	20M	QPSK	1	0	Back	5mm	ON	40620	2593	16.73	17.00	1.064	62.9	1.006	-0.02	0.595	0.637
	LTE Band 41_PC3	20M	QPSK	1	0	Back	5mm	ON	41490	2680	16.85	17.00	1.035	62.9	1.006	0.01	0.753	0.784
	LTE Band 41_PC3	20M	QPSK	50	50	Back	5mm	ON	39750	2506	16.53	17.00	1.114	62.9	1.006	-0.02	0.492	0.552
	LTE Band 41_PC3	20M	QPSK	50	50	Back	5mm	ON	40185	2549.5	16.40	17.00	1.148	62.9	1.006	0	0.484	0.559
	LTE Band 41_PC3	20M	QPSK	50	50	Back	5mm	ON	40620	2593	16.23	17.00	1.194	62.9	1.006	-0.01	0.499	0.599
	LTE Band 41_PC3	20M	QPSK	50	50	Back	5mm	ON	41055	2636.5	16.40	17.00	1.148	62.9	1.006	0.06	0.592	0.684
	LTE Band 41_PC3	20M	QPSK	50	50	Back	5mm	ON	41490	2680	16.28	17.00	1.180	62.9	1.006	0.09	0.620	0.736
	LTE Band 41_PC3	20M	QPSK	100	0	Back	5mm	ON	39750	2506	16.45	17.00	1.135	62.9	1.006	-0.04	0.465	0.531
	LTE Band 41_PC3	20M	QPSK	1	0	Left Side	5mm	ON	41055	2636.5	16.90	17.00	1.023	62.9	1.006	-0.04	0.040	0.041
	LTE Band 41_PC3	20M	QPSK	50	50	Left Side	5mm	ON	39750	2506	16.53	17.00	1.114	62.9	1.006	0	0.008	0.009
	LTE Band 41_PC3	20M	QPSK	1	0	Right Side	5mm	ON	41055	2636.5	16.90	17.00	1.023	62.9	1.006	-0.15	0.101	0.104
	LTE Band 41_PC3	20M	QPSK	50	50	Right Side	5mm	ON	39750	2506	16.53	17.00	1.114	62.9	1.006	0.03	0.096	0.108
	LTE Band 41_PC3	20M	QPSK	1	0	Bottom Side	5mm	ON	41055	2636.5	16.90	17.00	1.023	62.9	1.006	0.1	0.321	0.330
	LTE Band 41_PC3	20M	QPSK	50	50	Bottom Side	5mm	ON	39750	2506	16.53	17.00	1.114	62.9	1.006	0.13	0.290	0.325
45	LTE Band 41_PC2	20M	QPSK	1	0	Back	5mm	ON	41490	2680	19.92	21.50	1.439	42.9	1.009	-0.01	0.961	1.395
	LTE Band 41_PC2	20M	QPSK	1	0	Back	5mm	ON	39750	2506	20.01	21.50	1.409	42.9	1.009	-0.03	0.936	1.331
	LTE Band 41_PC2	20M	QPSK	1	0	Back	5mm	ON	40185	2549.5	19.99	21.50	1.416	42.9	1.009	0.02	0.911	1.301
	LTE Band 41_PC2	20M	QPSK	1	0	Back	5mm	ON	40620	2593	19.94	21.50	1.432	42.9	1.009	0.05	0.905	1.308
	LTE Band 41_PC2	20M	QPSK	1	0	Back	5mm	ON	41055	2636.5	20.42	21.50	1.282	42.9	1.009	-0.11	0.923	1.194
	LTE Band 41_UL CA	20M	QPSK	1	0	Back	5mm	ON	40185 + 39987	2549.5 + 2529.7	16.82	17.00	1.042	62.9	1.006	0.13	0.760	0.797

PC3: 1CC uplink, Power Class 3
 PC2: 1CC uplink, Power Class 2
 UL CA: 2CC Uplink, Power Class 3



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	0.12	0.768	0.788
46	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	0.11	0.960	0.985
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	OFF	6	2437	18.46	18.50	1.009	97.62	1.024	0.15	0.784	0.810
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	OFF	11	2462	18.28	18.50	1.052	97.62	1.024	0.01	0.789	0.850
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	0.09	0.038	0.039
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	0.11	0.385	0.395
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.02	0.542	0.556
	WLAN5GHz	802.11a 6Mbps	Front	5mm	ON	149	5745	14.44	14.50	1.013	86.26	1.159	0.06	0.374	0.439
	WLAN5GHz	802.11a 6Mbps	Back	5mm	ON	149	5745	14.44	14.50	1.013	86.26	1.159	-0.1	0.781	0.917
	WLAN5GHz	802.11a 6Mbps	Back	5mm	ON	157	5785	14.42	14.50	1.018	86.26	1.159	-0.11	0.751	0.886
	WLAN5GHz	802.11a 6Mbps	Left Side	5mm	ON	149	5745	14.44	14.50	1.013	86.26	1.159	-0.13	0.041	0.048
	WLAN5GHz	802.11a 6Mbps	Right Side	5mm	ON	149	5745	14.44	14.50	1.013	86.26	1.159	0.01	0.032	0.038
47	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	ON	149	5745	14.44	14.50	1.013	86.26	1.159	0.11	1.150	1.351
	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	ON	157	5785	14.42	14.50	1.018	86.26	1.159	0.14	1.090	1.286
	WLAN5GHz	802.11a 6Mbps	Top Side	5mm	ON	165	5825	14.11	14.50	1.093	86.26	1.159	0.1	0.942	1.194

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	00	2402	11.82	12.00	1.042	-0.09	0.087	0.091
48	Bluetooth	1Mbps	Back	5mm	00	2402	11.82	12.00	1.042	0.14	0.152	0.158
	Bluetooth	1Mbps	Left Side	5mm	00	2402	11.82	12.00	1.042	0.14	0.006	0.007
	Bluetooth	1Mbps	Right Side	5mm	00	2402	11.82	12.00	1.042	0.02	0.070	0.073
	Bluetooth	1Mbps	Top Side	5mm	00	2402	11.82	12.00	1.042	0.03	0.076	0.079

14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	5mm	-	OFF	251	848.8	26.34	27.50	1.306	-0.19	0.452	0.590
49	GSM850	GPRS (4 Tx slots)	Back	5mm	-	OFF	251	848.8	26.34	27.50	1.306	0.06	0.910	1.189
	GSM850	GPRS (4 Tx slots)	Back	5mm	-	OFF	128	824.2	26.25	27.50	1.334	0.01	0.466	0.621
	GSM850	GPRS (4 Tx slots)	Back	5mm	-	OFF	189	836.4	26.33	27.50	1.309	-0.02	0.543	0.711
	GSM1900	GPRS (4 Tx slots)	Front	5mm	-	ON	661	1880	19.34	19.50	1.038	0.06	0.396	0.411
50	GSM1900	GPRS (4 Tx slots)	Back	5mm	-	ON	661	1880	19.34	19.50	1.038	0.07	0.689	0.715

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	-	ON	9400	1880	16.50	16.50	1.000	-0.12	0.710	0.710
	WCDMA II	RMC 12.2Kbps	Back	5mm	-	ON	9400	1880	16.50	16.50	1.000	-0.03	1.170	1.170
51	WCDMA II	RMC 12.2Kbps	Back	5mm	-	ON	9262	1852.4	16.20	16.50	1.072	-0.09	1.200	1.286
	WCDMA II	RMC 12.2Kbps	Back	5mm	-	ON	9538	1907.6	16.46	16.50	1.009	-0.07	1.040	1.050
	WCDMA II	RMC 12.2Kbps	Back	5mm	Headset	ON	9262	1852.4	16.50	16.50	1.000	-0.09	1.190	1.190
	WCDMA IV	RMC 12.2Kbps	Front	5mm	-	ON	1513	1752.6	15.40	16.00	1.148	0.02	0.682	0.783
52	WCDMA IV	RMC 12.2Kbps	Back	5mm	-	ON	1513	1752.6	15.40	16.00	1.148	-0.15	1.260	1.447
	WCDMA IV	RMC 12.2Kbps	Back	5mm	-	ON	1312	1712.4	15.15	16.00	1.216	-0.12	1.020	1.241
	WCDMA IV	RMC 12.2Kbps	Back	5mm	-	ON	1413	1732.6	15.34	16.00	1.164	-0.14	1.180	1.374
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Headset	ON	1513	1752.6	15.40	16.00	1.148	-0.19	1.250	1.435
	WCDMA V	RMC 12.2Kbps	Front	5mm	-	ON	4233	846.6	22.13	22.50	1.089	-0.01	0.724	0.788
53	WCDMA V	RMC 12.2Kbps	Back	5mm	-	ON	4233	846.6	22.13	22.50	1.089	-0.08	0.967	1.053
	WCDMA V	RMC 12.2Kbps	Back	5mm	-	ON	4132	826.4	22.12	22.50	1.091	-0.08	0.806	0.880
	WCDMA V	RMC 12.2Kbps	Back	5mm	-	ON	4182	836.4	22.04	22.50	1.112	-0.04	0.890	0.989

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	1xRTT RC3 SO32	Front	5mm	-	OFF	777	848.31	23.85	24.50	1.161	-0.04	0.648	0.753
54	CDMA BC0	1xRTT RC3 SO32	Back	5mm	-	OFF	777	848.31	23.85	24.50	1.161	-0.08	0.924	1.073
	CDMA BC0	1xRTT RC3 SO32	Back	5mm	-	OFF	1013	824.7	23.68	24.50	1.208	0	0.809	0.977
	CDMA BC0	1xRTT RC3 SO32	Back	5mm	-	OFF	384	836.52	23.81	24.50	1.172	0.06	0.855	1.002
	CDMA BC1	1xRTT RC3 SO32	Front	5mm	-	ON	25	1851.25	18.70	19.00	1.072	-0.05	0.690	0.739
	CDMA BC1	1xRTT RC3 SO32	Back	5mm	-	ON	25	1851.25	18.70	19.00	1.072	-0.04	1.290	1.382
55	CDMA BC1	1xRTT RC3 SO32	Back	5mm	-	ON	600	1880	18.56	19.00	1.107	0.02	1.280	1.416
	CDMA BC1	1xRTT RC3 SO32	Back	5mm	-	ON	1175	1908.75	18.25	19.00	1.189	-0.06	1.180	1.402
	CDMA BC1	1xRTT RC3 SO32	Back	5mm	Headset	ON	600	1880	18.56	19.00	1.107	-0.07	1.240	1.372
	CDMA BC10	1xRTT RC3 SO32	Front	5mm	-	OFF	580	820.5	23.91	24.50	1.146	0.01	0.624	0.715
56	CDMA BC10	1xRTT RC3 SO32	Back	5mm	-	OFF	580	820.5	23.91	24.50	1.146	0.05	0.879	1.007



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	-	ON	19100	1900	16.50	16.50	1.000	-0.11	0.587	0.587
	LTE Band 2	20M	QPSK	50	0	Front	5mm	-	ON	18900	1880	16.41	16.50	1.021	-0.07	0.593	0.605
	LTE Band 2	20M	QPSK	1	0	Back	5mm	-	ON	19100	1900	16.50	16.50	1.000	0.07	1.050	1.050
	LTE Band 2	20M	QPSK	1	0	Back	5mm	-	ON	18700	1860	16.17	16.50	1.079	-0.08	1.010	1.090
	LTE Band 2	20M	QPSK	1	0	Back	5mm	-	ON	18900	1880	16.37	16.50	1.030	-0.02	0.921	0.949
	LTE Band 2	20M	QPSK	50	0	Back	5mm	-	ON	18900	1880	16.41	16.50	1.021	-0.11	1.050	1.072
57	LTE Band 2	20M	QPSK	50	0	Back	5mm	-	ON	18700	1860	16.06	16.50	1.107	-0.1	1.020	1.129
	LTE Band 2	20M	QPSK	50	0	Back	5mm	-	ON	19100	1900	16.37	16.50	1.030	-0.05	0.919	0.947
	LTE Band 2	20M	QPSK	100	0	Back	5mm	-	ON	18900	1880	16.28	16.50	1.052	0.01	1.050	1.105
	LTE Band 4	20M	QPSK	1	99	Front	5mm	-	ON	20175	1732.5	15.79	16.50	1.178	-0.05	0.570	0.671
	LTE Band 4	20M	QPSK	50	24	Front	5mm	-	ON	20175	1732.5	15.68	16.50	1.208	-0.03	0.465	0.562
58	LTE Band 4	20M	QPSK	1	99	Back	5mm	-	ON	20175	1732.5	15.79	16.50	1.178	-0.03	0.966	1.138
	LTE Band 4	20M	QPSK	50	24	Back	5mm	-	ON	20175	1732.5	15.68	16.50	1.208	-0.04	0.806	0.973
	LTE Band 4	20M	QPSK	100	0	Back	5mm	-	ON	20175	1732.5	15.76	16.50	1.186	-0.07	0.788	0.934
	LTE Band 5	10M	QPSK	1	49	Front	5mm	-	ON	20525	836.5	21.95	23.00	1.274	-0.02	0.604	0.769
	LTE Band 5	10M	QPSK	25	25	Front	5mm	-	ON	20525	836.5	21.76	23.00	1.330	0.02	0.348	0.463
59	LTE Band 5	10M	QPSK	1	49	Back	5mm	-	ON	20525	836.5	21.95	23.00	1.274	0.05	0.792	1.009
	LTE Band 5	10M	QPSK	25	25	Back	5mm	-	ON	20525	836.5	21.76	23.00	1.330	-0.05	0.491	0.653
	LTE Band 5	10M	QPSK	50	0	Back	5mm	-	ON	20525	836.5	21.74	23.00	1.337	-0.1	0.472	0.631
	LTE Band 7	20M	QPSK	1	49	Front	5mm	-	ON	20850	2510	17.86	18.50	1.159	-0.07	0.655	0.759
	LTE Band 7	20M	QPSK	50	50	Front	5mm	-	ON	21350	2560	17.85	18.50	1.161	-0.09	0.588	0.683
	LTE Band 7	20M	QPSK	1	49	Back	5mm	-	ON	20850	2510	17.86	18.50	1.159	-0.06	0.877	1.016
	LTE Band 7	20M	QPSK	1	49	Back	5mm	-	ON	21100	2535	17.71	18.50	1.199	-0.05	0.873	1.047
60	LTE Band 7	20M	QPSK	1	49	Back	5mm	-	ON	21350	2560	17.62	18.50	1.225	-0.06	0.913	1.118
	LTE Band 7	20M	QPSK	50	0	Back	5mm	-	ON	21350	2560	17.85	18.50	1.161	0.03	0.686	0.797
	LTE Band 7	20M	QPSK	100	0	Back	5mm	-	ON	20850	2510	17.82	18.50	1.169	-0.04	0.673	0.787
	LTE Band 12	10M	QPSK	1	49	Front	5mm	-	OFF	23095	707.5	23.07	24.00	1.239	-0.12	0.335	0.415
	LTE Band 12	10M	QPSK	25	0	Front	5mm	-	OFF	23095	707.5	21.94	23.00	1.276	0.06	0.178	0.227
61	LTE Band 12	10M	QPSK	1	49	Back	5mm	-	OFF	23095	707.5	23.07	24.00	1.239	-0.09	0.625	0.774
	LTE Band 12	10M	QPSK	25	0	Back	5mm	-	OFF	23095	707.5	21.94	23.00	1.276	-0.04	0.338	0.431
	LTE Band 13	10M	QPSK	1	49	Front	5mm	-	OFF	23230	782	22.94	24.00	1.276	-0.13	0.549	0.701
	LTE Band 13	10M	QPSK	25	0	Front	5mm	-	OFF	23230	782	21.93	23.00	1.279	-0.03	0.292	0.374
62	LTE Band 13	10M	QPSK	1	49	Back	5mm	-	OFF	23230	782	22.94	24.00	1.276	-0.18	0.832	1.062
	LTE Band 13	10M	QPSK	25	0	Back	5mm	-	OFF	23230	782	21.93	23.00	1.279	-0.05	0.431	0.551
	LTE Band 13	10M	QPSK	50	0	Back	5mm	-	OFF	23230	782	21.98	23.00	1.265	-0.11	0.445	0.563
	LTE Band 25	20M	QPSK	1	0	Front	5mm	-	ON	26340	1880	17.03	17.50	1.114	-0.15	0.576	0.642
	LTE Band 25	20M	QPSK	50	0	Front	5mm	-	ON	26340	1880	17.01	17.50	1.119	-0.07	0.594	0.665
	LTE Band 25	20M	QPSK	1	0	Back	5mm	-	ON	26340	1880	17.03	17.50	1.114	0.07	1.030	1.148
	LTE Band 25	20M	QPSK	1	0	Back	5mm	-	ON	26140	1860	16.91	17.50	1.146	-0.08	1.010	1.157
	LTE Band 25	20M	QPSK	1	0	Back	5mm	-	ON	26590	1905	17.01	17.50	1.119	-0.02	0.948	1.061
	LTE Band 25	20M	QPSK	50	0	Back	5mm	-	ON	26340	1880	17.01	17.50	1.119	-0.12	1.060	1.187
63	LTE Band 25	20M	QPSK	50	0	Back	5mm	-	ON	26140	1860	16.76	17.50	1.186	-0.1	1.020	1.209
	LTE Band 25	20M	QPSK	50	0	Back	5mm	-	ON	26590	1905	16.99	17.50	1.125	-0.05	0.924	1.039
	LTE Band 25	20M	QPSK	100	0	Back	5mm	-	ON	26340	1880	16.96	17.50	1.132	0.01	1.060	1.200
	LTE Band 25	20M	QPSK	50	0	Back	5mm	Headset	ON	26140	1860	16.76	17.50	1.186	-0.05	1.010	1.198
	LTE Band 26	15M	QPSK	1	74	Front	5mm	-	OFF	26865	831.5	23.14	24.00	1.219	-0.15	0.600	0.731
	LTE Band 26	15M	QPSK	36	0	Front	5mm	-	OFF	26865	831.5	22.33	23.00	1.167	0.01	0.345	0.403
64	LTE Band 26	15M	QPSK	1	74	Back	5mm	-	OFF	26865	831.5	23.14	24.00	1.219	-0.05	0.965	1.176
	LTE Band 26	15M	QPSK	36	0	Back	5mm	-	OFF	26865	831.5	22.33	23.00	1.167	-0.05	0.488	0.569
	LTE Band 26	15M	QPSK	75	0	Back	5mm	-	OFF	26865	831.5	22.18	23.00	1.208	-0.1	0.469	0.566



Table with 18 columns: Plot No., Band, BW (MHz), Modulation, RB Size, RB offset, Test Position, Gap (mm), Headset, Power Reduction, Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 1g SAR (W/kg), Reported 1g SAR (W/kg). Rows include LTE Band 66 and LTE Band 71 configurations.

<TDD LTE SAR>

Table with 18 columns: Plot No., Band, BW (MHz), Modulation, RB Size, RB offset, Test Position, Gap (mm), Headset, Power Reduction, Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Duty Cycle %, Duty Cycle Scaling Factor, Power Drift (dB), Measured 1g SAR (W/kg), Reported 1g SAR (W/kg). Rows include LTE Band 38 and LTE Band 41 configurations.

PC3: 1CC uplink, Power Class 3
PC2: 1CC uplink, Power Class 2
UL CA: 2CC Uplink, Power Class 3



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	0.12	0.768	0.788
69	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	0.11	0.960	0.985
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	OFF	6	2437	18.46	18.50	1.009	97.62	1.024	0.15	0.784	0.810
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	OFF	11	2462	18.28	18.50	1.052	97.62	1.024	0.01	0.789	0.850
	WLAN5GHz	802.11a 6Mbps	Front	5mm	-	ON	60	5300	14.92	15.00	1.018	86.26	1.159	-0.03	0.280	0.330
70	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	ON	60	5300	14.92	15.00	1.018	86.26	1.159	-0.07	0.963	1.136
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	ON	52	5260	14.84	15.00	1.037	86.26	1.159	-0.1	0.769	0.924
	WLAN5GHz	802.11a 6Mbps	Front	5mm	-	ON	144	5720	14.97	15.00	1.006	86.26	1.159	0.13	0.425	0.496
71	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	ON	144	5720	14.97	15.00	1.006	86.26	1.159	-0.06	0.985	1.149
	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	ON	116	5580	14.88	15.00	1.028	86.26	1.159	-0.1	0.836	0.996
	WLAN5GHz	802.11a 6Mbps	Front	5mm	-	ON	165	5825	14.95	15.00	1.011	86.26	1.159	0.01	0.518	0.607
72	WLAN5GHz	802.11a 6Mbps	Back	5mm	-	ON	165	5825	14.95	15.00	1.011	86.26	1.159	0	0.668	0.783

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	-	00	2402	11.82	12.00	1.042	-0.09	0.087	0.091
73	Bluetooth	1Mbps	Back	5mm	-	00	2402	11.82	12.00	1.042	0.14	0.152	0.158



14.4 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required

<LTE Band 41 Linearity Data for Head>

Table with 3 columns: Parameter, LTE Band 41 (Power Class 3), and LTE Band 41 (Power Class 2). Rows include Maximum Tune up Power (dBm), Reported 1g SAR (W/kg), Duty Cycle, Frame Averaged (mW), Linearity SAR(W/kg), and % deviation from expected linearity.

<LTE Band 41 Linearity Data for Hotspot and Body-worn>

Table with 3 columns: Parameter, LTE Band 41 (Power Class 3), and LTE Band 41 (Power Class 2). Rows include Maximum Tune up Power (dBm), Reported 1g SAR (W/kg), Duty Cycle, Frame Averaged (mW), Linearity SAR(W/kg), and % deviation from expected linearity.

14.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.09	1.310		1.345
2nd	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	OFF	1	2412	18.49	18.50	1.002	97.62	1.024	-0.05	1.310	1.00	1.345
1st	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	144	5720	13.96	14.00	1.009	86.26	1.159	0.07	1.090		1.274
2nd	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	144	5720	13.96	14.00	1.009	86.26	1.159	-0.16	0.982	1.11	1.148
1st	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	165	5825	13.76	14.00	1.056	86.26	1.159	-0.02	1.160		1.420
2nd	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	ON	165	5825	13.76	14.00	1.056	86.26	1.159	-0.11	1.140	1.02	1.396

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA IV	RMC 12.2Kbps	Back	5mm	ON	1513	1752.6	15.40	16.00	1.148	-	-	-0.15	1.260		1.447
2nd	WCDMA IV	RMC 12.2Kbps	Back	5mm	ON	1513	1752.6	15.40	16.00	1.148	-	-	-0.04	1.210	1.04	1.389
1st	LTE Band 13	10M_QPSK_1_49	Right Side	5mm	OFF	23230	782	22.94	24.00	1.276	-	-	-0.18	0.938		1.197
2nd	LTE Band 13	10M_QPSK_1_49	Right Side	5mm	OFF	23230	782	22.94	24.00	1.276	-	-	0.12	0.918	1.02	1.172
1st	LTE Band 26	15M_QPSK_1_74	Right Side	5mm	OFF	26865	831.5	23.14	24.00	1.219	-	-	-0.11	0.974		1.187
2nd	LTE Band 26	15M_QPSK_1_74	Right Side	5mm	OFF	26865	831.5	23.14	24.00	1.219	-	-	-0.03	0.966	1.01	1.178
1st	LTE Band 38	20M_QPSK_1_99	Back	5mm	ON	38000	2595	20.11	20.50	1.094	62.9	1.006	-0.06	1.180		1.299
2nd	LTE Band 38	20M_QPSK_1_99	Back	5mm	ON	38000	2595	20.11	20.50	1.094	62.9	1.006	-0.15	1.160	1.02	1.277
1st	CDMA BC1	1xRTT RC3 SO32	Back	5mm	ON	600	1880	18.56	19.00	1.107	-	-	0.02	1.280		1.416
2nd	CDMA BC1	1xRTT RC3 SO32	Back	5mm	ON	600	1880	18.56	19.00	1.107	-	-	-0.08	1.260	1.02	1.394
1st	WLAN5GHz	802.11a 6Mbps	Back	5mm	ON	60	5300	14.92	15.00	1.018	86.26	1.159	-0.07	0.963		1.136
2nd	WLAN5GHz	802.11a 6Mbps	Back	5mm	ON	60	5300	14.92	15.00	1.018	86.26	1.159	-0.1	0.951	1.01	1.122

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	CDMA + WLAN2.4GHz	Yes	Yes	Yes
5.	LTE + WLAN2.4GHz	Yes	Yes	Yes
6.	GSM Voice + Bluetooth	Yes	Yes	
7.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes
8.	WCDMA+ Bluetooth	Yes	Yes	Yes
9.	CDMA+ Bluetooth	Yes	Yes	Yes
10.	LTE + Bluetooth	Yes	Yes	Yes
11.	GSM Voice + WLAN5GHz	Yes	Yes	
12.	GPRS/EDGE + WLAN5GHz	Yes	Yes	Yes
13.	WCDMA + WLAN5GHz	Yes	Yes	Yes
14.	CDMA + WLAN5GHz	Yes	Yes	Yes
15.	LTE + WLAN5GHz	Yes	Yes	Yes

General Note:

1. All licensed modes share the same antenna part and cannot transmit simultaneously.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration, test position and test distance. The worst SAR value for each configuration was used for summation, regardless of whether the transmitter is operation in difference power level. Therefore, the following summations represent the absolute worst cases for simultaneous transmission for the device.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.3.



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2	1+3	1+4	1+2	1+2	1+3	1+3
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM	GSM850	Right Cheek	0.477	0.631	1.383	0.108	1.108	1.860	0.585			0.04	Case 18
		Right Tilted	0.200	0.646	1.122	0.114	0.846	1.322	0.314				
		Left Cheek	0.478	1.345	1.420	0.225	1.823	1.898	0.703	0.03	Case 1	0.04	Case 19
		Left Tilted	0.221	0.916	1.195	0.165	1.137	1.416	0.386				
	GSM1900	Right Cheek	0.207	0.631	1.383	0.108	0.838	1.590	0.315				
		Right Tilted	0.149	0.646	1.122	0.114	0.795	1.271	0.263				
		Left Cheek	0.260	1.345	1.420	0.225	1.605	1.680	0.485	0.02	Case 2	0.02	Case 21
		Left Tilted	0.168	0.916	1.195	0.165	1.084	1.363	0.333				
WCDMA	WCDMA II	Right Cheek	0.326	0.631	1.383	0.108	0.957	1.709	0.434			0.03	Case 22
		Right Tilted	0.261	0.646	1.122	0.114	0.907	1.383	0.375				
		Left Cheek	0.494	1.345	1.420	0.225	1.839	1.914	0.719	0.03	Case 3	0.03	Case 23
		Left Tilted	0.280	0.916	1.195	0.165	1.196	1.475	0.445				
	WCDMA IV	Right Cheek	0.337	0.631	1.383	0.108	0.968	1.720	0.445			0.03	Case 24
		Right Tilted	0.336	0.646	1.122	0.114	0.982	1.458	0.450				
		Left Cheek	0.482	1.345	1.420	0.225	1.827	1.902	0.707	0.03	Case 4	0.03	Case 25
		Left Tilted	0.241	0.916	1.195	0.165	1.157	1.436	0.406				
	WCDMA V	Right Cheek	0.785	0.631	1.383	0.108	1.416	2.168	0.893			0.04	Case 26
		Right Tilted	0.377	0.646	1.122	0.114	1.023	1.499	0.491				
		Left Cheek	0.345	1.345	1.420	0.225	1.690	1.765	0.570	0.03	Case 5	0.03	Case 27
		Left Tilted	0.054	0.916	1.195	0.165	0.970	1.249	0.219				
CDMA	CDMA BC0	Right Cheek	0.596	0.631	1.383	0.108	1.227	1.979	0.704			0.04	Case 28
		Right Tilted	0.260	0.646	1.122	0.114	0.906	1.382	0.374				
		Left Cheek	0.582	1.345	1.420	0.225	1.927	2.002	0.807	0.04	Case 6	0.04	Case 29
		Left Tilted	0.306	0.916	1.195	0.165	1.222	1.501	0.471				
	CDMA BC1	Right Cheek	0.376	0.631	1.383	0.108	1.007	1.759	0.484			0.03	Case 30
		Right Tilted	0.151	0.646	1.122	0.114	0.797	1.273	0.265				
		Left Cheek	0.386	1.345	1.420	0.225	1.731	1.806	0.611	0.03	Case 7	0.03	Case 31
		Left Tilted	0.250	0.916	1.195	0.165	1.166	1.445	0.415				
	CDMA BC10	Right Cheek	0.581	0.631	1.383	0.108	1.212	1.964	0.689			0.04	Case 32
		Right Tilted	0.251	0.646	1.122	0.114	0.897	1.373	0.365				
		Left Cheek	0.558	1.345	1.420	0.225	1.903	1.978	0.783	0.04	Case 8	0.04	Case 33
		Left Tilted	0.344	0.916	1.195	0.165	1.260	1.539	0.509				



WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4	1+2	1+2	1+3	1+3	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed	Summed	Summed	SPLSR	Case No	SPLSR	Case No	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	LTE Band 2	Right Cheek	0.387	0.631	1.383	0.108	1.018	1.770	0.495			0.03	Case 34
		Right Tilted	0.208	0.646	1.122	0.114	0.854	1.330	0.322				
		Left Cheek	0.378	1.345	1.420	0.225	1.723	1.798	0.603	0.02	Case 9	0.03	Case 35
		Left Tilted	0.232	0.916	1.195	0.165	1.148	1.427	0.397				
	LTE Band 4	Right Cheek	0.223	0.631	1.383	0.108	0.854	1.606	0.331			0.03	Case 36
		Right Tilted	0.214	0.646	1.122	0.114	0.860	1.336	0.328				
		Left Cheek	0.485	1.345	1.420	0.225	1.830	1.905	0.710	0.03	Case 10	0.03	Case 37
		Left Tilted	0.170	0.916	1.195	0.165	1.086	1.365	0.335				
	LTE Band 5	Right Cheek	0.666	0.631	1.383	0.108	1.297	2.049	0.774			0.04	Case 38
		Right Tilted	0.266	0.646	1.122	0.114	0.912	1.388	0.380				
		Left Cheek	0.474	1.345	1.420	0.225	1.819	1.894	0.699	0.04	Case 11	0.04	Case 39
		Left Tilted	0.320	0.916	1.195	0.165	1.236	1.515	0.485				
	LTE Band 7	Right Cheek	0.421	0.631	1.383	0.108	1.052	1.804	0.529			0.03	Case 40
		Right Tilted	0.094	0.646	1.122	0.114	0.740	1.216	0.208				
		Left Cheek	0.163	1.345	1.420	0.225	1.508	1.583	0.388				
		Left Tilted	0.120	0.916	1.195	0.165	1.036	1.315	0.285				
	LTE Band 12	Right Cheek	0.334	0.631	1.383	0.108	0.965	1.717	0.442			0.03	Case 41
		Right Tilted	0.156	0.646	1.122	0.114	0.802	1.278	0.270				
		Left Cheek	0.357	1.345	1.420	0.225	1.702	1.777	0.582	0.03	Case 12	0.03	Case 42
		Left Tilted	0.240	0.916	1.195	0.165	1.156	1.435	0.405				
	LTE Band 13	Right Cheek	0.512	0.631	1.383	0.108	1.143	1.895	0.620			0.04	Case 43
		Right Tilted	0.258	0.646	1.122	0.114	0.904	1.380	0.372				
		Left Cheek	0.537	1.345	1.420	0.225	1.882	1.957	0.762	0.04	Case 13	0.04	Case 44
		Left Tilted	0.351	0.916	1.195	0.165	1.267	1.546	0.516				
	LTE Band 25	Right Cheek	0.249	0.631	1.383	0.108	0.880	1.632	0.357			0.03	Case 47
		Right Tilted	0.201	0.646	1.122	0.114	0.847	1.323	0.315				
		Left Cheek	0.299	1.345	1.420	0.225	1.644	1.719	0.524	0.03	Case 15	0.03	Case 48
		Left Tilted	0.225	0.916	1.195	0.165	1.141	1.420	0.390				
	LTE Band 26	Right Cheek	0.678	0.631	1.383	0.108	1.309	2.061	0.786			0.04	Case 49
		Right Tilted	0.435	0.646	1.122	0.114	1.081	1.557	0.549				
		Left Cheek	0.708	1.345	1.420	0.225	2.053	2.128	0.933	0.04	Case 16	0.04	Case 50
		Left Tilted	0.386	0.916	1.195	0.165	1.302	1.581	0.551				
	LTE Band 38	Right Cheek	0.247	0.631	1.383	0.108	0.878	1.630	0.355			0.03	Case 51
		Right Tilted	0.039	0.646	1.122	0.114	0.685	1.161	0.153				
		Left Cheek	0.082	1.345	1.420	0.225	1.427	1.502	0.307				
		Left Tilted	0.032	0.916	1.195	0.165	0.948	1.227	0.197				
	LTE Band 41	Right Cheek	0.374	0.631	1.383	0.108	1.005	1.757	0.482			0.03	Case 55
		Right Tilted	0.082	0.646	1.122	0.114	0.728	1.204	0.196				
		Left Cheek	0.217	1.345	1.420	0.225	1.562	1.637	0.442			0.04	Case 56
		Left Tilted	0.157	0.916	1.195	0.165	1.073	1.352	0.322				
LTE Band 66	Right Cheek	0.205	0.631	1.383	0.108	0.836	1.588	0.313					
	Right Tilted	0.198	0.646	1.122	0.114	0.844	1.320	0.312					
	Left Cheek	0.290	1.345	1.420	0.225	1.635	1.710	0.515	0.02	Case 17	0.04	Case 52	
	Left Tilted	0.033	0.916	1.195	0.165	0.949	1.228	0.198					
LTE Band 71	Right Cheek	0.166	0.631	1.383	0.108	0.797	1.549	0.274					
	Right Tilted	0.092	0.646	1.122	0.114	0.738	1.214	0.206					
	Left Cheek	0.172	1.345	1.420	0.225	1.517	1.592	0.397					
	Left Tilted	0.088	0.916	1.195	0.165	1.004	1.283	0.253					



15.2 Hotspot & Body-worn Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4	1+2	1+2	1+3	1+3	1+4	1+4
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No	SPLSR	Case No
GSM	GSM850	Front	0.590	0.788	0.607	0.091	1.378	1.197	0.681					
		Back	1.189	0.985	1.149	0.158	2.174	2.338	1.347	0.03	Case 57	0.03	Case 81	
		Left side	0.674				0.674	0.674	0.674					
		Right side	0.728	0.395	0.038	0.073	1.123	0.766	0.801					
		Bottom side	0.148				0.148	0.148	0.148					
	GSM1900	Front	0.411	0.788	0.607	0.091	1.199	1.018	0.502					
		Back	0.715	0.985	1.149	0.158	1.700	1.864	0.873	0.02	Case 58	0.02	Case 82	
		Left side	0.064				0.064	0.064	0.064					
		Right side	0.055	0.395	0.038	0.073	0.450	0.093	0.128					
		Bottom side	0.575				0.575	0.575	0.575					
WCDMA	WCDMA II	Front	0.710	0.788	0.607	0.091	1.498	1.317	0.801					
		Back	1.286	0.985	1.149	0.158	2.271	2.435	1.444	0.03	Case 59	0.03	Case 83	
		Left side	0.106				0.106	0.106	0.106					
		Right side	0.089	0.395	0.038	0.073	0.484	0.127	0.162					
		Bottom side	1.040				1.040	1.040	1.040					
	WCDMA IV	Front	0.783	0.788	0.607	0.091	1.571	1.390	0.874					
		Back	1.447	0.985	1.149	0.158	2.432	2.596	1.605	0.03	Case 61	0.02	Case 84	0.020
		Left side	0.131				0.131	0.131	0.131					
		Right side	0.071	0.395	0.038	0.073	0.466	0.109	0.144					
		Bottom side	1.146				1.146	1.146	1.146					
	WCDMA V	Front	0.788	0.788	0.607	0.091	1.576	1.395	0.879					
		Back	1.053	0.985	1.149	0.158	2.038	2.202	1.211	0.02	Case 63	0.02	Case 85	
		Left side	0.759				0.759	0.759	0.759					
		Right side	0.885	0.395	0.038	0.073	1.280	0.923	0.958					
		Bottom side	0.195				0.195	0.195	0.195					
CDMA	CDMA BC0	Front	0.766	0.788	0.607	0.091	1.554	1.373	0.857					
		Back	1.073	0.985	1.149	0.158	2.058	2.222	1.231	0.02	Case 65	0.03	Case 86	
		Left side	0.866				0.866	0.866	0.866					
		Right side	1.087	0.395	0.038	0.073	1.482	1.125	1.160					
		Bottom side	0.145				0.145	0.145	0.145					
	CDMA BC1	Front	0.739	0.788	0.607	0.091	1.527	1.346	0.830					
		Back	1.416	0.985	1.149	0.158	2.401	2.565	1.574	0.03	Case 67	0.03	Case 87	
		Left side	0.103				0.103	0.103	0.103					
		Right side	0.102	0.395	0.038	0.073	0.497	0.140	0.175					
		Bottom side	1.071				1.071	1.071	1.071					
	CDMA BC10	Front	0.715	0.788	0.607	0.091	1.503	1.322	0.806					
		Back	1.007	0.985	1.149	0.158	1.992	2.156	1.165	0.02	Case 68	0.02	Case 88	
		Left side	0.864				0.864	0.864	0.864					
		Right side	1.099	0.395	0.038	0.073	1.494	1.137	1.172					
		Bottom side	0.119				0.119	0.119	0.119					



WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4	1+2 SPLSR	1+2 Case No	1+3 SPLSR	1+3 Case No	1+4 SPLSR	1+4 Case No	
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)							
LTE	LTE Band 2	Front	0.605	0.788	0.607	0.091	1.393	1.212	0.696						
		Back	1.129	0.985	1.149	0.158	2.114	2.278	1.287	0.02	Case 69	0.02	Case 89		
		Left side	0.067				0.067	0.067	0.067						
		Right side	0.084	0.395	0.038	0.073	0.479	0.122	0.157						
		Bottom side	0.897				0.897	0.897	0.897						
	LTE Band 4	Front	0.671	0.788	0.607	0.091	1.459	1.278	0.762						
		Back	1.138	0.985	1.149	0.158	2.123	2.287	1.296	0.02	Case 70	0.02	Case 90		
		Left side	0.119				0.119	0.119	0.119						
		Right side	0.062	0.395	0.038	0.073	0.457	0.100	0.135						
		Bottom side	0.950				0.950	0.950	0.950						
	LTE Band 5	Front	0.769	0.788	0.607	0.091	1.557	1.376	0.860						
		Back	1.009	0.985	1.149	0.158	1.994	2.158	1.167	0.02	Case 72	0.02	Case 91		
		Left side	0.894				0.894	0.894	0.894						
		Right side	1.063	0.395	0.038	0.073	1.458	1.101	1.136						
		Bottom side	0.163				0.163	0.163	0.163						
	LTE Band 7	Front	0.759	0.788	0.607	0.091	1.547	1.366	0.850						
		Back	1.118	0.985	1.149	0.158	2.103	2.267	1.276	0.02	Case 74	0.02	Case 92		
		Left side	0.043				0.043	0.043	0.043						
		Right side	0.240	0.395	0.038	0.073	0.635	0.278	0.313						
		Bottom side	0.710				0.710	0.710	0.710						
	LTE Band 12	Front	0.415	0.788	0.607	0.091	1.203	1.022	0.506						
		Back	0.774	0.985	1.149	0.158	1.759	1.923	0.932	0.02	Case 75	0.02	Case 93		
		Left side	0.706				0.706	0.706	0.706						
		Right side	0.762	0.395	0.038	0.073	1.157	0.800	0.835						
		Bottom side	0.138				0.138	0.138	0.138						
	LTE Band 13	Front	0.701	0.788	0.607	0.091	1.489	1.308	0.792						
		Back	1.062	0.985	1.149	0.158	2.047	2.211	1.220	0.02	Case 76	0.02	Case 94		
		Left side	1.056				1.056	1.056	1.056						
Right side		1.197	0.395	0.038	0.073	1.592	1.235	1.270							
Bottom side		0.158				0.158	0.158	0.158							
LTE Band 25	Front	0.665	0.788	0.607	0.091	1.453	1.272	0.756							
	Back	1.209	0.985	1.149	0.158	2.194	2.358	1.367	0.02	Case 77	0.02	Case 95			
	Left side	0.074				0.074	0.074	0.074							
	Right side	0.092	0.395	0.038	0.073	0.487	0.130	0.165							
	Bottom side	0.964				0.964	0.964	0.964							
LTE Band 26	Front	0.731	0.788	0.607	0.091	1.519	1.338	0.822							
	Back	1.176	0.985	1.149	0.158	2.161	2.325	1.334	0.03	Case 78	0.03	Case 96			
	Left side	1.168				1.168	1.168	1.168							
	Right side	1.187	0.395	0.038	0.073	1.582	1.225	1.260							
	Bottom side	0.155				0.155	0.155	0.155							




WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2 SPLSR	1+2 Case No	1+3 SPLSR	1+3 Case No	1+4 SPLSR	1+4 Case No	
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)										
LTE	LTE Band 38	Front	0.454	0.788	0.607	0.091	1.242	1.061	0.545						
		Back	1.299	0.985	1.149	0.158	2.284	2.448	1.457	0.03	Case 80	0.03	Case 98		
		Left side	0.042				0.042	0.042	0.042						
		Right side	0.119	0.395	0.038	0.073	0.514	0.157	0.192						
		Bottom side	0.358				0.358	0.358	0.358						
	LTE Band 41	Front	0.444	0.788	0.607	0.091	1.232	1.051	0.535						
		Back	1.395	0.985	1.149	0.158	2.380	2.544	1.553	0.03	Case 103	0.03	Case 99		
		Left side	0.041				0.041	0.041	0.041						
		Right side	0.108	0.395	0.038	0.073	0.503	0.146	0.181						
		Bottom side	0.330				0.330	0.330	0.330						
	LTE Band 66	Front	0.676	0.788	0.607	0.091	1.464	1.283	0.767						
		Back	1.196	0.985	1.149	0.158	2.181	2.345	1.354	0.03	Case 79	0.03	Case 97		
		Left side	0.119				0.119	0.119	0.119						
		Right side	0.063	0.395	0.038	0.073	0.458	0.101	0.136						
		Bottom side	0.969				0.969	0.969	0.969						
	LTE Band 71	Front	0.243	0.788	0.607	0.091	1.031	0.850	0.334						
		Back	0.432	0.985	1.149	0.158	1.417	1.581	0.590						
		Left side	0.342				0.342	0.342	0.342						
		Right side	0.353	0.395	0.038	0.073	0.748	0.391	0.426						
		Bottom side	0.079				0.079	0.079	0.079						

15.3 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	GSM850	Left Cheek	0.478	0	46.6	-44.72	-3.02	74.3	1.82	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

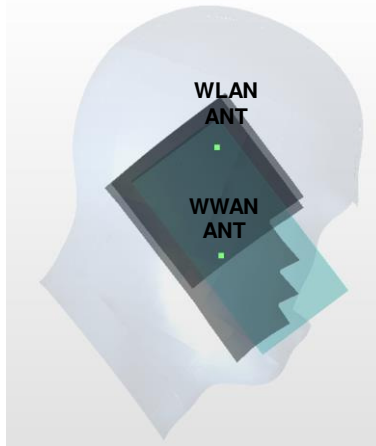


Case2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	GSM1900	Left Cheek	0.26	0	49.27	-59.01	-1.53	88.5	1.61	0.02	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

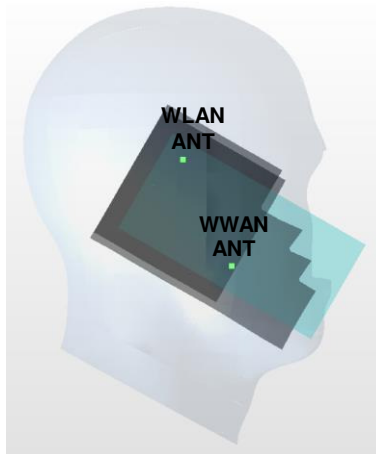


Case3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Left Cheek	0.494	0	50.89	-56.31	-1.53	86.6	1.84	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

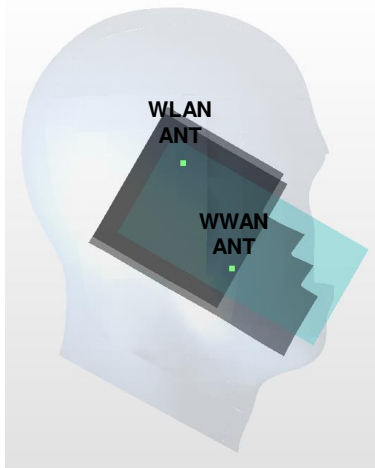


Case4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Left Cheek	0.482	0	45.83	-58.52	-1.76	86.8	1.83	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

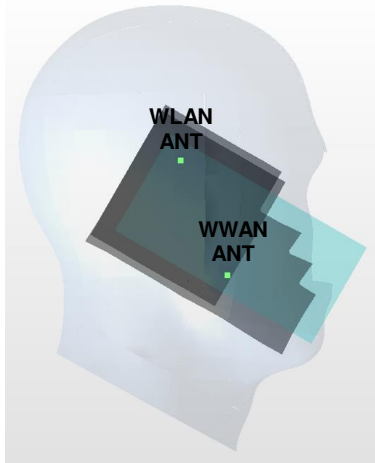


Case5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Left Cheek	0.345	0	59.73	-31.16	-1.22	69.5	1.69	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

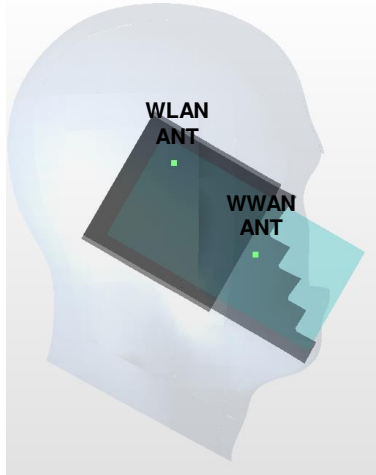


Case6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Left Cheek	0.582	0	52.82	-24.86	-3.86	60.3	1.93	0.04	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

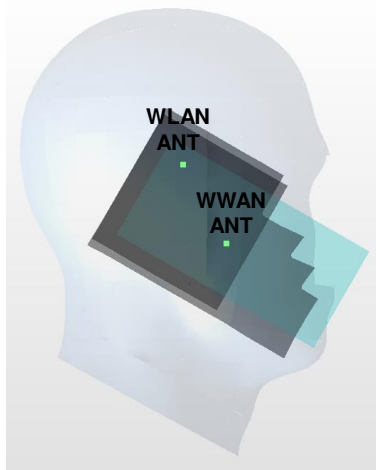


Case7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Left Cheek	0.386	0	51.45	-58.48	-1.16	88.8	1.73	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

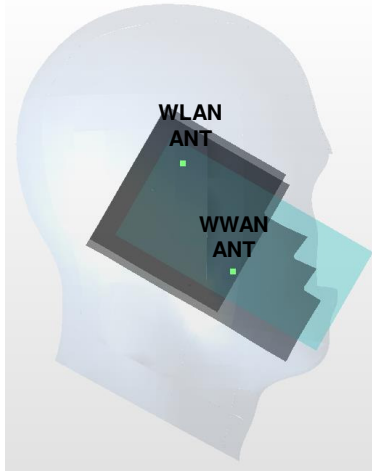


Case8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Left Cheek	0.558	0	47.11	-38.65	-3.28	69.0	1.90	0.04	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

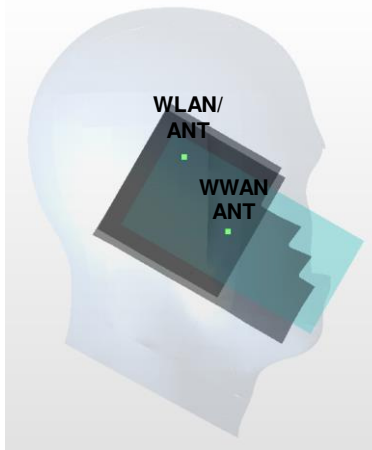


Case9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Left Cheek	0.378	0	54.24	-60.1	-0.59	91.4	1.72	0.02	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

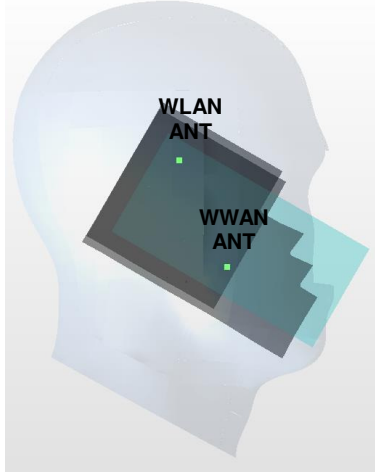


Case10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Left Cheek	0.485	0	49.28	-62.04	-0.98	91.3	1.83	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

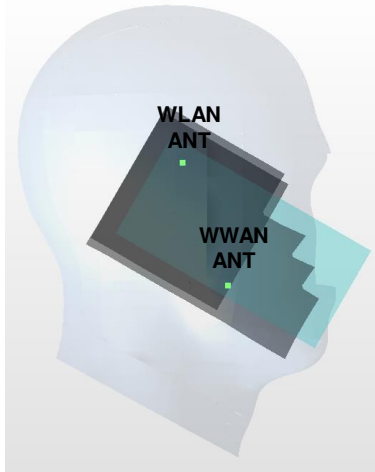

Case11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Left Cheek	0.474	0	52.73	-17.95	-2.84	54.9	1.82	0.04	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

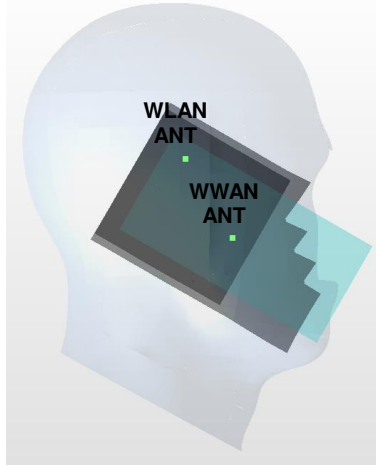


Case12	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 12	Left Cheek	0.357	0	50.67	-34.53	-3.04	67.1	1.70	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

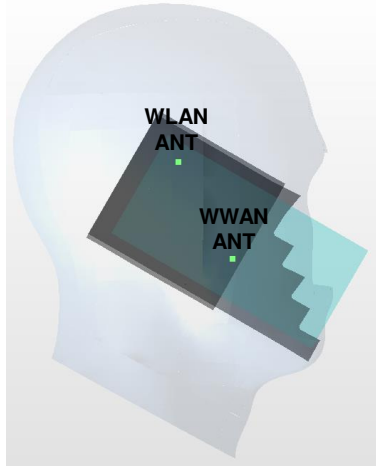


Case13	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Left Cheek	0.537	0	48.14	-33.99	-3.41	65.4	1.88	0.04	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				




Case15	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 25	Left Cheek	0.299	0	47.26	-46.81	-2.93	76.5	1.64	0.03	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

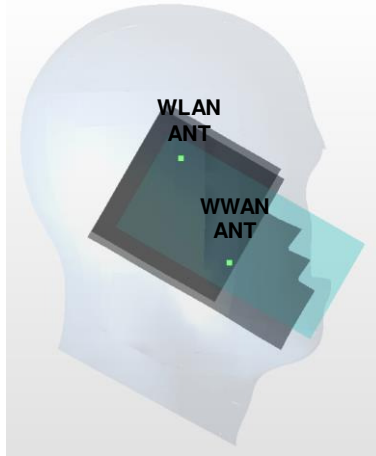


Case16	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26	Left Cheek	0.708	0	57.36	-28.03	-3.76	65.6	2.05	0.04	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

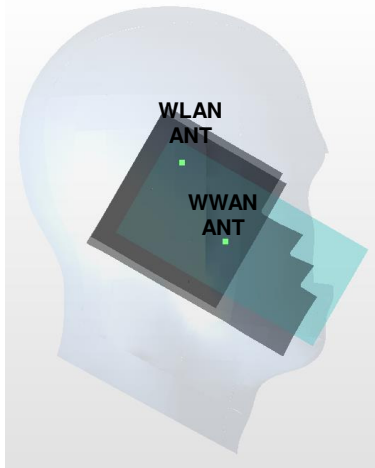


Case17	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66	Left Cheek	0.29	0	51.45	-61.41	-0.6	91.5	1.64	0.02	Not required
	WLAN2.4G		1.345	0	16.33	23.08	-0.75				

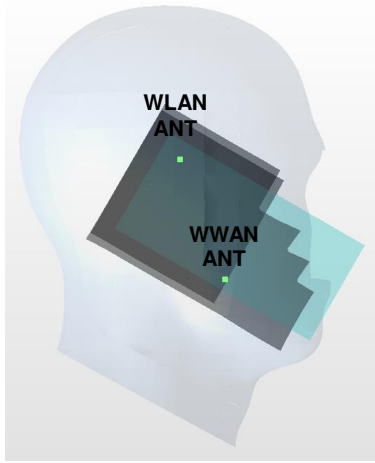


Case18	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Right Cheek	0.477	0	50.11	42.65	-2.77	71.6	1.86	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

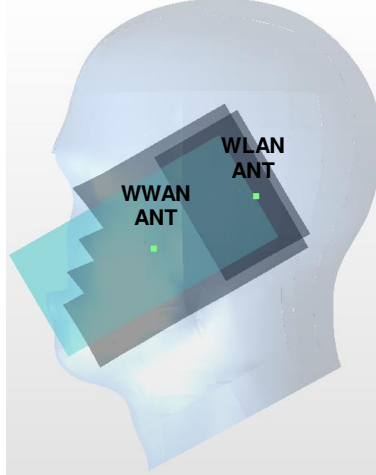


Case19	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Left Cheek	0.478	0	46.6	-44.72	-3.02	72.5	1.90	0.04	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

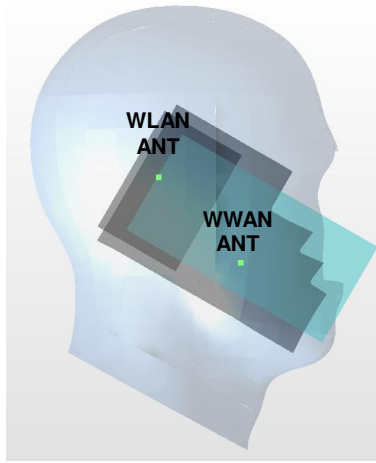


Case21	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Left Cheek	0.26	0	49.27	-59.01	-1.53	87.3	1.68	0.02	Not required
	WLAN5G		1.42	0	-10.45	4.58	1.31				

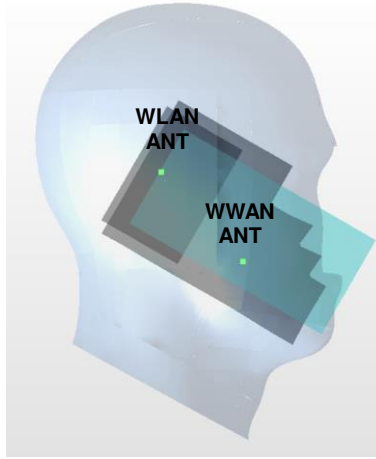


Case22	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Right Cheek	0.326	0	51.92	48.34	-2.2	76.3	1.71	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

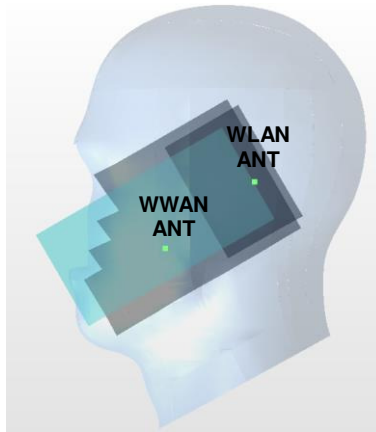


Case23	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Left Cheek	0.494	0	50.89	-56.31	-1.53	84.0	1.91	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

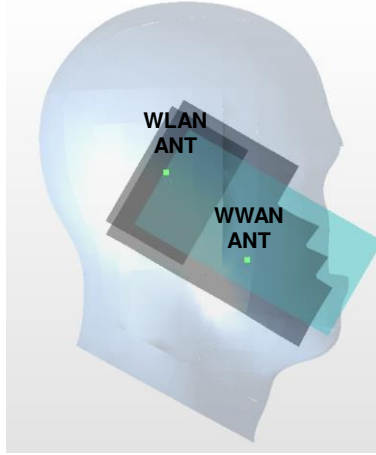


Case24	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Right Cheek	0.337	0	57.39	2.86	-1.65	67.9	1.72	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

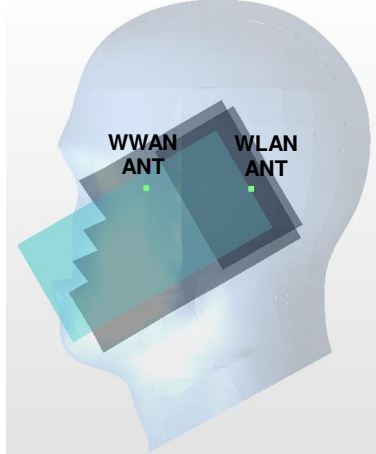


Case25	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WLAN5G	Left Cheek	0.482	0	45.83	-58.52	-1.76	82.7	1.90	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

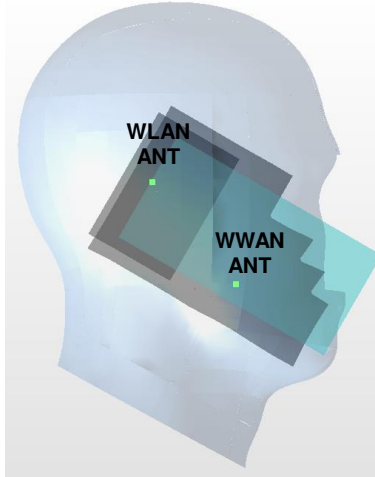


Case26	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WLAN5G	Right Cheek	0.785	0	49.27	43.44	-2.95	71.4	2.17	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

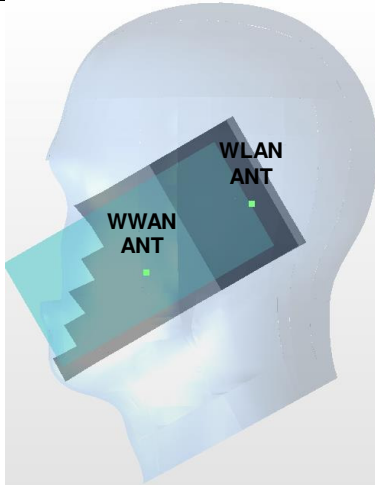


Case27	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Left Cheek	0.345	0	59.73	-31.16	-1.22	73.6	1.77	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

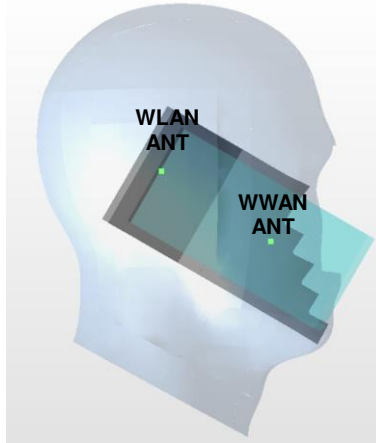


Case28	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC0	Right Cheek	0.596	0	49.78	45.83	-2.62	73.1	1.98	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

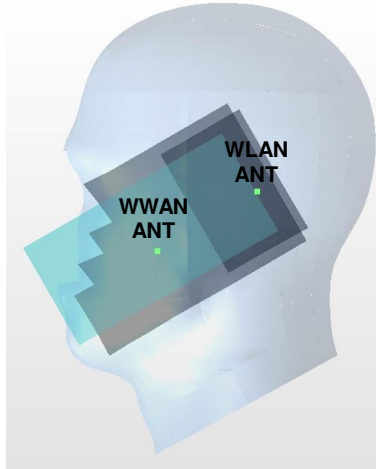


Case29	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC0				X	Y	Z				
	WLAN5G	Left Cheek	0.582	0	52.82	-24.86	-3.86	64.6	2.00	0.04	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

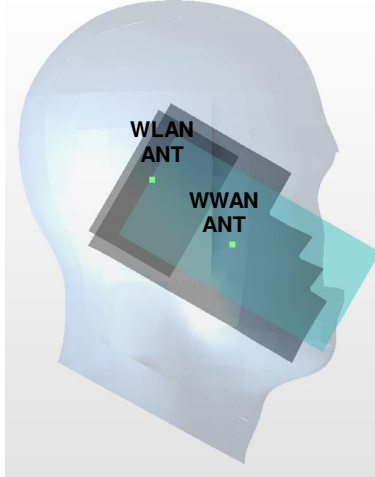


Case30	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC1				X	Y	Z				
	WLAN5G	Right Cheek	0.376	0	48.51	57.27	-1.7	79.1	1.76	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

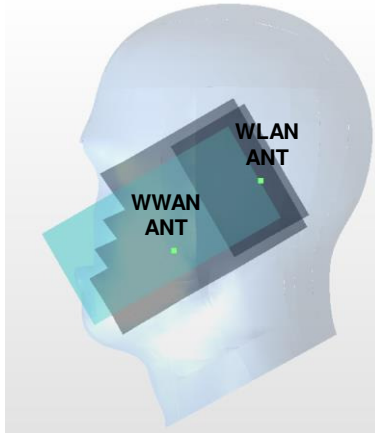


Case31	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC1	Left Cheek	0.386	0	51.45	-58.48	-1.16	86.0	1.81	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

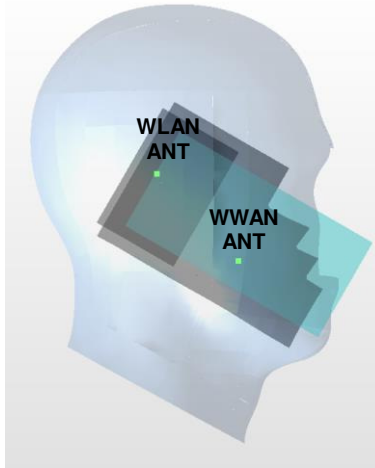


Case32	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Right Cheek	0.581	0	46.35	33.11	-3.65	63.8	1.96	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

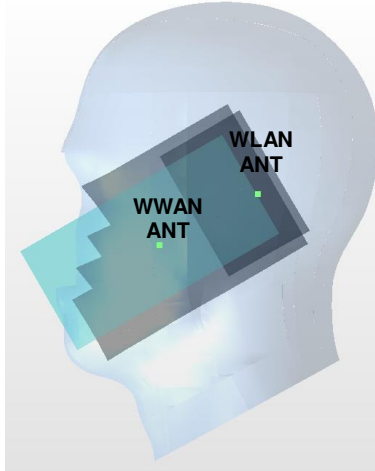


Case33	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA BC10	Left Cheek	0.558	0	47.11	-38.65	-3.28	68.5	1.98	0.04	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

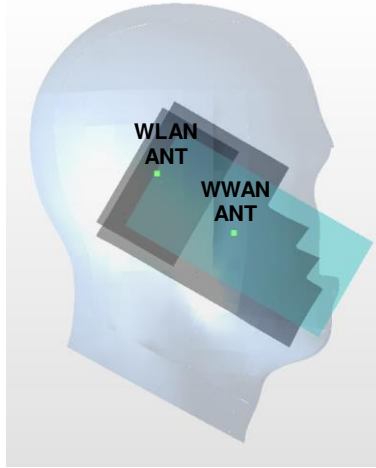


Case34	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Right Cheek	0.387	0	49.23	56.04	-1.85	78.9	1.77	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

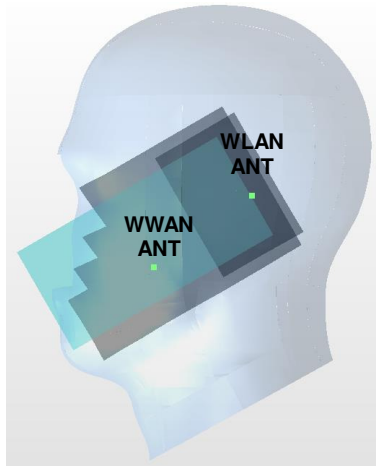


Case35	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Left Cheek	0.378	0	54.24	-60.1	-0.59	89.0	1.80	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

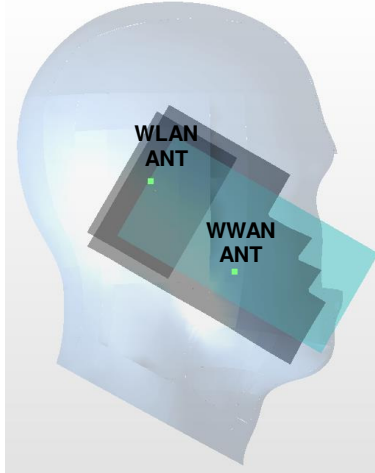


Case36	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Right Cheek	0.223	0	59.19	5.62	-1.31	69.7	1.61	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

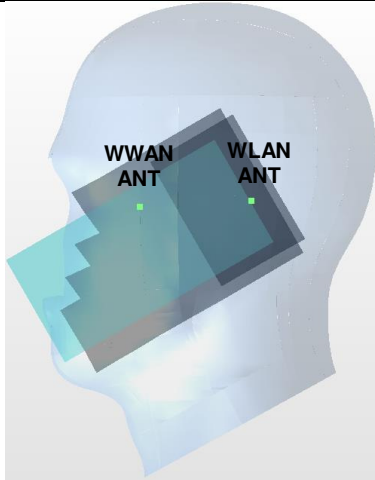


Case37	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Left Cheek	0.485	0	49.28	-62.04	-0.98	87.5	1.91	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

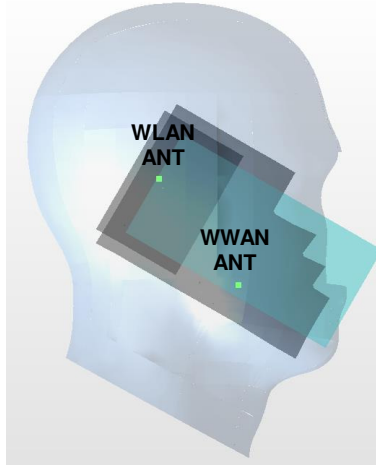


Case38	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Right Cheek	0.666	0	51.78	42.69	-2.92	73.1	2.05	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

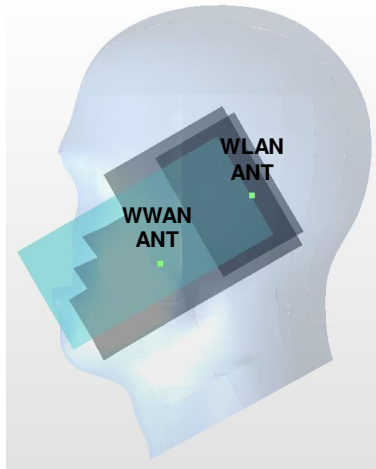


Case39	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 5				X	Y	Z				
	WLAN5G	Left Cheek	0.474	0	52.73	-17.95	-2.84	61.1	1.89	0.04	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

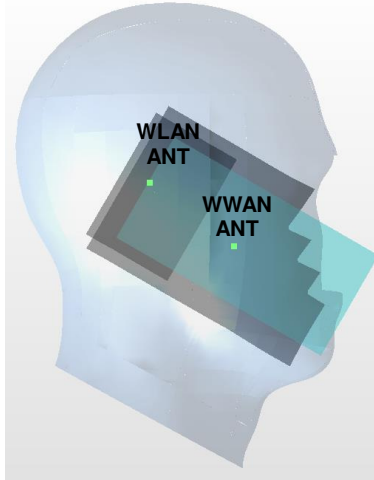


Case40	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7				X	Y	Z				
	WLAN5G	Right Cheek	0.421	0	49.24	64.65	-1.06	84.7	1.80	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

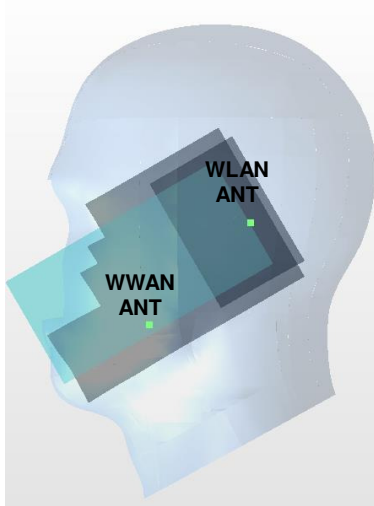


Case41	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 12				X	Y	Z				
	LTE Band 12	Right Cheek	0.334	0	53.28	32.41	-2.82	69.7	1.72	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

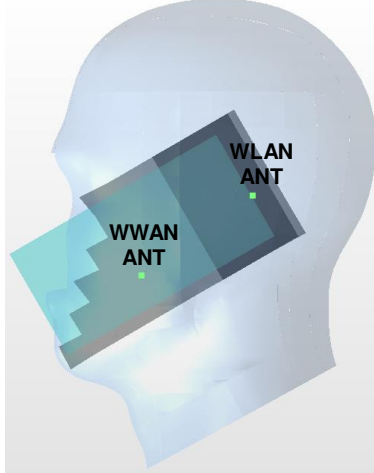


Case42	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 12				X	Y	Z				
	LTE Band 12	Left Cheek	0.357	0	50.67	-34.53	-3.04	68.4	1.78	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

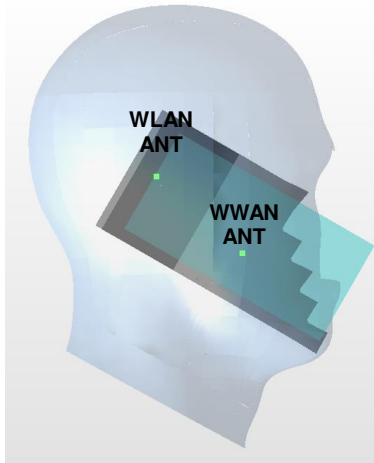


Case43	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Right Cheek	0.512	0	53.06	27.12	-2.92	67.5	1.90	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

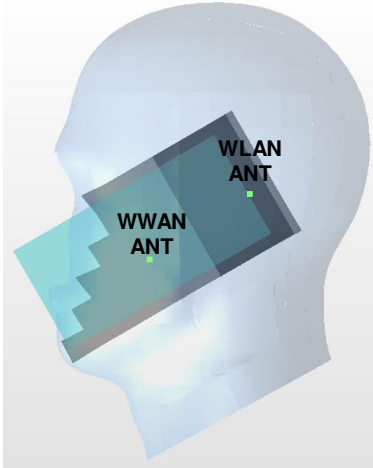


Case44	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Left Cheek	0.537	0	48.14	-33.99	-3.41	66.1	1.96	0.04	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

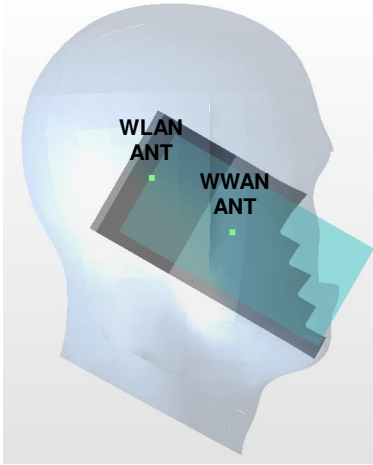


Case47	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 25	Right Cheek	0.249	0	54.88	46.22	-1.84	77.5	1.63	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

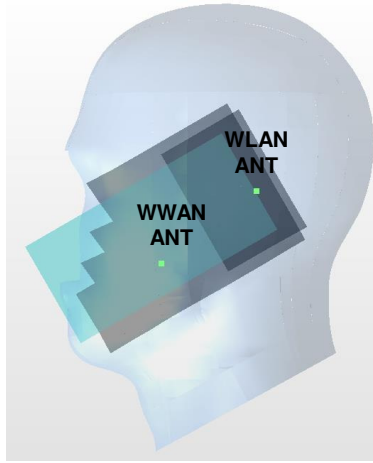


Case48	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 25	Left Cheek	0.299	0	47.26	-46.81	-2.93	74.4	1.72	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

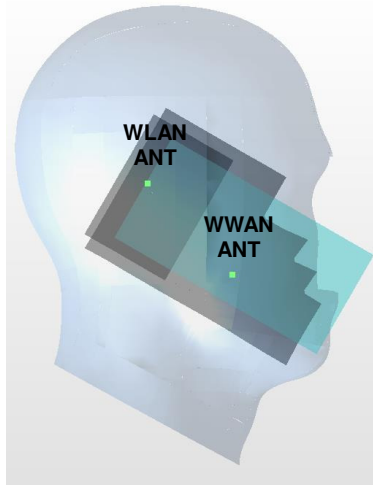


Case49	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26	Right Cheek	0.678	0	46.36	38.87	-3.6	66.5	2.06	0.04	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

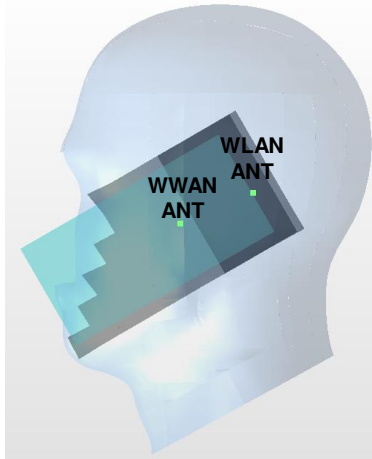


Case50	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26	Left Cheek	0.708	0	57.36	-28.03	-3.76	70.1	2.13	0.04	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

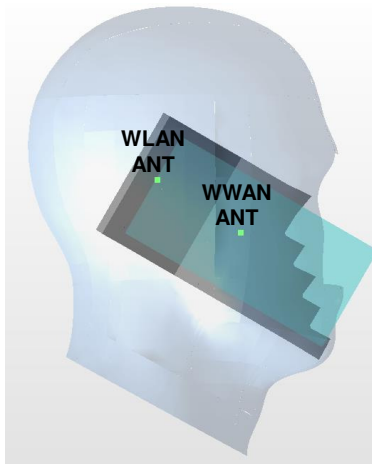


Case51	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 38	Right Cheek	0.247	0	48.06	66.77	-0.98	85.4	1.63	0.02	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

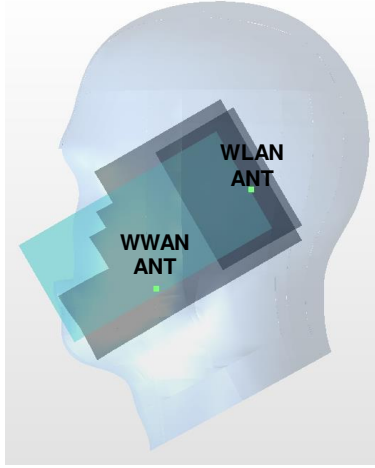


Case52	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66	Left Cheek	0.29	0	51.45	-61.41	-0.6	88.3	1.71	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

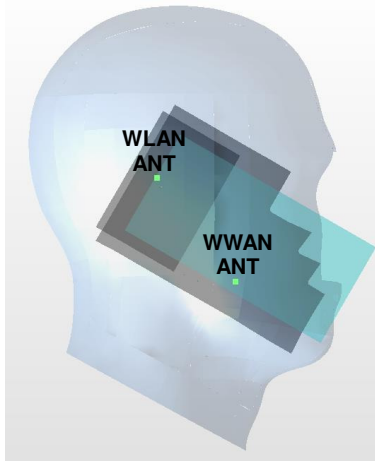


Case55	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41	Right Cheek	0.374	0	47.48	62.67	-1.48	82.1	1.76	0.03	Not required
	WLAN5G		1.383	0	-10.45	4.58	1.31				

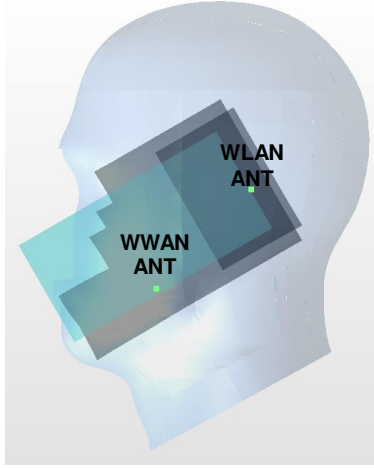


Case56	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41	Left Cheek	0.217	0	57.72	-0.77	-1.13	60.6	1.64	0.03	Not required
	WLAN5G		1.42	0	-2.09	8.82	0.42				

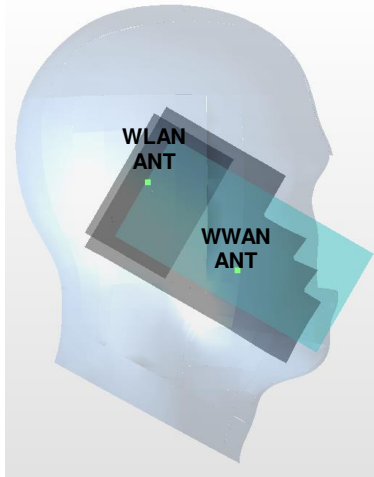


Case57	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	124.9	2.17	0.03	Not required

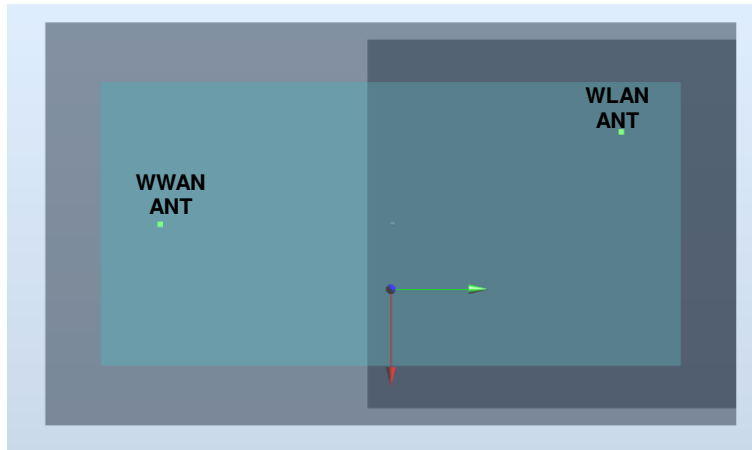


Case58	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	125.8	1.70	0.02	Not required

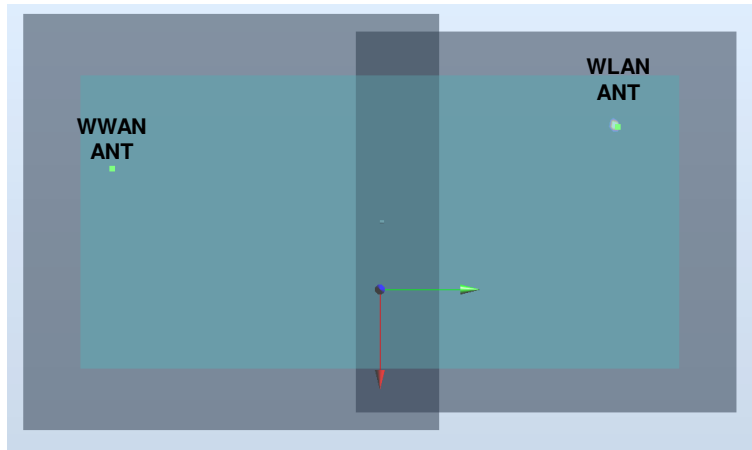


Case59	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	129.6	2.27	0.03	Not required

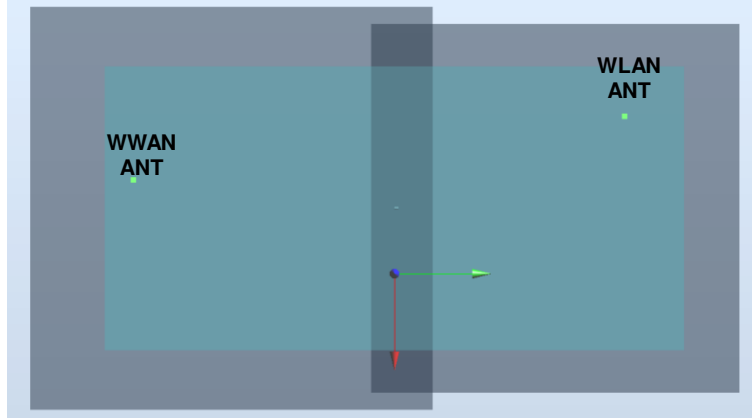


Case61	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	129.8	2.43	0.03	Not required

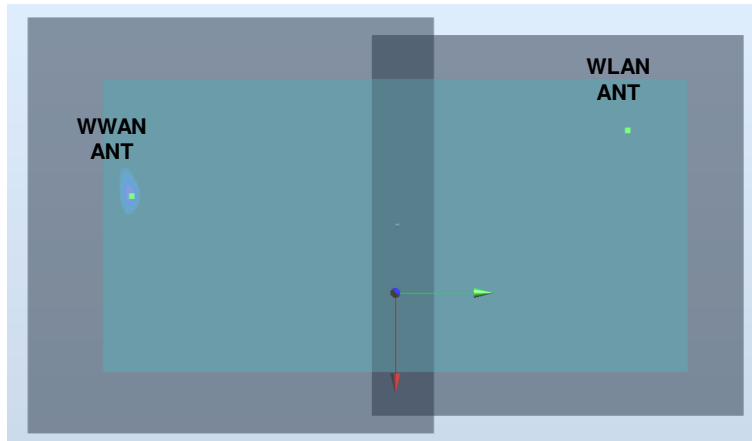


Case63	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	124.5	2.04	0.02	Not required

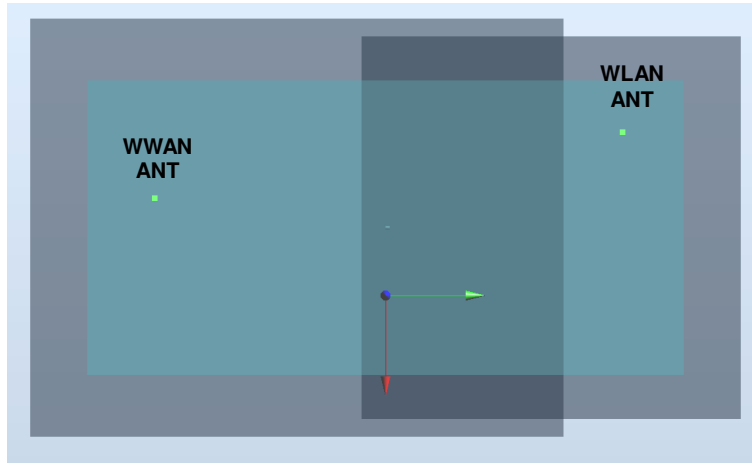


Case65	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	BC0				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	125.3	2.06	0.02	Not required

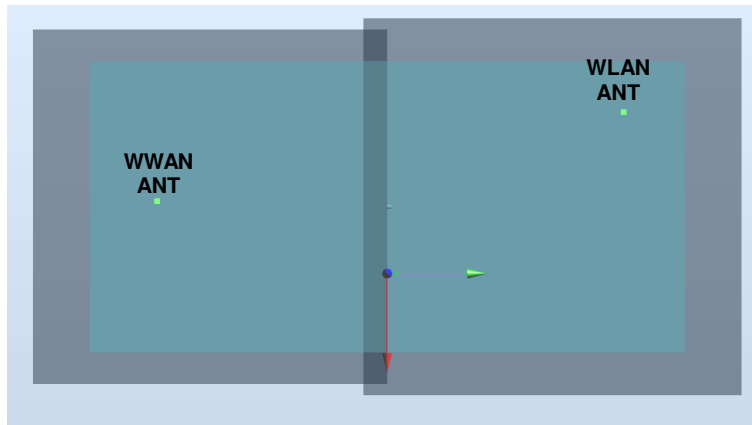


Case67	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	BC1				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	128.9	2.40	0.03	Not required

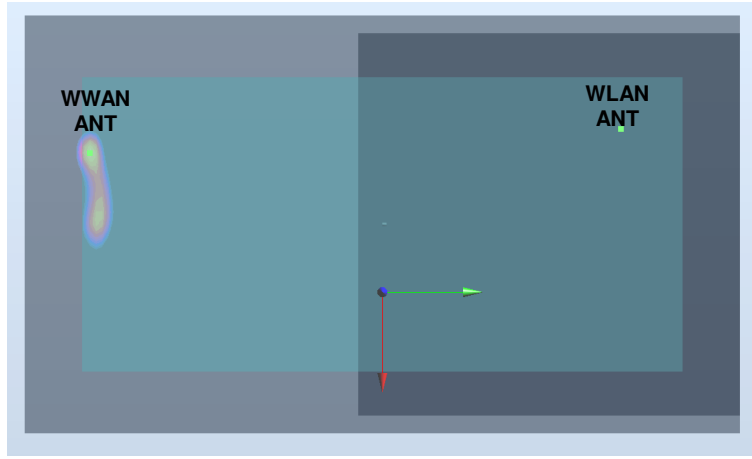


Case68	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	BC10				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	124.5	1.99	0.02	Not required

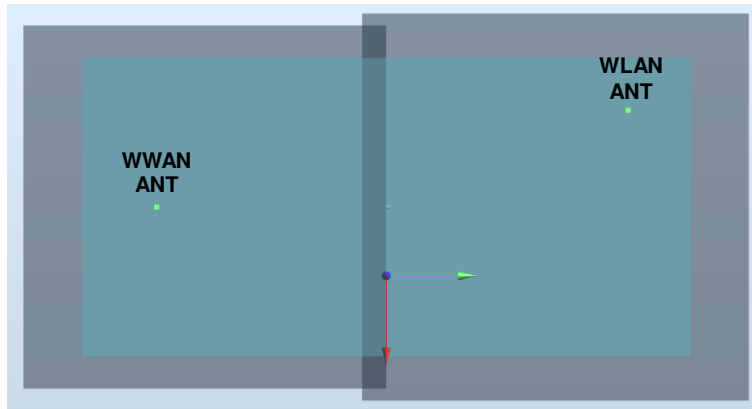


Case69	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B2				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	130.3	2.11	0.02	Not required

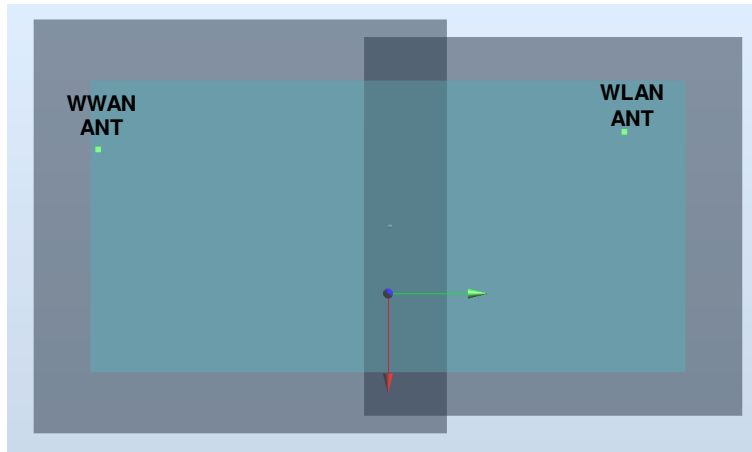


Case70	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B4				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	126.2	2.12	0.02	Not required

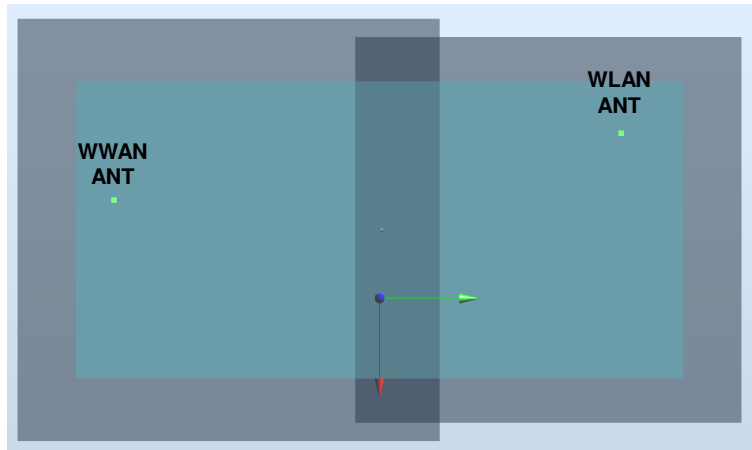


Case72	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B5				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	125.1	1.99	0.02	Not required

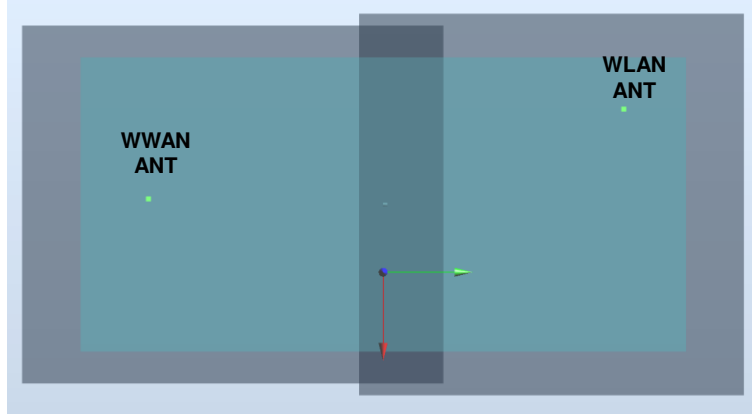


Case74	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B7				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	129.1	2.10	0.02	Not required

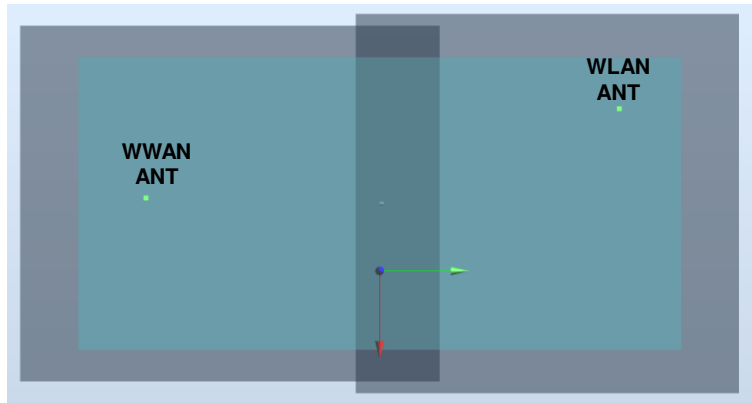


Case75	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B12				X	Y	Z				
	WLAN2.4G <td>Back</td> <td>0.774</td> <td>5</td> <td>2</td> <td>-62.4</td> <td>-1.46</td> <td>124.8</td> <td>1.76</td> <td>0.02</td> <td>Not required</td>	Back	0.774	5	2	-62.4	-1.46	124.8	1.76	0.02	Not required
	WLAN2.4G <td>Back</td> <td>0.985</td> <td>5</td> <td>-27</td> <td>59</td> <td>-0.88</td> <td></td> <td></td> <td></td> <td></td>	Back	0.985	5	-27	59	-0.88				

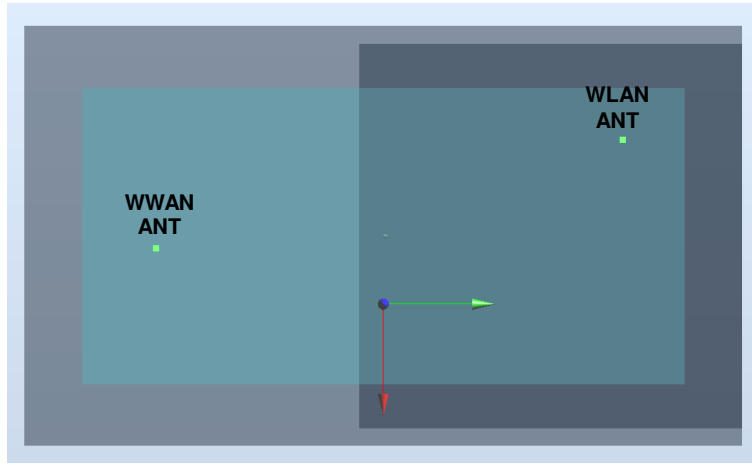


Case76	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B13				X	Y	Z				
	WLAN2.4G <td>Back</td> <td>1.062</td> <td>5</td> <td>-4</td> <td>-62.4</td> <td>-1.48</td> <td>123.6</td> <td>2.05</td> <td>0.02</td> <td>Not required</td>	Back	1.062	5	-4	-62.4	-1.48	123.6	2.05	0.02	Not required
	WLAN2.4G <td>Back</td> <td>0.985</td> <td>5</td> <td>-27</td> <td>59</td> <td>-0.88</td> <td></td> <td></td> <td></td> <td></td>	Back	0.985	5	-27	59	-0.88				

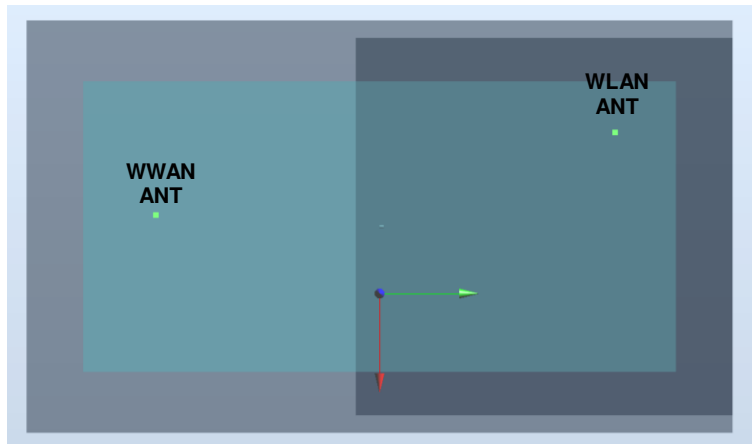


Case77	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B25				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	130.3	2.19	0.02	Not required

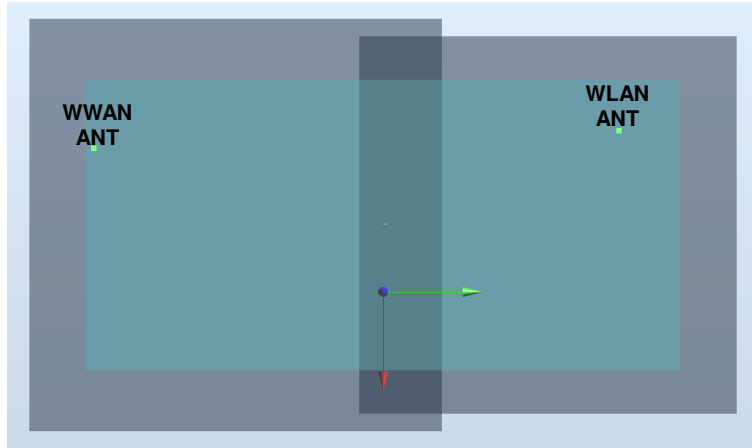


Case78	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B26				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	116.4	2.16	0.03	Not required

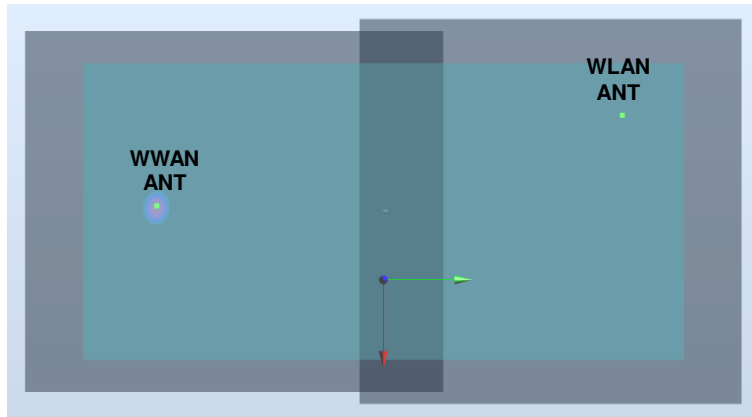


Case79	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B66				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	127.8	2.18	0.03	Not required

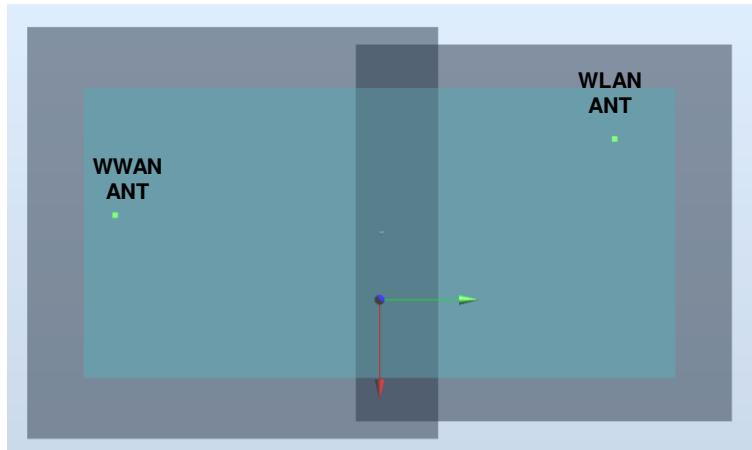


Case80	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B38				X	Y	Z				
	WLAN2.4G	Back	0.985	5	-27	59	-0.88	131.2	2.28	0.03	Not required

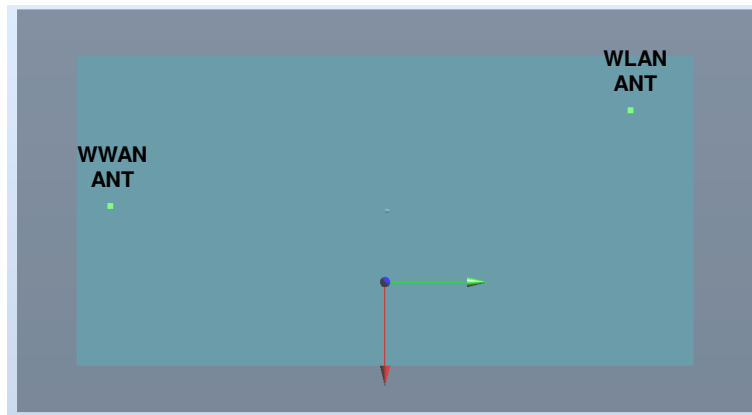


Case81	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	138.3	2.34	0.03	Not required

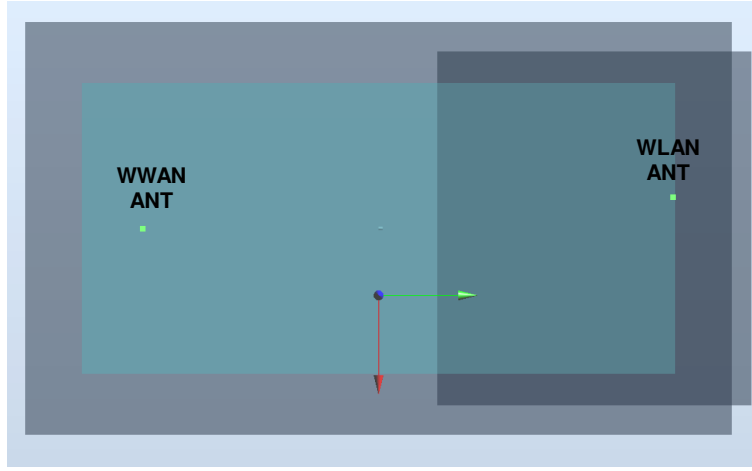


Case82	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	141.2	1.86	0.02	Not required

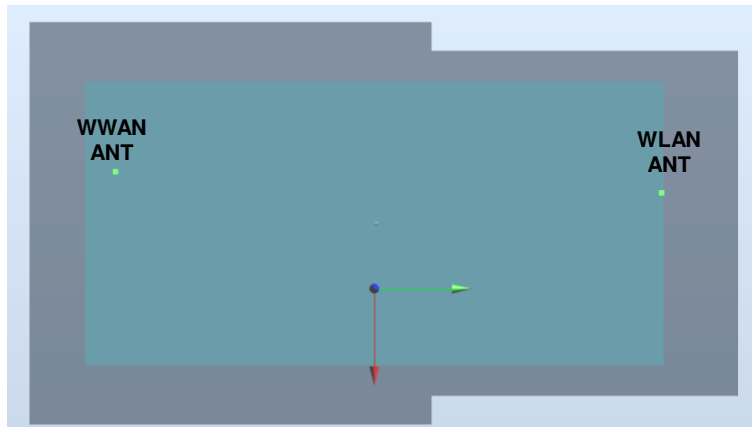


Case83	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	144.8	2.44	0.03	Not required

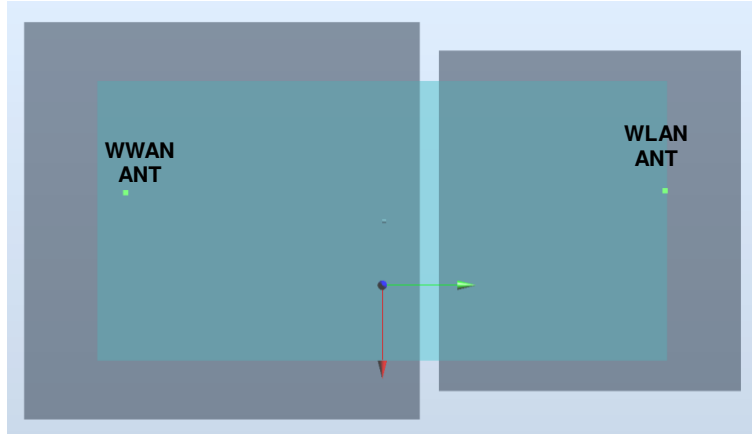


Case84	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	144.8	2.60	0.03	Not required

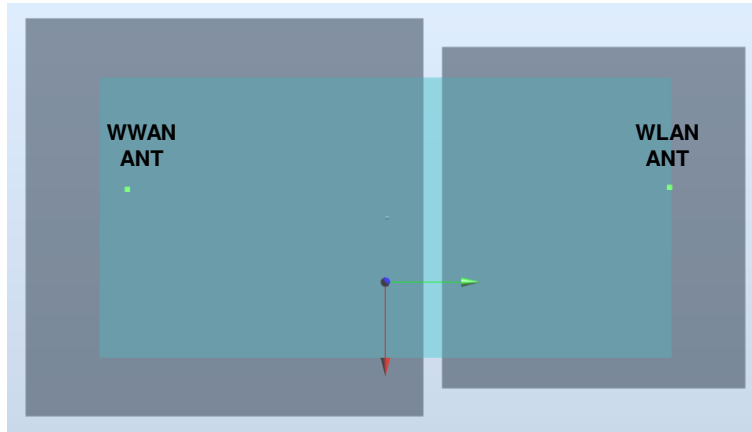


Case85	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	138.3	2.20	0.02	Not required

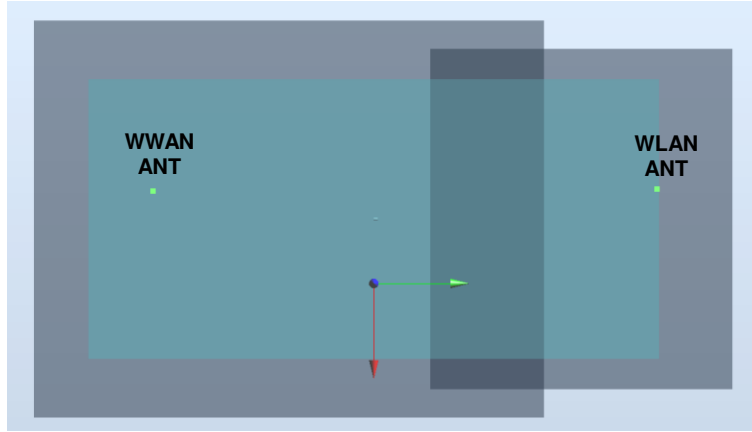


Case86	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	BC0				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	138.4	2.22	0.02	Not required

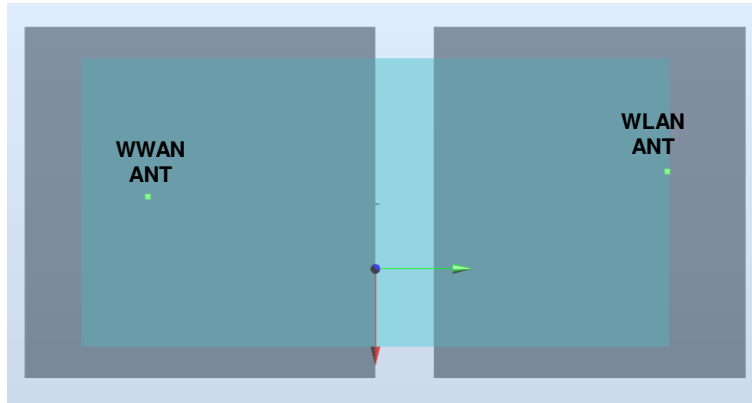


Case87	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	BC1				X	Y	Z				
	WLAN5G	Back	1.416	5	-14.2	-69.3	-1.01	143.8	2.57	0.03	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

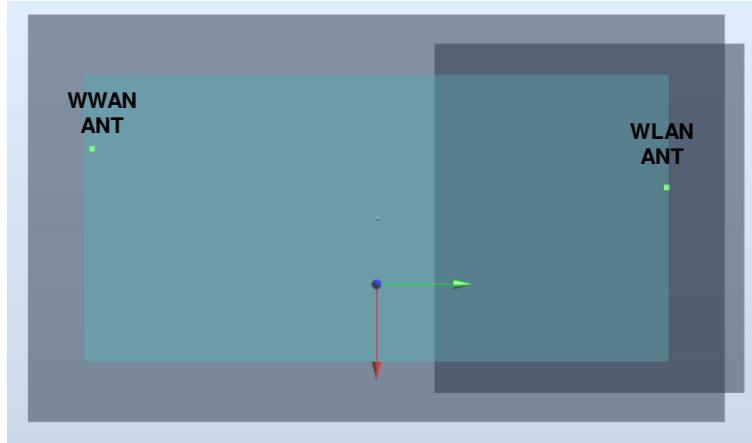


Case88	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	BC10				X	Y	Z				
	WLAN5G	Back	1.007	5	0.6	-62.4	-1.57	137.1	2.16	0.02	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

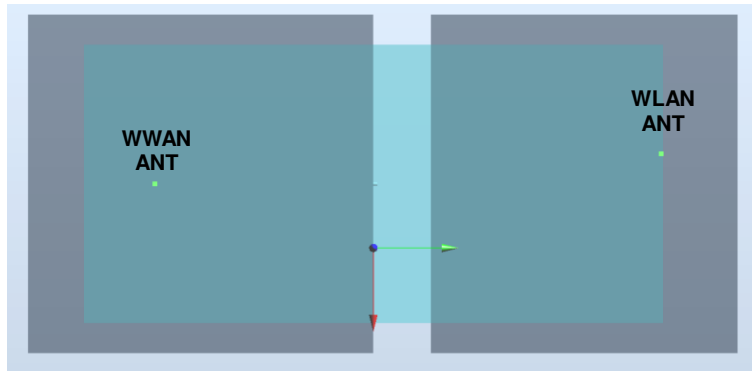


Case89	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B2				X	Y	Z				
	WLAN5G	Back	1.129	5	-17.3	-70.9	-0.088	145.6	2.28	0.02	Not required
			1.149	5	-8.2	74.4	-0.79				

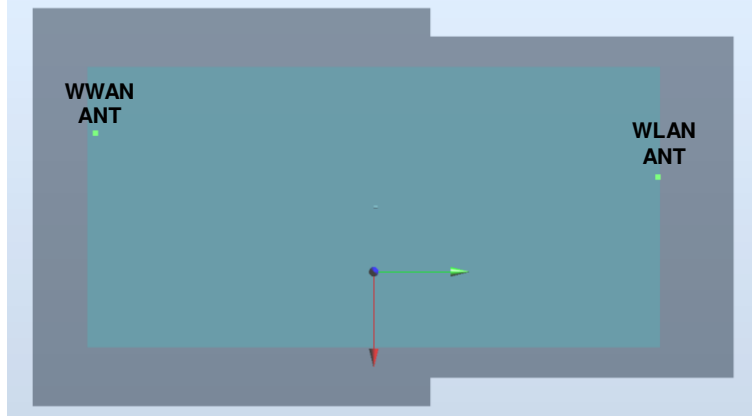


Case90	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B4				X	Y	Z				
	WLAN5G	Back	1.138	5	-14.9	-66.6	-0.95	141.2	2.29	0.02	Not required
			1.149	5	-8.2	74.4	-0.79				

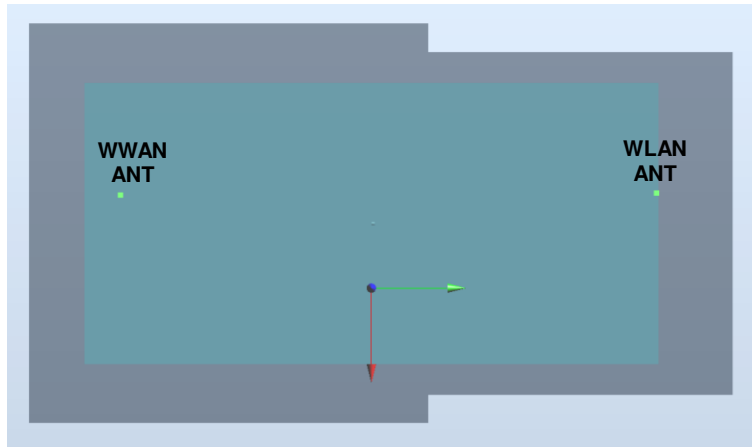


Case91	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B5				X	Y	Z				
	WLAN5G	Back	1.009	5	-4.1	-63.9	-4.86	138.4	2.16	0.02	Not required
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79				

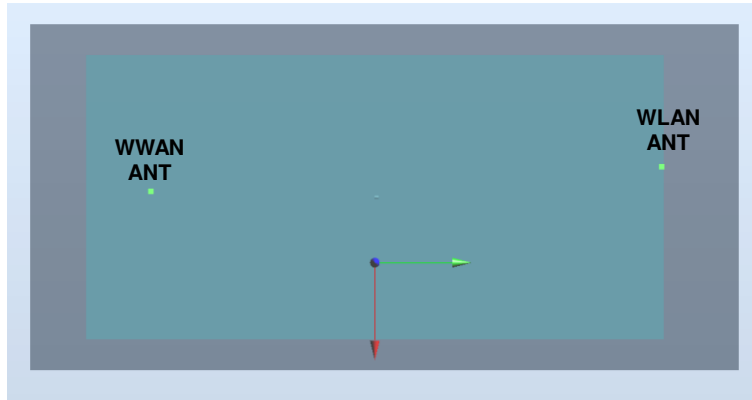


Case92	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B7				X	Y	Z				
	WLAN5G	Back	1.118	5	1	-67	-0.79	141.7	2.27	0.02	Not required
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79				

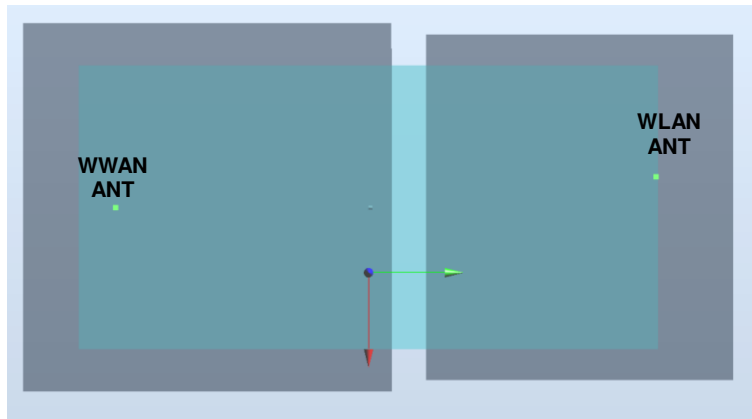


Case93	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B12				X	Y	Z				
	LTE B12	Back	0.774	5	2	-62.4	-1.46	137.2	1.92	0.02	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

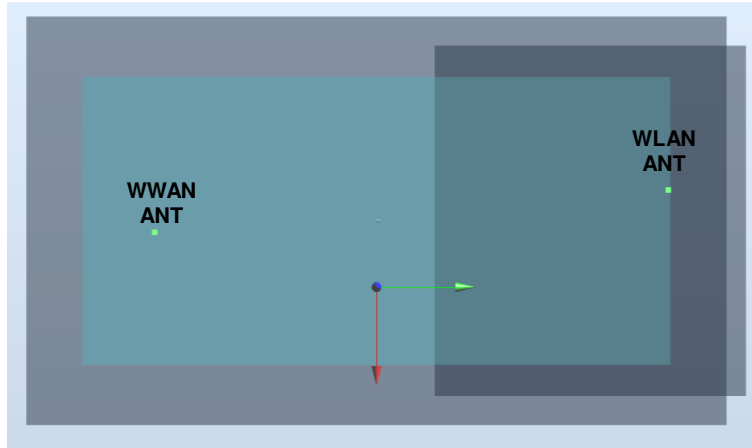

Case94	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B13				X	Y	Z				
	LTE B13	Back	1.062	5	-4	-62.4	-1.48	136.9	2.21	0.02	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

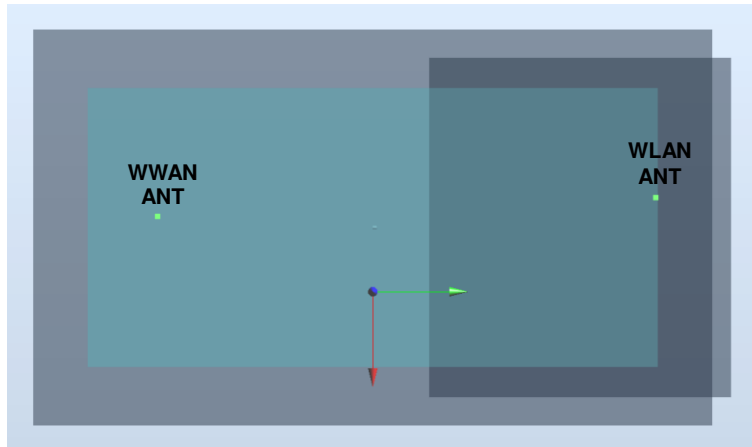


Case95	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B25	Back	1.209	5	-17.3	-70.9	-0.88	145.6	2.36	0.02	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

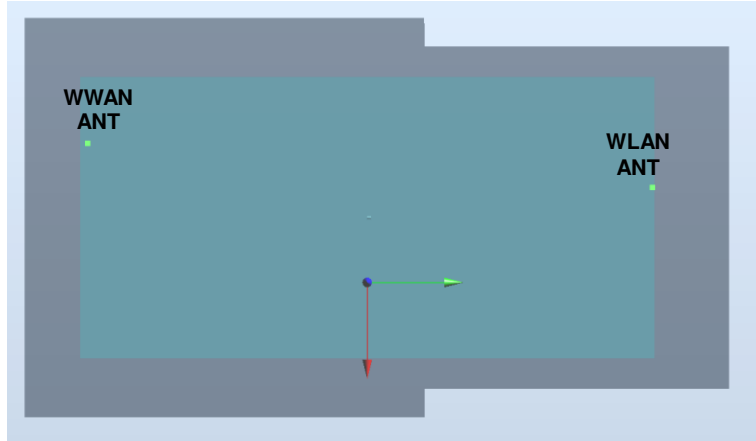


Case96	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B26	Back	1.176	5	-0.9	-54.4	-1.63	129.0	2.33	0.03	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				




Case97	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B66				X	Y	Z				
	LTE B66	Back	1.196	5	-13.5	-68.1	-0.91	142.6	2.35	0.03	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

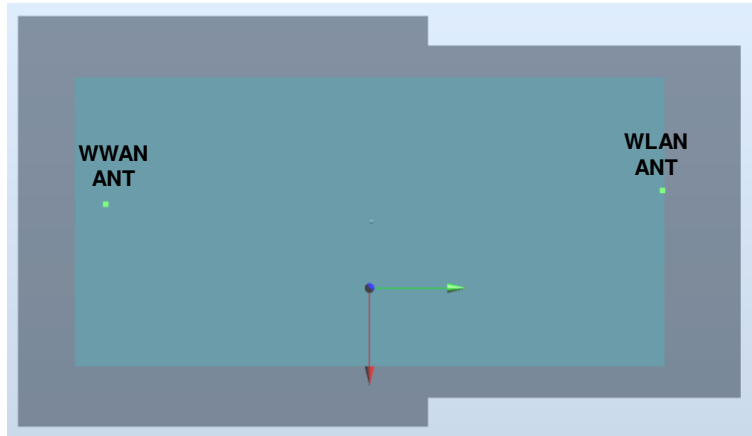


Case98	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B38				X	Y	Z				
	LTE B38	Back	1.299	5	0.8	-69.2	-4.6	143.9	2.45	0.03	Not required
	WLAN5G		1.149	5	-8.2	74.4	-0.79				

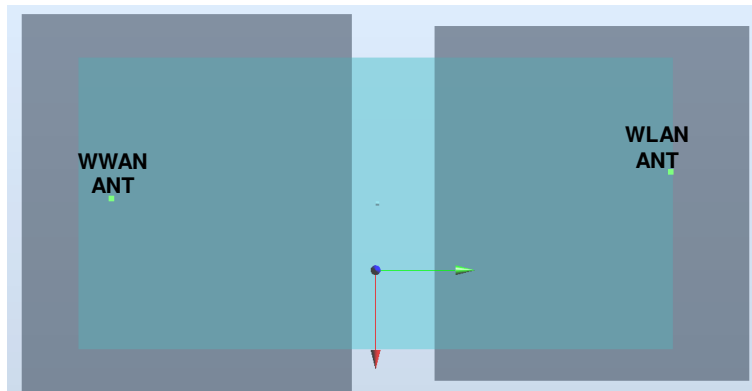


Case99	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B41				X	Y	Z				
	WLAN5G	Back	1.149	5	-8.2	74.4	-0.79	141.8	2.54	0.03	Not required

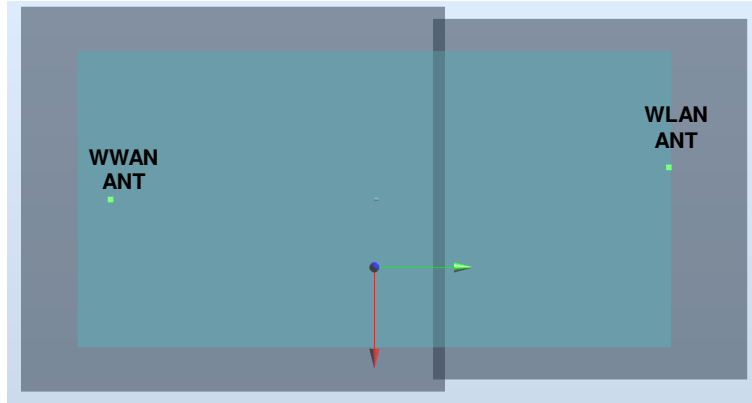

Case 100	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	BT	Back	0.158	5	-27.2	61.2	-0.86	132.0	1.61	0.02	Not required

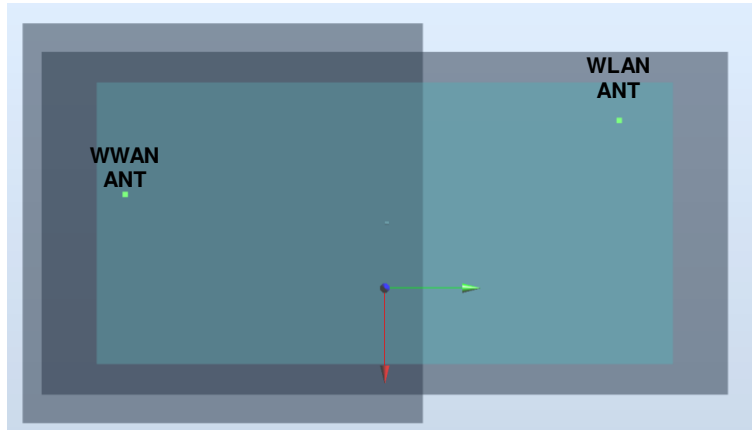

Case 103	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B41	Back	1.395	5	-1	-67.2	-4.62	128.9	2.38	0.03	Not required
	WLAN2.4G		0.985	5	-27	59	-0.88				

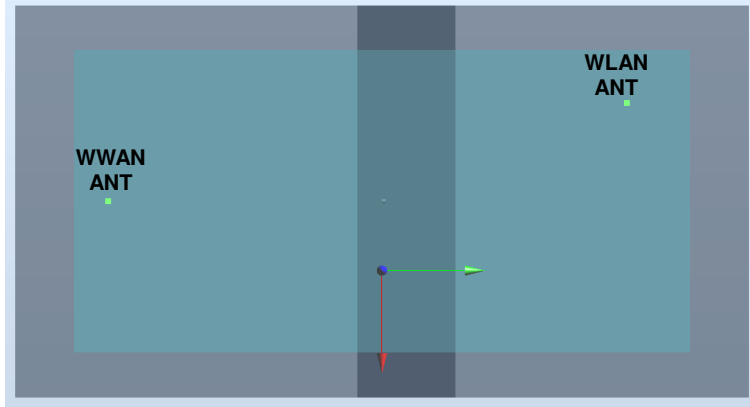

Test Engineer : James Chen Jay Jian Thomas Wang White Huang Wilson Lin Steven Chang
Mood Huang and Bevis Chang

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.