



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT1925-6, XT1925-12, XT1925DL  
**FCC ID** : IHDT56XD1  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Dec. 25, 2017 and testing was completed on Jan. 18, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

**Sporton International (Kunshan) Inc.**  
**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335**  
**China**



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer ..... 5

1.3 Product Feature of Equipment Under Test ..... 5

1.4 Product Specification of Equipment Under Test ..... 6

1.5 Modification of EUT ..... 6

1.6 Specification of Accessory ..... 7

1.7 Testing Location ..... 8

1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

2.1 Carrier Frequency Channel ..... 9

2.2 Test Mode ..... 10

2.3 Connection Diagram of Test System ..... 11

2.4 Support Unit used in test configuration and system ..... 13

2.5 EUT Operation Test Setup ..... 13

2.6 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14

3.2 Maximum Conducted Output Power Measurement ..... 16

3.3 Power Spectral Density Measurement ..... 18

3.4 Unwanted Radiated Emission Measurement ..... 21

3.5 AC Conducted Emission Measurement ..... 27

3.6 Automatically Discontinue Transmission ..... 32

3.7 Antenna Requirements ..... 33

**4 LIST OF MEASURING EQUIPMENTS ..... 34**

**5 UNCERTAINTY OF EVALUATION ..... 35**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC ≤ 24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC ≤ 11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) 15.209(a)	Pass	Under limit 4.29 dB at 5148.320 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.02 dB at 0.233 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1925-6, XT1925-12, XT1925DL
FCC ID	IHDT56XD1
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 351849090020632 Conduction: 351884090003551 Radiation: 351884090035585
HW Version	DVT1-B
SW Version	ali_n-userdebug 8.0.0 OPS27.55 1276 intcfg,test-keys
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
<b>Maximum Output Power to Antenna</b>	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 17.14 dBm / 0.0518 W 802.11n HT20 : 17.11 dBm / 0.0514 W 802.11n HT40 : 16.16 dBm / 0.0413 W <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 17.27 dBm / 0.0533 W 802.11n HT20 : 16.99 dBm / 0.0500 W 802.11n HT40 : 16.03 dBm / 0.0401 W <b>&lt;5500 MHz ~ 5700 MHz &gt;</b> 802.11a : 17.11 dBm / 0.0514 W 802.11n HT20 : 17.07 dBm / 0.0509 W 802.11n HT40 : 16.18 dBm / 0.0415 W
<b>99% Occupied Bandwidth</b>	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 18.78 MHz 802.11n HT20 : 19.53 MHz 802.11n VHT40 : 36.76 MHz <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 18.88 MHz 802.11n HT20 : 19.43 MHz 802.11n VHT40 : 36.86 MHz <b>&lt;5500 MHz ~ 5700 MHz &gt;</b> 802.11a : 18.78 MHz 802.11n HT20 : 19.38 MHz 802.11n HT40 : 36.76 MHz
<b>Antenna Gain / Gain</b>	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> PIFA Antenna with gain -0.71 dBi <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> PIFA Antenna with gain 0.47 dBi <b>&lt;5500 MHz ~ 5720 MHz&gt;</b> PIFA Antenna with gain 0.47 dBi
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola (Salom)	Model Name SC-22
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 1(EU)	Brand Name	Motorola (Salom)	Model Name SC-23
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 1(UK)	Brand Name	Motorola (Salom)	Model Name SC-24
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 1(IN)	Brand Name	Motorola (Salom)	Model Name SC-25
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 1(AU)	Brand Name	Motorola (Salom)	Model Name SC-26
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 2(US)	Brand Name	Motorola (Chenyang)	Model Name SC-22
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 2(EU)	Brand Name	Motorola (Chenyang)	Model Name SC-23
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 2(UK)	Brand Name	Motorola (Chenyang)	Model Name SC-24
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 2(IN)	Brand Name	Motorola (Chenyang)	Model Name SC-25
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
AC Adapter 2(AU)	Brand Name	Motorola (Chenyang)	Model Name SC-26
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA	
Battery	Brand Name	Motorola (ATL)	Model Name HG30
	Power Rating	3.8Vdc,3000mAh	Type Li-ion
Earphone 1	Brand Name	Motorola (Jiahe)	Model Name LS-118M-12
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
Earphone 2	Brand Name	Motorola (Lianyun)	Model Name TS910A-38AMS01WHR-M
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
USB Cable	Brand Name	Motorola (Liqi)	Model Name L32B-053000100-ALL
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	



### 1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

<b>Test Site</b>	Sporton International (Kunshan) Inc.			
<b>Test Site Location</b>	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Test Firm Registration No.</b>
	TH01-KS	03CH03-KS	CO01-KS	630927

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	-	-	-	-

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	-	-	-	-

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	-	-	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

**Note:** The above Frequency and Channel in "\*" were 802.11n HT40.



## 2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter 1) + Earphone 1
<b>Remark:</b>	For Radiated Test Cases, The tests were performed with Earphone 1, Adapter 1 and USB Cable.


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

## 2.3 Connection Diagram of Test System


<WLAN 5GHz 802.11a/n HT20 Tx Mode>

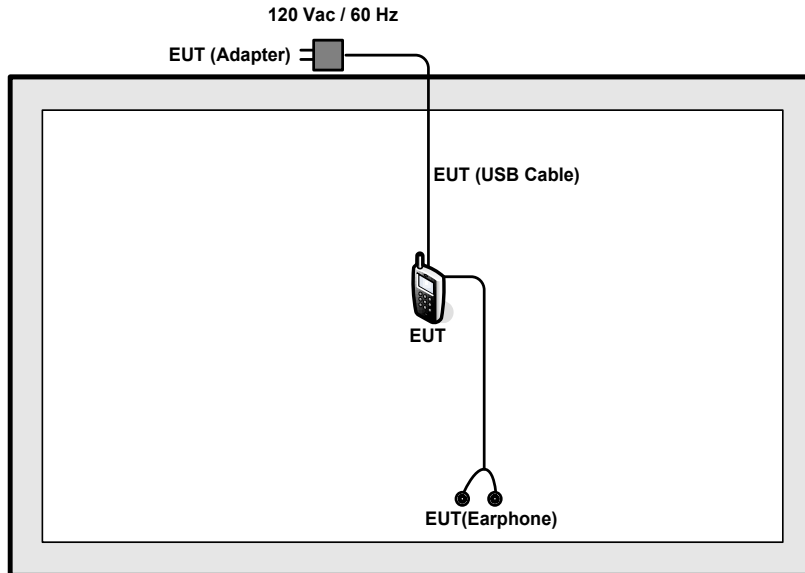

<WLAN 5GHz 802.11n HT40 Tx Mode>



<AC Conducted Emission Mode>

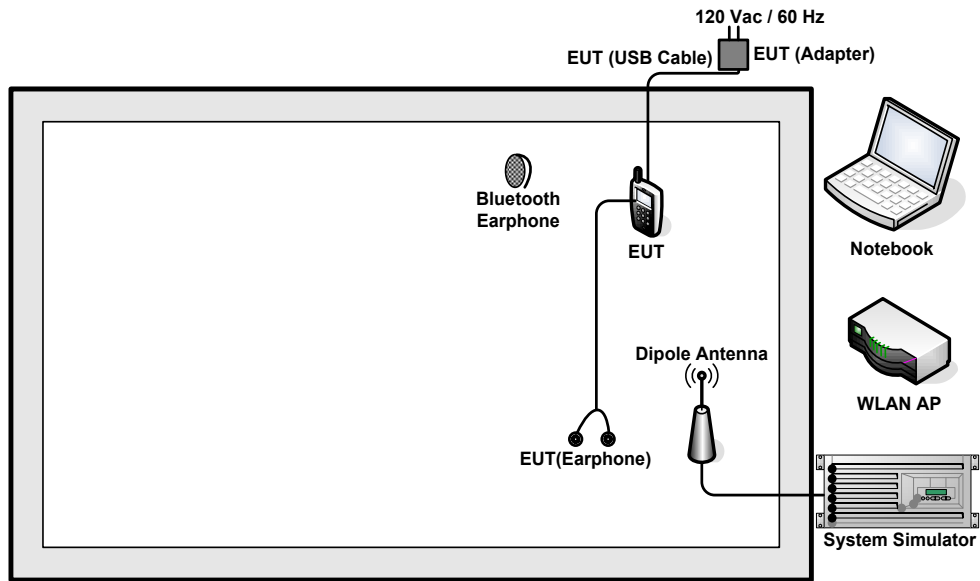

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 6.6 dB.

*Offset(dB) = RF cable loss(dB).*

*= 6.6 (dB)*

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.



##### 3.1.4 Test Setup

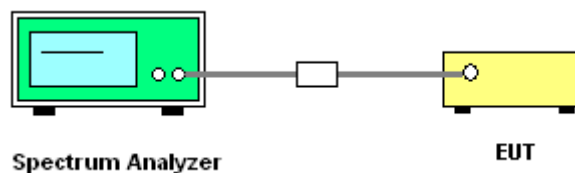



### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

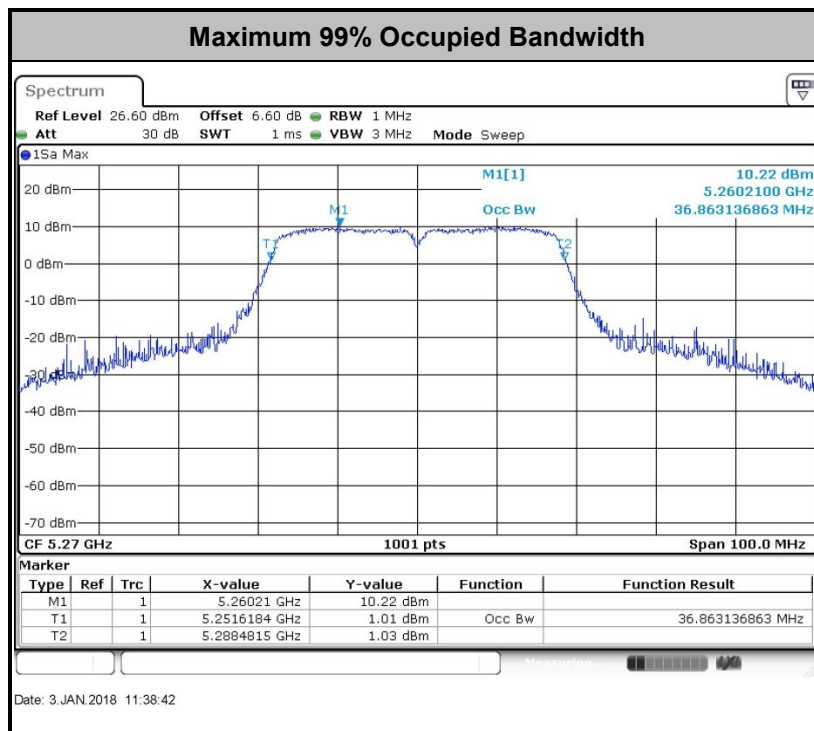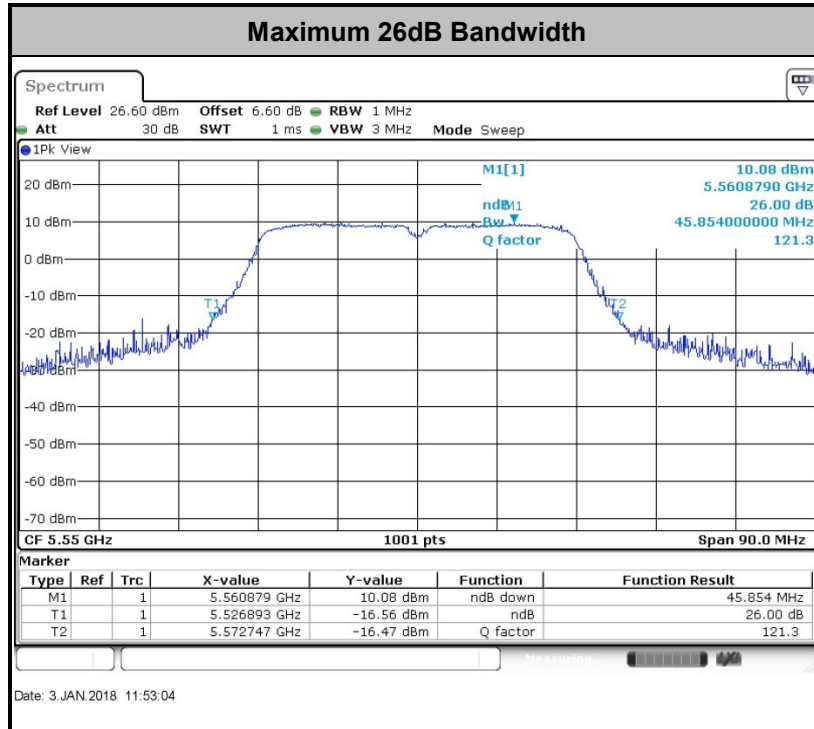

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

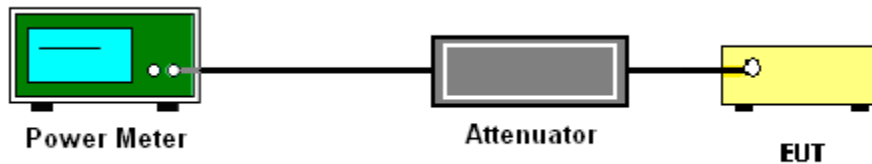

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


### 3.3.4 Test Setup

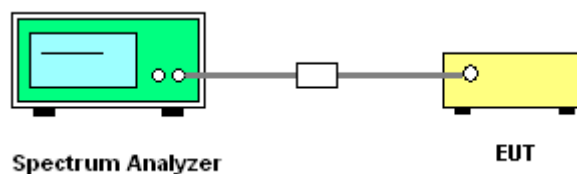



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

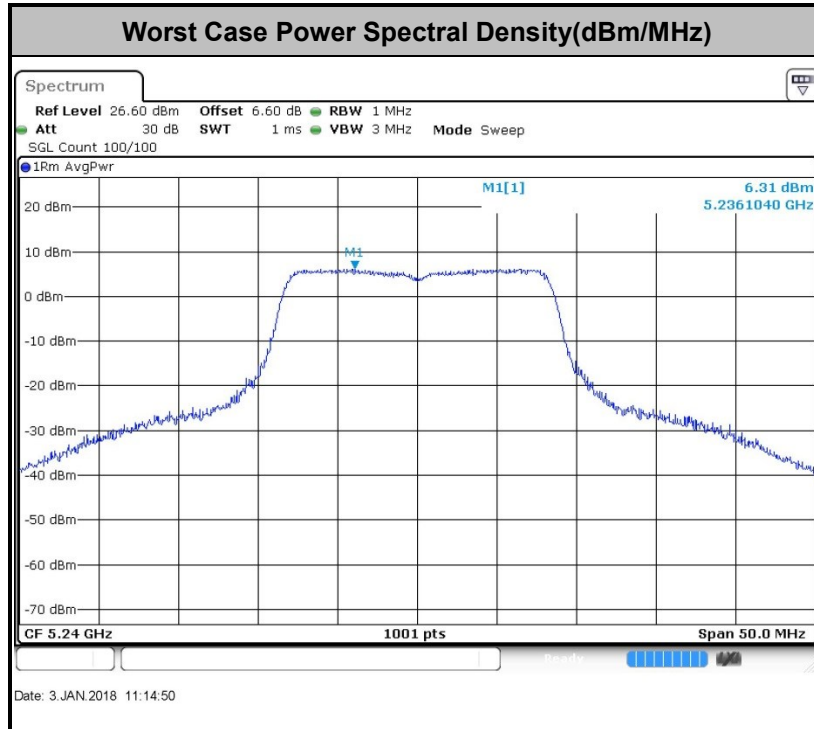

**Note:** Average Power Density (dB) = Measured value+ Duty Factor



### 3.4 Unwanted Radiated Emission Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725MHz band: all emissions outside of the 5470-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D01 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).



### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




### 3.4.4 Test Setup


For radiated emissions below 30MHz

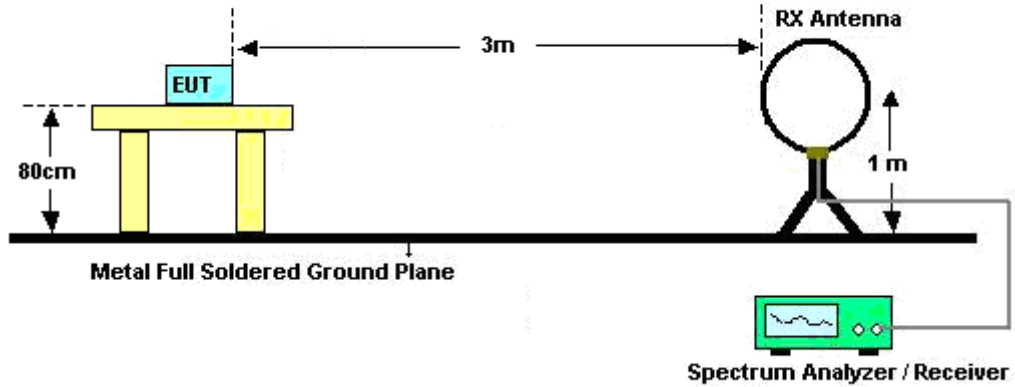

For radiated emissions from 30MHz to 1GHz

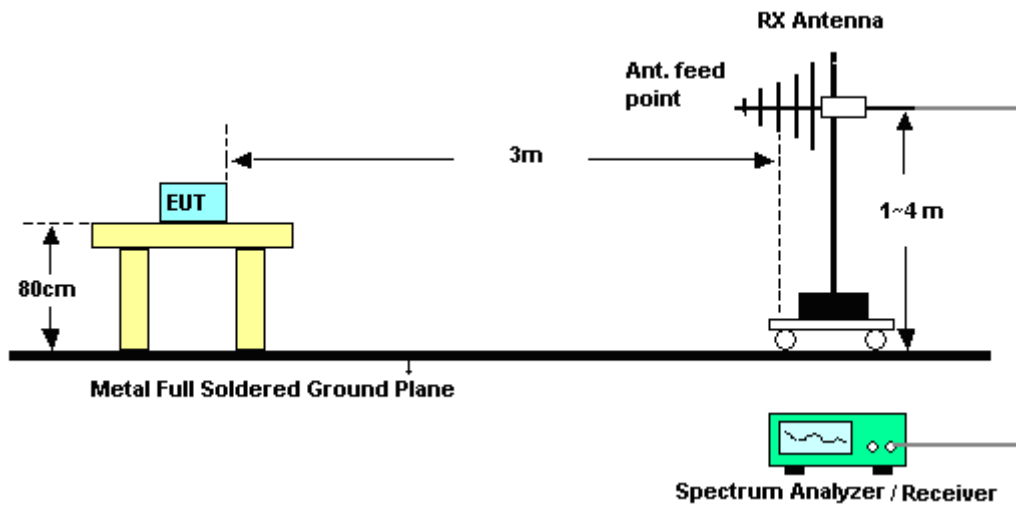

For radiated emissions above 1GHz

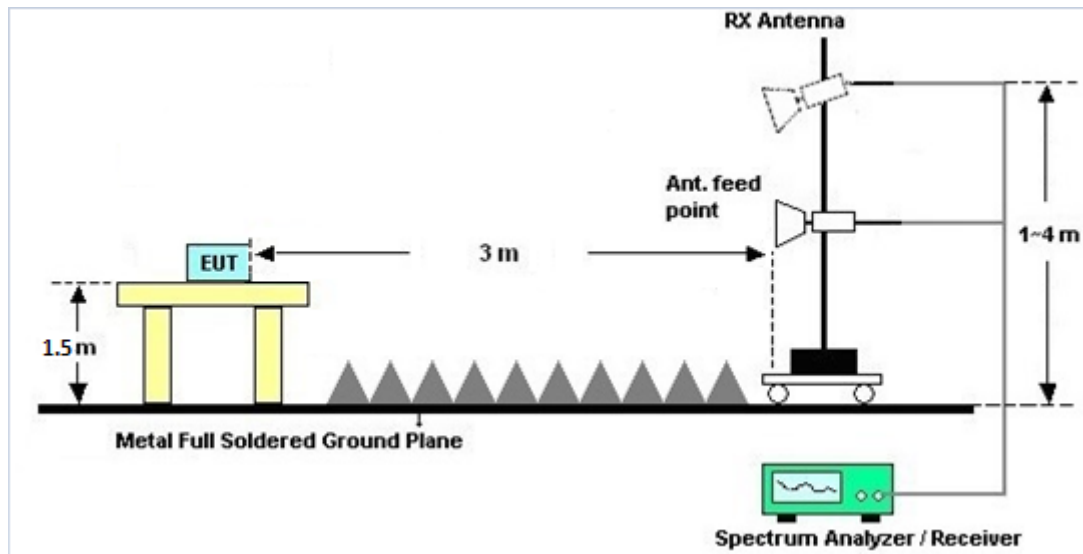

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.4.7 Duty Cycle

Please refer to Appendix C.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup





3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter 1) + Earphone 1		

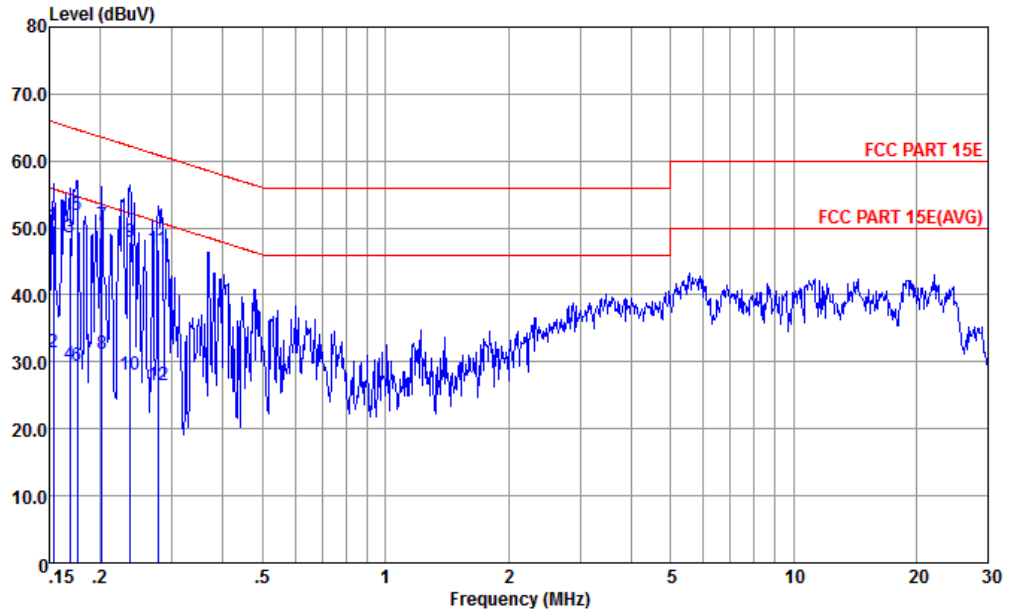


Site : CO01-KS  
 Condition : FCC PART 15E LISN-L-171013-060103 LINE  
 mode : Mode 1  
 : 351884090003551 #22

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	50.37	-15.45	65.82	39.60	0.16	10.61	QP
2	0.153	31.37	-24.45	55.82	20.60	0.16	10.61	Average
3	0.169	48.63	-16.40	65.03	37.90	0.18	10.55	QP
4	0.169	29.69	-25.34	55.03	18.96	0.18	10.55	Average
5 *	0.176	51.91	-12.77	64.68	41.20	0.18	10.53	QP
6	0.176	29.31	-25.37	54.68	18.60	0.18	10.53	Average
7	0.202	50.26	-13.28	63.54	39.61	0.20	10.45	QP
8	0.202	31.26	-22.28	53.54	20.61	0.20	10.45	Average
9	0.237	47.85	-14.37	62.22	37.20	0.21	10.44	QP
10	0.237	28.15	-24.07	52.22	17.50	0.21	10.44	Average
11	0.277	46.85	-14.05	60.90	36.20	0.22	10.43	QP
12	0.277	26.45	-24.45	50.90	15.80	0.22	10.43	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter 1) + Earphone 1		

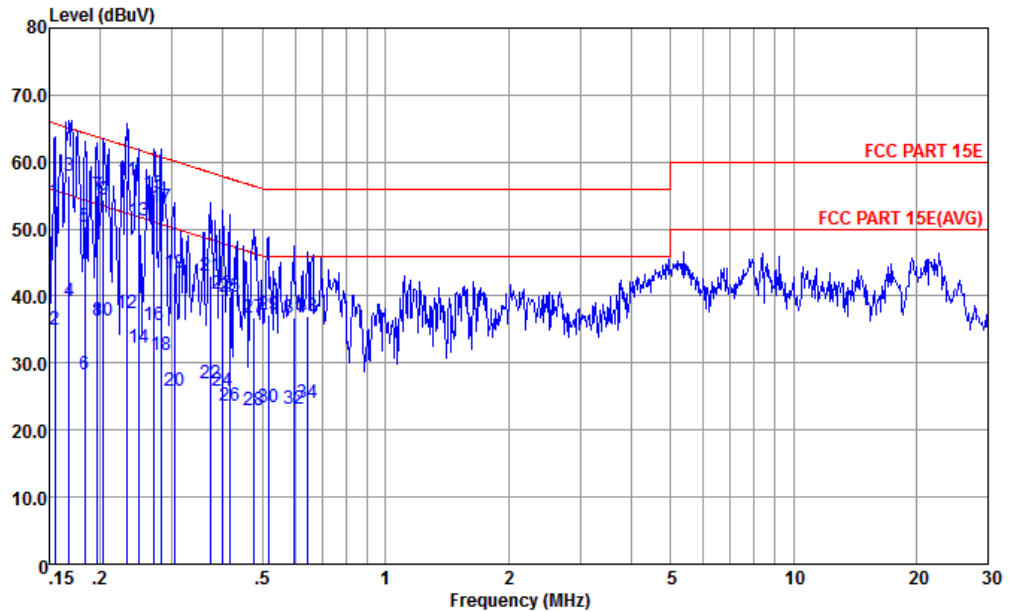


Site : CO01-KS  
 Condition : FCC PART 15E LISN-N-171013-060103 NEUTRAL

mode : Mode 1  
 : 351884090003551 #22

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.155	54.08	-11.66	65.74	43.20	0.28	10.60	QP
2	0.155	35.08	-20.66	55.74	24.20	0.28	10.60	Average
3	0.168	58.03	-7.05	65.08	47.20	0.28	10.55	QP
4	0.168	39.13	-15.95	55.08	28.30	0.28	10.55	Average
5	0.183	50.39	-13.94	64.33	39.60	0.28	10.51	QP
6	0.183	28.29	-26.04	54.33	17.50	0.28	10.51	Average
7	0.197	54.95	-8.81	63.76	44.20	0.28	10.47	QP
8	0.197	36.35	-17.41	53.76	25.60	0.28	10.47	Average
9	0.204	54.33	-9.12	63.45	43.60	0.28	10.45	QP
10	0.204	36.23	-17.22	53.45	25.50	0.28	10.45	Average
11 *	0.233	57.33	-5.02	62.35	46.61	0.28	10.44	QP
12	0.233	37.33	-15.02	52.35	26.61	0.28	10.44	Average
13	0.248	51.32	-10.50	61.82	40.60	0.28	10.44	QP
14	0.248	32.32	-19.50	51.82	21.60	0.28	10.44	Average
15	0.272	55.22	-5.85	61.07	44.51	0.28	10.43	QP
16	0.272	35.62	-15.45	51.07	24.91	0.28	10.43	Average
17	0.282	53.32	-7.44	60.76	42.61	0.28	10.43	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter 1) + Earphone 1		

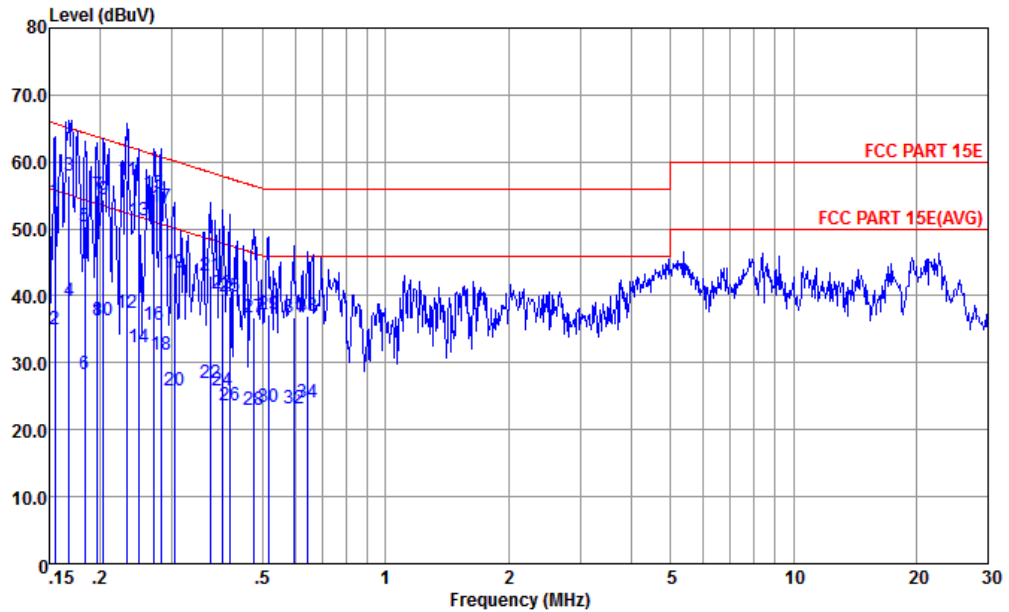

Site : CO01-KS  
 Condition : FCC PART 15E LISN-N-171013-060103 NEUTRAL

mode : Mode 1  
 : 351884090003551 #22

Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	0.282	31.22	-19.54	50.76	20.51	0.28	10.43 Average
19	0.303	43.51	-16.64	60.15	32.80	0.28	10.43 QP
20	0.303	25.91	-24.24	50.15	15.20	0.28	10.43 Average
21	0.371	43.00	-15.47	58.47	32.30	0.29	10.41 QP
22	0.371	26.90	-21.57	48.47	16.20	0.29	10.41 Average
23	0.400	40.29	-17.57	57.86	29.59	0.29	10.41 QP
24	0.400	25.89	-21.97	47.86	15.19	0.29	10.41 Average
25	0.415	39.88	-17.67	57.55	29.20	0.29	10.39 QP
26	0.415	23.58	-23.97	47.55	12.90	0.29	10.39 Average
27	0.476	36.82	-19.59	56.41	26.20	0.29	10.33 QP
28	0.476	22.92	-23.49	46.41	12.30	0.29	10.33 Average
29	0.516	37.18	-18.82	56.00	26.60	0.29	10.29 QP
30	0.516	23.38	-22.62	46.00	12.80	0.29	10.29 Average
31	0.595	36.73	-19.27	56.00	26.20	0.30	10.23 QP
32	0.595	23.13	-22.87	46.00	12.60	0.30	10.23 Average
33	0.644	37.09	-18.91	56.00	26.59	0.30	10.20 QP
34	0.644	24.09	-21.91	46.00	13.59	0.30	10.20 Average



### **3.6 Automatically Discontinue Transmission**

#### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

#### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.





## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Jan. 03, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Jan. 03, 2018	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Jan. 03, 2018	Jan. 18, 2018	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 19, 2017	Jan. 18, 2018	Oct. 18, 2018	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Jan. 18, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2017	Jan. 18, 2018	Oct. 21, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Jan. 18, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 22, 2017	Jan. 18, 2018	Jan. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Jan. 18, 2018	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr. 18, 2017	Jan. 18, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Oct. 12, 2017	Jan. 18, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1GHz~18GHz	Apr. 18, 2017	Jan. 18, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 12, 2017	Jan. 18, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 18, 2018	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 18, 2018	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 18, 2018	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 20, 2017	Jan. 17, 2018	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Jan. 17, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Jan. 17, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Jan. 17, 2018	Oct. 11, 2018	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2018/1/3	Relative Humidity:	51~55	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.48	23.63	-	22.67		
11a	6Mbps	1	44	5220	18.63	23.78	-	22.70		
11a	6Mbps	1	48	5240	18.78	24.18	-	22.74		
HT20	MCS0	1	36	5180	19.28	23.98	-	22.85		
HT20	MCS0	1	44	5220	19.43	24.23	-	22.88		
HT20	MCS0	1	48	5240	19.53	25.13	-	22.91		
HT40	MCS0	1	38	5190	36.66	44.96	-	23.01		
HT40	MCS0	1	46	5230	36.76	45.14	-	23.01		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.56	16.51	24.00	-0.71		Pass
11a	6Mbps	1	44	5220	0.56	16.38	24.00	-0.71		Pass
11a	6Mbps	1	48	5240	0.56	17.14	24.00	-0.71		Pass
HT20	MCS0	1	36	5180	0.66	16.68	24.00	-0.71		Pass
HT20	MCS0	1	44	5220	0.66	16.47	24.00	-0.71		Pass
HT20	MCS0	1	48	5240	0.66	17.11	24.00	-0.71		Pass
HT40	MCS0	1	38	5190	0.64	11.65	24.00	-0.71		Pass
HT40	MCS0	1	46	5230	0.64	16.16	24.00	-0.71		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.56	5.94	11.00	-0.71		Pass
11a	6Mbps	1	44	5220	0.56	6.07	11.00	-0.71		Pass
11a	6Mbps	1	48	5240	0.56	6.87	11.00	-0.71		Pass
HT20	MCS0	1	36	5180	0.66	5.74	11.00	-0.71		Pass
HT20	MCS0	1	44	5220	0.66	5.90	11.00	-0.71		Pass
HT20	MCS0	1	48	5240	0.66	6.68	11.00	-0.71		Pass
HT40	MCS0	1	38	5190	0.64	-1.67	11.00	-0.71		Pass
HT40	MCS0	1	46	5230	0.64	2.95	11.00	-0.71		Pass



**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	18.88	23.53	23.76	29.76	23.98	
11a	6M bps	1	60	5300	18.68	23.83	23.71	29.71	23.98	
11a	6M bps	1	64	5320	18.68	23.93	23.71	29.71	23.98	
HT20	MCS 0	1	52	5260	19.43	23.78	23.88	29.88	23.98	
HT20	MCS 0	1	60	5300	19.43	23.98	23.88	29.88	23.98	
HT20	MCS 0	1	64	5320	19.18	24.03	23.83	29.83	23.98	
HT40	MCS 0	1	54	5270	36.86	44.33	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.66	44.96	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.56	16.84	23.98	0.47	26.99	Pass
11a	6M bps	1	60	5300	0.56	16.89	23.98	0.47	26.99	Pass
11a	6M bps	1	64	5320	0.56	17.27	23.98	0.47	26.99	Pass
HT20	MCS 0	1	52	5260	0.66	16.61	23.98	0.47	26.99	Pass
HT20	MCS 0	1	60	5300	0.66	16.67	23.98	0.47	26.99	Pass
HT20	MCS 0	1	64	5320	0.66	16.99	23.98	0.47	26.99	Pass
HT40	MCS 0	1	54	5270	0.64	15.98	23.98	0.47	26.99	Pass
HT40	MCS 0	1	62	5310	0.64	16.03	23.98	0.47	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.56	6.17	11.00	0.47		Pass
11a	6M bps	1	60	5300	0.56	6.37	11.00	0.47		Pass
11a	6M bps	1	64	5320	0.56	6.58	11.00	0.47		Pass
HT20	MCS 0	1	52	5260	0.66	5.60	11.00	0.47		Pass
HT20	MCS 0	1	60	5300	0.66	5.60	11.00	0.47		Pass
HT20	MCS 0	1	64	5320	0.66	6.07	11.00	0.47		Pass
HT40	MCS 0	1	54	5270	0.64	2.31	11.00	0.47		Pass
HT40	MCS 0	1	62	5310	0.64	5.13	11.00	0.47		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	18.63	23.43	23.70	29.70	23.98	
11a	6M bps	1	116	5580	18.78	23.53	23.74	29.74	23.98	
11a	6M bps	1	140	5700	18.53	23.43	23.68	29.68	23.98	
HT20	MCS 0	1	100	5500	19.28	23.58	23.85	29.85	23.98	
HT20	MCS 0	1	116	5580	19.38	23.83	23.87	29.87	23.98	
HT20	MCS 0	1	140	5700	19.18	24.03	23.83	29.83	23.98	
HT40	MCS 0	1	102	5510	36.76	45.41	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.66	45.85	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.76	44.78	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.56	16.54	23.98	0.47	26.99	Pass
11a	6M bps	1	116	5580	0.56	17.11	23.98	0.47	26.99	Pass
11a	6M bps	1	140	5700	0.56	15.84	23.98	0.47	26.99	Pass
HT20	MCS 0	1	100	5500	0.66	16.61	23.98	0.47	26.99	Pass
HT20	MCS 0	1	116	5580	0.66	17.07	23.98	0.47	26.99	Pass
HT20	MCS 0	1	140	5700	0.66	15.78	23.98	0.47	26.99	Pass
HT40	MCS 0	1	102	5510	0.64	16.18	23.98	0.47	26.99	Pass
HT40	MCS 0	1	110	5550	0.64	16.10	23.98	0.47	26.99	Pass
HT40	MCS 0	1	134	5670	0.64	15.96	23.98	0.47	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.56	5.16	11.00	0.47		Pass
11a	6M bps	1	116	5580	0.56	5.57	11.00	0.47		Pass
11a	6M bps	1	140	5700	0.56	4.64	11.00	0.47		Pass
HT20	MCS 0	1	100	5500	0.66	4.70	11.00	0.47		Pass
HT20	MCS 0	1	116	5580	0.66	5.30	11.00	0.47		Pass
HT20	MCS 0	1	140	5700	0.66	4.08	11.00	0.47		Pass
HT40	MCS 0	1	102	5510	0.64	1.57	11.00	0.47		Pass
HT40	MCS 0	1	110	5550	0.64	1.77	11.00	0.47		Pass
HT40	MCS 0	1	134	5670	0.64	1.41	11.00	0.47		Pass



# Appendix B. Radiated Spurious Emission

## Band 1 - 5150~5250MHz WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 36 5180MHz		5147.36	57.67	-16.33	74	47.33	35.16	11.88	36.7	395	329	P	H
		5127.68	47.95	-6.05	54	37.63	35.16	11.86	36.7	395	329	A	H
	*	5176	106.76	-	-	96.34	35.18	11.93	36.69	395	329	P	H
	*	5176	99.76	-	-	89.34	35.18	11.93	36.69	395	329	A	H
		5127.36	53.89	-20.11	74	43.57	35.16	11.86	36.7	400	197	P	V
		5127.36	45.12	-8.88	54	34.8	35.16	11.86	36.7	400	197	A	V
	*	5182	102.67	-	-	92.25	35.18	11.93	36.69	400	197	P	V
	*	5182	94.96	-	-	84.54	35.18	11.93	36.69	400	197	A	V
802.11a CH 44 5220MHz		5102.24	52.8	-21.2	74	42.54	35.14	11.82	36.7	388	331	P	H
		5105.92	43.71	-10.29	54	33.42	35.15	11.84	36.7	388	331	A	H
	*	5214	105.85	-	-	95.37	35.2	11.97	36.69	388	331	P	H
	*	5214	98.64	-	-	88.16	35.2	11.97	36.69	388	331	A	H
		5360.76	52.26	-21.74	74	41.53	35.27	12.15	36.69	388	331	P	H
		5391.72	42.81	-11.19	54	32.05	35.28	12.17	36.69	388	331	A	H
		5137.28	53.1	-20.9	74	42.78	35.16	11.86	36.7	395	216	P	V
		5104.8	43.45	-10.55	54	33.19	35.14	11.82	36.7	395	216	A	V
	*	5216	102.96	-	-	92.48	35.2	11.97	36.69	395	216	P	V
	*	5216	95.43	-	-	84.95	35.2	11.97	36.69	395	216	A	V
		5373.72	52.26	-21.74	74	41.53	35.27	12.15	36.69	395	216	P	V
		5398.02	42.8	-11.2	54	32.01	35.29	12.19	36.69	395	216	A	V



802.11a CH 48 5240MHz	*	5246	106	-	-	95.47	35.21	12.01	36.69	400	329	P	H
	*	5246	98.61	-	-	88.08	35.21	12.01	36.69	400	329	A	H
		5391	52.32	-21.68	74	41.56	35.28	12.17	36.69	400	329	P	H
		5399.1	42.97	-11.03	54	32.18	35.29	12.19	36.69	400	329	A	H
	*	5234	103.2	-	-	92.69	35.21	11.99	36.69	391	212	P	V
	*	5234	95.71	-	-	85.2	35.21	11.99	36.69	391	212	A	V
		5394.6	51.99	-22.01	74	41.2	35.29	12.19	36.69	391	212	P	V
		5387.22	42.92	-11.08	54	32.16	35.28	12.17	36.69	391	212	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												





Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36		10360	43	-31	74	55.25	38.25	15.65	66.15	300	360	P	H
5180MHz		10360	43.29	-30.71	74	55.54	38.25	15.65	66.15	300	360	P	V
802.11a CH 44		10440	45.18	-28.82	74	57.32	38.28	15.68	66.1	300	360	P	H
5220MHz		10440	43.04	-30.96	74	55.18	38.28	15.68	66.1	300	360	P	V
802.11a CH 48		10480	45	-29	74	57.07	38.3	15.7	66.07	300	360	P	H
5240MHz		10480	46.52	-27.48	74	58.59	38.3	15.7	66.07	300	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 1 5150~5250MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 36 5180MHz		5148.8	61.3	-12.7	74	50.96	35.16	11.88	36.7	320	347	P	H
		5128.32	48.02	-5.98	54	37.7	35.16	11.86	36.7	320	347	A	H
	*	5172	105.53	-	-	95.15	35.17	11.9	36.69	320	347	P	H
	*	5172	98.52	-	-	88.14	35.17	11.9	36.69	320	347	A	H
		5149.76	57.58	-16.42	74	47.24	35.16	11.88	36.7	400	231	P	V
		5128.32	44.8	-9.2	54	34.48	35.16	11.86	36.7	400	231	A	V
	*	5186	102.88	-	-	92.46	35.18	11.93	36.69	400	231	P	V
	5186	95.42	-	-	85	35.18	11.93	36.69	400	231	A	V	
802.11n HT20 CH 44 5220MHz		5145.76	54.07	-19.93	74	43.73	35.16	11.88	36.7	317	352	P	H
		5108.16	43.73	-10.27	54	33.44	35.15	11.84	36.7	317	352	A	H
	*	5214	105.48	-	-	95	35.2	11.97	36.69	317	352	P	H
	*	5214	98.13	-	-	87.65	35.2	11.97	36.69	317	352	A	H
		5357.34	51.76	-22.24	74	41.06	35.26	12.13	36.69	317	352	P	H
		5396.76	42.98	-11.02	54	32.19	35.29	12.19	36.69	317	352	A	H
		5121.12	53.28	-20.72	74	42.99	35.15	11.84	36.7	400	196	P	V
		5115.84	43.63	-10.37	54	33.34	35.15	11.84	36.7	400	196	A	V
	*	5224	102.44	-	-	91.96	35.2	11.97	36.69	400	196	P	V
	*	5224	95	-	-	84.52	35.2	11.97	36.69	400	196	A	V
		5356.44	51.61	-22.39	74	40.91	35.26	12.13	36.69	400	196	P	V
	5385.78	43.02	-10.98	54	32.26	35.28	12.17	36.69	400	196	A	V	



802.11n HT20 CH 48 5240MHz	*	5248	105.56	-	-	95.03	35.21	12.01	36.69	314	331	P	H
	*	5248	98.45	-	-	87.92	35.21	12.01	36.69	314	331	A	H
		5398.56	52.49	-21.51	74	41.7	35.29	12.19	36.69	314	331	P	H
		5392.98	43.07	-10.93	54	32.31	35.28	12.17	36.69	314	331	A	H
	*	5248	102.36	-	-	91.83	35.21	12.01	36.69	400	199	P	V
	*	5248	94.87	-	-	84.34	35.21	12.01	36.69	400	199	A	V
		5362.02	53.25	-20.75	74	42.52	35.27	12.15	36.69	400	199	P	V
		5380.38	43.05	-10.95	54	32.29	35.28	12.17	36.69	400	199	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 36, 44, and 48 at frequencies 10360, 10440, and 10480 MHz.



**Band 1 5150~5250MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 38 5190MHz		5148.32	66.05	-7.95	74	55.71	35.16	11.88	36.7	299	356	P	H
		5148.32	49.71	-4.29	54	39.37	35.16	11.88	36.7	299	356	A	H
	*	5178	102.37	-	-	91.95	35.18	11.93	36.69	299	356	P	H
	*	5178	95	-	-	84.58	35.18	11.93	36.69	299	356	A	H
		5364	51.65	-22.35	74	40.92	35.27	12.15	36.69	299	356	P	H
		5387.04	43	-11	54	32.24	35.28	12.17	36.69	299	356	A	H
		5148.32	57.44	-16.56	74	47.1	35.16	11.88	36.7	400	187	P	V
		5149.99	46.1	-7.9	54	35.76	35.16	11.88	36.7	400	187	A	V
	*	5178	98.06	-	-	87.64	35.18	11.93	36.69	400	187	P	V
	*	5178	90.97	-	-	80.55	35.18	11.93	36.69	400	187	A	V
		5382.72	52.29	-21.71	74	41.53	35.28	12.17	36.69	400	187	P	V
		5387.58	42.94	-11.06	54	32.18	35.28	12.17	36.69	400	187	A	V
802.11n HT40 CH 46 5230MHz		5148.64	54.34	-19.66	74	44	35.16	11.88	36.7	390	354	P	H
		5126.56	45.54	-8.46	54	35.22	35.16	11.86	36.7	390	354	A	H
	*	5220	103.32	-	-	92.84	35.2	11.97	36.69	390	354	P	H
	*	5220	95.88	-	-	85.4	35.2	11.97	36.69	390	354	A	H
		5382	52.42	-21.58	74	41.66	35.28	12.17	36.69	390	354	P	H
		5391.9	43.03	-10.97	54	32.27	35.28	12.17	36.69	390	354	A	H
		5132.64	53.11	-20.89	74	42.79	35.16	11.86	36.7	396	193	P	V
		5126.56	43.96	-10.04	54	33.64	35.16	11.86	36.7	396	193	A	V
	*	5220	100.94	-	-	90.46	35.2	11.97	36.69	396	193	P	V
	*	5220	93.64	-	-	83.16	35.2	11.97	36.69	396	193	A	V
	5367.78	53.08	-20.92	74	42.35	35.27	12.15	36.69	396	193	P	V	
	5397.3	42.95	-11.05	54	32.16	35.29	12.19	36.69	396	193	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 38 5190MHz and CH 46 5230MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**Band 2 - 5250~5350MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 52 5260MHz		5135.36	53.54	-20.46	74	43.22	35.16	11.86	36.7	400	328	P	H
		5111.36	43.53	-10.47	54	33.24	35.15	11.84	36.7	400	328	A	H
	*	5254	105.44	-	-	94.91	35.21	12.01	36.69	400	328	P	H
	*	5254	98.2	-	-	87.67	35.21	12.01	36.69	400	328	A	H
		5117.6	53.29	-20.71	74	43	35.15	11.84	36.7	389	195	P	V
		5103.04	43.52	-10.48	54	33.26	35.14	11.82	36.7	389	195	A	V
	*	5266	103.23	-	-	92.67	35.22	12.03	36.69	389	195	P	V
	*	5266	96.14	-	-	85.58	35.22	12.03	36.69	389	195	A	V
802.11a CH 60 5300MHz		5112.64	53.96	-20.04	74	43.67	35.15	11.84	36.7	395	330	P	H
		5112.96	43.64	-10.36	54	33.35	35.15	11.84	36.7	395	330	A	H
	*	5296	105.55	-	-	94.93	35.24	12.07	36.69	395	330	P	H
	*	5296	97.79	-	-	87.17	35.24	12.07	36.69	395	330	A	H
		5352.5	52.86	-21.14	74	42.16	35.26	12.13	36.69	395	330	P	H
		5352.2	44.78	-9.22	54	34.08	35.26	12.13	36.69	395	330	A	H
		5147.52	53.53	-20.47	74	43.19	35.16	11.88	36.7	339	235	P	V
		5101.6	43.62	-10.38	54	33.36	35.14	11.82	36.7	339	235	A	V
	*	5306	102.7	-	-	92.08	35.24	12.07	36.69	339	235	P	V
	*	5306	95.52	-	-	84.9	35.24	12.07	36.69	339	235	A	V
		5367.4	52.54	-21.46	74	41.81	35.27	12.15	36.69	339	235	P	V
		5352.3	44.62	-9.38	54	33.92	35.26	12.13	36.69	339	235	A	V



802.11a CH 64 5320MHz	*	5314	103.12	-	-	92.47	35.25	12.09	36.69	303	323	P	H
	*	5314	95.93	-	-	85.28	35.25	12.09	36.69	303	323	A	H
		5350.2	53.63	-20.37	74	42.93	35.26	12.13	36.69	303	323	P	H
		5372.5	44.71	-9.29	54	33.98	35.27	12.15	36.69	303	323	A	H
	*	5314	103.09	-	-	92.44	35.25	12.09	36.69	371	248	P	V
	*	5314	95.64	-	-	84.99	35.25	12.09	36.69	371	248	A	V
		5350.01	52.93	-21.07	74	42.23	35.26	12.13	36.69	371	248	P	V
		5350.01	44.46	-9.54	54	33.76	35.26	12.13	36.69	371	248	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												





Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	45.21	-28.79	74	57.22	38.31	15.72	66.04	100	360	P	H
		10520	45.38	-28.62	74	57.39	38.31	15.72	66.04	100	360	P	V
802.11a CH 60 5300MHz		10600	45.28	-28.72	74	57.17	38.34	15.75	65.98	100	360	P	H
		10600	45.51	-28.49	74	57.4	38.34	15.75	65.98	100	360	P	V
802.11a CH 64 5320MHz		10640	45.8	-28.2	74	57.63	38.36	15.77	65.96	100	360	P	H
		10640	43.67	-30.33	74	55.5	38.36	15.77	65.96	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT20 CH 52 (5260MHz) and 802.11n HT20 CH 60 (5300MHz).



802.11n HT20 CH 64 5320MHz	*	5312	103.63	-	-	92.98	35.25	12.09	36.69	395	324	P	H
	*	5312	96.01	-	-	85.36	35.25	12.09	36.69	395	324	A	H
		5353.9	54.1	-19.9	74	43.4	35.26	12.13	36.69	395	324	P	H
		5371.8	44.15	-9.85	54	33.42	35.27	12.15	36.69	395	324	A	H
	*	5326	101.86	-	-	91.21	35.25	12.09	36.69	398	191	P	V
	*	5326	95.12	-	-	84.47	35.25	12.09	36.69	398	191	A	V
		5371.4	54.22	-19.78	74	43.49	35.27	12.15	36.69	398	191	P	V
		5372	45.84	-8.16	54	35.11	35.27	12.15	36.69	398	191	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**Band 2 5250~5350MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10520	45.2	-28.8	74	57.21	38.31	15.72	66.04	300	360	P	H
CH 52 5260MHz		10520	44.07	-29.93	74	56.08	38.31	15.72	66.04	300	360	P	V
802.11n HT20		10600	43.74	-30.26	74	55.63	38.34	15.75	65.98	300	360	P	H
CH 60 5300MHz		10600	43.79	-30.21	74	55.68	38.34	15.75	65.98	300	360	P	V
802.11n HT20		10640	45.75	-28.25	74	57.58	38.36	15.77	65.96	300	360	P	H
CH 64 5320MHz		10640	43.46	-30.54	74	55.29	38.36	15.77	65.96	300	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT40 CH 54 5270MHz		5112.16	52.58	-21.42	74	42.29	35.15	11.84	36.7	284	329	P	H	
		5108.8	43.72	-10.28	54	33.43	35.15	11.84	36.7	284	329	A	H	
	*	5260	101.99	-	-	91.43	35.22	12.03	36.69	284	329	P	H	
	*	5260	94.59	-	-	84.03	35.22	12.03	36.69	284	329	A	H	
		5364.1	53.02	-20.98	74	42.29	35.27	12.15	36.69	284	329	P	H	
		5372.2	43.44	-10.56	54	32.71	35.27	12.15	36.69	284	329	A	H	
		5108.96	53.08	-20.92	74	42.79	35.15	11.84	36.7	387	197	P	V	
		5112.48	43.55	-10.45	54	33.26	35.15	11.84	36.7	387	197	A	V	
	*	5258	100.42	-	-	89.89	35.21	12.01	36.69	387	197	P	V	
	*	5258	92.86	-	-	82.33	35.21	12.01	36.69	387	197	A	V	
		5353.9	53.01	-20.99	74	42.31	35.26	12.13	36.69	387	197	P	V	
		5373	43.77	-10.23	54	33.04	35.27	12.15	36.69	387	197	A	V	
	802.11n HT40 CH 62 5310MHz		5114.4	53.01	-20.99	74	42.72	35.15	11.84	36.7	307	316	P	H
			5113.12	43.66	-10.34	54	33.37	35.15	11.84	36.7	307	316	A	H
*		5304	100.92	-	-	90.3	35.24	12.07	36.69	307	316	P	H	
*		5304	93.77	-	-	83.15	35.24	12.07	36.69	307	316	A	H	
		5351.3	63.54	-10.46	74	52.84	35.26	12.13	36.69	307	316	P	H	
		5350.5	49.49	-4.51	54	38.79	35.26	12.13	36.69	307	316	A	H	
		5120.96	53.11	-20.89	74	42.82	35.15	11.84	36.7	400	193	P	V	
		5115.52	43.7	-10.3	54	33.41	35.15	11.84	36.7	400	193	A	V	
*		5320	100.91	-	-	90.26	35.25	12.09	36.69	400	193	P	V	
*		5320	93.13	-	-	82.48	35.25	12.09	36.69	400	193	A	V	
	5351	62.46	-11.54	74	51.76	35.26	12.13	36.69	400	193	P	V		
	5351.3	48.16	-5.84	54	37.46	35.26	12.13	36.69	400	193	A	V		
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 54 at 10540MHz and CH 62 at 10620MHz, plus a Remark section.



**Band 3 - 5470~5725MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 100 5500MHz		5429.84	52.41	-21.59	74	41.57	35.3	12.23	36.69	317	325	P	H
		5447.92	43.77	-10.23	54	32.9	35.31	12.25	36.69	317	325	A	H
	*	5504	97.93	-	-	86.95	35.34	12.32	36.68	317	325	P	H
	*	5504	90.62	-	-	79.64	35.34	12.32	36.68	317	325	A	H
		5463.92	52.47	-21.53	74	41.57	35.32	12.27	36.69	392	205	P	V
		5447.76	44.33	-9.67	54	33.46	35.31	12.25	36.69	392	205	A	V
	*	5508	98.96	-	-	87.98	35.34	12.32	36.68	392	205	P	V
	*	5508	91.66	-	-	80.68	35.34	12.32	36.68	392	205	A	V
802.11a CH 116 5580MHz		5445.52	52.45	-21.55	74	41.58	35.31	12.25	36.69	395	317	P	H
		5467.28	43.3	-10.7	54	32.4	35.32	12.27	36.69	395	317	A	H
	*	5574	98.96	-	-	87.87	35.37	12.4	36.68	395	317	P	H
	*	5574	91.53	-	-	80.44	35.37	12.4	36.68	395	317	A	H
		5741.8	52.54	-21.46	74	41.26	35.54	12.59	36.85	395	317	P	H
		5733.48	43.51	-10.49	54	32.27	35.52	12.57	36.85	395	317	A	H
		5448.24	52.51	-21.49	74	41.64	35.31	12.25	36.69	400	213	P	V
		5439.12	43.4	-10.6	54	32.56	35.3	12.23	36.69	400	213	A	V
	*	5574	99.82	-	-	88.73	35.37	12.4	36.68	400	213	P	V
	*	5574	92.73	-	-	81.64	35.37	12.4	36.68	400	213	A	V
		5741.72	52.93	-21.07	74	41.65	35.54	12.59	36.85	400	213	P	V
		5758.2	43.45	-10.55	54	32.19	35.56	12.6	36.9	400	213	A	V



802.11a CH 140 5700MHz	*	5706	100.96	-	-	89.73	35.49	12.55	36.81	393	333	P	H
	*	5706	94.19	-	-	82.96	35.49	12.55	36.81	393	333	A	H
		5736.44	53.37	-20.63	74	42.09	35.54	12.59	36.85	393	333	P	H
		5752.12	44.66	-9.34	54	33.35	35.56	12.6	36.85	393	333	A	H
	*	5704	98.3	-	-	87.03	35.49	12.55	36.77	309	226	P	V
	*	5704	91.01	-	-	79.74	35.49	12.55	36.77	309	226	A	V
		5746.12	52.46	-21.54	74	41.18	35.54	12.59	36.85	309	226	P	V
		5752.6	44.18	-9.82	54	32.87	35.56	12.6	36.85	309	226	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												





Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 100, 116, and 140.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5469.52	58.36	-15.64	74	47.46	35.32	12.27	36.69	320	317	P	H
		5469.84	46.56	-7.44	54	35.66	35.32	12.27	36.69	320	317	A	H
	*	5502	102.19	-	-	91.21	35.34	12.32	36.68	320	317	P	H
	*	5502	94.83	-	-	83.85	35.34	12.32	36.68	320	317	A	H
		5469.68	57.92	-16.08	74	47.02	35.32	12.27	36.69	336	197	P	V
		5469.99	47.73	-6.27	54	72.15	0	12.27	36.69	336	197	A	V
	*	5506	103.12	-	-	92.14	35.34	12.32	36.68	336	197	P	V
	5506	95.82	-	-	84.84	35.34	12.32	36.68	336	197	A	V	
802.11n HT20 CH 116 5580MHz		5431.76	52.41	-21.59	74	41.57	35.3	12.23	36.69	310	313	P	H
		5466.48	43.71	-10.29	54	32.81	35.32	12.27	36.69	310	313	A	H
	*	5588	103.11	-	-	91.99	35.38	12.42	36.68	310	313	P	H
	*	5588	95.94	-	-	84.82	35.38	12.42	36.68	310	313	A	H
		5758.28	52.98	-21.02	74	41.72	35.56	12.6	36.9	310	313	P	H
		5744.44	43.85	-10.15	54	32.57	35.54	12.59	36.85	310	313	A	H
		5443.28	53.61	-20.39	74	42.77	35.3	12.23	36.69	400	205	P	V
		5438.32	43.8	-10.2	54	32.96	35.3	12.23	36.69	400	205	A	V
	*	5574	102.54	-	-	91.45	35.37	12.4	36.68	400	205	P	V
	*	5574	95.67	-	-	84.58	35.37	12.4	36.68	400	205	A	V
		5759.72	53.12	-20.88	74	41.86	35.56	12.6	36.9	400	205	P	V
	5763.72	43.82	-10.18	54	32.56	35.56	12.6	36.9	400	205	A	V	



802.11n HT20 CH 140 5700MHz	*	5706	100.48	-	-	89.25	35.49	12.55	36.81	321	313	P	H
	*	5706	93.03	-	-	81.8	35.49	12.55	36.81	321	313	A	H
		5731	53.42	-20.58	74	42.18	35.52	12.57	36.85	321	313	P	H
		5751.88	45.98	-8.02	54	34.67	35.56	12.6	36.85	321	313	A	H
	*	5708	99.04	-	-	87.81	35.49	12.55	36.81	100	216	P	V
	*	5708	91.67	-	-	80.44	35.49	12.55	36.81	100	216	A	V
		5741.72	53.5	-20.5	74	42.22	35.54	12.59	36.85	100	216	P	V
		5752.12	45.11	-8.89	54	33.8	35.56	12.6	36.85	100	216	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11000	44.44	-29.56	74	55.72	38.5	15.92	65.7	100	0	P	H
CH 100		11000	44.22	-29.78	74	55.5	38.5	15.92	65.7	100	360	P	V
5500MHz													
802.11n HT20		11160	44.69	-29.31	74	55.71	38.57	15.99	65.58	100	0	P	H
CH 116		11160	44.98	-29.02	74	56	38.57	15.99	65.58	100	0	P	V
5580MHz													
802.11n HT20		11400	44.61	-29.39	74	55.26	38.66	16.1	65.41	300	360	P	H
CH 140		11400	45.47	-28.53	74	56.12	38.66	16.1	65.41	100	360	P	V
5700MHz													
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 102 5510MHz		5465.2	61.89	-12.11	74	50.99	35.32	12.27	36.69	311	320	P	H
		5469.52	46.75	-7.25	54	35.85	35.32	12.27	36.69	311	320	A	H
	*	5512	97.53	-	-	86.55	35.34	12.32	36.68	311	320	P	H
	*	5512	89.89	-	-	78.91	35.34	12.32	36.68	311	320	A	H
		5749.4	53.13	-20.87	74	41.85	35.54	12.59	36.85	311	320	P	H
		5751.32	43.77	-10.23	54	32.49	35.54	12.59	36.85	311	320	A	H
		5468.4	63.86	-10.14	74	52.96	35.32	12.27	36.69	317	218	P	V
	!	5468.88	48.58	-5.42	54	37.68	35.32	12.27	36.69	317	218	A	V
	*	5522	98	-	-	87	35.34	12.34	36.68	317	218	P	V
	*	5522	90.67	-	-	79.67	35.34	12.34	36.68	317	218	A	V
		5730.52	53.41	-20.59	74	42.17	35.52	12.57	36.85	317	218	P	V
		5734.6	43.77	-10.23	54	32.49	35.54	12.59	36.85	317	218	A	V
802.11n HT40 CH 110 5550MHz		5466.64	52.64	-21.36	74	41.74	35.32	12.27	36.69	303	314	P	H
		5446.96	43.87	-10.13	54	33	35.31	12.25	36.69	303	314	A	H
	*	5560	96.86	-	-	85.8	35.36	12.38	36.68	303	314	P	H
	*	5560	89.5	-	-	78.44	35.36	12.38	36.68	303	314	A	H
		5748.36	53.2	-20.8	74	41.92	35.54	12.59	36.85	303	314	P	H
		5727	43.68	-10.32	54	32.4	35.52	12.57	36.81	303	314	A	H
		5400.56	53.3	-20.7	74	42.51	35.29	12.19	36.69	312	219	P	V
		5446.8	43.96	-10.04	54	33.09	35.31	12.25	36.69	312	219	A	V
	*	5560	96.92	-	-	85.86	35.36	12.38	36.68	312	219	P	V
	*	5560	89.56	-	-	78.5	35.36	12.38	36.68	312	219	A	V
		5741.32	52.87	-21.13	74	41.59	35.54	12.59	36.85	312	219	P	V
		5749.72	43.68	-10.32	54	32.4	35.54	12.59	36.85	312	219	A	V



802.11n HT40 CH 134 5670MHz		5425.36	53.08	-20.92	74	42.27	35.29	12.21	36.69	277	322	P	H
		5448.24	43.43	-10.57	54	32.56	35.31	12.25	36.69	277	322	A	H
	*	5682	99.01	-	-	87.81	35.45	12.52	36.77	277	322	P	H
	*	5682	91.47	-	-	80.27	35.45	12.52	36.77	277	322	A	H
		5756.28	53.03	-20.97	74	41.77	35.56	12.6	36.9	277	322	P	H
		5727.88	44.25	-9.75	54	32.97	35.52	12.57	36.81	277	322	A	H
		5454.96	53.03	-20.97	74	42.16	35.31	12.25	36.69	272	224	P	V
		5453.04	43.42	-10.58	54	32.55	35.31	12.25	36.69	272	224	A	V
	*	5682	98.87	-	-	87.67	35.45	12.52	36.77	272	224	P	V
	*	5682	91.31	-	-	80.11	35.45	12.52	36.77	272	224	A	V
		5751.4	53.38	-20.62	74	42.1	35.54	12.59	36.85	272	224	P	V
		5726.52	44	-10	54	32.72	35.52	12.57	36.81	272	224	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 102, 110, and 134 at various frequencies.



Emission below 1GHz  
WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n HT40 LF		34.85	24.42	-15.58	40	30.17	25.7	0.85	32.3	100	218	P	H
		81.41	22.34	-17.66	40	37.62	15.66	1.31	32.25	-	-	P	H
		216.24	20.4	-25.6	46	33.38	17.07	2.16	32.21	-	-	P	H
		471.35	25.14	-20.86	46	29.3	24.51	3.26	31.93	-	-	P	H
		698.33	28.07	-17.93	46	27.83	27.9	4.02	31.68	-	-	P	H
		803.09	29.51	-16.49	46	28.79	28.01	4.28	31.57	-	-	P	H
		30	26.82	-13.18	40	31.66	26.8	0.65	32.29	-	-	P	V
		59.1	31.21	-8.79	40	47.99	14.32	1.11	32.21	-	-	P	V
		65.89	33.38	-6.62	40	51.21	13.22	1.19	32.24	100	257	P	V
		323.91	25.82	-20.18	46	34.41	20.61	2.88	32.08	-	-	P	V
		658.56	27.76	-18.24	46	29.32	25.85	4.29	31.7	-	-	P	V
	901.06	29.75	-16.25	46	27.63	29	4.57	31.45	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



### Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	87.96	1.377	0.726	1 kHz
802.11n HT20	85.84	1.274	0.785	1 kHz
802.11n HT40	86.28	1.230	0.813	1 kHz

#### 802.11a

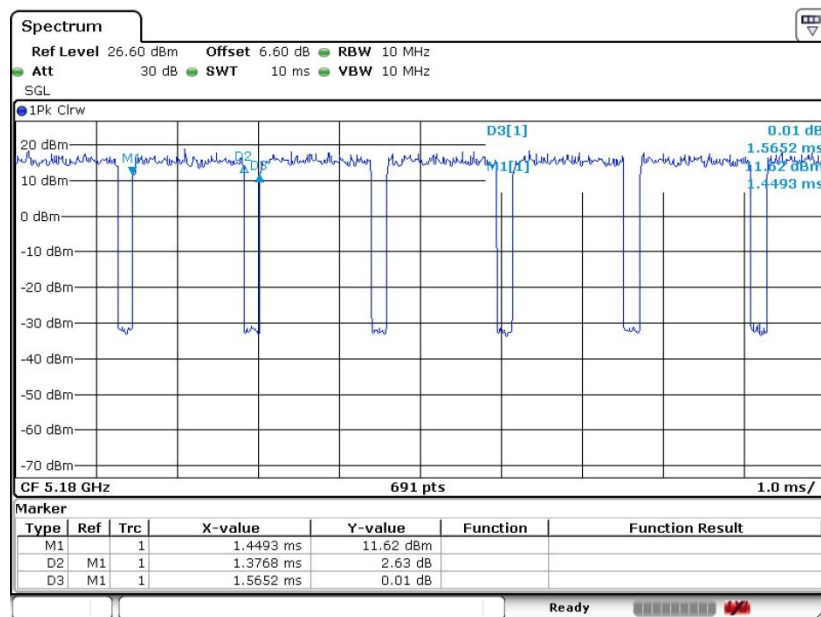



802.11n HT20

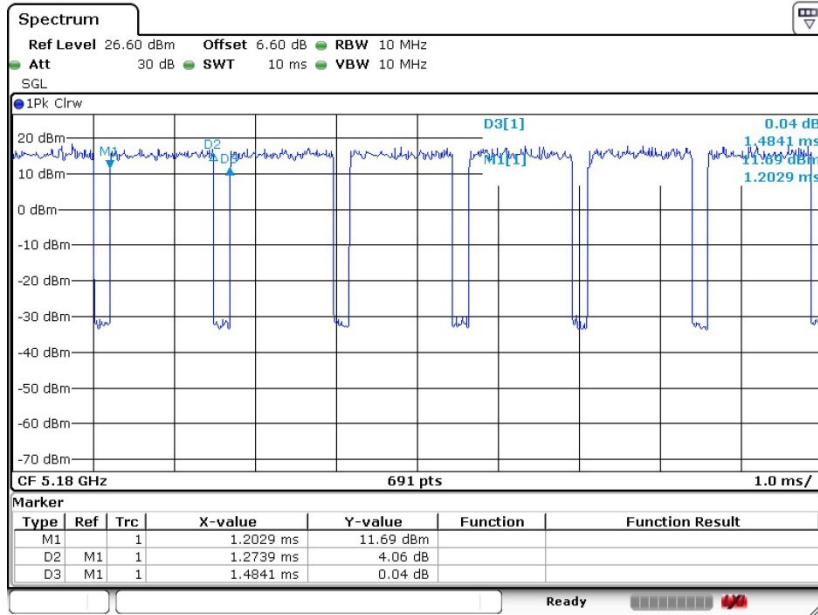

802.11n HT40

