



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1929-5
FCC ID : IHDT56XE5
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

This is a variant report. The product was received on Jan. 18, 2018 and testing was completed on Mar. 13, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID: IHDT56XE5

Page Number : 1 of 19

Report Issued Date : Mar. 14, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 2.0



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 7

 1.5 Modification of EUT 7

 1.6 Testing Location 8

 1.7 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 9

 2.1 Carrier Frequency Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 11

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

3 TEST RESULT 12

 3.1 Output Power Measurement..... 12

 3.2 Radiated Band Edges and Spurious Emission Measurement 13

 3.3 Antenna Requirements 17

4 LIST OF MEASURING EQUIPMENT 18

5 UNCERTAINTY OF EVALUATION..... 19

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|---|--------------------|--|----------------------------|--------------|--|
| - | 15.247(a)(1) | Number of Channels | ≥ 15Chs | Not Required | - |
| - | 15.247(a)(1) | Hopping Channel Separation | ≥ 2/3 of 20dB BW | Not Required | - |
| - | 15.247(a)(1) | Dwell Time of Each Channel | ≤ 0.4sec in 31.6sec period | Not Required | - |
| - | 15.247(a)(1) | 20dB Bandwidth | NA | Not Required | - |
| - | - | 99% Bandwidth | - | Not Required | - |
| 3.1 | 15.247(b)(1) | Peak Output Power | ≤ 125 mW | Pass | - |
| - | 15.247(d) | Conducted Band Edges | ≤ 20dBc | Not Required | - |
| - | 15.247(d) | Conducted Spurious Emission | ≤ 20dBc | Not Required | - |
| 3.2 | 15.247(d) | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 6.72 dB at 180.390 MHz |
| - | 15.207 | AC Conducted Emission | 15.207(a) | Not Required | - |
| 3.3 | 15.203 & 15.247(b) | Antenna Requirement | N/A | Pass | - |
| Remark: Not required means after assessing, test items are not necessary to carry out. | | | | | |



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|--|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT1929-5 |
| FCC ID | IHDT56XE5 |
| IMEI Code | Conducted IMEI 1: 354106090006492 IMEI 2: 354106090006500 |
| | Radiation: IMEI 1: 354106090007995 IMEI 2: 354106090008001 |
| EUT supports Radios application | GSM/EGPRS/WCDMA/HSPA/LTE/GNSS/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE |
| HW Version | DVT2 |
| EUT Stage | Identical Prototype |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report. All the test cases were performed on original report which can be referred to Sporton Report Number FR811821-02A.



| Accessory List | |
|------------------------|---------------------------------------|
| AC Adapter 1 | Brand Name : Motorola |
| | Model Name : SC-28 SPN5997A |
| | Manufacturer : Salom |
| AC Adapter 2 | Brand Name : Motorola |
| | Model Name : SC-28 SPN5976A |
| | Manufacturer : Salom |
| AC Adapter 3 | Brand Name : Motorola |
| | Model Name : SC-28 SPN5998A |
| | Manufacturer : Cliptech |
| Battery | Manufacturer : Chenyang |
| | Brand Name : Motorola |
| | Model Name : JS40 |
| Earphone | Manufacturer : SUNWODA |
| | Brand Name : Motorola |
| | Model Name : SH38C16618 |
| C2Audio Cable 1 | Brand Name : Motorola |
| | Model Name : SC18C27844 |
| | Manufacturer : Luxshare |
| C2Audio Cable 2 | Brand Name : Motorola |
| | Model Name : SC18C27845 |
| | Manufacturer : Cabletech |
| USB Cable 1 | Brand Name : Cabletech |
| | Model Name : SKN6473A |
| USB Cable 2 | Brand Name : FOXLINK |
| | Model Name : SKN6473A 17195-C 0403532 |
| USB Cable 3 | Brand Name : SAIBAO |
| | Model Name : SKN6473A 17214-C 1127044 |
| USB Cable 4 | Brand Name : Luxshare |
| | Model Name : SKN6473A 17227-C 1126538 |



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx/Rx Frequency Range | 2402 MHz ~ 2480 MHz |
| Number of Channels | 79 |
| Carrier Frequency of Each Channel | 2402+n*1 MHz; n=0~78 |
| Maximum Output Power to Antenna | Bluetooth BR(1Mbps) : 12.82 dBm (0.0191 W) Bluetooth EDR (2Mbps) : 12.78 dBm (0.0190 W) Bluetooth EDR (3Mbps) : 12.80 dBm (0.0191 W) |
| Antenna Type / Gain | Internal Antenna with gain -5.00 dBi |
| Type of Modulation | Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK |

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

| | |
|---------------------------|--|
| Test Site | SPORTON INTERNATIONAL INC. |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978 |
| Test Site No. | Sporton Site No. TH05-HY |

Note: The test site complies with ANSI C63.4 2014 requirement.

| | |
|---------------------------|--|
| Test Site | SPORTON INTERNATIONAL INC. |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978 |
| Test Site No. | Sporton Site No. 03CH12-HY |

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 0 | 2402 | 27 | 2429 | 54 | 2456 |
| | 1 | 2403 | 28 | 2430 | 55 | 2457 |
| | 2 | 2404 | 29 | 2431 | 56 | 2458 |
| | 3 | 2405 | 30 | 2432 | 57 | 2459 |
| | 4 | 2406 | 31 | 2433 | 58 | 2460 |
| | 5 | 2407 | 32 | 2434 | 59 | 2461 |
| | 6 | 2408 | 33 | 2435 | 60 | 2462 |
| | 7 | 2409 | 34 | 2436 | 61 | 2463 |
| | 8 | 2410 | 35 | 2437 | 62 | 2464 |
| | 9 | 2411 | 36 | 2438 | 63 | 2465 |
| | 10 | 2412 | 37 | 2439 | 64 | 2466 |
| | 11 | 2413 | 38 | 2440 | 65 | 2467 |
| | 12 | 2414 | 39 | 2441 | 66 | 2468 |
| | 13 | 2415 | 40 | 2442 | 67 | 2469 |
| | 14 | 2416 | 41 | 2443 | 68 | 2470 |
| | 15 | 2417 | 42 | 2444 | 69 | 2471 |
| | 16 | 2418 | 43 | 2445 | 70 | 2472 |
| | 17 | 2419 | 44 | 2446 | 71 | 2473 |
| | 18 | 2420 | 45 | 2447 | 72 | 2474 |
| | 19 | 2421 | 46 | 2448 | 73 | 2475 |
| | 20 | 2422 | 47 | 2449 | 74 | 2476 |
| | 21 | 2423 | 48 | 2450 | 75 | 2477 |
| | 22 | 2424 | 49 | 2451 | 76 | 2478 |
| | 23 | 2425 | 50 | 2452 | 77 | 2479 |
| | 24 | 2426 | 51 | 2453 | 78 | 2480 |
| | 25 | 2427 | 52 | 2454 | - | - |
| | 26 | 2428 | 53 | 2455 | - | - |



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases | | | |
|--|---|---|---|
| Test Item | Data Rate / Modulation | | |
| | Bluetooth BR 1Mbps GFSK | Bluetooth EDR 2Mbps $\pi/4$ -DQPSK | Bluetooth EDR 3Mbps 8-DPSK |
| Conducted Test Cases | Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz | Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz | Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz |
| Radiated Test Cases | Bluetooth BR 1Mbps GFSK | | |
| | Mode 1: CH78_2480 MHz | | |
| Remark: <ol style="list-style-type: none"> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission. For Radiated Test Cases, The tests were performance with USB Cable 1 Type C. | | | |

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

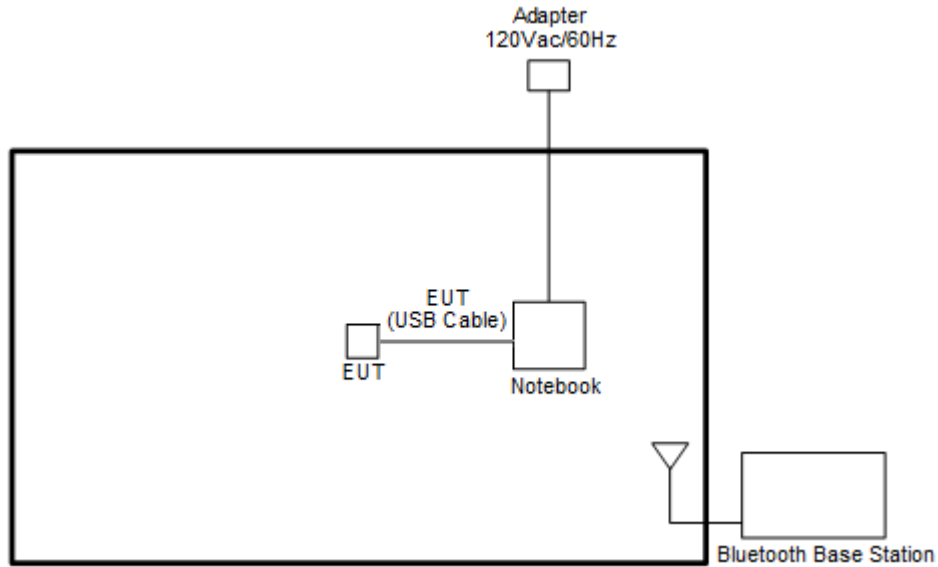

2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|------------------------|------------|------------|---------|------------|--|
| 1. | Bluetooth Base Station | R&S | CBT32 | N/A | N/A | Unshielded, 1.8 m |
| 2. | Notebook | Lenovo | E335 | FCC DoC | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

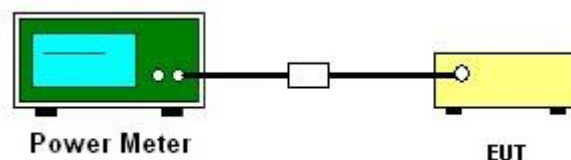

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.72dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated emissions below 30MHz

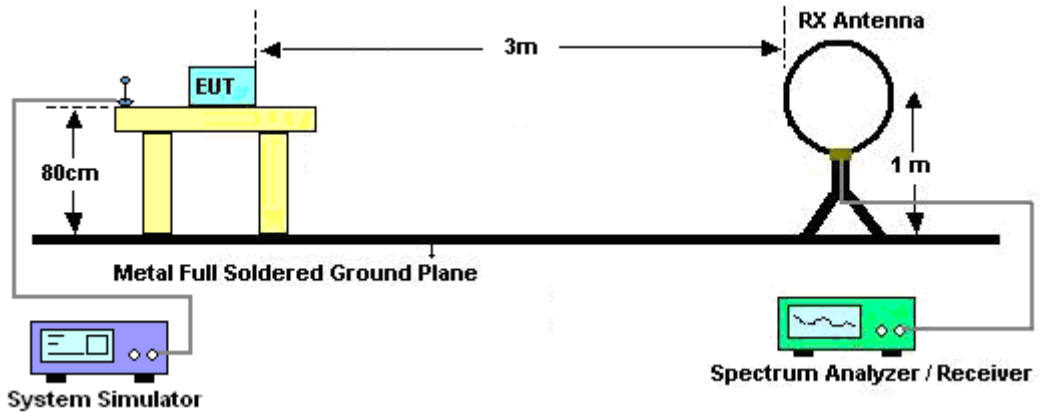

For radiated emissions from 30MHz to 1GHz

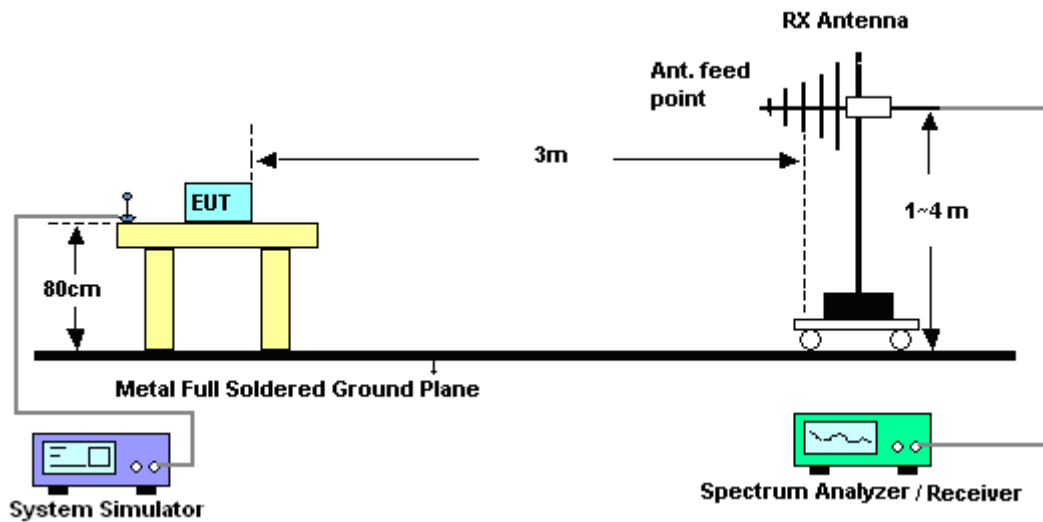

For radiated emissions above 1GHz

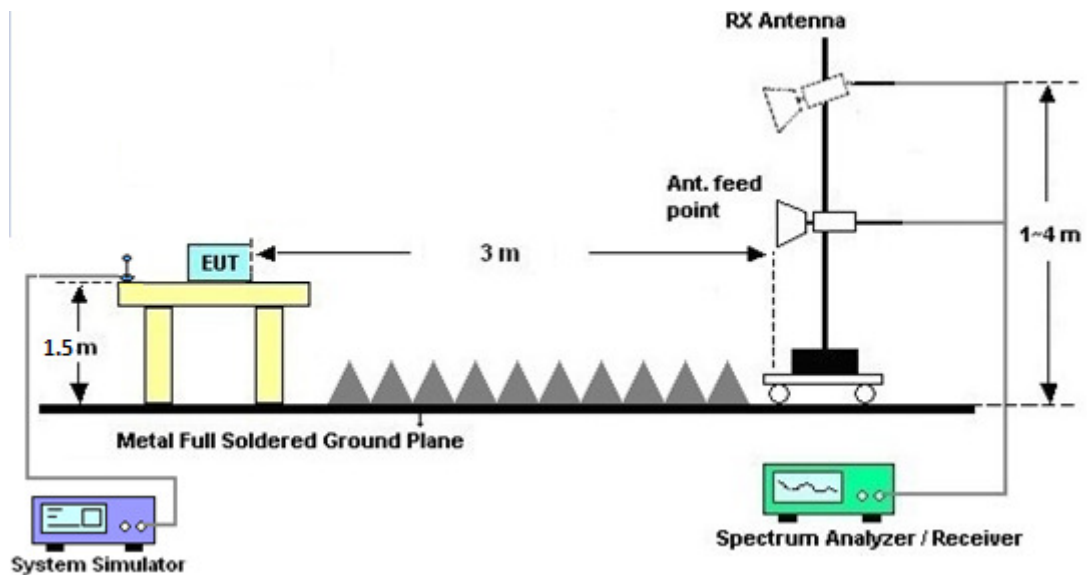

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-------------------------|-----------------------|-------------------------|--------------------|-------------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Power Meter | Anritsu | ML2495A | 0932001 | N/A | Sep. 26, 2017 | Feb. 13, 2018~ Feb. 20, 2018 | Sep. 25, 2018 | Conducted (TH05-HY) |
| Power Sensor | Anritsu | MA2411B | 0846202 | 300MHz~40GHz z | Sep. 26, 2017 | Feb. 13, 2018~ Feb. 20, 2018 | Sep. 25, 2018 | Conducted (TH05-HY) |
| Amplifier | MITEQ | TTA1840-35- HG | 1871923 | 18GHz~40GHz, VSWR : 2.5:1 max | Jul. 18, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Jul. 17, 2018 | Radiation (03CH12-HY) |
| Bilog Antenna | TESEQ | CBL 6111D&N-6-0 6 | 35414&AT- N0602 | 30MHz~1GHz | Oct. 14, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Oct. 13, 2018 | Radiation (03CH12-HY) |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100488 | 9 kHz~30 MHz | Nov. 23, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Nov. 22, 2019 | Radiation (03CH12-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESU26 | 100390 | 20Hz~26.5GHz | Dec. 25, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Dec. 24, 2018 | Radiation (03CH12-HY) |
| Horn Antenna | SCHWARZBE CK | BBHA 9120D | 9120D-132 8 | 1GHz ~ 18GHz | Oct. 20, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Oct. 19, 2018 | Radiation (03CH12-HY) |
| Preamplifier | COM-POWER | PA-103 | 161075 | 10MHz~1GHz | Mar. 23, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Mar. 22, 2018 | Radiation (03CH12-HY) |
| Preamplifier | Keysight | 83017A | MY532701 48 | 1GHz~26.5GHz | Jan. 15, 2018 | Mar. 08, 2018~ Mar. 13, 2018 | Jan. 14, 2019 | Radiation (03CH12-HY) |
| Preamplifier | MITEQ | AMF-7D-0010 1800 | 2025787 | 1GHZ~18GHZ | Feb. 13, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Feb. 12, 2019 | Radiation (03CH12-HY) |
| Antenna Mast | EMEC | AM-BS-4500- B | N/A | 1m~4m | N/A | Mar. 08, 2018~ Mar. 13, 2018 | N/A | Radiation (03CH12-HY) |
| Turn Table | EMEC | TT2000 | N/A | 0~360 Degree | N/A | Mar. 08, 2018~ Mar. 13, 2018 | N/A | Radiation (03CH12-HY) |
| Attenuator | Fairview Microwave | SA18S5W-10 | n/a | 10db | Mar. 24, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Mar. 23, 2018 | Radiation (03CH12-HY) |
| SHF-EHF Horn Antenna | SCHWARZBE CK | BBHA 9170 | BBHA9170 576 | 18GHz ~ 40GHz | Apr. 27, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Apr. 26, 2018 | Radiation (03CH12-HY) |
| Spectrum Analyzer | Keysight | N9010A | MY553705 26 | 10Hz~44GHz | Mar. 15, 2017 | Mar. 08, 2018~ Mar. 13, 2018 | Mar. 14, 2018 | Radiation (03CH12-HY) |



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.10 |
|---|------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.20 |
|---|------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.70 |
|---|------|

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|-------------------------|--------------------|-------|----|
| Test Engineer: | Shiming Liu / Luffy Lin | Temperature: | 21~25 | °C |
| Test Date: | 2018/2/13 ~ 2018/02/20 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA**Peak Power Table**

| DH | CH. | NTX | Peak Power (dBm) | Power Limit (dBm) | Test Result |
|------|-----|-----|------------------|-------------------|-------------|
| DH1 | 0 | 1 | 12.82 | 20.97 | Pass |
| | 39 | 1 | 11.44 | 20.97 | Pass |
| | 78 | 1 | 10.83 | 20.97 | Pass |
| 2DH1 | 0 | 1 | 12.78 | 20.97 | Pass |
| | 39 | 1 | 11.29 | 20.97 | Pass |
| | 78 | 1 | 10.81 | 20.97 | Pass |
| 3DH1 | 0 | 1 | 12.80 | 20.97 | Pass |
| | 39 | 1 | 11.35 | 20.97 | Pass |
| | 78 | 1 | 10.83 | 20.97 | Pass |

TEST RESULTS DATA**Average Power Table**
(Reporting Only)

| DH | CH. | NTX | Average Power (dBm) | Duty Factor (dB) |
|------|-----|-----|---------------------|------------------|
| DH1 | 0 | 1 | 12.61 | 5.16 |
| | 39 | 1 | 10.86 | 5.16 |
| | 78 | 1 | 10.61 | 5.16 |
| 2DH1 | 0 | 1 | 10.42 | 5.12 |
| | 39 | 1 | 8.27 | 5.12 |
| | 78 | 1 | 8.37 | 5.12 |
| 3DH1 | 0 | 1 | 10.44 | 5.12 |
| | 39 | 1 | 8.32 | 5.12 |
| | 78 | 1 | 8.40 | 5.12 |



Appendix B. Radiated Spurious Emission

| | | | |
|-----------------|-----------------------------------|---------------------|---------|
| Test Engineer : | Watt Tseng, Karl Hou, and Nick Yu | Temperature : | 22~23°C |
| | | Relative Humidity : | 59~61% |

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

| BT | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Path Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) | |
|------------------------|---|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-------------------------------|------------------------|----------------------------|----------------------|-------------------------|-------------------------|-----------------|---|
| BT CH 78 2480MHz | * | 2480 | 105.25 | - | - | 105.36 | 27.36 | 4.09 | 31.56 | 299 | 51 | P | H | |
| | * | 2480 | 80.53 | - | - | - | - | - | - | - | - | A | H | |
| | | 2484.56 | 45.55 | -28.45 | 74 | 45.64 | 27.36 | 4.11 | 31.56 | 299 | 51 | P | H | |
| | | 2484.56 | 20.83 | -33.17 | 54 | - | - | - | - | - | - | A | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | | H |
| | * | 2480 | 106.28 | - | - | 106.39 | 27.36 | 4.09 | 31.56 | 159 | 90 | P | V | |
| | * | 2480 | 81.56 | - | - | - | - | - | - | - | - | - | A | V |
| | | 2483.56 | 55.96 | -18.04 | 74 | 56.05 | 27.36 | 4.11 | 31.56 | 159 | 90 | P | V | |
| | | 2483.56 | 31.24 | -22.76 | 54 | - | - | - | - | - | - | A | V | |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

Table with 14 columns: BT, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for BT CH 78 2480MHz and a Remark section.



Emission below 1GHz

2.4GHz BT (LF)

| BT | Note | Frequency | Level | Over | Limit | Read | Antenna | Path | Preamp | Ant | Table | Peak | Pol. | |
|--------------------|--|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|---|
| | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 2.4GHz BT LF | | 69.96 | 32.81 | -7.19 | 40 | 50.54 | 11.97 | 0.73 | 30.43 | | | P | H | |
| | | 118.83 | 28.5 | -15 | 43.5 | 40.69 | 17.27 | 0.92 | 30.38 | | | P | H | |
| | | 180.39 | 36.78 | -6.72 | 43.5 | 51.07 | 14.75 | 1.26 | 30.3 | 100 | 0 | P | H | |
| | | 300 | 28.88 | -17.12 | 46 | 38.45 | 19.08 | 1.49 | 30.14 | | | P | H | |
| | | 481.3 | 29.98 | -16.02 | 46 | 34.52 | 23.46 | 1.83 | 29.83 | | | P | H | |
| | | 576.5 | 29.13 | -16.87 | 46 | 31.23 | 25.57 | 2.02 | 29.69 | | | P | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | 67.26 | 31 | -9 | 40 | 48.85 | 11.86 | 0.72 | 30.43 | 100 | 0 | P | V |
| | | | 130.71 | 33.33 | -10.17 | 43.5 | 45.37 | 17.32 | 1 | 30.36 | | | P | V |
| | | | 182.55 | 29.87 | -13.63 | 43.5 | 44.21 | 14.69 | 1.26 | 30.29 | | | P | V |
| | | | 331.5 | 28.65 | -17.35 | 46 | 37.57 | 19.62 | 1.55 | 30.09 | | | P | V |
| | | | 566.7 | 27.9 | -18.1 | 46 | 29.71 | 25.86 | 2.03 | 29.7 | | | P | V |
| | | | 729.8 | 34.66 | -11.34 | 46 | 34.58 | 27.27 | 2.28 | 29.47 | | | P | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | V | | |
| | | | | | | | | | | | | V | | |
| | | | | | | | | | | | | V | | |
| | | | | | | | | | | | | V | | |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | | |



Note symbol

| | |
|-----|--|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| ! | Test result is over limit line. |
| P/A | Peak or Average |
| H/V | Horizontal or Vertical |



A calculation example for radiated spurious emission is shown as below:

| BT | Note | Frequency | Level | Over | Limit | Read | Antenna | Path | Preamp | Ant | Table | Peak | Pol. |
|------------------------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| | | (MHz) | (dBμV/m) | (dB) | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| | | | | | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| BT CH 00 2402MHz | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots



| | | | |
|-----------------|-----------------------------------|---------------------|---------|
| Test Engineer : | Watt Tseng, Karl Hou, and Nick Yu | Temperature : | 22~23°C |
| | | Relative Humidity : | 59~61% |

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

| BT | 2.4GHz 2400~2483.5MHz Band Edge @ 3m | |
|------|---|--|
| | BT CH78 2480MHz | |
| | Horizontal | Fundamental |
| Peak | <p>Site Condition : : 03CH12-1Y : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> | <p>Site Condition : : 03CH12-1Y : PEAK_74 3m HORN_9120D_1328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> |

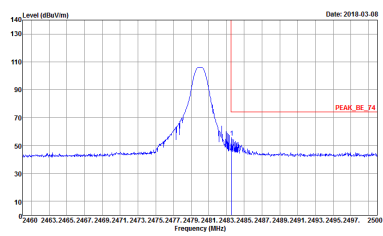
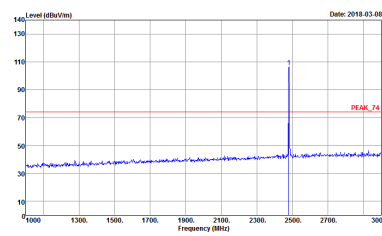


| BT | 2.4GHz 2400~2483.5MHz Band Edge @ 3m | |
|-----------------|--|--|
| BT CH78 2480MHz | | |
| | Vertical | Fundamental |
| Peak |  <p>Site : 03GHZ-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> |  <p>Site : 03GHZ-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> |



2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)
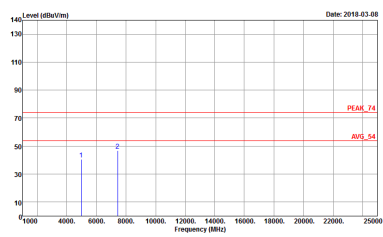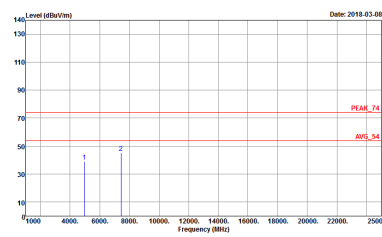
| BT | 2.4GHz 2400~2483.5MHz Harmonic @ 3m | |
|--------------|---|--|
| | BT CH78 2480MHz | |
| | Horizontal | Vertical |
| Peak Avg. |  <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p> |  <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 VERTICAL Detector : Peak</p> |




Emission below 1GHz

2.4GHz BT (LF)
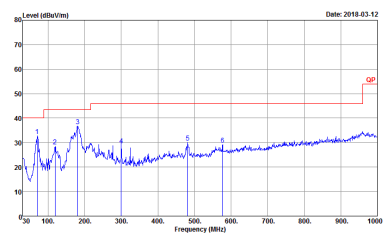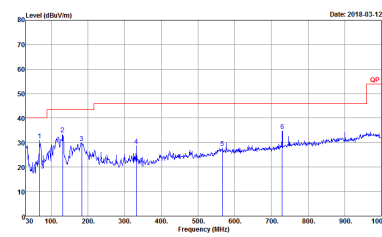
| BT | 2.4GHz 2400~2483.5MHz | |
|--------------|---|--|
| BT LF | | |
| Horizontal | | Vertical |
| QP / Peak |  <p>Site : 03GH2-HY Condition : QP 3m BIL06_6111D_35414 HORIZONTAL Detector : Peak</p> |  <p>Site : 03GH2-HY Condition : QP 3m BIL06_6111D_35414 VERTICAL Detector : Peak</p> |


Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

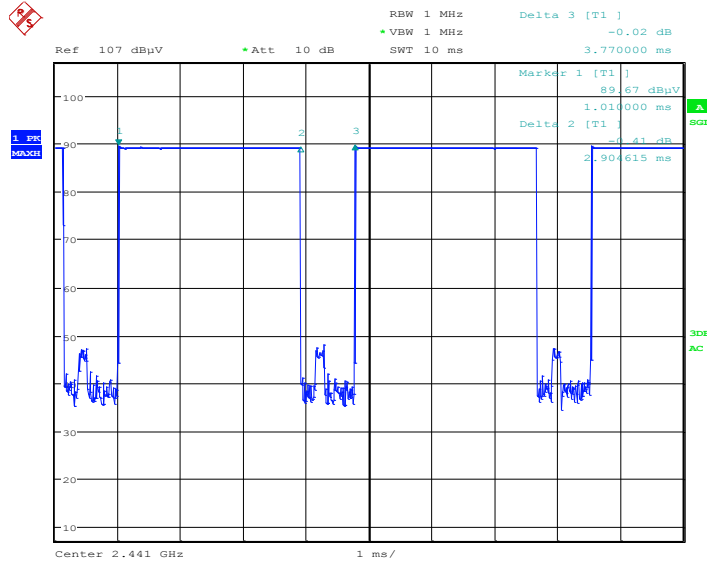

Date: 8.MAR.2018 01:08:37

on time (Count Pulses) Plot on Channel 39

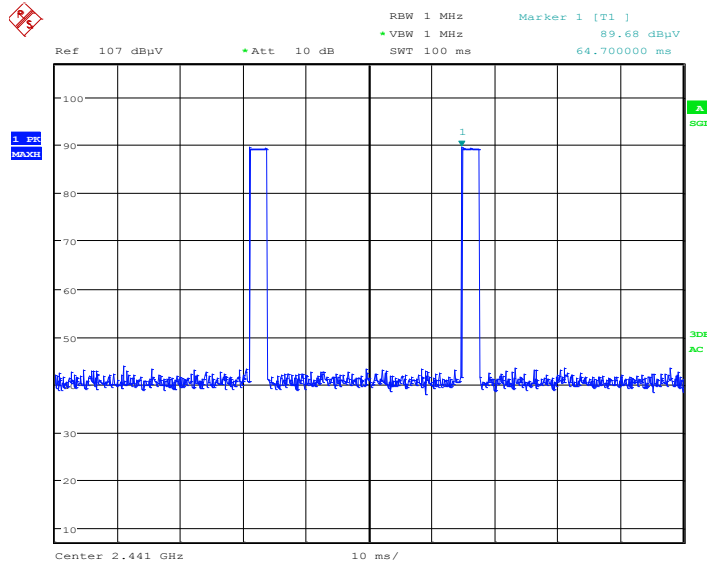

Date: 8.MAR.2018 01:09:17

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.90 / 100 = 5.8 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.72 dB
3. **DH5** has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.90 \text{ ms} \times 20 \text{ channels} = 58 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.90 \text{ ms} \times 2 = 5.8 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.8 \text{ ms}/100\text{ms}) = -24.72 \text{ dB}$$