



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1920-16
FCC ID : IHDT56XH1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 12, 2018 and testing was completed on May 26, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335
China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

 1.1 Applicant5

 1.2 Manufacturer.....5

 1.3 Product Feature of Equipment Under Test.....5

 1.4 Product Specification of Equipment Under Test.....5

 1.5 Modification of EUT6

 1.6 Specification of Accessory.....6

 1.7 Re-use of Measured Data7

 1.8 Testing Location8

 1.9 Applicable Standards.....8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....9

 2.1 Carrier Frequency Channel9

 2.2 Test Mode.....10

 2.3 Connection Diagram of Test System.....11

 2.4 Support Unit used in test configuration and system11

 2.5 EUT Operation Test Setup12

3 TEST RESULT13

 3.1 Radiated Band Edges and Spurious Emission Measurement13

 3.2 AC Conducted Emission Measurement.....17

 3.3 Antenna Requirements19

4 LIST OF MEASURING EQUIPMENT.....20

5 UNCERTAINTY OF EVALUATION.....21

APPENDIX A. AC CONDUCTED EMISSION TEST RESULT

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS

APPENDIX E. REFERENCE REPORT



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|-------------------------------------------|-----------------------|--------|-----------------------------------------|
| 3.1 | 15.247(d) | Radiated Band Edges and Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 5.34 dB at 40.670 MHz |
| 3.2 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 8.58 dB at 0.189 MHz |
| 3.3 | 15.203 & 15.247(b) | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT1920-16 |
| FCC ID | IHDT56XH1 |
| EUT supports Radios application | GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE Bluetooth v4.1 LE/Bluetooth v4.2 LE |
| IMEI Code | Conduction: 355531090019253/355531090019261 Radiation: 355531090019550/355531090019568 |
| HW Version | DVT2 |
| SW Version | OPG28.25 |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|-----------------------------------------|------------------------------------------------|
| Tx/Rx Frequency Range | 2402 MHz ~ 2480 MHz |
| Number of Channels | 40 |
| Carrier Frequency of Each Channel | 40 Channel(37 hopping + 3 advertising channel) |
| Antenna Type / Gain | PIFA Antenna with gain -3.40 dBi |
| Type of Modulation | Bluetooth LE : GFSK |



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

| Specification of Accessory | | | |
|----------------------------|------------------|-----------------------------------------------------|-----------------------------|
| AC Adapter 1(EU) | Brand Name | Motorola (Acbel) | Model Name C-P57 SPN5948A |
| | Power Rating | I/P: 100 - 240 Vac, 0.13A,50/60HZ O/P: 5Vdc 1000mA | |
| AC Adapter 1(UK) | Brand Name | Motorola (Acbel) | Model Name C-P58 SPN5950A |
| | Power Rating | I/P: 100 - 240 Vac, 0.13A,50/60HZ O/P: 5Vdc 1000mA | |
| AC Adapter 2(EU) | Brand Name | Motorola (Chenyang) | Model Name C-P57 SPN5985A |
| | Power Rating | I/P: 100 - 240 Vac, 0.13A,50/60HZ O/P: 5Vdc 1000mA | |
| AC Adapter 2(UK) | Brand Name | Motorola (Chenyang) | Model Name C-P58 SPN5981A |
| | Power Rating | I/P: 100 - 240 Vac, 0.13A,50/60HZ O/P: 5Vdc 1000mA | |
| Battery | Brand Name | Motorola (Amperex) | Model Name JE30 |
| | Power Rating | 3.8Vdc,2000/2120mAh | |
| Earphone 1 | Brand Name | Motorola(JuWei) | Model Name 711411000731 |
| | Signal Line Type | 1.1 meter, non-shielded cable, without ferrite core | |
| Earphone 2 | Brand Name | Motorola(New Leader) | Model Name 711411000711 |
| | Signal Line Type | 1.1 meter, non-shielded cable, without ferrite core | |
| USB Cable | Brand Name | Motorola (Saibao) | Model Name 711310002261 |
| | Signal Line Type | 1.0 meter, non-shielded cable, without ferrite core | |



1.7 Re-use of Measured Data

1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT1920-16, FCC ID: IHDT56XH1) is electrically identical to the reference device (Model: XT1920-18, XT1920-19, FCC ID: IHDT56XH2) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01.

1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., some difference of population/depoulation to enable support of different cellular bands, please refer to the Product Equality Declaration.

The re-used RF data includes the following bands provided in Appendix E (Sporton RF Report No. FR841203B for the reference device Model: XT1920-18, XT1920-19, FCC ID: IHDT56XH2):

1.7.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for Conducted Power based on the judgement of applicant, the test result were consistent with FCC ID: IHDT56XH2, all the conducted test items from the original model are representative for the variant model.

| Test Item | Mode | IHDT56XH2 Worst Result | IHDT56XH1 Worst Result | Difference (dB) |
|----------------------------|------|------------------------|------------------------|-----------------|
| Peak Conducted Power (dBm) | BLE | 2.64 | 2.57 | 0.07 |

1.7.4 Reference detail Section

| Equipment Class | Reference FCC ID | Folder Test | Report Title/Section |
|-----------------|------------------|----------------|-----------------------------------|
| DTS(BLE) | IHDT56XH2 | 15C(FR841203B) | All conducted sections applicable |



1.8 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

| | | | |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------------------------|
| Test Site | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | | FCC Test Firm Registration No. |
| | CO01-KS | 03CH03-KS | 630927 |

Note: The test site complies with ANSI C63.4 2014 requirement.

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 0 | 2402 | 21 | 2444 |
| | 1 | 2404 | 22 | 2446 |
| | 2 | 2406 | 23 | 2448 |
| | 3 | 2408 | 24 | 2450 |
| | 4 | 2410 | 25 | 2452 |
| | 5 | 2412 | 26 | 2454 |
| | 6 | 2414 | 27 | 2456 |
| | 7 | 2416 | 28 | 2458 |
| | 8 | 2418 | 29 | 2460 |
| | 9 | 2420 | 30 | 2462 |
| | 10 | 2422 | 31 | 2464 |
| | 11 | 2424 | 32 | 2466 |
| | 12 | 2426 | 33 | 2468 |
| | 13 | 2428 | 34 | 2470 |
| | 14 | 2430 | 35 | 2472 |
| | 15 | 2432 | 36 | 2474 |
| | 16 | 2434 | 37 | 2476 |
| | 17 | 2436 | 38 | 2478 |
| | 18 | 2438 | 39 | 2480 |
| | 19 | 2440 | - | - |
| 20 | 2442 | - | - | |




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases(X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases | |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Test Item | Data Rate / Modulation |
| | Bluetooth LE / GFSK |
| Radiated TCs | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps |
| AC Conducted Emission | Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 1) + Earphone 1 |

2.3 Connection Diagram of Test System

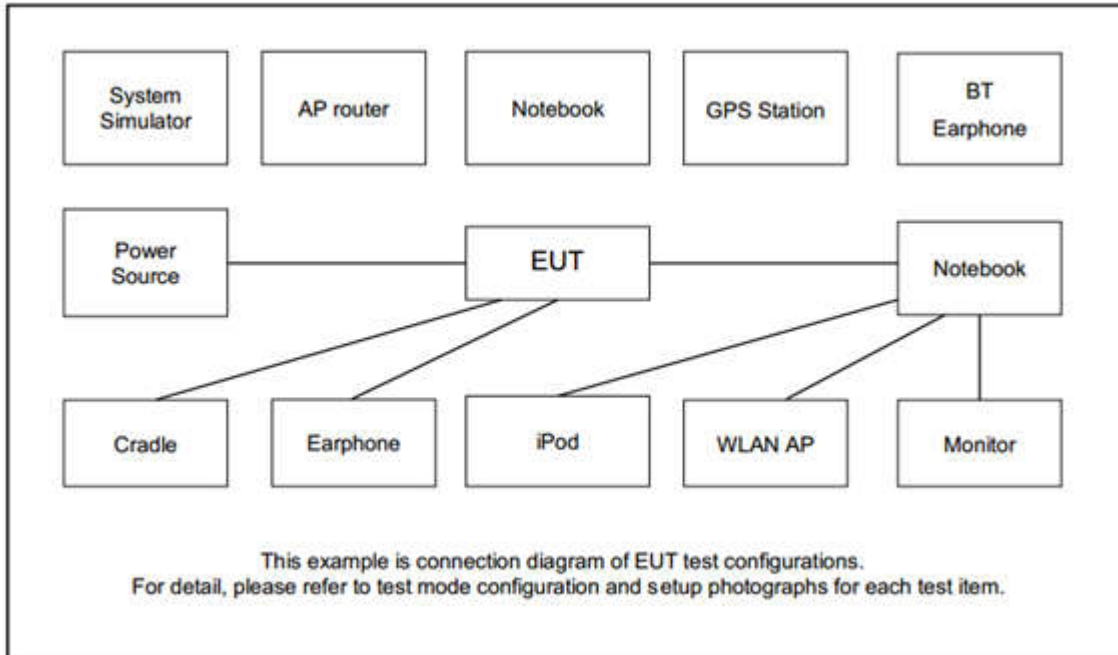

2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|------------|------------|-------------|------------|------------------------------------------------------------|
| 1. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8 m |
| 2. | WLAN AP | D-link | DIR-855 | KA2DIR855A2 | N/A | Unshielded, 1.8m |
| 3. | Notebook | Lenovo | G480 | FCC DoC | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 4. | Bluetooth Earphone | Lenovo | LBH308 | N/A | N/A | N/A |
| 5. | SD Card | Kingston | 8GB | N/A | N/A | N/A |



2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.1.4 Test Setup


For radiated emissions below 30MHz

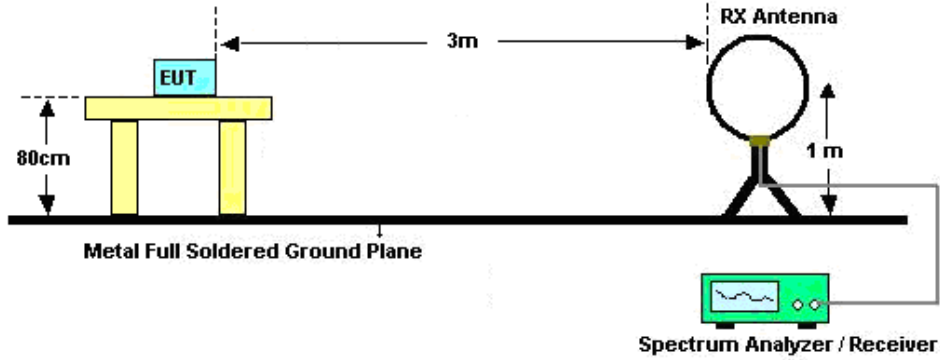

For radiated emissions from 30MHz to 1GHz

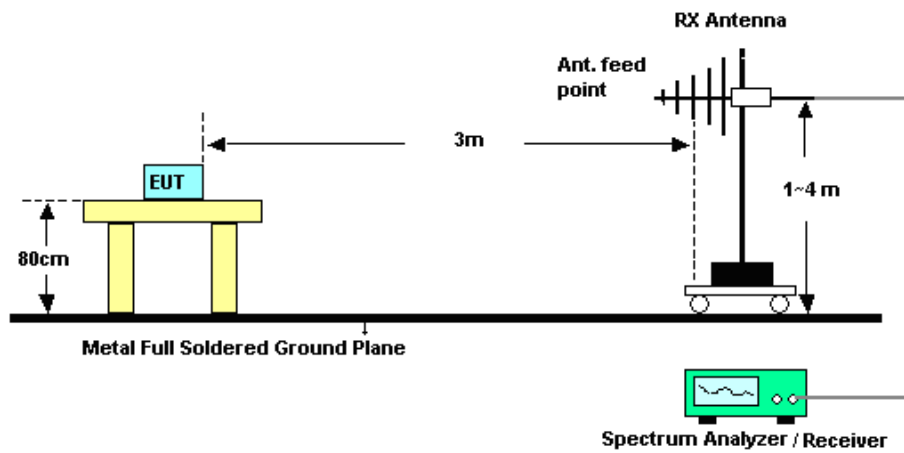

For radiated emissions above 1GHz

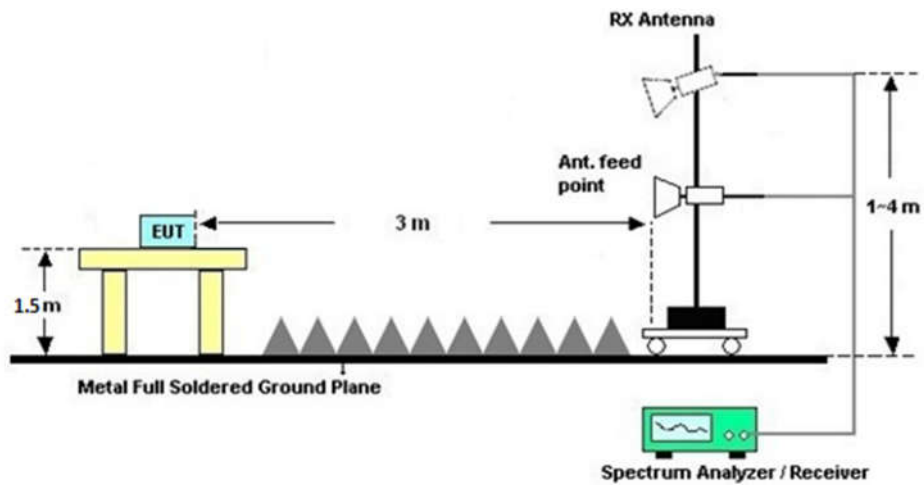



3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.1.7 Duty Cycle

Please refer to Appendix C.

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBµV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.2.4 Test Setup

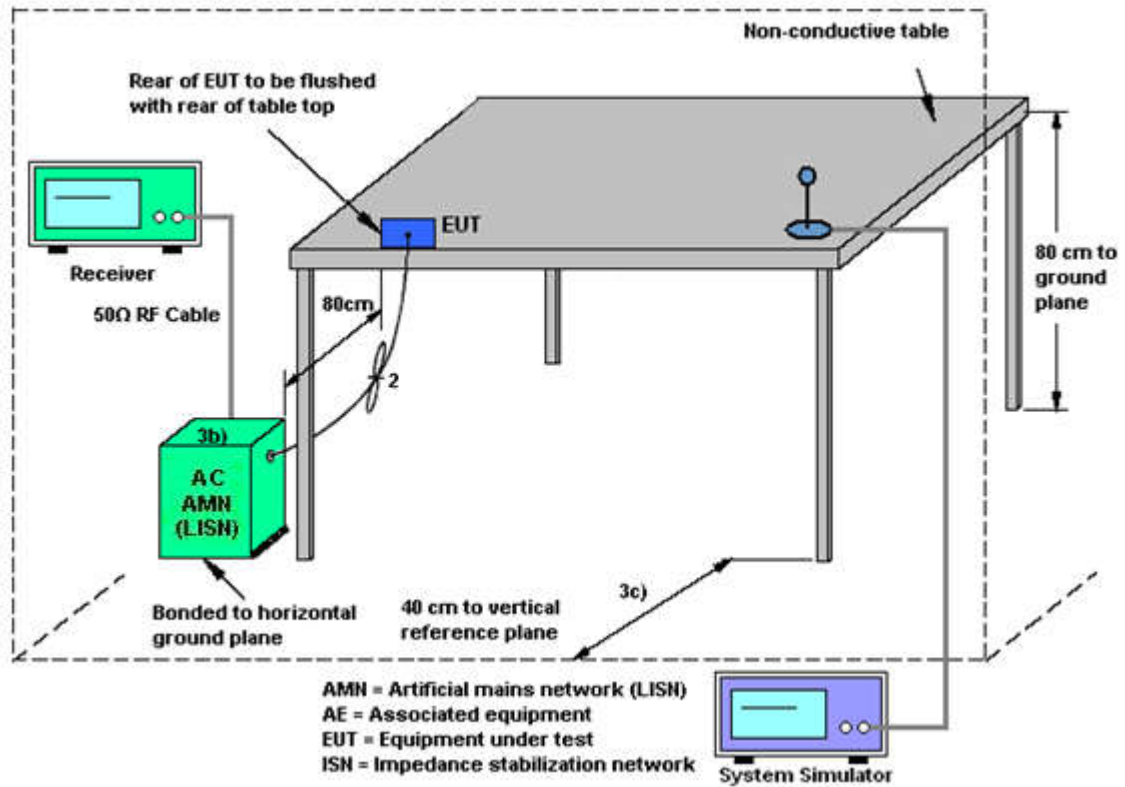

3.2.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|--------------|----------------------------|-------------|-------------------------|------------------|--------------|---------------|-----------------------|
| EMI Test Receiver | Keysight | N9038A | MY56400004 | 3Hz~8.5GHz;Max 30dBm | Oct. 19, 2017 | May 12, 2018 | Oct. 18, 2018 | Radiation (03CH03-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55150244 | 10Hz~44GHz | Apr. 17, 2018 | May 12, 2018 | Apr. 16, 2019 | Radiation (03CH03-KS) |
| Loop Antenna | R&S | HFH2-Z2 | 100321 | 9kHz~30MHz | Oct. 22, 2017 | May 12, 2018 | Oct. 21, 2018 | Radiation (03CH03-KS) |
| Bilog Antenna | TeseQ | CBL6112D | 47610 | 30MHz~1GHz | Sep. 12, 2017 | May 12, 2018 | Sep. 11, 2018 | Radiation (03CH03-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 75959 | 1GHz~18GHz | Jan. 21, 2018 | May 12, 2018 | Jan. 20, 2019 | Radiation (03CH03-KS) |
| SHF-EHF Horn | Schwarzbeck | BBHA 9170 | BBHA170249 | 15GHz~40GHz | Feb. 07, 2018 | May 12, 2018 | Feb. 06, 2019 | Radiation (03CH03-KS) |
| Amplifier | com-power | PA-103A | 161069 | 1MHz~1000MHz / 32dB | Apr. 17, 2018 | May 12, 2018 | Apr. 16, 2019 | Radiation (03CH03-KS) |
| Amplifier | MITEQ | TTA1840-35-HG | 1887435 | 18~40GHz | Oct. 12, 2017 | May 12, 2018 | Oct. 11, 2018 | Radiation (03CH03-KS) |
| high gain Amplifier | MITEQ | AMF-7D-0010 1800-30-10P | 2025788 | 1Ghz-18Ghz | Apr. 17, 2018 | May 12, 2018 | Apr. 16, 2019 | Radiation (03CH03-KS) |
| Amplifier | Agilent | 8449B | 3008A02370 | 1GHz~26.5GHz | Oct. 12, 2017 | May 12, 2018 | Oct. 11, 2018 | Radiation (03CH03-KS) |
| AC Power Source | Chroma | 61601 | F104090004 | N/A | NCR | May 12, 2018 | NCR | Radiation (03CH03-KS) |
| Turn Table | ChamPro | EM 1000-T | 060762-T | 0~360 degree | NCR | May 12, 2018 | NCR | Radiation (03CH03-KS) |
| Antenna Mast | ChamPro | EM 1000-A | 060762-A | 1 m~4 m | NCR | May 12, 2018 | NCR | Radiation (03CH03-KS) |
| EMI Receiver | R&S | ESCI7 | 100768 | 9kHz~7GHz; | Apr. 19, 2018 | May 26, 2018 | Apr. 18, 2019 | Conduction (CO01-KS) |
| AC LISN | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 13, 2017 | May 26, 2018 | Oct. 12, 2018 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060105 | 9kHz~30MHz | Oct. 13, 2017 | May 26, 2018 | Oct. 12, 2018 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP00000811 | AC 0V~300V, 45Hz~1000Hz | Oct. 12, 2017 | May 26, 2018 | Oct. 11, 2018 | Conduction (CO01-KS) |

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.9dB |
|-------------------------------------------------------------------------|-------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.5dB |
|-------------------------------------------------------------------------|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)


| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.1dB |
|-------------------------------------------------------------------------|-------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.5dB |
|-------------------------------------------------------------------------|-------|




Appendix A. AC Conducted Emission Test Results

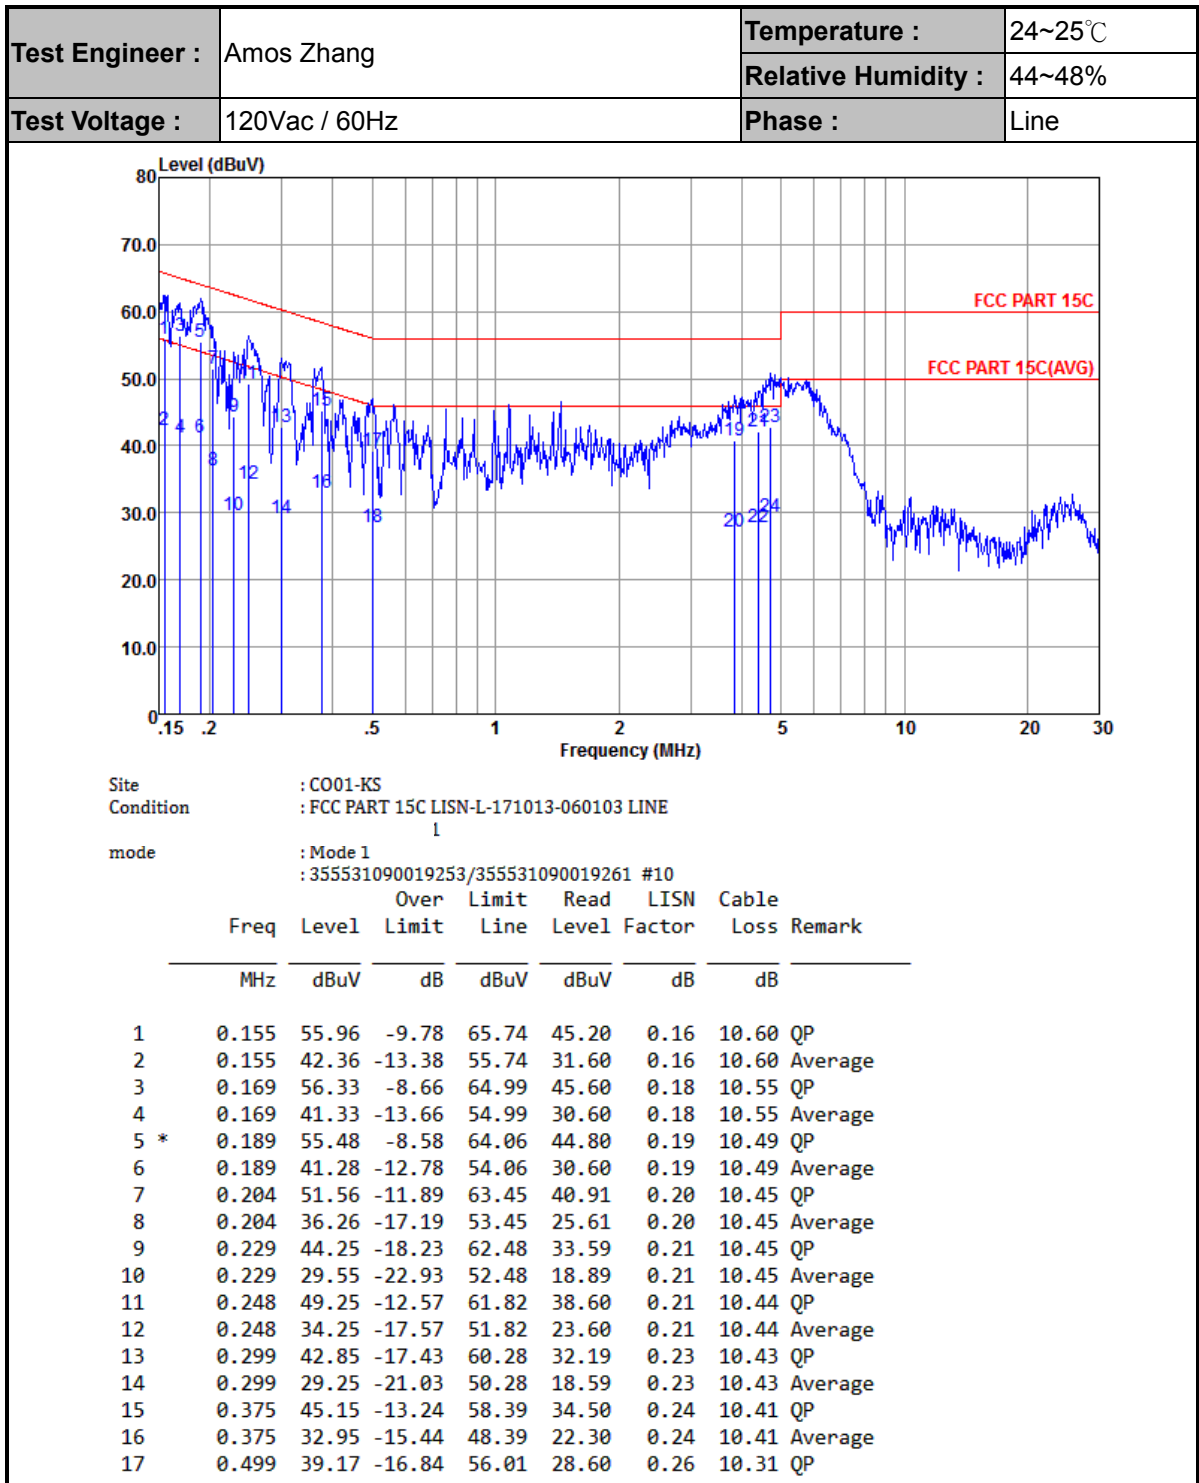



| | | | |
|-----------------|---------------|---------------------|---------|
| Test Engineer : | Amos Zhang | Temperature : | 24~25°C |
| | | Relative Humidity : | 44~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |

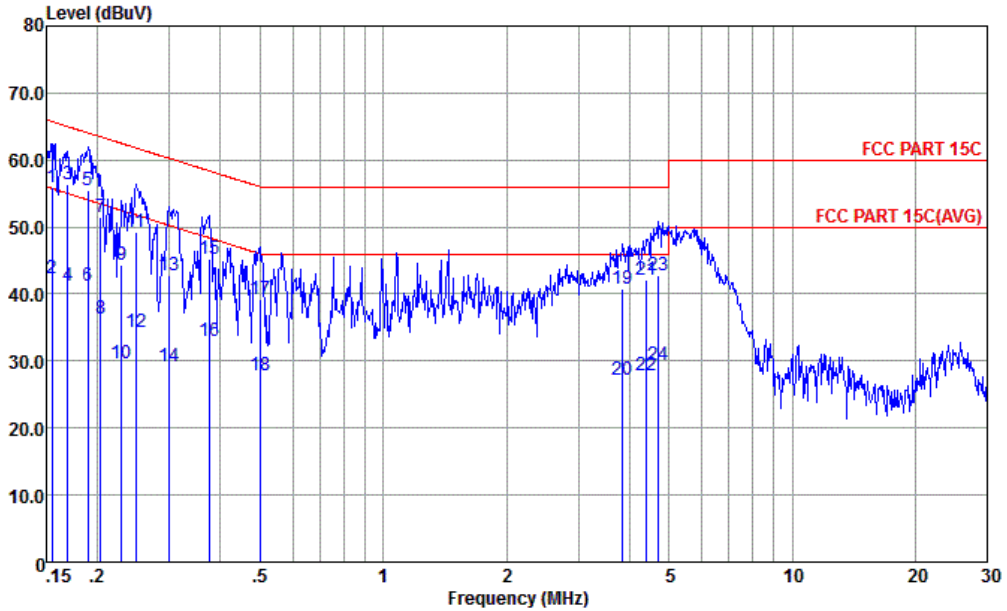


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-171013-060103 LINE
 mode : Mode 1
 : 355531090019253/355531090019261 #10

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|-------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 18 | 0.499 | 27.77 | -18.24 | 46.01 | 17.20 | 0.26 | 10.31 | Average |
| 19 | 3.840 | 40.81 | -15.19 | 56.00 | 30.30 | 0.34 | 10.17 | QP |
| 20 | 3.840 | 27.11 | -18.89 | 46.00 | 16.60 | 0.34 | 10.17 | Average |
| 21 | 4.384 | 42.05 | -13.95 | 56.00 | 31.50 | 0.36 | 10.19 | QP |
| 22 | 4.384 | 27.75 | -18.25 | 46.00 | 17.20 | 0.36 | 10.19 | Average |
| 23 | 4.721 | 42.88 | -13.12 | 56.00 | 32.30 | 0.36 | 10.22 | QP |
| 24 | 4.721 | 29.48 | -16.52 | 46.00 | 18.90 | 0.36 | 10.22 | Average |



| | | | |
|-----------------|---------------|---------------------|---------|
| Test Engineer : | Amos Zhang | Temperature : | 24~25°C |
| | | Relative Humidity : | 44~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |

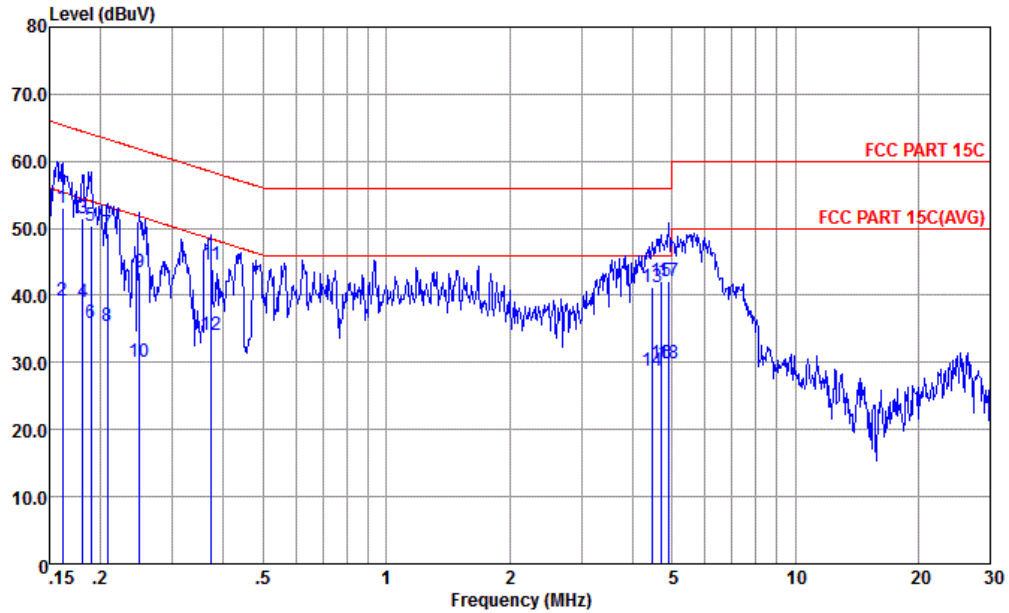

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

mode : Mode 1
 : 355531090019253/355531090019261 #10

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|-----|-------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.162 | 53.06 | -12.32 | 65.38 | 42.20 | 0.28 | 10.58 | QP |
| 2 | 0.162 | 39.16 | -16.22 | 55.38 | 28.30 | 0.28 | 10.58 | Average |
| 3 | 0.181 | 51.39 | -13.07 | 64.46 | 40.60 | 0.28 | 10.51 | QP |
| 4 | 0.181 | 38.99 | -15.47 | 54.46 | 28.20 | 0.28 | 10.51 | Average |
| 5 | 0.189 | 50.37 | -13.69 | 64.06 | 39.60 | 0.28 | 10.49 | QP |
| 6 | 0.189 | 35.97 | -18.09 | 54.06 | 25.20 | 0.28 | 10.49 | Average |
| 7 | 0.208 | 49.33 | -13.94 | 63.27 | 38.60 | 0.28 | 10.45 | QP |
| 8 | 0.208 | 35.33 | -17.94 | 53.27 | 24.60 | 0.28 | 10.45 | Average |
| 9 | 0.249 | 43.52 | -18.26 | 61.78 | 32.80 | 0.28 | 10.44 | QP |
| 10 | 0.249 | 30.02 | -21.76 | 51.78 | 19.30 | 0.28 | 10.44 | Average |
| 11 | 0.373 | 44.60 | -13.83 | 58.43 | 33.90 | 0.29 | 10.41 | QP |
| 12 | 0.373 | 34.00 | -14.43 | 48.43 | 23.30 | 0.29 | 10.41 | Average |
| 13 | 4.454 | 41.14 | -14.86 | 56.00 | 30.60 | 0.34 | 10.20 | QP |
| 14 | 4.454 | 28.74 | -17.26 | 46.00 | 18.20 | 0.34 | 10.20 | Average |
| 15 | 4.696 | 42.05 | -13.95 | 56.00 | 31.50 | 0.34 | 10.21 | QP |
| 16 | 4.696 | 29.85 | -16.15 | 46.00 | 19.30 | 0.34 | 10.21 | Average |
| 17 | 4.900 | 42.07 | -13.93 | 56.00 | 31.50 | 0.34 | 10.23 | QP |
| 18 | 4.900 | 29.87 | -16.13 | 46.00 | 19.30 | 0.34 | 10.23 | Average |



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

| BLE | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| BLE CH 00 2402MHz | | 2327.16 | 56.56 | -17.44 | 74 | 56.12 | 31.73 | 5.39 | 36.68 | 172 | 120 | P | H |
| | | 2363.43 | 46.58 | -7.42 | 54 | 46.05 | 31.76 | 5.44 | 36.67 | 172 | 120 | A | H |
| | * | 2402 | 97.74 | - | - | 97.1 | 31.8 | 5.48 | 36.64 | 172 | 120 | P | H |
| | * | 2402 | 97.26 | - | - | 96.62 | 31.8 | 5.48 | 36.64 | 172 | 120 | A | H |
| | | 2376.69 | 56.17 | -17.83 | 74 | 55.58 | 31.78 | 5.46 | 36.65 | 344 | 37 | P | V |
| | | 2364.73 | 46.35 | -7.65 | 54 | 45.8 | 31.76 | 5.44 | 36.65 | 344 | 37 | A | V |
| | * | 2402 | 95.13 | - | - | 94.49 | 31.8 | 5.48 | 36.64 | 344 | 37 | P | V |
| | * | 2402 | 94.52 | - | - | 93.88 | 31.8 | 5.48 | 36.64 | 344 | 37 | A | V |
| BLE CH 39 2480MHz | * | 2480 | 94.97 | - | - | 93.94 | 32.09 | 5.62 | 36.68 | 282 | 126 | P | H |
| | * | 2480 | 94.2 | - | - | 93.17 | 32.09 | 5.62 | 36.68 | 282 | 126 | A | H |
| | | 2497.66 | 56.5 | -17.5 | 74 | 55.41 | 32.14 | 5.64 | 36.69 | 282 | 126 | P | H |
| | | 2483.56 | 46.75 | -7.25 | 54 | 45.72 | 32.09 | 5.62 | 36.68 | 282 | 126 | A | H |
| | * | 2480 | 93.79 | - | - | 92.76 | 32.09 | 5.62 | 36.68 | 364 | 54 | P | V |
| | * | 2480 | 93.08 | - | - | 92.05 | 32.09 | 5.62 | 36.68 | 364 | 54 | A | V |
| | | 2485.24 | 56.69 | -17.31 | 74 | 55.66 | 32.09 | 5.62 | 36.68 | 364 | 54 | P | V |
| | | 2483.98 | 46.66 | -7.34 | 54 | 45.63 | 32.09 | 5.62 | 36.68 | 364 | 54 | A | V |
| Remark | <ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

| BLE | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-------------------------|---------------------------------------------------------------------------------------------|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-------------------------------|-------------------------|----------------------------|----------------------|-------------------------|-------------------------|-----------------|
| BLE CH 00 2402MHz | | 4806 | 40.24 | -33.76 | 74 | 62.6 | 34.22 | 7.92 | 64.5 | 100 | 360 | P | H |
| | | 4806 | 39.77 | -34.23 | 74 | 62.13 | 34.22 | 7.92 | 64.5 | 100 | 360 | P | V |
| BLE CH 19 2440MHz | | 4878 | 40.32 | -33.68 | 74 | 62.65 | 34.31 | 7.96 | 64.6 | 100 | 360 | P | H |
| | | 7320 | 41.73 | -32.27 | 74 | 61.01 | 35.8 | 9.94 | 65.02 | 100 | 360 | P | H |
| | | 4878 | 41.23 | -32.77 | 74 | 63.56 | 34.31 | 7.96 | 64.6 | 100 | 360 | P | V |
| BLE CH 39 2480MHz | | 7320 | 41.71 | -32.29 | 74 | 60.99 | 35.8 | 9.94 | 65.02 | 100 | 360 | P | V |
| | | 4962 | 39.9 | -34.1 | 74 | 62.18 | 34.43 | 8.02 | 64.73 | 100 | 360 | P | H |
| | | 7440 | 40.54 | -33.46 | 74 | 59.78 | 35.87 | 9.97 | 65.08 | 100 | 360 | P | H |
| | | 4962 | 40.34 | -33.66 | 74 | 62.62 | 34.43 | 8.02 | 64.73 | 100 | 360 | P | V |
| | | 7440 | 41.02 | -32.98 | 74 | 60.26 | 35.87 | 9.97 | 65.08 | 100 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Emission below 1GHz

2.4GHz BLE (LF)

| BLE | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|---------------------|----------------------------------------------------------------------------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 2.4GHz BLE LF | | 30 | 27.02 | -12.98 | 40 | 31.95 | 26.8 | 0.56 | 32.29 | - | - | P | H |
| | | 39.7 | 31.69 | -8.31 | 40 | 40.06 | 23.2 | 0.64 | 32.21 | 100 | 239 | P | H |
| | | 92.08 | 25.86 | -17.64 | 43.5 | 39.07 | 18.06 | 0.99 | 32.26 | - | - | P | H |
| | | 108.57 | 21.12 | -22.38 | 43.5 | 33.58 | 18.74 | 1.07 | 32.27 | - | - | P | H |
| | | 176.47 | 22.83 | -20.67 | 43.5 | 36.49 | 17.24 | 1.37 | 32.27 | - | - | P | H |
| | | 207.51 | 22.75 | -20.75 | 43.5 | 36.46 | 17.03 | 1.49 | 32.23 | - | - | P | H |
| | | 30 | 31.14 | -8.86 | 40 | 36.07 | 26.8 | 0.56 | 32.29 | - | - | P | V |
| | | 40.67 | 34.66 | -5.34 | 40 | 43.82 | 22.4 | 0.65 | 32.21 | 100 | 25 | P | V |
| | | 54.25 | 27.8 | -12.2 | 40 | 43.54 | 15.72 | 0.76 | 32.22 | - | - | P | V |
| | | 89.17 | 29.91 | -13.59 | 43.5 | 43.63 | 17.58 | 0.96 | 32.26 | - | - | P | V |
| | | 288.02 | 24.32 | -21.68 | 46 | 35.65 | 18.96 | 1.78 | 32.07 | - | - | P | V |
| | | 323.91 | 27.26 | -18.74 | 46 | 36.83 | 20.61 | 1.9 | 32.08 | - | - | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | |



Note symbol

| | |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| ! | Test result is over limit line. |
| P/A | Peak or Average |
| H/V | Horizontal or Vertical |



A calculation example for radiated spurious emission is shown as below:

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1+2 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| CH 01 | | | | | | | | | | | | | |
| 2412MHz | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots

| Band | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|--------------|---------------|-------|----------|-------------|
| Bluetooth LE | 62.50 | 0.391 | 2.556 | 3kHz |

Bluetooth LE

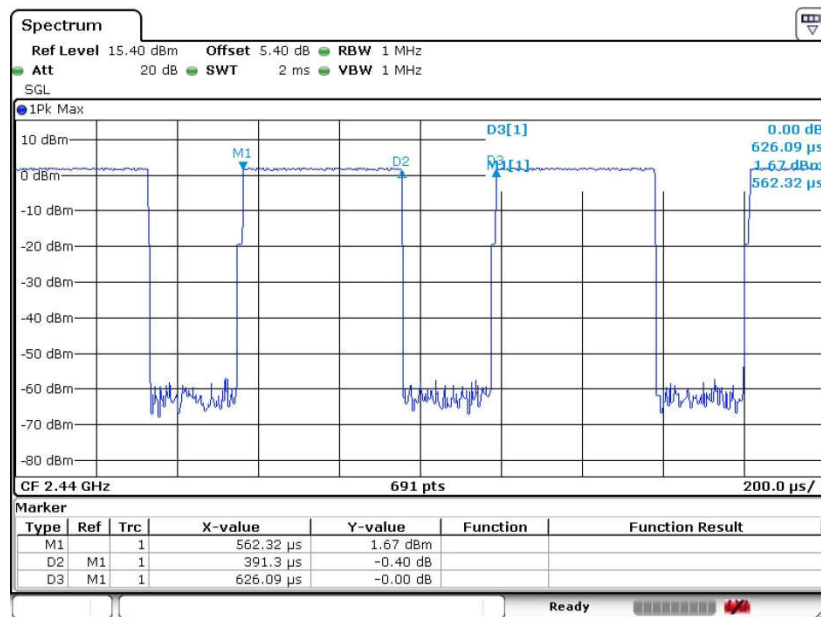



Appendix E. Reference Report

Please refer to Sporton report number FR841203B which is issued separately.