# **FCC RF Test Report**

APPLICANT : Motorola Mobility LLC EQUIPMENT : Mobile Cellular Phone

BRAND NAME : T-Mobile

MODEL NAME : XT1965-T

FCC ID : IHDT56XN4

STANDARD : 47 CFR Part 2, and 90(S)

**CLASSIFICATION**: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Feb. 01, 2019 and completely tested on Feb. 21, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

James Huang

Approved by: James Huang / Manager



Report No.: FW920101B

# Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 1 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

# **TABLE OF CONTENTS**

RE	VISIO	N HISTORY	3
SU	MMAI	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	6
	1.6	Specification of Accessory	
	1.7	Maximum Conducted Power, Frequency Tolerance and Emission Designator	7
	1.8	Testing Site	
	1.9	Applied Standards	8
2	TES	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	11
	2.5	Frequency List of Low/Middle/High Channels	
3	TES	「RESULT	12
	3.1	Conducted Output Power Measurement	12
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13
	3.3	Emissions Mask Measurement	14
	3.4	Emissions Mask – Out Of Band Emissions Measurement	16
	3.5	Field Strength of Spurious Radiation Measurement	17
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT	21
5	UNC	ERTAINTY OF EVALUATION	22
A P			
AΡ	PENU	IX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	IX B. TEST RESULTS OF RADIATED TEST	
ΑP	PEND	IX C. SETUP PHOTOGRAPHS	

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 2 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No.: FW920101B

# **REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW920101B	Rev. 01	Initial issue of report	Apr. 01, 2019
FW920101B	Rev. 02	Update Brand Name to T-Mobile	Apr. 12, 2019

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4

: 3 of 22 Page Number Report Issued Date: Apr. 12, 2019 Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

# **SUMMARY OF TEST RESULT**

Report Section	FCC Rule Description		Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	\$2.1051 Emission masks – 3.3 \$90.691 In-band emissions		< 50+10log <sub>10</sub> (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.5	§2.1053 Field Strength of Spurious		< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 50.82 dB at 2444.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4

: 4 of 22 Page Number Report Issued Date: Apr. 12, 2019 Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

# 1 General Description

# 1.1 Applicant

**Motorola Mobility LLC** 

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

#### 1.2 Manufacturer

**Motorola Mobility LLC** 

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

# 1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Mobile Cellular Phone
Brand Name	T-Mobile
Model Name	XT1965-T
FCC ID	IHDT56XN4
EUT supports Radios application	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HS DPA/HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC/GNSS/FM Receiver
IMEI Code	Conducted: 355572090010645 Radiation: 355572090012591
HW Version	PVT
SW Version	PCW29.81
EUT Stage	Identical Prototype

Report No.: FW920101B

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

# 1.4 Product Specification of Equipment Under Test

Product Specific	Product Specification subjective to this standard								
Tx Frequency	814.7 ~ 823.3 MHz								
Rx Frequency	859.7 ~ 868.3 MHz								
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz								
Maximum Output Power to Antenna	23.10 dBm								
Antenna Type	Internal Antenna								
Type of Modulation	QPSK / 16QAM / 64QAM								

 Sporton International (Kunshan) Inc.
 Page Number
 : 5 of 22

 TEL: 86-512-57900158
 Report Issued Date
 : Apr. 12, 2019

 FAX: 86-512-57900958
 Report Version
 : Rev. 02

FCC ID : IHDT56XN4 Report Template No.: BU5-FWLTE Version 2.0

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

# 1.6 Specification of Accessory

	Specification of Accessory											
AC Adoptor 1	Brand Name	Motorola (Salom)			l Name	SC-31						
AC Adapter 1	Power Rating	I/P: 100-240 Vac, 800mA 0	D/P: 5V	'dc,3000mA; 9Vdc,3000mA								
AC Adentes 2	Brand Name	Motorola (Acbel)	Mode	l Name	SC-31							
AC Adapter 2	Power Rating	I/P: 100-240 Vac, 800mA O/P: 5Vdc,3000mA; 9Vdc,3000mA										
Dettemi	Brand Name	Motorola(Amperex)		Model Name		JG40						
Battery	Power Rating	3.8Vdc,3000mAh		Туре		Li-ion						
LICD Cable	Brand Name	Motorola (Cabletech)	Model	lel Name SC18C47591								
USB Cable	Signal Line Type	1.0 meter, shielded cable, without ferrite core										

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 6 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

# 1.7 Maximum Conducted Power, Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M09G7D	0.2009
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M09W7D	0.1738
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M09W7D	0.1413
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M73G7D	0.2014
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M72W7D	0.1786
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M75W7D	0.1416
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M51G7D	0.1995
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M49W7D	0.1766
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M50W7D	0.1514
Part 90S	LTE Band 26	QPSK	10 MHz	0.0088	9M05G7D	0.1995
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M05W7D	0.1641
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M09W7D	0.1413
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M5G7D	0.2042
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M4W7D	0.1683
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M4W7D	0.1510

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 7 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

### 1.8 Testing Site

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.								
	No. 1098, Pengxi North	h Road, Kunshan Economic Development Zone,							
Test Site Location	Jiangsu Province 2153	35, China							
Test Site Location	TEL: 86-512-57900158								
	FAX: 86-512-57900958								
	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.						
Test Site No.	TH01-KS	CN5013	630927						
	03CH06-KS	CN3013	030927						

### 1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

#### Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

**Sporton International (Kunshan) Inc.** TEL: 86-512-57900158

FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 8 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No.: FW920101B

# 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 10th harmonic.

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 10th harmonic.


			Ва	ndwid	th (MF	łz)		М	odulation			RB#		Tes	t Chan	nel
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QA M	64Q AM	1	Hal f	Full	L	М	Н
Max. Output Power	26	v	v	>	v	٧	•	>	v	v	>	v	٧	v	v	v
26dB and 99% Bandwidth	26	v	v	٧	v	٧	•	٧	v	v			v	v	v	v
Emission masks In-band emissions	26	v	v	٧	v	٧	•	V	v	v	٧		v	v		v
Emission masks  - Out of band emissions	26	v	v	v	v	v	-	v	v	v	V			v	v	v
Frequency Stability	26				v		-	v					v		v	
Radiated Spurious Emission	26				v		-	v			٧				v	
Note	<ol> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.</li> </ol>															

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 9 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No.: FW920101B

Sporton International (Kunshan) Inc.

# 2.2 Connection Diagram of Test System

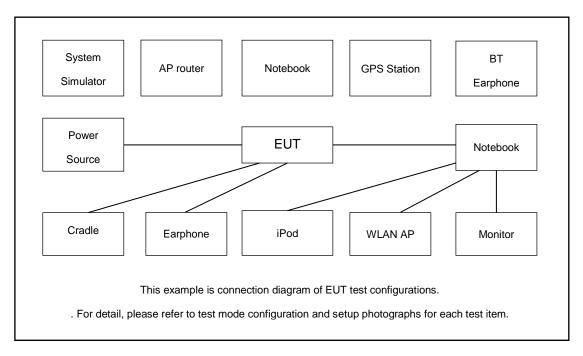

# 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8m

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 10 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

The following shows an offset computation example with RF cable loss 4.5 dB.

Example:

 $Offset(dB) = RF \ cable \ loss(dB)$ = 4.5 (dB)

### 2.5 Frequency List of Low/Middle/High Channels

	LTE Band 26 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
45	Channel	26765	-	-							
15	Frequency	821.5	-	-							
10	Channel	-	26740	-							
10	Frequency	-	819	-							
5	Channel	26715	26740	26765							
5	Frequency	816.5	819	821.5							
3	Channel	26705	26740	26775							
3	Frequency	815.5	819	822.5							
1.4	Channel	26697	26740	26783							
1.4	Frequency	814.7	819	823.3							

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 11 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No.: FW920101B

#### 3 Test Result

### 3.1 Conducted Output Power Measurement

#### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

#### 3.1.4 Test Setup



#### 3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

Report No.: FW920101B

### 3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

#### 3.2.4 Test Setup

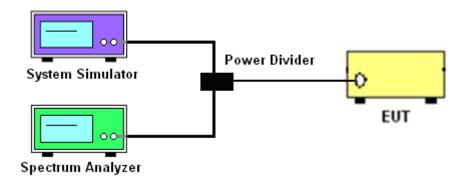

#### 3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 13 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No.: FW920101B

#### 3.3 Emissions Mask Measurement

#### 3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log<sub>10</sub>(f/6.1) decibels or 50 + 10 Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

### 3.3.4 Test Setup

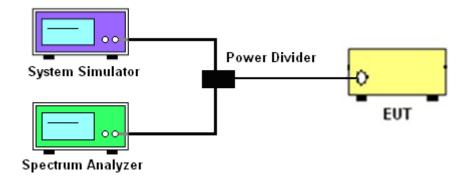

### 3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 15 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02
Report Template No.: BU5-FWLTE Version 2.0

#### 3.4 Emissions Mask - Out Of Band Emissions Measurement

#### 3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

#### 3.4.4 Test Setup

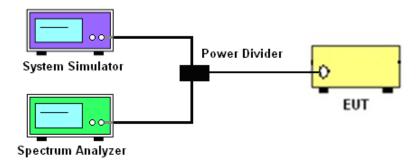

### 3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 16 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

### 3.5 Field Strength of Spurious Radiation Measurement

#### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log<sub>10</sub>(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

Report Version : Rev. 02
Report Template No.: BU5-FWLTE Version 2.0


Report Issued Date: Apr. 12, 2019

Page Number


: 17 of 22

#### 3.5.4 Test Setup

#### For radiated test from 30MHz to 1GHz

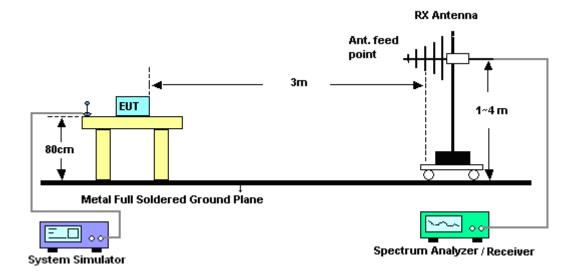

#### For radiated test above 1GHz

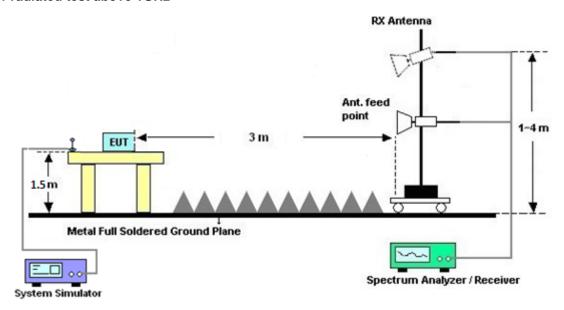

### 3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 18 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02
Report Template No.: BU5-FWLTE Version 2.0

### 3.6 Frequency Stability Measurement

#### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
  hours. Power was applied and the maximum change in frequency was recorded within one
  minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

### 3.6.5 Test Setup

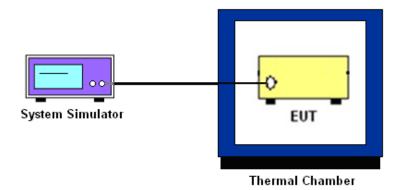

### 3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 20 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02
Report Template No.: BU5-FWLTE Version 2.0

# 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum	R&S	FSV30	101338	10Hz~30GHz	Apr. 19, 2018	Feb. 03, 2019~	Apr. 18, 2019	Conducted
Analyzer	Kas	F3V30	101336	10112~30G112	Арі. 19, 2016	Feb. 16, 2019	Арі. 16, 2019	(TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	H201401144	-40~+150°C	Jun. 27, 2018	Feb. 03, 2019~	lum 26 2010	Conducted
Thermal Chamber	nongznan	LP-1500	0	20%~95%RH	Juli. 27, 2016	Feb. 16, 2019	Jun. 26, 2019	(TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY5747108 4	10Hz-44GHz	Jun. 25, 2018	Feb. 21, 2019	Jun. 24, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 28, 2018	Feb. 21, 2019	Dec. 27, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	Feb. 21, 2019	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Feb. 21, 2019	Jan. 04, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Feb. 21, 2019	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35 -HG	2014749	18~40GHz	Jan. 14, 2019	Feb. 21, 2019	Jan. 13, 2020	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30- 10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Feb. 21, 2019	Apr. 16, 2019	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	6160100024 73	N/A	NCR	Feb. 21, 2019	NCR	Radiation (03CH06-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 21, 2019	NCR	Radiation (03CH06-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 21, 2019	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 21 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

### 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3 E AB
Confidence of 95% (U = 2Uc(y))	2.5 dB

#### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	2.0 dB
Confidence of 95% (U = 2Uc(y))	2.0 UB

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XN4 Page Number : 22 of 22
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

# **Appendix A. Test Results of Conducted Test**

# **Conducted Output Power (Average power)**

	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
15	1	0		23.10							
15	1	37	=	22.92							
15	1	74		22.94							
15	36	0	QPSK	21.95	-	-					
15	36	20		22.09							
15	36	39		22.03							
15	75	0		22.07							
15	1	0		22.26							
15	1	37		22.16							
15	1	74		22.24							
15	36	0	16-QAM	21.07							
15	36	20		21.18							
15	36	39		21.06							
15	75	0		21.11							
15	1	0		21.47							
15	1	37		21.41							
15	1	74		21.79							
15	36	0	64-QAM	20.35							
15	36	20		20.36							
15	36	39		20.33							
15	75	0		20.44							

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A1 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
10	1	0			23.00						
10	1	25			22.87						
10	1	49			22.81						
10	25	0	QPSK	-	21.97	-					
10	25	12			21.98						
10	25	25			21.86						
10	50	0			21.96						
10	1	0			22.15						
10	1	25			21.91						
10	1	49			21.97						
10	25	0	16-QAM		21.10						
10	25	12			21.03						
10	25	25			20.98						
10	50	0			21.02						
10	1	0			21.44						
10	1	25			21.50						
10	1	49			21.32						
10	25	0	64-QAM		20.30						
10	25	12			20.34						
10	25	25			20.34						
10	50	0			20.33						

Page Number : A2 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
5	1	0		22.98	22.78	22.84				
5	1	12		22.89	23.00	22.70				
5	1	24		22.98	22.90	22.76				
5	12	0	QPSK	22.02	21.91	21.82				
5	12	7		22.06	21.93	21.87				
5	12	13		21.93	21.95	21.75				
5	25	0		22.01	21.91	21.81				
5	1	0		22.06	22.30	22.00				
5	1	12		22.39	21.86	22.39				
5	1	24		22.26	22.47	22.26				
5	12	0	16-QAM	21.08	21.04	20.82				
5	12	7		21.09	21.02	20.96				
5	12	13		20.99	20.97	20.90				
5	25	0		21.03	21.05	20.81				
5	1	0		21.51	21.31	21.33				
5	1	12		21.80	21.68	21.22				
5	1	24		21.13	21.32	21.22				
5	12	0	64-QAM	20.31	20.30	20.13				
5	12	7		20.37	20.34	20.21				
5	12	13		20.32	20.26	20.18				
5	25	0		20.31	20.22	20.20				

Page Number : A3 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No. : FW920101B



	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
3	1	0		23.04	22.90	22.84				
3	1	8		23.00	22.95	22.88				
3	1	14		22.89	22.76	22.78				
3	8	0	QPSK	21.97	21.90	21.86				
3	8	4		22.06	22.01	21.83				
3	8	7		21.97	21.92	21.76				
3	15	0		22.03	21.93	21.78				
3	1	0		22.14	22.52	22.26				
3	1	8		22.17	22.44	21.91				
3	1	14	16-QAM	22.45	21.83	22.17				
3	8	0		21.09	21.07	20.88				
3	8	4		21.09	21.01	20.90				
3	8	7		21.06	20.94	20.80				
3	15	0		21.09	21.10	20.95				
3	1	0		21.50	21.40	20.88				
3	1	8		21.12	21.06	21.21				
3	1	14		21.40	21.51	20.85				
3	8	0	64-QAM	20.08	19.94	19.85				
3	8	4		20.27	19.99	19.81				
3	8	7		20.14	20.13	19.74				
3	15	0		20.00	19.90	19.84				

Page Number : A4 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0



	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
1.4	1	0		22.96	22.91	22.71					
1.4	1	3		22.96	22.98	22.76					
1.4	1	5		22.93	22.90	22.67					
1.4	3	0	QPSK	22.96	22.89	22.75					
1.4	3	1		23.00	22.92	22.80					
1.4	3	3		23.03	22.91	22.69					
1.4	6	0		22.06	21.93	21.73					
1.4	1	0		21.98	22.38	22.10					
1.4	1	3		22.40	22.33	21.97					
1.4	1	5		22.13	22.38	22.19					
1.4	3	0	16-QAM	21.87	21.97	21.67					
1.4	3	1		22.10	22.01	21.91					
1.4	3	3		22.05	21.94	21.76					
1.4	6	0		21.08	21.09	20.86					
1.4	1	0		21.17	21.23	20.76					
1.4	1	3		21.38	21.50	20.85					
1.4	1	5		21.13	20.90	21.08					
1.4	3	0	64-QAM	21.39	21.05	20.91					
1.4	3	1		21.11	21.10	21.08					
1.4	3	3		21.17	21.14	21.08					
1.4	6	0		20.12	20.04	19.95					

Page Number : A5 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report Template No.: BU5-FWLTE Version 2.0

# 26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.222	1.220	2.997	2.985	4.855	4.895	-	-	14.505	14.535	-	-
Middle CH	1.208	1.234	3.015	3.009	4.925	4.935	9.870	9.830	-	-	-	-
Highest CH	1.231	1.236	2.979	3.003	4.865	4.925	-	-	-	-	-	-
BW	1.41	MHz	3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	640	QAM	64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.236		3.027		4.905		-		14.416		-	
Middle CH	1.228		3.0	003	4.9	4.915		9.730		-	-	
Highest CH	1.2	225	3.0	)27	4.895		-		-		-	

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A6 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report Template No.: BU5-FWLTE Version 2.0

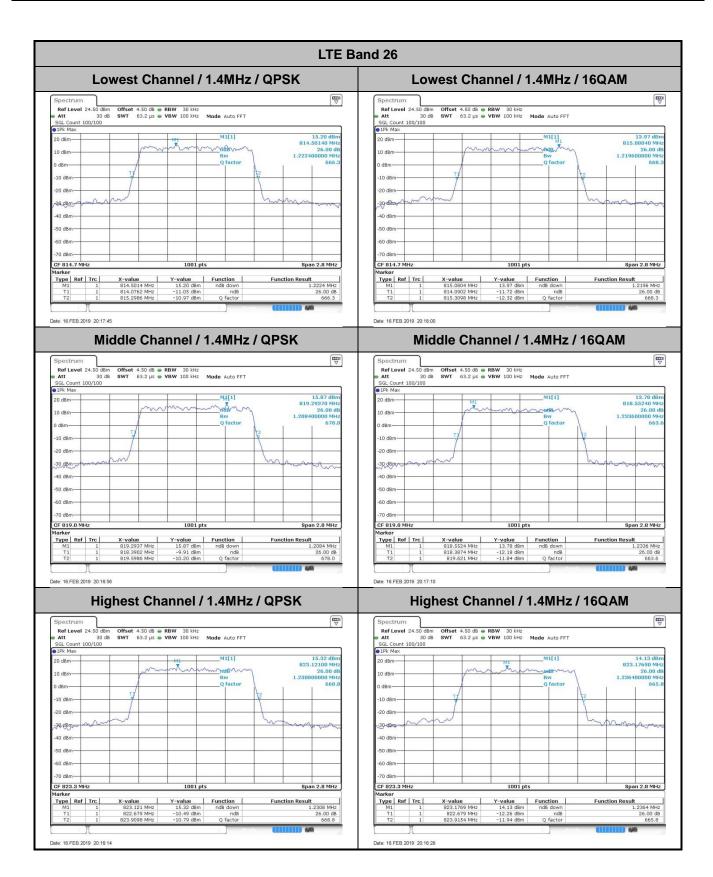

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A7 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

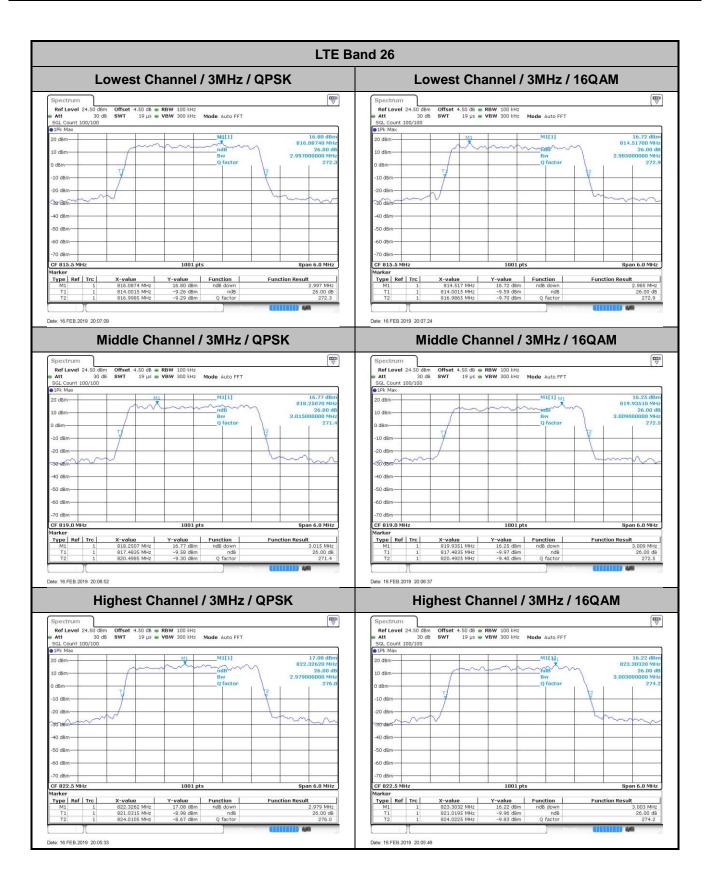


Page Number : A8 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

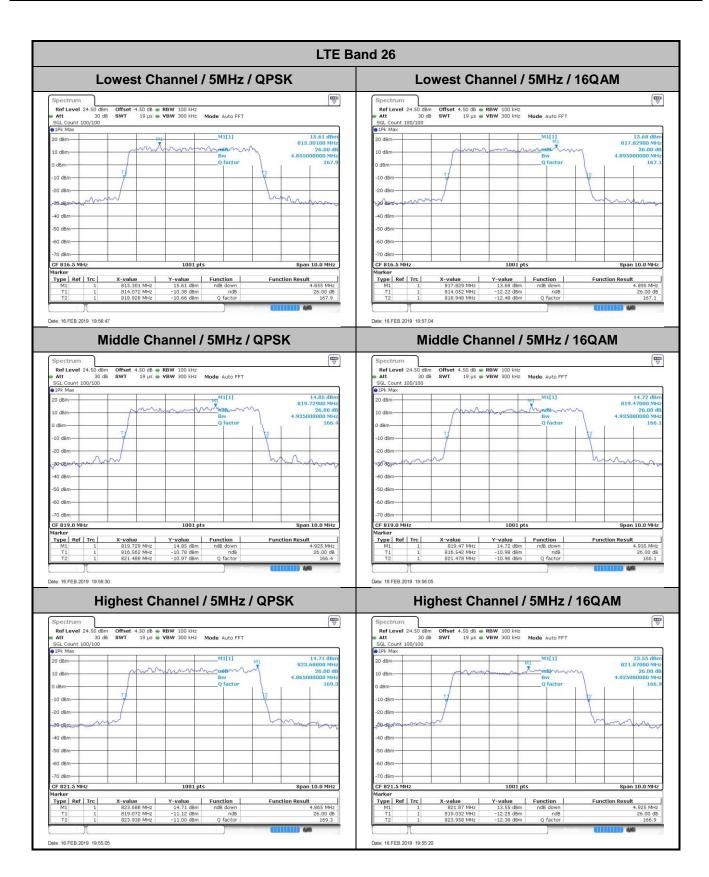


Page Number : A9 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

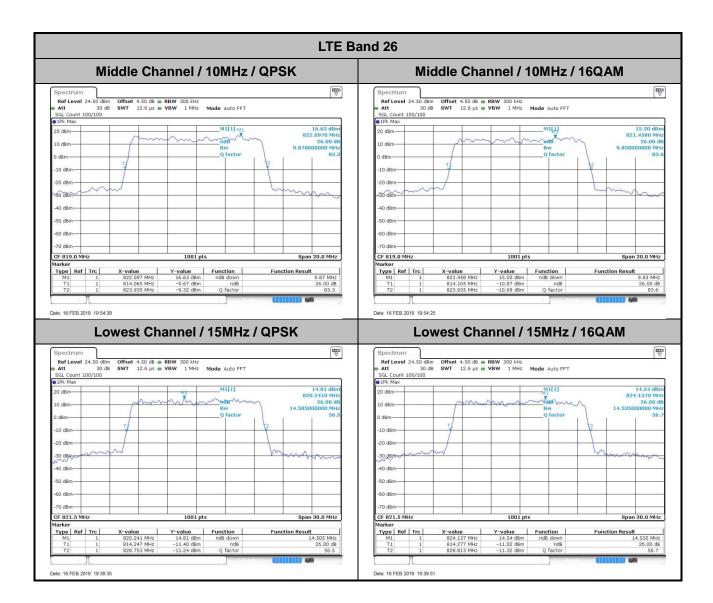


Page Number : A10 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

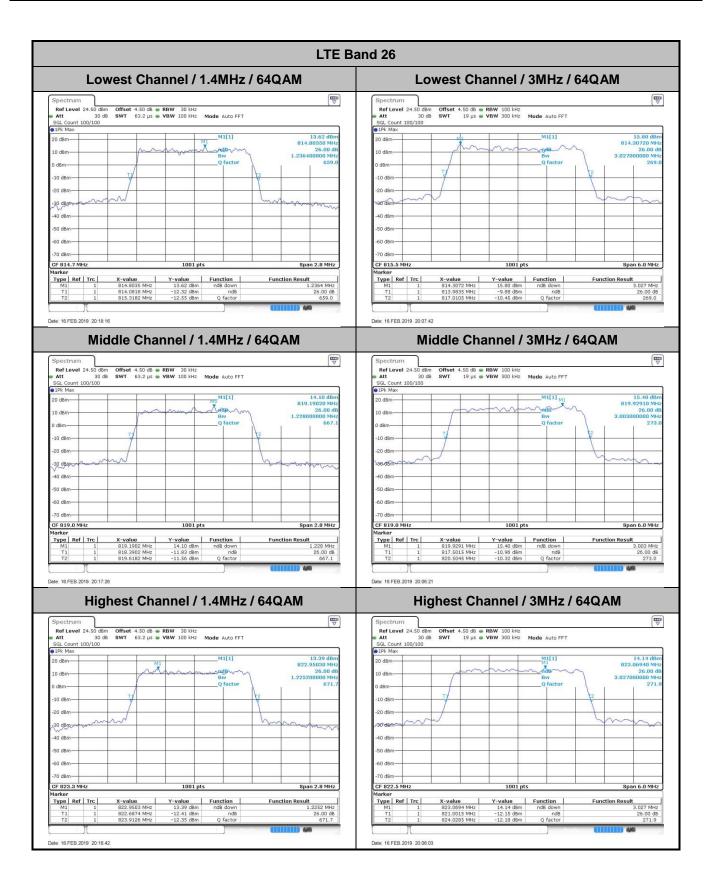

Page Number : A11 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report Template No.: BU5-FWLTE Version 2.0

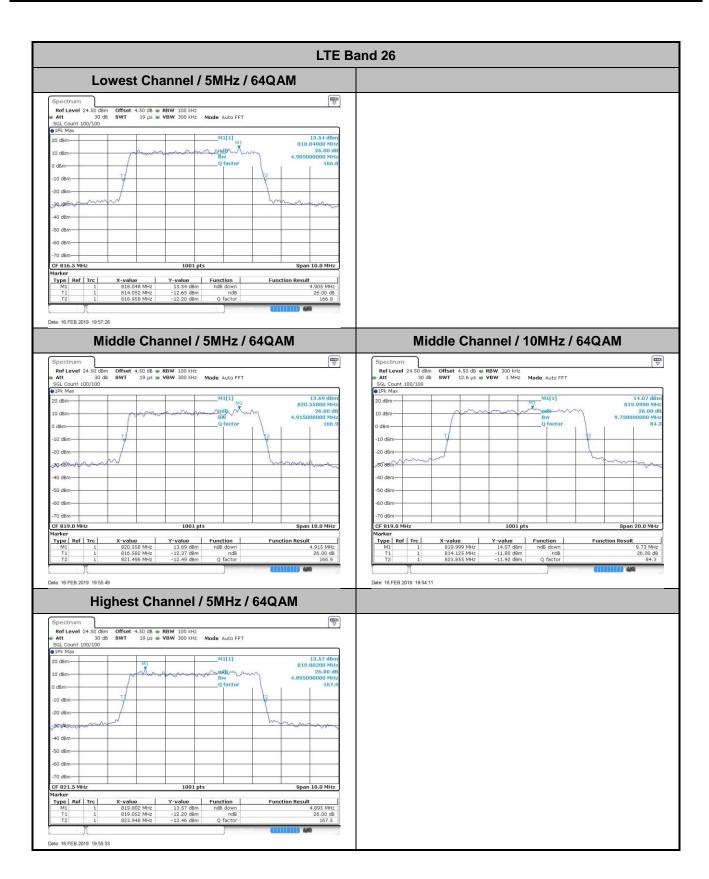

#### Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A12 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

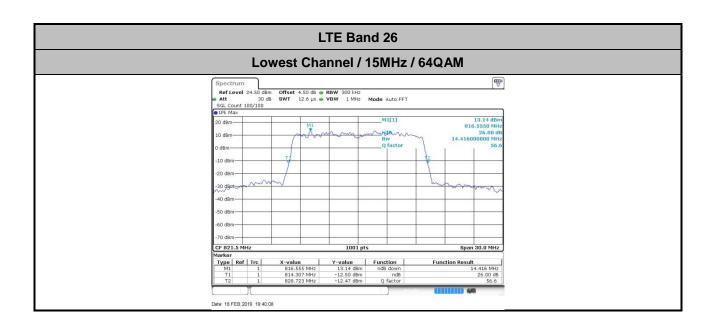

Page Number : A13 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report Template No.: BU5-FWLTE Version 2.0

# **Occupied Bandwidth**

Mode		LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		.4MHz 3MHz		5MHz		10MHz		15MHz		20MHz		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.09	1.09	2.71	2.72	4.50	4.49	-	-	13.46	13.37	-	-	
Middle CH	1.09	1.09	2.72	2.72	4.51	4.48	9.05	9.05	-	-	-	-	
Highest CH	1.09	1.09	2.73	2.70	4.49	4.49	•	-	-	-	-	-	
BW	1.41	MHz	3MHz		5MHz		10MHz		15MHz		20MHz		
Mod.	640	QAM	640	64QAM 6		64QAM 64QAM		64QAM		64QAM			
Lowest CH	1.09		2.75		4.50		-		13.43		-		
Middle CH	1.09		2.	2.73		4.48		9.09		-		-	
Highest CH	1.	09	2.	72	4.50		-		-		-		


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A14 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report No.: FW920101B

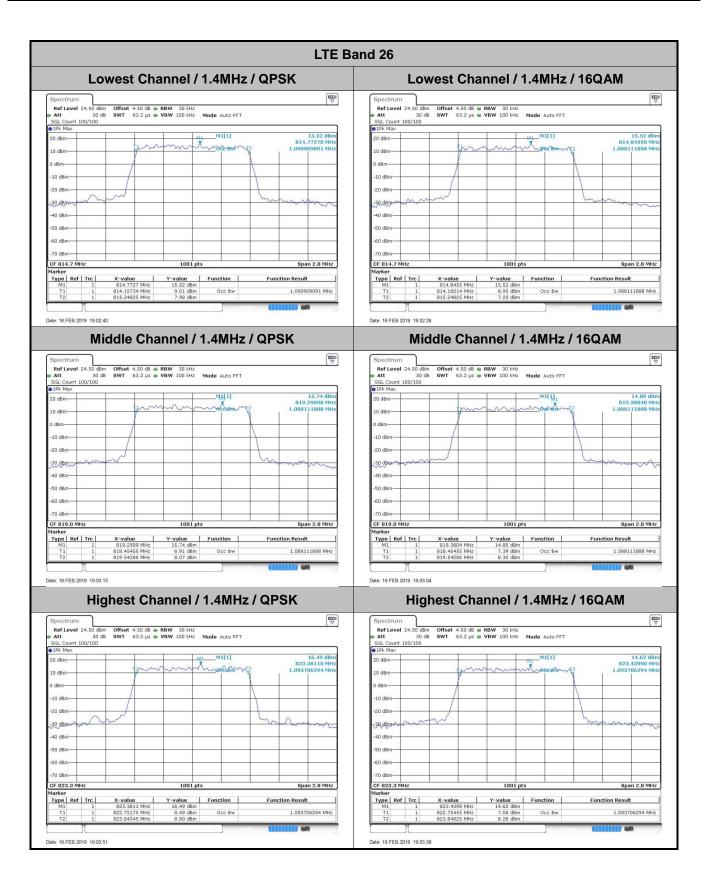


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A15 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

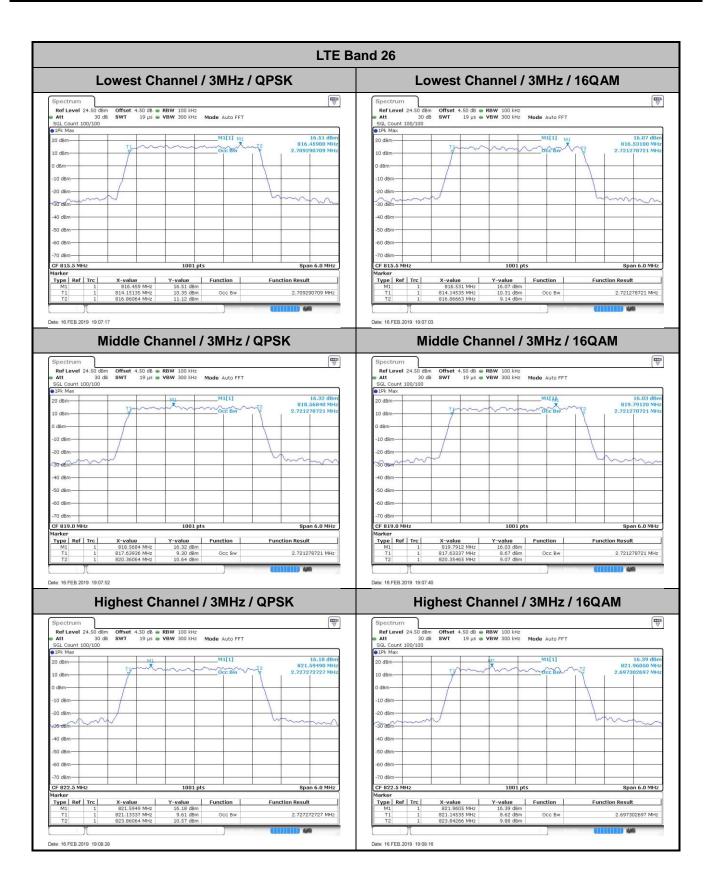


Page Number : A16 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

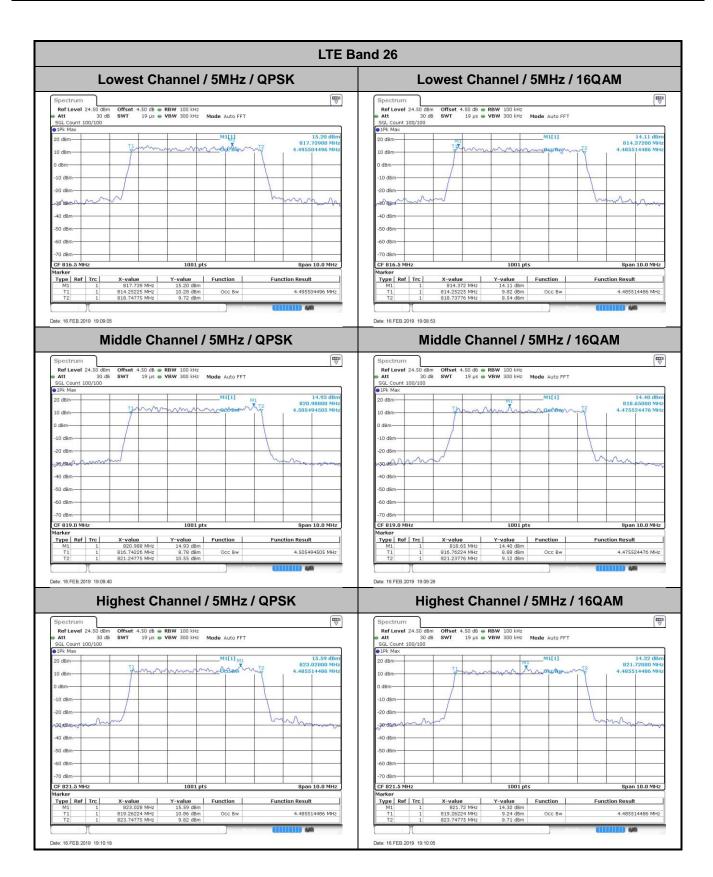


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A17 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

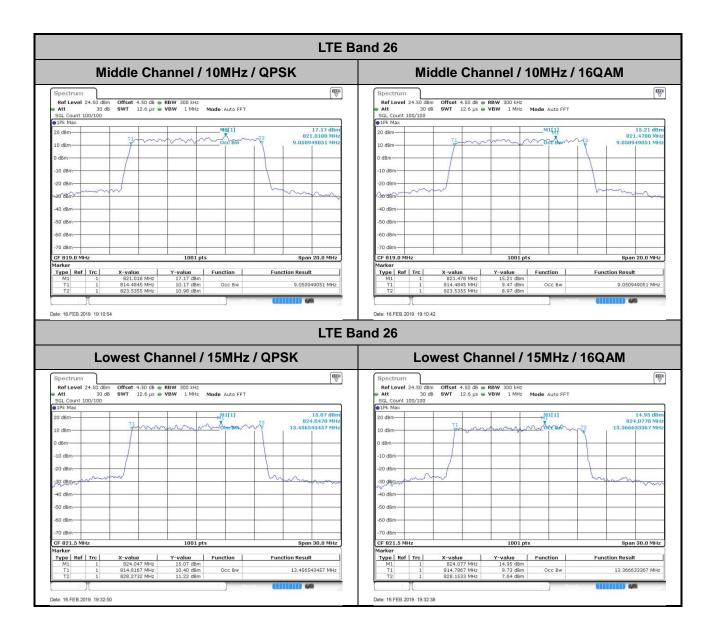

Page Number : A18 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report Template No.: BU5-FWLTE Version 2.0

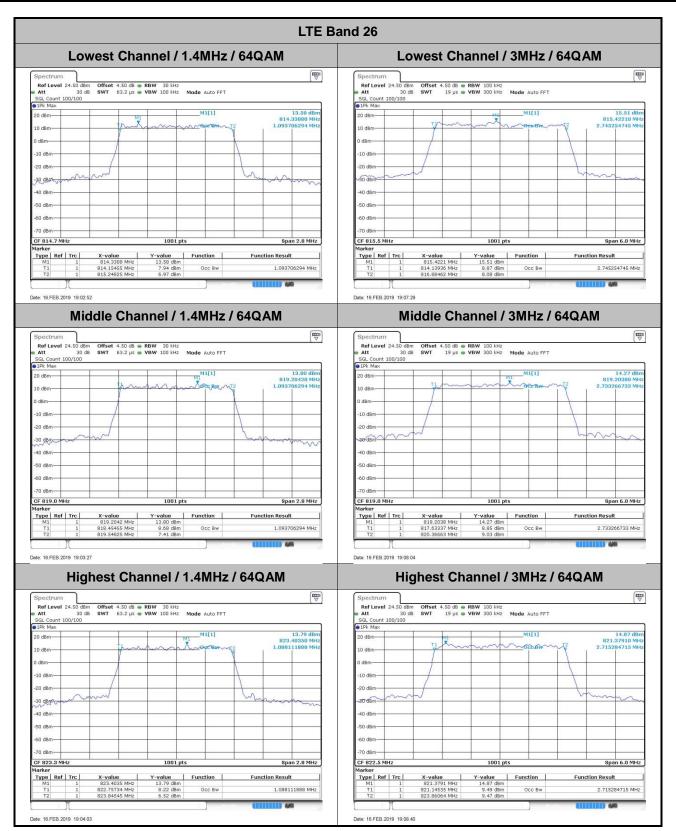

Page Number : A19 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report No.: FW920101B

Report Template No.: BU5-FWLTE Version 2.0

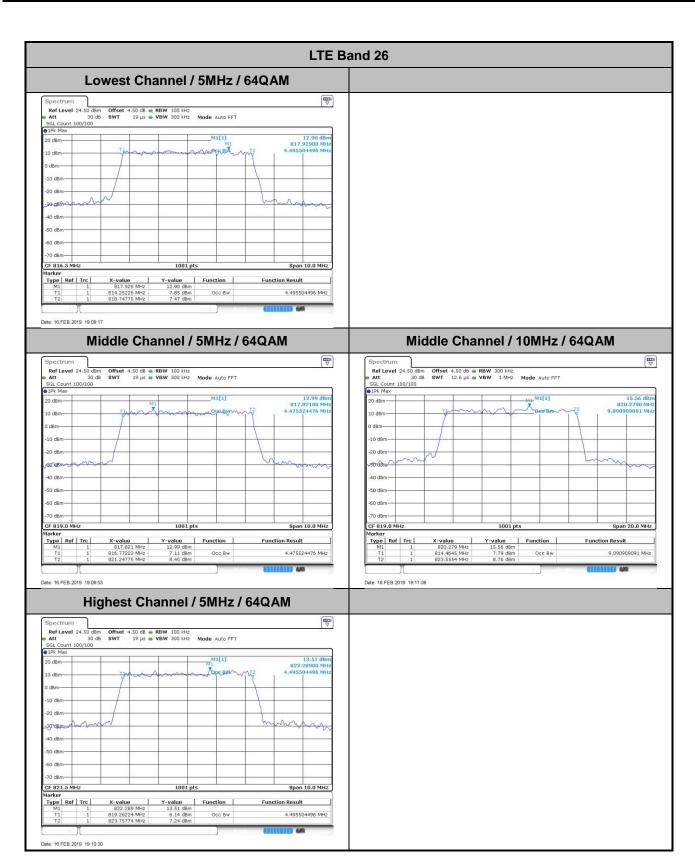

Page Number : A20 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02


Report Template No.: BU5-FWLTE Version 2.0

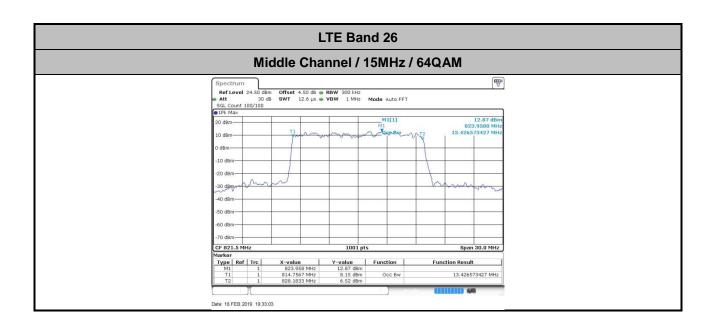

Page Number : A21 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0


## **Conducted Band Edge**

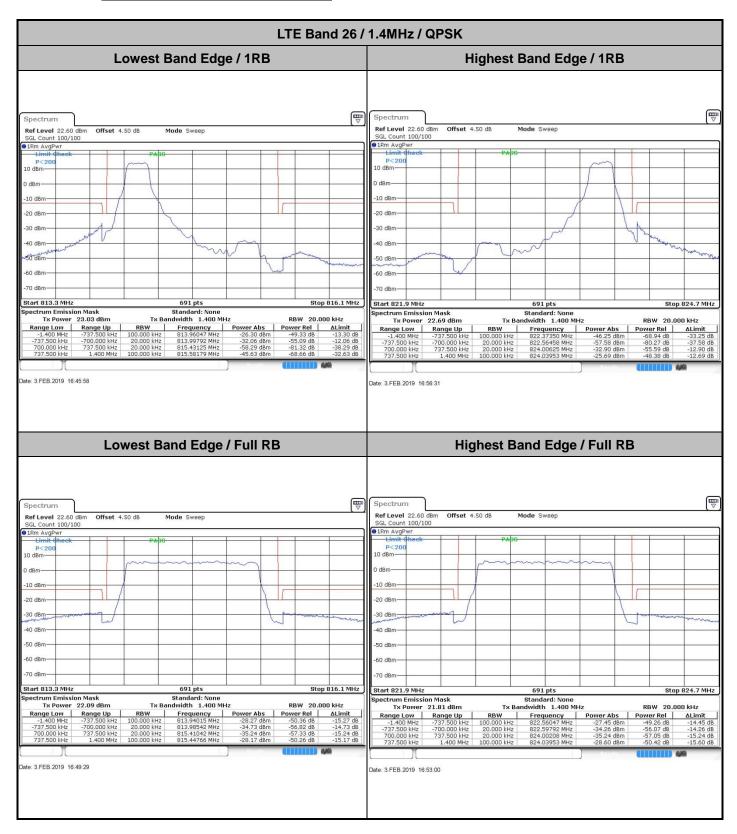

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A22 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

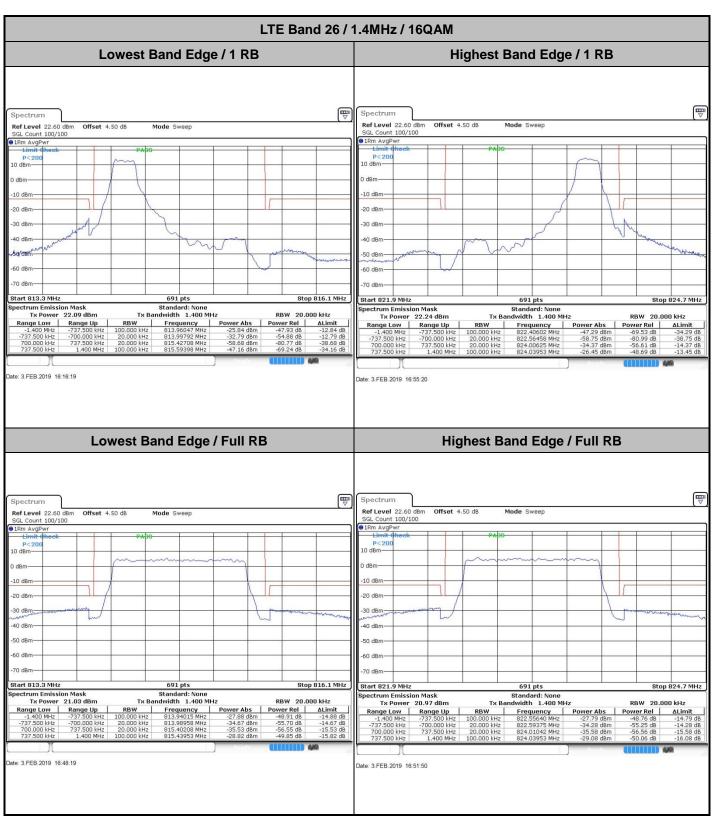


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A23 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

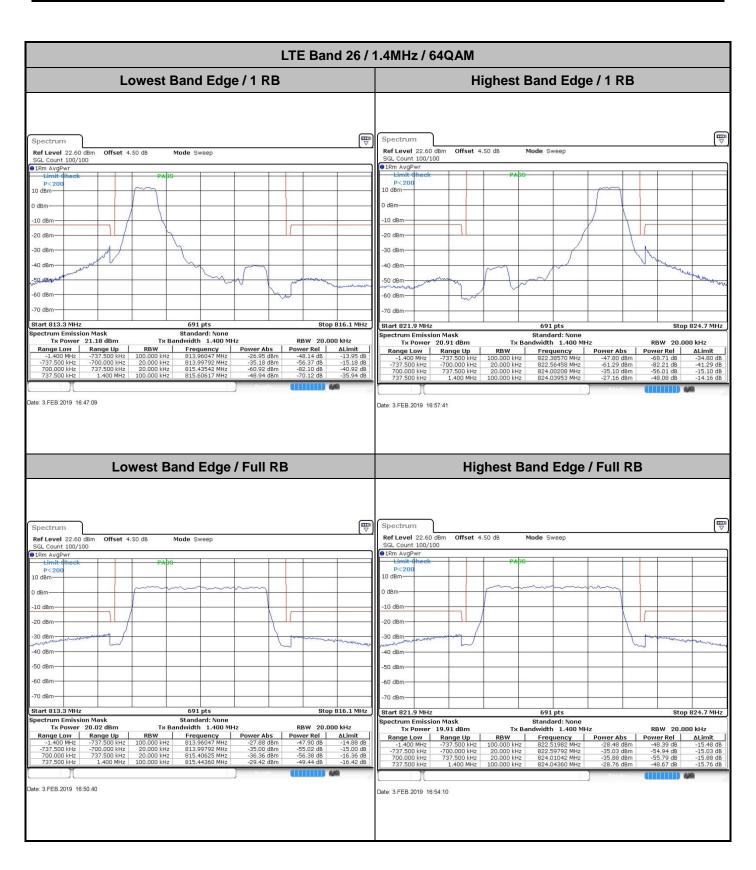


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A24 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

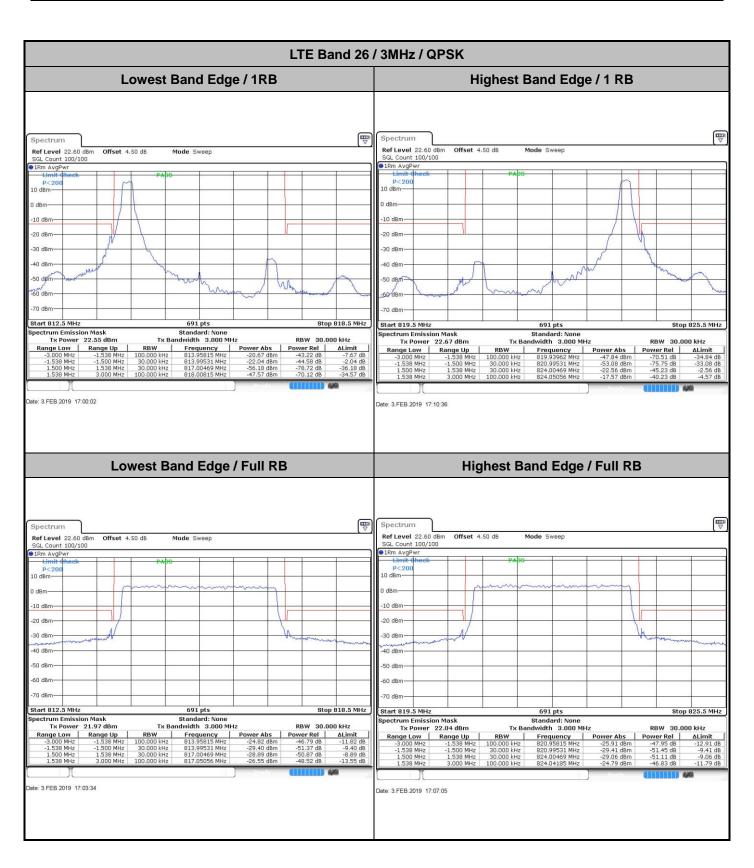

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A25 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0

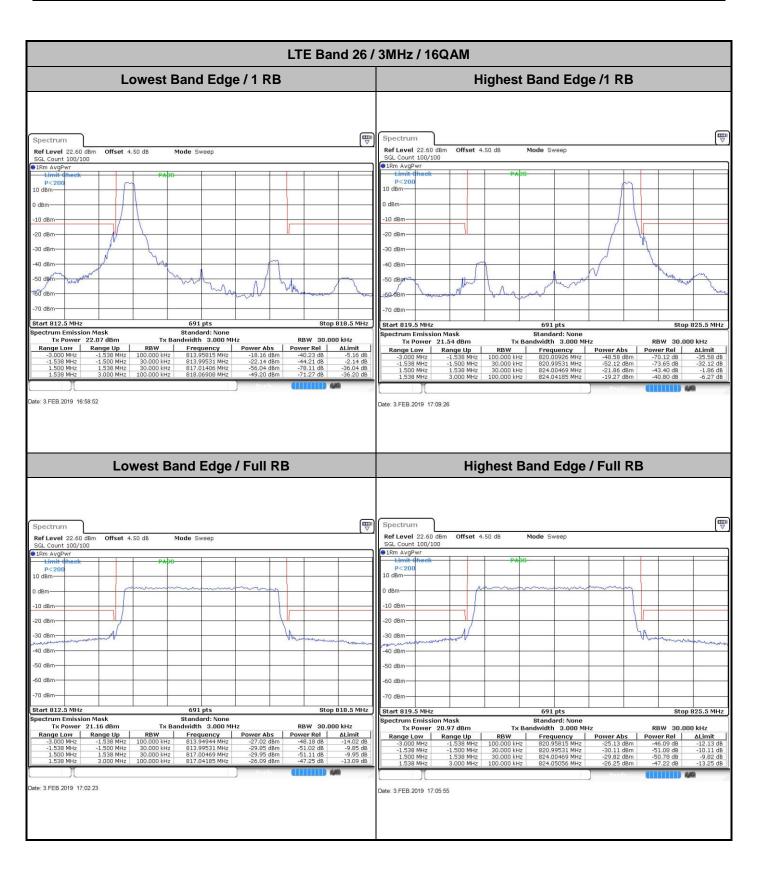

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56XN4 Page Number : A26 of A46
Report Issued Date : Apr. 12, 2019
Report Version : Rev. 02

Report Template No.: BU5-FWLTE Version 2.0