

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1962-5
FCC ID : IHDT56XP3
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Sep. 10, 2018 and testing was started from Sep. 19, 2018 and completed on Oct. 15, 2018. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 Specification of Accessory 8
4.3 General LTE SAR Test and Reporting Considerations 9
5. Proximity Sensor Triggering Test..... 11
5.1 Proximity sensor triggering distances(Per KDB616217\$6.2) 11
6. RF Exposure Limits..... 24
6.1 Uncontrolled Environment 24
6.2 Controlled Environment 24
7. Specific Absorption Rate (SAR)..... 25
7.1 Introduction 25
7.2 SAR Definition 25
8. System Description and Setup 26
8.1 E-Field Probe 27
8.2 Data Acquisition Electronics (DAE) 27
8.3 Phantom 28
8.4 Device Holder 29
9. Measurement Procedures 30
9.1 Spatial Peak SAR Evaluation 30
9.2 Power Reference Measurement 31
9.3 Area Scan 31
9.4 Zoom Scan 32
9.5 Volume Scan Procedures 32
9.6 Power Drift Monitoring 32
10. Test Equipment List 33
11. System Verification 34
11.1 Tissue Simulating Liquids 34
11.2 Tissue Verification 35
11.3 System Performance Check Results 36
12. RF Exposure Positions 38
12.1 Ear and handset reference point 38
12.2 Definition of the cheek position 39
12.3 Definition of the tilt position 40
12.4 Body Worn Accessory 41
12.5 Product Specific 10g SAR Exposure 42
12.6 Wireless Router 42
13. Conducted RF Output Power (Unit: dBm) 43
14. Antenna Location 112
15. SAR Test Results 114
15.1 Head SAR 117
15.2 Hotspot SAR 120
15.3 Body Worn Accessory SAR 124
15.4 Product specific 10g SAR 128
15.5 Repeated SAR Measurement 131
16. Simultaneous Transmission Analysis 132
16.1 Head Exposure Conditions 133
16.2 Hotspot Exposure Conditions 134
16.3 Body-Worn Accessory Exposure Conditions 136
16.4 Product specific 10g SAR Exposure Conditions 137
16.5 SPLSR Evaluation and Analysis 138
17. Supplemental Tuner Tests Results 172
17.1 Supplemental Tuner Head & Body SAR Results 172
18. Uncertainty Assessment 173
19. References 174
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. Supplemental Tuner Head & Body SAR Results
Appendix D. DASYS Calibration Certificate
Appendix E. Test Setup Photos

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT1962-5**, are as follows.

Highest 1g SAR Summary							
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)	
			1g SAR (W/kg)				
Licensed	GSM	GSM850	0.23	1.41	1.41	1.56	
		GSM1900	<0.10	1.43	1.43		
	WCDMA	Band V	0.30	1.27	1.27		
		Band II	0.13	1.45	1.44		
	LTE	Band 26/Band 5		0.34	1.34		1.34
		Band 4		0.18	1.35		1.21
		Band 2		0.14	1.37		1.39
		Band 7		0.52	1.41		1.41
Band 41/ Band 38		0.14	1.41	1.41			
DTS	WLAN	2.4GHz WLAN	1.04	0.51	0.51	1.56	
NII		5GHz WLAN	0.68	0.91	1.04	1.48	
DSS	Bluetooth	2.4GHz Bluetooth	0.24	0.17	0.17	1.48	

Highest 10g SAR Summary					
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)	
Licensed	GSM	GSM850	1.96	3.99	
		GSM1900	3.41		
	WCDMA	Band V	2.47		
		Band II	3.05		
	LTE	Band 26/Band 5			2.16
		Band 4			3.03
		Band 2			3.20
		Band 7			3.00
Band 41/ Band 38		3.34			
NII	WLAN	5GHz WLAN	0.58	3.99	
Date of Testing:			2018/9/19~2018/10/15		

Remark: This device supports both LTE B5/38 and B26/41. Since the supported frequency span for LTE B5/38 falls completely within the supports frequency span for LTE B26/41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B26/41.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1962-5
FCC ID	IHDT56XP3
IMEI Code	SIM1: 359505090011912 SIM2: 359505090011920
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE NFC:ASK
HW Version	DVT1B
SW Version	PPO29.62
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> 1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 4. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. 5. There are two different types of EUT. They are single SIM card mobile and dual SIM card mobile. The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan two types of EUT, we found test result of the sample that dual SIM was the worst, so we chose dual SIM card mobile to perform all tests. 6. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests. 7. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the 	



- device. When front or back body worn condition is detected, GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
8. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41.
 9. This device hotspot reduced power and P-sensor reduced power level are the same for GSM850, WCDMA Band V and LTE Band 7/38/41. And for other Bands are differences.
 10. P-sensor can detect handheld state, GSM1900, WCDMA band II, LTE band 2/4/7/38/41 for front/back/bottom sides and product specific 10g SAR condition reduced powers will be active.
 11. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device and WWAN antenna 2 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V, LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
 12. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA and LTE modes of WWAN antenna 1. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner are included in the operational description and supplemental data for additional information on section17.

4.2 Specification of Accessory

Accessories Information				
AC Adapter 1 US	Brand Name	Motorola(Salom)	Model Name	SC-51
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 1 EU	Brand Name	Motorola(Salom)	Model Name	SC-52
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 1 AU	Brand Name	Motorola(Salom)	Model Name	SC-55
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 1 UK	Brand Name	Motorola(Salom)	Model Name	SC-53
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 2 US	Brand Name	Motorola(Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 2 EU	Brand Name	Motorola(Chenyang)	Model Name	SC-52
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 2 AU	Brand Name	Motorola(Chenyang)	Model Name	SC-55
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 2 UK	Brand Name	Motorola(Chenyang)	Model Name	SC-53
	Power Rating	I/P: 100 - 240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA · 9 Vdc, 2000 mA · 12 Vdc, 1500 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
Battery 1	Brand Name	Amperex(motorola)	Model Name	JG30
	Power Rating	3.8 Vdc, 3000 mAh		Type
Earphone 1	Brand Name	Lyand	Model Name	SH38C37773
	Signal Line	1.11 meter, non-shielded cable, with w/o ferrite core		
USB Cable 1	Brand Name	Cabletech	Model Name	SKN6473A
	Signal Line	1 meter, non-shielded cable, with w/o ferrite core		
USB Cable 2	Brand Name	Saibao	Model Name	SKN6473A
	Signal Line	1 meter, non-shielded cable, with w/o ferrite core		
USB Cable 3	Brand Name	Luxshare	Model Name	SKN6473A
	Signal Line	1 meter, non-shielded cable, with w/o ferrite core		



4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																							
FCC ID	IHDT56XP3																																																						
Equipment Name	Mobile Cellular Phone																																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz																																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																						
uplink modulations used	QPSK / 16QAM																																																						
LTE Voice / Data requirements	Voice and Data																																																						
LTE Release Version	R10, Cat7																																																						
CA Support	Not Supported																																																						
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>256 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>≥ 1</td> <td></td> <td></td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	256 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3					≥ 1			≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																
256 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																
				≥ 1			≤ 5																																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																						
Power reduction applied to satisfy SAR compliance	<p>Yes</p> <ol style="list-style-type: none"> The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41. P-sensor can detect handheld state, GSM1900, WCDMA band II, LTE band 2/4/7/38/41 for front/back/bottom sides and product specific 10g SAR condition reduced powers will be active. 																																																						




Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	40065	2537.5	40090	2540	40115	2542.5	40140	2545				
L	40385	2569.5	40390	2570	40395	2570.5	40400	2571				
M	40705	2601.5	40690	2600	40685	2599.5	40670	2598				
H	41215	2652.5	41190	2650	41165	2647.5	41140	2645				

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (850MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front or back side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
5. P-sensor can detect handheld state, GSM1900, WCDMA band II, LTE band 2/4/7/38/41 for front/back/bottom sides and product specific 10g SAR condition reduced powers will be active.

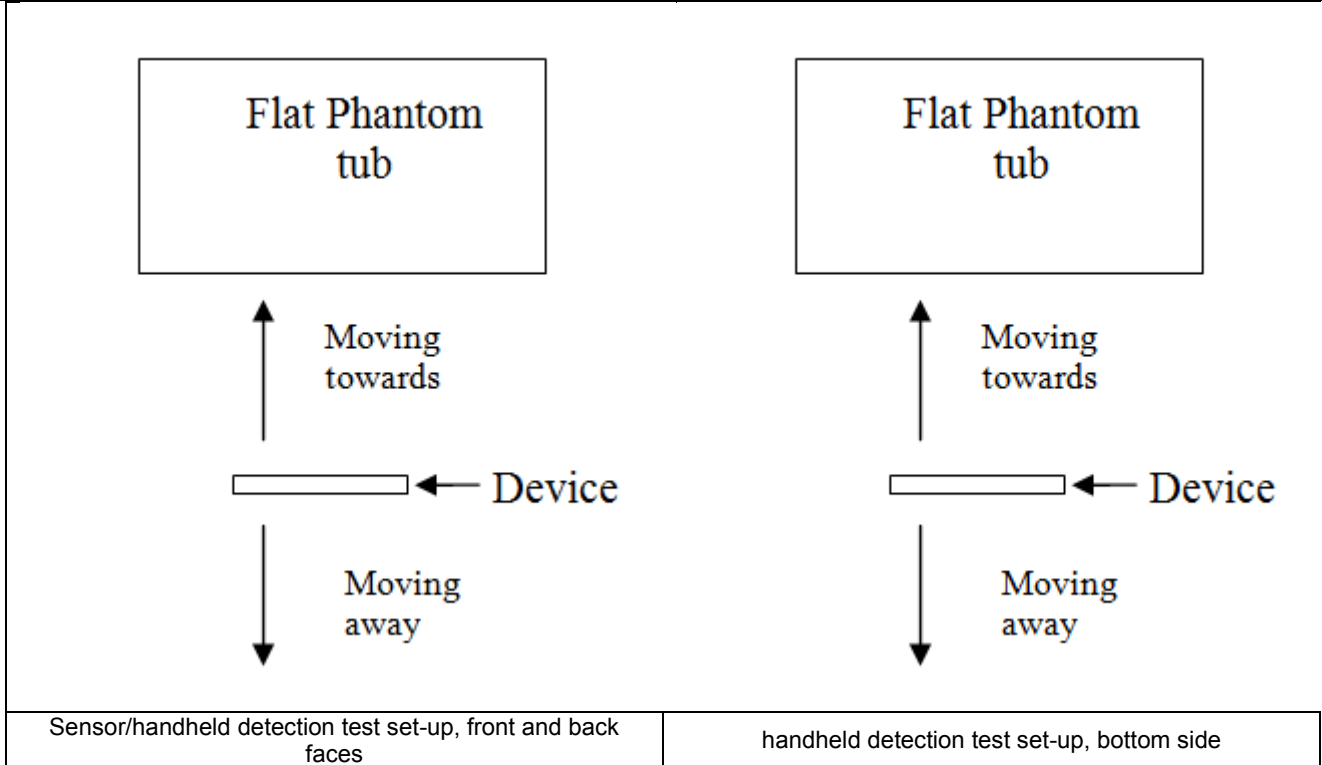

<P-Sensor>


Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	15	17	19

TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GSM850 GPRS 4Tx slots	27.5	26.5	1
GSM1900 GPRS 4Tx slots	24.5	18.5	6
WCDMA Band II	23.5	16.5	7
WCDMA Band V	23.5	23	0.5
LTE Band2	23.5	16	7.5
LTE Band4	23.5	16.5	7
LTE Band7	23.5	19	4.5
LTE Band38	24.5	21	3.5
LTE Band41	24.5	21	3.5




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM850 GPRS 4Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band V	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23	23	23	23	23	23	23	23	23
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21

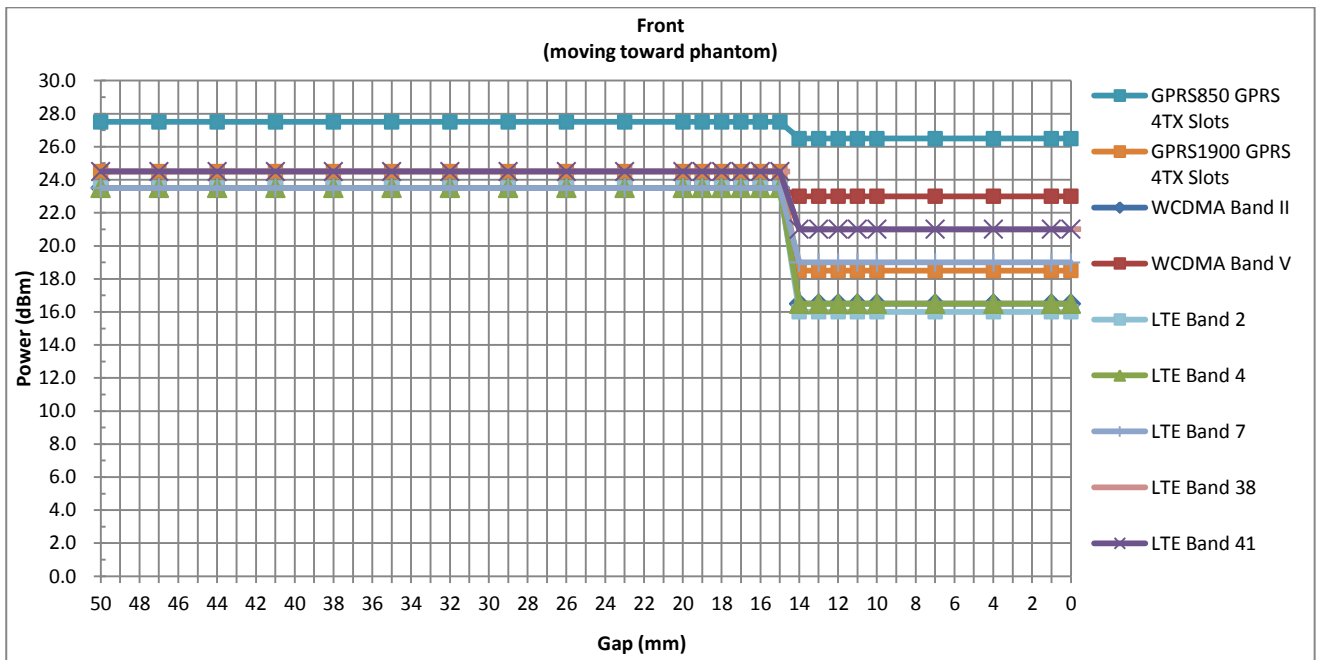


Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM850 GPRS 4Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band V	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23	23	23	23	23	23	23	23	23	23
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21

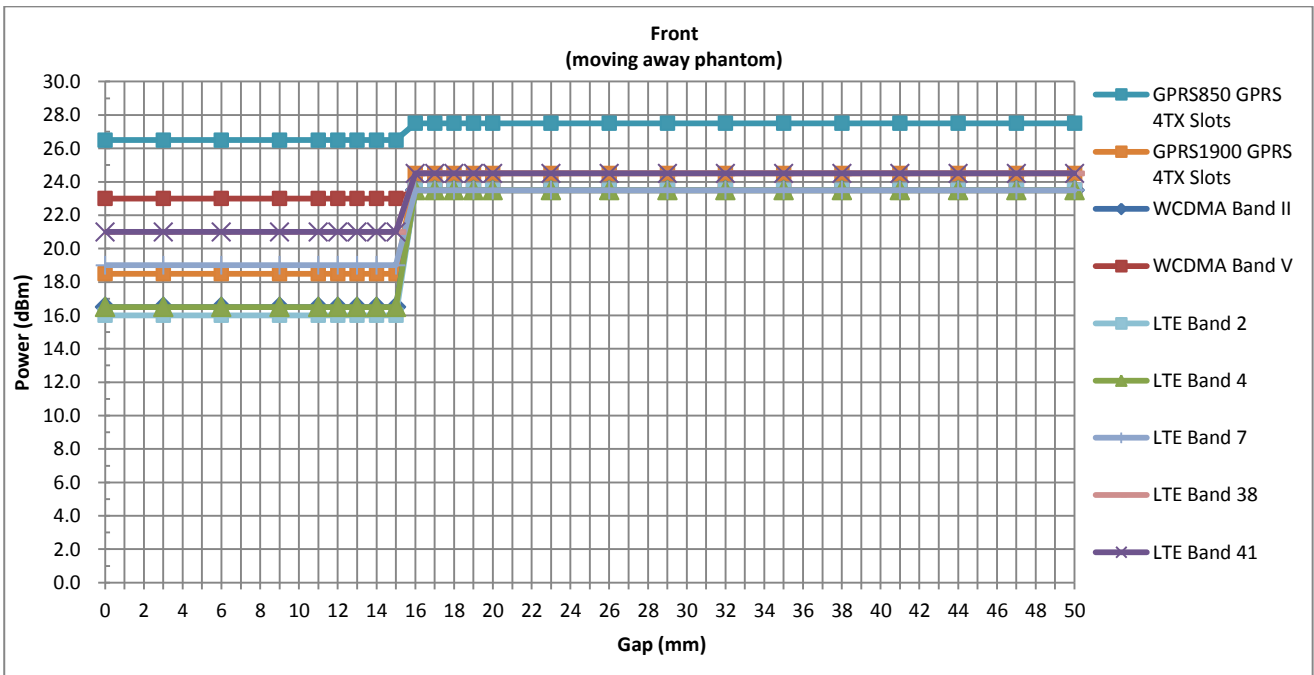


Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM850 GPRS 4Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band V	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21

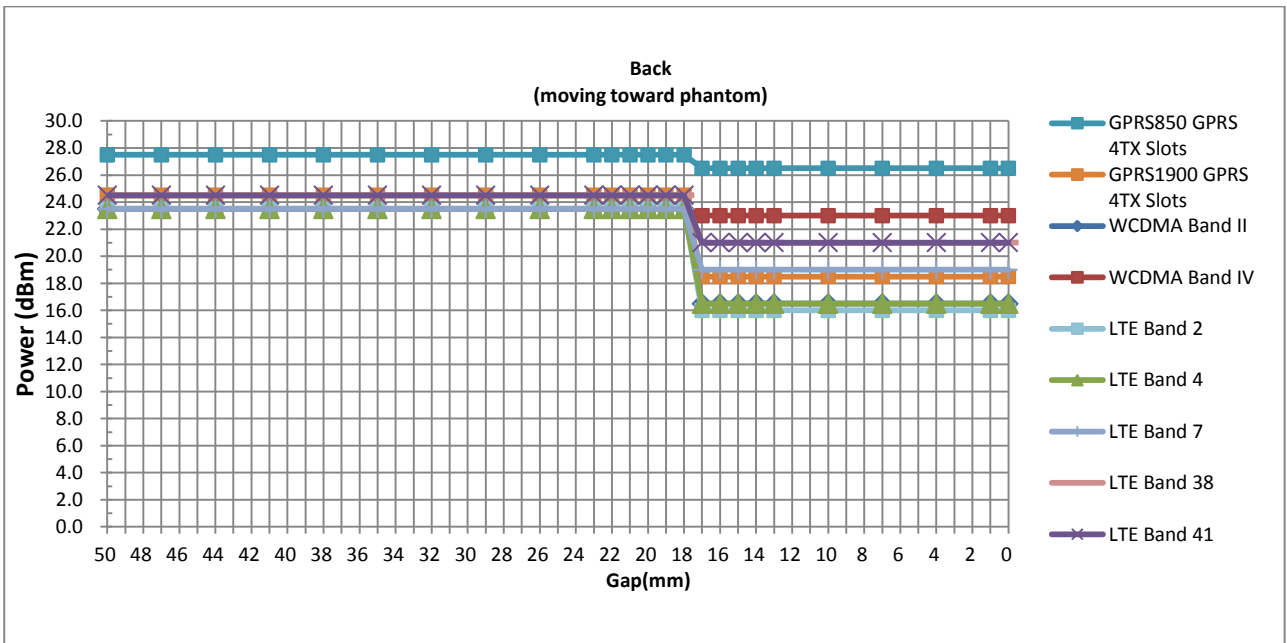

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM850 GPRS 4Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band V	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21

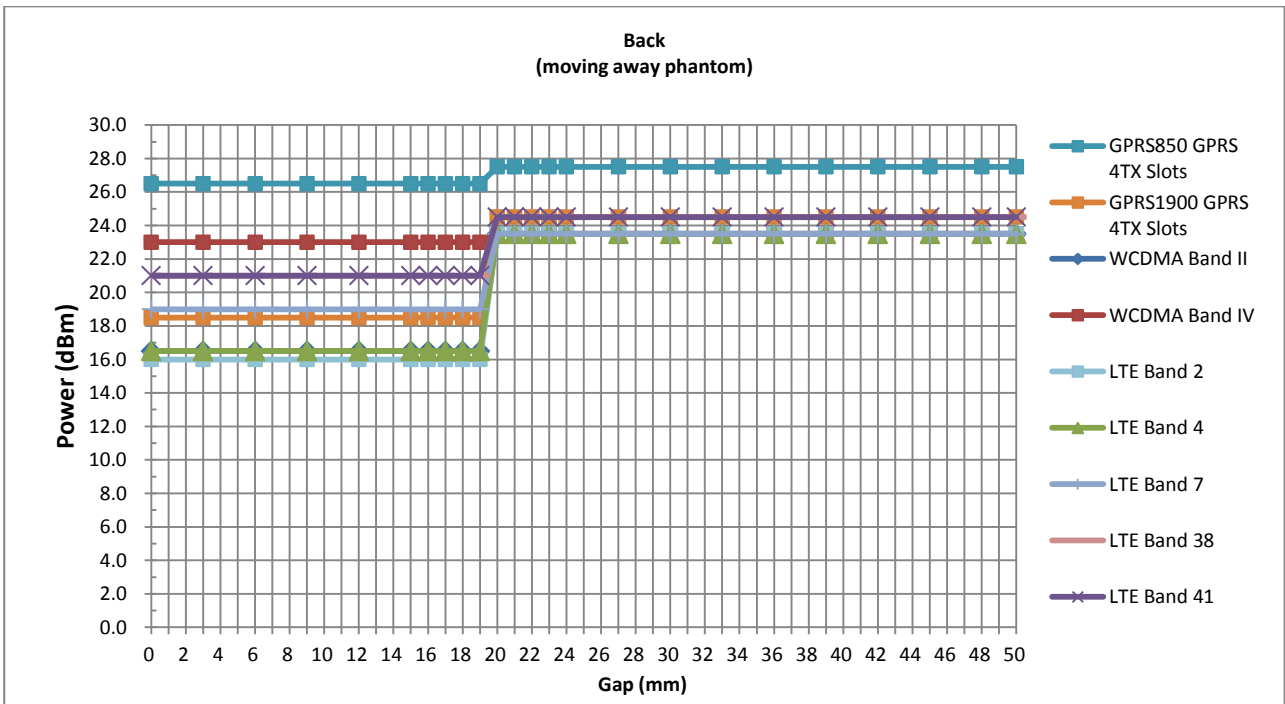




<Handheld>

Handheld Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	15	17	19	21	23

TX. Band	Handheld Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GSM1900 GPRS 4Tx slots	24.5	24	0.5
WCDMA Band II	23.5	20.5	3
LTE Band2	23.5	20	3.5
LTE Band4	23.5	20	3.5
LTE Band7	23.5	19.5	4
LTE Band38	24.5	23	1.5
LTE Band41	24.5	23	1.5


Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23

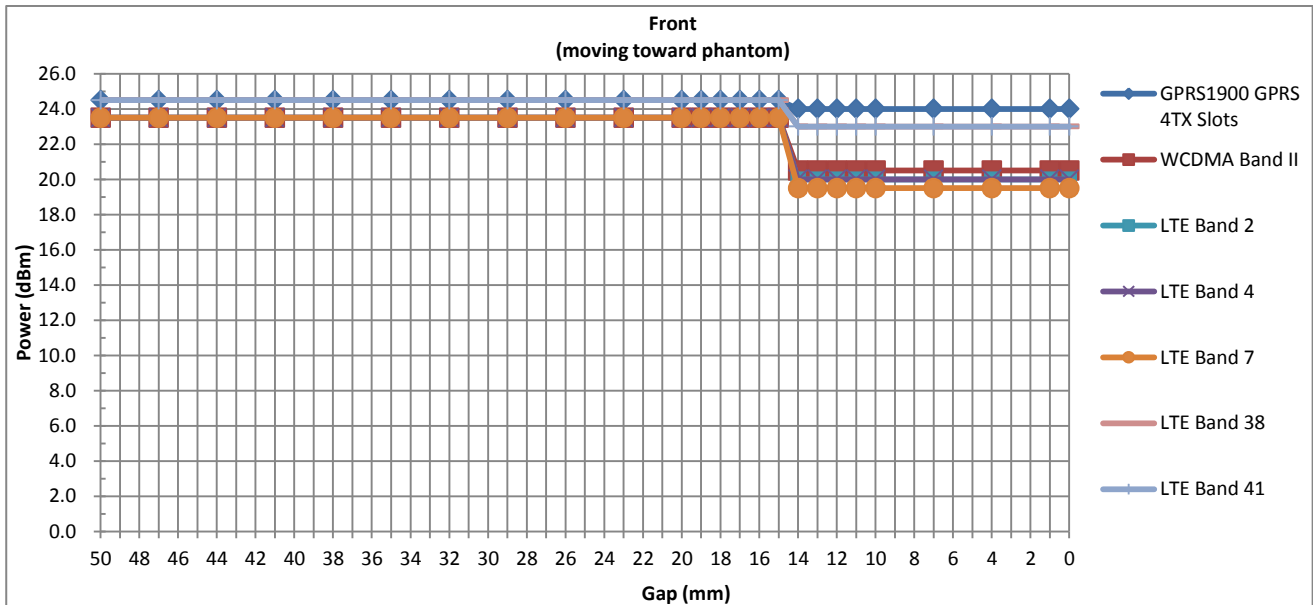



Handheld Triggering Distance (mm) and Triggering Power (dBm)


Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24	24
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23

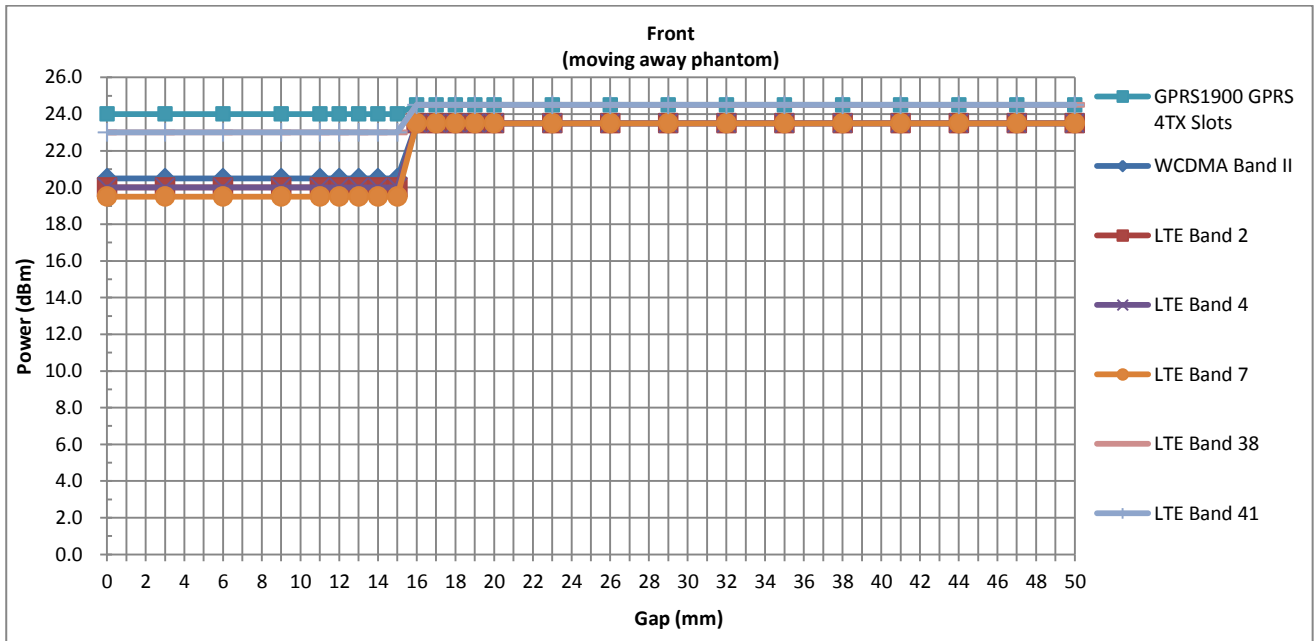



Handheld Triggering Distance (mm) and Triggering Power (dBm)


Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24	24	24	24
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23

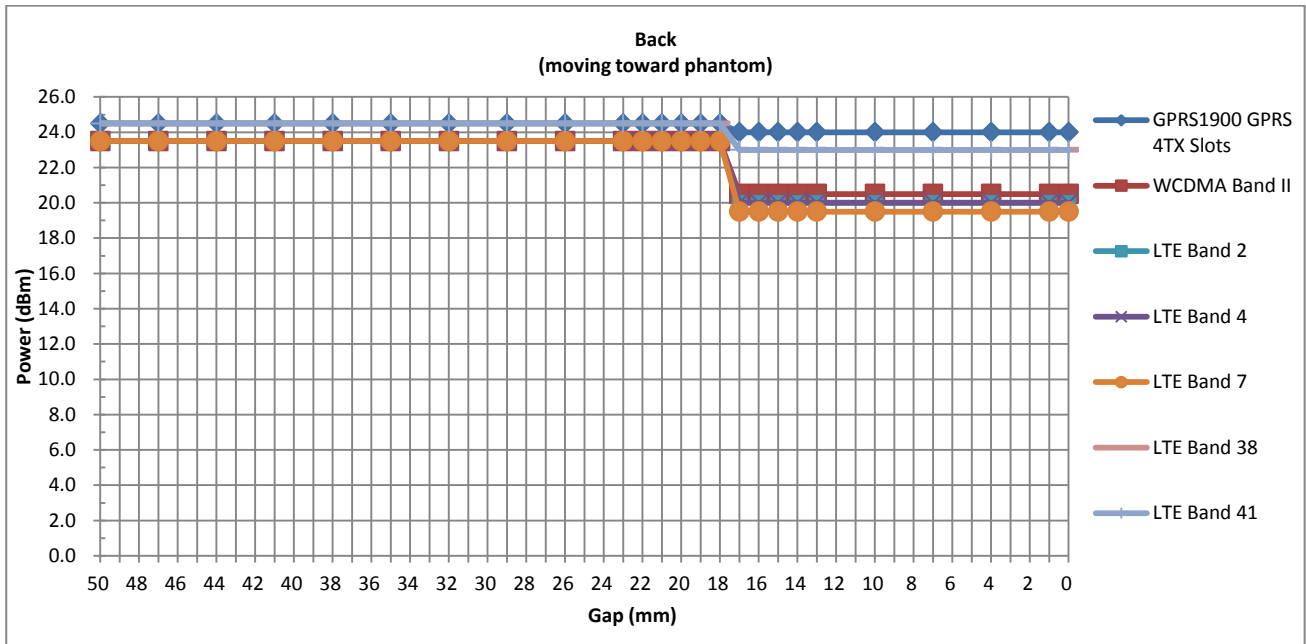



Handheld Triggering Distance (mm) and Triggering Power (dBm)

Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24	24	24	24	24	24
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23

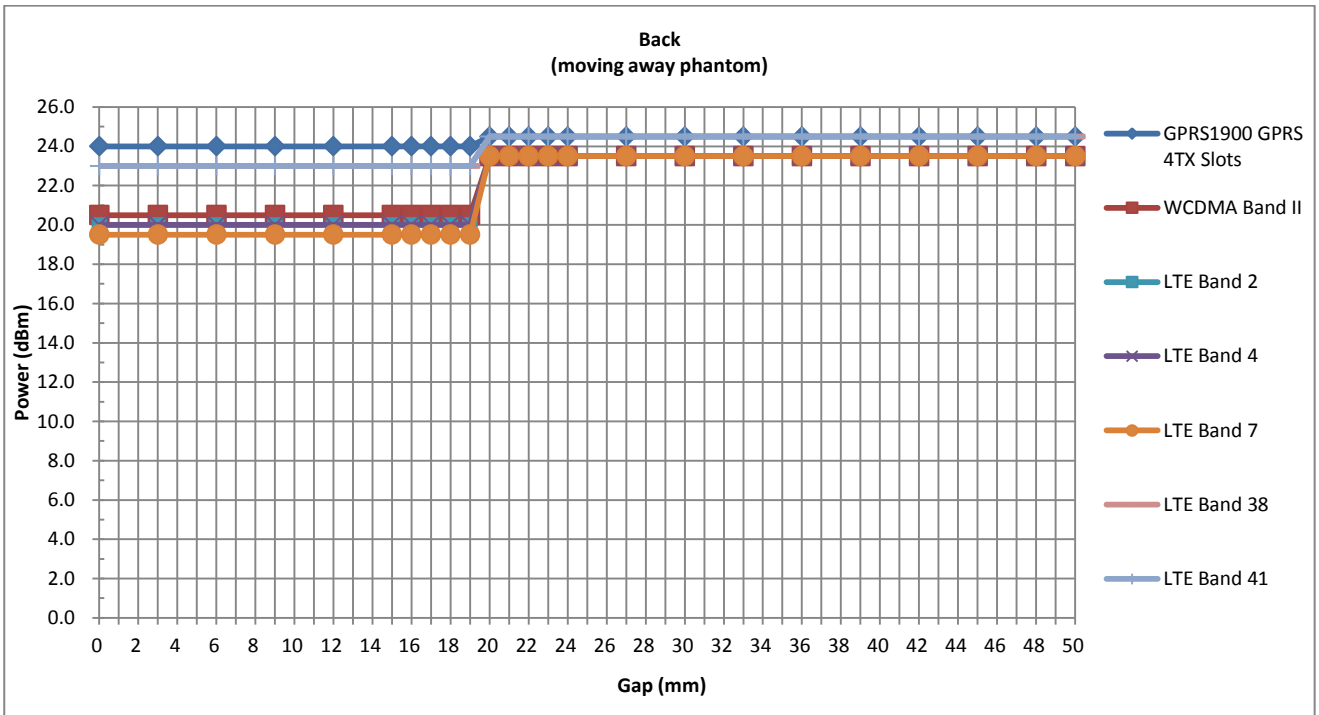




Handheld Triggering Distance (mm) and Triggering Power (dBm)

Bottom Side

Distance	50	47	44	41	38	35	32	29	26	23	21	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23

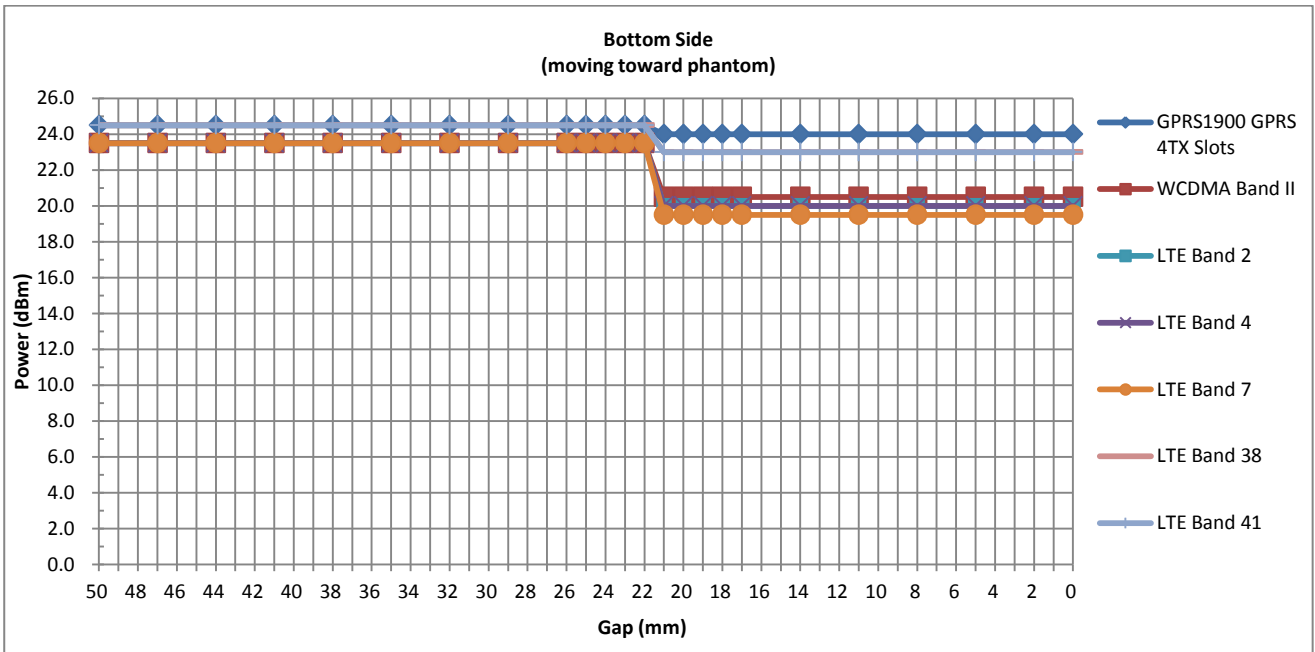




Handheld Triggering Distance (mm) and Triggering Power (dBm)

Bottom Side

Distance	50	47	44	41	38	35	32	29	26	23	21	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23

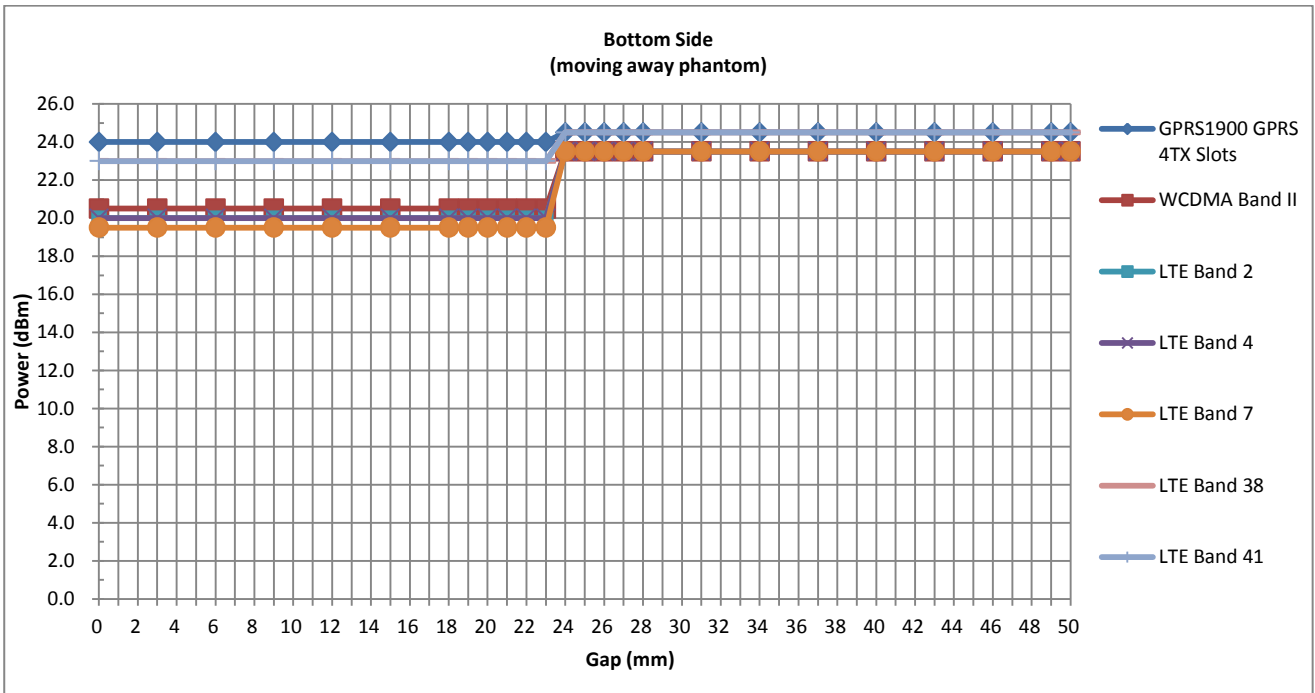

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

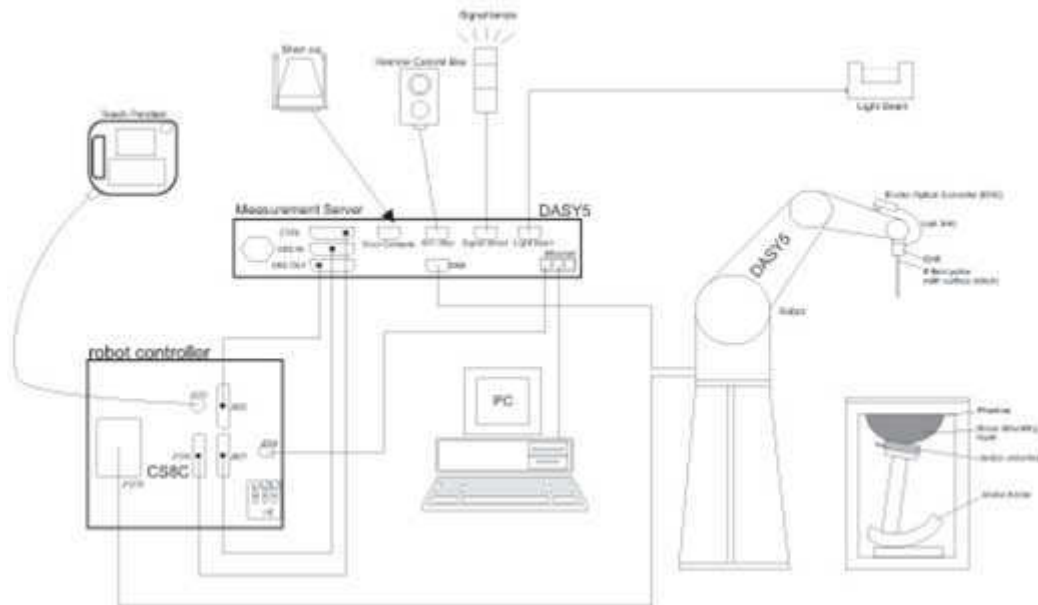


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	2017/12/5	2018/12/4
SPEAG	1750MHz System Validation Kit	D1750V2	1069	2017/12/5	2018/12/4
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2017/12/6	2018/12/5
SPEAG	2450MHz System Validation Kit	D2450V2	840	2017/12/7	2018/12/6
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2017/12/7	2018/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1203	2017/12/14	2018/12/13
SPEAG	Data Acquisition Electronics	DAE4	1305	2018/5/11	2019/5/10
SPEAG	Data Acquisition Electronics	DAE4	1358	2018/4/19	2019/4/18
SPEAG	Data Acquisition Electronics	DAE4	1210	2018/5/28	2019/5/27
SPEAG	Dosimetric E-Field Probe	ES3DV4	3088	2018/7/19	2019/7/18
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2018/1/31	2019/1/30
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2018/5/31	2019/5/30
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563900	2018/1/26	2019/1/25
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2018/4/17	2019/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2018/4/17	2019/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2017/11/28	2018/11/27
Anritsu	Vector Signal Generator	MG3710A	6201682672	2018/2/6	2019/2/5
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101246	2018/1/26	2019/1/25
EXA	Spectrum Analyzer	FSV7	101632	2018/1/26	2019/1/25
Testo	Thermometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/3	2019/8/2
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASy, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.7	0.925	42.477	0.90	41.50	2.78	2.35	±5	2018/9/22
1750	Head	22.6	1.404	41.477	1.37	40.10	2.48	3.43	±5	2018/9/22
1900	Head	22.7	1.464	39.142	1.40	40.00	4.57	-2.14	±5	2018/9/23
2450	Head	22.8	1.848	39.012	1.80	39.20	2.67	-0.48	±5	2018/9/27
2600	Head	22.8	2.021	38.375	1.96	39.00	3.11	-1.60	±5	2018/9/23
5250	Head	22.8	4.808	36.948	4.71	35.90	2.08	2.92	±5	2018/9/24
5600	Head	22.8	5.183	36.415	5.07	35.50	2.23	2.58	±5	2018/9/24
5750	Head	22.8	5.349	36.196	5.22	35.40	2.47	2.25	±5	2018/9/24
835	Body	22.8	0.983	54.264	0.97	55.20	1.34	-1.70	±5	2018/9/19
1750	Body	22.6	1.491	54.095	1.49	53.40	0.07	1.30	±5	2018/10/8
1900	Body	22.8	1.537	53.815	1.52	53.30	1.12	0.97	±5	2018/10/12
2450	Body	22.7	2.010	51.790	1.95	52.70	3.08	-1.73	±5	2018/9/27
2600	Body	22.7	2.222	51.221	2.16	52.50	2.87	-2.44	±5	2018/10/15
5250	Body	22.8	5.551	47.329	5.36	48.90	3.56	-3.21	±5	2018/9/25
5600	Body	22.8	6.013	46.722	5.77	48.50	4.21	-3.67	±5	2018/9/25
5750	Body	22.8	6.220	46.461	5.94	48.30	4.71	-3.81	±5	2018/9/25



11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Table with 11 columns: Date, Frequency (MHz), Tissue Type, Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). It contains 20 rows of test data.

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018/9/19	835	Body	250	4d091	3857	1210	1.53	6.42	6.12	-4.67
2018/10/8	1750	Body	250	1069	3088	1305	5.08	20.30	20.32	0.10
2018/10/12	1900	Body	250	5d118	3088	1305	5.05	21.10	20.2	-4.27
2018/9/27	2450	Body	250	840	3954	1358	6.09	24.00	24.36	1.50
2018/10/15	2600	Body	250	1061	3088	1305	6.00	25.00	24	-4.00
2018/9/25	5250	Body	100	1203	3857	1210	1.99	21.50	19.9	-7.44
2018/9/25	5600	Body	100	1203	3857	1210	2.12	22.10	21.2	-4.07
2018/9/25	5750	Body	100	1203	3857	1210	2.03	21.30	20.3	-4.69

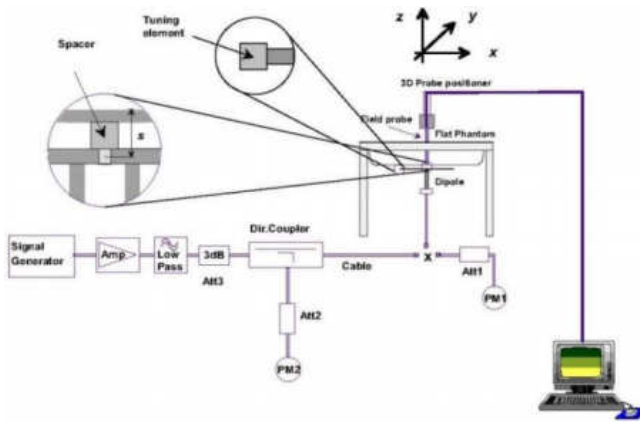


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

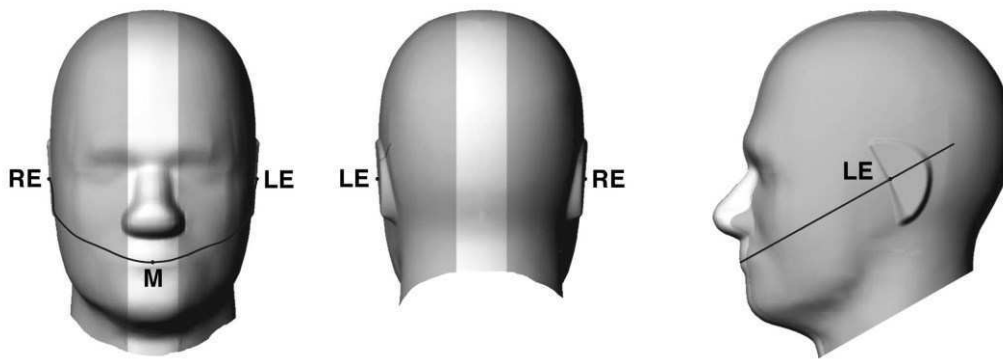


Fig 12.1.1 Front, back, and side views of SAM twin phantom

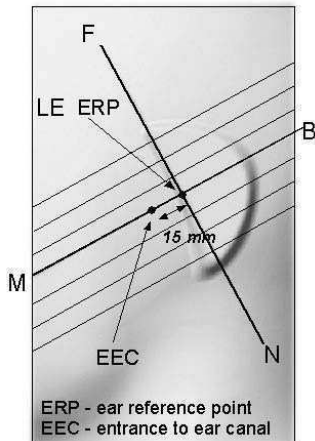


Fig 12.1.2 Close-up side view of phantom showing the ear region.

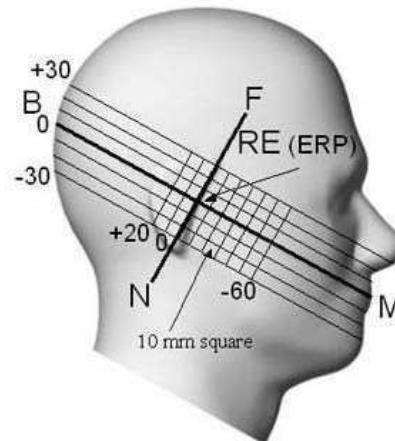


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

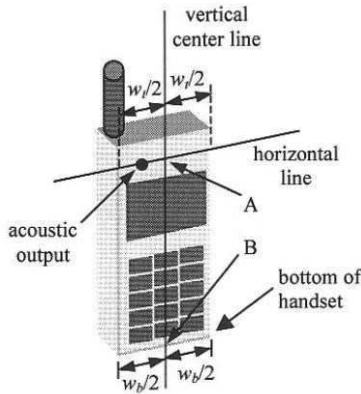


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

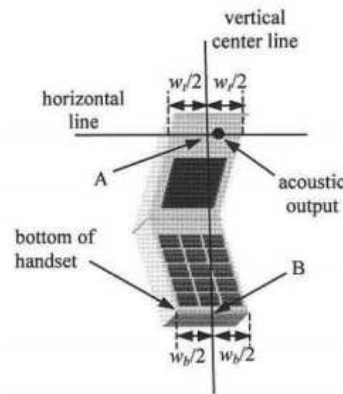


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

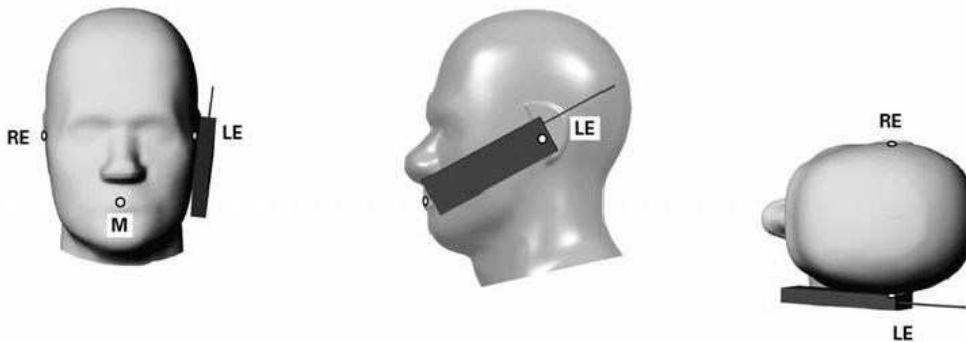


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

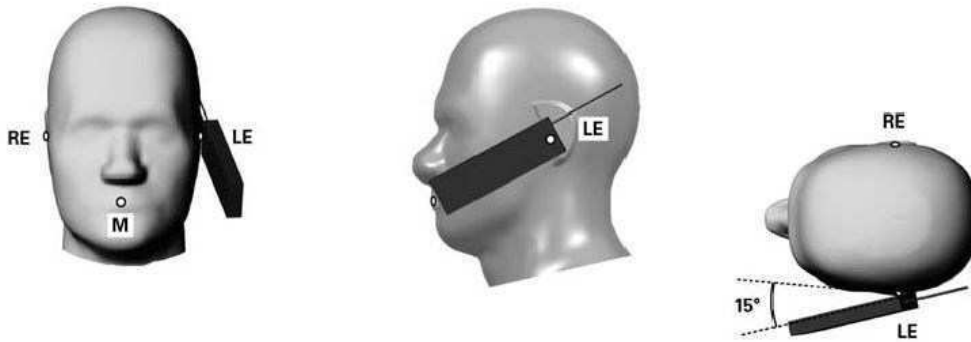


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

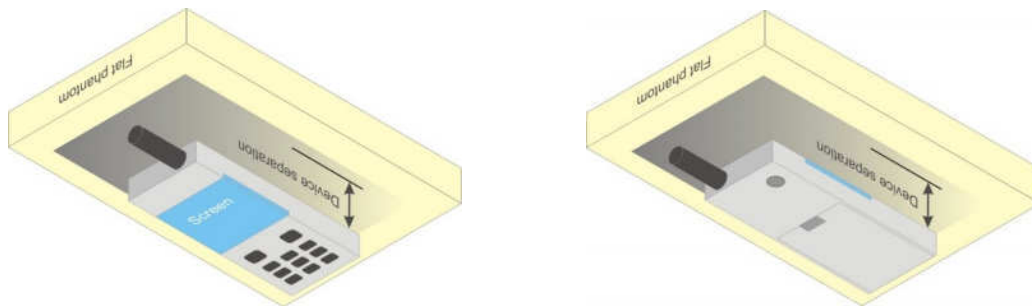


Fig 12.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
4. Power reduction which is triggered by hotspot mode/p-sensor on are implemented in GSM850/1900 band, and p-sensor detects handheld state for product specific 10g SAR condition is implemented in GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

<Full Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.22	32.95	33.01	33.50	24.22	23.95	24.01	24.50
GPRS 1 Tx slot	33.19	32.94	33.00	33.50	24.19	23.94	24.00	24.50
GPRS 2 Tx slots	29.98	30.02	29.75	30.50	23.98	24.02	23.75	24.50
GPRS 3 Tx slots	27.86	27.95	27.89	28.50	23.60	23.69	23.63	24.24
GPRS 4 Tx slots	26.45	26.32	26.22	27.50	23.45	23.32	23.22	24.50
EDGE 1 Tx slot	26.78	26.67	26.70	27.50	17.78	17.67	17.70	18.50
EDGE 2 Tx slots	26.50	26.45	26.60	27.50	20.50	20.45	20.60	21.50
EDGE 3 Tx slots	25.68	25.34	25.62	26.50	21.42	21.08	21.36	22.24
EDGE 4 Tx slots	24.20	24.18	24.18	25.00	21.20	21.18	21.18	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.67	29.95	29.75	30.50	20.67	20.95	20.75	21.50
GPRS 1 Tx slot	29.66	29.94	29.74	30.50	20.66	20.94	20.74	21.50
GPRS 2 Tx slots	26.59	26.72	26.61	27.50	20.59	20.72	20.61	21.50
GPRS 3 Tx slots	24.50	24.95	24.84	25.50	20.24	20.69	20.58	21.24
GPRS 4 Tx slots	23.20	23.30	23.22	24.50	20.20	20.30	20.22	21.50
EDGE 1 Tx slot	25.69	25.92	25.89	27.00	16.69	16.92	16.89	18.00
EDGE 2 Tx slots	25.57	25.70	25.73	27.00	19.57	19.70	19.73	21.00
EDGE 3 Tx slots	24.03	24.24	24.25	25.00	19.77	19.98	19.99	20.74
EDGE 4 Tx slots	22.57	22.72	22.72	23.50	19.57	19.72	19.72	20.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for P-Sensor On >

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.38	32.15	32.20	32.50	23.38	23.15	23.20	23.50
GPRS 1 Tx slot	32.40	32.16	32.22	32.50	23.40	23.16	23.22	23.50
GPRS 2 Tx slots	29.23	29.26	29.12	29.50	23.23	23.26	23.12	23.50
GPRS 3 Tx slots	27.32	27.29	27.19	27.50	23.06	23.03	22.93	23.24
GPRS 4 Tx slots	25.91	25.83	25.77	26.50	22.91	22.83	22.77	23.50
EDGE 1 Tx slot	26.78	26.67	26.70	27.50	17.78	17.67	17.70	18.50
EDGE 2 Tx slots	26.50	26.45	26.60	27.50	20.50	20.45	20.60	21.50
EDGE 3 Tx slots	25.68	25.34	25.62	26.50	21.42	21.08	21.36	22.24
EDGE 4 Tx slots	24.20	24.18	24.18	25.00	21.20	21.18	21.18	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	24.50	24.48	24.43	24.50	15.50	15.48	15.43	15.50
GPRS 1 Tx slot	24.42	24.49	24.44	24.50	15.42	15.49	15.44	15.50
GPRS 2 Tx slots	21.41	21.38	21.37	21.50	15.41	15.38	15.37	15.50
GPRS 3 Tx slots	19.40	19.27	19.24	19.50	15.14	15.01	14.98	15.24
GPRS 4 Tx slots	18.06	18.10	18.01	18.50	15.06	15.10	15.01	15.50
EDGE 1 Tx slot	21.99	22.02	22.01	23.00	12.99	13.02	13.01	14.00
EDGE 2 Tx slots	20.90	20.87	20.77	21.00	14.90	14.87	14.77	15.00
EDGE 3 Tx slots	19.42	19.44	19.43	19.50	15.16	15.18	15.17	15.24
EDGE 4 Tx slots	17.10	17.06	17.01	18.00	14.10	14.06	14.01	15.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for Hotspot On >

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.38	32.15	32.20	32.50	23.38	23.15	23.20	23.50
GPRS 1 Tx slot	32.40	32.16	32.22	32.50	23.40	23.16	23.22	23.50
GPRS 2 Tx slots	29.23	29.26	29.12	29.50	23.23	23.26	23.12	23.50
GPRS 3 Tx slots	27.32	27.29	27.19	27.50	23.06	23.03	22.93	23.24
GPRS 4 Tx slots	25.91	25.83	25.77	26.50	22.91	22.83	22.77	23.50
EDGE 1 Tx slot	26.78	26.67	26.70	27.50	17.78	17.67	17.70	18.50
EDGE 2 Tx slots	26.50	26.45	26.60	27.50	20.50	20.45	20.60	21.50
EDGE 3 Tx slots	25.68	25.34	25.62	26.50	21.42	21.08	21.36	22.24
EDGE 4 Tx slots	24.20	24.18	24.18	25.00	21.20	21.18	21.18	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	23.56	23.44	23.39	24.00	14.56	14.44	14.39	15.00
GPRS 1 Tx slot	23.58	23.45	23.40	24.00	14.58	14.45	14.40	15.00
GPRS 2 Tx slots	20.54	20.48	20.51	21.00	14.54	14.48	14.51	15.00
GPRS 3 Tx slots	18.33	18.28	18.26	19.00	14.07	14.02	14.00	14.74
GPRS 4 Tx slots	17.20	17.27	17.15	18.00	14.20	14.27	14.15	15.00
EDGE 1 Tx slot	21.95	21.99	21.97	22.00	12.95	12.99	12.97	13.00
EDGE 2 Tx slots	19.87	19.85	19.79	20.50	13.87	13.85	13.79	14.50
EDGE 3 Tx slots	18.85	18.67	18.65	19.00	14.59	14.41	14.39	14.74
EDGE 4 Tx slots	17.15	16.87	16.88	17.50	14.15	13.87	13.88	14.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



<Reduced Power Mode for Handheld>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.67	29.95	29.75	30.00	20.67	20.95	20.75	21.00
GPRS 1 Tx slot	29.66	29.94	29.74	30.00	20.66	20.94	20.74	21.00
GPRS 2 Tx slots	26.59	26.72	26.61	27.00	20.59	20.72	20.61	21.00
GPRS 3 Tx slots	24.50	24.95	24.84	25.00	20.24	20.69	20.58	20.74
GPRS 4 Tx slots	23.20	23.30	23.22	24.00	20.20	20.30	20.22	21.00
EDGE 1 Tx slot	25.69	25.92	25.89	26.00	16.69	16.92	16.89	17.00
EDGE 2 Tx slots	25.57	25.70	25.73	26.00	19.57	19.70	19.73	20.00
EDGE 3 Tx slots	24.03	24.24	24.25	25.00	19.77	19.98	19.99	20.74
EDGE 4 Tx slots	22.57	22.72	22.72	23.50	19.57	19.72	19.72	20.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.
 Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

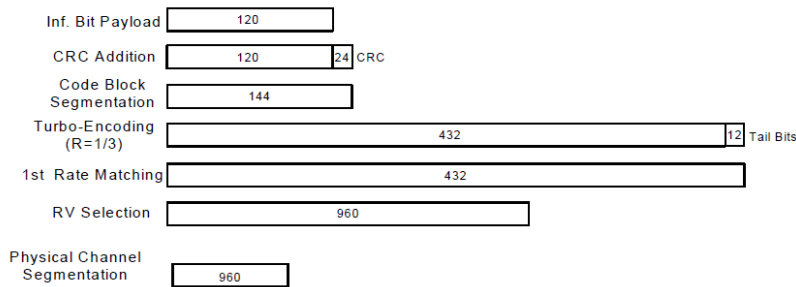


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.00	22.97	23.22	23.50	23.39	23.10	23.08	23.50
3GPP Rel 99	RMC 12.2Kbps	23.02	22.98	23.23	23.50	23.40	23.12	23.09	23.50
3GPP Rel 6	HSDPA Subtest-1	22.75	22.64	22.82	23.00	23.00	22.86	22.79	23.00
3GPP Rel 6	HSDPA Subtest-2	22.71	22.63	22.80	23.00	22.98	22.85	22.75	23.00
3GPP Rel 6	HSDPA Subtest-3	22.32	22.15	22.34	22.50	22.50	22.30	22.28	22.50
3GPP Rel 6	HSDPA Subtest-4	22.30	22.14	22.30	22.50	22.48	22.29	22.23	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.68	22.58	22.78	23.00	22.82	22.91	22.68	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.70	22.61	22.65	23.00	22.91	22.85	22.61	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.31	22.05	22.15	22.50	22.38	22.31	22.15	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.35	22.15	22.32	22.50	22.41	22.28	22.21	22.50
3GPP Rel 6	HSUPA Subtest-1	22.20	22.15	22.13	23.00	22.45	22.29	22.26	23.00
3GPP Rel 6	HSUPA Subtest-2	20.82	20.65	20.45	21.50	20.88	20.79	20.75	21.50
3GPP Rel 6	HSUPA Subtest-3	21.56	21.72	21.39	22.50	22.01	21.86	21.45	22.50
3GPP Rel 6	HSUPA Subtest-4	20.73	20.64	20.48	21.50	20.98	20.78	20.68	21.50
3GPP Rel 6	HSUPA Subtest-5	22.60	22.70	22.40	23.50	22.90	23.00	22.70	23.50



<Reduced Power Mode for P-Sensor On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	16.21	16.27	16.30	16.50	22.97	22.84	22.93	23.00
3GPP Rel 99	RMC 12.2Kbps	16.22	16.29	16.33	16.50	22.98	22.83	22.94	23.00
3GPP Rel 6	HSDPA Subtest-1	16.21	16.19	16.16	16.50	22.85	22.85	22.81	23.00
3GPP Rel 6	HSDPA Subtest-2	16.20	16.19	16.16	16.50	22.84	22.87	22.80	23.00
3GPP Rel 6	HSDPA Subtest-3	15.77	15.77	15.69	16.00	22.34	22.44	22.30	22.50
3GPP Rel 6	HSDPA Subtest-4	15.82	15.75	15.66	16.00	22.32	22.39	22.30	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	16.18	16.08	16.08	16.50	22.71	22.78	22.78	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	16.12	16.21	16.01	16.50	22.78	22.65	22.65	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	15.56	15.68	15.61	16.00	22.31	22.35	22.18	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	15.71	15.71	15.56	16.00	22.15	22.41	22.21	22.50
3GPP Rel 6	HSUPA Subtest-1	15.27	15.20	15.16	16.50	21.84	21.89	21.84	23.00
3GPP Rel 6	HSUPA Subtest-2	14.25	14.21	14.20	14.50	20.86	20.92	20.83	21.00
3GPP Rel 6	HSUPA Subtest-3	15.26	15.18	15.14	15.50	21.79	21.88	21.81	22.00
3GPP Rel 6	HSUPA Subtest-4	14.24	14.23	14.18	14.50	20.83	20.90	20.81	21.00
3GPP Rel 6	HSUPA Subtest-5	16.10	16.20	16.20	16.50	22.80	22.90	22.80	23.00



<Reduced Power Mode for Hotspot On >

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	14.39	14.48	14.49	15.00	22.97	22.84	22.93	23.00
3GPP Rel 99	RMC 12.2Kbps	14.40	14.49	14.50	15.00	22.98	22.83	22.94	23.00
3GPP Rel 6	HSDPA Subtest-1	14.48	14.44	14.34	15.00	22.85	22.85	22.81	23.00
3GPP Rel 6	HSDPA Subtest-2	14.46	14.43	14.33	15.00	22.84	22.87	22.80	23.00
3GPP Rel 6	HSDPA Subtest-3	13.96	13.90	13.84	14.50	22.34	22.44	22.30	22.50
3GPP Rel 6	HSDPA Subtest-4	13.99	13.91	13.86	14.50	22.32	22.39	22.30	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	14.35	14.41	14.36	15.00	22.71	22.78	22.78	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	14.38	14.38	14.35	15.00	22.78	22.65	22.65	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	13.88	13.78	13.78	14.50	22.31	22.35	22.18	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	13.91	13.85	13.91	14.50	22.15	22.41	22.21	22.50
3GPP Rel 6	HSUPA Subtest-1	13.54	13.50	13.59	15.00	21.84	21.89	21.84	23.00
3GPP Rel 6	HSUPA Subtest-2	12.48	12.41	12.34	13.00	20.86	20.92	20.83	21.00
3GPP Rel 6	HSUPA Subtest-3	12.94	12.90	12.85	14.00	21.79	21.88	21.81	22.00
3GPP Rel 6	HSUPA Subtest-4	12.48	12.38	12.36	13.00	20.83	20.90	20.81	21.00
3GPP Rel 6	HSUPA Subtest-5	14.46	14.45	14.35	15.00	22.80	22.90	22.80	23.00

<Reduced Power Mode for Handheld>

Band		WCDMA Band II			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	19.71	19.81	19.86	20.50
3GPP Rel 99	RMC 12.2Kbps	19.74	19.83	19.88	20.50
3GPP Rel 6	HSDPA Subtest-1	19.52	19.46	19.38	20.50
3GPP Rel 6	HSDPA Subtest-2	19.53	19.47	19.39	20.50
3GPP Rel 6	HSDPA Subtest-3	19.04	18.95	18.88	20.00
3GPP Rel 6	HSDPA Subtest-4	19.00	18.98	18.91	20.00
3GPP Rel 8	DC-HSDPA Subtest-1	19.48	19.48	19.39	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	19.52	19.41	19.31	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.01	19.01	18.78	20.00
3GPP Rel 8	DC-HSDPA Subtest-4	19.05	18.88	18.91	20.00
3GPP Rel 6	HSUPA Subtest-1	19.02	18.97	18.95	20.50
3GPP Rel 6	HSUPA Subtest-2	17.51	17.48	17.33	18.50
3GPP Rel 6	HSUPA Subtest-3	18.52	18.48	18.45	19.50
3GPP Rel 6	HSUPA Subtest-4	17.50	17.49	17.41	18.50
3GPP Rel 6	HSUPA Subtest-5	19.60	19.50	19.40	20.50



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5 / 38 SAR test was covered by Band 26 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.40	22.18	22.25	23.50	0
20	QPSK	1	49	22.27	22.04	22.05		
20	QPSK	1	99	22.34	21.98	22.20		
20	QPSK	50	0	22.15	21.70	21.86	23.00	0.5
20	QPSK	50	24	21.86	21.59	21.56		
20	QPSK	50	50	21.81	21.49	21.74		
20	QPSK	100	0	21.93	21.73	21.56		
20	16QAM	1	0	22.19	22.07	22.19	23.00	0.5
20	16QAM	1	49	21.99	21.59	22.01		
20	16QAM	1	99	22.17	21.85	21.96		
20	16QAM	50	0	20.97	20.68	20.89	22.00	1.5
20	16QAM	50	24	20.88	20.65	20.79		
20	16QAM	50	50	20.87	20.60	20.79		
20	16QAM	100	0	20.78	20.46	20.89		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.61	22.30	22.40	23.50	0
15	QPSK	1	37	22.27	22.05	22.24		
15	QPSK	1	74	22.48	22.23	22.43		
15	QPSK	36	0	22.31	21.96	22.23	23.00	0.5
15	QPSK	36	20	21.98	21.56	22.19		
15	QPSK	36	39	21.92	21.68	21.86		
15	QPSK	75	0	22.11	21.80	22.09		
15	16QAM	1	0	22.35	22.19	22.34	23.00	0.5
15	16QAM	1	37	22.05	21.93	22.09		
15	16QAM	1	74	22.30	21.76	22.28		
15	16QAM	36	0	21.32	21.00	21.21	22.00	1.5
15	16QAM	36	20	20.97	20.86	20.96		
15	16QAM	36	39	20.79	20.95	20.79		
15	16QAM	75	0	21.11	20.82	21.11		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.30	22.09	22.21	23.50	0
10	QPSK	1	25	22.47	22.09	22.22		
10	QPSK	1	49	22.20	22.13	22.26		
10	QPSK	25	0	21.99	21.73	21.93	23.00	0.5
10	QPSK	25	12	22.02	21.68	21.94		
10	QPSK	25	25	21.80	21.50	21.77		
10	QPSK	50	0	21.88	21.58	21.82	23.00	0.5
10	16QAM	1	0	22.03	21.85	22.12		
10	16QAM	1	25	22.11	21.84	22.09		
10	16QAM	1	49	21.71	21.39	21.65	22.00	1.5
10	16QAM	25	0	20.98	20.68	20.92		
10	16QAM	25	12	21.02	20.68	20.90		
10	16QAM	25	25	20.86	20.51	20.73	22.00	1.5
10	16QAM	50	0	20.94	20.62	20.81		
10	16QAM	50	0	20.94	20.62	20.81		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.21	21.96	22.28	23.50	0
5	QPSK	1	12	22.33	22.05	22.26		
5	QPSK	1	24	22.36	22.02	22.26		
5	QPSK	12	0	22.01	21.72	21.95	23.00	0.5
5	QPSK	12	7	21.96	21.62	21.88		
5	QPSK	12	13	21.94	21.55	21.87		
5	QPSK	25	0	21.99	21.64	21.87	23.00	0.5
5	16QAM	1	0	22.22	21.98	22.21		
5	16QAM	1	12	22.09	21.81	22.03		
5	16QAM	1	24	22.14	21.81	22.02	22.00	1.5
5	16QAM	12	0	20.98	20.75	20.94		
5	16QAM	12	7	21.00	20.71	20.95		
5	16QAM	12	13	20.97	20.62	20.88	22.00	1.5
5	16QAM	12	13	20.97	20.62	20.88		
5	16QAM	25	0	20.93	20.61	20.87		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.35	22.08	22.24	23.50	0
3	QPSK	1	8	22.38	22.02	22.30		
3	QPSK	1	14	22.34	22.03	22.24		
3	QPSK	8	0	21.99	21.66	21.88	23.00	0.5
3	QPSK	8	4	21.96	21.62	21.89		
3	QPSK	8	7	21.93	21.57	21.86		
3	QPSK	15	0	21.91	21.63	21.84	23.00	0.5
3	16QAM	1	0	22.27	21.88	22.13		
3	16QAM	1	8	22.24	21.83	22.11		
3	16QAM	1	14	22.18	21.82	22.10	22.00	1.5
3	16QAM	8	0	20.99	20.71	20.95		
3	16QAM	8	4	21.01	20.74	20.94		
3	16QAM	8	7	20.99	20.61	20.91	22.00	1.5
3	16QAM	15	0	21.01	20.68	20.87		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.42	22.16	22.31	23.50	0
1.4	QPSK	1	3	22.39	22.06	22.31		
1.4	QPSK	1	5	22.32	22.08	22.19		
1.4	QPSK	3	0	22.32	22.02	22.26		
1.4	QPSK	3	1	22.35	22.05	22.24		
1.4	QPSK	3	3	22.33	22.02	22.20		
1.4	QPSK	6	0	21.90	21.62	21.82	23.00	0.5
1.4	16QAM	1	0	22.21	21.79	22.08	23.00	0.5
1.4	16QAM	1	3	22.21	21.82	22.07		
1.4	16QAM	1	5	22.15	21.76	22.00		
1.4	16QAM	3	0	21.87	21.57	21.77		
1.4	16QAM	3	1	21.90	21.61	21.80		
1.4	16QAM	3	3	21.84	21.56	21.79		
1.4	16QAM	6	0	21.08	20.68	20.87	22.00	1.5



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.42	22.40	22.50	23.50	0
20	QPSK	1	49	22.49	22.56	22.41		
20	QPSK	1	99	22.50	22.63	22.91		
20	QPSK	50	0	22.04	21.85	21.84	23.00	0.5
20	QPSK	50	24	21.95	21.90	21.95		
20	QPSK	50	50	21.99	21.92	22.05		
20	QPSK	100	0	22.01	21.89	22.06	23.00	0.5
20	16QAM	1	0	22.52	22.31	21.96		
20	16QAM	1	49	22.39	22.01	22.21		
20	16QAM	1	99	22.03	22.19	22.17	22.00	1.5
20	16QAM	50	0	21.13	20.95	20.84		
20	16QAM	50	24	20.99	20.79	20.89		
20	16QAM	50	50	20.89	20.98	21.06	22.00	1.5
20	16QAM	100	0	21.15	20.78	20.89		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.81	22.50	22.32	23.50	0
15	QPSK	1	37	22.68	22.52	22.61		
15	QPSK	1	74	22.59	22.77	22.66		
15	QPSK	36	0	22.60	22.32	22.26	23.00	0.5
15	QPSK	36	20	22.21	22.04	22.13		
15	QPSK	36	39	22.03	22.01	22.16		
15	QPSK	75	0	22.29	22.16	22.16	23.00	0.5
15	16QAM	1	0	22.29	22.90	22.69		
15	16QAM	1	37	22.20	22.31	22.14		
15	16QAM	1	74	22.36	22.52	22.79	22.00	1.5
15	16QAM	36	0	21.53	21.36	21.27		
15	16QAM	36	20	21.20	21.03	21.09		
15	16QAM	36	39	20.99	20.99	21.19	22.00	1.5
15	16QAM	75	0	21.27	21.16	21.23		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.42	22.69	22.46	23.50	0
10	QPSK	1	25	22.58	22.49	22.69		
10	QPSK	1	49	22.10	22.31	22.48		
10	QPSK	25	0	22.17	21.95	22.10	23.00	0.5
10	QPSK	25	12	22.08	22.00	22.19		
10	QPSK	25	25	21.87	21.91	22.18		
10	QPSK	50	0	21.97	21.87	22.14		
10	16QAM	1	0	22.39	22.12	22.27	23.00	0.5
10	16QAM	1	25	22.36	22.15	22.45		
10	16QAM	1	49	21.86	21.86	22.24		
10	16QAM	25	0	21.17	20.93	21.10	22.00	1.5
10	16QAM	25	12	21.13	20.98	21.17		
10	16QAM	25	25	20.84	20.90	21.12		
10	16QAM	50	0	21.03	20.93	21.13		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.16	22.53	22.16	23.50	0
5	QPSK	1	12	22.66	22.43	22.70		
5	QPSK	1	24	22.62	22.52	22.83		
5	QPSK	12	0	22.29	21.96	22.32	23.00	0.5
5	QPSK	12	7	22.21	21.97	22.34		
5	QPSK	12	13	22.12	22.01	22.30		
5	QPSK	25	0	22.23	21.99	22.35		
5	16QAM	1	0	22.67	22.33	22.59	23.00	0.5
5	16QAM	1	12	22.30	22.09	22.44		
5	16QAM	1	24	22.33	22.26	22.73		
5	16QAM	12	0	21.31	20.98	21.35	22.00	1.5
5	16QAM	12	7	21.26	20.98	21.32		
5	16QAM	12	13	21.20	21.00	21.37		
5	16QAM	25	0	21.20	20.99	21.33		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.56	22.69	22.12	23.50	0
3	QPSK	1	8	22.75	22.51	22.80		
3	QPSK	1	14	22.57	22.39	22.82		
3	QPSK	8	0	22.22	21.90	22.28	23.00	0.5
3	QPSK	8	4	22.18	21.94	22.31		
3	QPSK	8	7	22.19	21.86	22.31		
3	QPSK	15	0	22.22	21.95	22.34		
3	16QAM	1	0	22.54	22.39	22.55	23.00	0.5
3	16QAM	1	8	22.37	22.16	22.58		
3	16QAM	1	14	22.41	22.28	22.59		
3	16QAM	8	0	21.30	20.97	21.40	22.00	1.5
3	16QAM	8	4	21.30	21.05	21.39		
3	16QAM	8	7	21.23	20.92	21.37		
3	16QAM	15	0	21.24	21.00	21.35		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.72	22.37	22.06	23.50	0
1.4	QPSK	1	3	22.71	22.48	22.75		
1.4	QPSK	1	5	22.62	22.39	22.77		
1.4	QPSK	3	0	22.69	22.42	22.81		
1.4	QPSK	3	1	22.70	22.46	22.60		
1.4	QPSK	3	3	22.71	22.46	22.61		
1.4	QPSK	6	0	22.20	21.93	22.32	23.00	0.5
1.4	16QAM	1	0	22.50	22.23	22.60	23.00	0.5
1.4	16QAM	1	3	22.52	22.32	22.63		
1.4	16QAM	1	5	22.43	22.24	22.60		
1.4	16QAM	3	0	22.23	21.95	22.36		
1.4	16QAM	3	1	22.24	21.97	22.39		
1.4	16QAM	3	3	22.25	21.96	22.39		
1.4	16QAM	6	0	21.23	20.99	21.38	22.00	1.5



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.00	22.95	22.87	23.50	0
10	QPSK	1	25	23.28	23.05	22.88		
10	QPSK	1	49	22.86	22.75	22.60		
10	QPSK	25	0	22.14	22.07	21.72	23.00	0.5
10	QPSK	25	12	22.25	22.15	21.84		
10	QPSK	25	25	22.10	22.12	21.67		
10	QPSK	50	0	22.16	22.11	21.86	23.00	0.5
10	16QAM	1	0	22.09	22.02	21.77		
10	16QAM	1	25	22.17	22.15	21.99		
10	16QAM	1	49	22.01	21.66	21.59	22.00	1.5
10	16QAM	25	0	21.15	21.15	20.69		
10	16QAM	25	12	21.19	21.27	20.79		
10	16QAM	25	25	21.10	21.10	20.59	22.00	1.5
10	16QAM	50	0	21.12	21.05	20.70		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.78	22.83	22.80	23.50	0
5	QPSK	1	12	23.21	23.20	22.72		
5	QPSK	1	24	23.20	23.20	22.75		
5	QPSK	12	0	22.30	22.28	21.82	23.00	0.5
5	QPSK	12	7	22.28	22.29	21.81		
5	QPSK	12	13	22.25	22.25	21.79		
5	QPSK	25	0	22.30	22.28	21.82	23.00	0.5
5	16QAM	1	0	22.52	22.53	22.03		
5	16QAM	1	12	22.31	22.38	21.87		
5	16QAM	1	24	22.42	22.45	21.97	22.00	1.5
5	16QAM	12	0	21.28	21.35	20.88		
5	16QAM	12	7	21.27	21.30	20.88		
5	16QAM	12	13	21.28	21.29	20.86	22.00	1.5
5	16QAM	25	0	21.24	21.25	20.86		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.85	22.94	22.66	23.50	0
3	QPSK	1	8	23.24	23.21	22.79		
3	QPSK	1	14	23.21	23.15	22.72		
3	QPSK	8	0	22.28	22.24	21.79	23.00	0.5
3	QPSK	8	4	22.27	22.27	21.81		
3	QPSK	8	7	22.28	22.24	21.80		
3	QPSK	15	0	22.26	22.24	21.81		
3	16QAM	1	0	22.42	22.41	22.02	23.00	0.5
3	16QAM	1	8	22.48	22.47	22.02		
3	16QAM	1	14	22.43	22.42	21.91		
3	16QAM	8	0	21.33	21.33	20.88	22.00	1.5
3	16QAM	8	4	21.34	21.37	20.85		
3	16QAM	8	7	21.31	21.36	20.85		
3	16QAM	15	0	21.25	21.24	20.81		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.19	23.18	22.93	23.50	0
1.4	QPSK	1	3	23.14	23.23	22.78		
1.4	QPSK	1	5	23.10	23.19	22.72		
1.4	QPSK	3	0	23.19	23.21	22.71		
1.4	QPSK	3	1	23.11	23.21	22.74		
1.4	QPSK	3	3	23.23	23.21	22.72	23.00	0.5
1.4	QPSK	6	0	22.22	22.25	21.81		
1.4	16QAM	1	0	22.47	22.38	21.97	23.00	0.5
1.4	16QAM	1	3	22.50	22.51	22.04		
1.4	16QAM	1	5	22.40	22.45	21.93		
1.4	16QAM	3	0	22.22	22.22	21.79		
1.4	16QAM	3	1	22.28	22.32	21.87		
1.4	16QAM	3	3	22.15	22.26	21.76		
1.4	16QAM	6	0	21.09	21.30	20.83	22.00	1.5



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.91	22.80	22.73	23.50	0
20	QPSK	1	49	22.59	22.65	22.67		
20	QPSK	1	99	22.69	22.49	22.54		
20	QPSK	50	0	21.78	21.67	21.59	23.00	0.5
20	QPSK	50	24	21.63	21.58	21.62		
20	QPSK	50	50	21.70	21.46	21.61		
20	QPSK	100	0	21.67	21.45	21.42	23.00	0.5
20	16QAM	1	0	21.96	21.78	22.01		
20	16QAM	1	49	21.85	21.76	21.92		
20	16QAM	1	99	21.94	21.69	21.97	22.00	1.5
20	16QAM	50	0	20.67	20.65	20.69		
20	16QAM	50	24	20.60	20.79	20.73		
20	16QAM	50	50	20.74	20.74	20.85		
20	16QAM	100	0	20.67	20.45	20.73		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.86	22.60	22.69	23.50	0
15	QPSK	1	37	22.57	22.46	22.67		
15	QPSK	1	74	22.78	22.76	22.90		
15	QPSK	36	0	21.90	21.75	21.92	23.00	0.5
15	QPSK	36	20	21.76	21.62	21.86		
15	QPSK	36	39	21.68	21.72	21.84		
15	QPSK	75	0	21.78	21.72	21.91	23.00	0.5
15	16QAM	1	0	22.28	22.27	22.36		
15	16QAM	1	37	21.82	21.74	21.91		
15	16QAM	1	74	22.08	22.05	22.14	22.00	1.5
15	16QAM	36	0	20.88	20.77	20.93		
15	16QAM	36	20	20.77	20.66	20.82		
15	16QAM	36	39	20.64	20.70	20.79		
15	16QAM	75	0	20.82	20.76	20.92		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.83	22.76	22.89	23.50	0
10	QPSK	1	25	23.05	22.90	22.98		
10	QPSK	1	49	22.65	22.54	22.61		
10	QPSK	25	0	22.04	21.93	21.94	23.00	0.5
10	QPSK	25	12	22.10	22.00	22.10		
10	QPSK	25	25	21.98	21.85	21.95		
10	QPSK	50	0	21.99	21.93	21.97		
10	16QAM	1	0	21.95	21.91	22.03	23.00	0.5
10	16QAM	1	25	22.25	22.16	22.30		
10	16QAM	1	49	21.88	21.79	21.88		
10	16QAM	25	0	21.09	20.97	20.95	22.00	1.5
10	16QAM	25	12	21.16	20.99	21.08		
10	16QAM	25	25	20.98	20.82	20.99		
10	16QAM	50	0	21.07	20.88	20.95		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.92	22.86	22.91	23.50	0
5	QPSK	1	12	22.90	22.95	23.02		
5	QPSK	1	24	22.69	22.99	23.04		
5	QPSK	12	0	22.15	22.05	22.09	23.00	0.5
5	QPSK	12	7	22.10	22.03	22.12		
5	QPSK	12	13	22.12	21.98	22.08		
5	QPSK	25	0	22.12	22.02	22.09		
5	16QAM	1	0	22.28	22.22	22.35	23.00	0.5
5	16QAM	1	12	22.24	22.17	22.25		
5	16QAM	1	24	22.24	22.22	22.22		
5	16QAM	12	0	21.13	21.06	21.12	22.00	1.5
5	16QAM	12	7	21.17	21.05	21.14		
5	16QAM	12	13	21.12	21.00	21.11		
5	16QAM	25	0	21.11	21.02	21.10		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.01	22.98	22.75	23.50	0
15	QPSK	1	37	23.24	23.01	22.80		
15	QPSK	1	74	22.94	23.00	22.62		
15	QPSK	36	0	22.14	22.18	21.79	23.00	0.5
15	QPSK	36	20	22.12	22.01	21.70		
15	QPSK	36	39	21.79	22.07	21.54		
15	QPSK	75	0	22.12	21.98	21.86	23.00	0.5
15	16QAM	1	0	22.43	22.58	22.08		
15	16QAM	1	37	22.27	22.45	21.82		
15	16QAM	1	74	22.22	22.36	21.92	22.00	1.5
15	16QAM	36	0	21.19	21.45	20.99		
15	16QAM	36	20	21.09	21.13	20.72		
15	16QAM	36	39	20.96	21.20	20.65	22.00	1.5
15	16QAM	75	0	21.08	20.78	20.79		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.98	22.91	22.84	23.50	0
10	QPSK	1	25	23.01	23.00	22.67		
10	QPSK	1	49	22.58	22.98	22.67		
10	QPSK	25	0	22.01	22.09	21.64	23.00	0.5
10	QPSK	25	12	22.09	22.18	21.74		
10	QPSK	25	25	21.91	21.78	21.60		
10	QPSK	50	0	21.97	22.01	21.62	23.00	0.5
10	16QAM	1	0	21.90	22.03	21.75		
10	16QAM	1	25	22.19	22.15	21.96		
10	16QAM	1	49	21.84	21.83	22.78	22.00	1.5
10	16QAM	25	0	21.02	21.25	20.61		
10	16QAM	25	12	21.12	21.18	20.70		
10	16QAM	25	25	20.94	20.79	20.54	22.00	1.5
10	16QAM	50	0	20.97	20.79	20.58		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.78	23.07	22.58	23.50	0
5	QPSK	1	12	23.02	23.05	22.60		
5	QPSK	1	24	23.08	23.05	22.69		
5	QPSK	12	0	22.16	22.18	21.78	23.00	0.5
5	QPSK	12	7	22.15	22.15	21.75		
5	QPSK	12	13	22.12	22.11	21.72		
5	QPSK	25	0	22.15	22.13	21.75	23.00	0.5
5	16QAM	1	0	22.29	22.39	21.99		
5	16QAM	1	12	22.23	22.29	21.85		
5	16QAM	1	24	22.29	22.31	21.83	22.00	1.5
5	16QAM	12	0	21.16	21.24	20.81		
5	16QAM	12	7	21.17	21.22	20.81		
5	16QAM	12	13	21.16	21.20	20.78	22.00	1.5
5	16QAM	25	0	21.10	21.14	20.67		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.87	23.12	22.66	23.50	0
3	QPSK	1	8	23.07	23.10	22.67		
3	QPSK	1	14	22.97	23.02	22.62		
3	QPSK	8	0	22.09	22.12	21.72	23.00	0.5
3	QPSK	8	4	22.11	22.12	21.74		
3	QPSK	8	7	22.08	22.09	21.70		
3	QPSK	15	0	22.09	22.10	21.72	23.00	0.5
3	16QAM	1	0	22.31	22.35	21.87		
3	16QAM	1	8	22.30	22.30	21.92		
3	16QAM	1	14	22.24	22.26	21.84	22.00	1.5
3	16QAM	8	0	21.21	21.25	20.83		
3	16QAM	8	4	21.20	21.26	20.86		
3	16QAM	8	7	21.23	21.21	20.83	22.00	1.5
3	16QAM	15	0	21.13	21.12	20.70		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.78	22.77	22.43	23.50	0
1.4	QPSK	1	3	22.86	22.85	22.48		
1.4	QPSK	1	5	22.83	22.76	22.41		
1.4	QPSK	3	0	22.80	22.83	22.49		
1.4	QPSK	3	1	22.82	22.85	22.46		
1.4	QPSK	3	3	22.76	22.78	22.37		
1.4	QPSK	6	0	22.22	22.33	22.00	23.00	0.5
1.4	16QAM	1	0	22.70	22.65	22.31	23.00	0.5
1.4	16QAM	1	3	22.70	22.70	22.37		
1.4	16QAM	1	5	22.62	22.62	22.31		
1.4	16QAM	3	0	22.21	22.34	22.07		
1.4	16QAM	3	1	22.28	22.45	22.14		
1.4	16QAM	3	3	22.24	22.30	21.98		
1.4	16QAM	6	0	21.40	21.38	20.94	22.00	1.5



<Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	16.00	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.65	15.60	15.45	16.00	0
20	QPSK	1	49	15.35	15.64	15.30		
20	QPSK	1	99	15.40	15.62	15.42		
20	QPSK	50	0	15.72	15.71	15.70	16.00	0
20	QPSK	50	24	15.40	15.68	15.65		
20	QPSK	50	50	15.39	15.71	15.66		
20	QPSK	100	0	15.70	15.66	15.65	16.00	0
20	16QAM	1	0	15.66	15.67	15.69		
20	16QAM	1	49	15.38	15.39	15.38		
20	16QAM	1	99	15.40	15.46	15.55	16.00	0
20	16QAM	50	0	15.12	15.21	15.30		
20	16QAM	50	24	15.13	15.15	15.20		
20	16QAM	50	50	15.14	15.21	15.25	16.00	0
20	16QAM	100	0	15.19	15.23	15.23		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.44	15.64	15.45	16.00	0
15	QPSK	1	37	15.50	15.50	15.05		
15	QPSK	1	74	15.27	15.34	15.43		
15	QPSK	36	0	15.49	15.47	15.56	16.00	0
15	QPSK	36	20	15.23	15.26	15.32		
15	QPSK	36	39	15.17	15.28	15.25		
15	QPSK	75	0	15.33	15.39	15.47	16.00	0
15	16QAM	1	0	15.93	15.98	15.98		
15	16QAM	1	37	15.36	15.33	15.45		
15	16QAM	1	74	15.65	15.74	15.75	16.00	0
15	16QAM	36	0	15.55	15.54	15.58		
15	16QAM	36	20	15.21	15.25	15.31		
15	16QAM	36	39	15.19	15.27	15.25	16.00	0
15	16QAM	75	0	15.32	15.38	15.55		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	14.89	14.65	14.64	16.00	0
10	QPSK	1	25	14.95	15.09	15.15		
10	QPSK	1	49	14.61	14.80	14.80		
10	QPSK	25	0	15.09	15.23	15.35	16.00	0
10	QPSK	25	12	15.09	15.28	15.31		
10	QPSK	25	25	14.94	15.03	15.16		
10	QPSK	50	0	15.00	15.15	15.23	16.00	0
10	16QAM	1	0	15.31	15.44	15.44		
10	16QAM	1	25	15.34	15.48	15.55		
10	16QAM	1	49	14.93	15.13	15.10	16.00	0
10	16QAM	25	0	15.07	15.20	15.28		
10	16QAM	25	12	15.08	15.24	15.30		
10	16QAM	25	25	14.92	15.02	15.18	16.00	0
10	16QAM	50	0	15.00	15.14	15.21		
Channel				18625	18900	19175		
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.01	15.20	15.10	16.00	0
5	QPSK	1	12	15.20	15.08	15.15		
5	QPSK	1	24	15.00	15.08	15.20		
5	QPSK	12	0	15.21	15.32	15.31	16.00	0
5	QPSK	12	7	15.15	15.29	15.28		
5	QPSK	12	13	15.08	15.20	15.26		
5	QPSK	25	0	15.12	15.26	15.32	16.00	0
5	16QAM	1	0	15.39	15.59	15.61		
5	16QAM	1	12	15.26	15.44	15.44		
5	16QAM	1	24	15.26	15.37	15.45	16.00	0
5	16QAM	12	0	15.19	15.34	15.36		
5	16QAM	12	7	15.17	15.31	15.34		
5	16QAM	12	13	15.11	15.27	15.32	16.00	0
5	16QAM	25	0	15.08	15.22	15.27		
Channel				18615	18900	19185		
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.04	15.20	15.20	16.00	0
3	QPSK	1	8	15.01	15.16	15.19		
3	QPSK	1	14	15.03	15.05	15.12		
3	QPSK	8	0	15.04	15.23	15.25	16.00	0
3	QPSK	8	4	15.09	15.23	15.28		
3	QPSK	8	7	15.02	15.19	15.23		
3	QPSK	15	0	15.03	15.25	15.27	16.00	0
3	16QAM	1	0	15.33	15.39	15.43		
3	16QAM	1	8	15.34	15.31	15.43		
3	16QAM	1	14	15.25	15.23	15.35	16.00	0
3	16QAM	8	0	15.26	15.33	15.38		
3	16QAM	8	4	15.21	15.34	15.36		
3	16QAM	8	7	15.18	15.30	15.33	16.00	0
3	16QAM	15	0	15.09	15.25	15.29		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	14.79	14.68	14.60	16.00	0
1.4	QPSK	1	3	14.90	15.07	15.12		
1.4	QPSK	1	5	14.55	14.99	15.08		
1.4	QPSK	3	0	15.00	15.10	15.11		
1.4	QPSK	3	1	15.04	15.15	15.21		
1.4	QPSK	3	3	14.99	15.08	15.11		
1.4	QPSK	6	0	15.10	15.15	15.23	16.00	0
1.4	16QAM	1	0	15.23	15.31	15.39	16.00	0
1.4	16QAM	1	3	15.25	15.39	15.37		
1.4	16QAM	1	5	15.16	15.26	15.27		
1.4	16QAM	3	0	14.97	15.19	15.29		
1.4	16QAM	3	1	15.03	15.26	15.31		
1.4	16QAM	3	3	14.97	15.18	15.25		
1.4	16QAM	6	0	15.04	15.22	15.25	16.00	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.65	15.50	15.50	16.50	0
20	QPSK	1	49	15.49	15.29	15.67		
20	QPSK	1	99	15.92	15.75	15.81		
20	QPSK	50	0	15.28	15.01	15.50	16.50	0
20	QPSK	50	24	15.41	15.18	15.54		
20	QPSK	50	50	15.51	15.45	15.65		
20	QPSK	100	0	15.42	15.32	15.56	16.50	0
20	16QAM	1	0	15.58	15.78	15.74		
20	16QAM	1	49	15.72	15.45	15.90		
20	16QAM	1	99	16.22	16.01	16.13	16.50	0
20	16QAM	50	0	15.28	15.50	15.42		
20	16QAM	50	24	15.44	15.11	15.50		
20	16QAM	50	50	15.50	15.26	15.60	16.50	0
20	16QAM	100	0	15.42	15.06	15.63		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.52	15.38	15.88	16.50	0
15	QPSK	1	37	15.17	15.05	15.57		
15	QPSK	1	74	15.89	15.67	15.96		
15	QPSK	36	0	15.60	15.44	15.90	16.50	0
15	QPSK	36	20	15.41	15.27	15.74		
15	QPSK	36	39	15.61	15.27	15.75		
15	QPSK	75	0	15.53	15.36	15.89	16.50	0
15	16QAM	1	0	16.12	16.19	16.20		
15	16QAM	1	37	15.53	15.40	15.85		
15	16QAM	1	74	16.21	16.19	16.15	16.50	0
15	16QAM	36	0	15.63	15.43	15.90		
15	16QAM	36	20	15.43	15.25	15.81		
15	16QAM	36	39	15.57	15.32	15.75	16.50	0
15	16QAM	75	0	15.51	15.36	15.87		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	15.70	15.45	15.22	16.50	0
10	QPSK	1	25	15.27	15.24	15.58		
10	QPSK	1	49	15.15	15.06	15.29		
10	QPSK	25	0	15.34	15.31	15.73	16.50	0
10	QPSK	25	12	15.44	15.38	15.71		
10	QPSK	25	25	15.40	15.27	15.58		
10	QPSK	50	0	15.34	15.27	15.65		
10	16QAM	1	0	15.59	15.47	16.02	16.50	0
10	16QAM	1	25	15.73	15.71	16.03		
10	16QAM	1	49	15.51	15.40	15.65		
10	16QAM	25	0	15.31	15.31	15.69	16.50	0
10	16QAM	25	12	15.36	15.32	15.61		
10	16QAM	25	25	15.32	15.25	15.49		
10	16QAM	50	0	15.37	15.27	15.60		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	15.23	15.50	15.30	16.50	0
5	QPSK	1	12	15.16	15.21	15.58		
5	QPSK	1	24	15.32	15.30	15.64		
5	QPSK	12	0	15.30	15.32	15.74	16.50	0
5	QPSK	12	7	15.32	15.32	15.73		
5	QPSK	12	13	15.29	15.29	15.70		
5	QPSK	25	0	15.28	15.34	15.71		
5	16QAM	1	0	15.67	15.54	16.04	16.50	0
5	16QAM	1	12	15.50	15.55	15.91		
5	16QAM	1	24	15.58	15.65	15.90		
5	16QAM	12	0	15.35	15.39	15.82	16.50	0
5	16QAM	12	7	15.38	15.37	15.81		
5	16QAM	12	13	15.30	15.39	15.75		
5	16QAM	25	0	15.24	15.27	15.67		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.49	15.15	15.20	16.50	0
3	QPSK	1	8	15.16	15.25	15.20		
3	QPSK	1	14	15.32	15.30	15.64		
3	QPSK	8	0	15.30	15.23	15.50	16.50	0
3	QPSK	8	4	15.23	15.32	15.73		
3	QPSK	8	7	15.29	15.29	15.49		
3	QPSK	15	0	15.26	15.34	15.71		
3	16QAM	1	0	15.67	16.00	15.95	16.50	0
3	16QAM	1	8	15.56	15.55	15.91		
3	16QAM	1	14	15.50	15.50	15.90		
3	16QAM	8	0	15.23	15.39	15.82	16.50	0
3	16QAM	8	4	15.20	15.50	15.45		
3	16QAM	8	7	15.20	15.25	15.60		
3	16QAM	15	0	15.24	15.27	15.67		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	15.14	15.50	15.50	16.50	0
1.4	QPSK	1	3	15.20	15.45	15.58		
1.4	QPSK	1	5	15.20	15.67	15.76		
1.4	QPSK	3	0	15.10	15.32	15.74		
1.4	QPSK	3	1	15.32	15.29	15.49		
1.4	QPSK	3	3	15.29	15.29	15.70		
1.4	QPSK	6	0	15.23	15.65	15.71	16.50	0
1.4	16QAM	1	0	15.60	15.54	15.95	16.50	0
1.4	16QAM	1	3	15.50	15.49	15.91		
1.4	16QAM	1	5	15.58	15.65	15.46		
1.4	16QAM	3	0	15.35	15.45	15.82		
1.4	16QAM	3	1	15.38	15.37	15.50		
1.4	16QAM	3	3	15.15	15.36	15.65		
1.4	16QAM	6	0	15.24	15.27	15.67	16.50	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.71	18.59	18.60	19.00	0
20	QPSK	1	49	18.22	18.22	18.42		
20	QPSK	1	99	18.44	18.45	18.70		
20	QPSK	50	0	18.65	18.40	18.48	19.00	0
20	QPSK	50	24	18.40	18.38	18.54		
20	QPSK	50	50	18.47	18.50	18.62		
20	QPSK	100	0	18.64	18.48	18.63	19.00	0
20	16QAM	1	0	18.80	18.74	18.92		
20	16QAM	1	49	18.65	18.60	18.81		
20	16QAM	1	99	18.74	18.81	18.97	19.00	0
20	16QAM	50	0	18.48	18.42	18.52		
20	16QAM	50	24	18.39	18.41	18.54		
20	16QAM	50	50	18.49	18.50	18.67	19.00	0
20	16QAM	100	0	18.42	18.38	18.59		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.90	18.86	18.92	19.00	0
15	QPSK	1	37	18.33	18.23	18.53		
15	QPSK	1	74	18.61	18.59	18.79		
15	QPSK	36	0	18.72	18.59	18.81	19.00	0
15	QPSK	36	20	18.58	18.46	18.75		
15	QPSK	36	39	18.49	18.51	18.71		
15	QPSK	75	0	18.63	18.54	18.78	19.00	0
15	16QAM	1	0	18.58	18.86	18.90		
15	16QAM	1	37	18.71	18.67	18.87		
15	16QAM	1	74	18.87	18.89	18.50	19.00	0
15	16QAM	36	0	18.68	18.56	18.86		
15	16QAM	36	20	18.55	18.45	18.71		
15	16QAM	36	39	18.49	18.53	18.69	19.00	0
15	16QAM	75	0	18.66	18.54	18.81		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.30	18.28	18.60	19.00	0
10	QPSK	1	25	18.39	18.40	18.53		
10	QPSK	1	49	17.97	18.07	18.13		
10	QPSK	25	0	18.40	18.41	18.59	19.00	0
10	QPSK	25	12	18.52	18.47	18.63		
10	QPSK	25	25	18.38	18.32	18.51		
10	QPSK	50	0	18.42	18.36	18.53		
10	16QAM	1	0	18.50	18.55	18.57	19.00	0
10	16QAM	1	25	18.74	18.71	18.84		
10	16QAM	1	49	18.23	18.38	18.41		
10	16QAM	25	0	18.42	18.38	18.54	19.00	0
10	16QAM	25	12	18.51	18.50	18.60		
10	16QAM	25	25	18.37	18.34	18.47		
10	16QAM	50	0	18.38	18.39	18.49		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.28	18.50	18.42	19.00	0
5	QPSK	1	12	18.35	18.35	18.52		
5	QPSK	1	24	18.41	18.40	18.51		
5	QPSK	12	0	18.52	18.50	18.63	19.00	0
5	QPSK	12	7	18.46	18.47	18.61		
5	QPSK	12	13	18.46	18.46	18.60		
5	QPSK	25	0	18.47	18.52	18.65		
5	16QAM	1	0	18.77	18.71	18.85	19.00	0
5	16QAM	1	12	18.70	18.68	18.85		
5	16QAM	1	24	18.67	18.64	18.76		
5	16QAM	12	0	18.53	18.53	18.73	19.00	0
5	16QAM	12	7	18.52	18.53	18.68		
5	16QAM	12	13	18.53	18.54	18.65		
5	16QAM	25	0	18.46	18.48	18.60		



<Reduced Power Mode for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	14.50	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	13.98	13.65	13.86	14.50	0
20	QPSK	1	49	13.47	13.51	13.60		
20	QPSK	1	99	13.57	13.61	13.68		
20	QPSK	50	0	13.88	13.80	13.78	14.50	0
20	QPSK	50	24	13.56	13.62	13.70		
20	QPSK	50	50	13.54	13.72	13.68		
20	QPSK	100	0	13.85	13.66	13.83	14.50	0
20	16QAM	1	0	14.10	14.05	14.20		
20	16QAM	1	49	13.83	13.83	13.90		
20	16QAM	1	99	13.86	13.90	13.96	14.50	0
20	16QAM	50	0	13.58	13.60	13.78		
20	16QAM	50	24	13.56	13.60	13.69		
20	16QAM	50	50	13.55	13.73	13.75	14.50	0
20	16QAM	100	0	13.65	13.64	13.74		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	13.89	13.87	13.98	14.50	0
15	QPSK	1	37	13.38	13.38	13.54		
15	QPSK	1	74	13.74	13.86	13.85		
15	QPSK	36	0	13.95	13.94	14.04	14.50	0
15	QPSK	36	20	13.67	13.72	13.80		
15	QPSK	36	39	13.61	13.77	13.72		
15	QPSK	75	0	13.76	13.78	13.92	14.50	0
15	16QAM	1	0	14.15	14.20	14.45		
15	16QAM	1	37	13.80	13.83	13.90		
15	16QAM	1	74	14.09	14.24	14.21	14.50	0
15	16QAM	36	0	13.96	14.00	14.08		
15	16QAM	36	20	13.64	13.72	13.79		
15	16QAM	36	39	13.63	13.78	13.71	14.50	0
15	16QAM	75	0	13.80	13.82	14.01		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	13.20	13.10	13.17	14.50	0
10	QPSK	1	25	13.42	13.51	13.63		
10	QPSK	1	49	13.04	13.26	13.29		
10	QPSK	25	0	13.54	13.69	13.84	14.50	0
10	QPSK	25	12	13.53	13.70	13.82		
10	QPSK	25	25	13.40	13.48	13.65		
10	QPSK	50	0	13.44	13.59	13.67	14.50	0
10	16QAM	1	0	13.78	13.89	13.89		
10	16QAM	1	25	13.81	13.93	14.00		
10	16QAM	1	49	13.39	13.60	13.58	14.50	0
10	16QAM	25	0	13.56	13.65	13.77		
10	16QAM	25	12	13.56	13.65	13.77		
10	16QAM	25	25	13.36	13.48	13.58	14.50	0
10	16QAM	50	0	13.49	13.60	13.68		
Channel				18625	18900	19175		
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	13.04	13.12	13.24	14.50	0
5	QPSK	1	12	13.39	13.57	13.61		
5	QPSK	1	24	13.41	13.55	13.64		
5	QPSK	12	0	13.66	13.76	13.84	14.50	0
5	QPSK	12	7	13.58	13.70	13.81		
5	QPSK	12	13	13.54	13.67	13.73		
5	QPSK	25	0	13.59	13.69	13.80	14.50	0
5	16QAM	1	0	13.91	14.02	14.12		
5	16QAM	1	12	13.77	13.88	13.94		
5	16QAM	1	24	13.74	13.80	13.92	14.50	0
5	16QAM	12	0	13.66	13.80	13.90		
5	16QAM	12	7	13.63	13.79	13.83		
5	16QAM	12	13	13.60	13.69	13.83	14.50	0
5	16QAM	25	0	13.52	13.71	13.78		
Channel				18615	18900	19185		
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	13.42	13.06	13.10	14.50	0
3	QPSK	1	8	13.40	13.62	13.72		
3	QPSK	1	14	13.33	13.55	13.64		
3	QPSK	8	0	13.60	13.73	13.78	14.50	0
3	QPSK	8	4	13.58	13.69	13.80		
3	QPSK	8	7	13.51	13.67	13.75		
3	QPSK	15	0	13.56	13.72	13.78	14.50	0
3	16QAM	1	0	13.67	13.90	13.96		
3	16QAM	1	8	13.66	13.84	13.97		
3	16QAM	1	14	13.59	13.75	13.87	14.50	0
3	16QAM	8	0	13.67	13.81	13.87		
3	16QAM	8	4	13.65	13.78	13.85		
3	16QAM	8	7	13.63	13.80	13.86	14.50	0
3	16QAM	15	0	13.63	13.74	13.79		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	13.46	13.57	13.05	14.50	0
1.4	QPSK	1	3	13.50	13.56	13.68		
1.4	QPSK	1	5	13.43	13.54	13.58		
1.4	QPSK	3	0	13.52	13.60	13.69		
1.4	QPSK	3	1	13.56	13.62	13.70		
1.4	QPSK	3	3	13.50	13.59	13.69		
1.4	QPSK	6	0	13.59	13.65	13.72	14.50	0
1.4	16QAM	1	0	13.66	13.81	13.86	14.50	0
1.4	16QAM	1	3	13.75	13.78	13.89		
1.4	16QAM	1	5	13.64	13.76	13.83		
1.4	16QAM	3	0	13.56	13.71	13.77		
1.4	16QAM	3	1	13.60	13.74	13.82		
1.4	16QAM	3	3	13.56	13.66	13.71		
1.4	16QAM	6	0	13.66	13.73	13.78	14.50	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.21	15.00	14.95	16.00	0
20	QPSK	1	49	15.22	14.87	15.19		
20	QPSK	1	99	15.29	15.23	15.35		
20	QPSK	50	0	14.69	14.61	15.06	16.00	0
20	QPSK	50	24	14.81	14.72	15.07		
20	QPSK	50	50	14.84	15.10	15.12		
20	QPSK	100	0	14.78	14.94	15.13	16.00	0
20	16QAM	1	0	14.96	14.89	15.29		
20	16QAM	1	49	15.10	15.16	15.41		
20	16QAM	1	99	15.60	15.50	15.58	16.00	0
20	16QAM	50	0	14.67	14.62	15.01		
20	16QAM	50	24	14.84	14.74	15.06		
20	16QAM	50	50	14.87	14.89	15.13	16.00	0
20	16QAM	100	0	14.81	14.75	15.15		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	14.85	14.98	15.40	16.00	0
15	QPSK	1	37	14.57	14.65	15.03		
15	QPSK	1	74	15.23	15.25	15.40		
15	QPSK	36	0	15.01	15.06	15.38	16.00	0
15	QPSK	36	20	14.79	14.87	15.24		
15	QPSK	36	39	14.96	14.89	15.18		
15	QPSK	75	0	14.92	14.93	15.35	16.00	0
15	16QAM	1	0	15.78	15.78	15.80		
15	16QAM	1	37	15.01	14.98	15.41		
15	16QAM	1	74	15.69	15.73	15.78	16.00	0
15	16QAM	36	0	15.04	15.06	15.40		
15	16QAM	36	20	14.82	14.89	15.30		
15	16QAM	36	39	14.98	14.93	15.21	16.00	0
15	16QAM	75	0	14.97	14.95	15.34		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	14.22	14.37	14.73	16.00	0
10	QPSK	1	25	14.75	14.86	15.09		
10	QPSK	1	49	14.52	14.62	14.75		
10	QPSK	25	0	14.76	14.92	15.22	16.00	0
10	QPSK	25	12	14.84	14.96	15.25		
10	QPSK	25	25	14.75	14.84	15.07		
10	QPSK	50	0	14.77	14.88	15.11		
10	16QAM	1	0	15.00	15.07	15.52	16.00	0
10	16QAM	1	25	15.14	15.31	15.55		
10	16QAM	1	49	14.88	15.00	15.11		
10	16QAM	25	0	14.69	14.94	15.22	16.00	0
10	16QAM	25	12	14.81	14.92	15.17		
10	16QAM	25	25	14.76	14.84	15.01		
10	16QAM	50	0	14.75	14.88	15.13		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	14.38	14.52	14.86	16.00	0
5	QPSK	1	12	14.66	14.86	15.11		
5	QPSK	1	24	14.74	14.99	15.13		
5	QPSK	12	0	14.78	14.98	15.26	16.00	0
5	QPSK	12	7	14.75	14.94	15.22		
5	QPSK	12	13	14.69	14.91	15.19		
5	QPSK	25	0	14.77	14.98	15.24		
5	16QAM	1	0	15.04	15.23	15.64	16.00	0
5	16QAM	1	12	14.94	15.14	15.42		
5	16QAM	1	24	15.00	15.27	15.42		
5	16QAM	12	0	14.83	15.02	15.30	16.00	0
5	16QAM	12	7	14.84	15.06	15.25		
5	16QAM	12	13	14.81	15.03	15.22		
5	16QAM	25	0	14.72	14.93	15.16		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	14.62	14.37	14.79	16.00	0
3	QPSK	1	8	14.95	14.80	15.21		
3	QPSK	1	14	14.92	14.80	15.16		
3	QPSK	8	0	14.95	14.76	15.23	16.00	0
3	QPSK	8	4	14.90	14.82	15.23		
3	QPSK	8	7	14.79	14.83	15.19		
3	QPSK	15	0	14.90	14.84	15.22		
3	16QAM	1	0	14.65	15.00	15.42	16.00	0
3	16QAM	1	8	14.56	14.97	15.43		
3	16QAM	1	14	14.50	14.91	15.37		
3	16QAM	8	0	14.65	14.95	15.35	16.00	0
3	16QAM	8	4	14.50	14.97	15.33		
3	16QAM	8	7	14.50	14.90	15.28		
3	16QAM	15	0	14.60	14.83	15.20		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	14.40	14.23	14.68	16.00	0
1.4	QPSK	1	3	14.86	14.75	15.14		
1.4	QPSK	1	5	14.81	14.67	15.07		
1.4	QPSK	3	0	14.92	14.75	15.14		
1.4	QPSK	3	1	14.80	14.84	15.17		
1.4	QPSK	3	3	14.88	14.81	15.18		
1.4	QPSK	6	0	14.92	14.81	15.19	16.00	0
1.4	16QAM	1	0	14.56	14.93	15.37	16.00	0
1.4	16QAM	1	3	14.50	14.96	15.45		
1.4	16QAM	1	5	14.65	14.88	15.37		
1.4	16QAM	3	0	14.50	14.90	15.29		
1.4	16QAM	3	1	14.69	14.96	15.33		
1.4	16QAM	3	3	14.50	14.95	15.27		
1.4	16QAM	6	0	14.50	14.82	15.23	16.00	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.71	18.59	18.60	19.00	0
20	QPSK	1	49	18.22	18.22	18.42		
20	QPSK	1	99	18.44	18.45	18.70		
20	QPSK	50	0	18.65	18.40	18.48	19.00	0
20	QPSK	50	24	18.40	18.38	18.54		
20	QPSK	50	50	18.47	18.50	18.62		
20	QPSK	100	0	18.64	18.48	18.63	19.00	0
20	16QAM	1	0	18.80	18.74	18.92		
20	16QAM	1	49	18.65	18.60	18.81		
20	16QAM	1	99	18.74	18.81	18.97	19.00	0
20	16QAM	50	0	18.48	18.42	18.52		
20	16QAM	50	24	18.39	18.41	18.54		
20	16QAM	50	50	18.49	18.50	18.67	19.00	0
20	16QAM	100	0	18.42	18.38	18.59		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.90	18.86	18.92	19.00	0
15	QPSK	1	37	18.33	18.23	18.53		
15	QPSK	1	74	18.61	18.59	18.79		
15	QPSK	36	0	18.72	18.59	18.81	19.00	0
15	QPSK	36	20	18.58	18.46	18.75		
15	QPSK	36	39	18.49	18.51	18.71		
15	QPSK	75	0	18.63	18.54	18.78	19.00	0
15	16QAM	1	0	18.58	18.86	18.90		
15	16QAM	1	37	18.71	18.67	18.87		
15	16QAM	1	74	18.87	18.89	18.50	19.00	0
15	16QAM	36	0	18.68	18.56	18.86		
15	16QAM	36	20	18.55	18.45	18.71		
15	16QAM	36	39	18.49	18.53	18.69	19.00	0
15	16QAM	75	0	18.66	18.54	18.81		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.30	18.28	18.60	19.00	0
10	QPSK	1	25	18.39	18.40	18.53		
10	QPSK	1	49	17.97	18.07	18.13		
10	QPSK	25	0	18.40	18.41	18.59	19.00	0
10	QPSK	25	12	18.52	18.47	18.63		
10	QPSK	25	25	18.38	18.32	18.51		
10	QPSK	50	0	18.42	18.36	18.53		
10	16QAM	1	0	18.50	18.55	18.57	19.00	0
10	16QAM	1	25	18.74	18.71	18.84		
10	16QAM	1	49	18.23	18.38	18.41		
10	16QAM	25	0	18.42	18.38	18.54	19.00	0
10	16QAM	25	12	18.51	18.50	18.60		
10	16QAM	25	25	18.37	18.34	18.47		
10	16QAM	50	0	18.38	18.39	18.49		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.28	18.50	18.42	19.00	0
5	QPSK	1	12	18.35	18.35	18.52		
5	QPSK	1	24	18.41	18.40	18.51		
5	QPSK	12	0	18.52	18.50	18.63	19.00	0
5	QPSK	12	7	18.46	18.47	18.61		
5	QPSK	12	13	18.46	18.46	18.60		
5	QPSK	25	0	18.47	18.52	18.65		
5	16QAM	1	0	18.77	18.71	18.85	19.00	0
5	16QAM	1	12	18.70	18.68	18.85		
5	16QAM	1	24	18.67	18.64	18.76		
5	16QAM	12	0	18.53	18.53	18.73	19.00	0
5	16QAM	12	7	18.52	18.53	18.68		
5	16QAM	12	13	18.53	18.54	18.65		
5	16QAM	25	0	18.46	18.48	18.60		



<Reduced Power Mode for Handheld>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.09	18.70	18.72	20.00	0
20	QPSK	1	49	18.96	19.00	19.02		
20	QPSK	1	99	18.97	19.00	19.02		
20	QPSK	50	0	19.07	19.06	19.00	20.00	0
20	QPSK	50	24	18.93	18.95	18.99		
20	QPSK	50	50	18.92	19.02	19.00		
20	QPSK	100	0	19.10	19.01	19.05	20.00	0
20	16QAM	1	0	19.48	19.51	19.53		
20	16QAM	1	49	19.12	19.24	19.23		
20	16QAM	1	99	19.26	19.30	19.30	20.00	0
20	16QAM	50	0	18.93	18.96	19.04		
20	16QAM	50	24	18.89	18.96	18.97		
20	16QAM	50	50	18.91	19.00	19.06		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	19.24	19.13	19.22	20.00	0
15	QPSK	1	37	18.76	18.79	18.84		
15	QPSK	1	74	19.08	19.15	19.19		
15	QPSK	36	0	19.28	19.30	19.35	20.00	0
15	QPSK	36	20	19.03	19.07	19.08		
15	QPSK	36	39	18.98	19.06	18.99		
15	QPSK	75	0	19.15	19.17	19.23	20.00	0
15	16QAM	1	0	19.45	19.50	19.57		
15	16QAM	1	37	19.11	19.12	19.14		
15	16QAM	1	74	19.48	19.56	19.56	20.00	0
15	16QAM	36	0	19.32	19.36	19.36		
15	16QAM	36	20	19.02	19.07	19.11		
15	16QAM	36	39	18.98	19.12	19.05		
15	16QAM	75	0	19.13	19.16	19.31		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.24	18.32	18.39	20.00	0
10	QPSK	1	25	18.76	18.91	18.88		
10	QPSK	1	49	18.38	18.56	18.59		
10	QPSK	25	0	18.87	19.04	19.11	20.00	0
10	QPSK	25	12	18.91	19.03	19.07		
10	QPSK	25	25	18.74	18.85	18.90		
10	QPSK	50	0	18.76	18.96	18.99		
10	16QAM	1	0	19.12	19.23	19.22	20.00	0
10	16QAM	1	25	19.14	19.31	19.28		
10	16QAM	1	49	18.71	18.89	18.89		
10	16QAM	25	0	18.87	19.02	19.05	20.00	0
10	16QAM	25	12	18.85	19.00	19.01		
10	16QAM	25	25	18.69	18.79	18.87		
10	16QAM	50	0	18.79	18.92	18.95		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.27	18.46	18.51	20.00	0
5	QPSK	1	12	18.68	18.89	18.88		
5	QPSK	1	24	18.76	18.89	18.96		
5	QPSK	12	0	18.96	19.08	19.09	20.00	0
5	QPSK	12	7	18.91	19.03	19.04		
5	QPSK	12	13	18.87	19.01	19.02		
5	QPSK	25	0	18.93	19.04	19.08		
5	16QAM	1	0	19.16	19.32	19.34	20.00	0
5	16QAM	1	12	19.03	19.17	19.18		
5	16QAM	1	24	19.03	19.19	19.19		
5	16QAM	12	0	18.99	19.14	19.15	20.00	0
5	16QAM	12	7	18.99	19.11	19.12		
5	16QAM	12	13	18.92	19.09	19.12		
5	16QAM	25	0	18.86	19.01	19.08		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.25	18.30	18.36	20.00	0
3	QPSK	1	8	18.20	18.25	18.29		
3	QPSK	1	14	18.61	18.51	18.43		
3	QPSK	8	0	18.91	18.13	18.18	20.00	0
3	QPSK	8	4	18.87	18.45	19.06		
3	QPSK	8	7	18.81	19.01	18.99		
3	QPSK	15	0	18.85	19.00	19.05		
3	16QAM	1	0	18.97	19.11	19.19	20.00	0
3	16QAM	1	8	18.93	19.10	19.12		
3	16QAM	1	14	18.84	19.00	19.09		
3	16QAM	8	0	18.95	19.13	19.09	20.00	0
3	16QAM	8	4	19.01	19.08	19.08		
3	16QAM	8	7	18.90	19.05	19.06		
3	16QAM	15	0	18.91	19.03	19.03		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.45	18.88	18.25	20.00	0
1.4	QPSK	1	3	18.44	18.90	18.93		
1.4	QPSK	1	5	18.36	18.82	18.80		
1.4	QPSK	3	0	18.50	18.95	18.89		
1.4	QPSK	3	1	18.54	18.99	18.98		
1.4	QPSK	3	3	18.49	18.92	18.89		
1.4	QPSK	6	0	18.55	19.00	19.01	20.00	0
1.4	16QAM	1	0	18.63	19.06	19.07	20.00	0
1.4	16QAM	1	3	18.71	19.10	19.13		
1.4	16QAM	1	5	18.57	19.02	19.11		
1.4	16QAM	3	0	18.62	19.04	19.06		
1.4	16QAM	3	1	18.66	19.08	19.12		
1.4	16QAM	3	3	18.57	19.03	19.02		
1.4	16QAM	6	0	18.58	19.02	19.03	20.00	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	20.00	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	18.76	18.45	18.08		
20	QPSK	1	49	18.61	18.30	18.74	20.00	0
20	QPSK	1	99	18.66	19.10	19.02		
20	QPSK	50	0	18.89	18.89	19.15		
20	QPSK	50	24	18.66	18.90	18.65	20.00	0
20	QPSK	50	50	18.68	19.20	18.60		
20	QPSK	100	0	18.50	18.95	18.55		
20	16QAM	1	0	18.51	18.65	18.70	20.00	0
20	16QAM	1	49	18.70	18.50	18.84		
20	16QAM	1	99	19.26	18.94	19.13		
20	16QAM	50	0	18.17	18.18	18.41	20.00	0
20	16QAM	50	24	18.38	18.05	18.45		
20	16QAM	50	50	18.49	18.24	18.55		
Channel				20025	20175	20325	20.00	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	18.48	18.34	18.87		
15	QPSK	1	37	18.11	18.08	18.52	20.00	0
15	QPSK	1	74	18.83	18.65	18.91		
15	QPSK	36	0	18.49	18.37	18.83		
15	QPSK	36	20	18.36	18.24	18.71	20.00	0
15	QPSK	36	39	18.51	18.23	18.70		
15	QPSK	75	0	18.48	18.30	18.80		
15	16QAM	1	0	19.28	19.16	19.45	20.00	0
15	16QAM	1	37	18.50	18.70	18.83		
15	16QAM	1	74	19.31	19.13	19.34		
15	16QAM	36	0	18.54	18.38	18.85	20.00	0
15	16QAM	36	20	18.35	18.24	18.75		
15	16QAM	36	39	18.54	18.30	18.71		
15	16QAM	75	0	18.48	18.34	18.82	20.00	0
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	18.20	18.50	18.20	20.00	0
10	QPSK	1	25	18.25	18.19	18.61		
10	QPSK	1	49	18.08	18.10	18.28		
10	QPSK	25	0	18.27	18.29	18.69	20.00	0
10	QPSK	25	12	18.36	18.32	18.69		
10	QPSK	25	25	18.35	18.25	18.52		
10	QPSK	50	0	18.28	18.20	18.59	20.00	0
10	16QAM	1	0	18.50	18.43	18.96		
10	16QAM	1	25	18.73	18.69	19.08		
10	16QAM	1	49	18.44	18.38	18.66	20.00	0
10	16QAM	25	0	18.25	18.23	18.67		
10	16QAM	25	12	18.32	18.29	18.66		
10	16QAM	25	25	18.28	18.15	18.50	20.00	0
10	16QAM	50	0	18.27	18.17	18.62		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	18.15	18.50	18.31	20.00	0
5	QPSK	1	12	18.09	18.14	18.52		
5	QPSK	1	24	18.24	18.32	18.62		
5	QPSK	12	0	18.25	18.25	18.74	20.00	0
5	QPSK	12	7	18.26	18.29	18.68		
5	QPSK	12	13	18.22	18.27	18.62		
5	QPSK	25	0	18.25	18.28	18.68		
5	16QAM	1	0	18.53	18.48	19.01	20.00	0
5	16QAM	1	12	18.43	18.41	18.81		
5	16QAM	1	24	18.52	18.53	18.82		
5	16QAM	12	0	18.33	18.34	18.78	20.00	0
5	16QAM	12	7	18.32	18.33	18.78		
5	16QAM	12	13	18.34	18.36	18.70		
5	16QAM	25	0	18.22	18.25	18.61		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	18.20	18.15	18.18	20.00	0
3	QPSK	1	8	18.23	18.27	18.68		
3	QPSK	1	14	18.19	18.25	18.58		
3	QPSK	8	0	18.21	18.24	18.70	20.00	0
3	QPSK	8	4	18.22	18.26	18.69		
3	QPSK	8	7	18.19	18.29	18.64		
3	QPSK	15	0	18.22	18.30	18.71		
3	16QAM	1	0	18.32	18.34	18.80	20.00	0
3	16QAM	1	8	18.40	18.36	18.83		
3	16QAM	1	14	18.37	18.34	18.78		
3	16QAM	8	0	18.42	18.39	18.84	20.00	0
3	16QAM	8	4	18.38	18.41	18.76		
3	16QAM	8	7	18.39	18.42	18.80		
3	16QAM	15	0	18.25	18.29	18.67		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	18.17	18.09	18.08	20.00	0
1.4	QPSK	1	3	18.13	18.24	18.66		
1.4	QPSK	1	5	18.07	18.16	18.49		
1.4	QPSK	3	0	18.20	18.21	18.67		
1.4	QPSK	3	1	18.26	18.28	18.69		
1.4	QPSK	3	3	18.16	18.29	18.65		
1.4	QPSK	6	0	18.22	18.29	18.66	20.00	0
1.4	16QAM	1	0	18.27	18.31	18.83	20.00	0
1.4	16QAM	1	3	18.27	18.35	18.88		
1.4	16QAM	1	5	18.27	18.31	18.78		
1.4	16QAM	3	0	18.34	18.41	18.78		
1.4	16QAM	3	1	18.39	18.51	18.89		
1.4	16QAM	3	3	18.34	18.41	18.78		
1.4	16QAM	6	0	18.23	18.28	18.67	20.00	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	19.50	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	19.20	18.86	19.11	19.50	0
20	QPSK	1	49	18.75	18.75	18.89		
20	QPSK	1	99	18.90	18.96	19.18		
20	QPSK	50	0	19.10	18.95	18.97	19.50	0
20	QPSK	50	24	18.85	18.87	19.05		
20	QPSK	50	50	18.95	18.97	19.05		
20	QPSK	100	0	19.12	18.94	19.10	19.50	0
20	16QAM	1	0	19.25	19.22	19.42		
20	16QAM	1	49	19.20	19.13	19.27		
20	16QAM	1	99	19.22	19.30	19.47	19.50	0
20	16QAM	50	0	18.91	18.91	19.01		
20	16QAM	50	24	18.86	18.89	19.04		
20	16QAM	50	50	18.95	19.00	19.17	19.50	0
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.04	19.27	19.20	19.50	0
15	QPSK	1	37	18.79	18.73	18.94		
15	QPSK	1	74	19.04	19.06	19.22		
15	QPSK	36	0	19.11	19.05	19.24	19.50	0
15	QPSK	36	20	18.96	18.93	19.14		
15	QPSK	36	39	18.92	18.98	19.11		
15	QPSK	75	0	19.09	18.99	19.24	19.50	0
15	16QAM	1	0	19.35	19.45	19.46		
15	16QAM	1	37	19.18	19.08	19.31		
15	16QAM	1	74	19.35	19.37	19.35	19.50	0
15	16QAM	36	0	19.16	19.06	19.31		
15	16QAM	36	20	19.01	18.94	19.17		
15	16QAM	36	39	18.97	19.01	19.11	19.50	0
15	16QAM	75	0	19.12	19.02	19.25		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.61	18.75	18.84	19.50	0
10	QPSK	1	25	18.84	18.89	19.00		
10	QPSK	1	49	18.44	18.51	18.63		
10	QPSK	25	0	18.87	18.82	19.04	19.50	0
10	QPSK	25	12	18.91	18.97	19.05		
10	QPSK	25	25	18.82	18.82	18.96		
10	QPSK	50	0	18.81	18.86	18.98		
10	16QAM	1	0	18.93	18.96	19.02	19.50	0
10	16QAM	1	25	19.14	19.23	19.31		
10	16QAM	1	49	18.69	18.83	18.90		
10	16QAM	25	0	18.87	18.85	19.03	19.50	0
10	16QAM	25	12	18.92	18.94	19.09		
10	16QAM	25	25	18.81	18.78	18.96		
10	16QAM	50	0	18.80	18.82	18.95		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.80	18.73	18.98	19.50	0
5	QPSK	1	12	18.82	18.84	18.95		
5	QPSK	1	24	18.82	18.84	19.00		
5	QPSK	12	0	18.98	18.95	19.13	19.50	0
5	QPSK	12	7	18.92	18.99	19.09		
5	QPSK	12	13	18.94	18.93	19.06		
5	QPSK	25	0	18.94	18.94	19.10		
5	16QAM	1	0	19.17	19.11	19.35	19.50	0
5	16QAM	1	12	19.09	19.10	19.25		
5	16QAM	1	24	19.11	19.09	19.32		
5	16QAM	12	0	19.01	19.00	19.14	19.50	0
5	16QAM	12	7	19.01	18.99	19.18		
5	16QAM	12	13	18.98	19.00	19.14		
5	16QAM	25	0	18.93	18.93	19.07		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

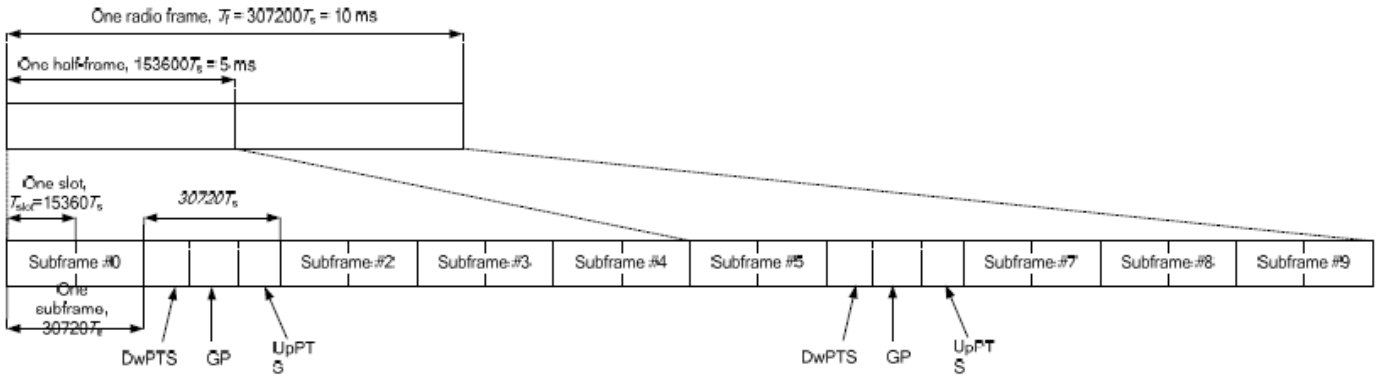


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$	-	-	-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.93	22.60	22.92	24.50	0
20	QPSK	1	49	22.77	22.68	22.51		
20	QPSK	1	99	22.88	22.74	22.68		
20	QPSK	50	0	21.92	21.80	21.65	23.50	1
20	QPSK	50	24	21.91	21.82	21.62		
20	QPSK	50	50	22.00	21.82	21.63		
20	QPSK	100	0	22.04	21.82	21.66	23.50	1
20	16QAM	1	0	22.22	22.13	22.09		
20	16QAM	1	49	22.09	21.97	21.82		
20	16QAM	1	99	22.17	21.99	21.93	22.50	2
20	16QAM	50	0	20.94	20.84	20.64		
20	16QAM	50	24	20.93	20.85	20.67		
20	16QAM	50	50	21.04	20.85	20.65	22.50	2
20	16QAM	100	0	21.05	20.84	20.69		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.81	22.69	22.59	24.50	0
15	QPSK	1	37	22.90	22.77	22.51		
15	QPSK	1	74	22.85	22.86	22.76		
15	QPSK	36	0	22.11	22.02	21.80	23.50	1
15	QPSK	36	20	22.02	21.84	21.57		
15	QPSK	36	39	21.89	21.76	21.64		
15	QPSK	75	0	22.09	21.89	21.68	23.50	1
15	16QAM	1	0	21.56	21.50	21.90		
15	16QAM	1	37	21.93	21.71	21.53		
15	16QAM	1	74	22.17	22.07	21.96	22.50	2
15	16QAM	36	0	21.13	21.07	20.83		
15	16QAM	36	20	20.97	20.82	20.62		
15	16QAM	36	39	20.86	20.74	20.63	22.50	2
15	16QAM	75	0	21.15	20.96	20.66		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.92	22.81	22.70	24.50	0
10	QPSK	1	25	22.80	22.57	22.56		
10	QPSK	1	49	22.60	22.50	22.58		
10	QPSK	25	0	21.81	21.68	21.58	23.50	1
10	QPSK	25	12	21.89	21.75	21.60		
10	QPSK	25	25	21.71	21.57	21.52		
10	QPSK	50	0	21.77	21.64	21.50	23.50	1
10	16QAM	1	0	21.90	21.79	21.66		
10	16QAM	1	25	22.08	21.94	21.75		
10	16QAM	1	49	21.69	21.50	21.52	22.50	2
10	16QAM	25	0	20.86	20.69	20.54		
10	16QAM	25	12	20.96	20.76	20.60		
10	16QAM	25	25	20.73	20.53	20.57	22.50	2
10	16QAM	50	0	20.83	20.64	20.50		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.86	22.95	22.86	24.50	0
5	QPSK	1	12	22.77	22.58	22.58		
5	QPSK	1	24	22.77	22.51	22.53		
5	QPSK	12	0	21.86	21.75	21.62	23.50	1
5	QPSK	12	7	21.90	21.72	21.58		
5	QPSK	12	13	21.87	21.72	21.58		
5	QPSK	25	0	21.88	21.69	21.55	23.50	1
5	16QAM	1	0	22.13	21.97	21.81		
5	16QAM	1	12	22.13	21.96	21.83		
5	16QAM	1	24	22.08	21.81	21.78	22.50	2
5	16QAM	12	0	20.94	20.79	20.68		
5	16QAM	12	7	20.93	20.80	20.65		
5	16QAM	12	13	20.92	20.78	20.62	22.50	2
5	16QAM	25	0	20.90	20.76	20.58		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	23.90	23.76	23.70	23.59	24.50	0
20	QPSK	1	49	23.68	23.70	23.63	23.27		
20	QPSK	1	99	23.78	23.96	23.74	23.34		
20	QPSK	50	0	21.60	21.66	21.58	21.51	23.50	1
20	QPSK	50	24	21.57	21.66	21.54	21.56		
20	QPSK	50	50	21.61	21.72	21.60	21.50		
20	16QAM	1	0	21.93	22.00	21.91	21.66	23.50	1
20	16QAM	1	49	21.80	21.80	21.73	21.51		
20	16QAM	1	99	21.88	21.89	21.80	21.57		
20	16QAM	50	0	20.65	20.73	20.62	20.60	22.50	2
20	16QAM	50	24	20.64	20.72	20.58	20.56		
20	16QAM	50	50	20.63	20.75	20.63	20.54		
20	16QAM	100	0	20.62	20.73	20.64	20.69		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	23.35	23.32	23.40	23.50	24.50	0
15	QPSK	1	37	23.90	23.75	23.70	23.40		
15	QPSK	1	74	23.90	23.94	23.84	23.58		
15	QPSK	36	0	21.78	21.82	21.68	21.55	23.50	1
15	QPSK	36	20	21.57	21.64	21.55	21.53		
15	QPSK	36	39	21.63	21.66	21.58	21.59		
15	QPSK	75	0	21.75	21.80	21.67	21.51		
15	16QAM	1	0	22.28	22.28	22.32	21.91	23.50	1
15	16QAM	1	37	21.54	21.59	21.60	21.86		
15	16QAM	1	74	21.97	22.00	21.94	21.61		
15	16QAM	36	0	20.79	20.84	20.74	20.54	22.50	2
15	16QAM	36	20	20.61	20.67	20.60	20.58		
15	16QAM	36	39	20.63	20.62	20.57	20.55		
15	16QAM	75	0	20.75	20.86	20.69	20.53		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	23.50	23.60	23.62	23.39	24.50	0
10	QPSK	1	25	23.66	23.94	23.77	23.48		
10	QPSK	1	49	23.30	23.47	23.32	23.50		
10	QPSK	25	0	21.56	21.59	21.59	21.58	23.50	1
10	QPSK	25	12	21.53	21.75	21.61	21.51		
10	QPSK	25	25	21.52	21.56	21.56	21.59		
10	QPSK	50	0	21.50	21.64	21.50	21.56		
10	16QAM	1	0	21.53	21.75	21.62	21.60	23.50	1
10	16QAM	1	25	21.76	21.95	21.85	21.57		
10	16QAM	1	49	21.56	21.59	21.70	21.60		
10	16QAM	25	0	20.59	20.68	20.64	20.56	22.50	2
10	16QAM	25	12	20.58	20.81	20.66	20.55		
10	16QAM	25	25	20.56	20.64	20.58	20.50		
10	16QAM	50	0	20.50	20.71	20.53	20.54		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	23.61	23.81	23.80	23.65	24.50	0
5	QPSK	1	12	23.62	23.78	23.67	23.35		
5	QPSK	1	24	23.63	23.78	23.67	23.40		
5	QPSK	12	0	21.53	21.72	21.60	21.55	23.50	1
5	QPSK	12	7	21.51	21.79	21.57	21.56		
5	QPSK	12	13	21.52	21.73	21.65	21.56		
5	QPSK	25	0	21.53	21.75	21.61	21.50		
5	16QAM	1	0	21.78	21.92	21.88	21.61	23.50	1
5	16QAM	1	12	21.71	21.98	21.82	21.60		
5	16QAM	1	24	21.69	21.90	21.81	21.58		
5	16QAM	12	0	20.64	20.77	20.75	20.50	22.50	2
5	16QAM	12	7	20.60	20.86	20.69	20.58		
5	16QAM	12	13	20.57	20.79	20.73	20.55		
5	16QAM	25	0	20.57	20.82	20.65	20.50		



<Reduced Power Mode for P-Sensor On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.73	20.59	20.56	21.00	0
20	QPSK	1	49	20.04	19.97	19.84		
20	QPSK	1	99	20.11	20.01	19.90		
20	QPSK	50	0	20.18	20.02	19.89	21.00	0
20	QPSK	50	24	20.12	20.05	19.93		
20	QPSK	50	50	20.29	20.06	19.92		
20	QPSK	100	0	20.24	20.10	19.93		
20	16QAM	1	0	20.79	20.72	20.74	21.00	0
20	16QAM	1	49	20.67	20.57	20.42		
20	16QAM	1	99	20.72	20.63	20.59		
20	16QAM	50	0	20.23	20.12	19.96	21.00	0
20	16QAM	50	24	20.17	20.15	19.98		
20	16QAM	50	50	20.32	20.11	19.95		
20	16QAM	100	0	20.24	20.03	19.93		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	19.90	20.12	20.19	21.00	0
15	QPSK	1	37	19.56	20.01	19.95		
15	QPSK	1	74	20.12	19.76	19.47		
15	QPSK	36	0	20.32	20.31	20.09	21.00	0
15	QPSK	36	20	20.22	20.09	19.93		
15	QPSK	36	39	20.12	20.04	19.94		
15	QPSK	75	0	20.28	20.17	19.94		
15	16QAM	1	0	20.78	20.80	20.65	21.00	0
15	16QAM	1	37	20.53	20.38	20.21		
15	16QAM	1	74	20.78	20.68	20.67		
15	16QAM	36	0	20.44	20.36	20.21	21.00	0
15	16QAM	36	20	20.30	20.21	19.98		
15	16QAM	36	39	20.23	20.17	20.01		
15	16QAM	75	0	20.32	20.22	19.98		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.22	20.13	20.07	21.00	0
10	QPSK	1	25	20.05	19.93	19.81		
10	QPSK	1	49	19.64	19.44	19.43		
10	QPSK	25	0	20.01	19.93	19.81	21.00	0
10	QPSK	25	12	20.08	19.97	19.87		
10	QPSK	25	25	19.89	19.71	19.73		
10	QPSK	50	0	20.04	19.87	19.81		
10	16QAM	1	0	20.53	20.42	20.40	21.00	0
10	16QAM	1	25	20.71	20.62	20.51		
10	16QAM	1	49	20.33	20.17	20.12		
10	16QAM	25	0	20.15	19.96	19.87	21.00	0
10	16QAM	25	12	20.19	20.06	19.97		
10	16QAM	25	25	20.04	19.81	19.84		
10	16QAM	50	0	20.04	19.94	19.85		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.32	20.23	20.24	21.00	0
5	QPSK	1	12	20.05	19.76	19.69		
5	QPSK	1	24	20.06	19.81	19.88		
5	QPSK	12	0	20.15	19.98	19.92	21.00	0
5	QPSK	12	7	20.15	20.00	19.91		
5	QPSK	12	13	20.11	20.00	19.92		
5	QPSK	25	0	20.11	19.95	19.89		
5	16QAM	1	0	20.74	20.62	20.56	21.00	0
5	16QAM	1	12	20.75	20.63	20.55		
5	16QAM	1	24	20.69	20.47	20.54		
5	16QAM	12	0	20.11	19.99	19.89	21.00	0
5	16QAM	12	7	20.11	19.94	19.86		
5	16QAM	12	13	20.10	19.96	19.91		
5	16QAM	25	0	20.19	20.04	19.97		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	20.50	20.49	20.39	20.19	21.00	0
20	QPSK	1	49	20.34	20.43	20.36	20.12		
20	QPSK	1	99	20.45	20.70	20.56	20.36		
20	QPSK	50	0	20.37	20.52	20.42	20.23	21.00	0
20	QPSK	50	24	20.39	20.53	20.47	20.27		
20	QPSK	50	50	20.41	20.60	20.54	20.33		
20	QPSK	100	0	20.39	20.55	20.46	20.14		
20	16QAM	1	0	20.97	20.94	20.95	20.79	21.00	0
20	16QAM	1	49	20.87	20.94	20.89	20.68		
20	16QAM	1	99	20.98	20.89	20.96	20.68		
20	16QAM	50	0	20.38	20.48	20.43	20.20	21.00	0
20	16QAM	50	24	20.37	20.47	20.40	20.20		
20	16QAM	50	50	20.38	20.54	20.48	20.22		
20	16QAM	100	0	20.33	20.41	20.37	20.06		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	19.78	19.81	19.95	19.84	21.00	0
15	QPSK	1	37	20.12	20.13	19.98	20.20		
15	QPSK	1	74	19.90	20.16	19.99	19.77		
15	QPSK	36	0	20.46	20.54	20.50	20.31	21.00	0
15	QPSK	36	20	20.29	20.44	20.38	20.12		
15	QPSK	36	39	20.36	20.42	20.37	20.14		
15	QPSK	75	0	20.48	20.49	20.45	20.25		
15	16QAM	1	0	20.86	20.70	20.89	20.80	21.00	0
15	16QAM	1	37	20.86	20.74	20.63	20.43		
15	16QAM	1	74	20.89	20.89	20.98	20.82		
15	16QAM	36	0	20.54	20.63	20.57	20.36	21.00	0
15	16QAM	36	20	20.37	20.57	20.44	20.27		
15	16QAM	36	39	20.48	20.53	20.49	20.25		
15	16QAM	75	0	20.52	20.57	20.43	20.23		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.16	20.30	20.32	19.96	21.00	0
10	QPSK	1	25	20.15	20.40	20.34	20.15		
10	QPSK	1	49	19.77	20.08	19.97	19.75		
10	QPSK	25	0	20.18	20.36	20.42	20.12	21.00	0
10	QPSK	25	12	20.27	20.50	20.38	20.20		
10	QPSK	25	25	20.14	20.33	20.23	20.04		
10	QPSK	50	0	20.16	20.44	20.29	20.08	21.00	0
10	16QAM	1	0	20.58	20.86	20.79	20.61		
10	16QAM	1	25	20.86	20.98	21.00	20.80		
10	16QAM	1	49	20.47	20.71	20.63	20.37	21.00	0
10	16QAM	25	0	20.23	20.46	20.44	20.21		
10	16QAM	25	12	20.33	20.57	20.50	20.26		
10	16QAM	25	25	20.24	20.43	20.28	20.14	21.00	0
10	16QAM	50	0	20.20	20.43	20.38	20.14		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.20	20.42	20.39	20.17	21.00	0
5	QPSK	1	12	20.02	20.47	20.15	19.89		
5	QPSK	1	24	20.17	20.41	20.40	20.13		
5	QPSK	12	0	20.24	20.47	20.41	20.18	21.00	0
5	QPSK	12	7	20.24	20.56	20.42	20.21		
5	QPSK	12	13	20.22	20.57	20.44	20.20		
5	QPSK	25	0	20.21	20.50	20.35	20.24	21.00	0
5	16QAM	1	0	20.88	20.78	20.95	20.88		
5	16QAM	1	12	20.86	20.88	20.90	20.82		
5	16QAM	1	24	20.82	20.98	20.92	20.80	21.00	0
5	16QAM	12	0	20.22	20.45	20.43	20.15		
5	16QAM	12	7	20.24	20.56	20.36	20.15		
5	16QAM	12	13	20.18	20.46	20.44	20.15	21.00	0
5	16QAM	25	0	20.28	20.55	20.45	20.23		



<Reduced Power Mode for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.73	20.59	20.56	21.00	0
20	QPSK	1	49	20.04	19.97	19.84		
20	QPSK	1	99	20.11	20.01	19.90		
20	QPSK	50	0	20.18	20.02	19.89	21.00	0
20	QPSK	50	24	20.12	20.05	19.93		
20	QPSK	50	50	20.29	20.06	19.92		
20	QPSK	100	0	20.24	20.10	19.93		
20	16QAM	1	0	20.79	20.72	20.74	21.00	0
20	16QAM	1	49	20.67	20.57	20.42		
20	16QAM	1	99	20.72	20.63	20.59		
20	16QAM	50	0	20.23	20.12	19.96	21.00	0
20	16QAM	50	24	20.17	20.15	19.98		
20	16QAM	50	50	20.32	20.11	19.95		
20	16QAM	100	0	20.24	20.03	19.93		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	19.90	20.12	20.19	21.00	0
15	QPSK	1	37	19.56	20.01	19.95		
15	QPSK	1	74	20.12	19.76	19.47		
15	QPSK	36	0	20.32	20.31	20.09	21.00	0
15	QPSK	36	20	20.22	20.09	19.93		
15	QPSK	36	39	20.12	20.04	19.94		
15	QPSK	75	0	20.28	20.17	19.94		
15	16QAM	1	0	20.78	20.80	20.65	21.00	0
15	16QAM	1	37	20.53	20.38	20.21		
15	16QAM	1	74	20.78	20.68	20.67		
15	16QAM	36	0	20.44	20.36	20.21	21.00	0
15	16QAM	36	20	20.30	20.21	19.98		
15	16QAM	36	39	20.23	20.17	20.01		
15	16QAM	75	0	20.32	20.22	19.98		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.22	20.13	20.07	21.00	0
10	QPSK	1	25	20.05	19.93	19.81		
10	QPSK	1	49	19.64	19.44	19.43		
10	QPSK	25	0	20.01	19.93	19.81	21.00	0
10	QPSK	25	12	20.08	19.97	19.87		
10	QPSK	25	25	19.89	19.71	19.73		
10	QPSK	50	0	20.04	19.87	19.81		
10	16QAM	1	0	20.53	20.42	20.40	21.00	0
10	16QAM	1	25	20.71	20.62	20.51		
10	16QAM	1	49	20.33	20.17	20.12		
10	16QAM	25	0	20.15	19.96	19.87	21.00	0
10	16QAM	25	12	20.19	20.06	19.97		
10	16QAM	25	25	20.04	19.81	19.84		
10	16QAM	50	0	20.04	19.94	19.85		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.32	20.23	20.24	21.00	0
5	QPSK	1	12	20.05	19.76	19.69		
5	QPSK	1	24	20.06	19.81	19.88		
5	QPSK	12	0	20.15	19.98	19.92	21.00	0
5	QPSK	12	7	20.15	20.00	19.91		
5	QPSK	12	13	20.11	20.00	19.92		
5	QPSK	25	0	20.11	19.95	19.89		
5	16QAM	1	0	20.74	20.62	20.56	21.00	0
5	16QAM	1	12	20.75	20.63	20.55		
5	16QAM	1	24	20.69	20.47	20.54		
5	16QAM	12	0	20.11	19.99	19.89	21.00	0
5	16QAM	12	7	20.11	19.94	19.86		
5	16QAM	12	13	20.10	19.96	19.91		
5	16QAM	25	0	20.19	20.04	19.97		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	20.50	20.49	20.39	20.19	21.00	0
20	QPSK	1	49	20.34	20.43	20.36	20.12		
20	QPSK	1	99	20.45	20.70	20.56	20.36		
20	QPSK	50	0	20.37	20.52	20.42	20.23	21.00	0
20	QPSK	50	24	20.39	20.53	20.47	20.27		
20	QPSK	50	50	20.41	20.60	20.54	20.33		
20	QPSK	100	0	20.39	20.55	20.46	20.14		
20	16QAM	1	0	20.97	20.94	20.95	20.79	21.00	0
20	16QAM	1	49	20.87	20.94	20.89	20.68		
20	16QAM	1	99	20.98	20.89	20.96	20.68		
20	16QAM	50	0	20.38	20.48	20.43	20.20	21.00	0
20	16QAM	50	24	20.37	20.47	20.40	20.20		
20	16QAM	50	50	20.38	20.54	20.48	20.22		
20	16QAM	100	0	20.33	20.41	20.37	20.06		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	19.78	19.81	19.95	19.84	21.00	0
15	QPSK	1	37	20.12	20.13	19.98	20.20		
15	QPSK	1	74	19.90	20.16	19.99	19.77		
15	QPSK	36	0	20.46	20.54	20.50	20.31	21.00	0
15	QPSK	36	20	20.29	20.44	20.38	20.12		
15	QPSK	36	39	20.36	20.42	20.37	20.14		
15	QPSK	75	0	20.48	20.49	20.45	20.25		
15	16QAM	1	0	20.86	20.70	20.89	20.80	21.00	0
15	16QAM	1	37	20.86	20.74	20.63	20.43		
15	16QAM	1	74	20.89	20.89	20.98	20.82		
15	16QAM	36	0	20.54	20.63	20.57	20.36	21.00	0
15	16QAM	36	20	20.37	20.57	20.44	20.27		
15	16QAM	36	39	20.48	20.53	20.49	20.25		
15	16QAM	75	0	20.52	20.57	20.43	20.23		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.16	20.30	20.32	19.96	21.00	0
10	QPSK	1	25	20.15	20.40	20.34	20.15		
10	QPSK	1	49	19.77	20.08	19.97	19.75		
10	QPSK	25	0	20.18	20.36	20.42	20.12	21.00	0
10	QPSK	25	12	20.27	20.50	20.38	20.20		
10	QPSK	25	25	20.14	20.33	20.23	20.04		
10	QPSK	50	0	20.16	20.44	20.29	20.08	21.00	0
10	16QAM	1	0	20.58	20.86	20.79	20.61		
10	16QAM	1	25	20.86	20.98	21.00	20.80		
10	16QAM	1	49	20.47	20.71	20.63	20.37	21.00	0
10	16QAM	25	0	20.23	20.46	20.44	20.21		
10	16QAM	25	12	20.33	20.57	20.50	20.26		
10	16QAM	25	25	20.24	20.43	20.28	20.14	21.00	0
10	16QAM	50	0	20.20	20.43	20.38	20.14		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.20	20.42	20.39	20.17	21.00	0
5	QPSK	1	12	20.02	20.47	20.15	19.89		
5	QPSK	1	24	20.17	20.41	20.40	20.13		
5	QPSK	12	0	20.24	20.47	20.41	20.18	21.00	0
5	QPSK	12	7	20.24	20.56	20.42	20.21		
5	QPSK	12	13	20.22	20.57	20.44	20.20		
5	QPSK	25	0	20.21	20.50	20.35	20.24	21.00	0
5	16QAM	1	0	20.88	20.78	20.95	20.88		
5	16QAM	1	12	20.86	20.88	20.90	20.82		
5	16QAM	1	24	20.82	20.98	20.92	20.80	21.00	0
5	16QAM	12	0	20.22	20.45	20.43	20.15		
5	16QAM	12	7	20.24	20.56	20.36	20.15		
5	16QAM	12	13	20.18	20.46	20.44	20.15	21.00	0
5	16QAM	25	0	20.28	20.55	20.45	20.23		



<Reduced Power Mode for Product Specific 10g SAR>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.65	21.65	21.50	23.00	0
20	QPSK	1	49	21.45	21.41	21.24		
20	QPSK	1	99	21.59	21.50	21.40		
20	QPSK	50	0	21.68	21.56	21.41	23.00	0
20	QPSK	50	24	21.70	21.58	21.51		
20	QPSK	50	50	21.76	21.54	21.46		
20	QPSK	100	0	21.72	21.61	21.45	23.00	0
20	16QAM	1	0	22.37	22.20	22.30		
20	16QAM	1	49	22.07	22.04	22.02		
20	16QAM	1	99	22.13	22.04	22.05	22.00	1
20	16QAM	50	0	21.18	21.12	21.06		
20	16QAM	50	24	21.17	21.15	21.07		
20	16QAM	50	50	21.33	21.11	21.03	22.00	1
20	16QAM	100	0	21.25	21.03	21.07		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.12	21.50	21.68	23.00	0
15	QPSK	1	37	22.13	21.56	21.66		
15	QPSK	1	74	21.48	21.60	21.50		
15	QPSK	36	0	21.82	21.76	21.62	23.00	0
15	QPSK	36	20	21.71	21.61	21.38		
15	QPSK	36	39	21.67	21.57	21.42		
15	QPSK	75	0	21.83	21.67	21.48	23.00	0
15	16QAM	1	0	22.45	22.40	22.31		
15	16QAM	1	37	21.99	21.87	21.64		
15	16QAM	1	74	22.33	22.19	22.12	22.00	1
15	16QAM	36	0	21.41	21.41	21.21		
15	16QAM	36	20	21.32	21.20	21.07		
15	16QAM	36	39	21.26	21.13	21.03	22.00	1
15	16QAM	75	0	21.32	21.19	21.02		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	21.16	21.50	21.67	23.00	0
10	QPSK	1	25	21.59	21.45	21.37		
10	QPSK	1	49	21.19	21.01	21.05		
10	QPSK	25	0	21.56	21.42	21.30	23.00	0
10	QPSK	25	12	21.63	21.49	21.38		
10	QPSK	25	25	21.45	21.28	21.26		
10	QPSK	50	0	21.53	21.38	21.27	23.00	0
10	16QAM	1	0	22.00	21.97	21.87		
10	16QAM	1	25	22.20	22.07	21.96		
10	16QAM	1	49	21.83	21.66	21.62	22.00	1
10	16QAM	25	0	21.13	21.01	21.08		
10	16QAM	25	12	21.21	21.06	21.05		
10	16QAM	25	25	21.00	21.08	21.04	22.00	1
10	16QAM	50	0	21.08	21.03	21.03		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	21.08	21.12	21.10	23.00	0
5	QPSK	1	12	21.34	21.17	21.11		
5	QPSK	1	24	21.63	21.37	21.37		
5	QPSK	12	0	21.62	21.49	21.41	23.00	0
5	QPSK	12	7	21.64	21.49	21.37		
5	QPSK	12	13	21.63	21.45	21.38		
5	QPSK	25	0	21.60	21.46	21.37	23.00	0
5	16QAM	1	0	22.26	22.12	22.01		
5	16QAM	1	12	22.23	22.10	22.03		
5	16QAM	1	24	22.21	21.98	22.01	22.00	1
5	16QAM	12	0	21.16	21.08	21.92		
5	16QAM	12	7	21.14	21.01	21.09		
5	16QAM	12	13	21.14	21.06	21.08	22.00	1
5	16QAM	25	0	21.17	21.12	21.06		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	22.90	22.86	22.80	22.88	23.00	0
20	QPSK	1	49	22.72	22.83	22.79	22.60		
20	QPSK	1	99	22.90	22.96	22.91	22.68		
20	QPSK	50	0	21.83	21.88	21.85	21.61	23.00	0
20	QPSK	50	24	21.78	21.86	21.81	21.65		
20	QPSK	50	50	21.83	21.92	21.87	21.62		
20	QPSK	100	0	21.80	21.89	21.83	21.56		
20	16QAM	1	0	22.00	22.17	22.06	21.87	23.00	0
20	16QAM	1	49	21.79	21.94	21.88	21.75		
20	16QAM	1	99	21.95	22.04	21.92	21.77		
20	16QAM	50	0	20.82	20.88	20.88	20.61	22.00	1
20	16QAM	50	24	20.78	20.93	20.88	20.69		
20	16QAM	50	50	20.80	20.97	20.91	20.69		
20	16QAM	100	0	20.80	20.94	20.86	20.58		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	22.40	22.32	22.38	22.68	23.00	0
15	QPSK	1	37	22.89	22.90	22.80	22.59		
15	QPSK	1	74	22.70	22.90	22.95	22.78		
15	QPSK	36	0	21.93	22.03	21.95	21.78	23.00	0
15	QPSK	36	20	21.74	21.91	21.83	21.64		
15	QPSK	36	39	21.82	21.85	21.88	21.63		
15	QPSK	75	0	21.95	22.03	21.94	21.76		
15	16QAM	1	0	22.33	22.46	22.47	22.26	23.00	0
15	16QAM	1	37	21.70	21.94	21.74	21.70		
15	16QAM	1	74	22.06	22.14	22.08	21.86		
15	16QAM	36	0	20.97	21.04	20.98	20.79	22.00	1
15	16QAM	36	20	20.74	20.88	20.85	20.64		
15	16QAM	36	39	20.80	20.83	20.84	20.57		
15	16QAM	75	0	20.92	21.09	20.97	20.81		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	22.52	22.76	22.68	22.59	23.00	0
10	QPSK	1	25	22.67	22.97	22.87	22.67		
10	QPSK	1	49	22.31	22.63	22.52	22.26		
10	QPSK	25	0	21.65	21.84	21.91	21.64	23.00	0
10	QPSK	25	12	21.72	21.98	21.88	21.66		
10	QPSK	25	25	21.63	21.78	21.72	21.52		
10	QPSK	50	0	21.59	21.90	21.77	21.58	23.00	0
10	16QAM	1	0	21.59	21.88	21.81	21.66		
10	16QAM	1	25	21.82	22.12	21.98	21.81		
10	16QAM	1	49	21.38	21.70	21.56	21.40	22.00	1
10	16QAM	25	0	20.64	20.89	20.90	20.64		
10	16QAM	25	12	20.75	20.97	20.91	20.67		
10	16QAM	25	25	20.64	20.85	20.76	20.52	22.00	1
10	16QAM	50	0	20.63	20.88	20.79	20.57		
Channel				40065	40385	40705	41215		
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	22.86	22.92	22.89	22.66	23.00	0
5	QPSK	1	12	22.64	22.92	22.81	22.63		
5	QPSK	1	24	22.62	22.90	22.89	22.62		
5	QPSK	12	0	21.71	21.97	21.96	21.72	23.00	0
5	QPSK	12	7	21.73	22.04	21.91	21.66		
5	QPSK	12	13	21.68	21.96	21.96	21.70		
5	QPSK	25	0	21.75	22.02	21.88	21.68	23.00	0
5	16QAM	1	0	21.82	22.11	22.06	21.89		
5	16QAM	1	12	21.85	22.15	22.00	21.89		
5	16QAM	1	24	21.74	22.10	22.05	21.81	22.00	1
5	16QAM	12	0	20.71	20.98	20.95	20.70		
5	16QAM	12	7	20.72	21.00	20.90	20.68		
5	16QAM	12	13	20.67	20.98	20.96	20.63	22.00	1
5	16QAM	25	0	20.72	21.04	20.88	20.68		

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.48	17.00	98.56
		6	2437	16.44	17.00	
		11	2462	16.34	17.00	
	802.11g 6Mbps	1	2412	13.47	14.00	93.20
		6	2437	13.41	14.00	
		11	2462	13.18	14.00	
	802.11n-HT20 MCS0	1	2412	11.68	12.00	92.09
		6	2437	11.59	12.00	
		11	2462	11.67	12.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.44	15.00	93.20
		44	5220	14.13	15.00	
		48	5240	14.38	15.00	
	802.11n-HT20 MCS0	36	5180	14.47	15.00	92.75
		44	5220	14.45	15.00	
		48	5240	14.46	15.00	
	802.11n-HT40 MCS0	38	5190	14.47	15.00	85.95
		46	5230	14.49	15.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.43	15.00	93.20
		60	5300	14.46	15.00	
		64	5320	14.42	15.00	
	802.11n-HT20 MCS0	52	5260	14.44	15.00	92.75
		60	5300	14.45	15.00	
		64	5320	14.44	15.00	
	802.11n-HT40 MCS0	54	5270	14.37	15.00	85.95
		62	5310	14.41	15.00	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	14.21	15.00	93.20
		116	5580	14.30	15.00	
		140	5700	14.11	15.00	
		144	5720	14.28	15.00	
	802.11n-HT20 MCS0	100	5500	14.23	15.00	92.75
		116	5580	14.22	15.00	
		140	5700	14.11	15.00	
		144	5720	14.28	15.00	
	802.11n-HT40 MCS0	102	5510	14.30	15.00	85.95
		110	5550	14.27	15.00	
		134	5670	14.23	15.00	
		142	5710	14.37	15.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	14.32	15.00	93.20
		157	5785	14.38	15.00	
		165	5825	14.35	15.00	
	802.11n-HT20 MCS0	149	5745	14.39	15.00	92.75
		157	5785	14.44	15.00	
		165	5825	14.45	15.00	
	802.11n-HT40 MCS0	151	5755	14.42	15.00	85.95
		159	5795	14.11	15.00	



<2.4GHz Bluetooth>


General Note:

- 1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
- 2. The Bluetooth duty cycle is 77.13 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

Mode	Channel	Frequency (MHz)	Average power (dBm)
			1Mbps
BR/EDR	CH 00	2402	9.19
	CH 39	2441	11.01
	CH 78	2480	9.49
Tune-up limit (dBm)			11.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	0.85
	CH 19	2440	2.43
	CH 39	2480	0.77
Tune-up Limit			3.00

14. Antenna Location

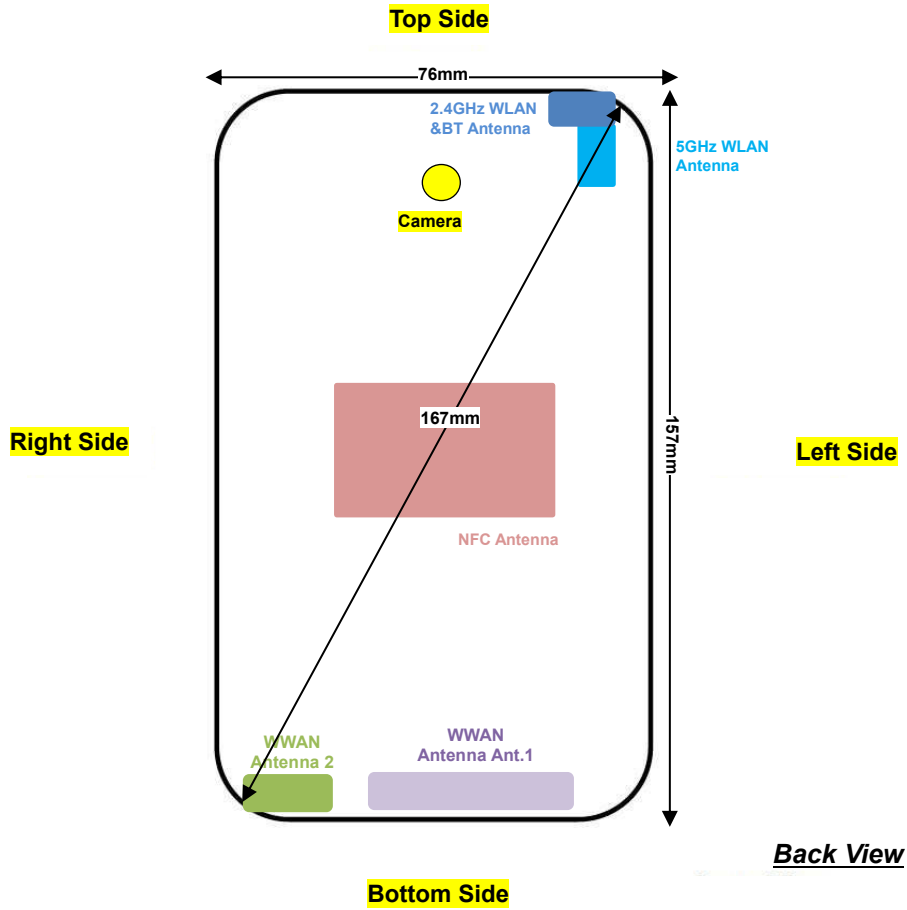

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
2.4GHz WLAN & BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
5GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	Yes	Yes
2.4GHz WLAN & BT	Yes	Yes	Yes	No	No	Yes
5GHz WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

1. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device and WWAN antenna 2 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V, LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
6. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/V, and LTE band 2/4/7/38/41.
7. This device hotspot reduced power and P-sensor reduced power level are the same for GSM850, WCDMA Band V and LTE Band 7/38/41. And for other Bands are differences.
8. P-sensor can detect handheld state, GSM1900, WCDMA band II, LTE band 2/4/7/38/41 for front/back/bottom sides for front/back/top sides and product specific 10g SAR condition reduced powers will be active.
9. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device and WWAN antenna 2 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V, LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
10. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN transmitter scaled to reduced power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/V, LTE Band 2/4/7/26/38/41, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode/p-sensor on are implemented in GSM850/1900 band, and p-sensor detects handheld state for product specific 10g SAR condition is implemented in GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC 12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 5 / 38 SAR test was covered by Band 26 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - c. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - d. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Right Cheek	Full	128	824.2	26.45	27.50	1.274	0.02	0.139	0.177
	GSM850	GPRS 4 Tx slots	Right Tilted	Full	128	824.2	26.45	27.50	1.274	-0.07	0.079	0.101
01	GSM850	GPRS 4 Tx slots	Left Cheek	Full	128	824.2	26.45	27.50	1.274	-0.03	0.183	0.233
	GSM850	GPRS 4 Tx slots	Left Tilted	Full	128	824.2	26.45	27.50	1.274	0.07	0.084	0.107
02	GSM1900	GPRS 4 Tx slots	Right Cheek	Full	661	1880	23.30	24.50	1.318	-0.07	0.063	0.083
	GSM1900	GPRS 4 Tx slots	Right Tilted	Full	661	1880	23.30	24.50	1.318	-0.07	0.035	0.047
	GSM1900	GPRS 4 Tx slots	Left Cheek	Full	661	1880	23.30	24.50	1.318	-0.07	0.048	0.063
	GSM1900	GPRS 4 Tx slots	Left Tilted	Full	661	1880	23.30	24.50	1.318	-0.05	0.021	0.027

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Full	4132	826.4	23.40	23.50	1.023	0.04	0.230	0.235
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Full	4132	826.4	23.40	23.50	1.023	0.09	0.158	0.162
03	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Full	4132	826.4	23.40	23.50	1.023	0	0.297	0.304
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Full	4132	826.4	23.40	23.50	1.023	-0.02	0.141	0.144
04	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Full	9538	1907.6	23.23	23.50	1.064	-0.08	0.125	0.133
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Full	9538	1907.6	23.23	23.50	1.064	-0.05	0.052	0.055
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Full	9538	1907.6	23.23	23.50	1.064	-0.04	0.077	0.082
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Full	9538	1907.6	23.23	23.50	1.064	-0.05	0.029	0.031



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Right Cheek	Full	26865	831.5	23.01	23.50	1.119	0.03	0.236	0.264
	LTE Band 26	15M	QPSK	36	0	Right Cheek	Full	26865	831.5	22.18	23.00	1.208	0.1	0.133	0.161
	LTE Band 26	15M	QPSK	1	37	Right Tilted	Full	26865	831.5	23.01	23.50	1.119	-0.01	0.184	0.206
	LTE Band 26	15M	QPSK	36	0	Right Tilted	Full	26865	831.5	22.18	23.00	1.208	0.02	0.099	0.119
05	LTE Band 26	15M	QPSK	1	37	Left Cheek	Full	26865	831.5	23.01	23.50	1.119	0.1	0.307	0.344
	LTE Band 26	15M	QPSK	36	0	Left Cheek	Full	26865	831.5	22.18	23.00	1.208	0.02	0.181	0.219
	LTE Band 26	15M	QPSK	1	37	Left Tilted	Full	26865	831.5	23.01	23.50	1.119	-0.02	0.141	0.158
	LTE Band 26	15M	QPSK	36	0	Left Tilted	Full	26865	831.5	22.18	23.00	1.208	0.04	0.087	0.105
	LTE Band 4	20M	QPSK	1	99	Right Cheek	Full	20175	1732.5	22.63	23.50	1.222	-0.06	0.099	0.121
	LTE Band 4	20M	QPSK	50	50	Right Cheek	Full	20175	1732.5	21.92	23.00	1.282	-0.01	0.066	0.084
	LTE Band 4	20M	QPSK	1	99	Right Tilted	Full	20175	1732.5	22.63	23.50	1.222	-0.03	0.055	0.067
	LTE Band 4	20M	QPSK	50	50	Right Tilted	Full	20175	1732.5	21.92	23.00	1.282	-0.04	0.035	0.045
06	LTE Band 4	20M	QPSK	1	99	Left Cheek	Full	20175	1732.5	22.63	23.50	1.222	-0.02	0.145	0.177
	LTE Band 4	20M	QPSK	50	50	Left Cheek	Full	20175	1732.5	21.92	23.00	1.282	-0.01	0.089	0.114
	LTE Band 4	20M	QPSK	1	99	Left Tilted	Full	20175	1732.5	22.63	23.50	1.222	-0.04	0.067	0.081
	LTE Band 4	20M	QPSK	50	50	Left Tilted	Full	20175	1732.5	21.92	23.00	1.282	-0.05	0.041	0.052
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Full	18700	1860	22.40	23.50	1.288	-0.08	0.094	0.121
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Full	18700	1860	22.15	23.00	1.216	-0.06	0.068	0.082
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Full	18700	1860	22.40	23.50	1.288	-0.02	0.045	0.058
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Full	18700	1860	22.15	23.00	1.216	-0.09	0.032	0.039
07	LTE Band 2	20M	QPSK	1	0	Left Cheek	Full	18700	1860	22.40	23.50	1.288	-0.04	0.106	0.137
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Full	18700	1860	22.15	23.00	1.216	-0.09	0.061	0.075
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Full	18700	1860	22.40	23.50	1.288	-0.05	0.044	0.057
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Full	18700	1860	22.15	23.00	1.216	-0.08	0.025	0.030
08	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	20850	2510	22.91	23.50	1.146	-0.08	0.454	0.520
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Full	20850	2510	21.78	23.00	1.324	-0.04	0.209	0.277
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Full	20850	2510	22.91	23.50	1.146	-0.03	0.159	0.182
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Full	20850	2510	21.78	23.00	1.324	0.03	0.077	0.102
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Full	20850	2510	22.91	23.50	1.146	0.04	0.274	0.314
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Full	20850	2510	21.78	23.00	1.324	0.09	0.133	0.176
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Full	20850	2510	22.91	23.50	1.146	0.07	0.294	0.337
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Full	20850	2510	21.78	23.00	1.324	-0.09	0.135	0.179



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 41	20M	QPSK	1	99	Right Cheek	Full	40400	2571	23.96	24.50	1.132	62.9	1.006	0.06	0.123	0.140
	LTE Band 41	20M	QPSK	50	50	Right Cheek	Full	40400	2571	21.72	23.50	1.507	62.9	1.006	0.01	0.072	0.110
	LTE Band 41	20M	QPSK	1	99	Right Tilted	Full	40400	2571	23.96	24.50	1.132	62.9	1.006	0.01	0.060	0.068
	LTE Band 41	20M	QPSK	50	50	Right Tilted	Full	40400	2571	21.72	23.50	1.507	62.9	1.006	0.02	0.034	0.051
	LTE Band 41	20M	QPSK	1	99	Left Cheek	Full	40400	2571	23.96	24.50	1.132	62.9	1.006	0.02	0.092	0.105
	LTE Band 41	20M	QPSK	50	50	Left Cheek	Full	40400	2571	21.72	23.50	1.507	62.9	1.006	0.02	0.060	0.091
	LTE Band 41	20M	QPSK	1	99	Left Tilted	Full	40400	2571	23.96	24.50	1.132	62.9	1.006	0.06	0.095	0.108
	LTE Band 41	20M	QPSK	50	50	Left Tilted	Full	40400	2571	21.72	23.50	1.507	62.9	1.006	0.01	0.052	0.079

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	1	2412	16.48	17.00	1.127	98.56	1.015	-0.07	1.228	0.803	0.919
10	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	16.44	17.00	1.138	98.56	1.015	-0.08	1.582	0.903	1.043
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	1	2412	16.48	17.00	1.127	98.56	1.015	-0.08	1.071	0.645	0.738
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	1	2412	16.48	17.00	1.127	98.56	1.015		0.770		
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	1	2412	16.48	17.00	1.127	98.56	1.015		0.697		

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	DH5 1Mbps	Right Cheek	39	2441	11.01	11.50	1.120	77.13	1.080	-0.06	0.192	0.232
11	Bluetooth	DH5 1Mbps	Right Tilted	39	2441	11.01	11.50	1.120	77.13	1.080	0.02	0.197	0.238
	Bluetooth	DH5 1Mbps	Left Cheek	39	2441	11.01	11.50	1.120	77.13	1.080	-0.01	0.102	0.123
	Bluetooth	DH5 1Mbps	Left Tilted	39	2441	11.01	11.50	1.120	77.13	1.080	-0.03	0.101	0.122

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	62	5310	14.41	15.00	1.146	85.95	1.163	0	0.818	0.510	0.679
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	62	5310	14.41	15.00	1.146	85.95	1.163	0.01	0.720	0.410	0.546
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	62	5310	14.41	15.00	1.146	85.95	1.163		0.245		
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	62	5310	14.41	15.00	1.146	85.95	1.163		0.252		
13	WLAN5.5GHz	802.11n-HT40 MCS0	Right Cheek	142	5710	14.37	15.00	1.156	85.95	1.163	-0.09	0.571	0.389	0.523
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Tilted	142	5710	14.37	15.00	1.156	85.95	1.163	0.04	0.368	0.290	0.390
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	142	5710	14.37	15.00	1.156	85.95	1.163		0.231		
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	142	5710	14.37	15.00	1.156	85.95	1.163		0.246		
14	WLAN 5.8GHz	802.11n-HT40 MCS0	Right Cheek	151	5755	14.42	15.00	1.143	85.95	1.163	-0.02	0.658	0.414	0.550
	WLAN 5.8GHz	802.11n-HT40 MCS0	Right Tilted	151	5755	14.42	15.00	1.143	85.95	1.163	0.01	0.547	0.288	0.383
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Cheek	151	5755	14.42	15.00	1.143	85.95	1.163		0.274		
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Tilted	151	5755	14.42	15.00	1.143	85.95	1.163		0.209		

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	5	Hotspot On	128	824.2	25.91	26.50	1.146	0.01	0.535	0.613
	GSM850	GPRS 4 Tx slots	Back	5	Hotspot On	128	824.2	25.91	26.50	1.146	0.01	0.874	1.001
15	GSM850	GPRS 4 Tx slots	Back	5	Hotspot On	189	836.4	25.83	26.50	1.167	-0.08	1.210	1.412
	GSM850	GPRS 4 Tx slots	Back	5	Hotspot On	251	848.8	25.77	26.50	1.183	0.01	1.140	1.349
	GSM850	GPRS 4 Tx slots	Left Side	5	Hotspot On	128	824.2	25.91	26.50	1.146	0.01	0.269	0.308
	GSM850	GPRS 4 Tx slots	Right Side	5	Hotspot On	128	824.2	25.91	26.50	1.146	0.01	0.110	0.126
	GSM850	GPRS 4 Tx slots	Bottom Side	5	Hotspot On	128	824.2	25.91	26.50	1.146	0.04	0.417	0.478
	GSM1900	GPRS 4 Tx slots	Front	5	Hotspot On	661	1880	17.27	18.00	1.183	0.07	0.712	0.842
	GSM1900	GPRS 4 Tx slots	Front	5	Hotspot On	512	1850.2	17.20	18.00	1.202	-0.05	0.706	0.849
	GSM1900	GPRS 4 Tx slots	Front	5	Hotspot On	810	1909.8	17.15	18.00	1.216	-0.04	0.663	0.806
	GSM1900	GPRS 4 Tx slots	Back	5	Hotspot On	661	1880	17.27	18.00	1.183	-0.08	1.060	1.254
	GSM1900	GPRS 4 Tx slots	Back	5	Hotspot On	512	1850.2	17.20	18.00	1.202	-0.08	1.040	1.250
	GSM1900	GPRS 4 Tx slots	Back	5	Hotspot On	810	1909.8	17.15	18.00	1.216	-0.1	1.000	1.216
	GSM1900	GPRS 4 Tx slots	Left Side	5	Hotspot On	661	1880	17.27	18.00	1.183	-0.14	0.073	0.087
	GSM1900	GPRS 4 Tx slots	Right Side	5	Hotspot On	661	1880	17.27	18.00	1.183	-0.03	0.035	0.042
	GSM1900	GPRS 4 Tx slots	Bottom Side	5	Hotspot On	661	1880	17.27	18.00	1.183	0.03	1.190	1.408
16	GSM1900	GPRS 4 Tx slots	Bottom Side	5	Hotspot On	512	1850.2	17.20	18.00	1.202	-0.08	1.190	1.431
	GSM1900	GPRS 4 Tx slots	Bottom Side	5	Hotspot On	810	1909.8	17.15	18.00	1.216	-0.09	1.170	1.423

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	5	Hotspot On	4132	826.4	22.98	23.00	1.005	-0.01	0.784	0.788
	WCDMA Band V	RMC 12.2Kbps	Back	5	Hotspot On	4132	826.4	22.98	23.00	1.005	0.02	1.070	1.075
17	WCDMA Band V	RMC 12.2Kbps	Back	5	Hotspot On	4182	836.4	22.83	23.00	1.040	0.01	1.220	1.269
	WCDMA Band V	RMC 12.2Kbps	Back	5	Hotspot On	4233	846.6	22.94	23.00	1.014	-0.01	1.250	1.267
	WCDMA Band V	RMC 12.2Kbps	Left Side	5	Hotspot On	4132	826.4	22.98	23.00	1.005	-0.05	0.508	0.510
	WCDMA Band V	RMC 12.2Kbps	Right Side	5	Hotspot On	4132	826.4	22.98	23.00	1.005	-0.01	0.218	0.219
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	5	Hotspot On	4132	826.4	22.98	23.00	1.005	-0.05	0.674	0.677
	WCDMA Band II	RMC 12.2Kbps	Front	5	Hotspot On	9538	1907.6	14.50	15.00	1.122	-0.01	0.664	0.745
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9538	1907.6	14.50	15.00	1.122	-0.17	0.916	1.028
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9262	1852.4	14.40	15.00	1.148	-0.14	0.936	1.075
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9400	1880	14.49	15.00	1.125	-0.12	0.972	1.093
	WCDMA Band II	RMC 12.2Kbps	Left Side	5	Hotspot On	9538	1907.6	14.50	15.00	1.122	-0.01	0.065	0.073
	WCDMA Band II	RMC 12.2Kbps	Right Side	5	Hotspot On	9538	1907.6	14.50	15.00	1.122	-0.08	0.034	0.038
18	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9538	1907.6	14.50	15.00	1.122	-0.02	1.290	1.447
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9262	1852.4	14.40	15.00	1.148	-0.02	1.030	1.183
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9400	1880	14.49	15.00	1.125	-0.11	1.270	1.428



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Front	5	Full	26865	831.5	23.01	23.50	1.119	-0.04	0.677	0.758
	LTE Band 26	15M	QPSK	36	0	Front	5	Full	26865	831.5	22.18	23.00	1.208	0.01	0.440	0.531
19	LTE Band 26	15M	QPSK	1	37	Back	5	Full	26865	831.5	23.01	23.50	1.119	-0.11	1.200	1.343
	LTE Band 26	15M	QPSK	36	0	Back	5	Full	26865	831.5	22.18	23.00	1.208	0.01	0.705	0.852
	LTE Band 26	15M	QPSK	75	0	Back	5	Full	26865	831.5	21.98	23.00	1.265	0.01	0.700	0.885
	LTE Band 26	15M	QPSK	1	37	Left Side	5	Full	26865	831.5	23.01	23.50	1.119	-0.04	0.370	0.414
	LTE Band 26	15M	QPSK	36	0	Left Side	5	Full	26865	831.5	22.18	23.00	1.208	-0.08	0.202	0.244
	LTE Band 26	15M	QPSK	1	37	Right Side	5	Full	26865	831.5	23.01	23.50	1.119	-0.01	0.134	0.150
	LTE Band 26	15M	QPSK	36	0	Right Side	5	Full	26865	831.5	22.18	23.00	1.208	0.01	0.061	0.073
	LTE Band 26	15M	QPSK	1	37	Bottom Side	5	Full	26865	831.5	23.01	23.50	1.119	-0.06	0.737	0.825
	LTE Band 26	15M	QPSK	36	0	Bottom Side	5	Full	26865	831.5	22.18	23.00	1.208	-0.04	0.393	0.475
	LTE Band 26	15M	QPSK	75	0	Bottom Side	5	Full	26865	831.5	21.98	23.00	1.265	0.09	0.386	0.488
	LTE Band 4	20M	QPSK	1	99	Front	5	Hotspot On	20175	1732.5	15.23	16.00	1.194	-0.06	0.548	0.654
	LTE Band 4	20M	QPSK	50	50	Front	5	Hotspot On	20175	1732.5	15.10	16.00	1.230	-0.03	0.537	0.661
	LTE Band 4	20M	QPSK	1	99	Back	5	Hotspot On	20175	1732.5	15.23	16.00	1.194	-0.06	0.783	0.935
	LTE Band 4	20M	QPSK	50	50	Back	5	Hotspot On	20175	1732.5	15.10	16.00	1.230	-0.03	0.753	0.926
	LTE Band 4	20M	QPSK	100	0	Back	5	Hotspot On	20175	1732.5	14.94	16.00	1.276	0.05	0.732	0.934
	LTE Band 4	20M	QPSK	1	99	Left Side	5	Hotspot On	20175	1732.5	15.23	16.00	1.194	-0.01	0.066	0.079
	LTE Band 4	20M	QPSK	50	50	Left Side	5	Hotspot On	20175	1732.5	15.10	16.00	1.230	-0.11	0.065	0.080
	LTE Band 4	20M	QPSK	1	99	Right Side	5	Hotspot On	20175	1732.5	15.23	16.00	1.194	-0.01	0.042	0.051
	LTE Band 4	20M	QPSK	50	50	Right Side	5	Hotspot On	20175	1732.5	15.10	16.00	1.230	0.05	0.042	0.051
20	LTE Band 4	20M	QPSK	1	99	Bottom Side	5	Hotspot On	20175	1732.5	15.23	16.00	1.194	-0.03	1.130	1.349
	LTE Band 4	20M	QPSK	50	50	Bottom Side	5	Hotspot On	20175	1732.5	15.10	16.00	1.230	-0.18	0.902	1.110
	LTE Band 4	20M	QPSK	100	0	Bottom Side	5	Hotspot On	20175	1732.5	14.94	16.00	1.276	-0.18	0.982	1.253
	LTE Band 2	20M	QPSK	1	0	Front	5	Hotspot On	18700	1860	13.98	14.50	1.127	0.04	0.472	0.532
	LTE Band 2	20M	QPSK	50	0	Front	5	Hotspot On	18700	1860	13.88	14.50	1.153	0	0.469	0.541
	LTE Band 2	20M	QPSK	1	0	Back	5	Hotspot On	18700	1860	13.98	14.50	1.127	0.07	0.672	0.757
	LTE Band 2	20M	QPSK	50	0	Back	5	Hotspot On	18700	1860	13.88	14.50	1.153	0.04	0.676	0.780
	LTE Band 2	20M	QPSK	1	0	Left Side	5	Hotspot On	18700	1860	13.98	14.50	1.127	-0.17	0.054	0.060
	LTE Band 2	20M	QPSK	50	0	Left Side	5	Hotspot On	18700	1860	13.88	14.50	1.153	-0.18	0.055	0.063
	LTE Band 2	20M	QPSK	1	0	Right Side	5	Hotspot On	18700	1860	13.98	14.50	1.127	-0.08	0.017	0.020
	LTE Band 2	20M	QPSK	50	0	Right Side	5	Hotspot On	18700	1860	13.88	14.50	1.153	0.04	0.019	0.021
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Hotspot On	18700	1860	13.98	14.50	1.127	-0.02	1.080	1.217
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Hotspot On	18900	1880	13.65	14.50	1.216	-0.03	1.080	1.313
21	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Hotspot On	19100	1900	13.86	14.50	1.159	-0.07	1.180	1.367
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Hotspot On	18700	1860	13.88	14.50	1.153	-0.02	1.100	1.269
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Hotspot On	18900	1880	13.80	14.50	1.175	-0.02	1.080	1.269
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Hotspot On	19100	1900	13.78	14.50	1.180	-0.01	1.150	1.357
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5	Hotspot On	18700	1860	13.85	14.50	1.161	-0.05	1.120	1.301



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	20850	2510	18.71	19.00	1.069	0.01	0.757	0.809
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	21100	2535	18.59	19.00	1.099	0.01	0.746	0.820
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	21350	2560	18.60	19.00	1.096	0.01	0.796	0.873
	LTE Band 7	20M	QPSK	50	0	Front	5	Hotspot On	20850	2510	18.65	19.00	1.084	-0.03	0.745	0.808
	LTE Band 7	20M	QPSK	50	0	Front	5	Hotspot On	21100	2535	18.40	19.00	1.148	-0.03	0.744	0.854
	LTE Band 7	20M	QPSK	50	0	Front	5	Hotspot On	21350	2560	18.48	19.00	1.127	-0.03	0.783	0.883
	LTE Band 7	20M	QPSK	100	0	Front	5	Hotspot On	20850	2510	18.64	19.00	1.086	-0.03	0.832	0.904
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	20850	2510	18.71	19.00	1.069	-0.01	1.030	1.101
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	21100	2535	18.59	19.00	1.099	-0.01	1.020	1.121
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	21350	2560	18.60	19.00	1.096	0.08	1.260	1.382
	LTE Band 7	20M	QPSK	50	0	Back	5	Hotspot On	20850	2510	18.65	19.00	1.084	-0.06	1.250	1.355
	LTE Band 7	20M	QPSK	50	0	Back	5	Hotspot On	21100	2535	18.40	19.00	1.148	-0.19	1.100	1.263
	LTE Band 7	20M	QPSK	50	0	Back	5	Hotspot On	21350	2560	18.48	19.00	1.127	-0.15	1.210	1.364
22	LTE Band 7	20M	QPSK	100	0	Back	5	Hotspot On	20850	2510	18.64	19.00	1.086	-0.09	1.300	1.412
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Hotspot On	20850	2510	18.71	19.00	1.069	0.01	0.064	0.068
	LTE Band 7	20M	QPSK	50	0	Left Side	5	Hotspot On	20850	2510	18.65	19.00	1.084	0.02	0.065	0.071
	LTE Band 7	20M	QPSK	1	0	Right Side	5	Hotspot On	20850	2510	18.71	19.00	1.069	0.01	0.493	0.527
	LTE Band 7	20M	QPSK	50	0	Right Side	5	Hotspot On	20850	2510	18.65	19.00	1.084	0.01	0.494	0.535
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Hotspot On	20850	2510	18.71	19.00	1.069	0.01	0.617	0.660
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Hotspot On	20850	2510	18.65	19.00	1.084	0.02	0.634	0.687

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	5	Hotspot On	40400	2571	20.70	21.00	1.072	62.9	1.006	0.01	0.706	0.761
	LTE Band 41	20M	QPSK	50	50	Front	5	Hotspot On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.01	0.706	0.779
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	40400	2571	20.70	21.00	1.072	62.9	1.006	-0.05	1.080	1.164
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	40140	2545	20.45	21.00	1.135	62.9	1.006	0	1.060	1.210
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.01	1.110	1.236
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	41140	2645	20.36	21.00	1.159	62.9	1.006	-0.05	1.190	1.387
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.06	1.090	1.202
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	40140	2545	20.41	21.00	1.146	62.9	1.006	0	1.070	1.233
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	40670	2598	20.54	21.00	1.112	62.9	1.006	-0.04	1.100	1.230
23	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	41140	2645	20.33	21.00	1.167	62.9	1.006	0	1.200	1.409
	LTE Band 41	20M	QPSK	100	0	Back	5	Hotspot On	40400	2571	20.55	21.00	1.109	62.9	1.006	0.04	1.100	1.227
	LTE Band 41	20M	QPSK	1	99	Left Side	5	Hotspot On	40400	2571	20.70	21.00	1.072	62.9	1.006	0.01	0.064	0.069
	LTE Band 41	20M	QPSK	50	50	Left Side	5	Hotspot On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.02	0.063	0.069
	LTE Band 41	20M	QPSK	1	99	Right Side	5	Hotspot On	40400	2571	20.70	21.00	1.072	62.9	1.006	0.01	0.490	0.528
	LTE Band 41	20M	QPSK	50	50	Right Side	5	Hotspot On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.01	0.480	0.529
	LTE Band 41	20M	QPSK	1	99	Bottom Side	5	Hotspot On	40400	2571	20.70	21.00	1.072	62.9	1.006	-0.07	0.521	0.562
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Hotspot On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.01	0.590	0.651



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	1	2412	16.48	17.00	1.127	98.56	1.015	0.05	0.408	0.277	0.317
24	WLAN2.4GHz	802.11b 1Mbps	Back	5	1	2412	16.48	17.00	1.127	98.56	1.015	-0.04	0.727	0.448	0.513
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5	1	2412	16.48	17.00	1.127	98.56	1.015		0.147		
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	1	2412	16.48	17.00	1.127	98.56	1.015	-0.03	0.439	0.321	0.367

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	DH5 1Mbps	Front	5	39	2441	11.01	11.50	1.120	77.13	1.080	-0.03	0.075	0.091
25	Bluetooth	DH5 1Mbps	Back	5	39	2441	11.01	11.50	1.120	77.13	1.080	-0.05	0.137	0.166
	Bluetooth	DH5 1Mbps	Left Side	5	39	2441	11.01	11.50	1.120	77.13	1.080	-0.08	0.026	0.031
	Bluetooth	DH5 1Mbps	Top Side	5	39	2441	11.01	11.50	1.120	77.13	1.080	-0.06	0.100	0.121

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	5	46	5230	14.49	15.00	1.125	85.95	1.163	0.01	0.315	0.203	0.266
26	WLAN5.2GHz	802.11n-HT40 MCS0	Back	5	46	5230	14.49	15.00	1.125	85.95	1.163	0.18	1.766	0.649	0.849
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	5	38	5190	14.47	15.00	1.130	85.95	1.163	0.03	0.899	0.587	0.771
	WLAN5.2GHz	802.11n-HT40 MCS0	Left Side	5	46	5230	14.49	15.00	1.125	85.95	1.163		0.236		
	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	5	46	5230	14.49	15.00	1.125	85.95	1.163	-0.13	0.275	0.184	0.241
	WLAN 5.8GHz	802.11n-HT40 MCS0	Front	5	151	5755	14.42	15.00	1.144	85.95	1.163	0.05	0.208	0.132	0.176
27	WLAN 5.8GHz	802.11n-HT40 MCS0	Back	5	151	5755	14.42	15.00	1.144	85.95	1.163	0.01	0.906	0.683	0.908
	WLAN 5.8GHz	802.11n-HT40 MCS0	Back	5	159	5795	14.11	15.00	1.227	85.95	1.163	0.05		0.536	0.765
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Side	5	151	5755	14.42	15.00	1.144	85.95	1.163	0.06	0.164	0.076	0.101
	WLAN 5.8GHz	802.11n-HT40 MCS0	Top Side	5	151	5755	14.42	15.00	1.144	85.95	1.163	-0.08	0.276	0.180	0.239



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	5	-	P-Sensor On	128	824.2	25.91	26.50	1.146	0.01	0.535	0.613
	GSM850	GPRS 4 Tx slots	Back	5	-	P-Sensor On	128	824.2	25.91	26.50	1.146	0.01	0.874	1.001
28	GSM850	GPRS 4 Tx slots	Back	5	-	P-Sensor On	189	836.4	25.83	26.50	1.167	-0.08	1.210	1.412
	GSM850	GPRS 4 Tx slots	Back	5	-	P-Sensor On	251	848.8	25.77	26.50	1.183	0.01	1.140	1.349
	GSM850	GPRS 4 Tx slots	Back	5	Headset	P-Sensor On	189	836.4	25.83	26.50	1.167	0.01	1.170	1.365
	GSM850	GPRS 4 Tx slots	Back	5	Headset	P-Sensor On	128	824.2	25.91	26.50	1.146	0.01	0.857	0.982
	GSM850	GPRS 4 Tx slots	Back	5	Headset	P-Sensor On	251	848.8	25.77	26.50	1.183	0.02	0.888	1.051
	GSM1900	GPRS 4 Tx slots	Front	5	-	P-Sensor On	661	1880	18.10	18.50	1.096	-0.08	0.896	0.982
	GSM1900	GPRS 4 Tx slots	Front	5	-	P-Sensor On	512	1850.2	18.06	18.50	1.107	0.05	0.922	1.020
	GSM1900	GPRS 4 Tx slots	Front	5	-	P-Sensor On	810	1909.8	18.01	18.50	1.119	0.05	0.851	0.953
29	GSM1900	GPRS 4 Tx slots	Back	5	-	P-Sensor On	661	1880	18.10	18.50	1.096	-0.02	1.300	1.425
	GSM1900	GPRS 4 Tx slots	Back	5	-	P-Sensor On	512	1850.2	18.06	18.50	1.107	0.09	1.260	1.394
	GSM1900	GPRS 4 Tx slots	Back	5	-	P-Sensor On	810	1909.8	18.01	18.50	1.119	-0.01	1.250	1.399
	GSM1900	GPRS 4 Tx slots	Back	5	Headset	P-Sensor On	661	1880	18.10	18.50	1.096	-0.05	1.040	1.140
	GSM1900	GPRS 4 Tx slots	Back	5	Headset	P-Sensor On	512	1850.2	18.06	18.50	1.107	-0.16	1.240	1.372
	GSM1900	GPRS 4 Tx slots	Back	5	Headset	P-Sensor On	810	1909.8	18.01	18.50	1.119	-0.03	1.110	1.243

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	5	-	P-Sensor On	4132	826.4	22.98	23.00	1.005	-0.01	0.784	0.788
	WCDMA Band V	RMC 12.2Kbps	Back	5	-	P-Sensor On	4132	826.4	22.98	23.00	1.005	0.02	1.070	1.075
30	WCDMA Band V	RMC 12.2Kbps	Back	5	-	P-Sensor On	4182	836.4	22.83	23.00	1.040	0.01	1.220	1.269
	WCDMA Band V	RMC 12.2Kbps	Back	5	-	P-Sensor On	4233	846.6	22.94	23.00	1.014	-0.01	1.250	1.267
	WCDMA Band V	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	4233	846.6	22.94	23.00	1.014	0.02	1.170	1.186
	WCDMA Band V	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	4132	826.4	22.98	23.00	1.005	0.01	0.995	1.000
	WCDMA Band V	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	4182	836.4	22.83	23.00	1.040	0.01	1.150	1.196
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9538	1907.6	16.33	16.50	1.040	0.03	0.997	1.037
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9262	1852.4	16.22	16.50	1.067	-0.01	0.953	1.016
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9400	1880	16.29	16.50	1.050	0.02	0.947	0.994
31	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9538	1907.6	16.33	16.50	1.040	-0.03	1.380	1.435
	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9262	1852.4	16.22	16.50	1.067	-0.01	1.310	1.397
	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9400	1880	16.29	16.50	1.050	0.01	1.360	1.427
	WCDMA Band II	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	9538	1907.6	16.33	16.50	1.040	-0.16	1.370	1.425
	WCDMA Band II	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	9262	1852.4	16.22	16.50	1.067	-0.16	1.320	1.408
	WCDMA Band II	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	9400	1880	16.29	16.50	1.050	-0.12	1.350	1.417



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Front	5	-	Full	26865	831.5	23.01	23.50	1.119	-0.04	0.677	0.758
	LTE Band 26	15M	QPSK	36	0	Front	5	-	Full	26865	831.5	22.18	23.00	1.208	0.01	0.440	0.531
32	LTE Band 26	15M	QPSK	1	37	Back	5	-	Full	26865	831.5	23.01	23.50	1.119	-0.11	1.200	1.343
	LTE Band 26	15M	QPSK	36	0	Back	5	-	Full	26865	831.5	22.18	23.00	1.208	0.01	0.705	0.852
	LTE Band 26	15M	QPSK	75	0	Back	5	-	Full	26865	831.5	21.98	23.00	1.265	0.01	0.700	0.885
	LTE Band 26	15M	QPSK	1	37	Back	5	Headset	Full	26865	831.5	23.01	23.50	1.119	0.01	1.000	1.119
	LTE Band 4	20M	QPSK	1	99	Front	5	-	P-Sensor On	20175	1732.5	15.75	16.50	1.189	-0.01	0.691	0.821
	LTE Band 4	20M	QPSK	50	50	Front	5	-	P-Sensor On	20175	1732.5	15.45	16.50	1.274	-0.03	0.667	0.849
	LTE Band 4	20M	QPSK	100	0	Front	5	-	P-Sensor On	20175	1732.5	15.32	16.50	1.312	-0.02	0.645	0.846
33	LTE Band 4	20M	QPSK	1	99	Back	5	-	P-Sensor On	20175	1732.5	15.75	16.50	1.189	0.02	1.020	1.212
	LTE Band 4	20M	QPSK	50	50	Back	5	-	P-Sensor On	20175	1732.5	15.45	16.50	1.274	-0.04	0.924	1.177
	LTE Band 4	20M	QPSK	100	0	Back	5	-	P-Sensor On	20175	1732.5	15.32	16.50	1.312	-0.02	0.884	1.160
	LTE Band 4	20M	QPSK	1	99	Back	5	Headset	P-Sensor On	20175	1732.5	15.75	16.50	1.189	0.02	1.010	1.200
	LTE Band 2	20M	QPSK	1	0	Front	5	-	P-Sensor On	18700	1860	15.65	16.00	1.084	0.08	0.650	0.705
	LTE Band 2	20M	QPSK	50	0	Front	5	-	P-Sensor On	18700	1860	15.72	16.00	1.067	0.04	0.664	0.708
	LTE Band 2	20M	QPSK	1	0	Back	5	-	P-Sensor On	18700	1860	15.65	16.00	1.084	0.03	1.010	1.095
	LTE Band 2	20M	QPSK	1	0	Back	5	-	P-Sensor On	18900	1880	15.60	16.00	1.096	0.03	1.160	1.272
34	LTE Band 2	20M	QPSK	1	0	Back	5	-	P-Sensor On	19100	1900	15.45	16.00	1.135	0.04	1.220	1.385
	LTE Band 2	20M	QPSK	50	0	Back	5	-	P-Sensor On	18700	1860	15.72	16.00	1.067	0.04	1.020	1.088
	LTE Band 2	20M	QPSK	50	0	Back	5	-	P-Sensor On	18900	1880	15.71	16.00	1.069	0.09	1.100	1.176
	LTE Band 2	20M	QPSK	50	0	Back	5	-	P-Sensor On	19100	1900	15.70	16.00	1.072	-0.06	1.220	1.307
	LTE Band 2	20M	QPSK	100	0	Back	5	-	P-Sensor On	18700	1860	15.70	16.00	1.072	0.01	1.200	1.286
	LTE Band 2	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	18700	1860	15.65	16.00	1.084	-0.06	1.210	1.312
	LTE Band 2	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	18900	1880	15.60	16.00	1.096	-0.04	1.130	1.239
	LTE Band 2	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	19100	1900	15.45	16.00	1.135	-0.06	1.080	1.226
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	20850	2510	18.71	19.00	1.069	0.01	0.757	0.809
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	21100	2535	18.59	19.00	1.099	0.01	0.746	0.820
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	21350	2560	18.60	19.00	1.096	0.01	0.796	0.873
	LTE Band 7	20M	QPSK	50	0	Front	5	-	P-Sensor On	20850	2510	18.65	19.00	1.084	-0.03	0.745	0.808
	LTE Band 7	20M	QPSK	50	0	Front	5	-	P-Sensor On	21100	2535	18.40	19.00	1.148	-0.03	0.744	0.854
	LTE Band 7	20M	QPSK	50	0	Front	5	-	P-Sensor On	21350	2560	18.48	19.00	1.127	-0.03	0.783	0.883
	LTE Band 7	20M	QPSK	100	0	Front	5	-	P-Sensor On	20850	2510	18.64	19.00	1.086	-0.03	0.832	0.904
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	20850	2510	18.71	19.00	1.069	-0.01	1.030	1.101
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	21100	2535	18.59	19.00	1.099	-0.01	1.020	1.121
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	21350	2560	18.60	19.00	1.096	0.08	1.260	1.382
	LTE Band 7	20M	QPSK	50	0	Back	5	-	P-Sensor On	20850	2510	18.65	19.00	1.084	-0.06	1.250	1.355
	LTE Band 7	20M	QPSK	50	0	Back	5	-	P-Sensor On	21100	2535	18.40	19.00	1.148	-0.19	1.100	1.263
	LTE Band 7	20M	QPSK	50	0	Back	5	-	P-Sensor On	21350	2560	18.48	19.00	1.127	-0.15	1.210	1.364
35	LTE Band 7	20M	QPSK	100	0	Back	5	-	P-Sensor On	20850	2510	18.64	19.00	1.086	-0.09	1.300	1.412
	LTE Band 7	20M	QPSK	100	0	Back	5	Headset	P-Sensor On	20850	2510	18.64	19.00	1.086	-0.01	0.862	0.936
	LTE Band 7	20M	QPSK	100	0	Back	5	Headset	P-Sensor On	21100	2535	18.48	19.00	1.127	0.05	1.070	1.206
	LTE Band 7	20M	QPSK	100	0	Back	5	Headset	P-Sensor On	21350	2560	18.63	19.00	1.089	0.09	0.923	1.005



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	5	-	P-Sensor On	40400	2571	20.70	21.00	1.072	62.9	1.006	0.01	0.706	0.761
	LTE Band 41	20M	QPSK	50	50	Front	5	-	P-Sensor On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.01	0.706	0.779
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	40400	2571	20.70	21.00	1.072	62.9	1.006	-0.05	1.080	1.164
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	40140	2545	20.45	21.00	1.135	62.9	1.006	0	1.060	1.210
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.01	1.110	1.236
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	41140	2645	20.36	21.00	1.159	62.9	1.006	-0.05	1.190	1.387
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.06	1.090	1.202
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	40140	2545	20.41	21.00	1.146	62.9	1.006	0	1.070	1.233
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	40670	2598	20.54	21.00	1.112	62.9	1.006	-0.04	1.100	1.230
36	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	41140	2645	20.33	21.00	1.167	62.9	1.006	0	1.200	1.409
	LTE Band 41	20M	QPSK	100	0	Back	5	-	P-Sensor On	40400	2571	20.55	21.00	1.109	62.9	1.006	0.04	1.100	1.227
	LTE Band 41	20M	QPSK	50	50	Back	5	Headset	P-Sensor On	40400	2571	20.60	21.00	1.096	62.9	1.006	0.16	0.918	1.013
	LTE Band 41	20M	QPSK	50	50	Back	5	Headset	P-Sensor On	40140	2545	20.41	21.00	1.146	62.9	1.006	0.17	0.867	0.999
	LTE Band 41	20M	QPSK	50	50	Back	5	Headset	P-Sensor On	40670	2598	20.54	21.00	1.112	62.9	1.006	0.15	0.928	1.038
	LTE Band 41	20M	QPSK	50	50	Back	5	Headset	P-Sensor On	41140	2645	20.33	21.00	1.167	62.9	1.006	0.15	0.971	1.140

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	1	2412	16.48	17.00	1.127	98.56	1.015	0.05	0.277	0.317
37	WLAN2.4GHz	802.11b 1Mbps	Back	5	1	2412	16.48	17.00	1.127	98.56	1.015	-0.04	0.448	0.513

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	DH5 1Mbps	Front	5	39	2441	11.01	11.50	1.120	77.13	1.080	-0.03	0.075	0.091
38	Bluetooth	DH5 1Mbps	Back	5	39	2441	11.01	11.50	1.120	77.13	1.080	-0.05	0.137	0.166

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	5	62	5310	14.41	15.00	1.146	85.95	1.163	0.02	0.207	0.276
39	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5	62	5310	14.41	15.00	1.146	85.95	1.163	0.02	0.706	0.941
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5	54	5270	14.41	15.00	1.146	85.95	1.163	-0.13	0.475	0.633
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	5	142	5710	14.37	15.00	1.157	85.95	1.163	0.09	0.177	0.238
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5	142	5710	14.37	15.00	1.157	85.95	1.163	0.18	0.762	1.025
40	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5	102	5710	14.30	15.00	1.176	85.95	1.163	0.02	0.760	1.039
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	5	151	5755	14.42	15.00	1.144	85.95	1.163	0.05	0.132	0.176
41	WLAN5.8GHz	802.11n-HT40 MCS0	Back	5	151	5755	14.42	15.00	1.144	85.95	1.163	0.01	0.683	0.908
	WLAN 5.8GHz	802.11n-HT40 MCS0	Back	5	159	5795	14.11	15.00	1.227	85.95	1.163	0.05	0.536	0.765



15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
42	GSM850	GPRS 4 Tx slots	Back	0	Full	128	824.2	26.45	27.50	1.274	-0.04	1.540	1.961
	GSM1900	GPRS 4 Tx slots	Front	0	Handheld On	661	1880	23.30	24.00	1.175	0	2.090	2.456
	GSM1900	GPRS 4 Tx slots	Front	0	Handheld On	512	1850.2	23.20	24.00	1.202	-0.03	2.120	2.549
	GSM1900	GPRS 4 Tx slots	Front	0	Handheld On	810	1909.8	23.22	24.00	1.197	-0.04	2.370	2.836
	GSM1900	GPRS 4 Tx slots	Back	0	Handheld On	661	1880	23.30	24.00	1.175	-0.05	2.660	3.125
43	GSM1900	GPRS 4 Tx slots	Back	0	Handheld On	512	1850.2	23.20	24.00	1.202	0.04	2.840	3.414
	GSM1900	GPRS 4 Tx slots	Back	0	Handheld On	810	1909.8	23.22	24.00	1.202	0.02	2.560	3.064
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Handheld On	661	1880	23.30	24.00	1.197	-0.04	1.920	2.256
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Handheld On	512	1850.2	23.20	24.00	1.175	-0.03	1.980	2.380
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Handheld On	810	1909.8	23.22	24.00	1.202	-0.07	1.920	2.298

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4132	826.4	23.40	23.50	1.023	-0.09	1.990	2.036
44	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4182	836.4	23.12	23.50	1.091	-0.03	2.260	2.467
	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4233	846.6	23.09	23.50	1.099	-0.07	2.140	2.352
	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9538	1907.6	19.88	20.50	1.153	0.01	2.350	2.711
	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9262	1852.4	19.74	20.50	1.191	-0.01	2.190	2.609
	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9400	1880	19.83	20.50	1.167	-0.03	2.420	2.824
	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9538	1907.6	19.88	20.50	1.153	-0.09	2.420	2.791
	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9262	1852.4	19.74	20.50	1.191	-0.08	2.510	2.990
45	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9400	1880	19.83	20.50	1.167	-0.02	2.610	3.045
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9538	1907.6	19.88	20.50	1.153	-0.09	2.020	2.330
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9262	1852.4	19.74	20.50	1.191	-0.12	1.900	2.263
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9400	1880	19.83	20.50	1.167	-0.14	2.060	2.404



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
46	LTE Band 26	15M	QPSK	1	37	Back	0	Full	26865	831.5	23.01	23.50	1.119	-0.09	1.930	2.161
	LTE Band 26	15M	QPSK	36	0	Back	0	Full	26865	831.5	22.18	23.00	1.208	0.01	1.290	1.558
	LTE Band 26	15M	QPSK	75	0	Back	0	Full	26865	831.5	21.98	23.00	1.265	0.01	1.230	1.556
47	LTE Band 4	20M	QPSK	1	99	Front	0	Handheld On	20175	1732.5	19.10	20.00	1.230	0.04	1.640	2.018
	LTE Band 4	20M	QPSK	50	50	Front	0	Handheld On	20175	1732.5	19.20	20.00	1.202	0.05	1.590	1.912
	LTE Band 4	20M	QPSK	1	99	Back	0	Handheld On	20175	1732.5	19.10	20.00	1.230	-0.04	2.460	3.026
	LTE Band 4	20M	QPSK	50	50	Back	0	Handheld On	20175	1732.5	19.20	20.00	1.202	-0.07	2.370	2.849
	LTE Band 4	20M	QPSK	100	0	Back	0	Handheld On	20175	1732.5	18.95	20.00	1.274	0.01	2.320	2.955
	LTE Band 4	20M	QPSK	1	99	Bottom Side	0	Handheld On	20175	1732.5	19.10	20.00	1.230	-0.05	2.390	2.940
	LTE Band 4	20M	QPSK	50	50	Bottom Side	0	Handheld On	20175	1732.5	19.20	20.00	1.202	-0.07	2.430	2.922
	LTE Band 4	20M	QPSK	100	0	Bottom Side	0	Handheld On	20175	1732.5	18.95	20.00	1.274	-0.01	2.380	3.031
	LTE Band 2	20M	QPSK	1	0	Front	0	Handheld On	18700	1860	19.09	20.00	1.233	-0.02	2.000	2.466
48	LTE Band 2	20M	QPSK	1	0	Front	0	Handheld On	18900	1880	18.70	20.00	1.349	-0.07	2.180	2.941
	LTE Band 2	20M	QPSK	1	0	Front	0	Handheld On	19100	1900	18.72	20.00	1.343	-0.02	2.040	2.739
	LTE Band 2	20M	QPSK	50	0	Front	0	Handheld On	18700	1860	19.07	20.00	1.239	-0.03	2.060	2.552
	LTE Band 2	20M	QPSK	50	0	Front	0	Handheld On	18900	1880	19.06	20.00	1.242	-0.05	2.160	2.682
	LTE Band 2	20M	QPSK	50	0	Front	0	Handheld On	19100	1900	19.00	20.00	1.259	-0.02	2.090	2.631
	LTE Band 2	20M	QPSK	100	0	Front	0	Handheld On	18700	1860	19.10	20.00	1.230	-0.05	2.150	2.645
	LTE Band 2	20M	QPSK	1	0	Back	0	Handheld On	18700	1860	19.09	20.00	1.233	-0.05	2.550	3.144
	LTE Band 2	20M	QPSK	1	0	Back	0	Handheld On	18900	1880	18.70	20.00	1.349	-0.06	2.370	3.197
	LTE Band 2	20M	QPSK	1	0	Back	0	Handheld On	19100	1900	18.72	20.00	1.343	-0.05	2.320	3.115
	LTE Band 2	20M	QPSK	50	0	Back	0	Handheld On	18700	1860	19.07	20.00	1.239	-0.11	2.380	2.948
	LTE Band 2	20M	QPSK	50	0	Back	0	Handheld On	18900	1880	19.06	20.00	1.242	-0.07	2.490	3.092
	LTE Band 2	20M	QPSK	50	0	Back	0	Handheld On	19100	1900	19.00	20.00	1.259	-0.09	2.390	3.009
49	LTE Band 2	20M	QPSK	100	0	Back	0	Handheld On	18700	1860	19.10	20.00	1.230	-0.08	2.450	3.014
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Handheld On	18700	1860	19.09	20.00	1.233	-0.06	1.830	2.257
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Handheld On	18900	1880	18.70	20.00	1.349	-0.03	2.053	2.769
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Handheld On	19100	1900	18.72	20.00	1.343	-0.05	2.250	3.021
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Handheld On	18700	1860	19.07	20.00	1.239	-0.04	2.040	2.527
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Handheld On	18900	1880	19.06	20.00	1.242	-0.02	2.080	2.583
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Handheld On	19100	1900	19.00	20.00	1.259	-0.04	2.300	2.896
	LTE Band 2	20M	QPSK	100	0	Bottom Side	0	Handheld On	18700	1860	19.10	20.00	1.230	-0.03	2.170	2.670
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	20850	2510	19.20	19.50	1.072	-0.01	2.380	2.550
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	21100	2535	18.86	19.50	1.159	-0.11	2.590	3.001
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	21350	2560	19.11	19.50	1.094	-0.11	2.520	2.757
	LTE Band 7	20M	QPSK	50	0	Back	0	Handheld On	20850	2510	19.10	19.50	1.096	-0.09	2.570	2.818
LTE Band 7	20M	QPSK	50	0	Back	0	Handheld On	21100	2535	18.95	19.50	1.135	-0.09	2.590	2.940	
LTE Band 7	20M	QPSK	50	0	Back	0	Handheld On	21350	2560	18.97	19.50	1.130	0.11	2.640	2.983	
LTE Band 7	20M	QPSK	100	0	Back	0	Handheld On	20850	2510	19.12	19.50	1.091	0.1	2.500	2.729	



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	0	Handheld On	40400	2571	22.96	23.00	1.009	62.9	1.006	0.01	1.930	1.960
	LTE Band 41	20M	QPSK	1	99	Front	0	Handheld On	40140	2545	22.90	23.00	1.023	62.9	1.006	-0.12	1.860	1.915
	LTE Band 41	20M	QPSK	1	99	Front	0	Handheld On	40670	2598	22.91	23.00	1.021	62.9	1.006	-0.03	1.900	1.951
	LTE Band 41	20M	QPSK	1	99	Front	0	Handheld On	41140	2645	22.68	23.00	1.076	62.9	1.006	-0.07	2.070	2.242
	LTE Band 41	20M	QPSK	50	50	Front	0	Handheld On	40400	2571	21.92	23.00	1.282	62.9	1.006	-0.03	1.450	1.871
	LTE Band 41	20M	QPSK	100	0	Front	0	Handheld On	40400	2571	21.89	23.00	1.291	62.9	1.006	-0.02	1.460	1.896
50	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	40400	2571	22.96	23.00	1.009	62.9	1.006	0.09	3.290	3.340
	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	40140	2545	22.90	23.00	1.023	62.9	1.006	0.05	2.950	3.037
	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	40670	2598	22.91	23.00	1.021	62.9	1.006	0.16	3.070	3.153
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	40400	2571	21.92	23.00	1.282	62.9	1.006	0.03	1.990	2.567
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	40140	2545	21.83	23.00	1.309	62.9	1.006	0.11	1.900	2.502
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	40670	2598	21.87	23.00	1.297	62.9	1.006	0.12	1.880	2.453
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	41140	2645	21.62	23.00	1.374	62.9	1.006	0.16	2.000	2.765
	LTE Band 41	20M	QPSK	100	0	Back	0	Handheld On	40400	2571	21.89	23.00	1.291	62.9	1.006	0.08	1.900	2.468

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0	62	5310	14.41	15.00	1.146	85.95	1.163		1.745		
51	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0	62	5310	14.41	15.00	1.146	85.95	1.163	-0.05	3.228	0.418	0.557
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Side	0	62	5310	14.37	15.00	1.156	85.95	1.163		1.075		
	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0	62	5310	14.41	15.00	1.146	85.95	1.163		1.450		
	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	0	142	5710	14.37	15.00	1.157	85.95	1.163		1.764		
52	WLAN 5.5GHz	802.11n-HT40 MCS0	Back	0	142	5710	14.37	15.00	1.157	85.95	1.163	-0.06	3.924	0.428	0.576
	WLAN 5.5GHz	802.11n-HT40 MCS0	Left Side	0	142	5710	14.37	15.00	1.157	85.95	1.163		0.713		
	WLAN 5.5GHz	802.11n-HT40 MCS0	Top Side	0	142	5710	14.37	15.00	1.157	85.95	1.163		1.826		



15.5 Repeated SAR Measurement

<1g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Back	5	Hotspot On	4233	846.6	22.94	23	1.014	-0.01	1.250	1	1.267
2nd	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Back	5	Hotspot On	4233	846.6	22.94	23	1.014	0.03	1.230	1.016	1.247
1st	LTE Band 4	-	20M	QPSK	1	99	Bottom Side	5	Hotspot On	20175	1732.5	15.23	16	1.194	-0.03	1.130	1	1.349
2nd	LTE Band 4	-	20M	QPSK	1	99	Bottom Side	5	Hotspot On	20175	1732.5	15.23	16	1.194	0.05	1.120	1.009	1.337
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	5	P-Sensor On	9538	1907.6	16.33	16.50	1.040	-0.03	1.380	1	1.435
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	5	P-Sensor On	9538	1907.6	16.33	16.50	1.040	0.02	1.370	1.007	1.425
1st	LTE Band 7	-	20M	QPSK	100	0	Back	5	P-Sensor On	20850	2510	18.64	19	1.086	-0.09	1.300	1	1.412
2nd	LTE Band 7	-	20M	QPSK	100	0	Back	5	P-Sensor On	20850	2510	18.64	19	1.086	0.01	1.280	1.016	1.391

<10g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	GSM1900	GPRS (4 Tx slots)	-	-	-	-	Back	0	Handheld On	512	1850.2	23.20	24.00	1.202	-	-	0.04	2.840	1	3.414
2nd	GSM1900	GPRS (4 Tx slots)	-	-	-	-	Back	0	Handheld On	512	1850.2	23.20	24.00	1.202	-	-	0.01	2.820	1.007	3.390
1st	WCDMA V	RMC 12.2Kbps	-	-	-	-	Back	0	Full	4182	836.4	23.12	23.50	1.091	-	-	-0.03	2.260	1	2.467
2nd	WCDMA V	RMC 12.2Kbps	-	-	-	-	Back	0	Full	4182	836.4	23.12	23.50	1.091	-	-	-0.08	2.230	1.013	2.434
1st	LTE Band 4	-	20M	QPSK	1	99	Back	0	Handheld On	20175	1732.5	19.10	20.00	1.230	-	-	-0.04	2.460	1	3.026
2nd	LTE Band 4	-	20M	QPSK	1	99	Back	0	Handheld On	20175	1732.5	19.10	20.00	1.230	-	-	0.05	2.430	1.012	2.990
1st	LTE Band 41	-	20M	QPSK	1	99	Back	0	Handheld On	40400	2571	22.96	23.00	1.009	62.9	1.006	0.09	3.290	1	3.340
2nd	LTE Band 41	-	20M	QPSK	1	99	Back	0	Handheld On	40400	2571	22.96	23.00	1.009	62.9	1.006	0.01	3.250	1.012	3.300

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
13.	GSM Voice + Bluetooth	Yes	Yes		
14.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
15.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
16.	LTE + Bluetooth	Yes	Yes	Yes	Yes
17.	Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
18.	Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
19.	GSM Voice + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		
20.	GPRS/EDGE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
21.	WCDMA + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
22.	LTE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
23.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		
24.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
25.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
26.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
6. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
7. For simultaneously analysis of hotspot and body-worn, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
8. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
9. The reported SAR summation is calculated based on the same configuration and test position.
10. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) The SPLSR calculated results please refer to section 16.5.



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.177	1.043	0.679	0.232	1.22	1.09
		Right Tilted	0.101	0.738	0.546	0.238	0.84	0.89
		Left Cheek	0.233	1.043	0.679	0.123	1.28	1.04
		Left Tilted	0.107	1.043	0.679	0.122	1.15	0.91
	GSM1900	Right Cheek	0.083	1.043	0.679	0.232	1.13	0.99
		Right Tilted	0.047	0.738	0.546	0.238	0.79	0.83
		Left Cheek	0.063	1.043	0.679	0.123	1.11	0.87
		Left Tilted	0.027	1.043	0.679	0.122	1.07	0.83
WCDMA	Band V	Right Cheek	0.235	1.043	0.679	0.232	1.28	1.15
		Right Tilted	0.162	0.738	0.546	0.238	0.90	0.95
		Left Cheek	0.304	1.043	0.679	0.123	1.35	1.11
		Left Tilted	0.144	1.043	0.679	0.122	1.19	0.95
	Band II	Right Cheek	0.133	1.043	0.679	0.232	1.18	1.04
		Right Tilted	0.055	0.738	0.546	0.238	0.79	0.84
		Left Cheek	0.082	1.043	0.679	0.123	1.13	0.88
		Left Tilted	0.031	1.043	0.679	0.122	1.07	0.83
LTE	Band 26	Right Cheek	0.264	1.043	0.679	0.232	1.31	1.18
		Right Tilted	0.206	0.738	0.546	0.238	0.94	0.99
		Left Cheek	0.344	1.043	0.679	0.123	1.39	1.15
		Left Tilted	0.158	1.043	0.679	0.122	1.20	0.96
	Band 4	Right Cheek	0.121	1.043	0.679	0.232	1.16	1.03
		Right Tilted	0.067	0.738	0.546	0.238	0.81	0.85
		Left Cheek	0.177	1.043	0.679	0.123	1.22	0.98
		Left Tilted	0.081	1.043	0.679	0.122	1.12	0.88
	Band 2	Right Cheek	0.121	1.043	0.679	0.232	1.16	1.03
		Right Tilted	0.058	0.738	0.546	0.238	0.80	0.84
		Left Cheek	0.137	1.043	0.679	0.123	1.18	0.94
		Left Tilted	0.057	1.043	0.679	0.122	1.10	0.86
	Band 7	Right Cheek	0.520	1.043	0.679	0.232	1.56	1.43
		Right Tilted	0.182	0.738	0.546	0.238	0.92	0.97
		Left Cheek	0.314	1.043	0.679	0.123	1.36	1.12
		Left Tilted	0.337	1.043	0.679	0.122	1.38	1.14
	Band 41	Right Cheek	0.140	1.043	0.679	0.232	1.18	1.05
		Right Tilted	0.068	0.738	0.546	0.238	0.81	0.85
		Left Cheek	0.105	1.043	0.679	0.123	1.15	0.91
		Left Tilted	0.108	1.043	0.679	0.122	1.15	0.91

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2			1+3+4		
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	0.613	0.317	0.266	0.091	0.93			0.97		
		Back	1.412	0.513	0.908	0.166	1.93	0.02	01	2.49	0.03	02
		Left Side	0.308	0.513	0.101	0.031	0.82			0.44		
		Right Side	0.126				0.13			0.13		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	0.478				0.48			0.48		
	GSM1900	Front	0.849	0.317	0.266	0.091	1.17			1.21		
		Back	1.254	0.513	0.908	0.166	1.77	0.01	03	2.33	0.02	04
		Left Side	0.087	0.513	0.101	0.031	0.60			0.22		
		Right Side	0.042				0.04			0.04		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	1.431				1.43			1.43		
WCDMA	Band V	Front	0.788	0.317	0.266	0.091	1.11			1.15		
		Back	1.269	0.513	0.908	0.166	1.78	0.02	05	2.34	0.02	06
		Left Side	0.510	0.513	0.101	0.031	1.02			0.64		
		Right Side	0.219				0.22			0.22		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	0.677				0.68			0.68		
	Band II	Front	0.745	0.317	0.266	0.091	1.06			1.10		
		Back	1.093	0.513	0.908	0.166	1.61	0.01	07	2.17	0.02	08
		Left Side	0.073	0.513	0.101	0.031	0.59			0.21		
		Right Side	0.038				0.04			0.04		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	1.477				1.48			1.48		



WWAN Band	Exposure Position	1	2	3	4	1+2			1+3+4			
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
LTE	Band 26	Front	0.758	0.317	0.266	0.091	1.08			1.12		
		Back	1.343	0.513	0.908	0.166	1.86	0.01	09	2.42	0.02	10
		Left Side	0.414	0.513	0.101	0.031	0.93			0.55		
		Right Side	0.150				0.15			0.15		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	0.825				0.83			0.83		
	Band 4	Front	0.661	0.317	0.266	0.091	0.98			1.02		
		Back	0.935	0.513	0.908	0.166	1.45			2.01	0.02	11
		Left Side	0.080	0.513	0.101	0.031	0.59			0.21		
		Right Side	0.051				0.05			0.05		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	1.349				1.35			1.35		
	Band 2	Front	0.541	0.317	0.266	0.091	0.86			0.90		
		Back	0.780	0.513	0.908	0.166	1.29			1.85	0.02	12
		Left Side	0.063	0.513	0.101	0.031	0.58			0.20		
		Right Side	0.021				0.02			0.02		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	1.367				1.37			1.37		
	Band 7	Front	0.904	0.317	0.266	0.091	1.22			1.26		
		Back	1.412	0.513	0.908	0.166	1.93	0.02	13	2.49	0.03	14
		Left Side	0.071	0.513	0.101	0.031	0.58			0.20		
		Right Side	0.535				0.54			0.54		
		Top Side		0.367	0.241	0.121	0.37			0.36		
		Bottom Side	0.687				0.69			0.69		
Band 41	Front	0.779	0.317	0.266	0.091	1.10			1.14			
	Back	1.409	0.513	0.908	0.166	1.92	0.02	15	2.48	0.03	16	
	Left Side	0.069	0.513	0.101	0.031	0.58			0.20			
	Right Side	0.529				0.53			0.53			
	Top Side		0.367	0.241	0.121	0.37			0.36			
	Bottom Side	0.651				0.65			0.65			



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2			1+3+4		
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	0.613	0.317	0.276	0.091	0.93			0.98		
		Back	1.412	0.513	1.039	0.166	1.93	0.02	17	2.62	0.03	18
		Back at 5mm Headset	1.365				1.37			1.37		
	GSM1900	Front	1.020	0.317	0.276	0.091	1.34			1.39		
		Back	1.425	0.513	1.039	0.166	1.94	0.02	19	2.63	0.03	20
		Back at 5mm Headset	1.372				1.37			1.37		
WCDMA	Band V	Front	0.788	0.317	0.276	0.091	1.11			1.16		
		Back	1.269	0.513	1.039	0.166	1.78	0.01	21	2.47	0.02	22
		Back at 5mm Headset	1.196				1.20			1.20		
	Band II	Front	1.037	0.317	0.276	0.091	1.35			1.40		
		Back	1.435	0.513	1.039	0.166	1.95	0.02	23	2.64	0.03	24
		Back at 5mm Headset	1.425				1.43			1.43		
LTE	Band 26	Front	0.758	0.317	0.276	0.091	1.08			1.13		
		Back	1.343	0.513	1.039	0.166	1.86	0.01	25	2.55	0.02	26
		Back at 5mm Headset	1.119				1.12			1.12		
	Band 4	Front	0.849	0.317	0.276	0.091	1.17			1.22		
		Back	1.212	0.513	1.039	0.166	1.73	0.01	27	2.42	0.03	28
		Back at 5mm Headset	1.200				1.20			1.20		
	Band 2	Front	0.708	0.317	0.276	0.091	1.03			1.08		
		Back	1.385	0.513	1.039	0.166	1.90	0.02	29	2.59	0.03	30
		Back at 5mm Headset	1.312				1.31			1.31		
	Band 7	Front	0.904	0.317	0.276	0.091	1.22			1.27		
		Back	1.412	0.513	1.039	0.166	1.93	0.02	31	2.62	0.03	32
		Back at 5mm Headset	1.206				1.21			1.21		
	Band 41	Front	0.779	0.317	0.276	0.091	1.10			1.15		
		Back	1.409	0.513	1.039	0.166	1.92	0.02	33	2.61	0.03	34
		Back at 5mm Headset	1.140				1.14			1.14		

16.4 Product specific 10g SAR Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2
			WWAN Bottom	5GHz WLAN	Summed 10g SAR (W/kg)
			10g SAR (W/kg)	10g SAR (W/kg)	
GSM	GSM850	Back	1.961	0.576	2.54
	GSM1900	Front	2.836	0.576	3.41
		Back	3.414	0.576	3.99
		Bottom side	2.380		2.38
WCDMA	Band V	Back	2.467	0.576	3.04
	Band II	Front	2.824	0.576	3.40
		Back	3.045	0.576	3.62
		Bottom side	2.404		2.40
LTE	Band 26	Back	2.161	0.576	2.74
	Band 4	Front	2.018	0.576	2.59
		Back	3.026	0.576	3.60
		Bottom side	3.031		3.03
	Band 2	Front	2.941	0.576	3.52
		Back	3.197	0.576	3.77
		Bottom side	3.021		3.02
	Band 7	Back	3.001	0.576	3.58
	Band 41	Front	2.242	0.576	2.82
		Back	3.340	0.576	3.92


Remark: For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

16.5 SPLSR Evaluation and Analysis


General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.


Case #1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.412	5	2.9	-78.5	-1.08	155.5	1.93	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

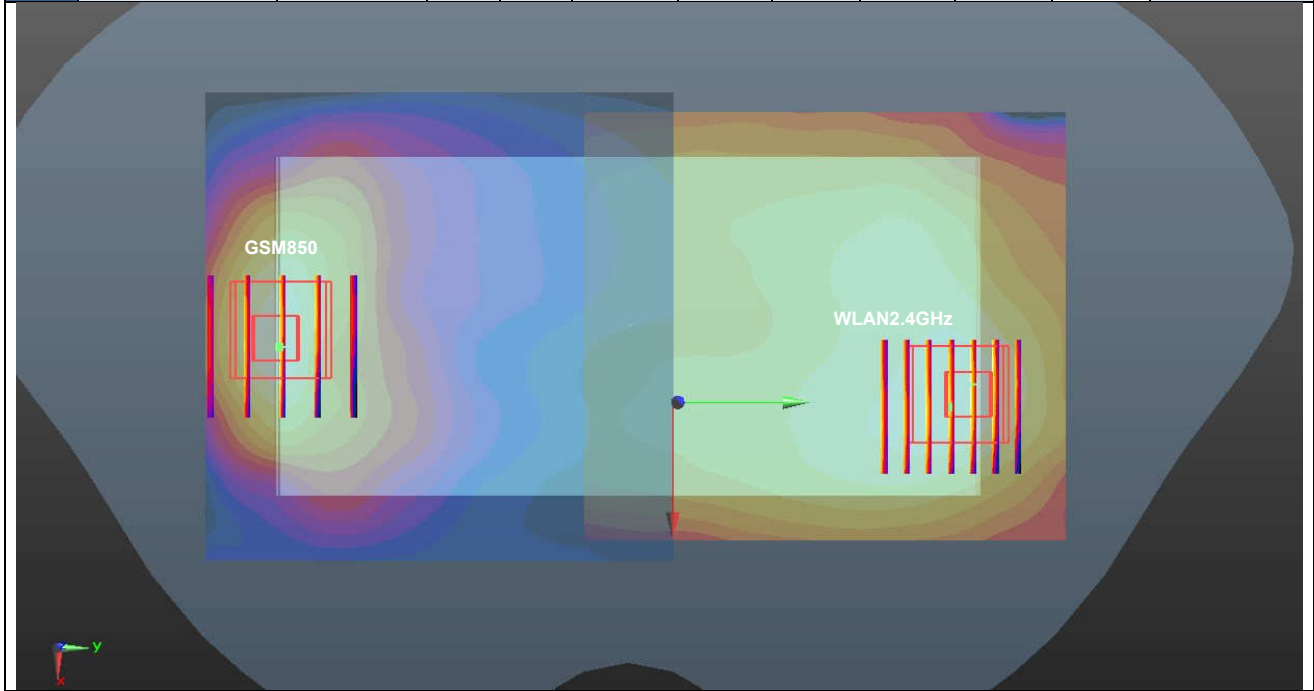


Case #2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.412	5	2.9	-78.5	-1.08	149.6	2.49	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	GSM850	Back	1.412	5	2.9	-78.5	-1.08	149.4	2.49	0.03	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

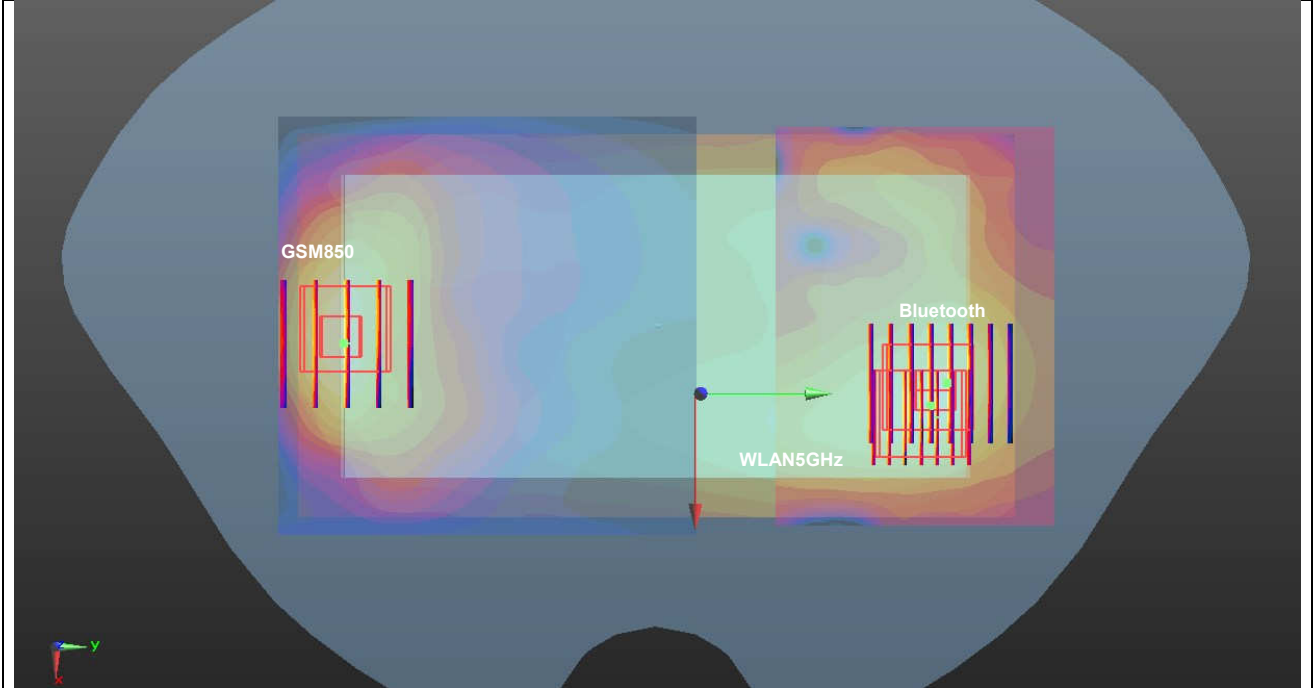


Case #3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.254	5	6	-80	-1.16	156.8	1.77	0.01	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

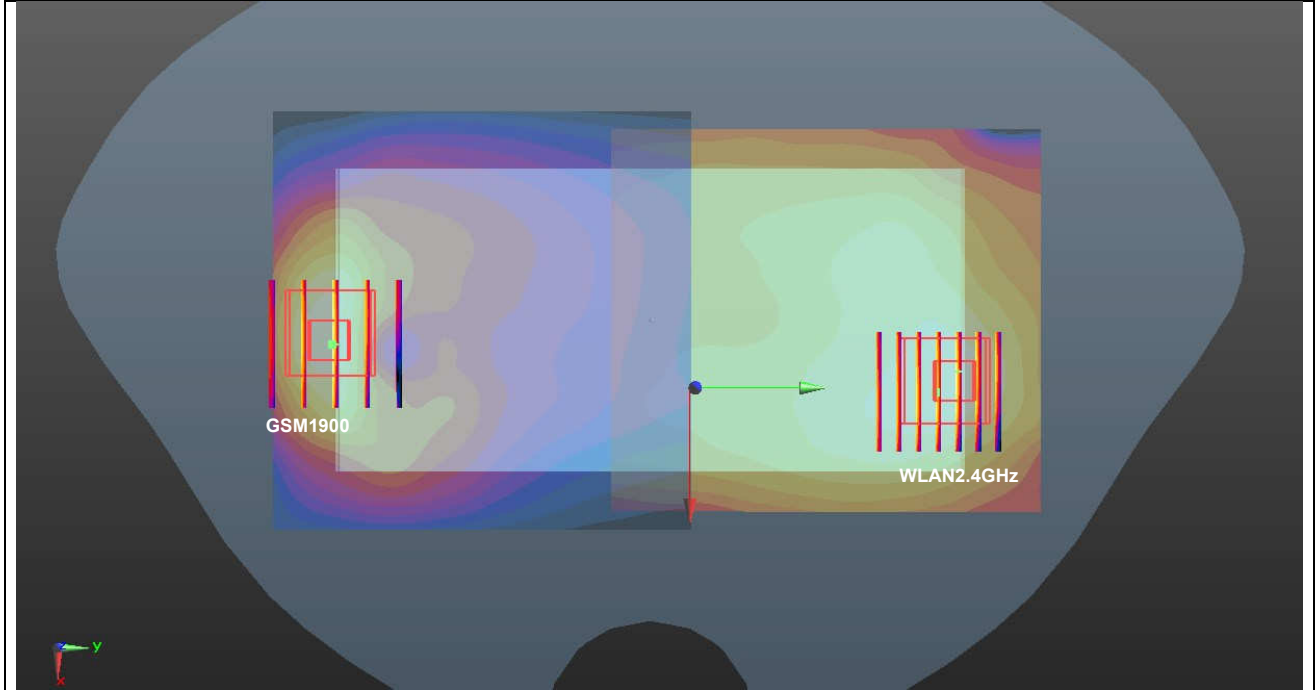


Case #4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #4	GSM1900	Back	1.254	5	6	-80	-1.16	150.8	2.33	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	GSM1900	Back	1.254	5	6	-80	-1.16	150.6	2.33	0.02	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

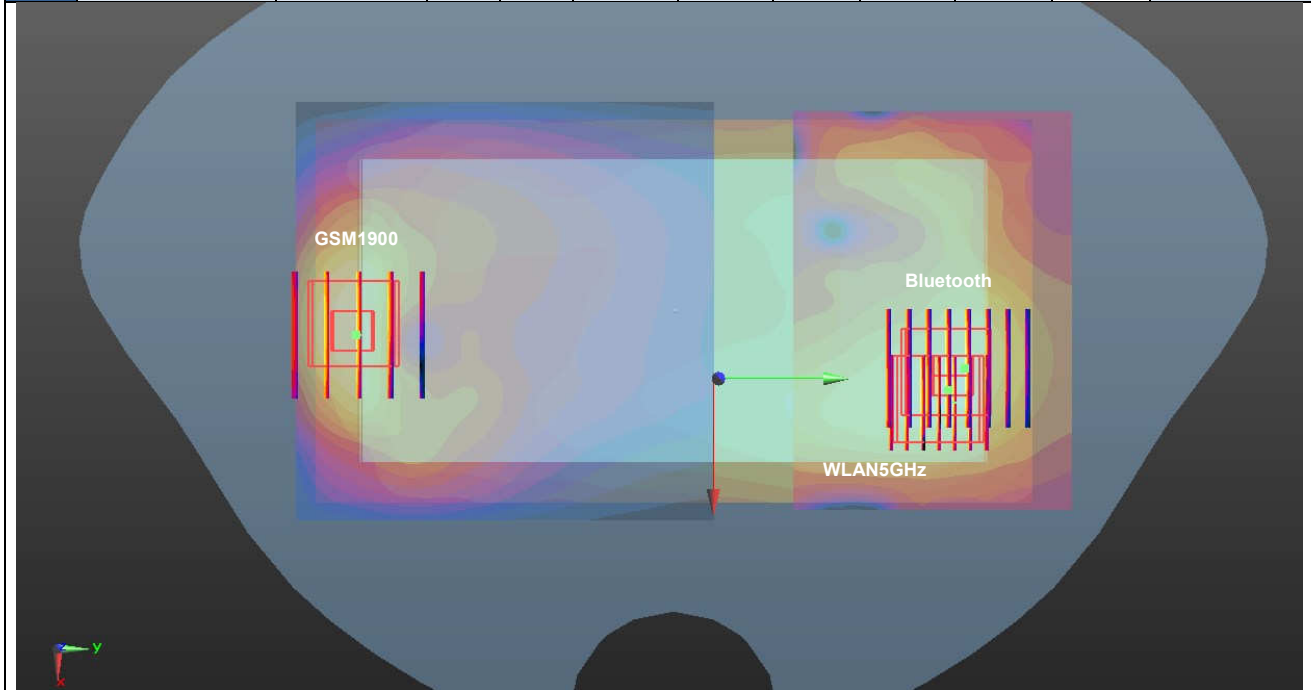


Case #5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Back	1.269	5	4.4	-78.5	-0.97	155.4	1.78	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

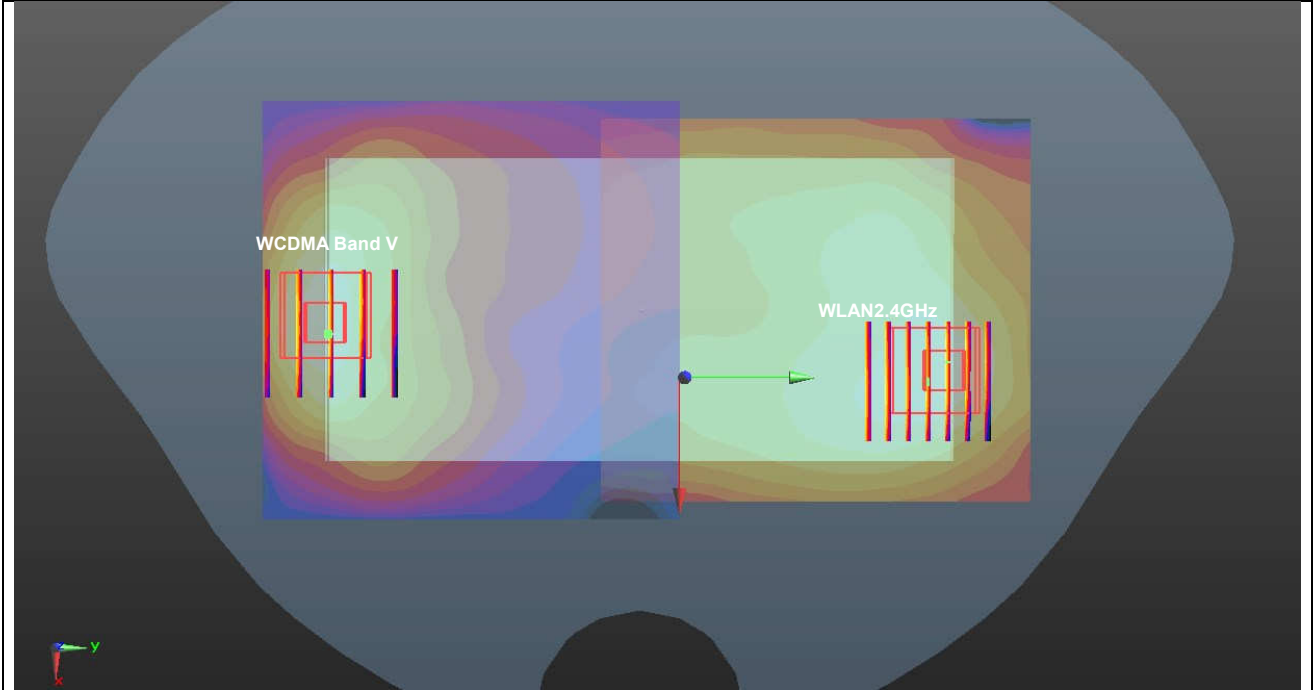


Case #6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Back	1.269	5	4.4	-78.5	-0.97	149.5	2.34	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	WCDMA V	Back	1.269	5	4.4	-78.5	-0.97	149.3	2.34	0.02	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

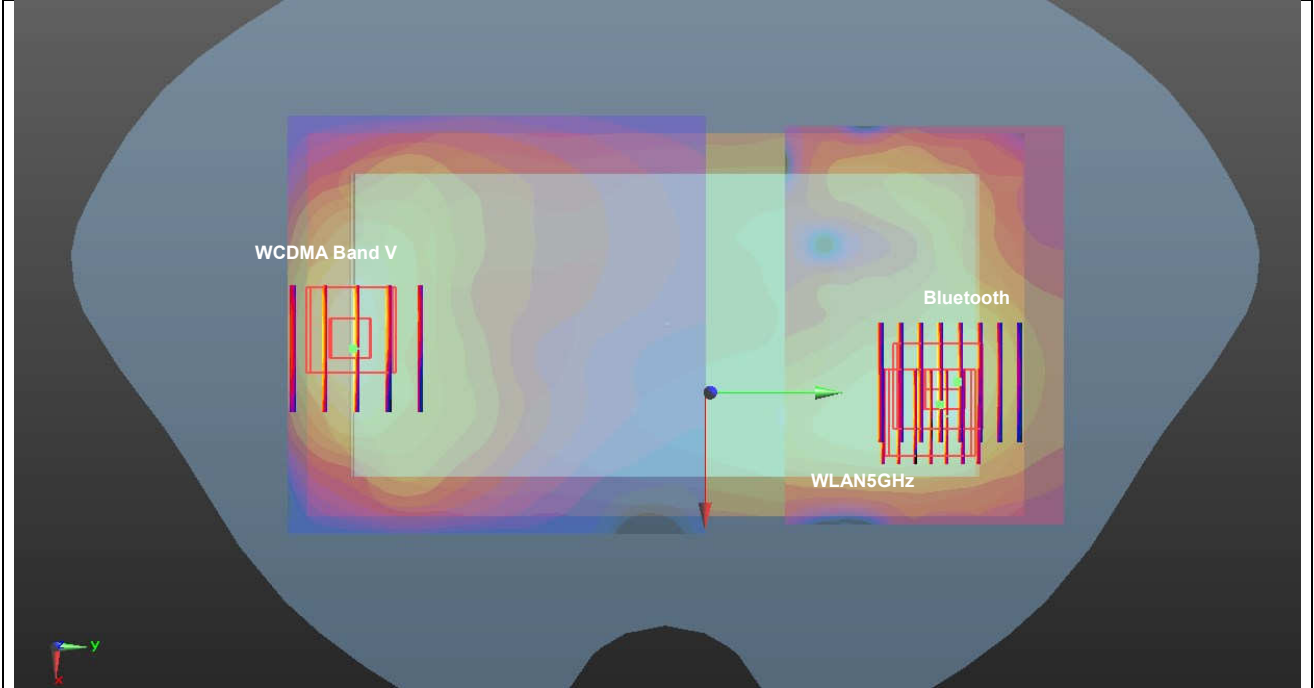


Case #7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band II	Back	1.093	5	8.2	-82.4	-0.92	159.1	1.61	0.01	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

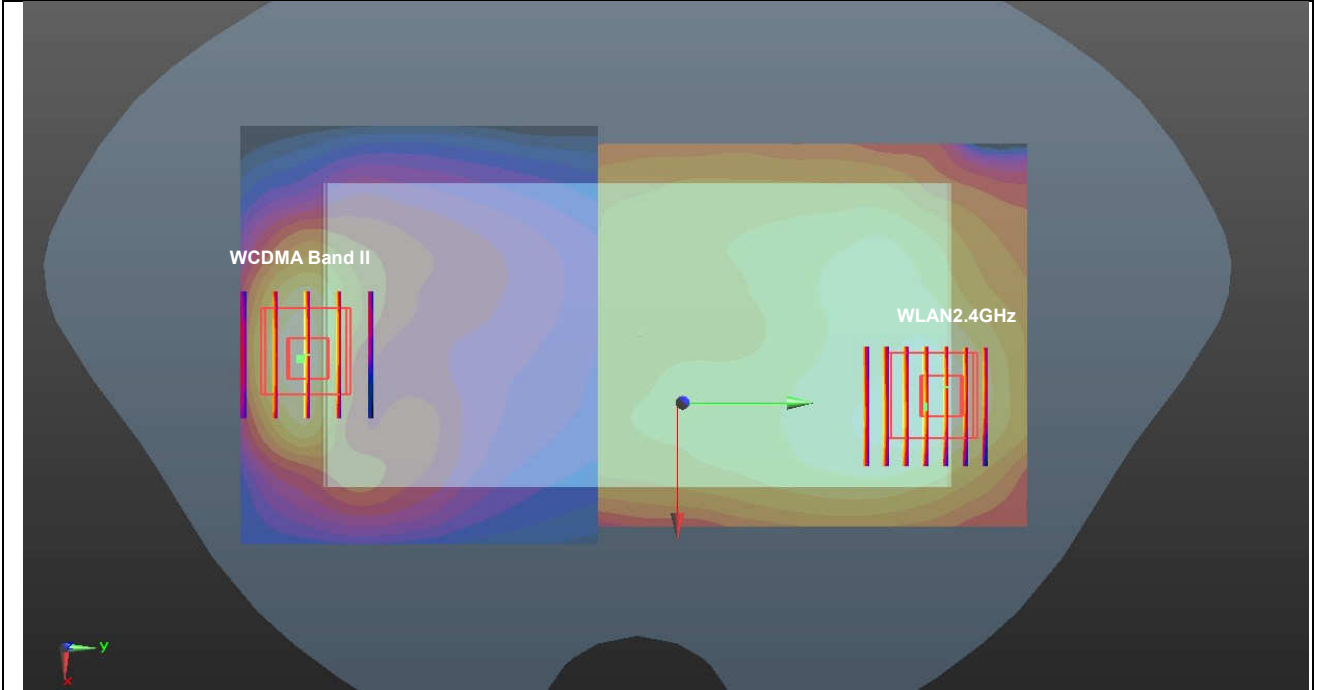


Case #8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.093	5	8.2	-82.4	-0.92	153.0	2.17	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	WCDMA II	Back	1.093	5	8.2	-82.4	-0.92	152.9	2.17	0.02	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

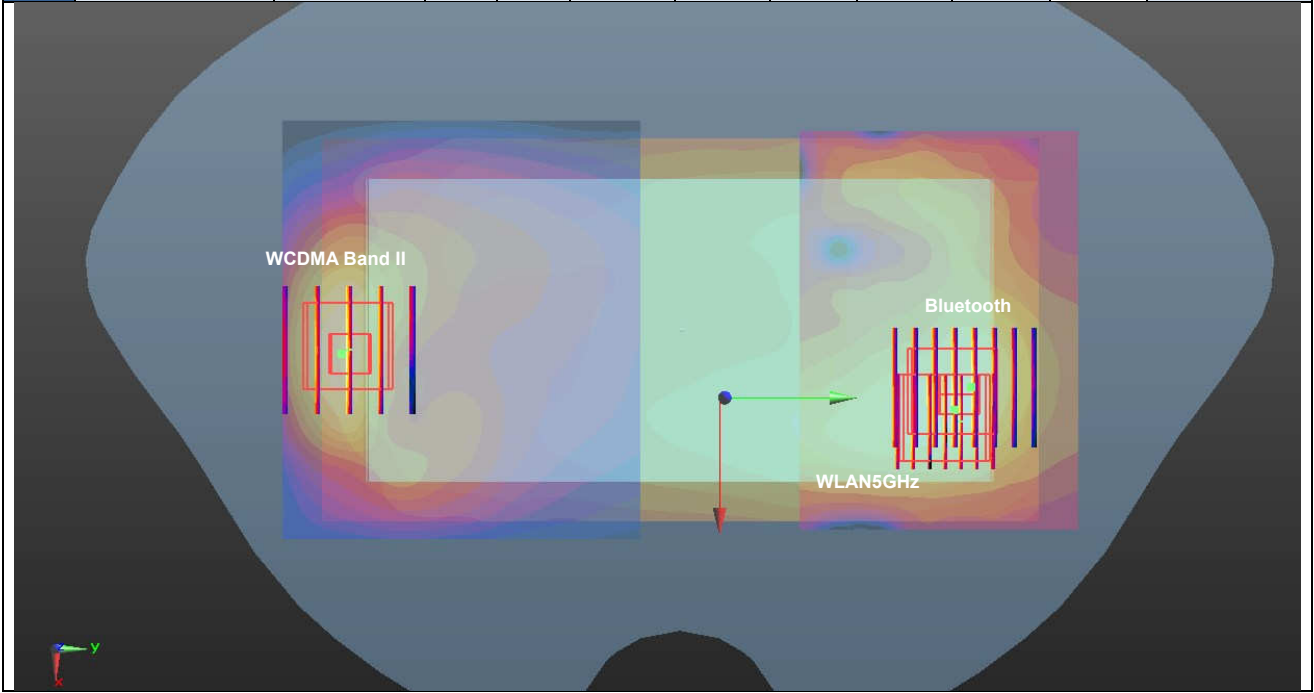


Case #9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26	Back	1.343	5	4.5	-78.6	-97.1	182.8	1.86	0.01	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

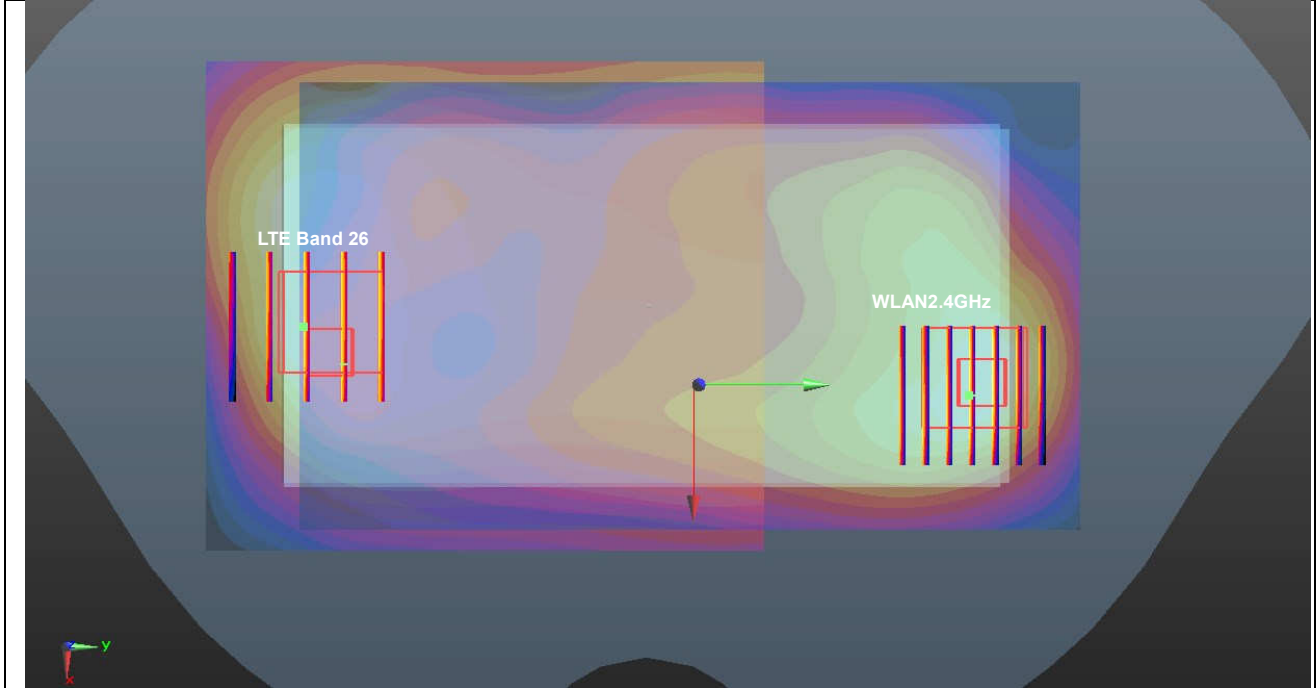


Case #10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #10	LTE Band 26	Back	1.343	5	4.5	-78.6	-97.1	177.8	2.42	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	LTE Band 26	Back	1.343	5	4.5	-78.6	-97.1	177.5	2.42	0.02	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

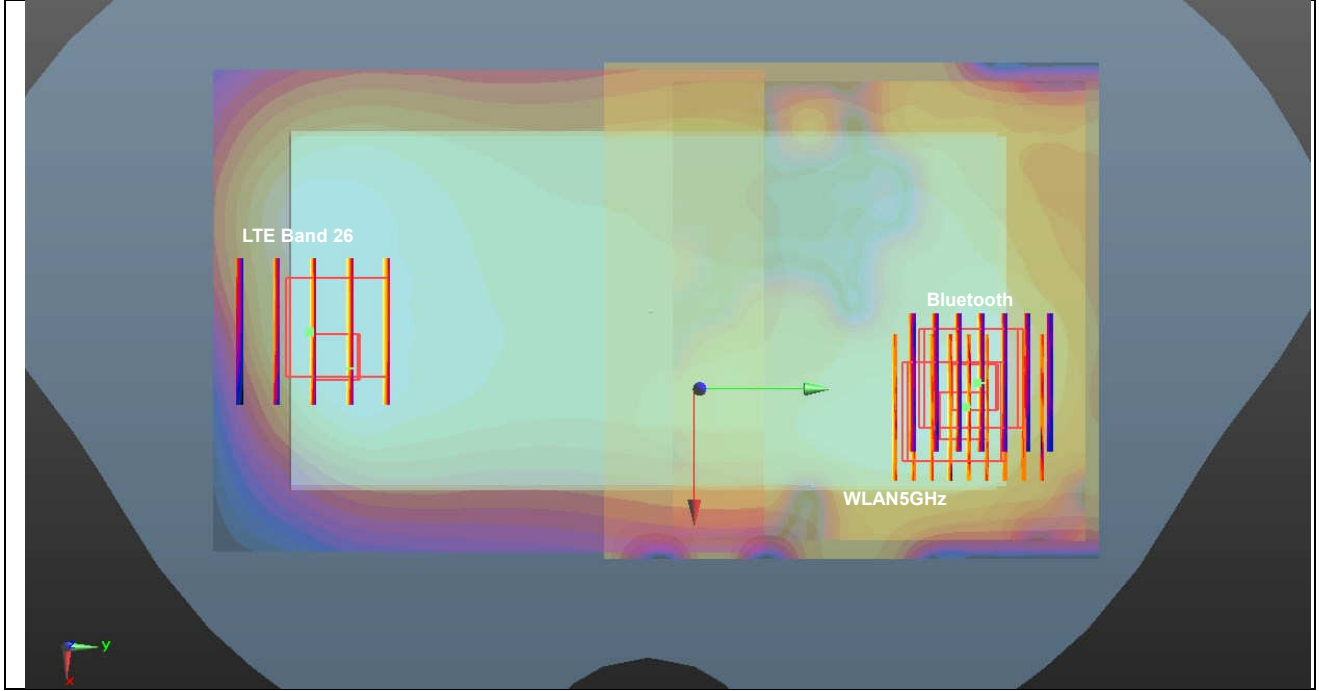


Case #11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #11	LTE Band 4	Back	0.935	5	-1.5	-79.7	-1.18	151.4	2.01	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
Case #11	LTE Band 4	Back	0.935	5	-1.5	-79.7	-1.18	151.1	2.01	0.02	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

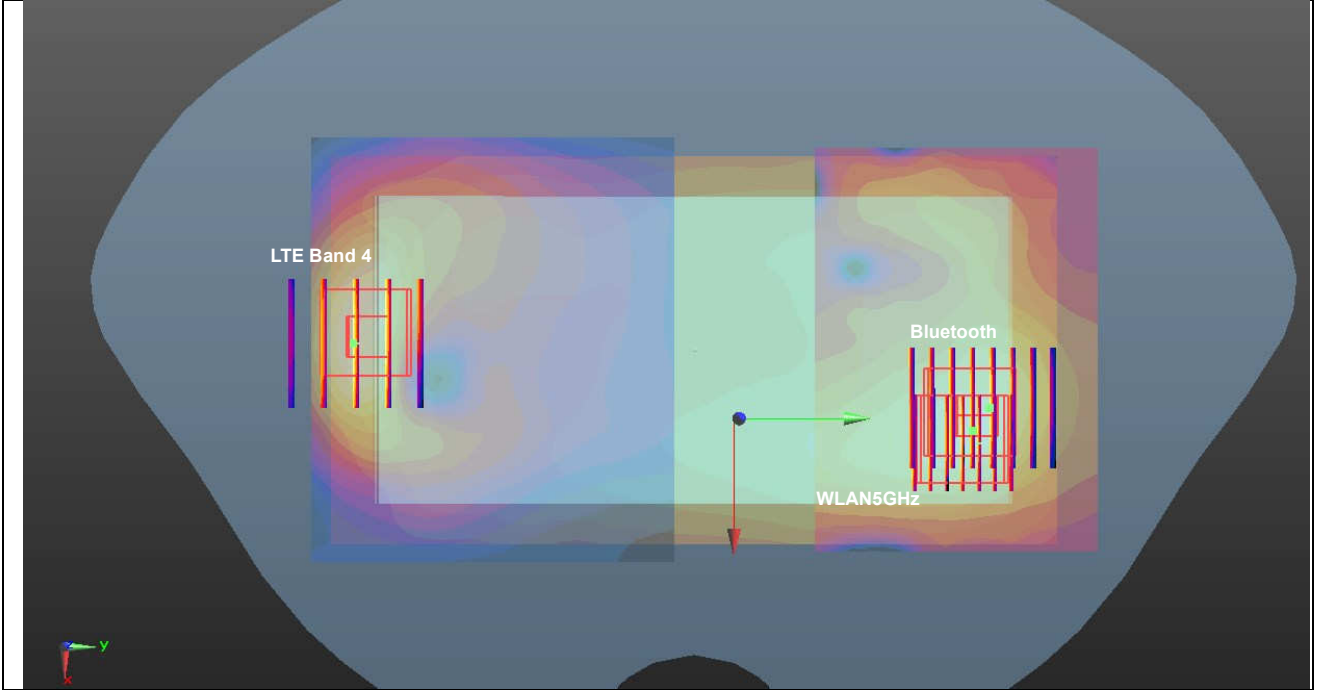


Case #12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Back	0.78	5	2.8	-80	-1.16	151.1	1.85	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	LTE Band 2	Back	0.78	5	2.8	-80	-1.16	150.9	1.85	0.02	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

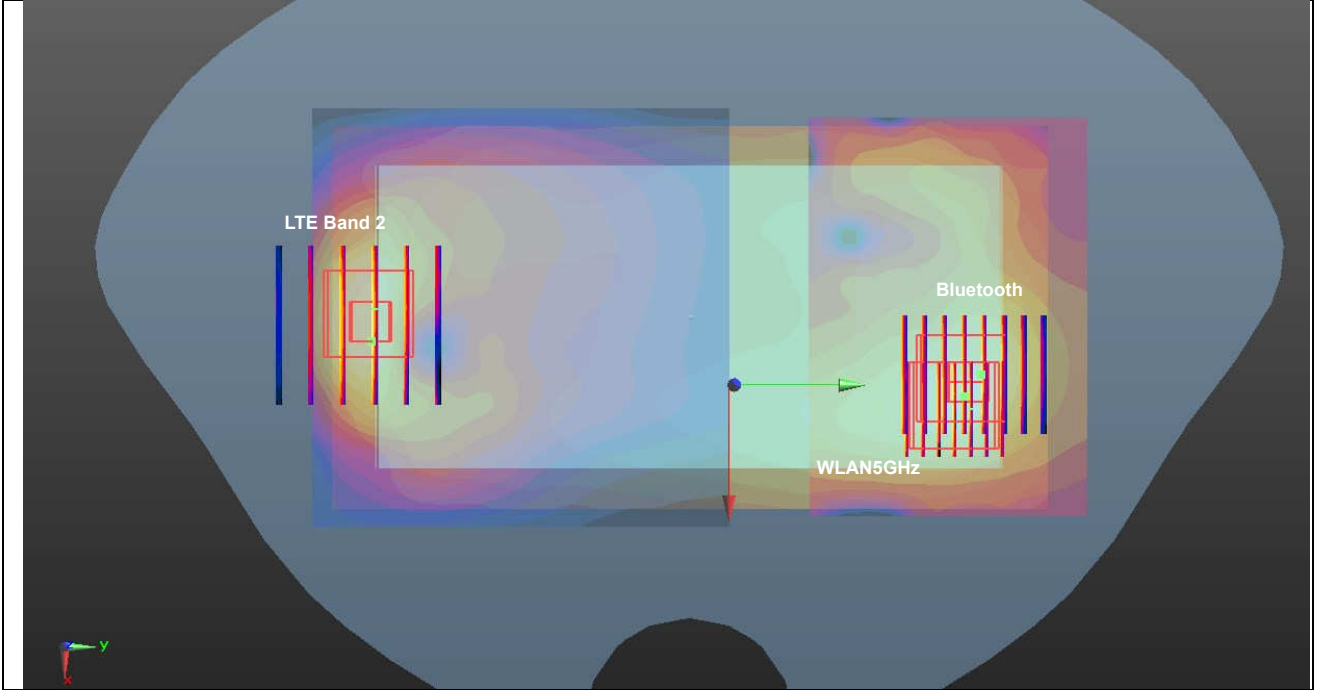


Case #13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Back	1.412	5	-23.5	-73.6	-1.1	154.8	1.93	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

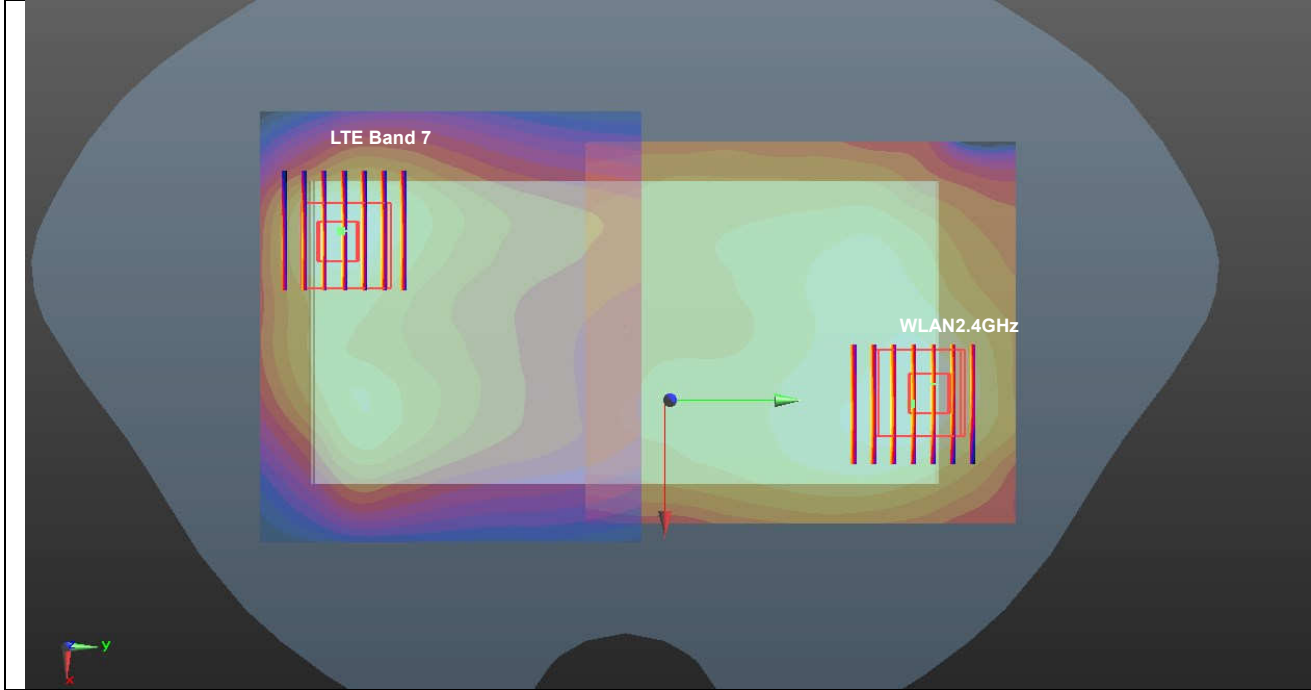


Case #14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #14	LTE Band 7	Back	1.412	5	-23.5	-73.6	-1.1	150.5	2.49	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	LTE Band 7	Back	1.412	5	-23.5	-73.6	-1.1	149.5	2.49	0.03	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

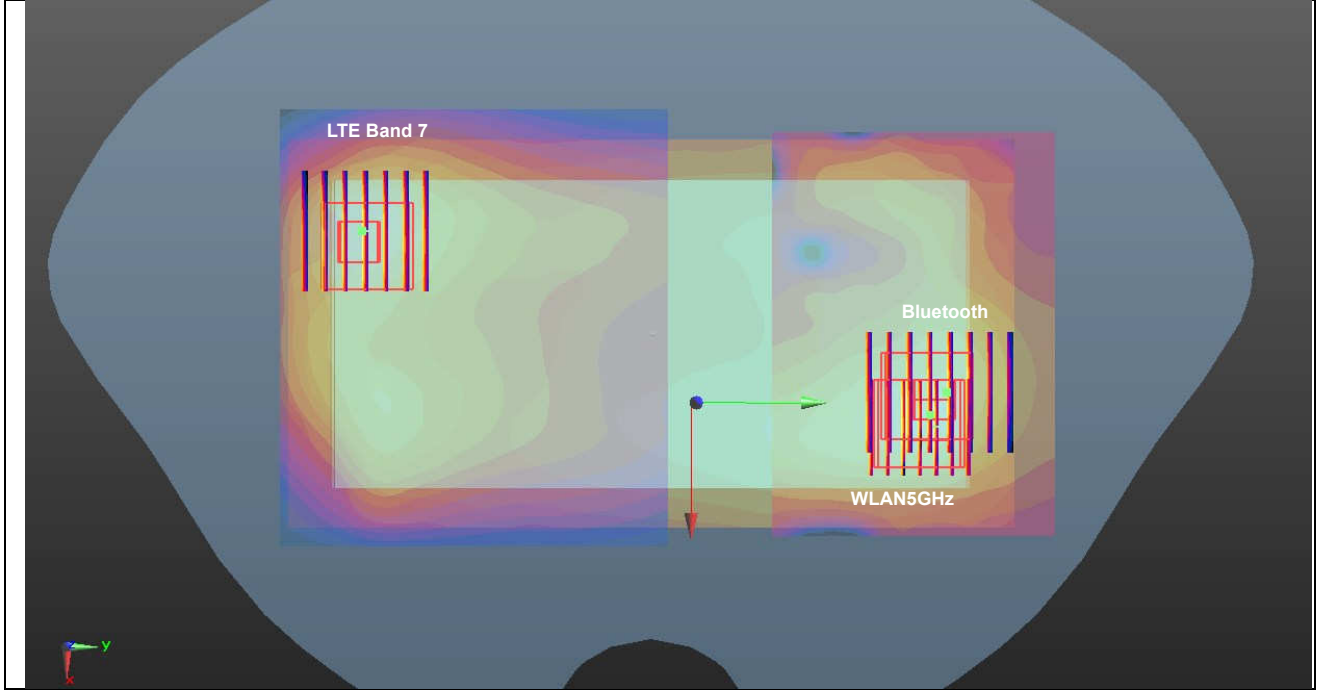


Case #15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41	Back	1.409	5	-29.8	-66.4	-1.21	149.6	1.92	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

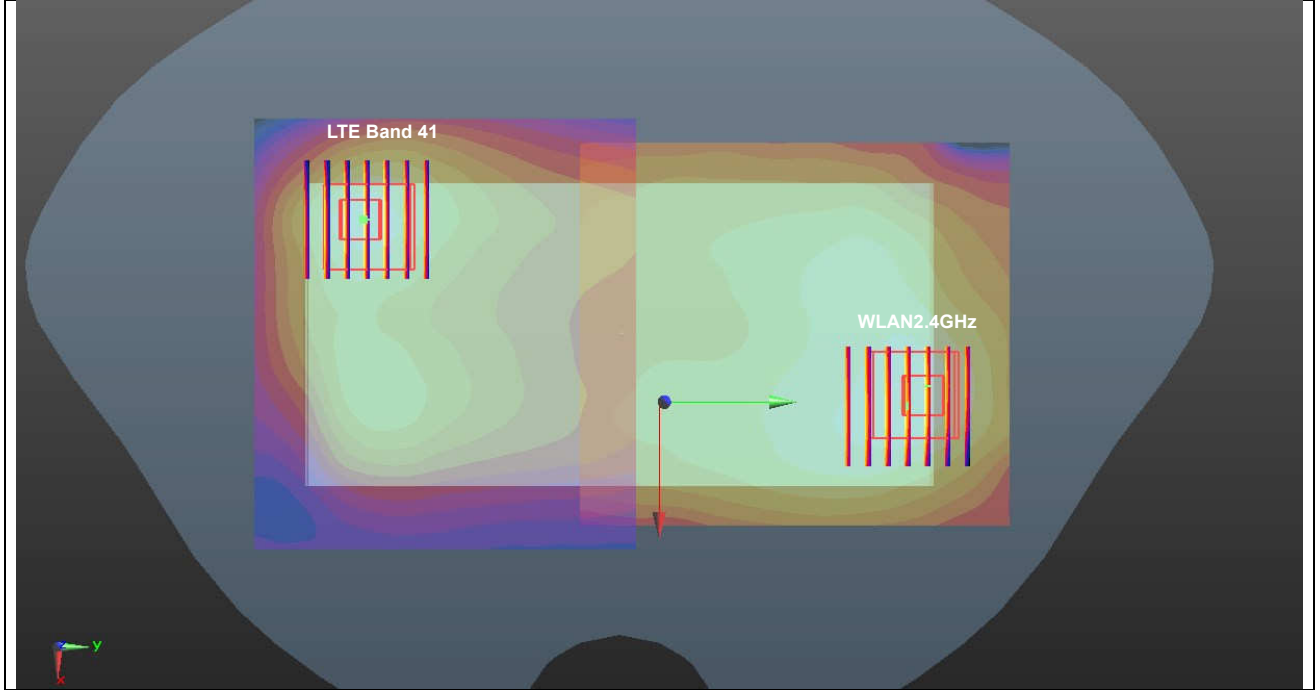


Case #16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #16	LTE Band 41	Back	1.409	5	-29.8	-66.4	-1.21	145.7	2.48	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	LTE Band 41	Back	1.409	5	-29.8	-66.4	-1.21	144.5	2.48	0.03	Not required
	WLAN5GHz		0.908	5	21.4	70	-1.04				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

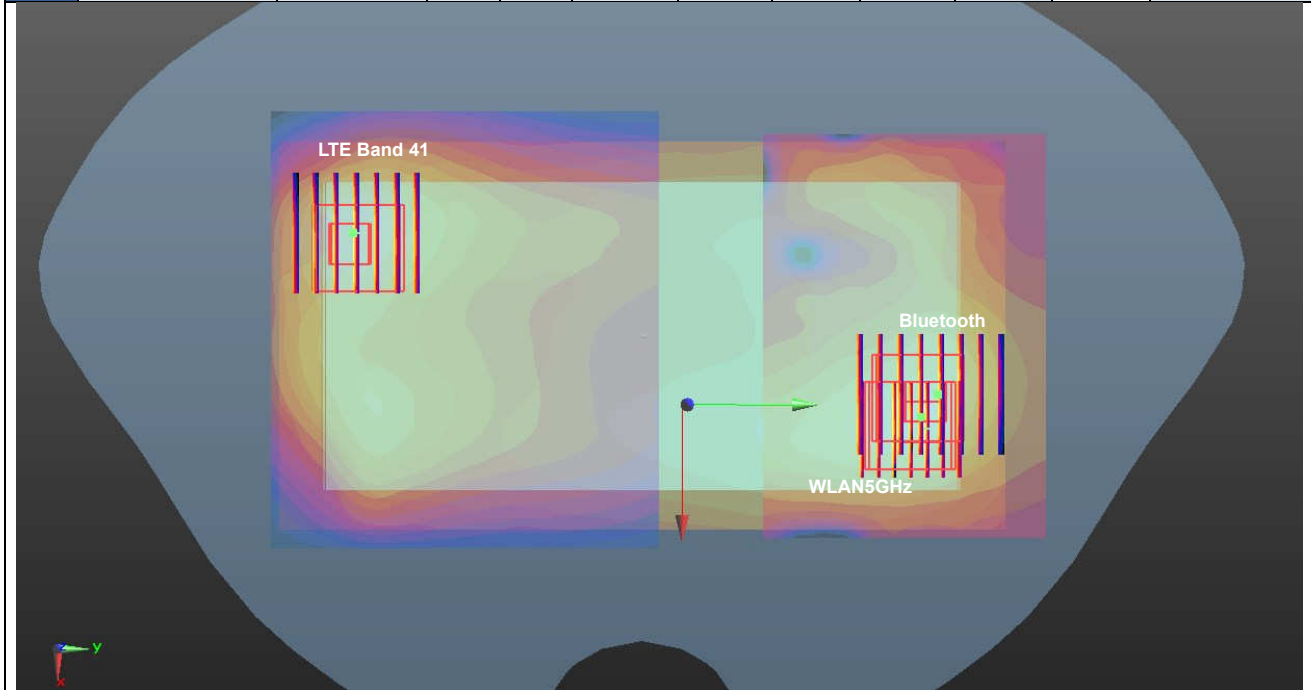


Case #17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.412	5	2.9	-78.5	-1.08	155.5	1.93	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

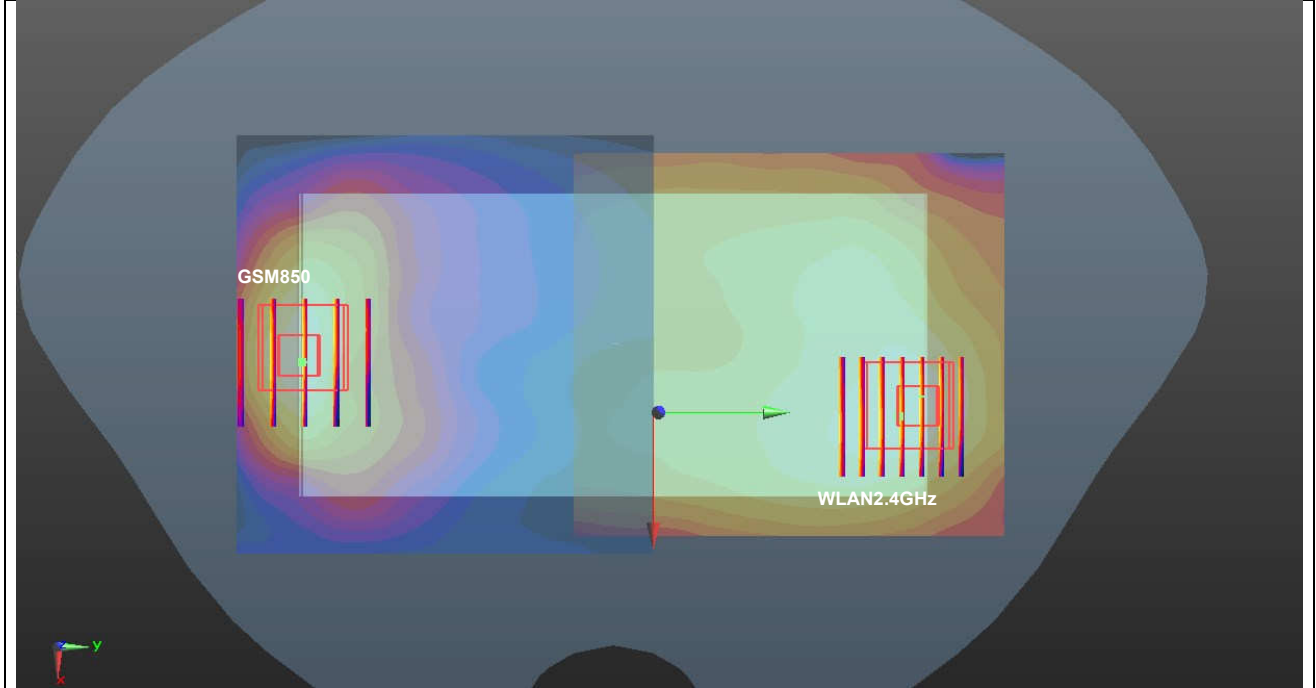


Case #18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.412	5	2.9	-78.5	-1.08	148.0	2.62	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	GSM850	Back	1.412	5	2.9	-78.5	-1.08	149.4	2.62	0.03	Not required
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

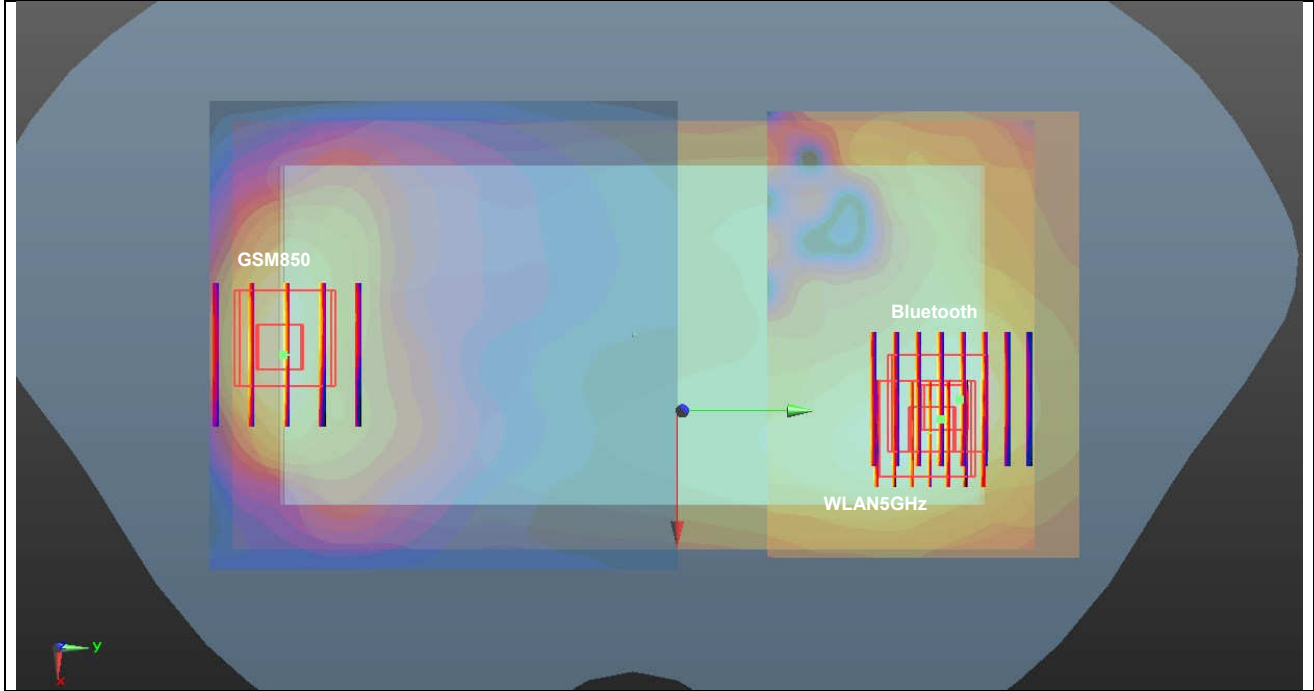


Case #19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	WLAN2.4GHz	Back	0.513	5	14	76.6	-0.89	153.9	1.94	0.02	Not required
	GSM1900	Back	1.425	5	1.3	-76.8	-1.19	153.9	1.94	0.02	Not required

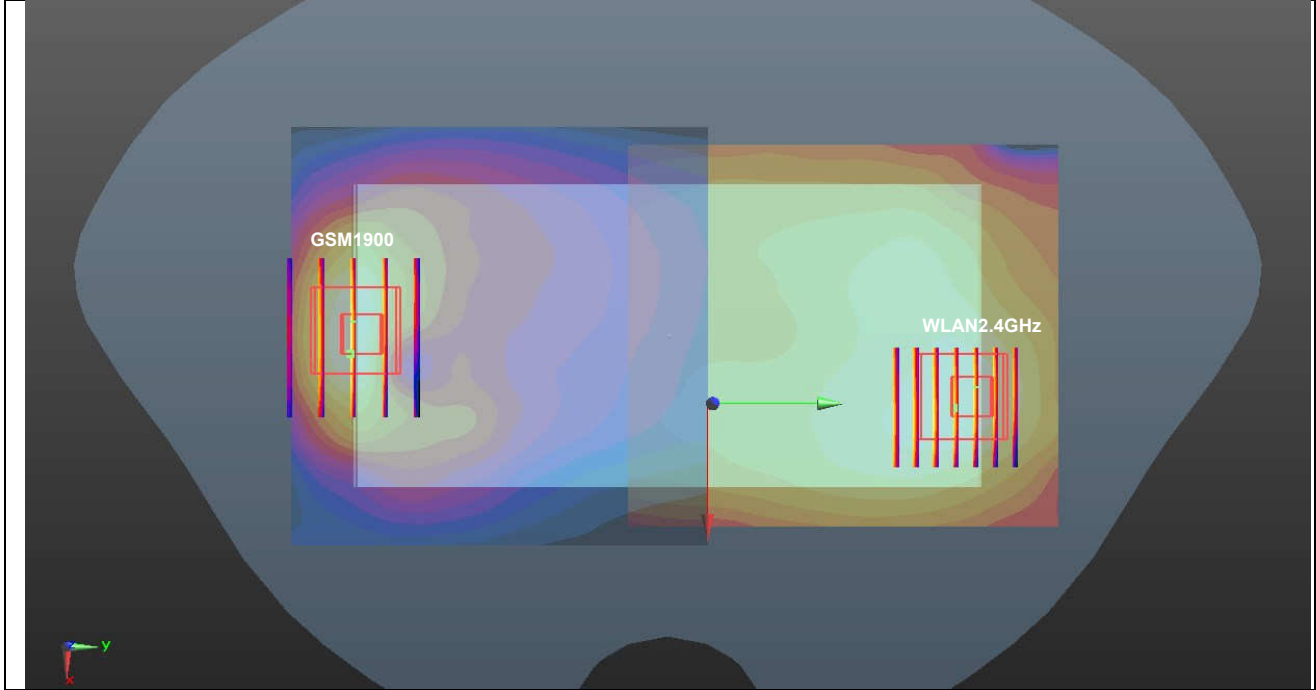


Case #20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #20	GSM1900	Back	1.425	5	1.3	-76.8	-1.19	146.6	2.63	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	GSM1900	Back	1.425	5	1.3	-76.8	-1.19	147.9	2.63	0.03	Not required
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

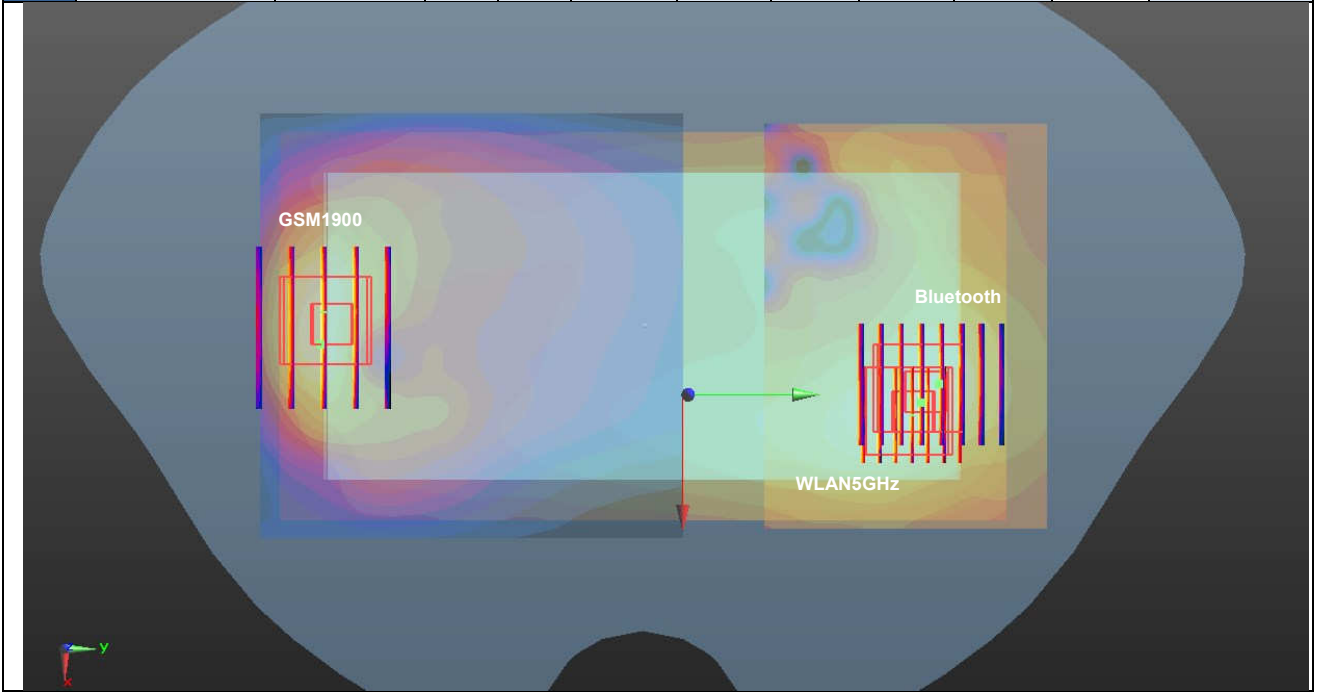


Case #21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Back	1.267	5	4.4	-78.5	-97	182.7	1.78	0.01	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

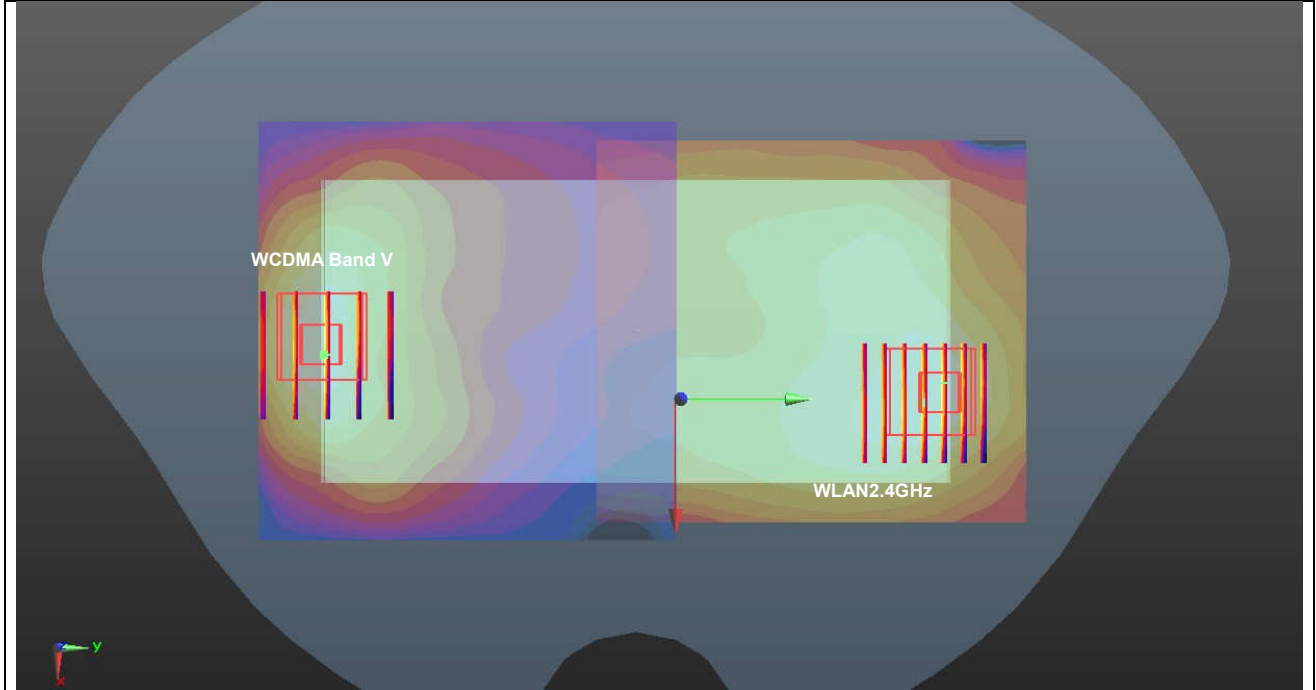


Case #22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #22	WCDMA V	Back	1.267	5	4.4	-78.5	-97	176.1	2.47	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	WCDMA V	Back	1.267	5	4.4	-78.5	-97	177.3	2.47	0.02	Not required
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

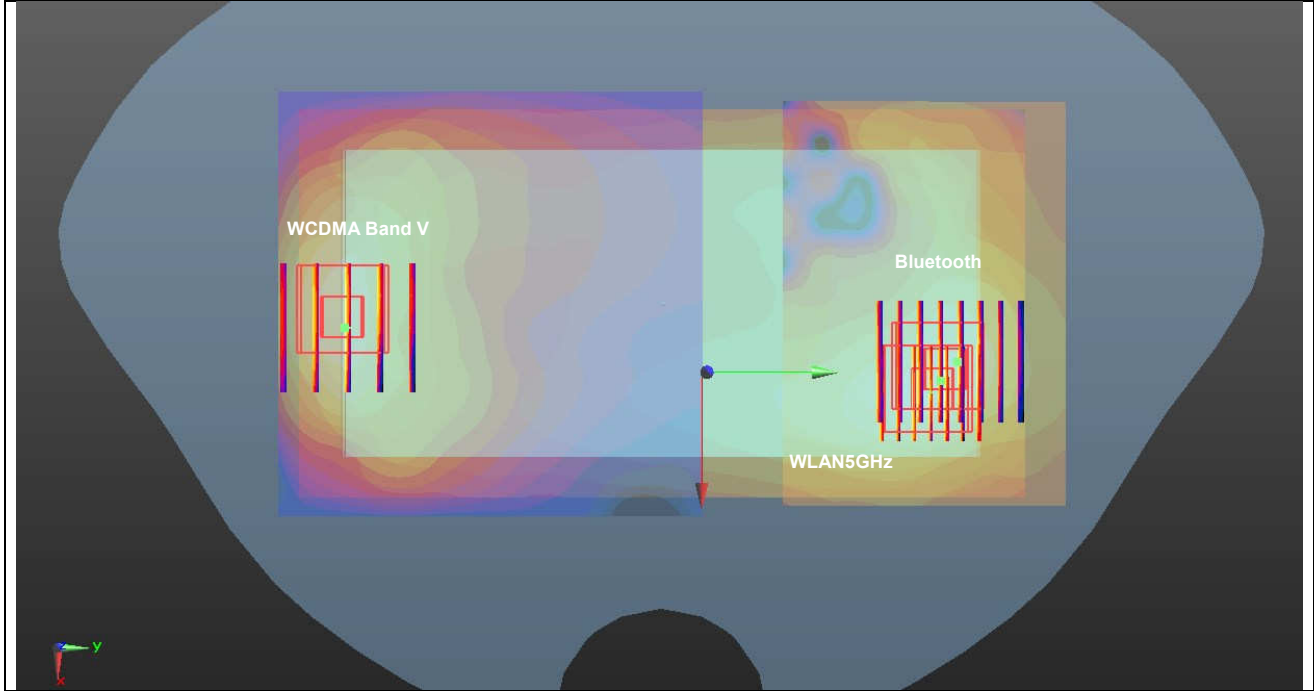


Case #23	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band II	Back	1.435	5	6.2	-81	-1.13	157.8	1.95	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

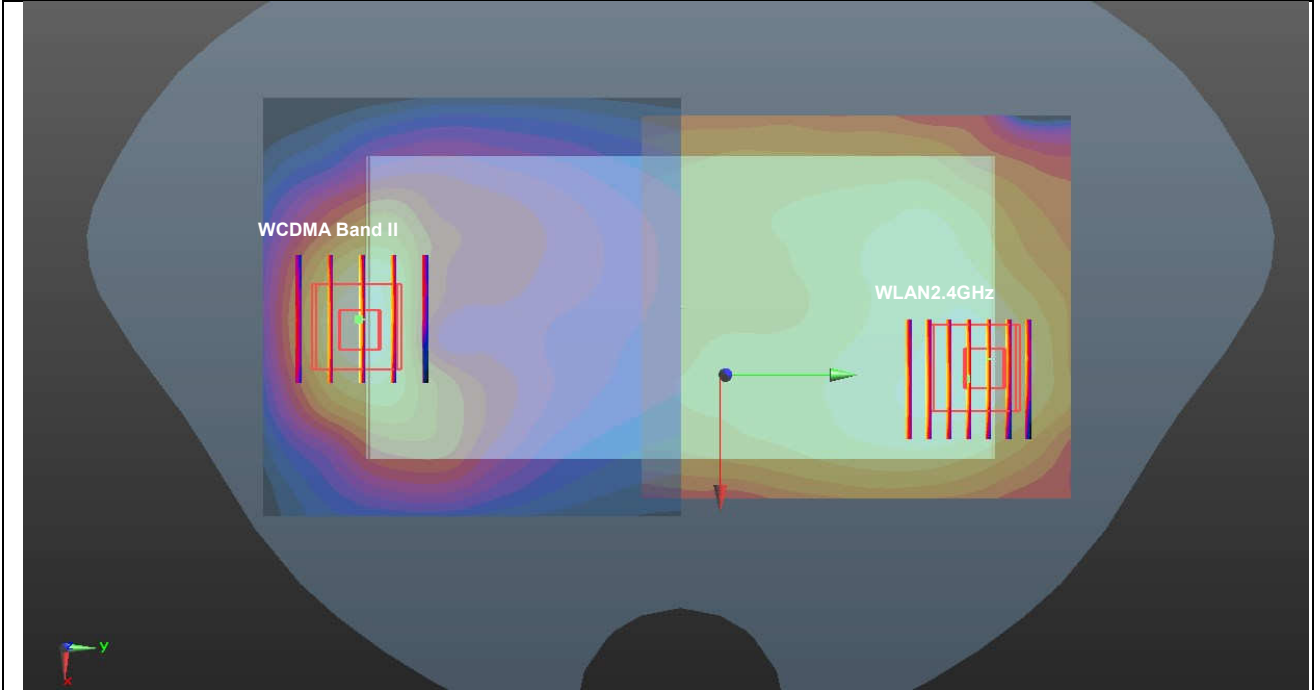


Case #24	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #24	WCDMA II	Back	1.435	5	6.2	-81	-1.13	150.2	2.64	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	WCDMA II	Back	1.435	5	6.2	-81	-1.13	151.6	2.64	0.03	Not required
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

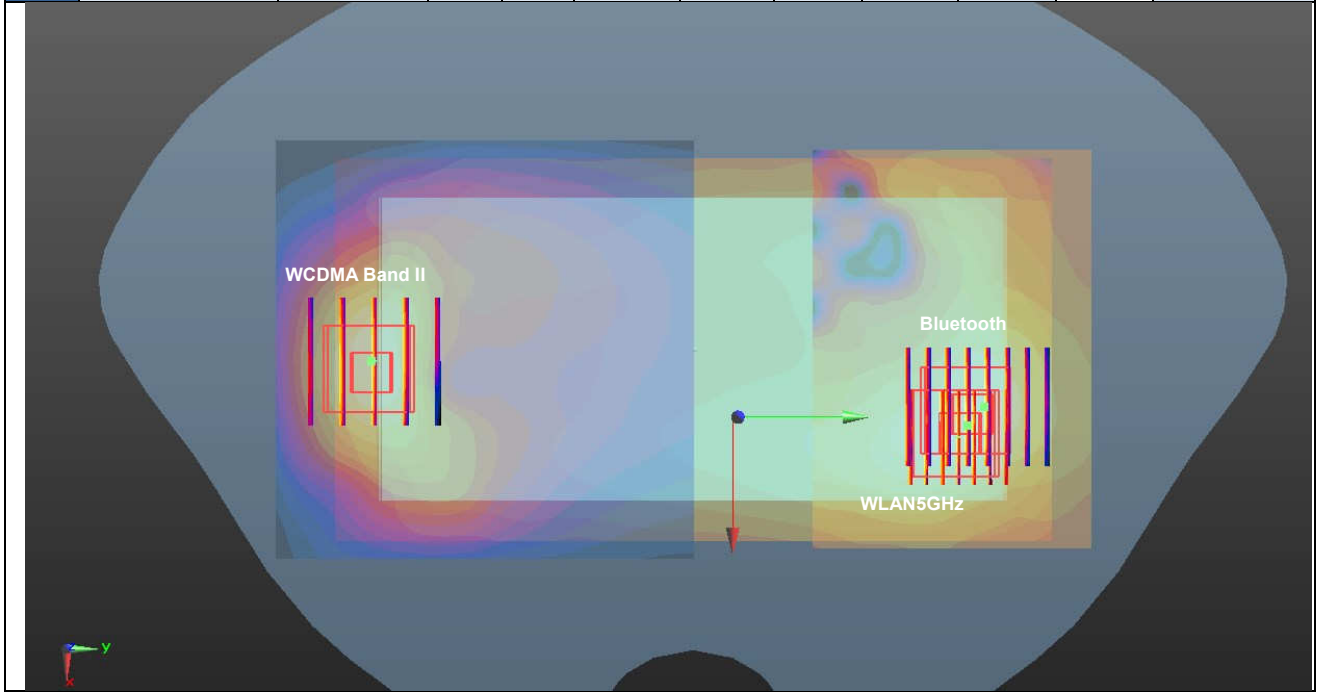


Case #25	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26	Back	1.343	5	4.5	-78.6	-97.1	182.8	1.86	0.01	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

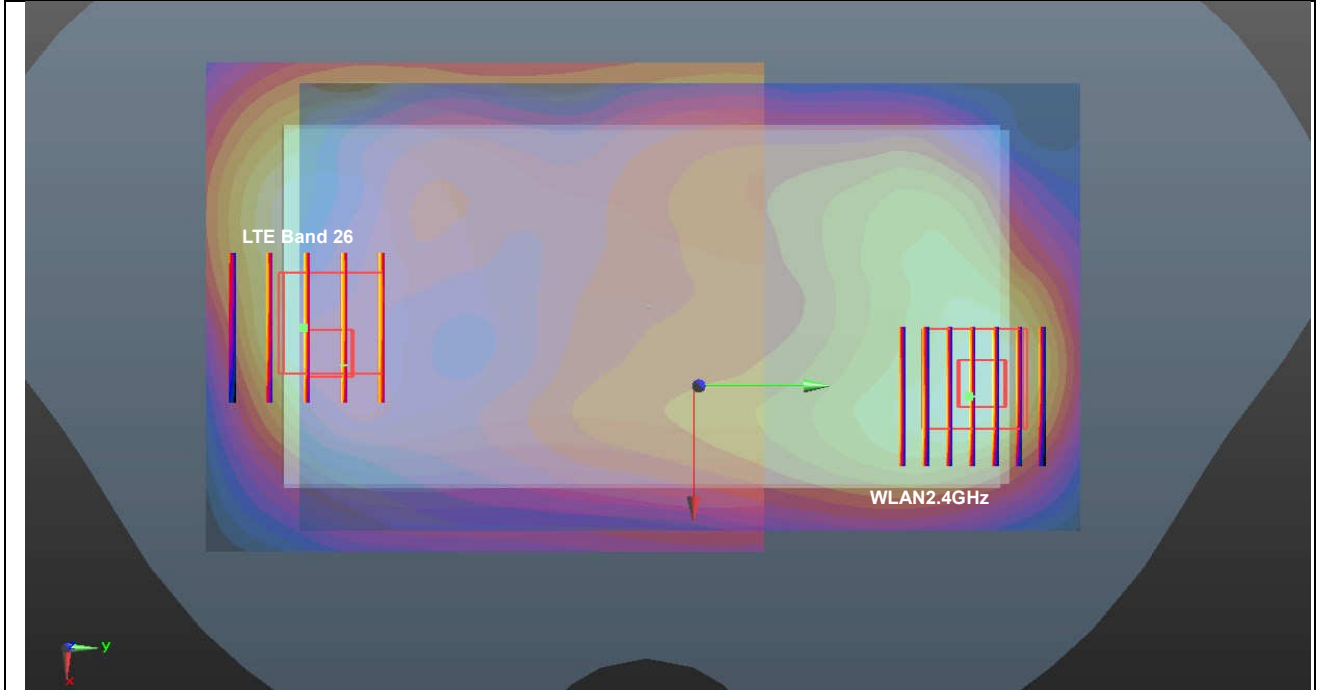


Case #26	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #26	LTE Band 26	Back	1.343	5	4.5	-78.6	-97.1	176.3	2.55	0.02	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	LTE Band 26	Back	1.343	5	4.5	-78.6	-97.1	177.5	2.55	0.02	Not required
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

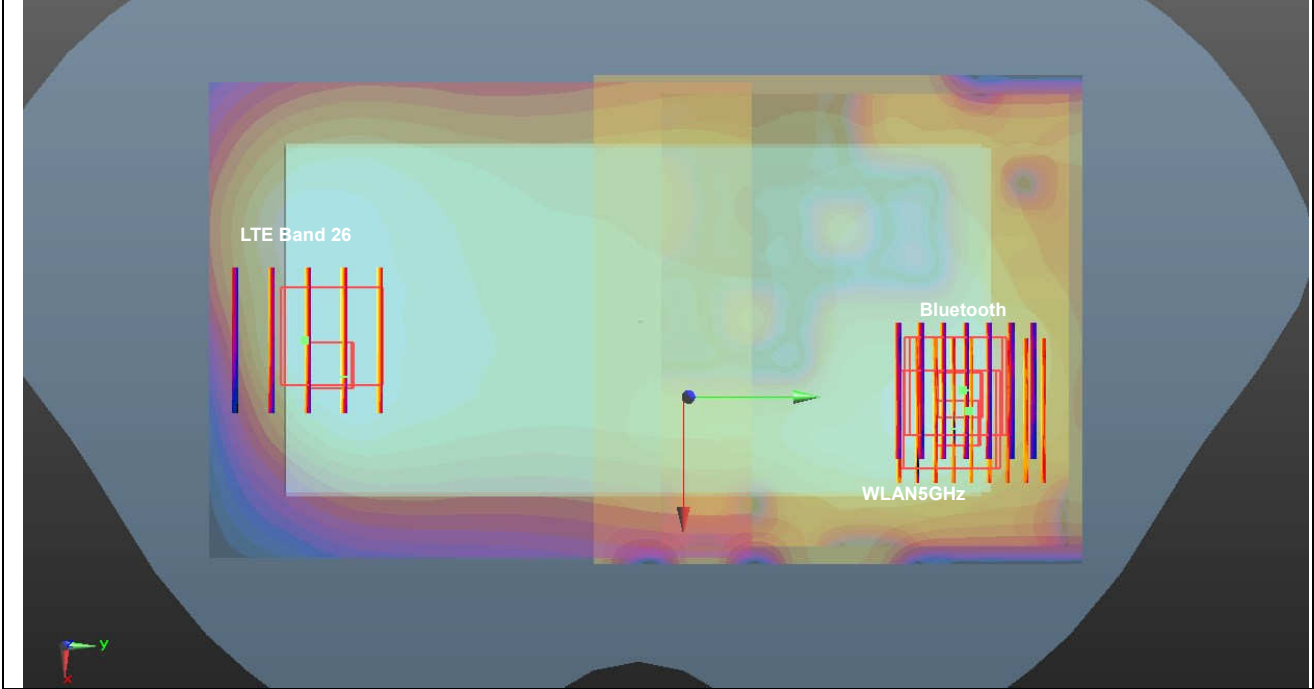

Case #27	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Back	1.212	5	-2.7	-76.9	-1.2	154.4	1.73	0.01	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

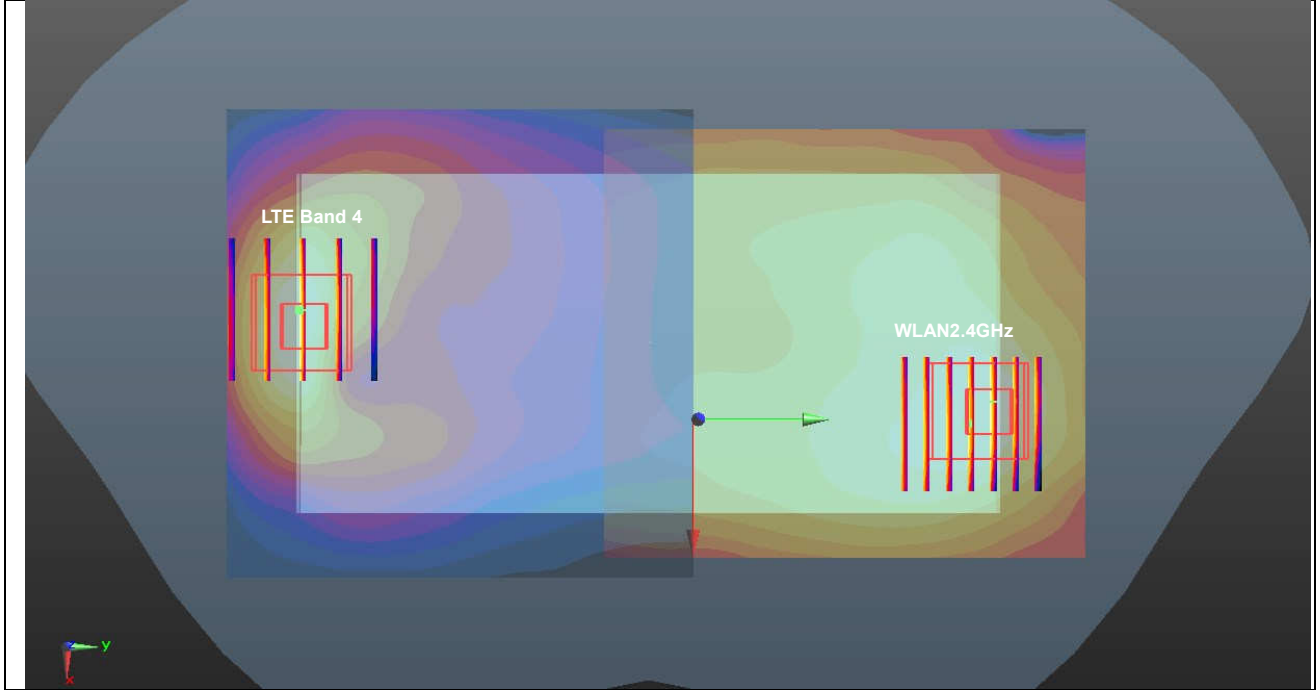

Case #28	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #28	LTE Band 4	Back	1.212	5	-2.7	-76.9	-1.2	147.3	2.42	0.03	Not required
	Bluetooth		0.166	5	17.4	70.2	-1.25				
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
Case #28	LTE Band 4	Back	1.212	5	-2.7	-76.9	-1.2	148.5	2.42	0.03	Not required
	WLAN5GHz		1.039	5	21.2	68.4	-1.3				
	Bluetooth		0.166	5	17.4	70.2	-1.25				

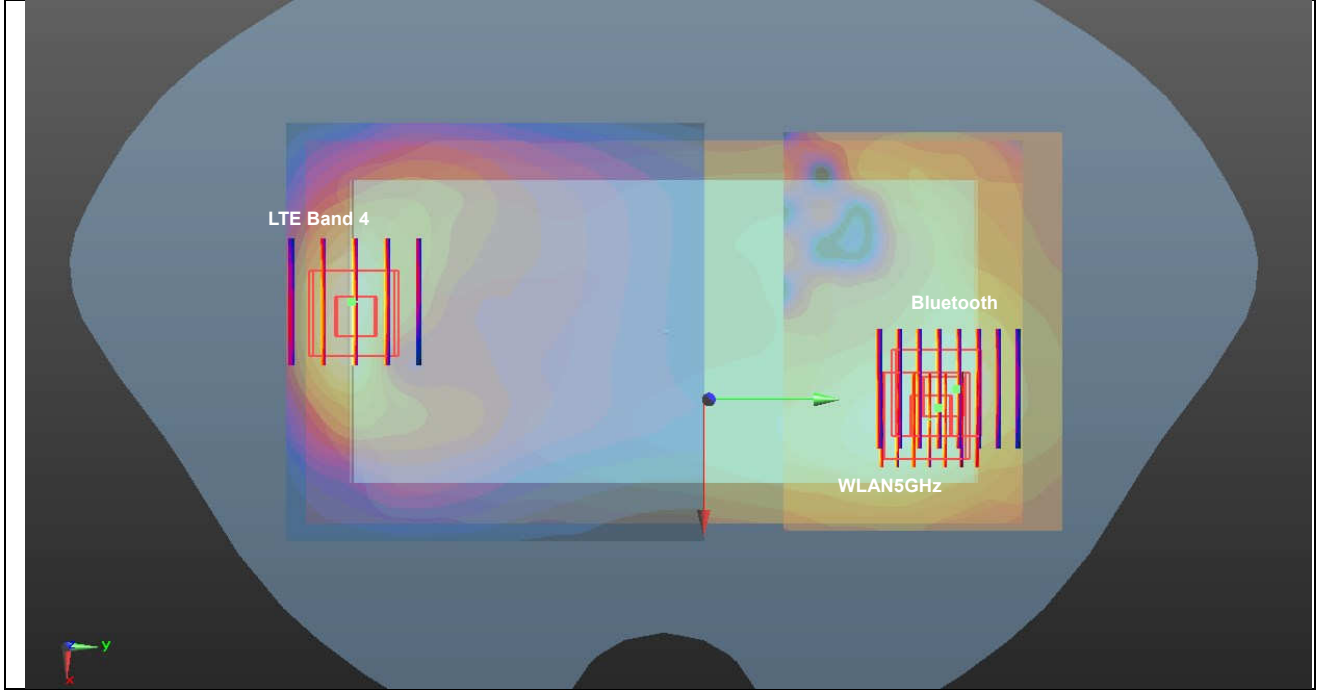

Case #29	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Back	1.385	5	4.4	-78.4	-1.16	155.3	1.90	0.02	Not required
	WLAN2.4GHz		0.513	5	14	76.6	-0.89				

