




CDMA2000 BC0 (1xRTT)


Lowest Channel

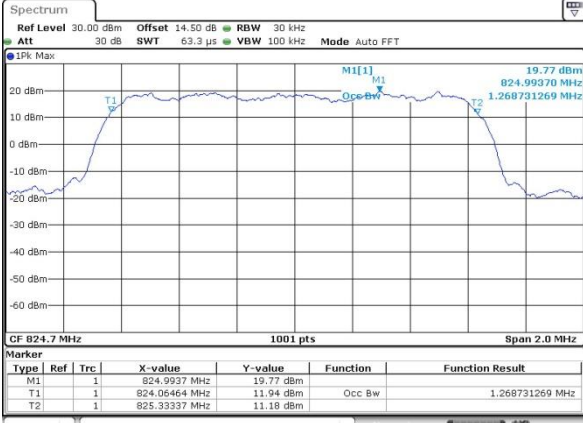

Date: 20.OCT.2018 10:10:07


CDMA2000 BC1(1xRTT)

Lowest Channel

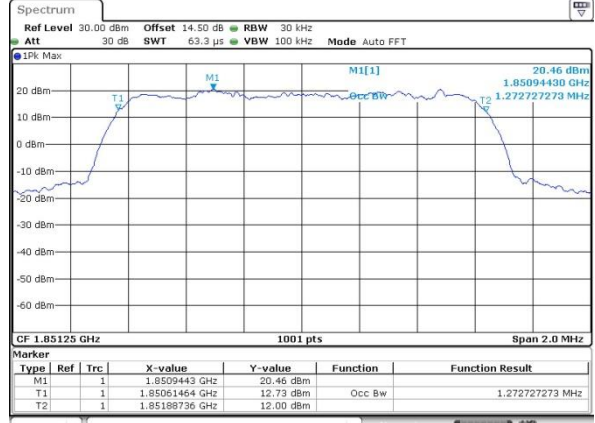


Date: 20.OCT.2018 11:20:14

Middle Channel

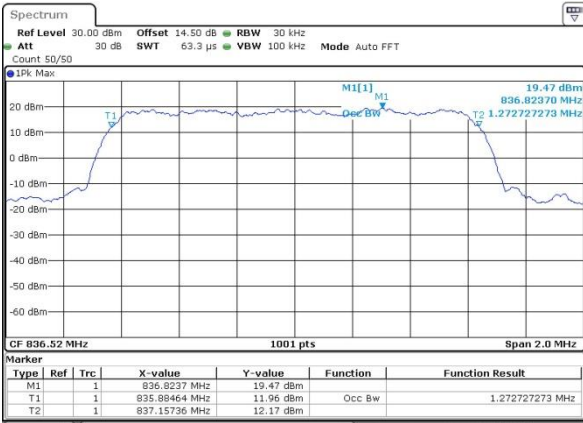


Date: 20.OCT.2018 10:08:17

Middle Channel

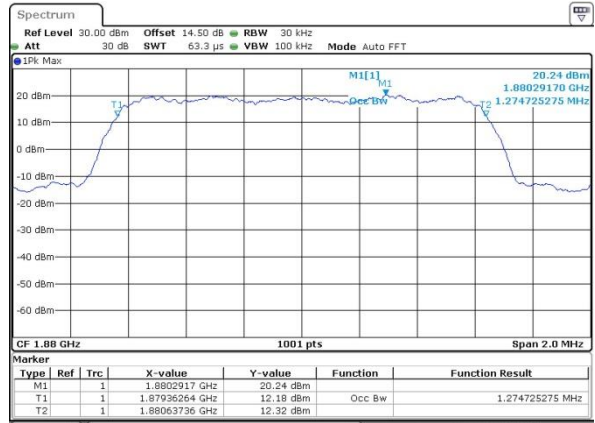


Date: 20.OCT.2018 11:20:49

Highest Channel

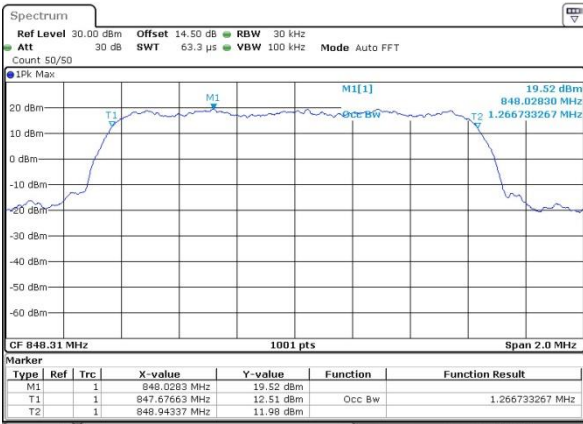

Date: 20.OCT.2018 10:08:48


Highest Channel

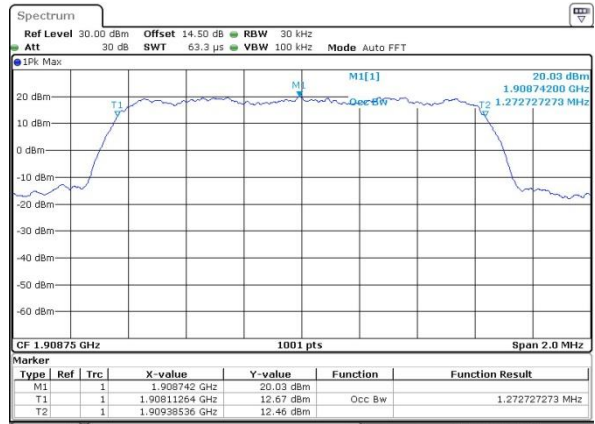

Date: 20.OCT.2018 11:21:23




Conducted Band Edge

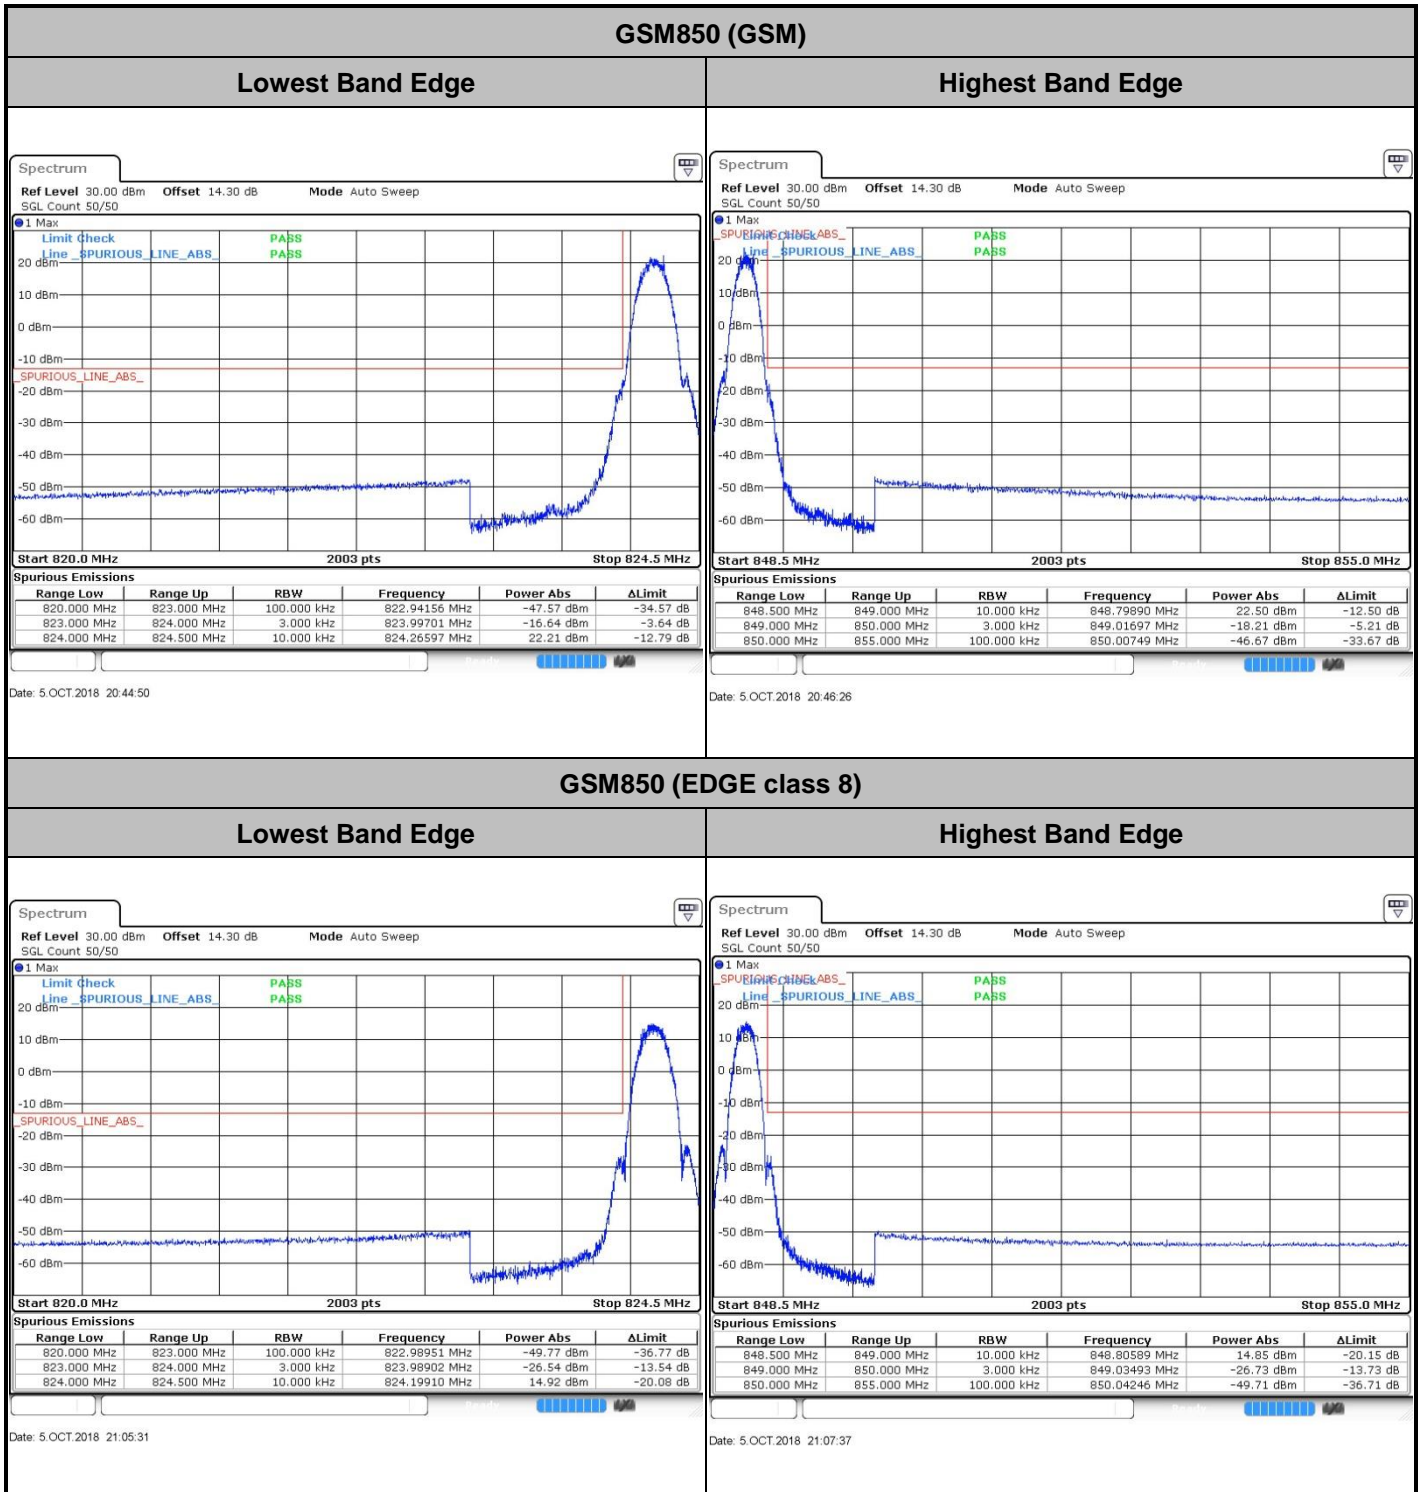




GSM1900 (GSM)

Lowest Band Edge

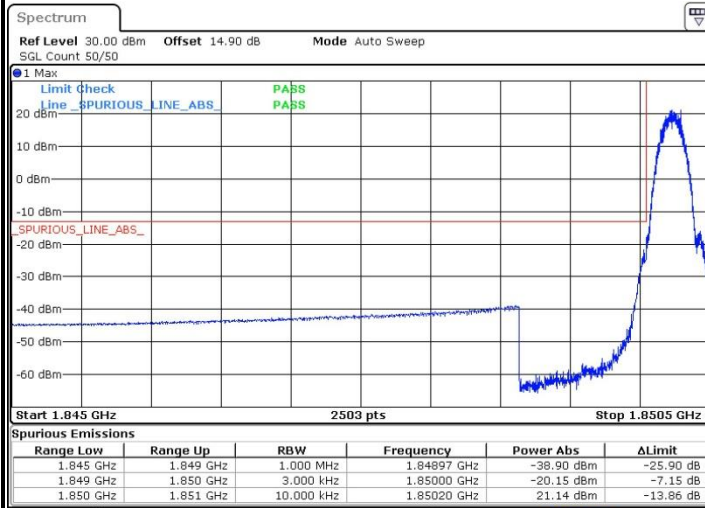

Date: 5 OCT.2018 21:25:36


Highest Band Edge

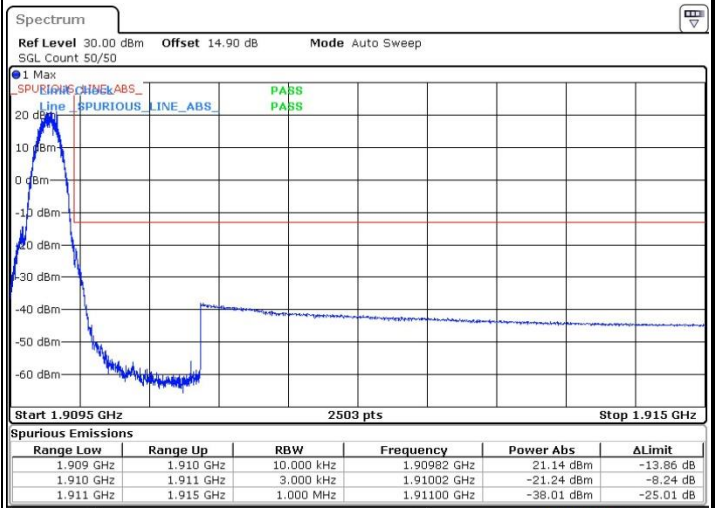

Date: 5 OCT.2018 21:27:09


GSM1900 (EDGE class 8)

Lowest Band Edge


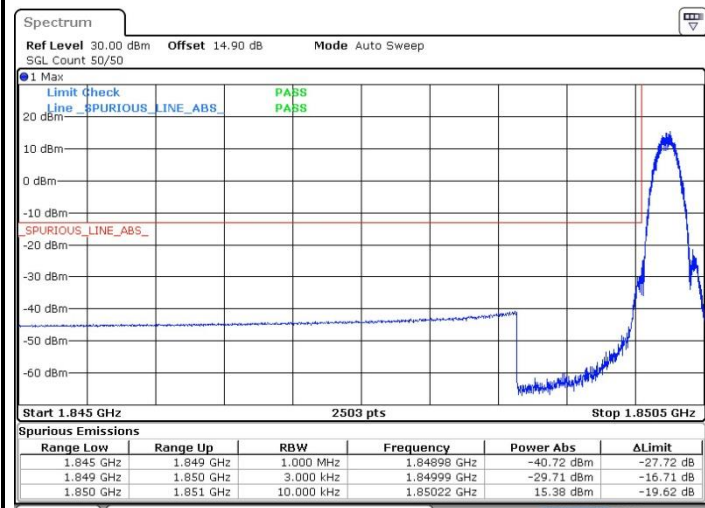



Date: 5 OCT.2018 22:54:32



Highest Band Edge

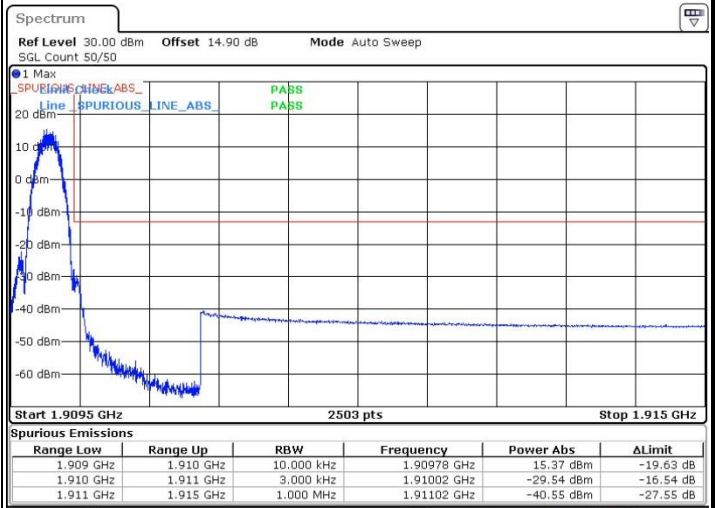

Date: 5 OCT.2018 22:56:10

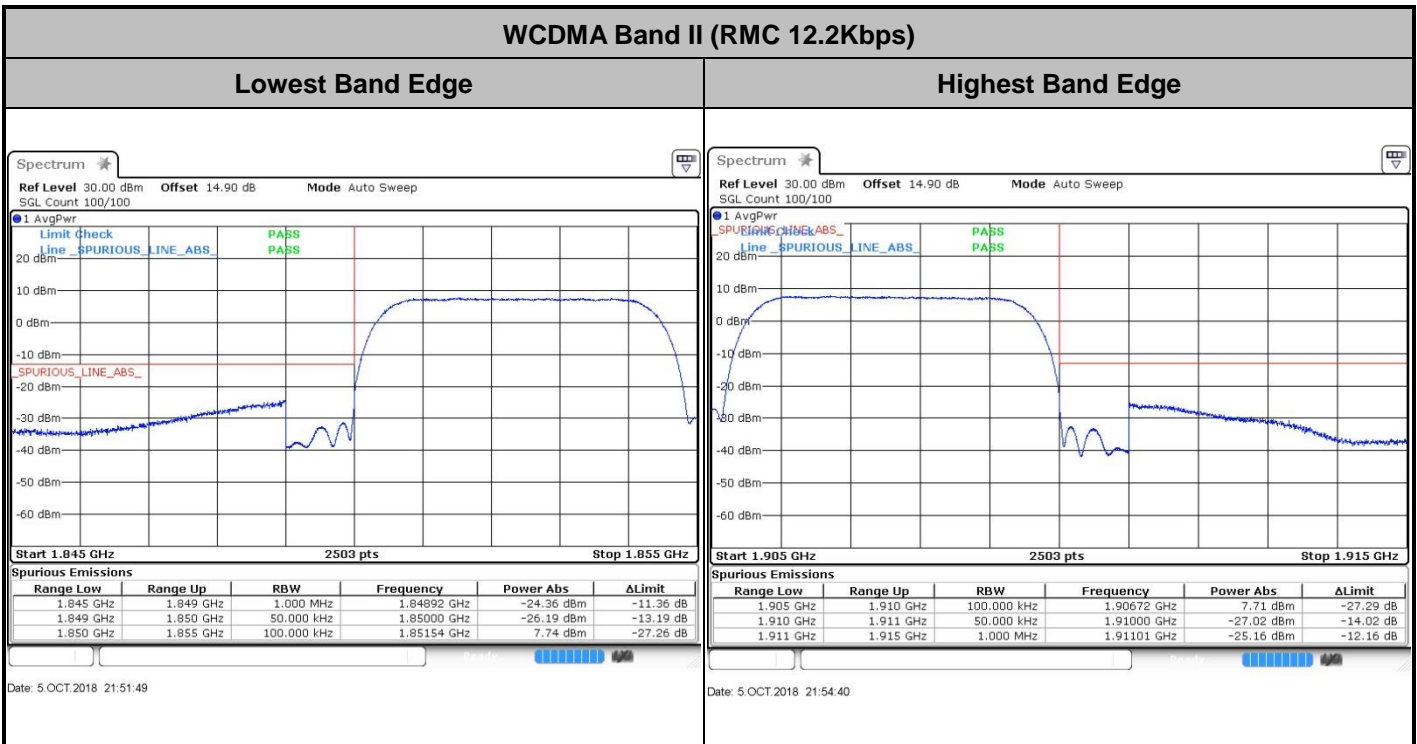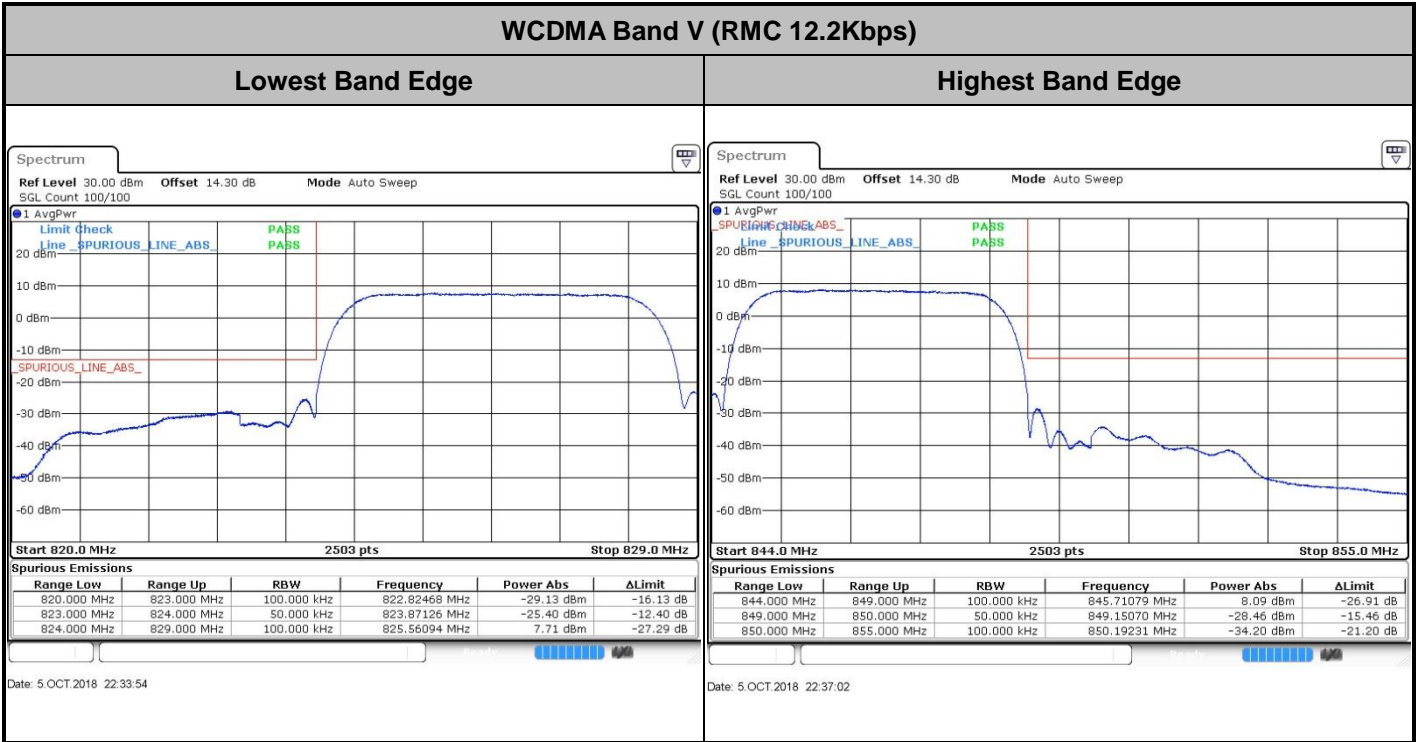

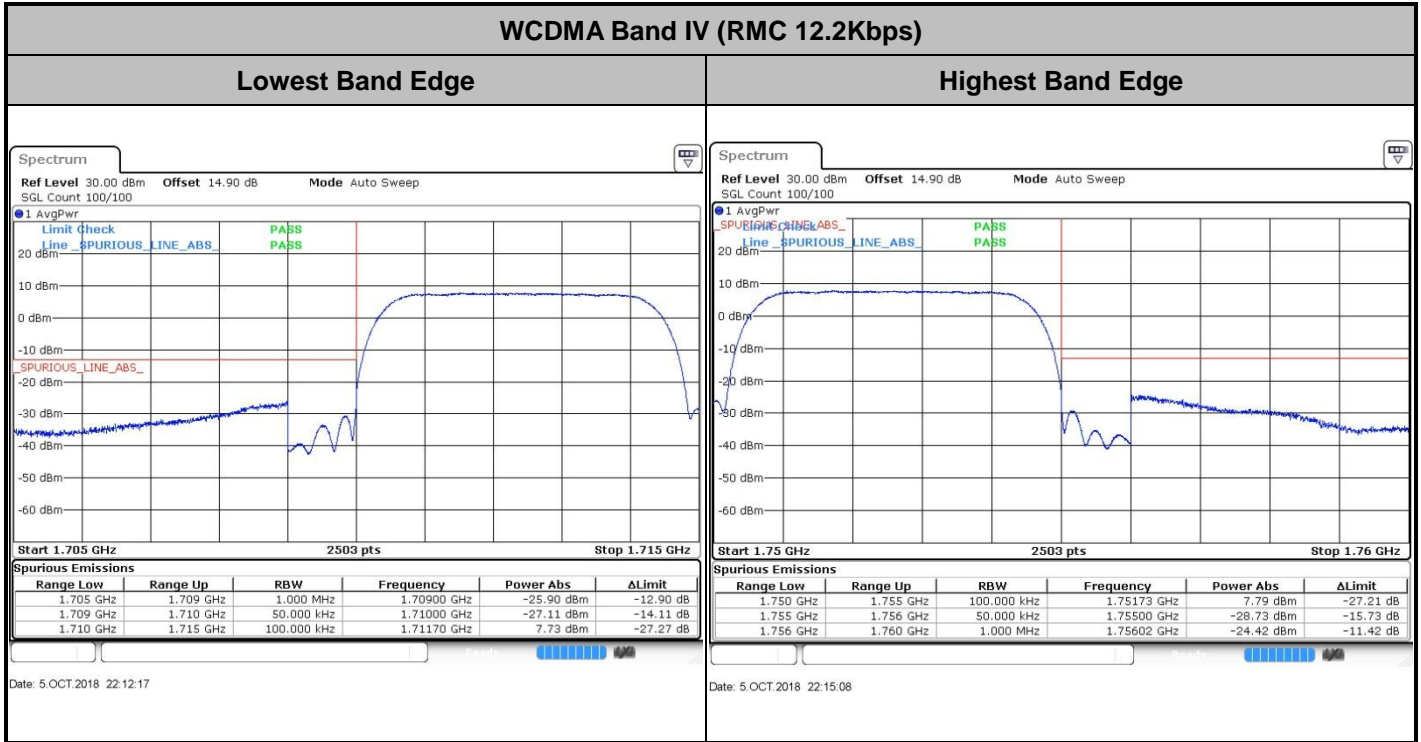


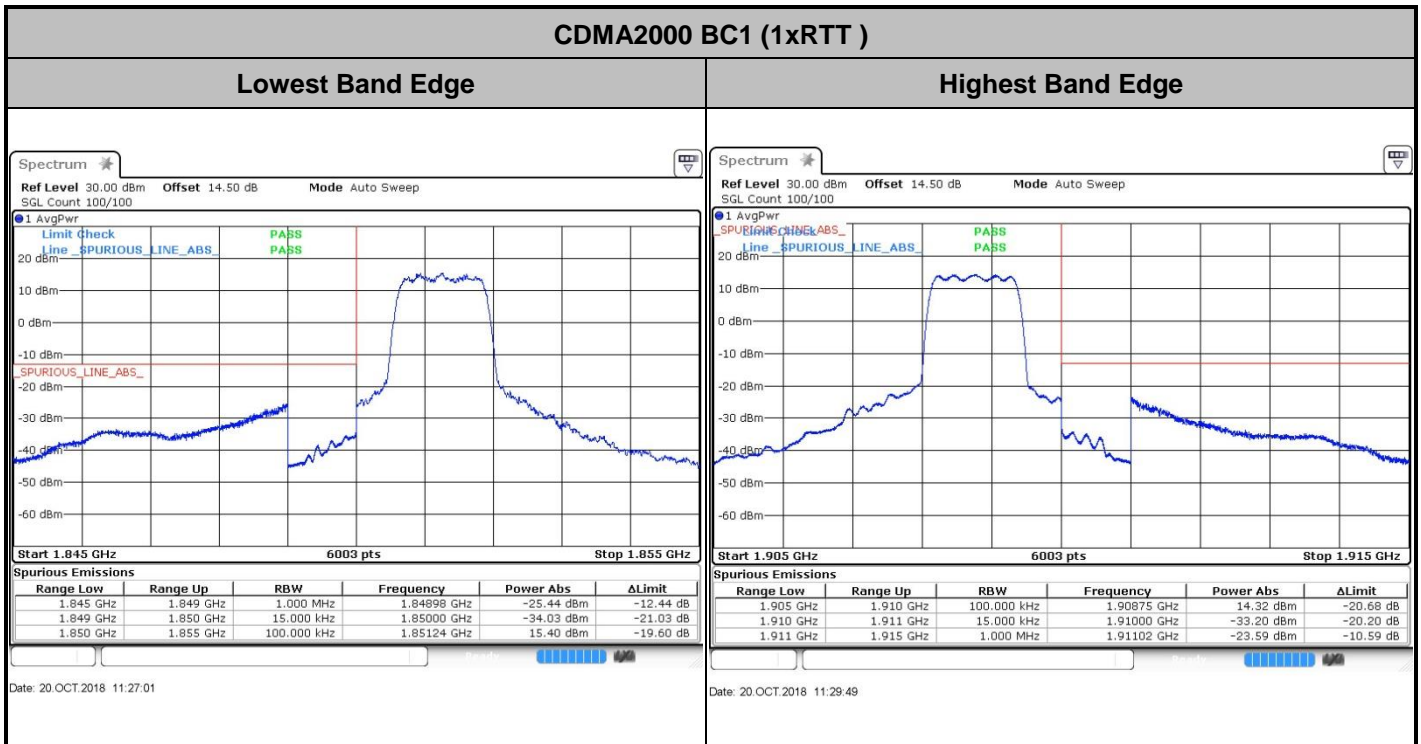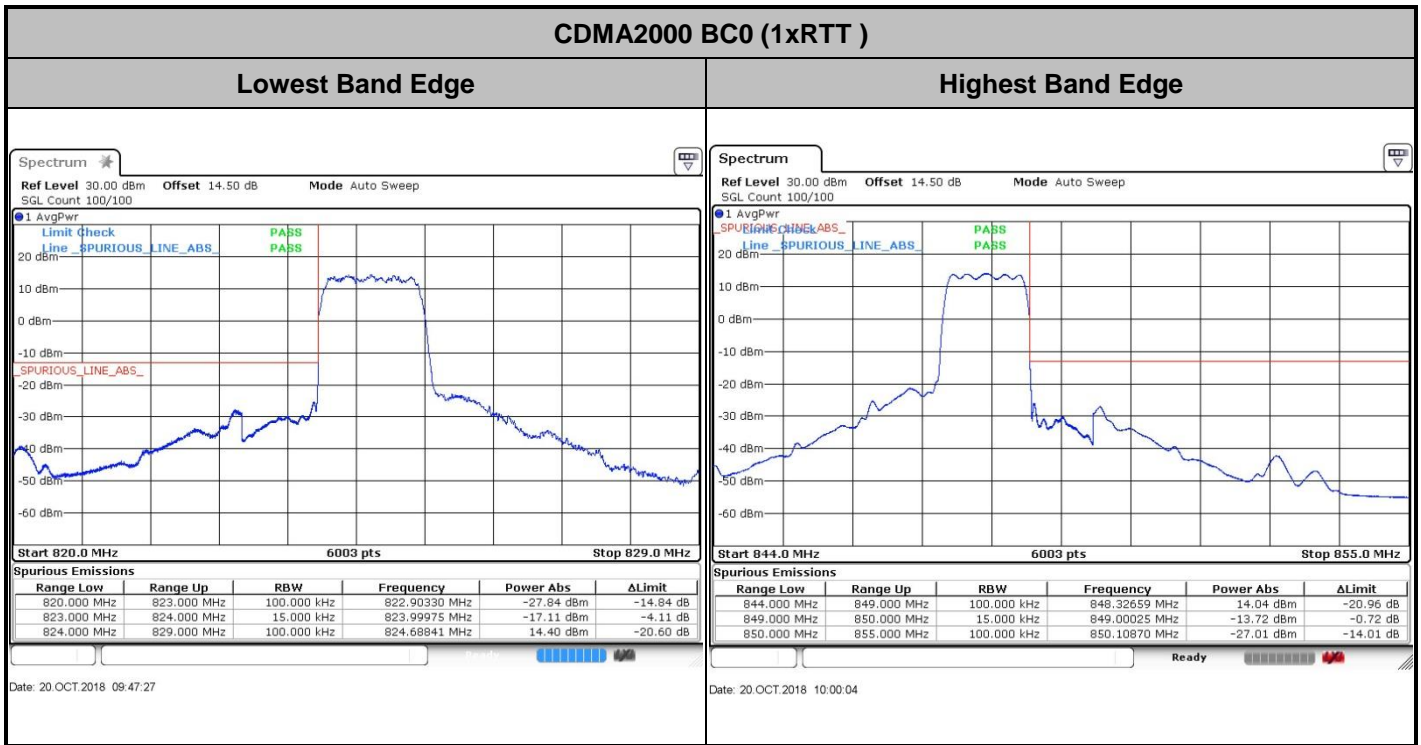



Conducted Spurious Emission




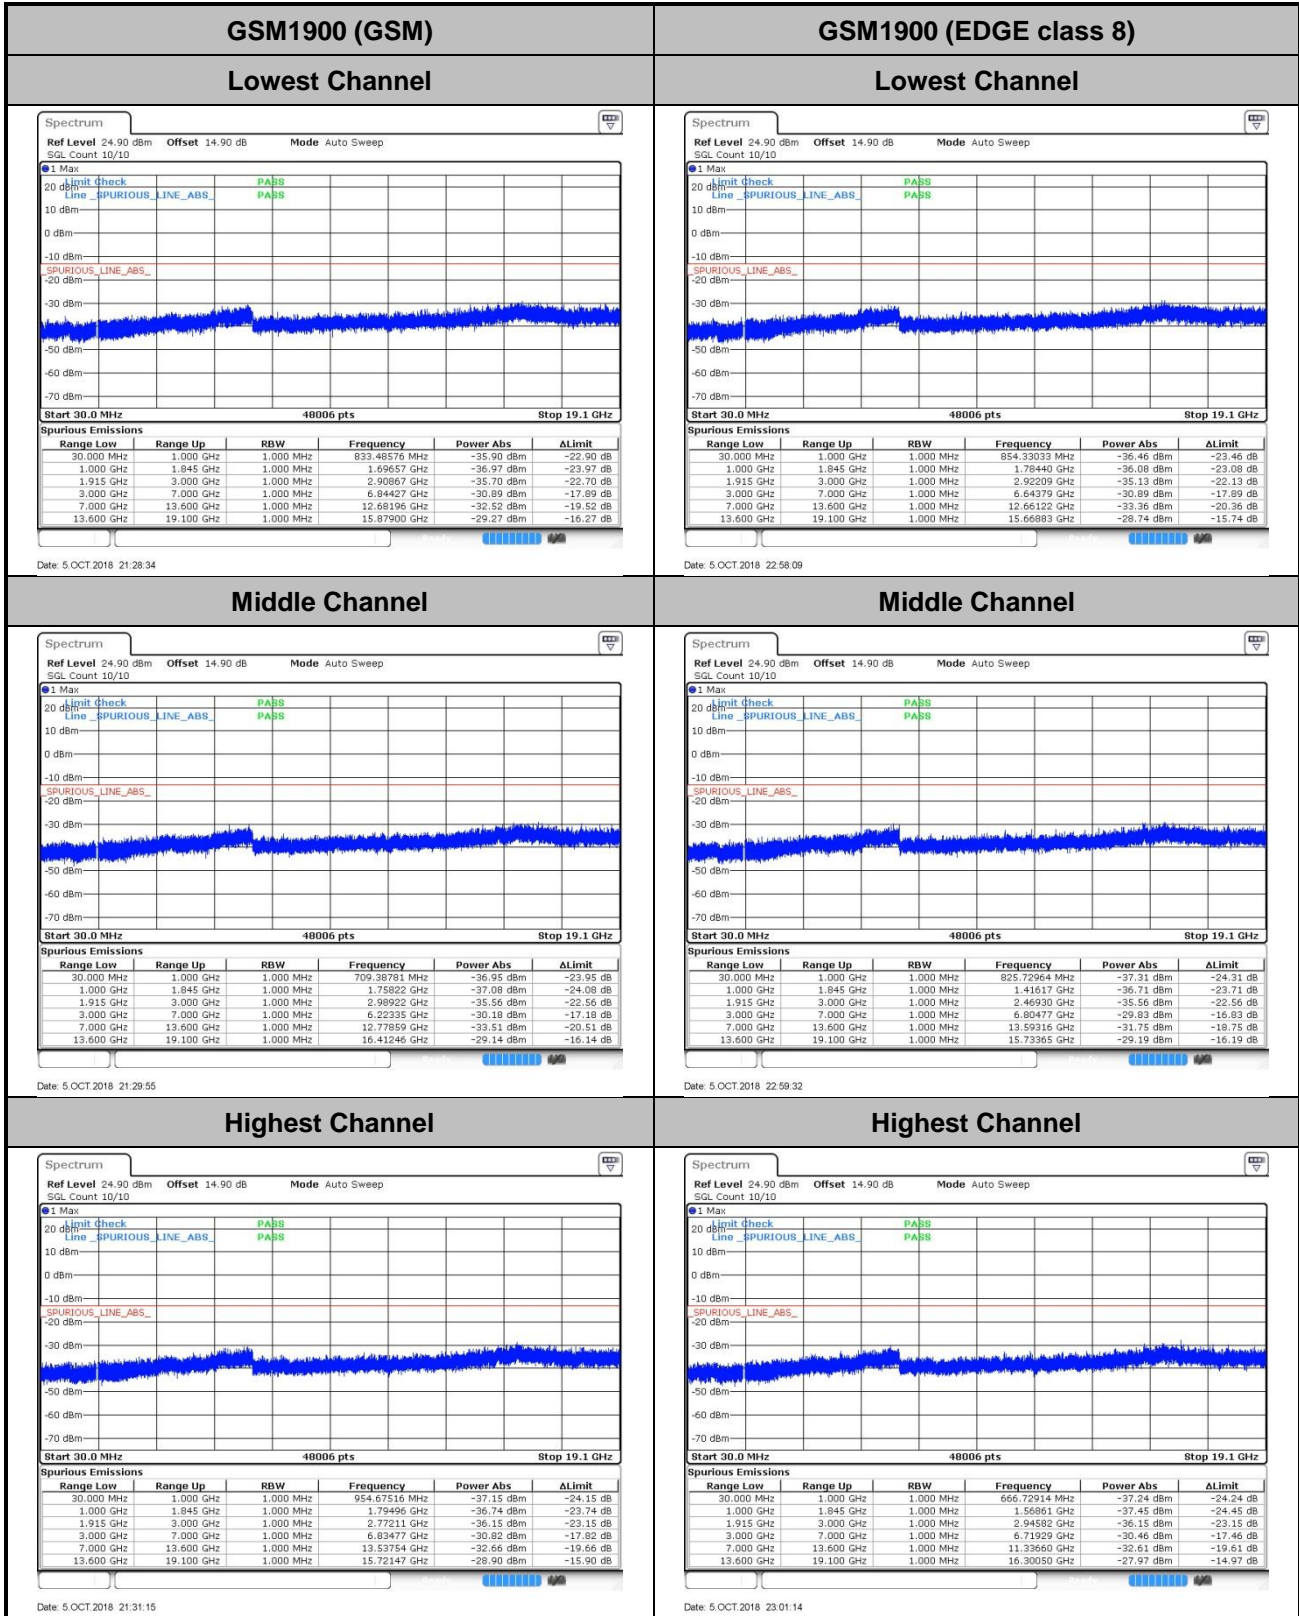



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

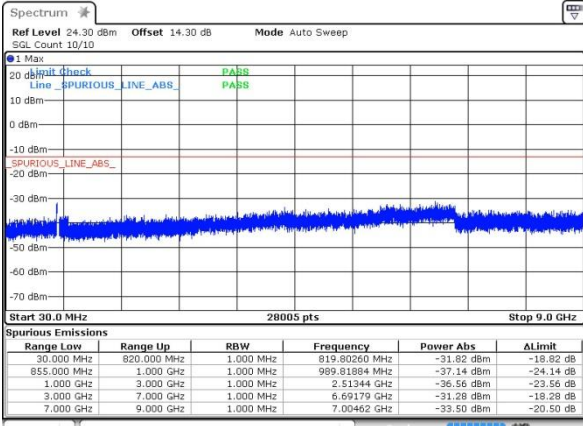

Date: 5.OCT.2018 22:38:30


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

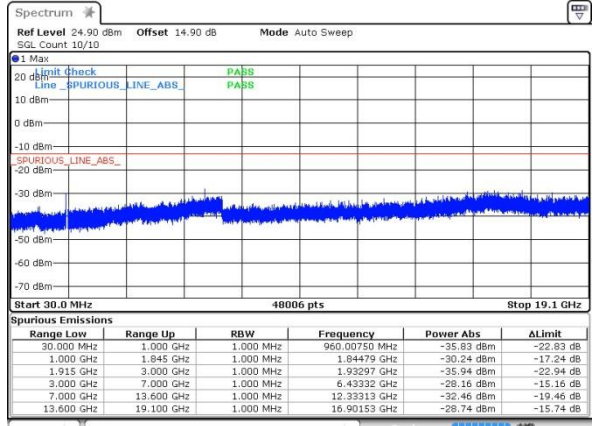


Date: 5.OCT.2018 21:56:25

Middle Channel

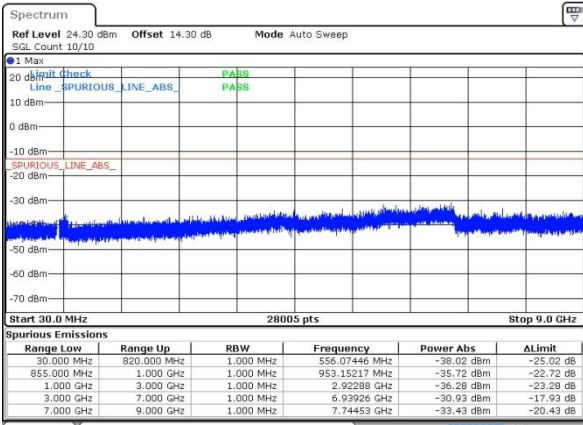


Date: 5.OCT.2018 22:40:06

Middle Channel

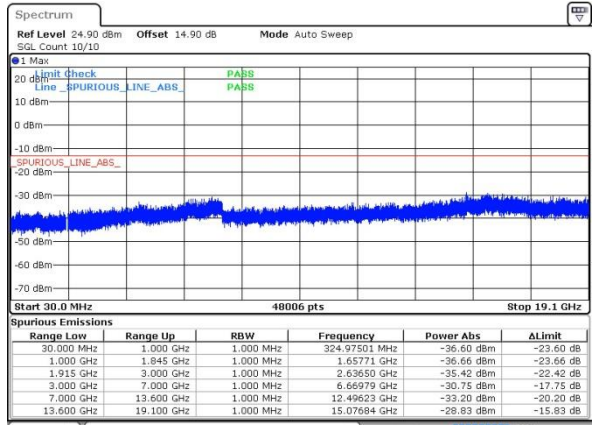


Date: 5.OCT.2018 21:57:48

Highest Channel

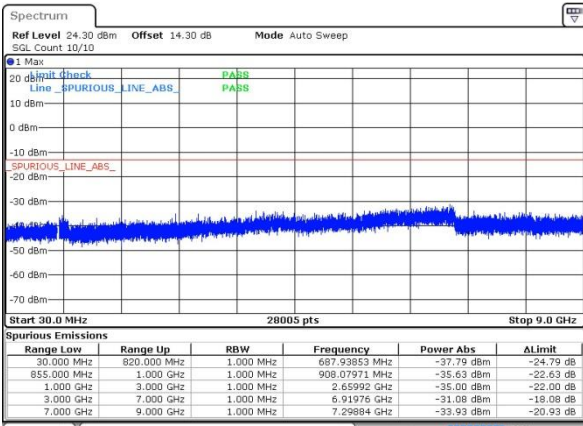

Date: 5.OCT.2018 22:41:27

Highest Channel

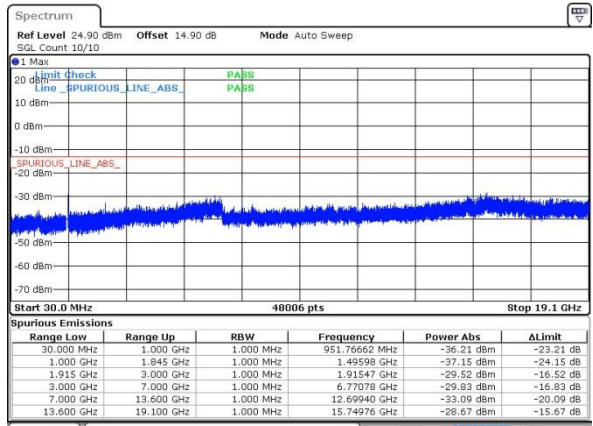


Date: 5.OCT.2018 21:59:12




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

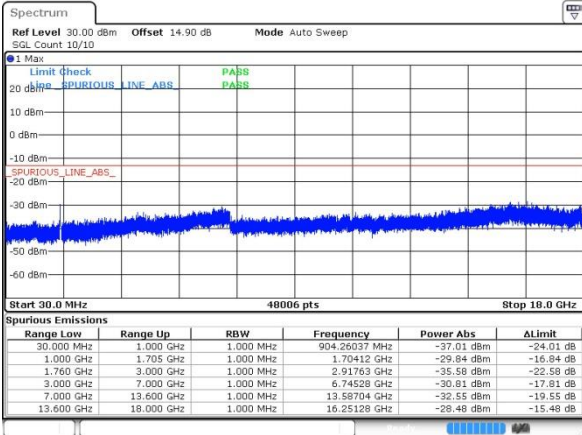


Date: 5.OCT.2018 22:17:33

Middle Channel






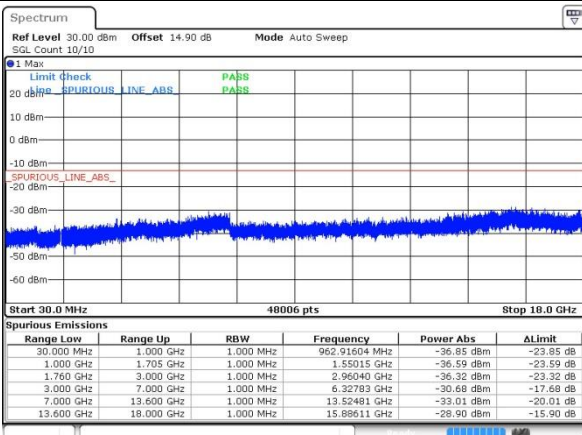


Date: 5.OCT.2018 22:19:16

Highest Channel

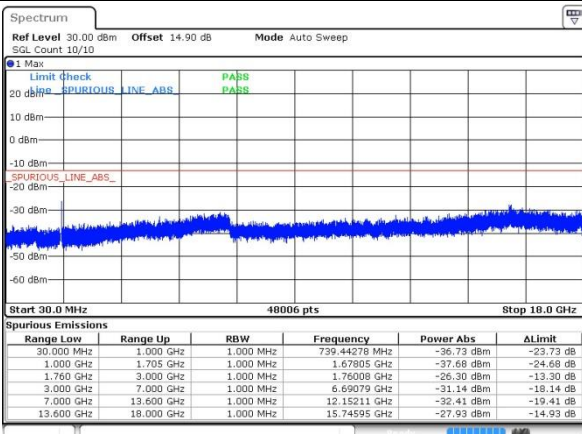

Date: 5.OCT.2018 22:21:01

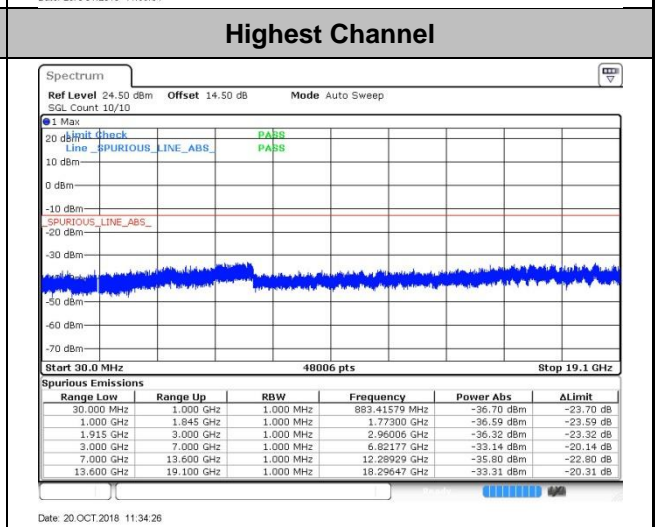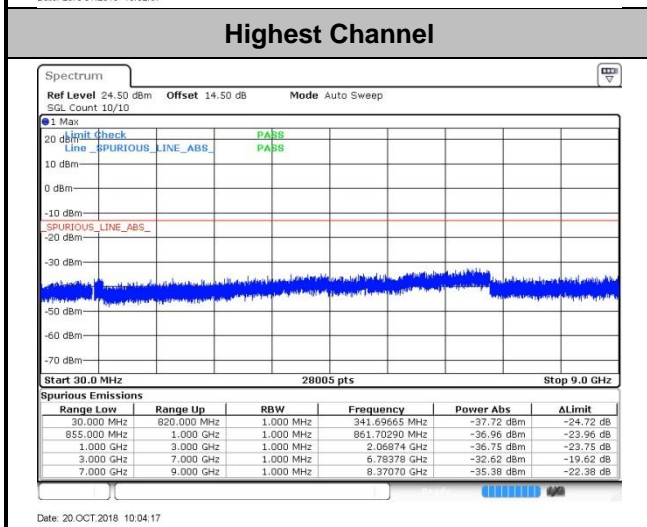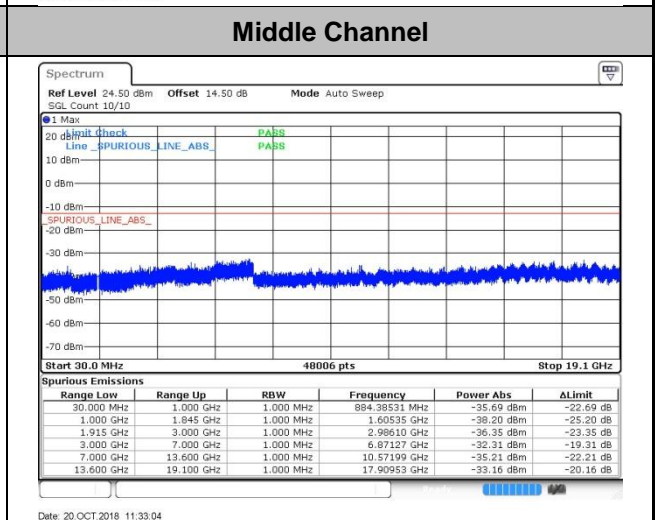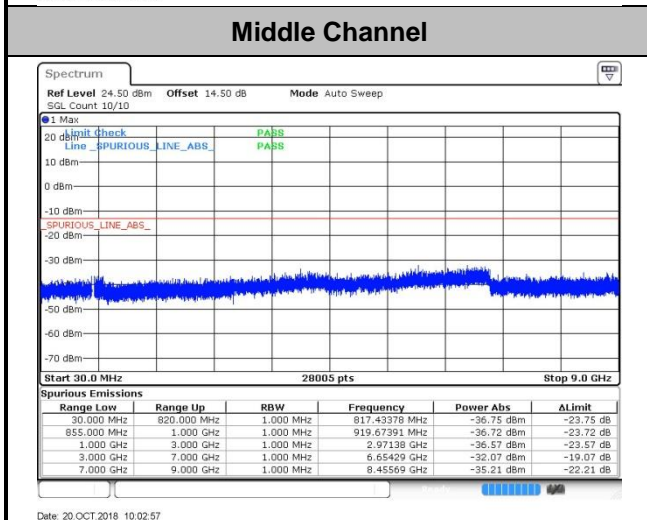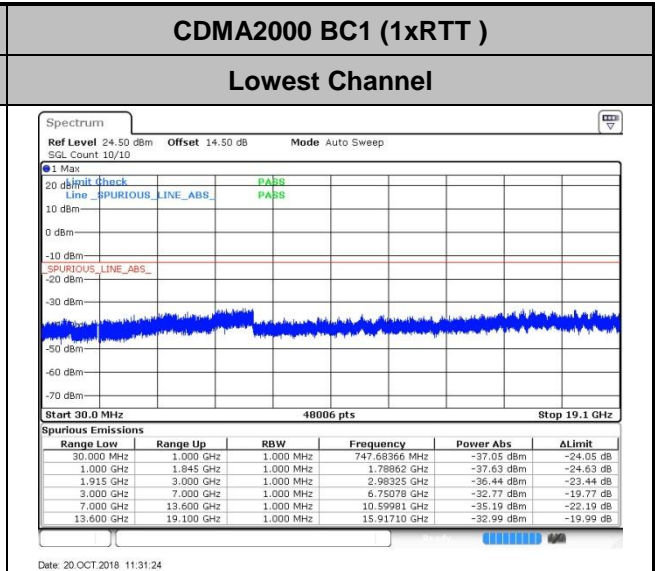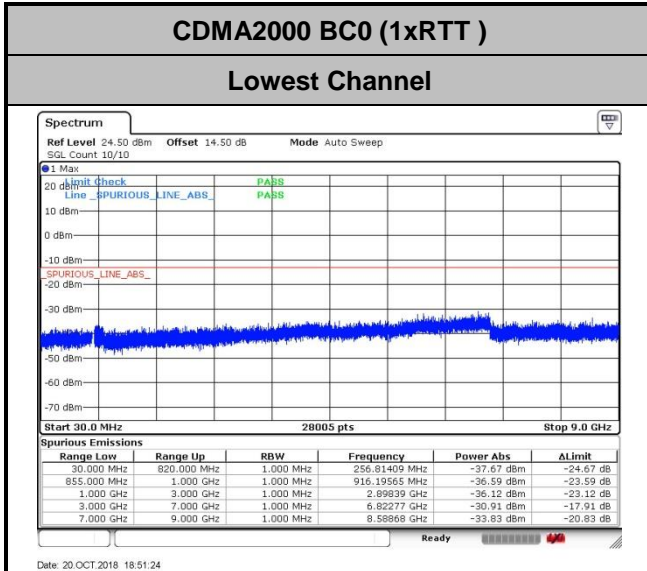



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0036	0.0155	PASS
40	Normal Voltage	0.0407	0.0072	
30	Normal Voltage	0.0012	0.0299	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0371	0.0096	
0	Normal Voltage	0.0227	0.0335	
-10	Normal Voltage	0.0215	0.0227	
-20	Normal Voltage	0.0012	0.0072	
-30	Normal Voltage	0.0024	0.0239	
20	Maximum Voltage	0.0036	0.0143	
20	Normal Voltage	0.0036	0.0108	
20	Battery End Point	0.0191	0.0120	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0160	0.0064	PASS
40	Normal Voltage	0.0011	0.0176	
30	Normal Voltage	0.0048	0.0122	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0176	0.0144	
0	Normal Voltage	0.0138	0.0154	
-10	Normal Voltage	0.0011	0.0165	
-20	Normal Voltage	0.0133	0.0101	
-30	Normal Voltage	0.0016	0.0186	
20	Maximum Voltage	0.0160	0.0106	
20	Normal Voltage	0.0005	0.0027	
20	Battery End Point	0.0037	0.0016	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0155	PASS
40	Normal Voltage	0.0418	
30	Normal Voltage	0.0395	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0179	
0	Normal Voltage	0.0359	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0203	
-30	Normal Voltage	0.0311	
20	Maximum Voltage	0.0514	
20	Normal Voltage	0.0191	
20	Battery End Point	0.0048	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0112	PASS
40	Normal Voltage	0.0101	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0080	
-20	Normal Voltage	0.0032	
-30	Normal Voltage	0.0000	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0080	
20	Battery End Point	0.0096	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0144	PASS
40	Normal Voltage	0.0133	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0110	
0	Normal Voltage	0.0075	
-10	Normal Voltage	0.0040	
-20	Normal Voltage	0.0006	
-30	Normal Voltage	0.0069	
20	Maximum Voltage	0.0069	
20	Normal Voltage	0.0098	
20	Battery End Point	0.0023	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	CDMA2000 BC0 (1xRTT)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0110	PASS
40	Normal Voltage	0.0117	
30	Normal Voltage	0.0014	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0105	
0	Normal Voltage	0.0273	
-10	Normal Voltage	0.0265	
-20	Normal Voltage	0.0320	
-30	Normal Voltage	0.0182	
20	Maximum Voltage	0.0218	
20	Normal Voltage	0.0225	
20	Battery End Point	0.0349	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	CDMA2000 BC1 (1xRTT)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0016	PASS
40	Normal Voltage	0.0218	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0133	
0	Normal Voltage	0.0122	
-10	Normal Voltage	0.0202	
-20	Normal Voltage	0.0250	
-30	Normal Voltage	0.0048	
20	Maximum Voltage	0.0016	
20	Normal Voltage	0.0011	
20	Battery End Point	0.0032	

Note:

1. Normal Voltage = 4.0V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

GSM850 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-60.09	-13	-47.09	-61.30	2.32	5.68	H
	2472	-21.59	-13	-8.59	-22.22	3.02	5.80	H
	3297	-69.12	-13	-56.12	-71.58	3.27	7.88	H
	4122	-33.28	-13	-20.28	-36.66	3.73	9.25	H
	4944	-64.48	-13	-51.48	-68.34	4.20	10.20	H
	5769	-36.89	-13	-23.89	-40.91	4.52	10.69	H
	6594	-61.44	-13	-48.44	-65.56	4.83	11.10	H
	7419	-36.13	-13	-23.13	-40.83	5.11	11.96	H
	1648	-54.81	-13	-41.81	-56.02	2.32	5.68	V
	2472	-21.67	-13	-8.67	-22.30	3.02	5.80	V
	3297	-69.30	-13	-56.30	-71.76	3.27	7.88	V
	4122	-31.85	-13	-18.85	-35.23	3.73	9.25	V
	4944	-64.49	-13	-51.49	-68.35	4.20	10.20	V
	5769	-33.01	-13	-20.01	-37.03	4.52	10.69	V
	6594	-60.67	-13	-47.67	-64.79	4.83	11.10	V
	7419	-36.41	-13	-23.41	-41.11	5.11	11.96	V



Middle	1672	-59.04	-13	-46.04	-60.41	2.28	5.80	H
	2510	-25.19	-13	-12.19	-27.10	2.84	6.90	H
	3345	-64.65	-13	-51.65	-66.71	3.29	7.50	H
	4182	-30.28	-13	-17.28	-31.63	3.80	7.30	H
	5019	-62.62	-13	-49.62	-65.63	3.84	9.00	H
	5856	-37.53	-13	-24.53	-40.29	4.43	9.34	H
	6690	-60.40	-13	-47.40	-63.43	4.84	10.02	H
	7527	-50.27	-13	-37.27	-53.57	5.25	10.70	H
	1672	-56.14	-13	-43.14	-57.51	2.28	5.80	V
	2510	-23.22	-13	-10.22	-25.13	2.84	6.90	V
	3345	-62.94	-13	-49.94	-65.00	3.29	7.50	V
	4182	-35.07	-13	-22.07	-36.42	3.80	7.30	V
	5019	-60.23	-13	-47.23	-63.24	3.84	9.00	V
	5856	-35.30	-13	-22.30	-38.06	4.43	9.34	V
	6690	-60.21	-13	-47.21	-63.24	4.84	10.02	V
7527	-48.91	-13	-35.91	-52.21	5.25	10.70	V	
Highest	1698	-63.35	-13	-50.35	-64.56	2.32	5.68	H
	2546	-54.85	-13	-41.85	-55.48	3.02	5.80	H
	3396	-69.33	-13	-56.33	-71.79	3.27	7.88	H
	4245	-60.64	-13	-47.64	-64.02	3.73	9.25	H
	5094	-64.28	-13	-51.28	-68.14	4.20	10.20	H
	5943	-60.64	-13	-47.64	-64.66	4.52	10.69	H
	6789	-61.01	-13	-48.01	-65.13	4.83	11.10	H
	1698	-60.28	-13	-47.28	-61.49	2.32	5.68	V
	2546	-55.03	-13	-42.03	-55.66	3.02	5.80	V
	3396	-68.85	-13	-55.85	-71.31	3.27	7.88	V
	4245	-57.25	-13	-44.25	-60.63	3.73	9.25	V
	5094	-62.38	-13	-49.38	-66.24	4.20	10.20	V
	5940	-58.31	-13	-45.31	-62.33	4.52	10.69	V
6789	-57.31	-13	-44.31	-61.43	4.83	11.10	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-57.82	-13	-44.82	-59.03	2.319	5.68	H
	2472	-54.07	-13	-41.07	-54.70	3.02	5.80	H
	3297	-63.98	-13	-50.98	-66.44	3.27	7.88	H
	4122	-55.76	-13	-42.76	-59.14	3.73	9.25	H
	4944	-55.74	-13	-42.74	-59.60	4.20	10.20	H
	1648	-58.97	-13	-45.97	-60.18	2.32	5.68	V
	2472	-54.19	-13	-41.19	-54.82	3.02	5.80	V
	3297	-63.80	-13	-50.80	-66.26	3.27	7.88	V
	4122	-52.80	-13	-39.80	-56.18	3.73	9.25	V
	4944	-53.84	-13	-40.84	-57.70	4.20	10.20	V
Middle	1674	-56.24	-13	-43.24	-57.45	2.319	5.68	H
	2510	-52.30	-13	-39.30	-52.93	3.02	5.80	H
	3345	-63.95	-13	-50.95	-66.41	3.27	7.88	H
	4182	-56.05	-13	-43.05	-59.43	3.73	9.25	H
	5019	-53.96	-13	-40.96	-57.82	4.20	10.20	H
	1672	-57.06	-13	-44.06	-58.27	2.32	5.68	V
	2510	-51.67	-13	-38.67	-52.30	3.02	5.80	V
	3345	-64.17	-13	-51.17	-66.63	3.27	7.88	V
	4182	-53.01	-13	-40.01	-56.39	3.73	9.25	V
	5019	-51.51	-13	-38.51	-55.37	4.20	10.20	V
Highest	1698	-50.35	-13	-37.35	-51.56	2.319	5.68	H
	2546	-49.56	-13	-36.56	-50.19	3.02	5.80	H
	3396	-63.94	-13	-50.94	-66.40	3.27	7.88	H
	4245	-53.69	-13	-40.69	-57.07	3.73	9.25	H
	5094	-56.44	-13	-43.44	-60.30	4.20	10.20	H
	5943	-57.42	-13	-44.42	-61.44	4.52	10.69	H
	1698	-53.82	-13	-40.82	-55.03	2.32	5.68	V
	2546	-50.99	-13	-37.99	-51.62	3.02	5.80	V
	3396	-63.47	-13	-50.47	-65.93	3.27	7.88	V
	4245	-52.23	-13	-39.23	-55.61	3.73	9.25	V
	5094	-54.18	-13	-41.18	-58.04	4.20	10.20	V
5940	-55.33	-13	-42.33	-59.35	4.52	10.69	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V (RMC 12.2Kbps)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-68.12	-13	-55.12	-69.33	2.319	5.68	H
	2480	-65.14	-13	-52.14	-65.77	3.02	5.80	H
	3306	-63.74	-13	-50.74	-66.20	3.27	7.88	H
	1652	-68.26	-13	-55.26	-69.47	2.32	5.68	V
	2480	-65.27	-13	-52.27	-65.90	3.02	5.80	V
	3306	-63.95	-13	-50.95	-66.41	3.27	7.88	V
Middle	1672	-68.53	-13	-55.53	-69.74	2.319	5.68	H
	2510	-65.67	-13	-52.67	-66.30	3.02	5.80	H
	3345	-64.22	-13	-51.22	-66.68	3.27	7.88	H
	1672	-68.61	-13	-55.61	-69.82	2.32	5.68	V
	2510	-66.05	-13	-53.05	-66.68	3.02	5.80	V
	3345	-63.86	-13	-50.86	-66.32	3.27	7.88	V
Highest	1694	-68.13	-13	-55.13	-69.34	2.319	5.68	H
	2540	-65.41	-13	-52.41	-66.04	3.02	5.80	H
	3387	-64.07	-13	-51.07	-66.53	3.27	7.88	H
	1694	-68.50	-13	-55.50	-69.71	2.32	5.68	V
	2540	-65.42	-13	-52.42	-66.05	3.02	5.80	V
	3387	-63.98	-13	-50.98	-66.44	3.27	7.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3699	-63.37	-13	-50.37	-68.24	3.55	8.42	H
	5550	-60.55	-13	-47.55	-66.89	4.34	10.68	H
	7401	-52.92	-13	-39.92	-59.72	5.14	11.94	H
	3699	-63.53	-13	-50.53	-68.40	3.55	8.42	V
	5550	-59.27	-13	-46.27	-65.61	4.34	10.68	V
	7401	-51.37	-13	-38.37	-58.17	5.14	11.94	V
Middle	3759	-61.03	-13	-48.03	-65.90	3.55	8.42	H
	5640	-59.74	-13	-46.74	-66.08	4.34	10.68	H
	7521	-54.29	-13	-41.29	-61.09	5.14	11.94	H
	3760	-61.62	-13	-48.62	-66.49	3.55	8.42	V
	5640	-59.30	-13	-46.30	-65.64	4.34	10.68	V
	7521	-51.45	-13	-38.45	-58.25	5.14	11.94	V
Highest	3819	-62.70	-13	-49.70	-67.57	3.55	8.42	H
	5730	-60.36	-13	-47.36	-66.70	4.34	10.68	H
	7638	-53.01	-13	-40.01	-59.81	5.14	11.94	H
	3819	-62.23	-13	-49.23	-67.10	3.55	8.42	V
	5729	-59.85	-13	-46.85	-66.19	4.34	10.68	V
	7638	-54.25	-13	-41.25	-61.05	5.14	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3699	-58.17	-13	-45.17	-63.04	3.55	8.42	H
	5550	-59.83	-13	-46.83	-66.17	4.34	10.68	H
	7401	-53.92	-13	-40.92	-60.72	5.14	11.94	H
	3699	-58.65	-13	-45.65	-63.52	3.55	8.42	V
	5550	-59.11	-13	-46.11	-65.45	4.34	10.68	V
	7401	-51.00	-13	-38.00	-57.80	5.14	11.94	V
Middle	3759	-59.26	-13	-46.26	-64.13	3.55	8.42	H
	5640	-60.57	-13	-47.57	-66.91	4.34	10.68	H
	7521	-54.09	-13	-41.09	-60.89	5.14	11.94	H
	3759	-60.17	-13	-47.17	-65.04	3.55	8.42	V
	5640	-59.94	-13	-46.94	-66.28	4.34	10.68	V
	7521	-50.63	-13	-37.63	-57.43	5.14	11.94	V
Highest	3819	-62.50	-13	-49.50	-67.37	3.55	8.42	H
	5729	-60.13	-13	-47.13	-66.47	4.34	10.68	H
	7638	-52.91	-13	-39.91	-59.71	5.14	11.94	H
	3819	-63.09	-13	-50.09	-67.96	3.55	8.42	H
	5730	-60.31	-13	-47.31	-66.65	4.34	10.68	H
	7638	-52.64	-13	-39.64	-59.44	5.14	11.94	H

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II (RMC 12.2Kbps)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-62.03	-13	-49.03	-66.90	3.55	8.42	H
	5556	-61.32	-13	-48.32	-67.66	4.34	10.68	H
	7410	-55.64	-13	-42.64	-62.44	5.14	11.94	H
	3705	-62.27	-13	-49.27	-67.14	3.55	8.42	V
	5557	-61.55	-13	-48.55	-67.89	4.34	10.68	V
	7410	-55.50	-13	-42.50	-62.30	5.14	11.94	V
Middle	3759	-62.22	-13	-49.22	-67.09	3.55	8.42	H
	5640	-60.93	-13	-47.93	-67.27	4.34	10.68	H
	7521	-55.43	-13	-42.43	-62.23	5.14	11.94	H
	3759	-62.31	-13	-49.31	-67.18	3.55	8.42	V
	5640	-61.00	-13	-48.00	-67.34	4.34	10.68	V
	7521	-54.55	-13	-41.55	-61.35	5.14	11.94	V
Highest	3816	-62.81	-13	-49.81	-67.68	3.55	8.42	H
	5722	-60.50	-13	-47.50	-66.84	4.34	10.68	H
	7629	-55.30	-13	-42.30	-62.10	5.14	11.94	H
	3816	-62.70	-13	-49.70	-67.57	3.55	8.42	V
	5722	-60.36	-13	-47.36	-66.70	4.34	10.68	V
	7629	-54.97	-13	-41.97	-61.77	5.14	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV (RMC 12.2Kbps)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3423	-59.55	-13	-46.55	-64.27	3.41	8.13	H
	5137.2	-59.23	-13	-46.23	-65.24	4.195	10.20	H
	6849	-57.24	-13	-44.24	-63.69	4.91	11.36	H
	3423	-61.52	-13	-48.52	-66.24	3.413	8.13	V
	5136	-59.56	-13	-46.56	-65.57	4.195	10.20	V
	6849	-57.26	-13	-44.26	-63.71	4.911	11.36	V
Middle	3465	-59.65	-13	-46.65	-64.37	3.41	8.13	H
	5199	-58.86	-13	-45.86	-64.87	4.195	10.20	H
	6930	-57.28	-13	-44.28	-63.73	4.91	11.36	H
	3465	-61.04	-13	-48.04	-65.76	3.413	8.13	V
	5199	-58.69	-13	-45.69	-64.70	4.195	10.20	V
	6930	-57.09	-13	-44.09	-63.54	4.911	11.36	V
Highest	3504	-58.87	-13	-45.87	-63.59	3.41	8.13	H
	5257.8	-60.80	-13	-47.80	-66.81	4.195	10.20	H
	7011	-56.04	-13	-43.04	-62.49	4.91	11.36	H
	3504	-61.55	-13	-48.55	-66.27	3.413	8.13	V
	5259	-60.16	-13	-47.16	-66.17	4.195	10.20	V
	7011	-56.87	-13	-43.87	-63.32	4.911	11.36	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA2000 BC0 (1xRTT)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1650	-67.84	-13	-54.84	-69.05	2.319	5.68	H
	2474.1	-64.93	-13	-51.93	-65.56	3.02	5.80	H
	3300	-64.44	-13	-51.44	-66.90	3.27	7.88	H
	1650	-67.36	-13	-54.36	-68.57	2.32	5.68	V
	2474.1	-64.82	-13	-51.82	-65.45	3.02	5.80	V
	3300	-64.17	-13	-51.17	-66.63	3.27	7.88	V
Middle	1672	-67.77	-13	-54.77	-68.98	2.319	5.68	H
	2508	-65.10	-13	-52.10	-65.73	3.02	5.80	H
	3348	-63.70	-13	-50.70	-66.16	3.27	7.88	H
	1672	-67.72	-13	-54.72	-68.93	2.32	5.68	V
	2508	-65.03	-13	-52.03	-65.66	3.02	5.80	V
	3348	-64.28	-13	-51.28	-66.74	3.27	7.88	V
Highest	1696	-67.37	-13	-54.37	-68.58	2.319	5.68	H
	2544	-66.01	-13	-53.01	-66.64	3.02	5.80	H
	3396	-63.78	-13	-50.78	-66.24	3.27	7.88	H
	1696	-66.93	-13	-53.93	-68.14	2.32	5.68	V
	2544	-66.09	-13	-53.09	-66.72	3.02	5.80	V
	3396	-64.05	-13	-51.05	-66.51	3.27	7.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA2000 BC1 (1xRTT)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-59.57	-13	-46.57	-64.44	3.55	8.42	H
	5553.75	-59.56	-13	-46.56	-65.90	4.34	10.68	H
	7404	-54.76	-13	-41.76	-61.56	5.14	11.94	H
	9252	-45.50	-13	-32.50	-52.50	5.66	12.66	H
	3702	-58.56	-13	-45.56	-63.43	3.55	8.42	V
	5553.75	-59.79	-13	-46.79	-66.13	4.34	10.68	V
	7404	-52.45	-13	-39.45	-59.25	5.14	11.94	V
	9252	-45.19	-13	-32.19	-52.19	5.66	12.66	V
Middle	3759	-59.56	-13	-46.56	-64.43	3.55	8.42	H
	5640	-59.71	-13	-46.71	-66.05	4.34	10.68	H
	7521	-53.80	-13	-40.80	-60.60	5.14	11.94	H
	9396	-44.63	-13	-31.63	-51.63	5.66	12.66	H
	3759	-61.94	-13	-48.94	-66.81	3.55	8.42	V
	5640	-60.23	-13	-47.23	-66.57	4.34	10.68	V
	7521	-51.98	-13	-38.98	-58.78	5.14	11.94	V
	9396	-47.45	-13	-34.45	-54.45	5.66	12.66	V
Highest	3816	-61.74	-13	-48.74	-66.61	3.55	8.42	H
	5726.25	-60.07	-13	-47.07	-66.41	4.34	10.68	H
	7635	-54.57	-13	-41.57	-61.37	5.14	11.94	H
	9540	-45.21	-13	-32.21	-52.21	5.66	12.66	H
	3816	-61.76	-13	-48.76	-66.63	3.55	8.42	V
	5727	-60.26	-13	-47.26	-66.60	4.34	10.68	V
	7635	-53.68	-13	-40.68	-60.48	5.14	11.94	V
	9540	-45.81	-13	-32.81	-52.81	5.66	12.66	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.