FCC RF Test Report

APPLICANT : Motorola Mobility LLC EQUIPMENT : Mobile Cellular Phone

BRAND NAME : Motorola

MODEL NAME : XT1952-3;XT1952-4;XT1952DL

FCC ID : IHDT56XR1

STANDARD : FCC 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Sep. 21, 2018 and completely tested on Nov. 03, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

James Huang

TESTING NVLAP LAB CODE 600155-0

Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 1 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

TABLE OF CONTENTS

RE	VISIO	N HISTORY	.3
SU	MMAR	Y OF TEST RESULT	. 4
1	GENE	RAL DESCRIPTION	.5
	1.1	Applicant	.5
	1.2	Manufacturer	.5
	1.3	Feature of Equipment Under Test	.5
	1.4	Product Specification of Equipment Under Test	
	1.5	Modification of EUT	.6
	1.6	Specification of Accessory	
	1.7	Maximum Frequency Tolerance and Emission Designator	
	1.8	Testing Site	
	1.9	Applied Standards	.8
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	.9
	2.1	Test Mode	.9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	TEST	RESULT	12
	3.1	Conducted Output Power Measurement	12
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13
	3.3	Emissions Mask Measurement	14
	3.4	Emissions Mask – Out Of Band Emissions Measurement	
	3.5	Field Strength of Spurious Radiation Measurement	
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT2	21
5	UNCE	ERTAINTY OF EVALUATION	22
ΑP	PENDI	X A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PENDI	X B. TEST RESULTS OF RADIATED TEST	
ΑP	PENDI	X C. TEST SETUP PHOTOGRAPHS	

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 2 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW892103B	Rev. 01	Initial issue of report	Dec. 20, 2018

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1

: 3 of 21 Page Number Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01

Report No.: FW892103B

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	\$2.1051 Emission masks – \$90.691 In-band emissions		< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 50.15 dB at 2444.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 4 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1952-3;XT1952-4;XT1952DL
FCC ID	IHDT56XR1
	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/FM/GNSS
ELIT cumparts Badias application	WLAN 11b/g/n HT20
EUT supports Radios application	WLAN 11a/n HT20/HT40
	Bluetooth BR/EDR/LE
IMEI/MEID Code	Conducted: 359515090007257
IMEI/MEID Code	Radiation: 359515090007695
HW Version	DVT 2
SW Version	PPY29.17
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard						
Tx Frequency	814.7 ~ 823.3 MHz					
Rx Frequency	859.7 ~ 868.3 MHz					
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz					
Maximum Output Power to Antenna	22.54 dBm					
Antenna Type	Fixed Internal Antenna					
Antenna Gain	-3.5 dBi					
Type of Modulation	QPSK / 16QAM / 64QAM					

Remark: This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).

Sporton International (Kunshan) Inc. : 5 of 21 Page Number TEL: 86-512-57900158 FAX: 86-512-57900958

FCC ID: IHDT56XR1

Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01

Report No.: FW892103B

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

Specification of Accessory 1.6

	Specification of Accessory									
AC Adapter 1	Brand Name	Motorola(Salom)	Model Name	SC-41						
AC Adapter 1	Power Rating	I/P: 100 - 240 Vac, 0	.13A, O/P: 5Vdc 20	00mA						
AC Adapter 2	Brand Name	Motorola(Acbel)	Model Name	SC-41						
	Power Rating	I/P: 100 - 240 Vac, 0	240 Vac, 0.13A, O/P: 5Vdc 2000mA							
Pottory	Brand Name	Motorola(SCUD)	Model Name	JE40						
Battery	Power Rating	3.8Vdc, 3000mAh	Туре	Li-ion						
USB Cable 1	Brand Name	LiQi	L32B-053000100/ L32B-053000100L							
	Signal Line	1.0 meter, shielded cable, without ferrite core								
USB Cable 2	Brand Name	SaiBao	Model Name S32B-053000100/ S32B-053000100L							
	Signal Line	1.0 meter, shielded cable, without ferrite core								

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1

Page Number : 6 of 21 Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01

Report No.: FW892103B

1.7 Maximum Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted Power (W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M11G7D	0.1782
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M10W7D	0.1589
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M10W7D	0.1186
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M72G7D	0.1795
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M72W7D	0.1493
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M73W7D	0.1175
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M51G7D	0.1722
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M49W7D	0.1452
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M50W7D	0.1413
Part 90S	LTE Band 26	QPSK	10 MHz	0.0087 ppm	8M97G7D	0.1726
Part 90S	LTE Band 26	16QAM	10 MHz	-	8M97W7D	0.1409
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M05W7D	0.1384
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M4G7D	0.1778
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M5W7D	0.1486
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M5W7D	0.1442

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 7 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

1.8 Testing Site

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Report No.: FW892103B

: 8 of 21

: Rev. 01

Report Issued Date: Dec. 20, 2018

Report Template No.: BU5-FWLTE Version 1.0

Page Number

Report Version

Test Site	Sporton Internationa	Sporton International (Kunshan) Inc.								
	No. 1098, Pengxi North Road, Kunshan Economic Development Zone,									
Test Site Location	Jiangsu Province 215335, China									
rest site Location	TEL: 86-512-57900158									
	FAX : 86-512-57900958									
	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.							
Test Site No.	TH01-KS	CN5013	630927							
	03CH06-KS	CN3013	030927							

Note: The test site complies with ANSI C63.4 2014 requirement.

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission: 30MHz to 10th harmonic.

Took Home	Don e	Bandwidth (MHz)				Modulation		RB#			Test Channel				
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	Н
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	٧	v	v	v	•	v	v			v	V	v	v
Emission masks In-band emissions	26	v	٧	v	v	v	•	v	v	>		v	٧		v
Emission masks – Out of band emissions	26	v	>	v	v	v	•	٧	v	>			٧	v	v
Frequency Stability	26				v		-	v				v		v	
Radiated Spurious Emission	26	v	٧	v	v	v	•	v		>				v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 824MHz-849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 4. All the radiated test cases were performed with Adapter 1 and USB Cable 1.														

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 9 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report No.: FW892103B

2.2 Connection Diagram of Test System

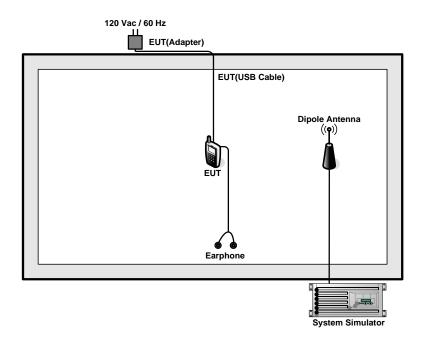

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Lianyun	LYM500-036-002	N/A	Unshielded, 1.8m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

= 4.2 + 10 = 14.2 (dB)

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 10 of 21 Report Issued Date : Dec. 20, 2018

Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

2.5 Frequency List of Low/Middle/High Channels

	LTE Band 26 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
45	Channel	26765	-	-							
15	Frequency	821.5	-	-							
10	Channel	-	26740	-							
10	Frequency	-	819	-							
F	Channel	26715	26740	26765							
5	Frequency	816.5	819	821.5							
3	Channel	26705	26740	26775							
3	Frequency	815.5	819	822.5							
1.4	Channel	26697	26740	26783							
1.4	Frequency	814.7	819	823.3							

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 11 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 12 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report No.: FW892103B

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

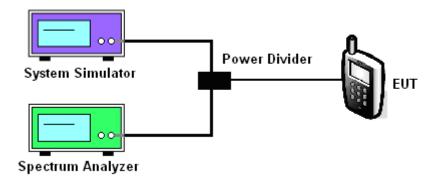

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Report No.: FW892103B

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

Page Number : 14 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.3.4 Test Setup

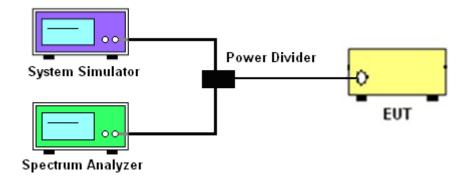

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 15 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

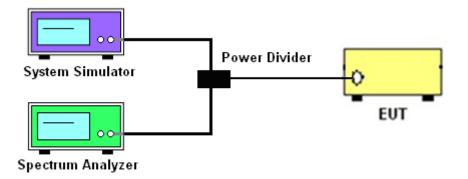

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 16 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report No.: FW892103B

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

Page Number : 17 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01


Report No.: FW892103B

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

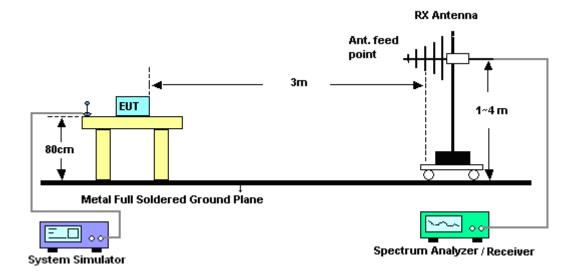

For radiated test above 1GHz

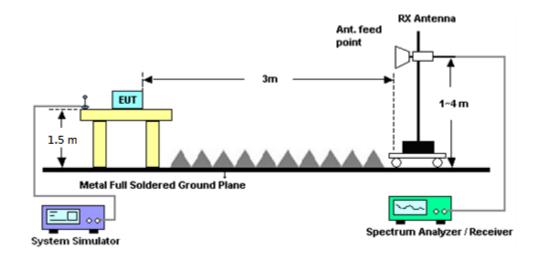

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 18 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 4. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 6. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 7. battery operating end point, which shall be specified by the manufacturer.
- 8. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

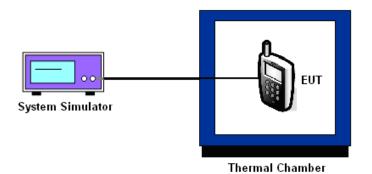

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 20 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 11, 2018	Nov. 03, 2018	Oct. 10, 2019	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 19, 2018	Nov. 03, 2018	Apr. 18, 2019	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Nov. 03, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Nov. 03, 2018	Jun. 26, 2019	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz-44GHz	Jun. 25, 2018	Oct. 14, 2018	Jun. 24, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 29, 2018	Oct. 14, 2018	Jan. 28, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	Oct. 14, 2018	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Oct. 14, 2018	Feb. 06, 2019	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Oct. 14, 2018	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35- HG	2014749	18~40GHz	Feb. 08, 2018	Oct. 14, 2018	Feb. 07, 2019	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Oct. 14, 2018	Apr. 16, 2019	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5G Hz	Dec. 16, 2017	Oct. 14, 2018	Dec. 15, 2018	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 14, 2018	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 14, 2018	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 14, 2018	NCR	Radiation (03CH06-KS)
RF Cable	HUBER+SUHN ER	SUCOFLEX1 26E	03CH06KS001	30Mhz-18Ghz	Jul. 10, 2018	Oct. 14, 2018	Jul. 09, 2019	Radiation (03CH06-KS)
RF Cable	HUBER+SUHN ER	SUCOFLEX1 26E	03CH06KS002	30Mhz-18Ghz	Jul. 10, 2018	Oct. 14, 2018	Jul. 09, 2019	Radiation (03CH06-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-280 5-3000-18000 -40ST	2	3G High Pass	Jun. 19, 2018	Oct. 14, 2018	Jun. 18, 2019	Radiation (03CH06-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-935 -1000-15000- 40ST	2	1G High Pass	Jun. 19, 2018	Oct. 14, 2018	Jun. 18, 2019	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Oct. 14, 2018	Oct. 18, 2019	Radiation (03CH06-KS)

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 21 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 9 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.0dB
Confidence of 95% (U = $2UC(y)$)	

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : 22 of 21
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
15	1	0		22.18							
15	1	37		22.16							
15	1	74		22.50							
15	36	0	QPSK	21.45							
15	36	20		21.19							
15	36	39		21.00							
15	75	0		21.24							
15	1	0		21.54							
15	1	37		21.17							
15	1	74		21.72							
15	36	0	16-QAM	20.37	-	-					
15	36	20		20.20							
15	36	39		20.07							
15	75	0		20.33							
15	1	0		21.41							
15	1	37		21.15							
15	1	74		21.59							
15	36	0	64-QAM	20.34							
15	36	20		20.15							
15	36	39		19.95							
15	75	0		20.34							

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : A1 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
10	1	0			22.17					
10	1	25			22.07					
10	1	49			22.37					
10	25	0	QPSK		21.08					
10	25	12			21.04					
10	25	25			21.06					
10	50	0			21.02					
10	1	0			21.46					
10	1	25			21.12					
10	1	49			21.49					
10	25	0	16-QAM	-	20.05	-				
10	25	12			20.02					
10	25	25			20.02					
10	50	0			20.13					
10	1	0			21.36					
10	1	25			21.08					
10	1	49			21.41					
10	25	0	64-QAM		20.06					
10	25	12			20.03					
10	25	25			20.04					
10	50	0			20.06					

Page Number : A2 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
5	1	0		22.26	22.35	22.20				
5	1	12		22.32	22.29	22.36				
5	1	24		22.21	22.30	22.33				
5	12	0	QPSK	21.15	21.20	21.30				
5	12	7		21.17	21.26	21.28				
5	12	13		21.21	21.20	21.26				
5	25	0		21.29	21.31	21.35				
5	1	0		21.54	21.59	21.62				
5	1	12	16-QAM	21.42	21.44	21.44				
5	1	24		21.51	21.53	21.56				
5	12	0		20.20	20.19	20.29				
5	12	7		20.16	20.27	20.26				
5	12	13		20.26	20.20	20.29				
5	25	0		20.21	20.24	20.32				
5	1	0		21.38	21.41	21.50				
5	1	12		21.26	21.27	21.26				
5	1	24		21.40	21.38	21.50				
5	12	0	64-QAM	20.19	20.21	20.27				
5	12	7		20.15	20.29	20.28				
5	12	13		20.22	20.16	20.29				
5	25	0		20.24	20.26	20.33				

Page Number : A3 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
3	1	0		22.47	22.50	22.54				
3	1	7		22.54	22.46	22.48				
3	1	14		22.37	22.33	22.30				
3	8	0	QPSK	21.40	21.42	21.47				
3	8	4		21.42	21.41	21.46				
3	8	7		21.36	21.31	21.43				
3	15	0		21.38	21.32	21.43				
3	1	0		21.71	21.67	21.74				
3	1	7	16-QAM	21.55	21.40	21.69				
3	1	14		21.64	21.52	21.63				
3	8	0		20.50	20.51	20.54				
3	8	4		20.51	20.47	20.52				
3	8	7		20.45	20.40	20.54				
3	15	0		20.44	20.38	20.42				
3	1	0		20.69	20.67	20.68				
3	1	7		20.69	20.64	20.70				
3	1	14		20.60	20.55	20.51				
3	8	0	64-QAM	19.56	19.52	19.50				
3	8	4		19.57	19.50	19.46				
3	8	7		19.53	19.46	19.48				
3	15	0		19.44	19.37	19.46				

Page Number : A4 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
1.4	1	0		22.27	22.36	22.25					
1.4	1	3		22.46	22.48	22.37					
1.4	1	5		22.35	22.51	22.20					
1.4	3	0	QPSK	22.33	22.45	22.03					
1.4	3	1		22.39	22.48	22.01					
1.4	3	3		22.36	22.44	22.09					
1.4	6	0		21.36	21.48	21.13					
1.4	1	0		21.95	22.00	21.77					
1.4	1	3		22.01	21.96	21.68					
1.4	1	5		21.93	22.00	21.62					
1.4	3	0	16-QAM	21.35	21.49	21.00					
1.4	3	1		21.37	21.54	21.02					
1.4	3	3		21.32	21.47	21.02					
1.4	6	0		20.48	20.58	20.14					
1.4	1	0		20.53	20.57	20.13					
1.4	1	3		20.56	20.71	20.20					
1.4	1	5		20.55	20.63	20.21					
1.4	3	0	64-QAM	20.55	20.60	20.19					
1.4	3	1		20.51	20.70	20.25					
1.4	3	3		20.63	20.74	20.29					
1.4	6	0		19.40	19.49	19.07					


Page Number : A5 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)											
BW	1.4	ИНz	Hz 3MHz		5N	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.267	1.281	3.033	2.967	4.895	4.795	-	-	14.416	14.505	-	-	
Middle CH	1.264	1.278	3.027	3.033	4.845	4.925	10.01	9.83	-	-	-	-	
Highest CH	1.295	1.301	3.021	3.003	4.895	4.925	-	-	-	-	-	-	
Mode					LTE Ba	and 26 : 3	26dB BV	V(MHz)					
BW	1.4	ИHz	3N	lHz	5N	5MHz 10MHz			15MHz		20MHz		
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM				
Lowest CH	1.278		3.003		4.955				14.476				
Middle CH	1.323		2.967		4.905		9.95						
Highest CH	1.267		2.943		4.895								


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : A6 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report No.: FW892103B

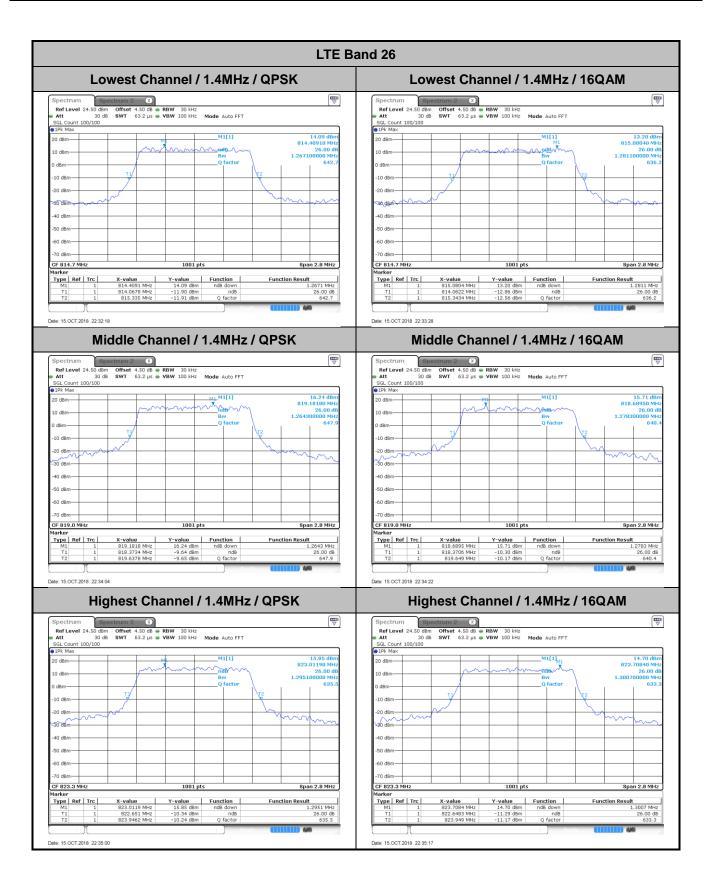


: A7 of A46 Page Number Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 1.0

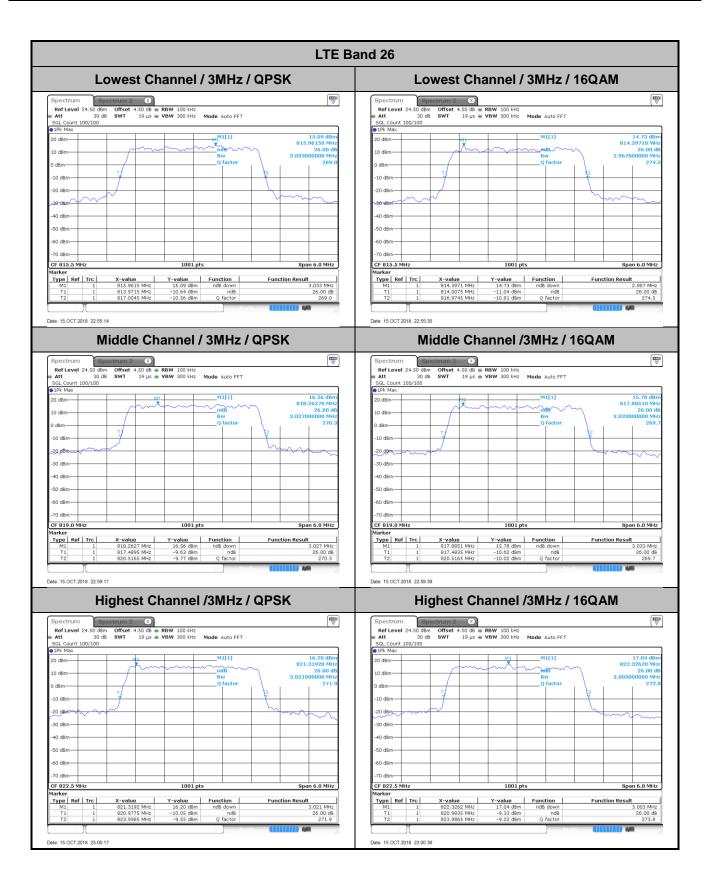


Page Number : A8 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

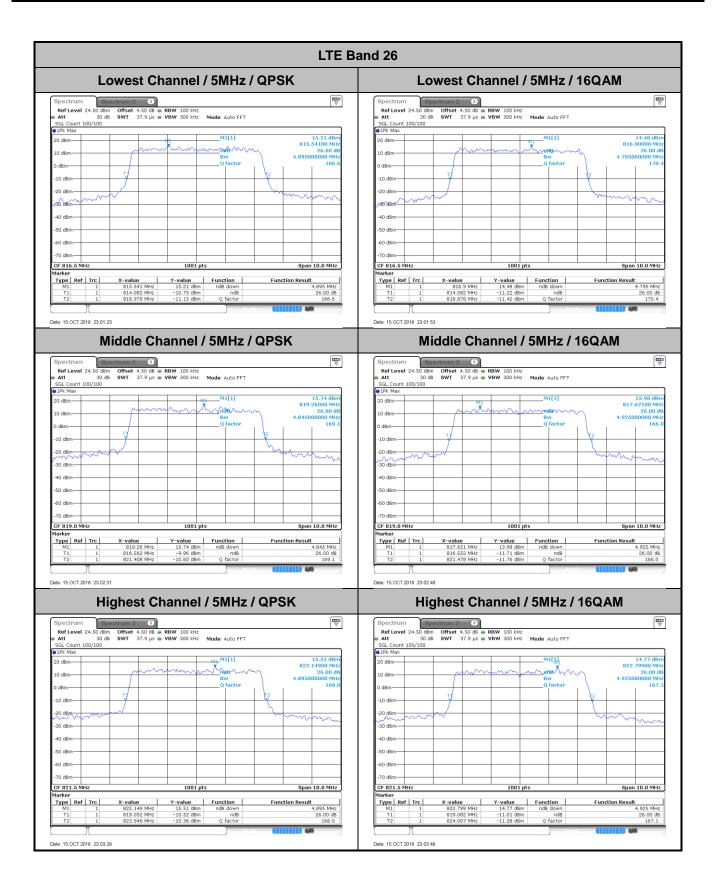

Page Number : A9 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

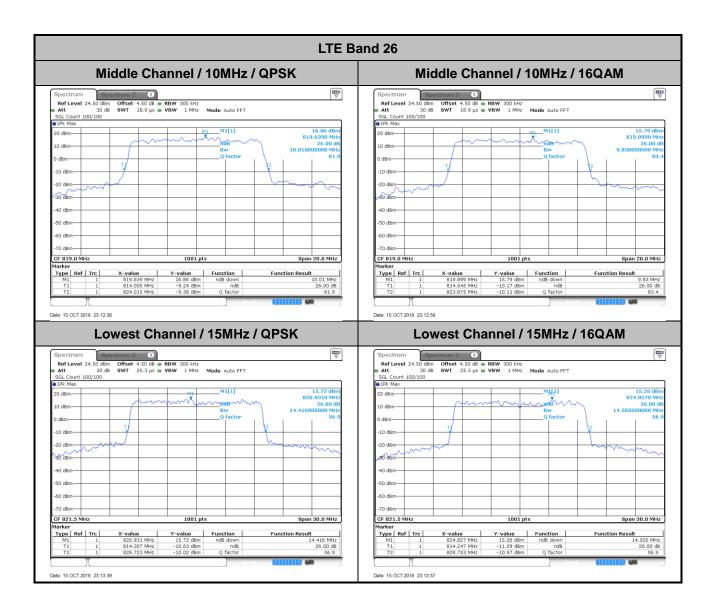


Page Number : A10 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

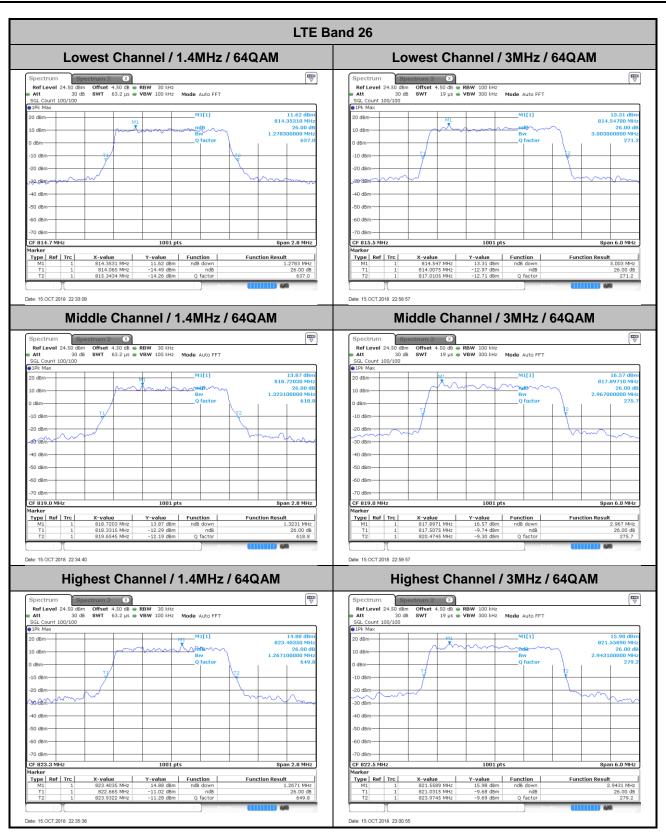

: A11 of A46 Page Number Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

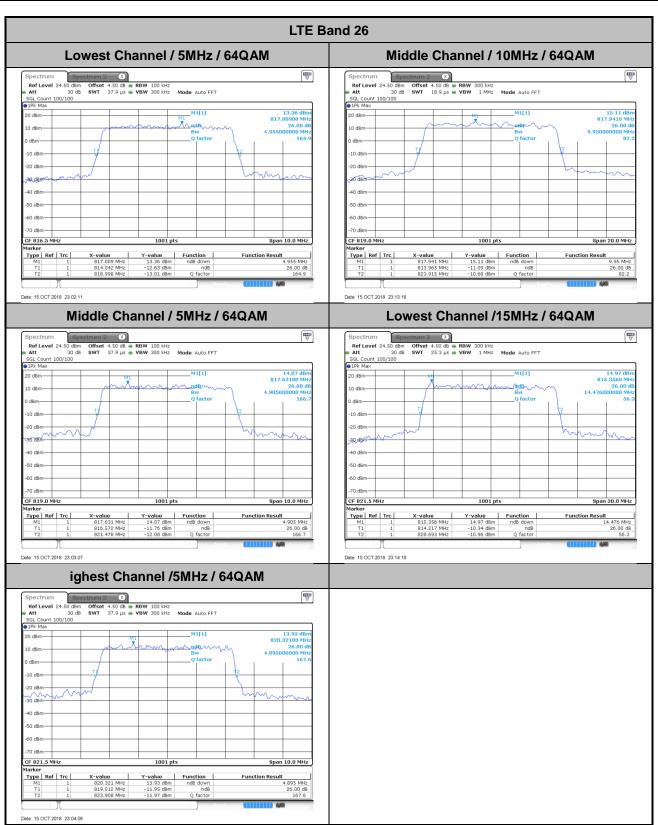

: A12 of A46 Page Number Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 1.0

Occupied Bandwidth

Mode		LTE Band 26 : 99%OBW(MHz)										
BW	1.41	4MHz 3MHz		5M	5MHz		10MHz		ИHz	20MHz		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.71	2.71	4.48	4.49	-	-	13.43	13.46	-	-
Middle CH	1.1	1.1	2.72	2.72	4.48	4.49	8.97	8.97	-	-	-	-
Highest CH	1.11	1.09	2.72	2.72	4.51	4.49	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	99%OBV	V(MHz)				
BW	1.41	ИНz	3N	1Hz	5M	5MHz 10MHz			151	ИHz	20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM			
Lowest CH	1.09		2.73		4.5				13.46			-
Middle CH	1.1		2.71		4.49		9.05					-
Highest CH	1.09		2.73		4.5							-


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : A13 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01

Report No.: FW892103B

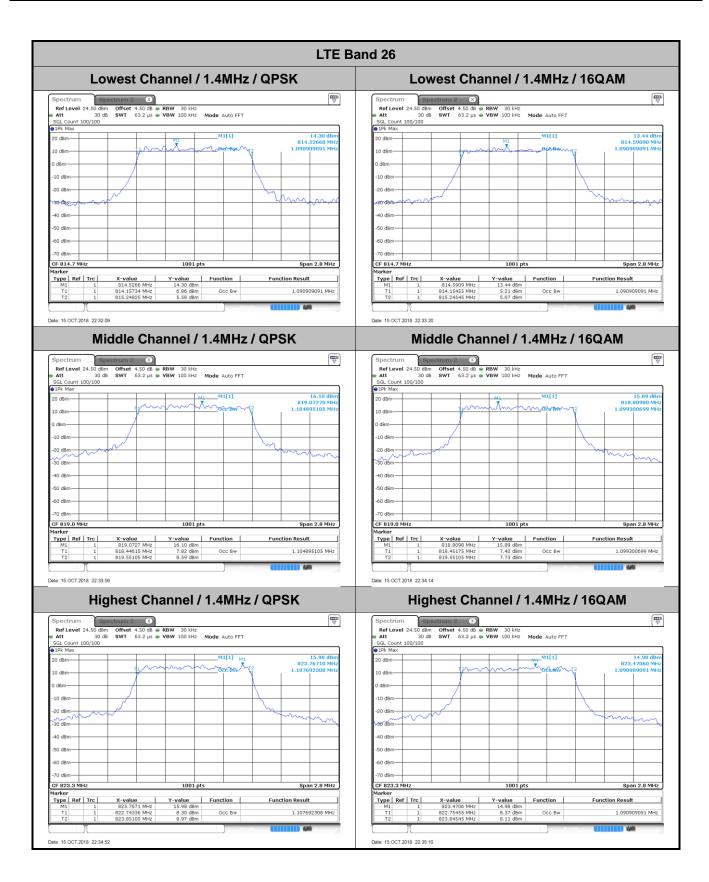


: A14 of A46 Page Number Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 1.0

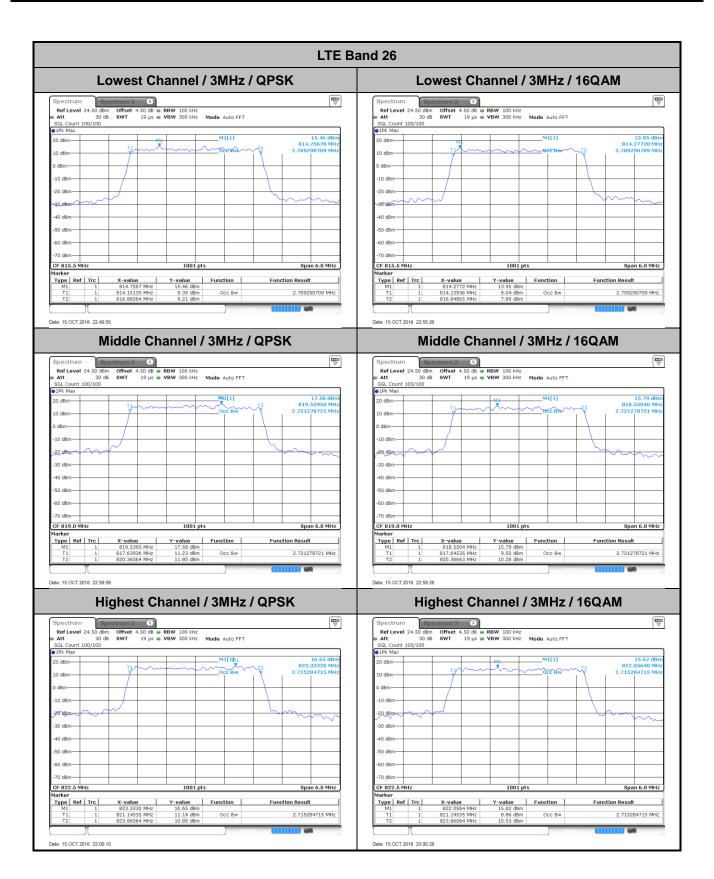


Page Number : A15 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

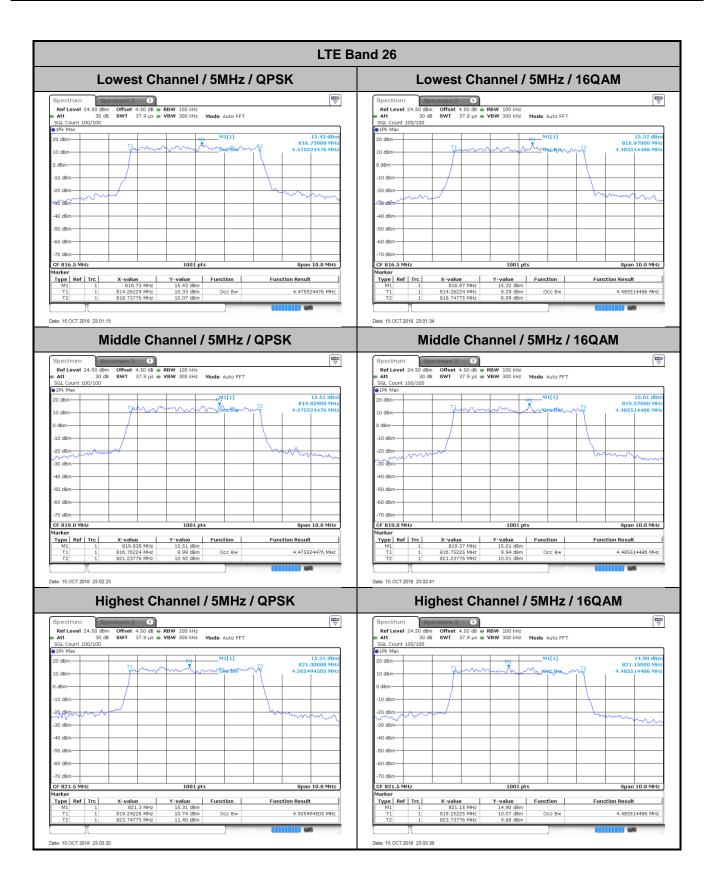


Page Number : A16 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

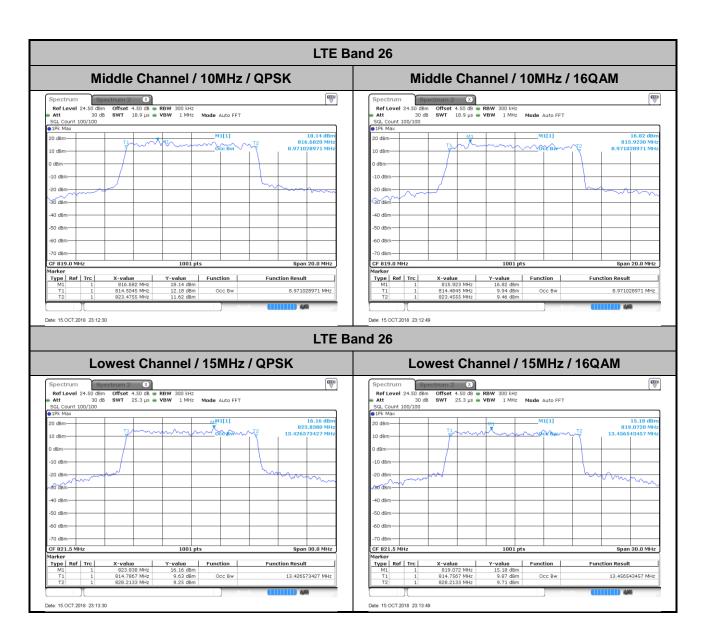

Page Number : A17 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

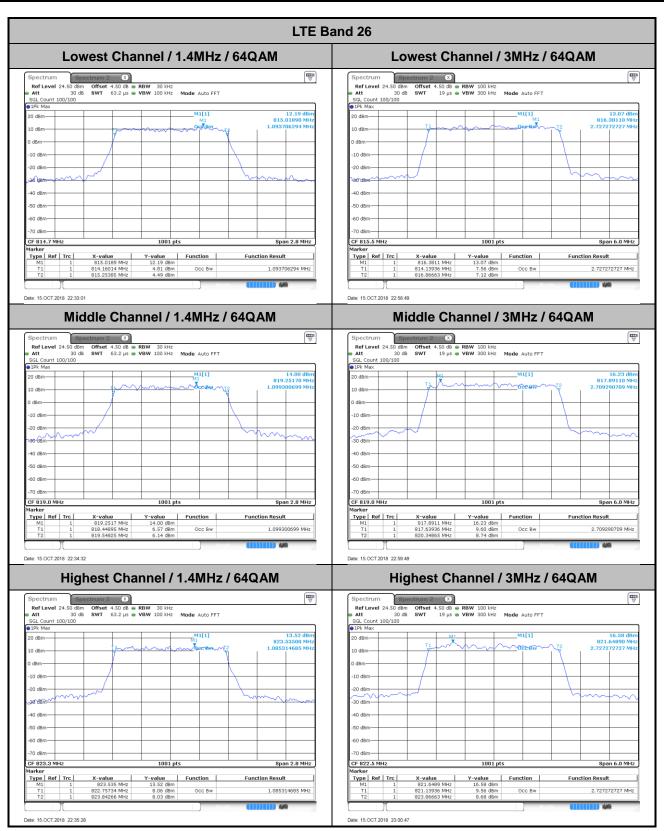

Page Number : A18 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

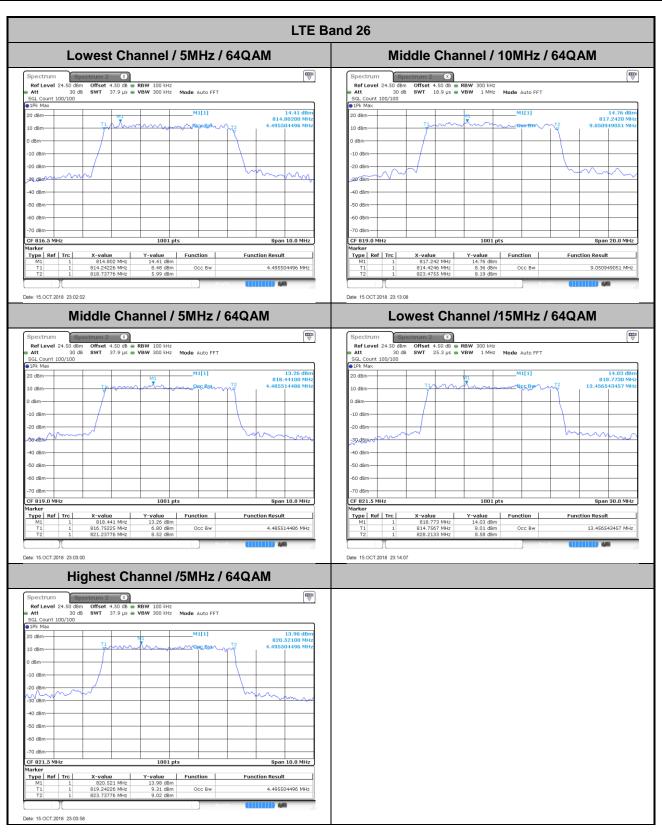


Page Number : A19 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

Conducted Band Edge


Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1 Page Number : A20 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 1.0

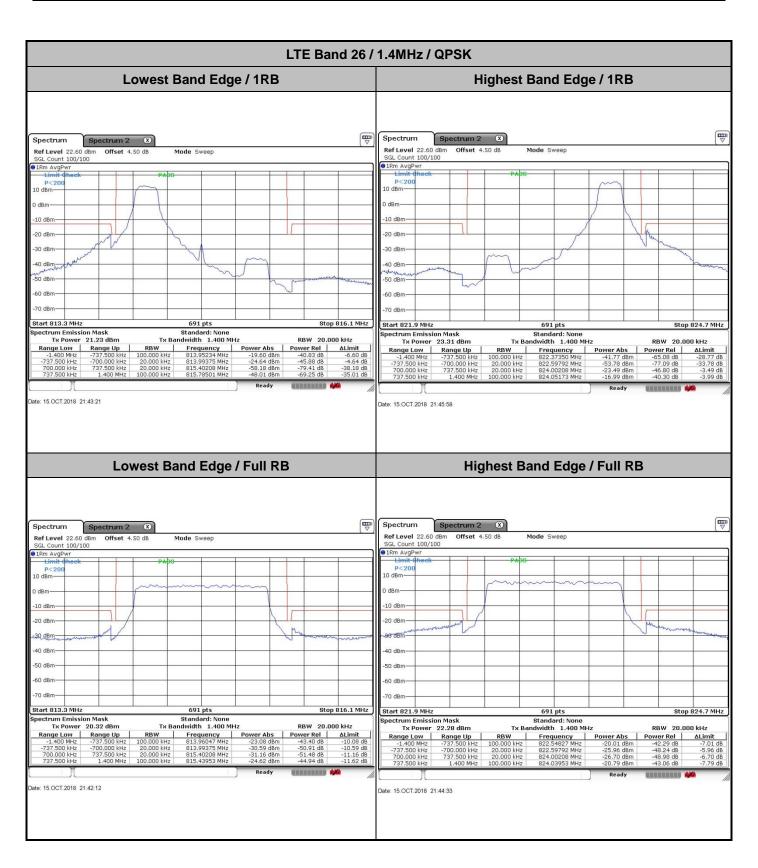


Page Number : A21 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

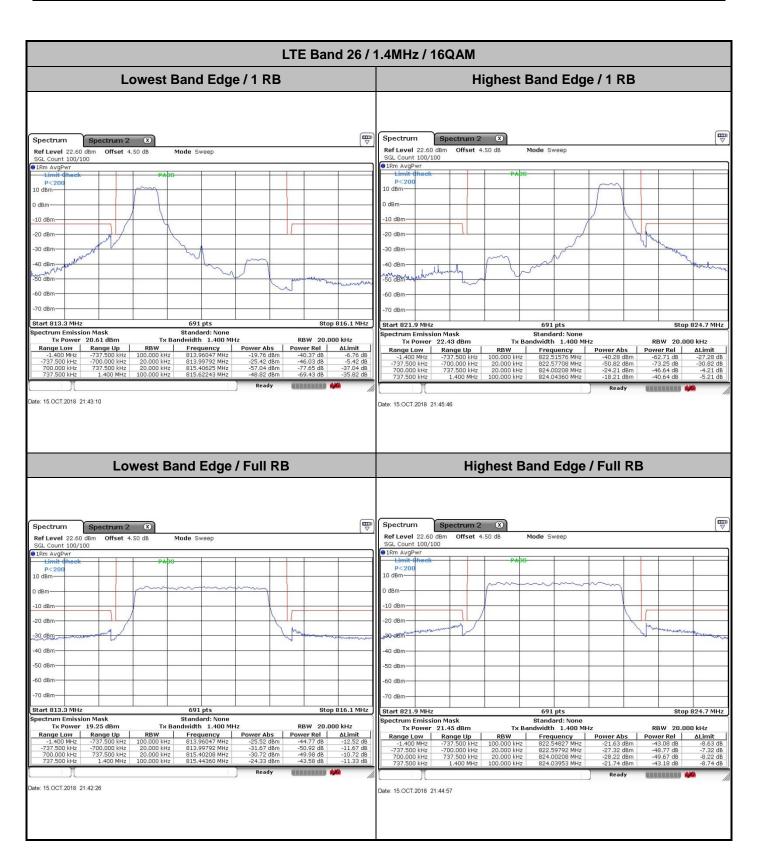


Page Number : A22 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

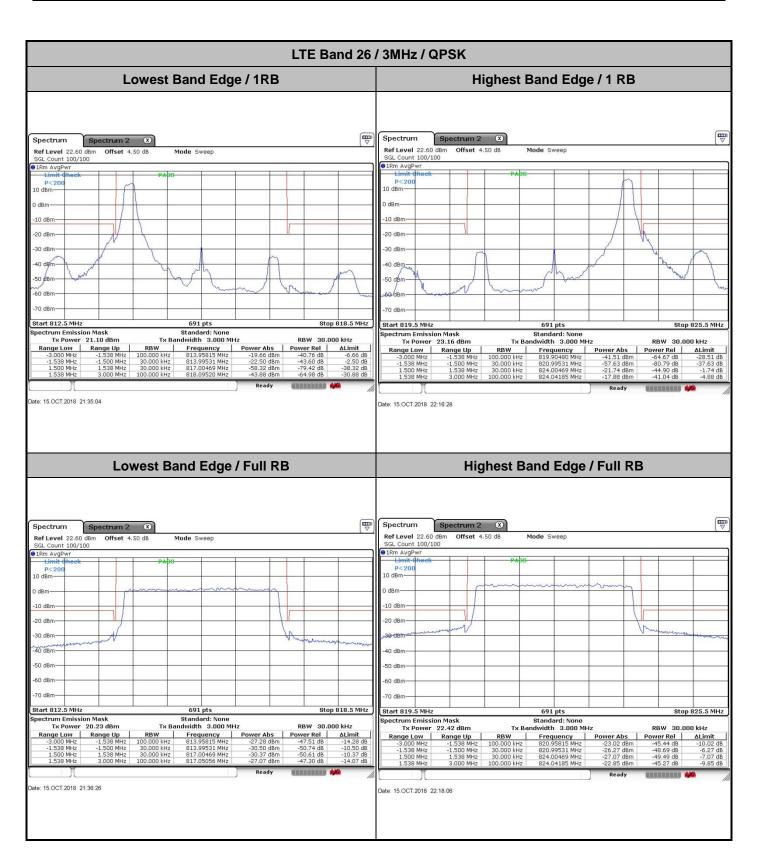


Page Number : A23 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

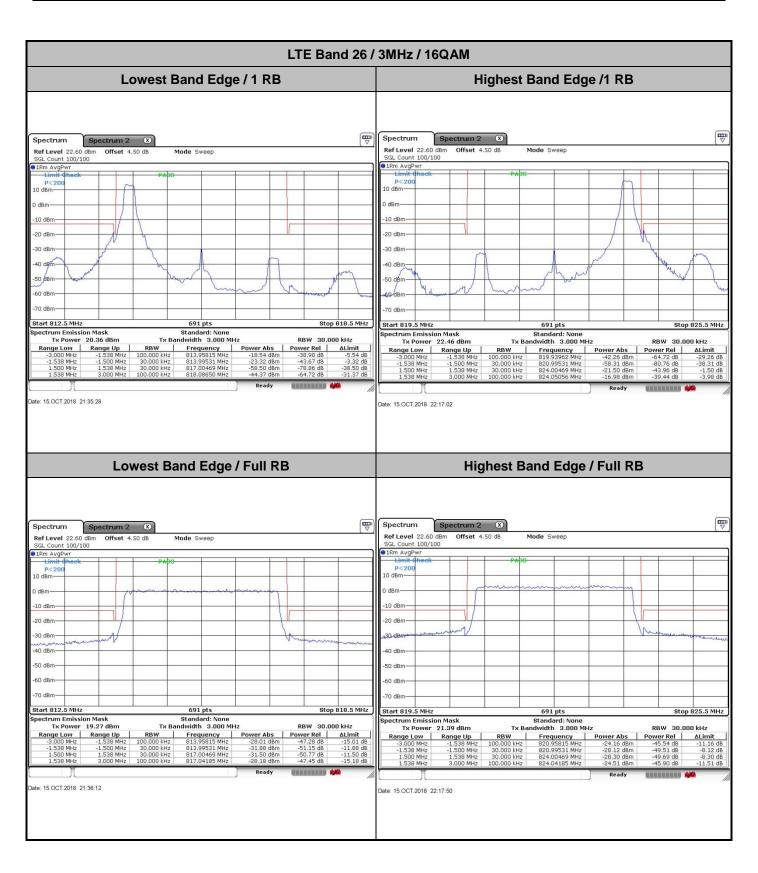


Page Number : A24 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

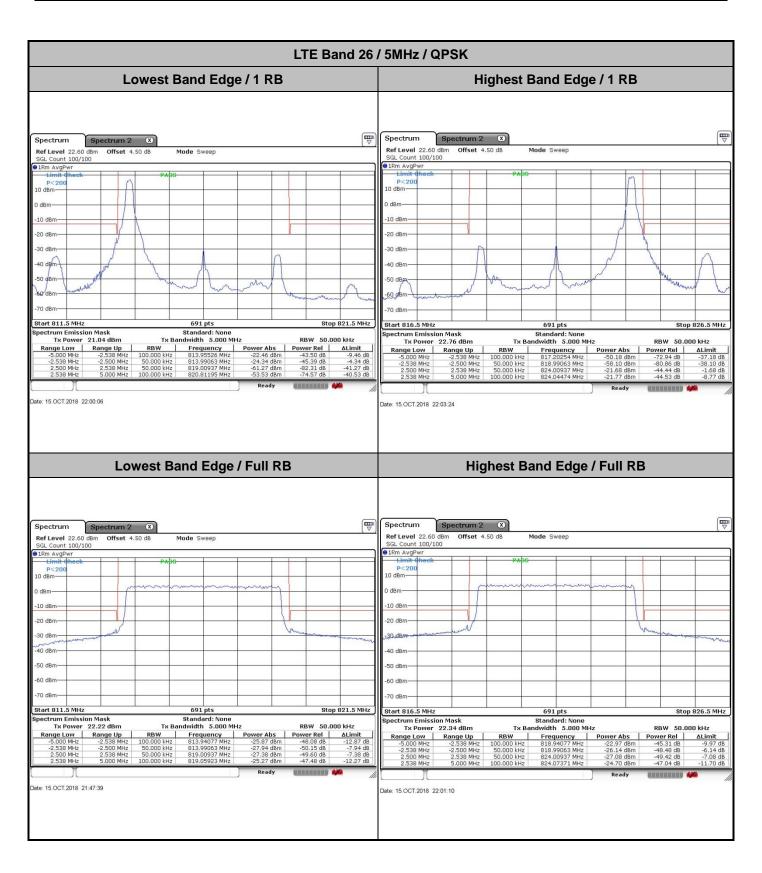

Page Number : A25 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

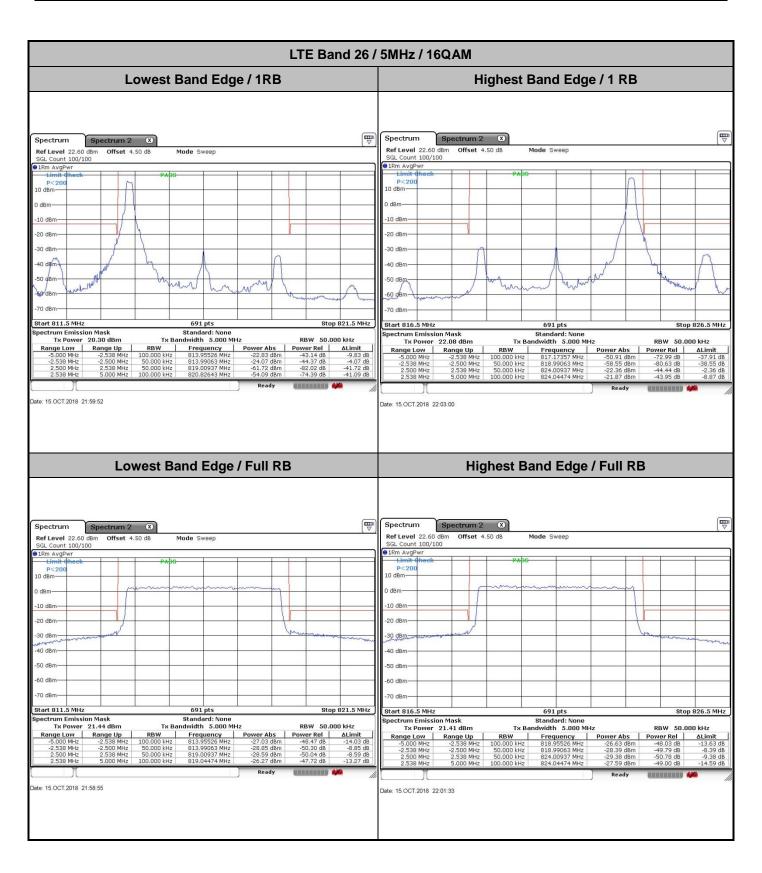

Page Number : A26 of A46
Report Issued Date : Dec. 20, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

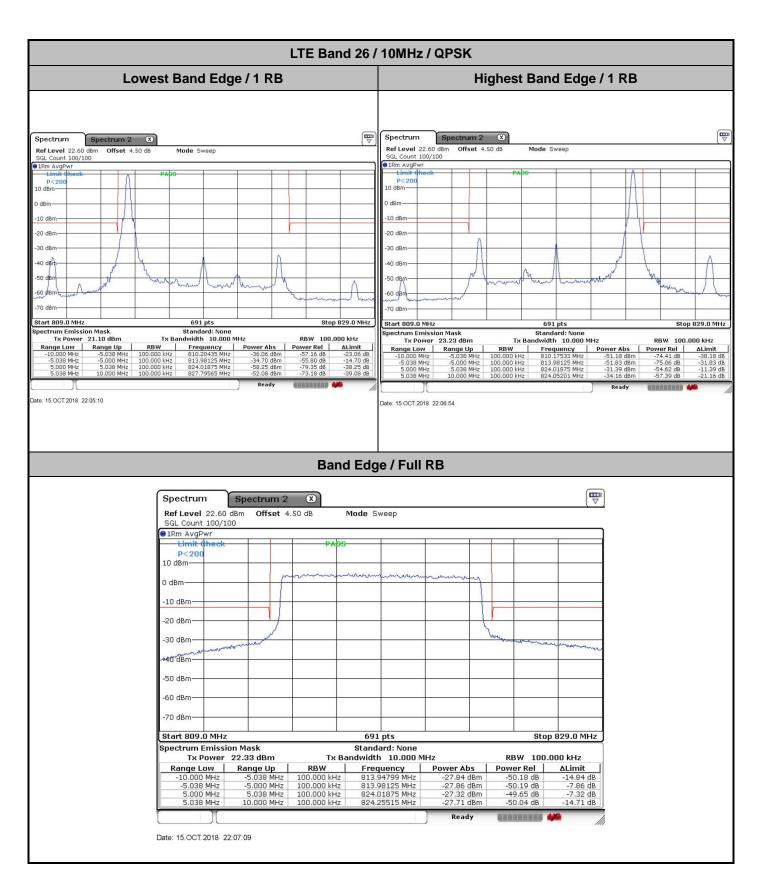

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: IHDT56XR1

: A27 of A46 Page Number Report Issued Date: Dec. 20, 2018 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0