





WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

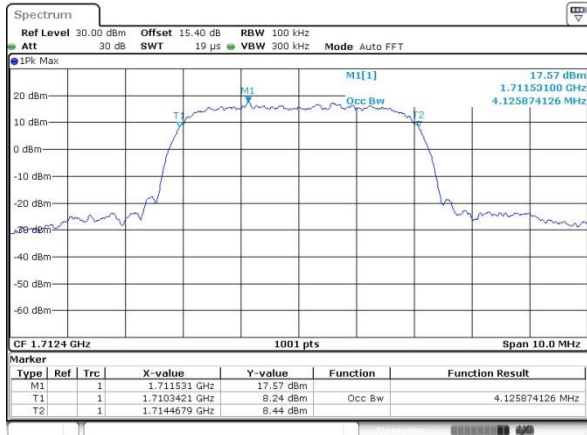


Date: 8 JAN 2019 18:04:47

Middle Channel

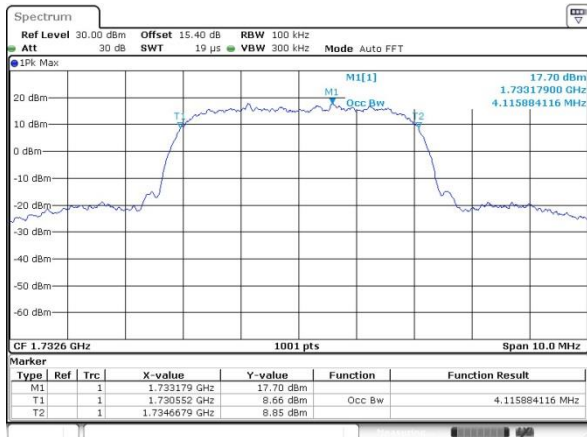

Date: 8 JAN 2019 18:05:22

Highest Channel

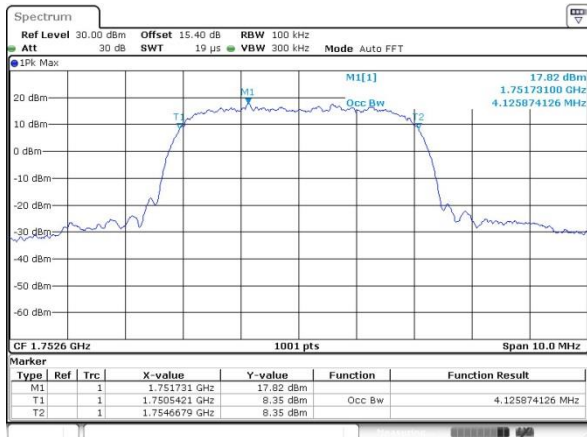


Date: 8 JAN 2019 18:05:57



CDMA BC0 (1xRTT)


Lowest Channel

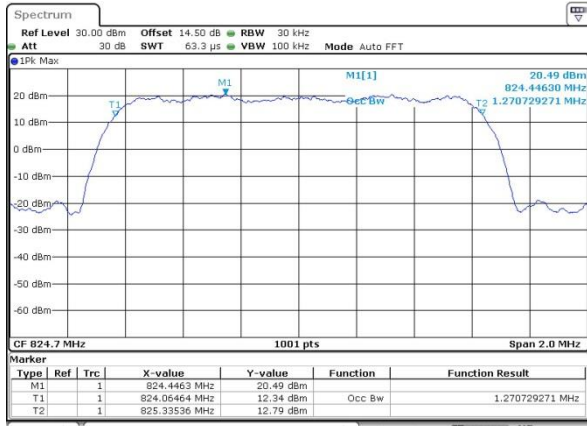

Date: 14 FEB 2019 10:19:07


CDMA BC1(1xRTT)

Lowest Channel

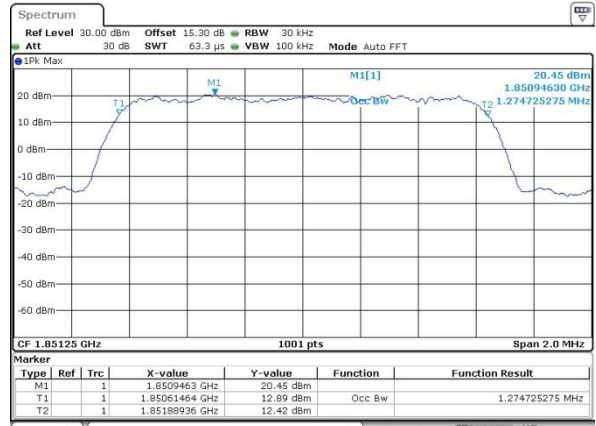


Date: 14 FEB 2019 10:48:46

Middle Channel

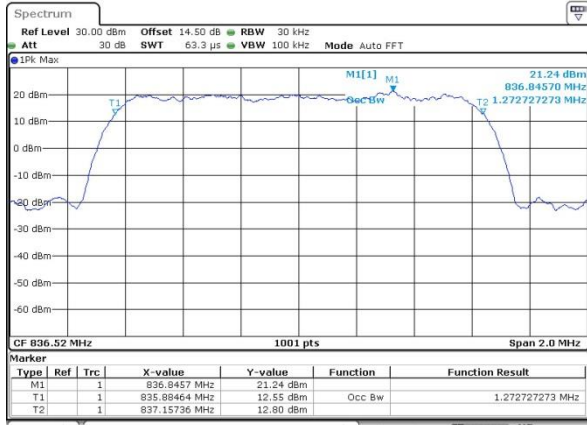


Date: 14 FEB 2019 10:19:50

Middle Channel

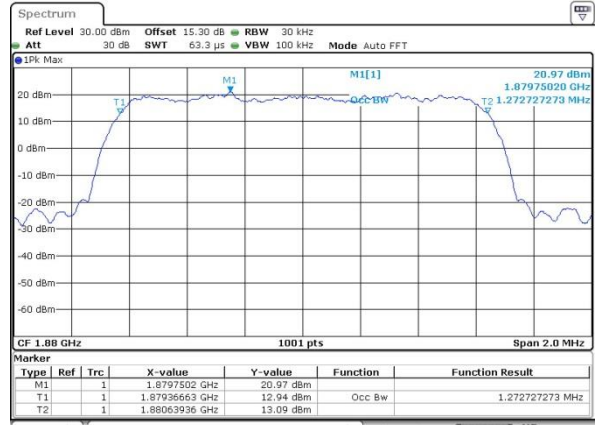


Date: 14 FEB 2019 10:49:17

Highest Channel

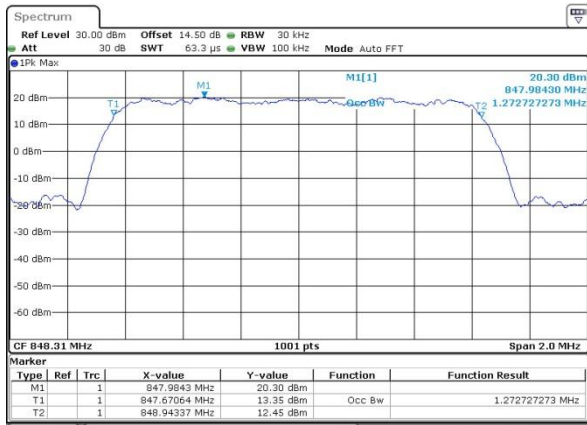

Date: 14 FEB 2019 10:20:23



Highest Channel

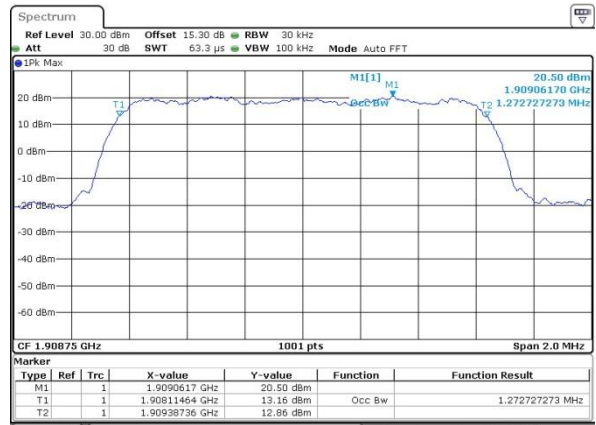

Date: 14 FEB 2019 10:49:48



# Conducted Band Edge

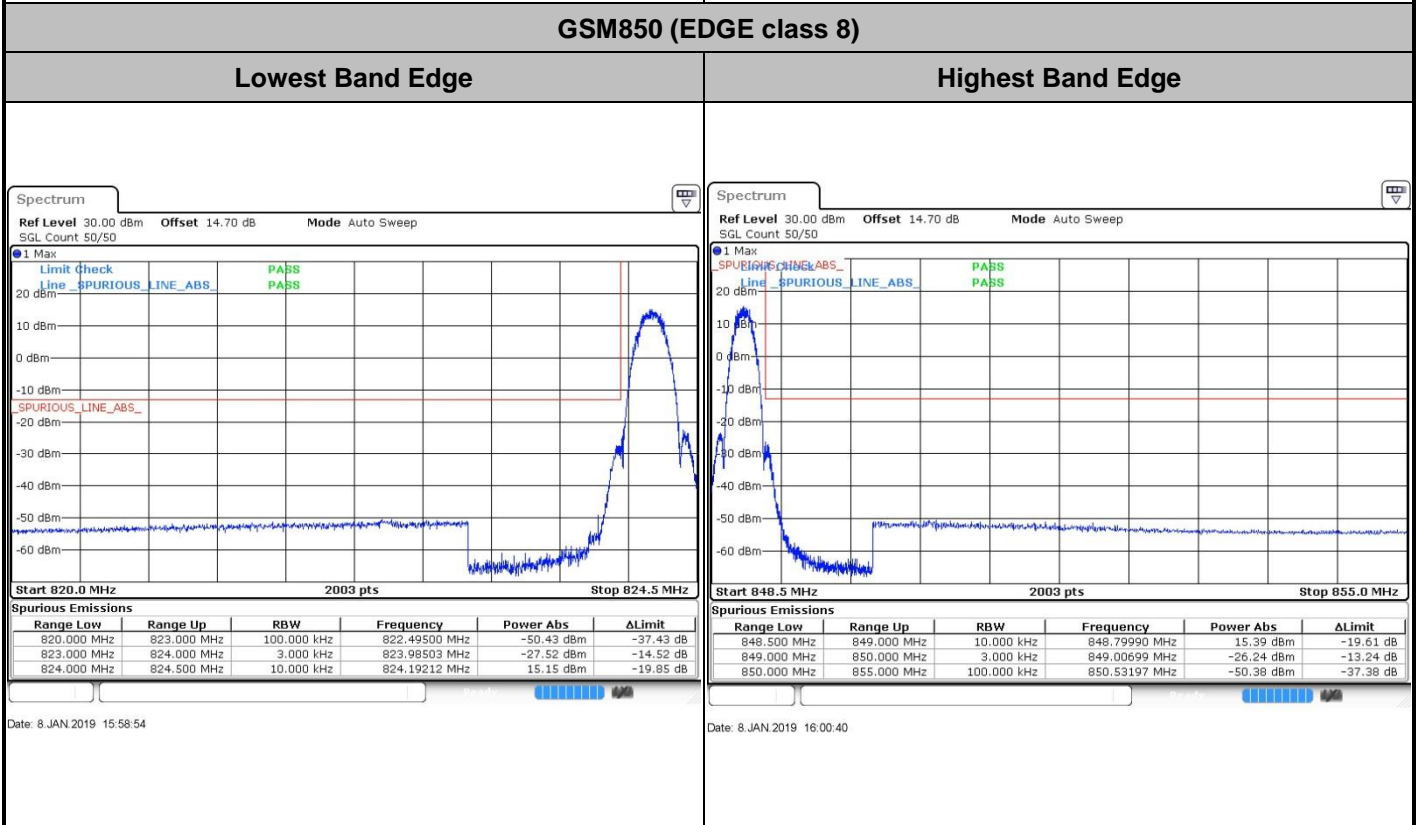
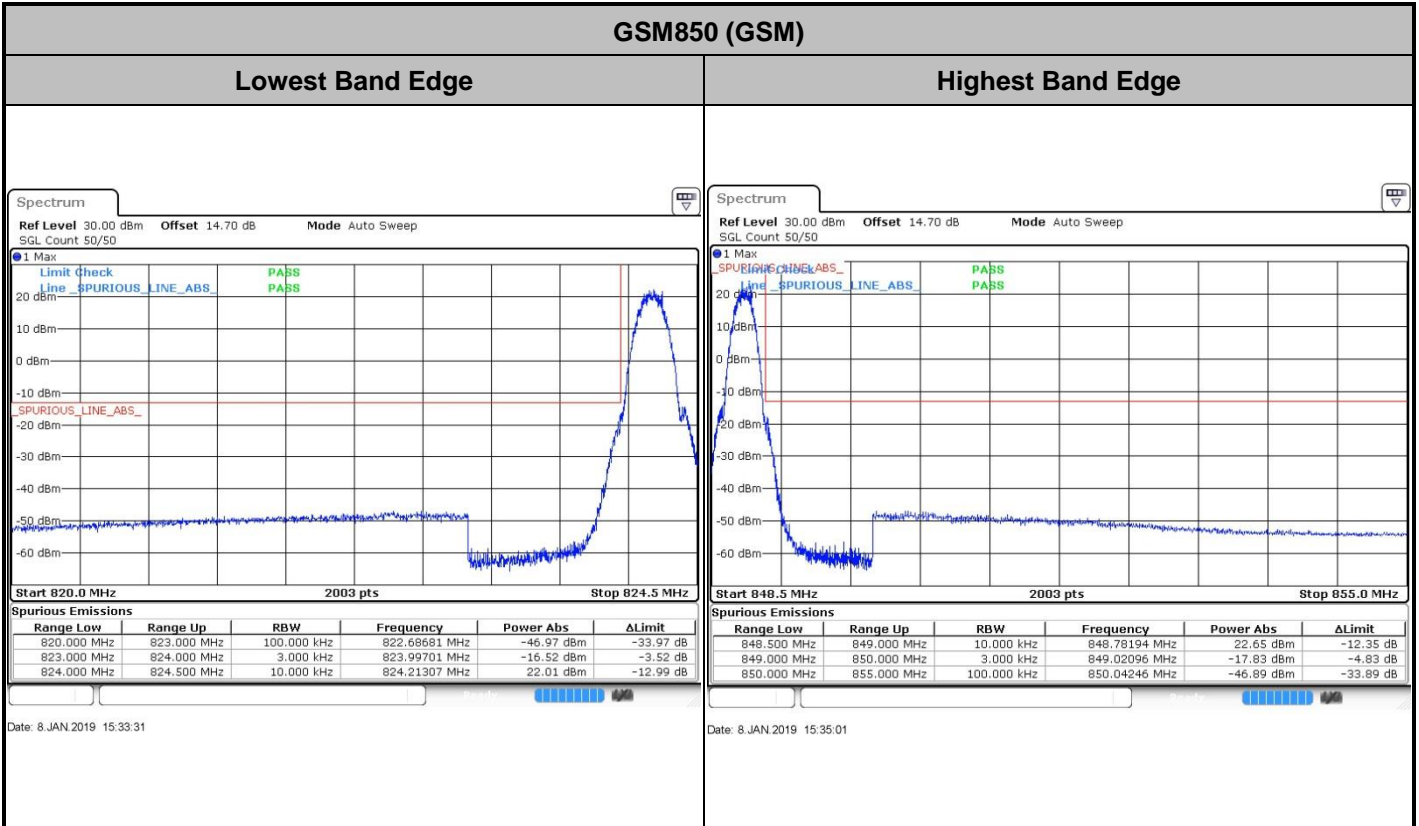




GSM1900 (GSM)

Lowest Band Edge

Highest Band Edge

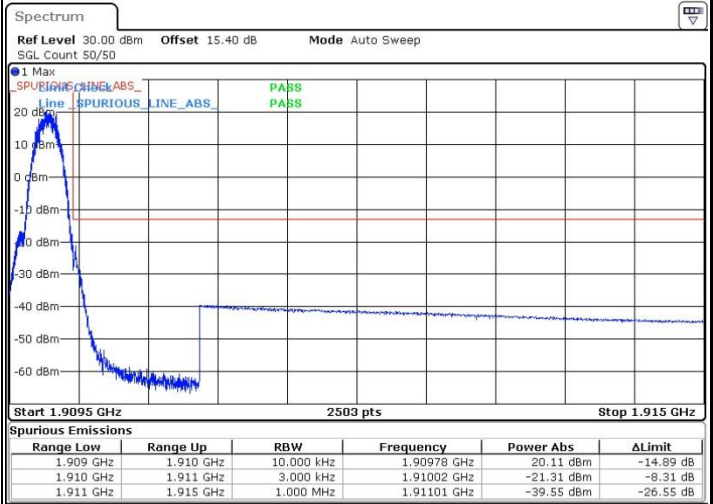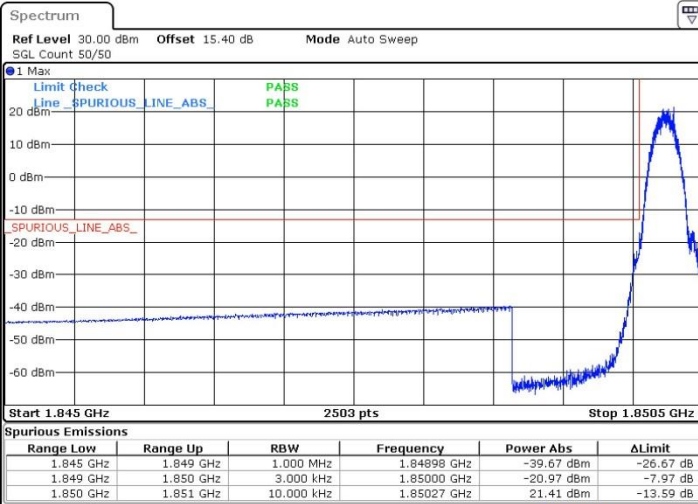



Date: 8 JAN 2019 16:18:12

Date: 8 JAN 2019 16:19:44

GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

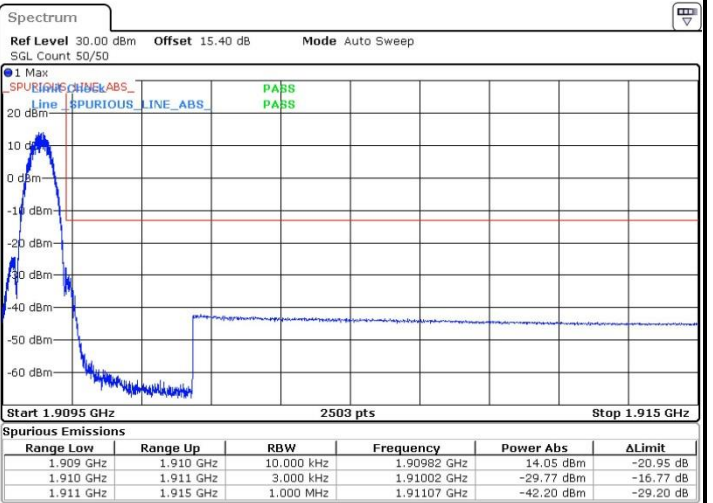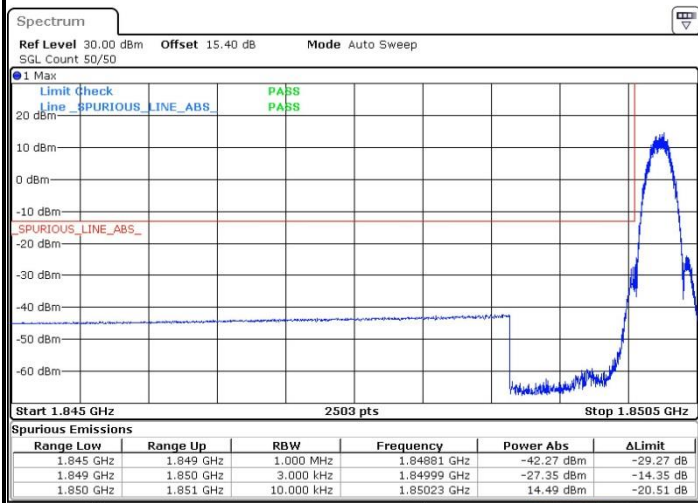

Date: 8 JAN 2019 16:55:09


Date: 8 JAN 2019 16:56:46



WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

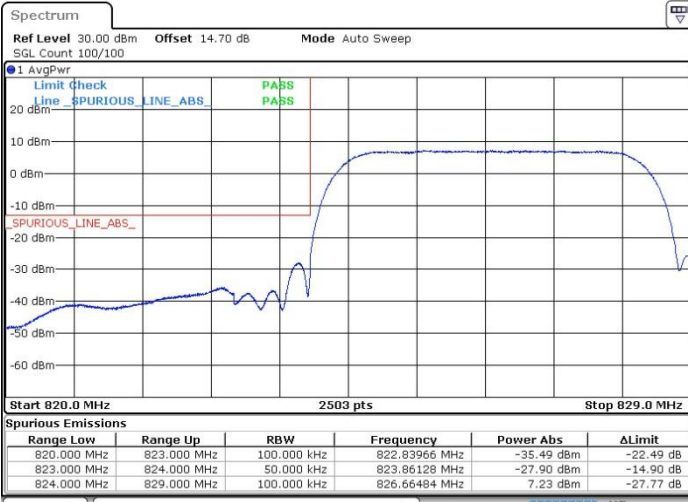

Date: 8 JAN 2019 18:32:56

Date: 8 JAN 2019 18:36:07

WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge



Date: 8 JAN 2019 17:50:11

Date: 8 JAN 2019 17:53:28




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge



Date: 8 JAN 2019 18:08:47

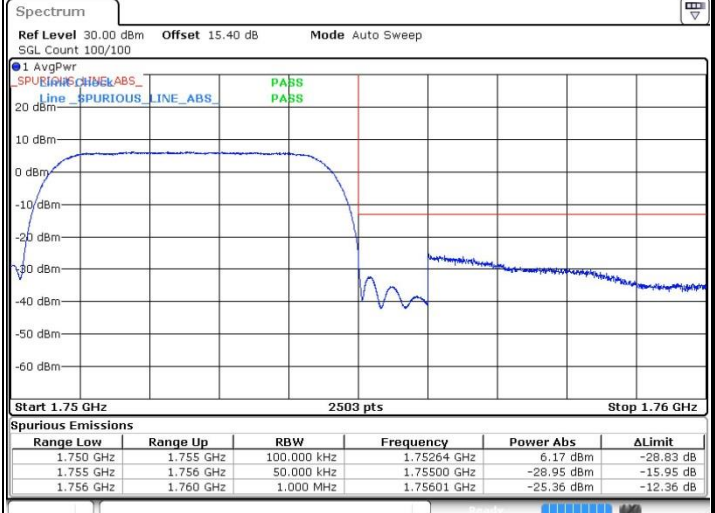



Date: 8 JAN 2019 18:12:45



CDMA BC0 (1xRTT)

Lowest Band Edge

Highest Band Edge

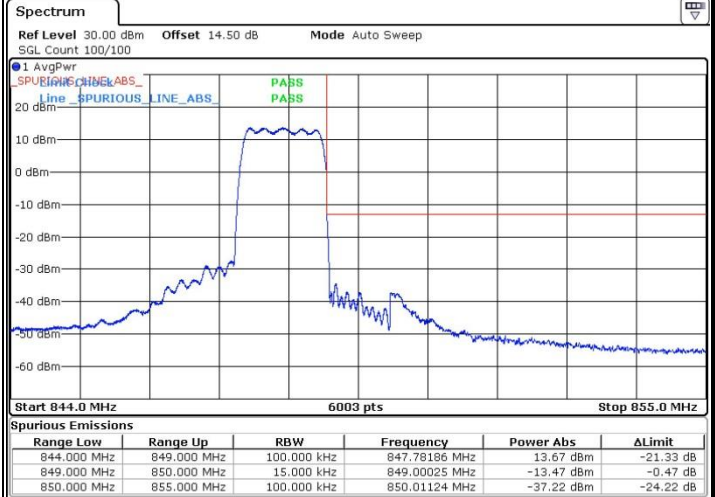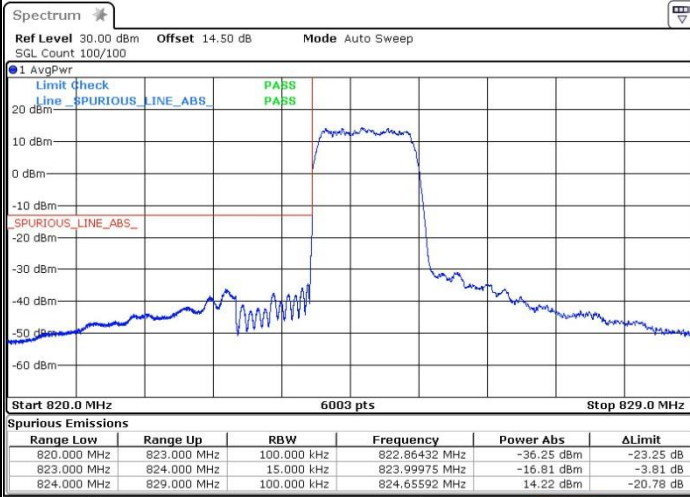



Date: 15.FEB.2019 13:04:06

Date: 15.FEB.2019 13:09:46

CDMA BC1 (1xRTT)

Lowest Band Edge

Highest Band Edge

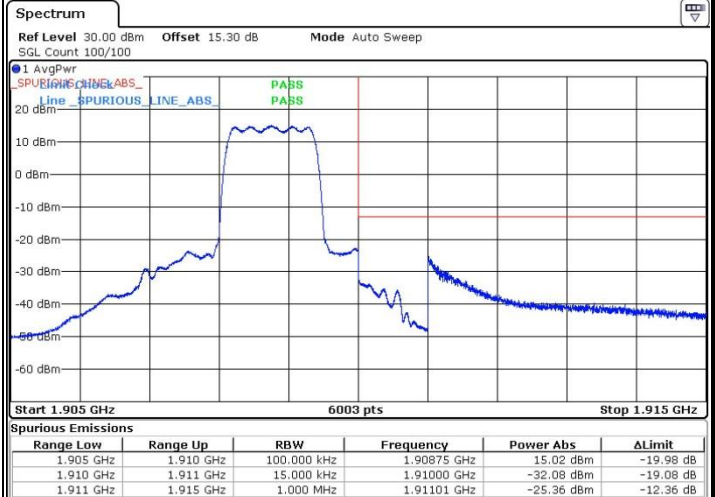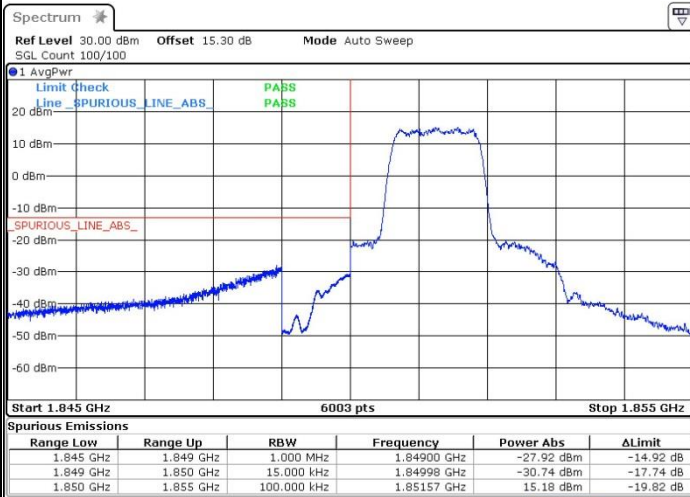


Date: 14.FEB.2019 10:56:03







Date: 14.FEB.2019 11:09:41



# Conducted Spurious Emission

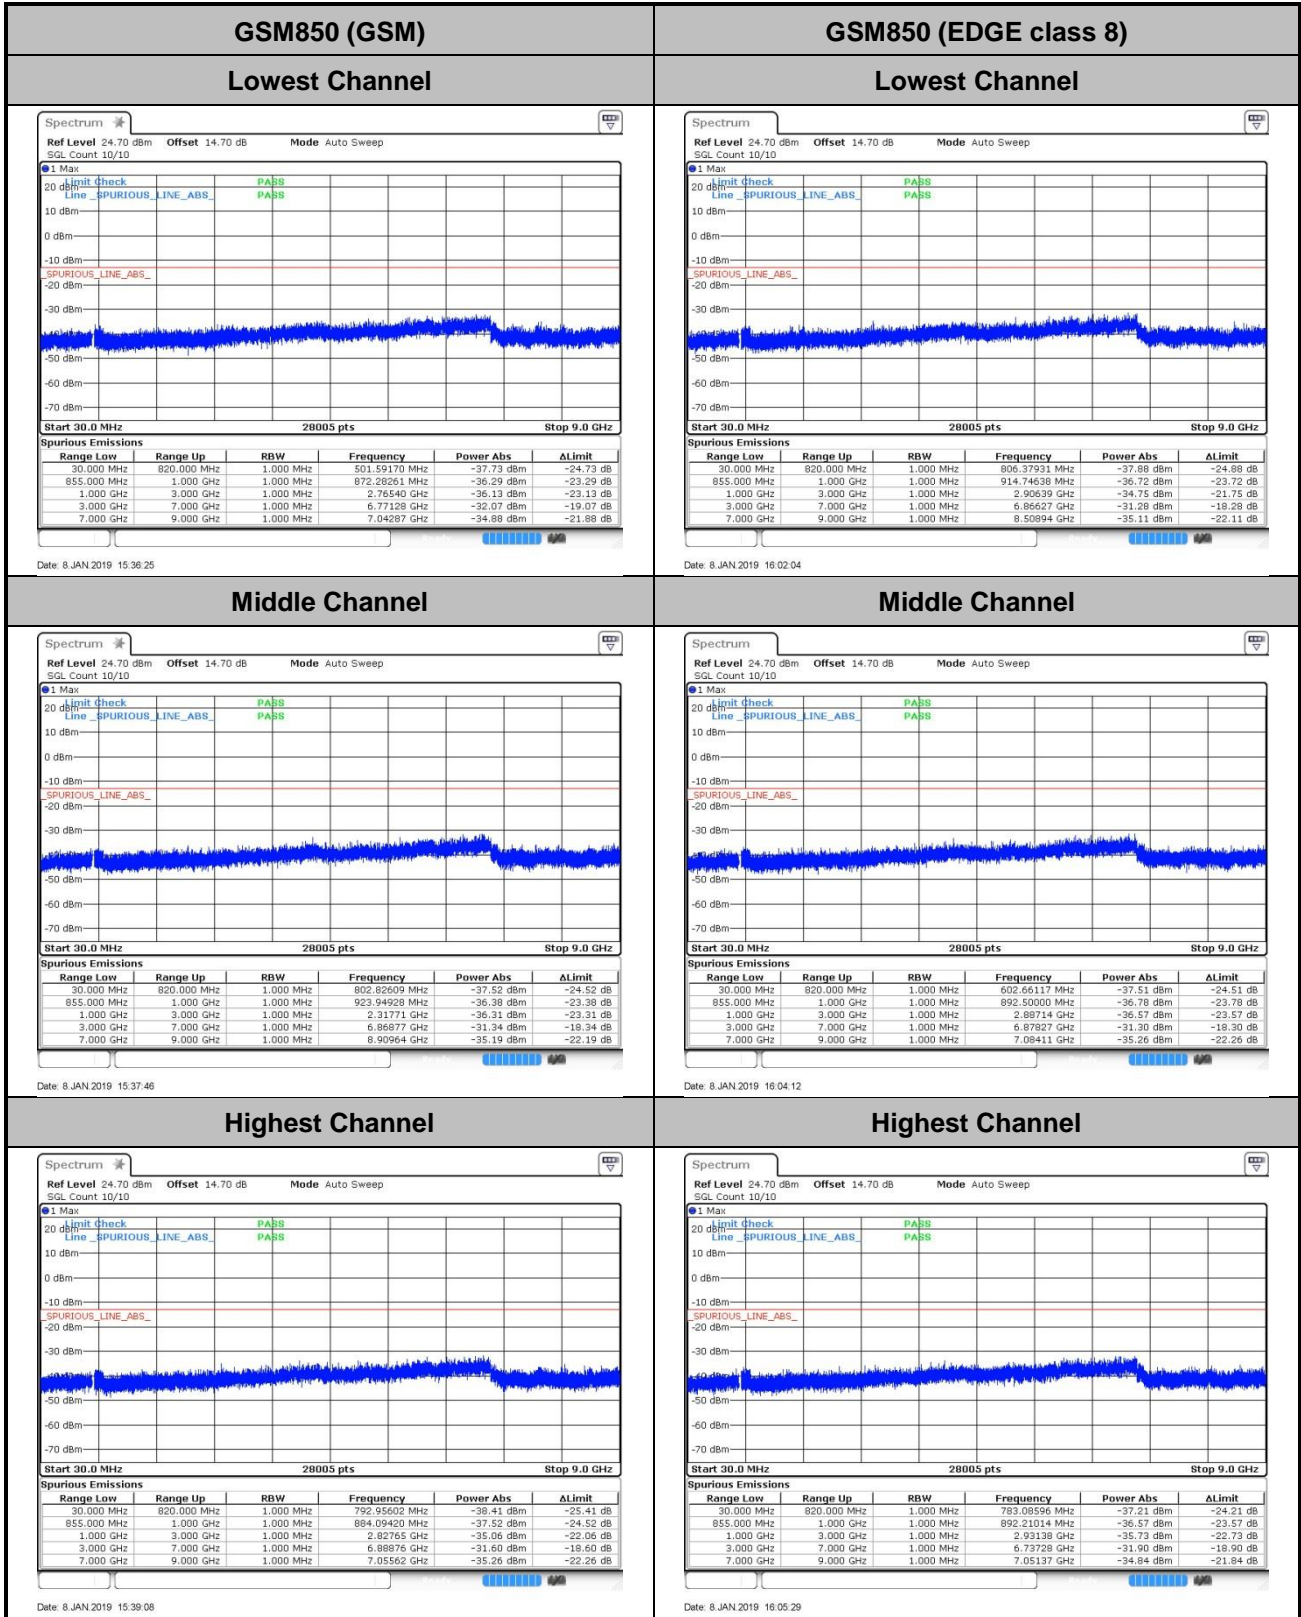




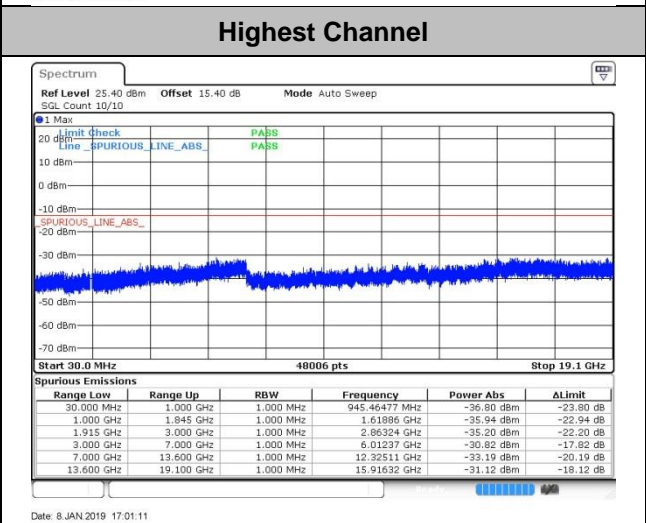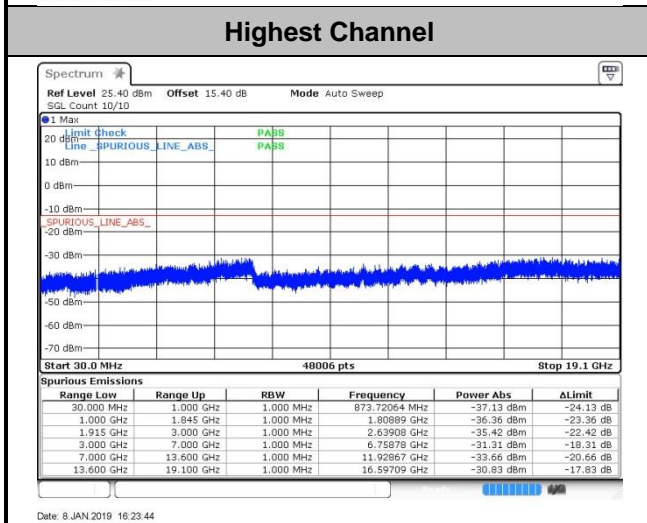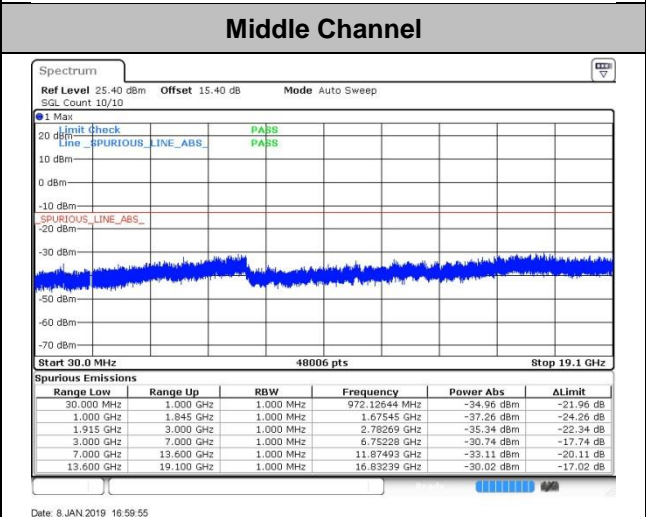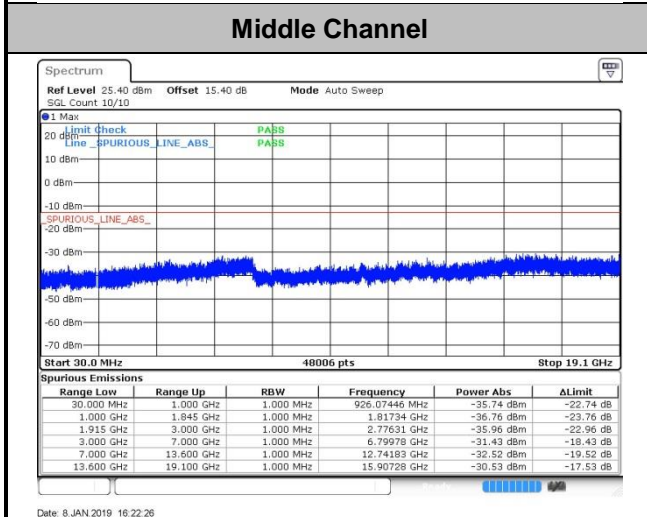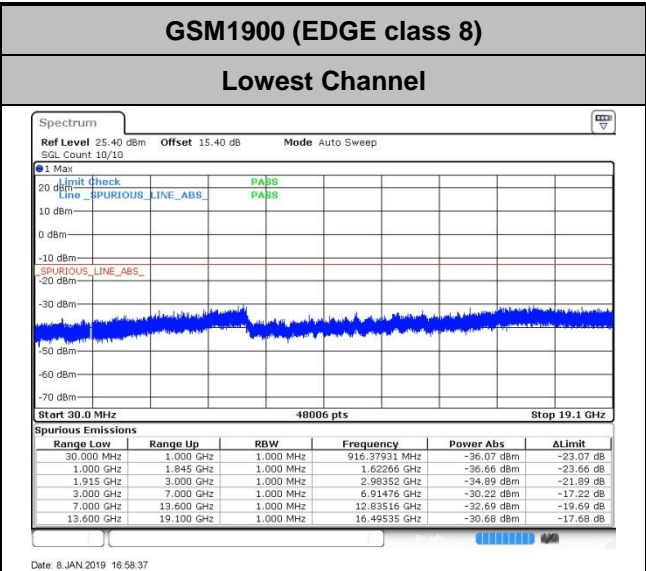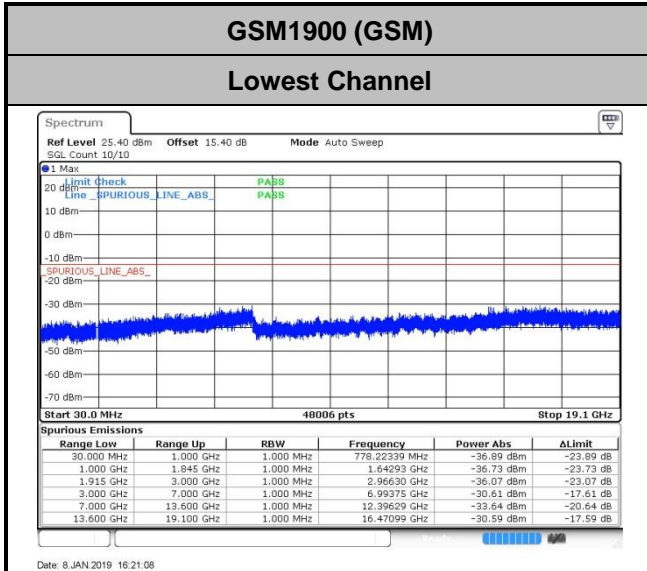



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

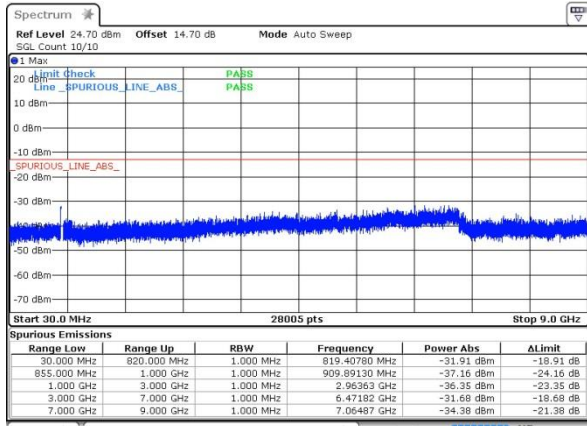

Date: 8 JAN 2019 18:38:14


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

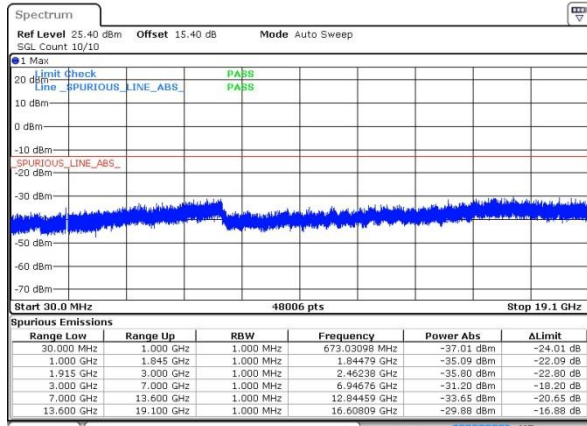


Date: 8 JAN 2019 17:54:55

Middle Channel

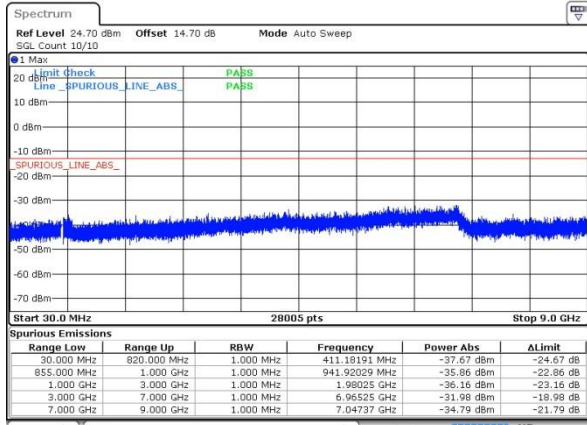


Date: 8 JAN 2019 18:39:31

Middle Channel

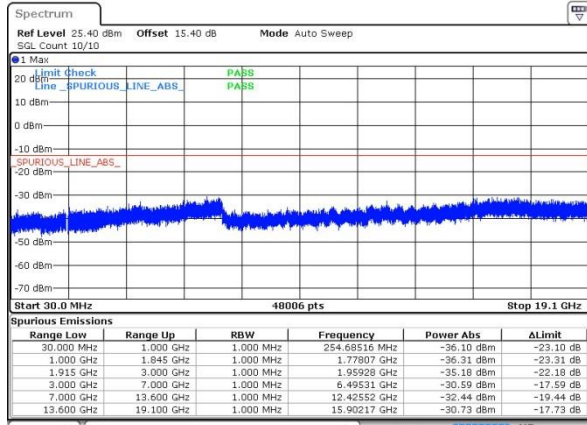


Date: 8 JAN 2019 17:56:15

Highest Channel

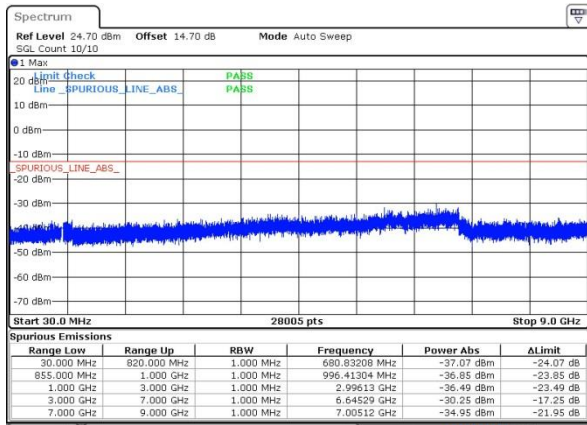

Date: 8 JAN 2019 18:40:49

Highest Channel

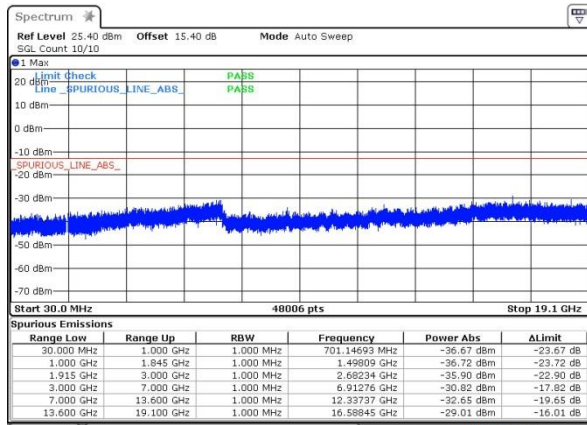


Date: 8 JAN 2019 17:57:45




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

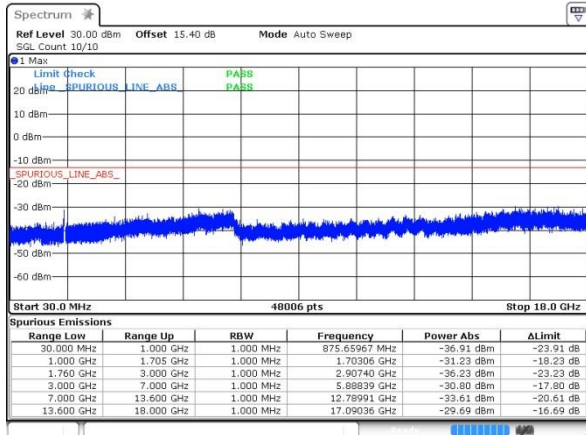


Date: 8 JAN 2019 18:14:37

Middle Channel

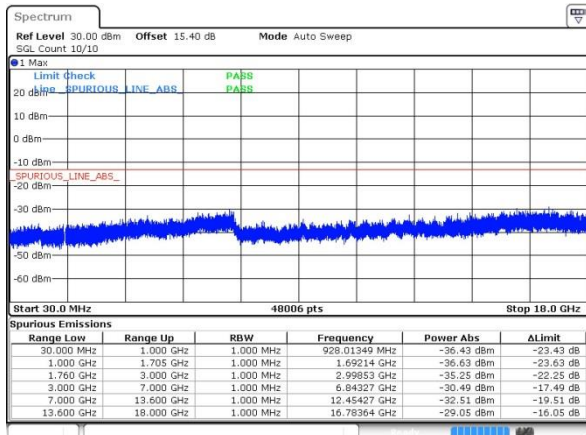

Date: 8 JAN 2019 18:18:09

Highest Channel

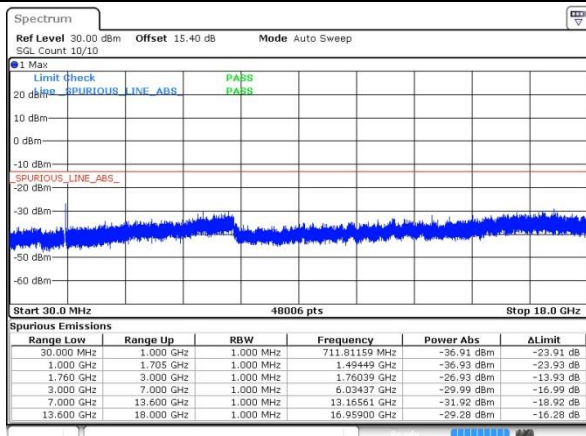


Date: 8 JAN 2019 18:20:00



CDMA BC0 (1xRTT)


Lowest Channel

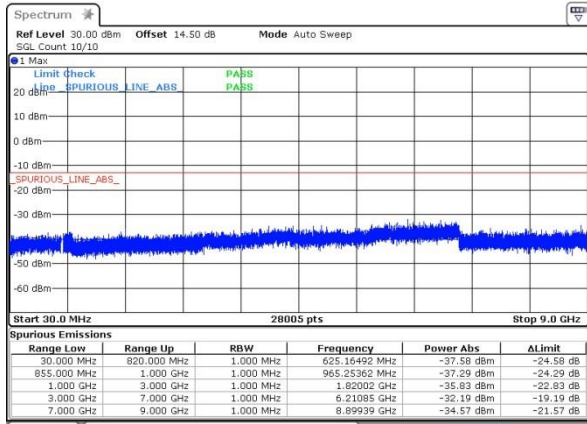

Date: 15.FEB.2019 13:12:38


CDMA BC1 (1xRTT)

Lowest Channel

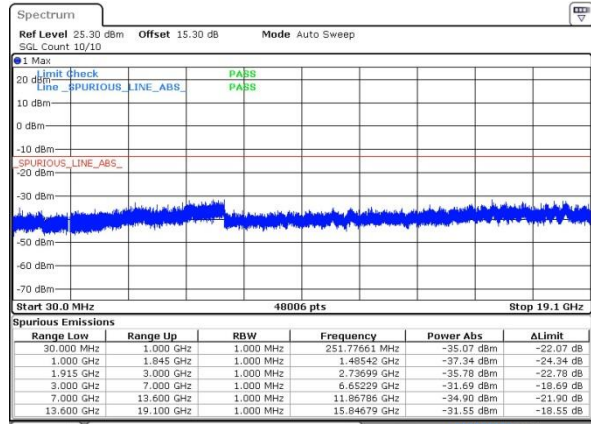


Date: 14.FEB.2019 11:12:53

Middle Channel

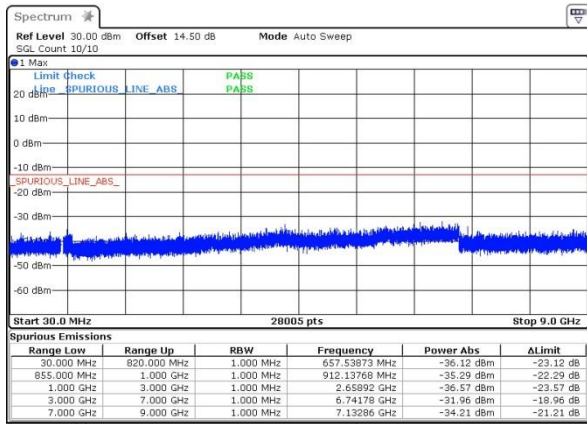


Date: 15.FEB.2019 13:14:02

Middle Channel

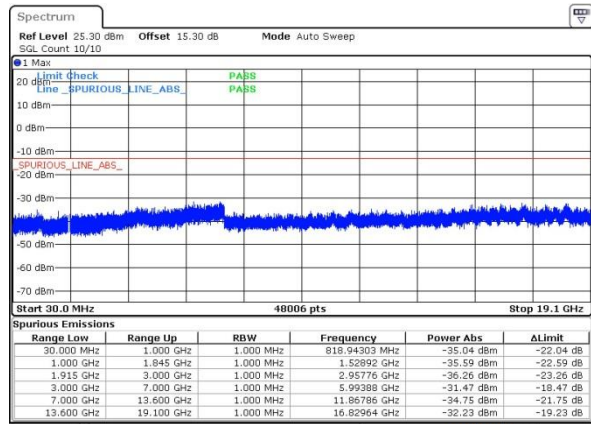


Date: 14.FEB.2019 11:14:14

Highest Channel

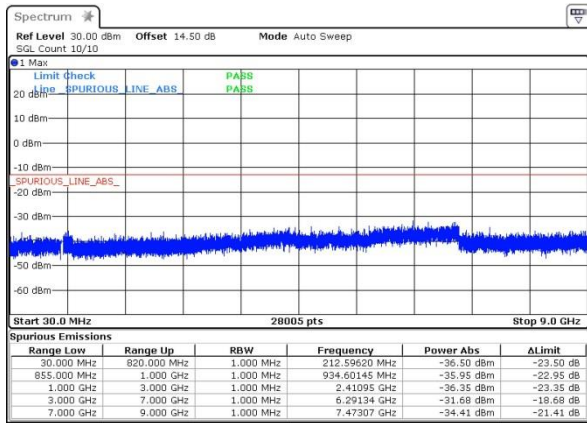

Date: 15.FEB.2019 13:15:52

Highest Channel

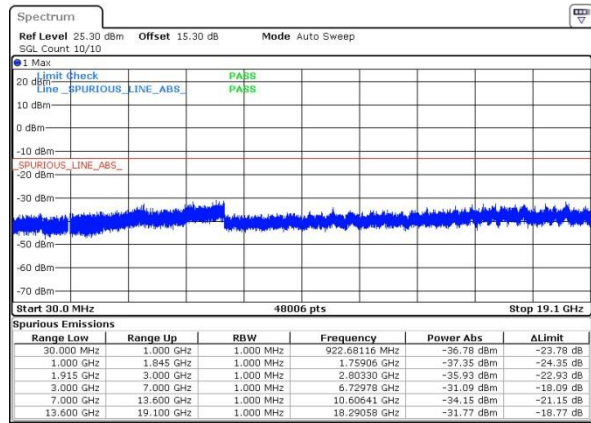

Date: 14.FEB.2019 11:56:20



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0108	0.0275	PASS
40	Normal Voltage	0.0036	0.0239	
30	Normal Voltage	0.0132	0.0084	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0167	0.0167	
0	Normal Voltage	0.0072	0.0167	
-10	Normal Voltage	0.0203	0.0227	
-20	Normal Voltage	0.0155	0.0060	
-30	Normal Voltage	0.0143	0.0108	
20	Maximum Voltage	0.0096	0.0132	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0191	0.0036	

Note: Normal Voltage = 3.8 V. ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4V



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0053	0.0181	PASS
40	Normal Voltage	0.0005	0.0133	
30	Normal Voltage	0.0117	0.0027	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0133	0.0106	
0	Normal Voltage	0.0106	0.0149	
-10	Normal Voltage	0.0090	0.0170	
-20	Normal Voltage	0.0027	0.0122	
-30	Normal Voltage	0.0128	0.0117	
20	Maximum Voltage	0.0069	0.0021	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0128	0.0027	

**Note:**

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4 V
- 2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0084	PASS
40	Normal Voltage	0.0287	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0359	
0	Normal Voltage	0.0251	
-10	Normal Voltage	0.0060	
-20	Normal Voltage	0.0299	
-30	Normal Voltage	0.0036	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0263	

**Note:** Normal Voltage = 3.8 V. ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4V



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0101	
30	Normal Voltage	0.0112	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0165	
0	Normal Voltage	0.0048	
-10	Normal Voltage	0.0122	
-20	Normal Voltage	0.0154	
-30	Normal Voltage	0.0021	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0032	

**Note:**

1. Normal Voltage = 3.8 V. ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.





Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0035	PASS
40	Normal Voltage	0.0029	
30	Normal Voltage	0.0150	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0023	
0	Normal Voltage	0.0127	
-10	Normal Voltage	0.0035	
-20	Normal Voltage	0.0144	
-30	Normal Voltage	0.0046	
20	Maximum Voltage	0.0017	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0035	

**Note:**

1. Normal Voltage = 3.8 V. ; Battery End Point (BEP) =3.6 V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	CDMA BC0 (1xRTT)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0155	
30	Normal Voltage	0.0072	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0048	
0	Normal Voltage	0.0215	
-10	Normal Voltage	0.0048	
-20	Normal Voltage	0.0179	
-30	Normal Voltage	0.0251	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0191	

Note: Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6V. ; Maximum Voltage =4.4V



Test Conditions	Middle Channel	CDMA BC1 (1xRTT)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0037	PASS
40	Normal Voltage	0.0027	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0064	
0	Normal Voltage	0.0085	
-10	Normal Voltage	0.0005	
-20	Normal Voltage	0.0096	
-30	Normal Voltage	0.0133	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0011	

**Note:**

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

GSM850 (GSM)								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-55.31	-13	-42.31	-62.28	1.58	10.70	H
	2472	-50.95	-13	-37.95	-59.20	2.102	12.50	H
	3294	-62.46	-13	-49.46	-71.35	2.856	13.90	H
	1648	-58.36	-13	-45.36	-65.33	1.58	10.70	V
	2472	-55.29	-13	-42.29	-63.54	2.10	12.50	V
	3294	-63.93	-13	-50.93	-72.82	2.86	13.90	V
Middle	1672	-57.51	-13	-44.51	-64.48	1.58	10.70	H
	2510	-35.47	-13	-22.47	-43.72	2.102	12.50	H
	3348	-62.18	-13	-49.18	-71.07	2.856	13.90	H
	1672	-59.64	-13	-46.64	-66.61	1.58	10.70	V
	2508	-43.33	-13	-30.33	-51.58	2.10	12.50	V
	3348	-61.22	-13	-48.22	-70.11	2.86	13.90	V
Highest	1698	-54.97	-13	-41.97	-61.94	1.58	10.70	H
	2546	-47.48	-13	-34.48	-55.73	2.102	12.50	H
	3396	-60.61	-13	-47.61	-69.50	2.856	13.90	H
	1698	-56.62	-13	-43.62	-63.59	1.58	10.70	V
	2546	-54.50	-13	-41.50	-62.75	2.10	12.50	V
	3396	-59.76	-13	-46.76	-68.65	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-54.06	-13	-41.06	-61.03	1.58	10.70	H
	2472	-48.02	-13	-35.02	-56.27	2.102	12.50	H
	3294	-63.85	-13	-50.85	-72.74	2.856	13.90	H
	1648	-57.43	-13	-44.43	-64.40	1.58	10.70	V
	2472	-56.50	-13	-43.50	-64.75	2.10	12.50	V
	3294	-63.81	-13	-50.81	-72.70	2.86	13.90	V
Middle	1672	-53.80	-13	-40.80	-60.77	1.58	10.70	H
	2508	-48.00	-13	-35.00	-56.25	2.102	12.50	H
	3348	-61.72	-13	-48.72	-70.61	2.856	13.90	H
	1674	-58.36	-13	-45.36	-65.33	1.58	10.70	V
	2508	-58.43	-13	-45.43	-66.68	2.10	12.50	V
	3348	-64.18	-13	-51.18	-73.07	2.86	13.90	V
Highest	1698	-52.56	-13	-39.56	-59.53	1.58	10.70	H
	2546	-50.79	-13	-37.79	-59.04	2.102	12.50	H
	3396	-59.41	-13	-46.41	-68.30	2.856	13.90	H
	1698	-56.10	-13	-43.10	-63.07	1.58	10.70	V
	2546	-55.63	-13	-42.63	-63.88	2.10	12.50	V
	3396	-59.89	-13	-46.89	-68.78	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3699	-50.34	-13	-37.34	-55.21	3.55	8.42	H
	5550	-43.28	-13	-30.28	-49.62	4.34	10.68	H
	7401	-52.36	-13	-39.36	-59.16	5.14	11.94	H
	3699	-50.08	-13	-37.08	-54.95	3.55	8.42	V
	5550	-43.01	-13	-30.01	-49.35	4.34	10.68	V
	7401	-52.32	-13	-39.32	-59.12	5.14	11.94	V
Middle	3759	-54.27	-13	-41.27	-59.14	3.55	8.42	H
	5640	-36.60	-13	-23.60	-42.94	4.34	10.68	H
	7521	-52.39	-13	-39.39	-59.19	5.14	11.94	H
	3759	-49.35	-13	-36.35	-54.22	3.55	8.42	V
	5640	-35.77	-13	-22.77	-42.11	4.34	10.68	V
	7521	-51.88	-13	-38.88	-58.68	5.14	11.94	V
Highest	3819	-60.26	-13	-47.26	-65.13	3.55	8.42	H
	5730	-49.01	-13	-36.01	-55.35	4.34	10.68	H
	7638	-52.06	-13	-39.06	-58.86	5.14	11.94	H
	3819	-57.20	-13	-44.20	-62.07	3.55	8.42	V
	5730	-51.48	-13	-38.48	-57.82	4.34	10.68	V
	7638	-51.92	-13	-38.92	-58.72	5.14	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3699	-61.57	-13	-48.57	-66.44	3.55	8.42	H
	5550	-52.81	-13	-39.81	-59.15	4.34	10.68	H
	7401	-52.58	-13	-39.58	-59.38	5.14	11.94	H
	3699	-61.53	-13	-48.53	-66.40	3.55	8.42	V
	5550	-53.63	-13	-40.63	-59.97	4.34	10.68	V
	7401	-52.48	-13	-39.48	-59.28	5.14	11.94	V
Middle	3759	-61.24	-13	-48.24	-66.11	3.55	8.42	H
	5640	-36.46	-13	-23.46	-42.80	4.34	10.68	H
	7521	-52.73	-13	-39.73	-59.53	5.14	11.94	H
	3759	-53.53	-13	-40.53	-58.40	3.55	8.42	V
	5640	-41.31	-13	-28.31	-47.65	4.34	10.68	V
	7521	-52.22	-13	-39.22	-59.02	5.14	11.94	V
Highest	3819	-61.03	-13	-48.03	-65.90	3.55	8.42	H
	5730	-42.91	-13	-29.91	-49.25	4.34	10.68	H
	7638	-52.22	-13	-39.22	-59.02	5.14	11.94	H
	3819	-58.10	-13	-45.10	-62.97	3.55	8.42	V
	5730	-50.78	-13	-37.78	-57.12	4.34	10.68	V
	7638	-52.21	-13	-39.21	-59.01	5.14	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-68.55	-13	-55.55	-75.52	1.58	10.70	H
	2476	-58.27	-13	-45.27	-66.52	2.102	12.50	H
	3306	-63.87	-13	-50.87	-72.76	2.856	13.90	H
	1652	-68.94	-13	-55.94	-75.91	1.58	10.70	V
	2482	-60.21	-13	-47.21	-68.46	2.10	12.50	V
	3306	-63.18	-13	-50.18	-72.07	2.86	13.90	V
Middle	1672	-68.94	-13	-55.94	-75.91	1.58	10.70	H
	2512	-57.56	-13	-44.56	-65.81	2.102	12.50	H
	3348	-64.83	-13	-51.83	-73.72	2.856	13.90	H
	1672	-69.26	-13	-56.26	-76.23	1.58	10.70	V
	2506	-60.00	-13	-47.00	-68.25	2.10	12.50	V
	3348	-64.60	-13	-51.60	-73.49	2.86	13.90	V
Highest	1692	-68.02	-13	-55.02	-74.99	1.58	10.70	H
	2542	-56.89	-13	-43.89	-65.14	2.102	12.50	H
	3384	-64.25	-13	-51.25	-73.14	2.856	13.90	H
	1692	-68.57	-13	-55.57	-75.54	1.58	10.70	V
	2542	-60.87	-13	-47.87	-69.12	2.10	12.50	V
	3384	-64.24	-13	-51.24	-73.13	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





WCDMA Band II(RMC 12.2Kbps)								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-61.23	-13	-48.23	-66.10	3.55	8.42	H
	5556	-55.25	-13	-42.25	-61.59	4.34	10.68	H
	7410	-52.69	-13	-39.69	-59.49	5.14	11.94	H
	3705	-60.84	-13	-47.84	-65.71	3.55	8.42	V
	5559	-52.62	-13	-39.62	-58.96	4.34	10.68	V
	7410	-52.69	-13	-39.69	-59.49	5.14	11.94	V
Middle	3762	-60.13	-13	-47.13	-65.00	3.55	8.42	H
	5643	-50.84	-13	-37.84	-57.18	4.34	10.68	H
	7521	-52.57	-13	-39.57	-59.37	5.14	11.94	H
	3762	-58.07	-13	-45.07	-62.94	3.55	8.42	V
	5637	-51.36	-13	-38.36	-57.70	4.34	10.68	V
	7521	-51.90	-13	-38.90	-58.70	5.14	11.94	V
Highest	3816	-61.03	-13	-48.03	-65.90	3.55	8.42	H
	5718	-49.19	-13	-36.19	-55.53	4.34	10.68	H
	7629	-52.10	-13	-39.10	-58.90	5.14	11.94	H
	3816	-60.24	-13	-47.24	-65.11	3.55	8.42	V
	5721	-49.97	-13	-36.97	-56.31	4.34	10.68	V
	7629	-51.90	-13	-38.90	-58.70	5.14	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-46.69	-13	-33.69	-57.43	2.604	13.34	H
	5133	-52.12	-13	-39.12	-62.63	3.011	13.52	H
	6849	-54.98	-13	-41.98	-65.18	3.271	13.47	H
	3426	-46.79	-13	-33.79	-57.53	2.604	13.34	V
	5133	-52.22	-13	-39.22	-62.73	3.011	13.52	V
	6849	-54.98	-13	-41.98	-65.18	3.271	13.47	V
Middle	3468	-45.43	-13	-32.43	-56.17	2.604	13.34	H
	5199	-55.84	-13	-42.84	-66.35	3.011	13.52	H
	6930	-53.36	-13	-40.36	-63.56	3.271	13.47	H
	3468	-52.99	-13	-39.99	-63.73	2.604	13.34	V
	5196	-56.83	-13	-43.83	-67.34	3.011	13.52	V
	6930	-53.27	-13	-40.27	-63.47	3.271	13.47	V
Highest	3504	-50.95	-13	-37.95	-61.69	2.604	13.34	H
	5256	-50.07	-13	-37.07	-60.58	3.011	13.52	H
	7011	-52.72	-13	-39.72	-62.92	3.271	13.47	H
	3504	-50.84	-13	-37.84	-61.58	2.604	13.34	V
	5253	-50.83	-13	-37.83	-61.34	3.011	13.52	V
	7011	-52.15	-13	-39.15	-62.35	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA BC0(1xRTT)								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1650	-67.66	-13	-54.66	-68.87	2.32	5.68	H
	2474	-49.98	-13	-36.98	-50.61	3.02	5.80	H
	3300	-65.15	-13	-52.15	-67.61	3.27	7.88	H
	1650	-67.43	-13	-54.43	-68.64	2.32	5.68	V
	2474	-50.30	-13	-37.30	-50.93	3.02	5.80	V
	3300	-65.13	-13	-52.13	-67.59	3.27	7.88	V
Middle	1674	-67.50	-13	-54.50	-68.71	2.32	5.68	H
	2510	-50.52	-13	-37.52	-51.15	3.02	5.80	H
	3348	-65.05	-13	-52.05	-67.51	3.27	7.88	H
	1674	-67.84	-13	-54.84	-69.05	2.32	5.68	V
	2510	-55.67	-13	-42.67	-56.30	3.02	5.80	V
	3348	-65.28	-13	-52.28	-67.74	3.27	7.88	V
Highest	1698	-64.31	-13	-51.31	-65.52	2.32	5.68	H
	2544	-50.16	-13	-37.16	-50.79	3.02	5.80	H
	3396	-64.53	-13	-51.53	-66.99	3.27	7.88	H
	1696	-68.11	-13	-55.11	-69.32	2.32	5.68	V
	2544	-52.65	-13	-39.65	-53.28	3.02	5.80	V
	3396	-64.85	-13	-51.85	-67.31	3.27	7.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA BC1(1xRTT)								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-59.19	-13	-46.19	-64.06	3.55	8.42	H
	5553	-45.27	-13	-32.27	-51.61	4.34	10.68	H
	7404	-52.47	-13	-39.47	-59.27	5.14	11.94	H
	3702	-57.13	-13	-44.13	-62.00	3.55	8.42	V
	5553	-43.37	-13	-30.37	-49.71	4.34	10.68	V
	7404	-52.17	-13	-39.17	-58.97	5.14	11.94	V
Middle	3759	-59.02	-13	-46.02	-63.89	3.55	8.42	H
	5640	-42.11	-13	-29.11	-48.45	4.34	10.68	H
	7521	-52.18	-13	-39.18	-58.98	5.14	11.94	H
	3759	-58.13	-13	-45.13	-63.00	3.55	8.42	V
	5640	-40.07	-13	-27.07	-46.41	4.34	10.68	V
	7521	-51.72	-13	-38.72	-58.52	5.14	11.94	V
Highest	3816	-59.56	-13	-46.56	-64.43	3.55	8.42	H
	5724	-44.76	-13	-31.76	-51.10	4.34	10.68	H
	7635	-51.86	-13	-38.86	-58.66	5.14	11.94	H
	3816	-58.25	-13	-45.25	-63.12	3.55	8.42	V
	5724	-43.12	-13	-30.12	-49.46	4.34	10.68	V
	7635	-51.28	-13	-38.28	-58.08	5.14	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.