



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1980-3
FCC ID : IHDT56XS2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 28, 2018 and testing was completed on Jan. 25, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 6
1.5 Modification of EUT 6
1.6 Specification of Accessory 6
1.7 Testing Location 7
1.8 Applicable Standards 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8
2.1 Carrier Frequency and Channel 8
2.2 Test Mode 9
2.3 Connection Diagram of Test System 10
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 11
2.6 Measurement Results Explanation Example 11
3 TEST RESULT 12
3.1 6dB and 99% Bandwidth Measurement 12
3.2 Output Power Measurement 14
3.3 Power Spectral Density Measurement 15
3.4 Conducted Band Edges and Spurious Emission Measurement 17
3.5 Radiated Band Edges and Spurious Emission Measurement 30
3.6 AC Conducted Emission Measurement 34
3.7 Antenna Requirements 36
4 LIST OF MEASURING EQUIPMENT 37
5 UNCERTAINTY OF EVALUATION 38
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX D. DUTY CYCLE PLOTS
APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR8D2801C	Rev. 01	Initial issue of report	Feb. 27, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.10 dB at 4824.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.14 dB at 0.207 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1980-3
FCC ID	IHDT56XS2
EUT supports Radios application	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR / LE NFC/GNSS/FM Receiver
IMEI Code	Conducted: 352156100008097 Conduction: 352156100009624 Radiation: 352156100008378
HW Version	DVT2
SW Version	PPF29.58
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 23.30 dBm (0.2138 W) 802.11g : 23.79 dBm (0.2393 W) 802.11n HT20 : 22.91 dBm (0.1954 W) 802.11n HT40 : 23.25 dBm (0.2113 W)
99% Occupied Bandwidth	802.11b : 13.99MHz 802.11g : 17.78MHz 802.11n HT20 : 18.88MHz 802.11n HT40 : 36.56MHz
Antenna Type / Gain	Loop Antenna with gain -8.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola (Salom)	Model Name SC-51
	Power Rating	I/P: 100-240 Vac, 0.6A O/P: 5Vdc,3A or 9Vdc,2A or 12Vdc,1.5A	
AC Adapter 2(US)	Brand Name	Motorola (Chenyang)	Model Name SC-51
	Power Rating	I/P: 100-240 Vac, 0.6A O/P: 5Vdc,3A or 9Vdc,2A or 12Vdc,1.5A	
Battery	Brand Name	Amperex (Motorola)	Model Name KZ40
	Power Rating	3.8Vdc,3600mAh	Type Li-ion Polymer
USB Cable 1	Brand Name	Motorola (Cabletech)	Model Name SC18C49697
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name SC18C24367
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	
USB Cable 3	Brand Name	Motorola (Luxshare)	Model Name SC18C24368
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	



1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH06-KS	CN5013	630927

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r01
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		




2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 2(Charging from Adapter 2) + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Earphone and USB Cable 1.	

2.3 Connection Diagram of Test System

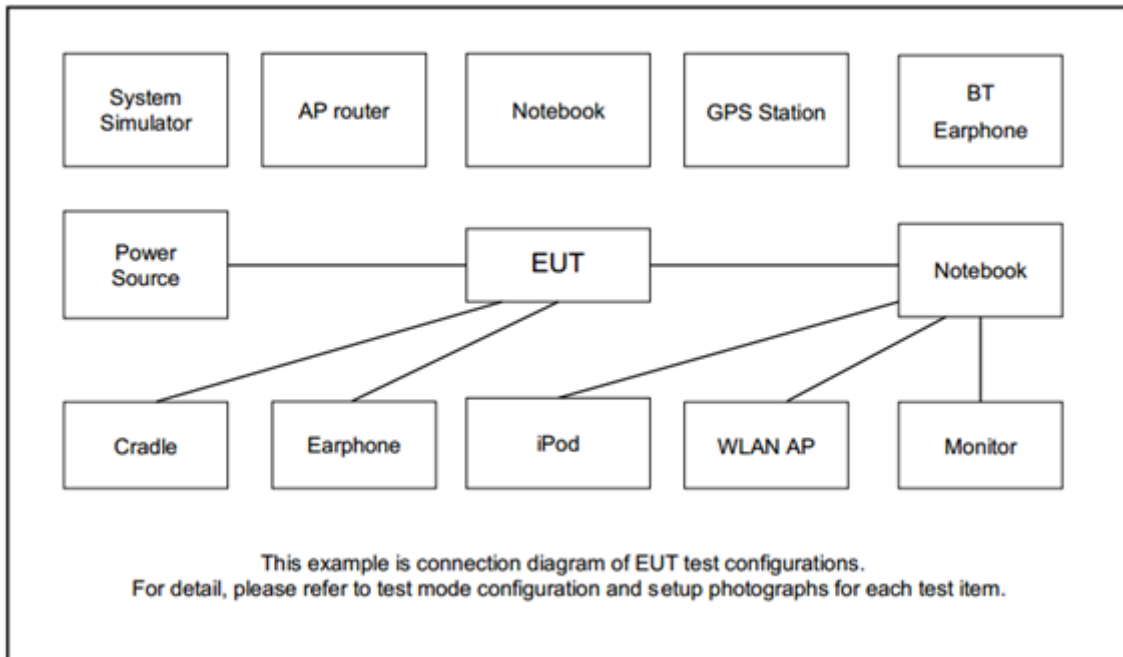

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	Earphone	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 5.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

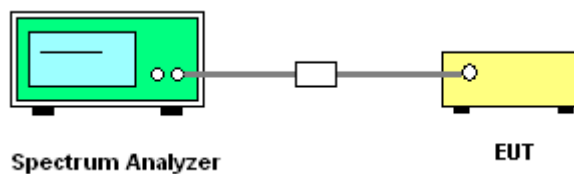



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

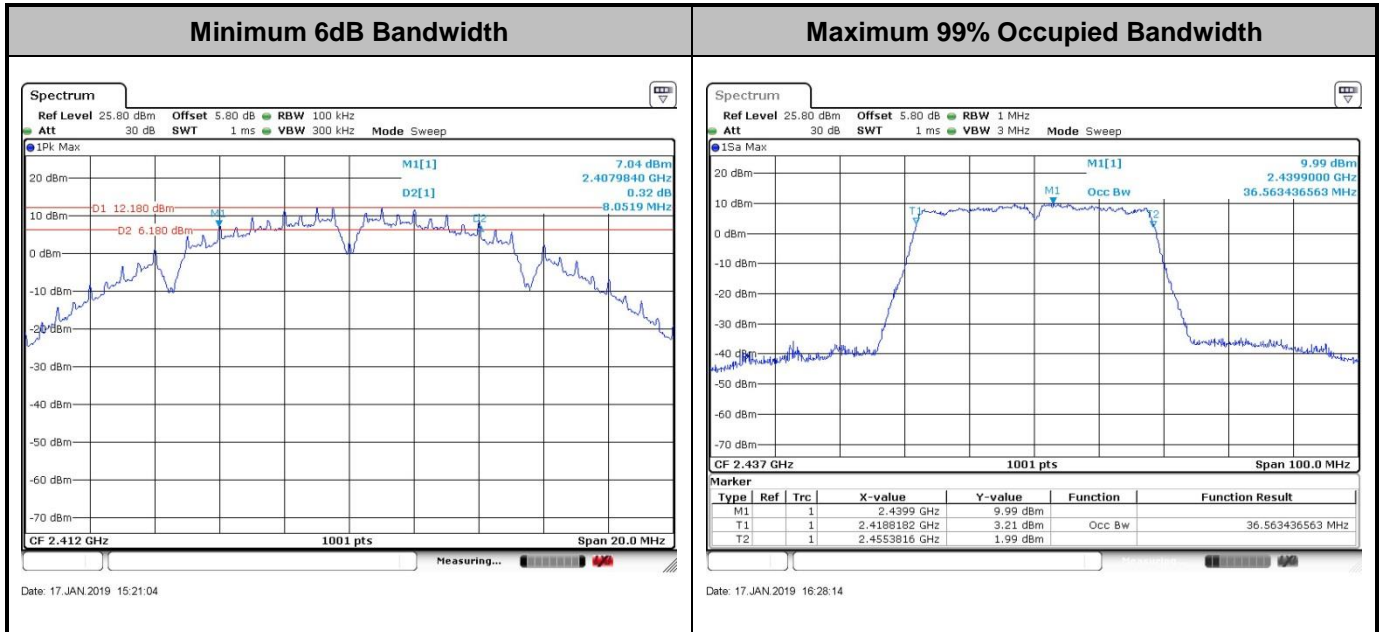

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

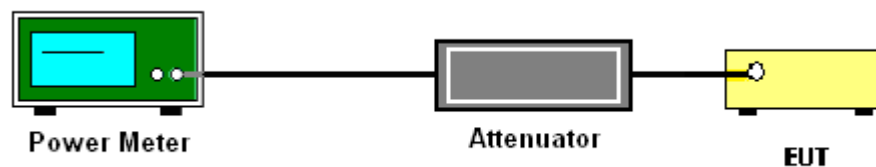

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

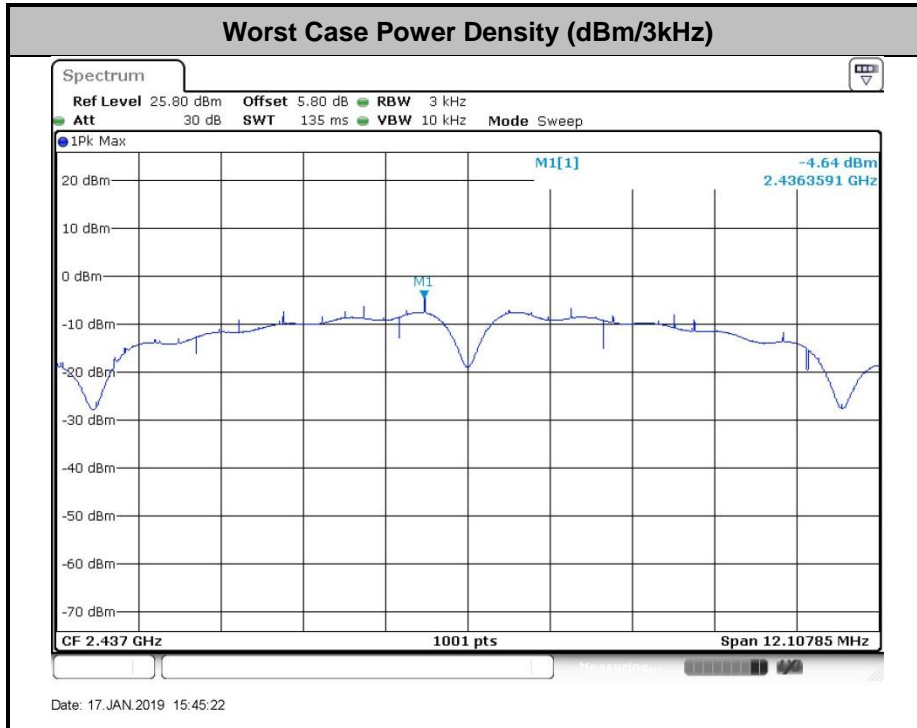

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup


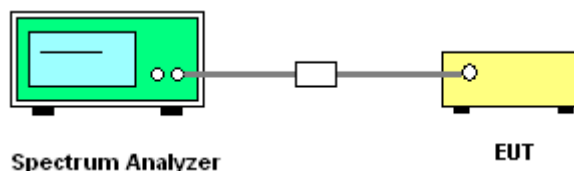




3.4.5 Test Result of Conducted Band Edges and Spurious Emission




Test Engineer : Ivan Zhang	Temperature :	21~24°C
	Relative Humidity :	49~51%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

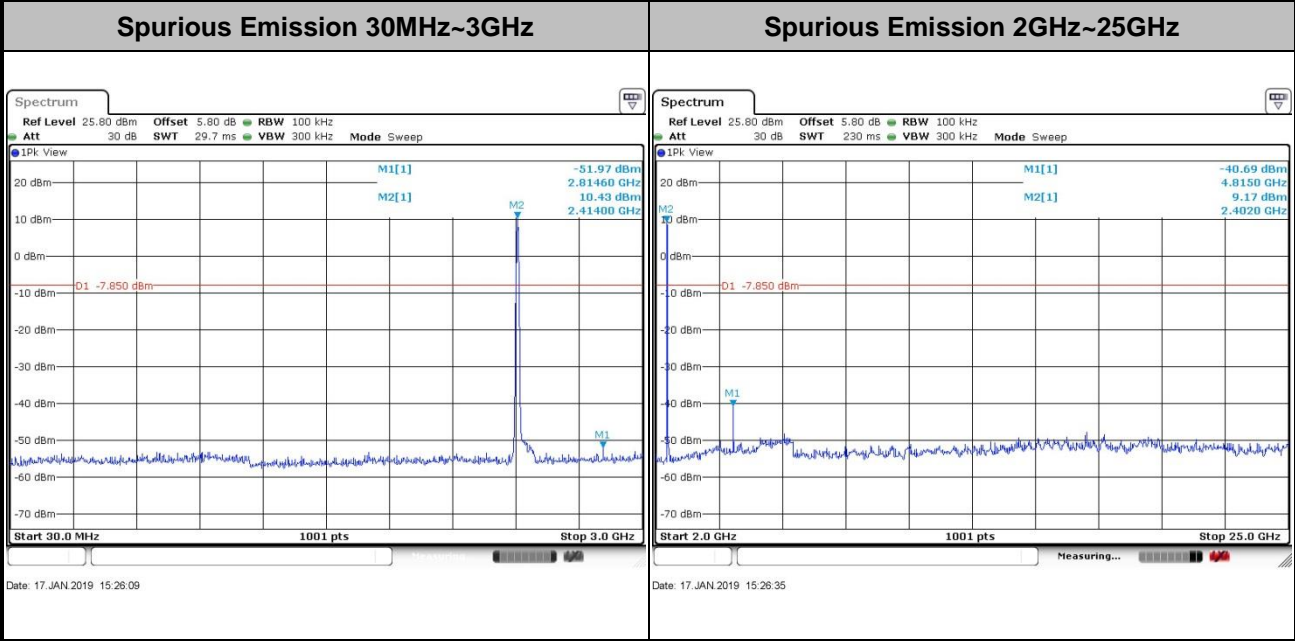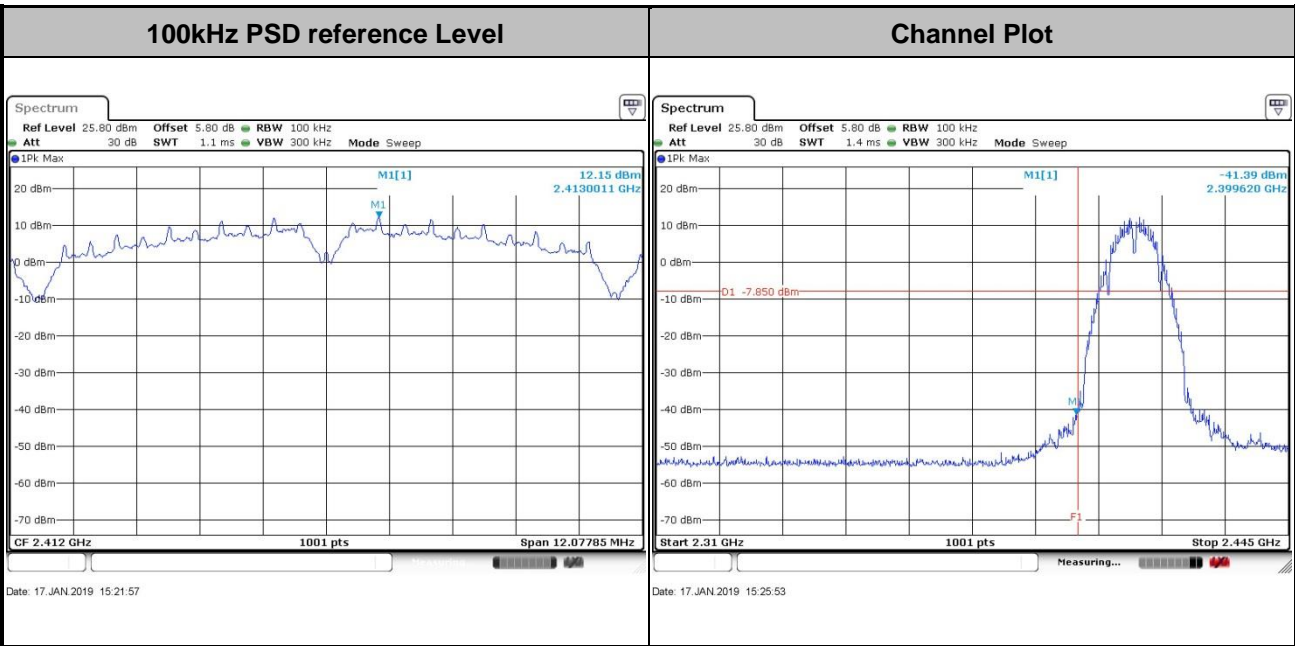





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

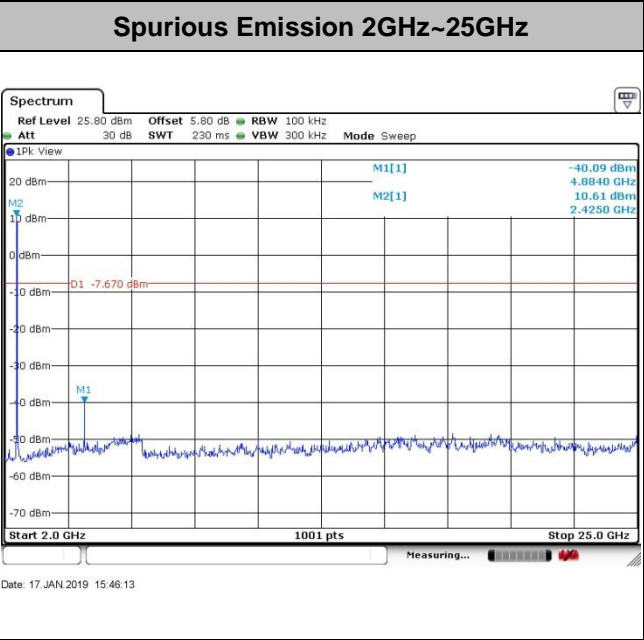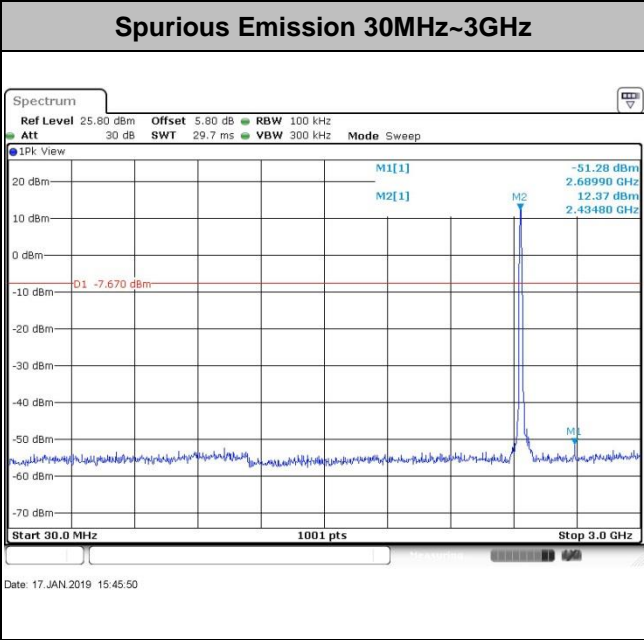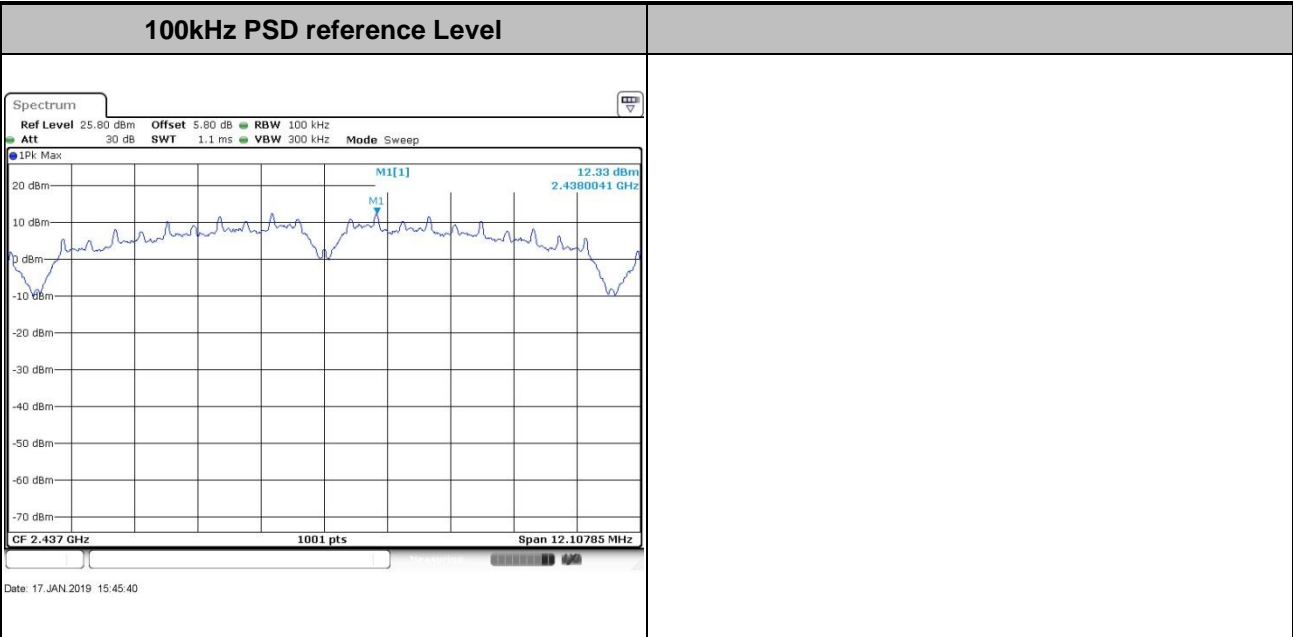





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

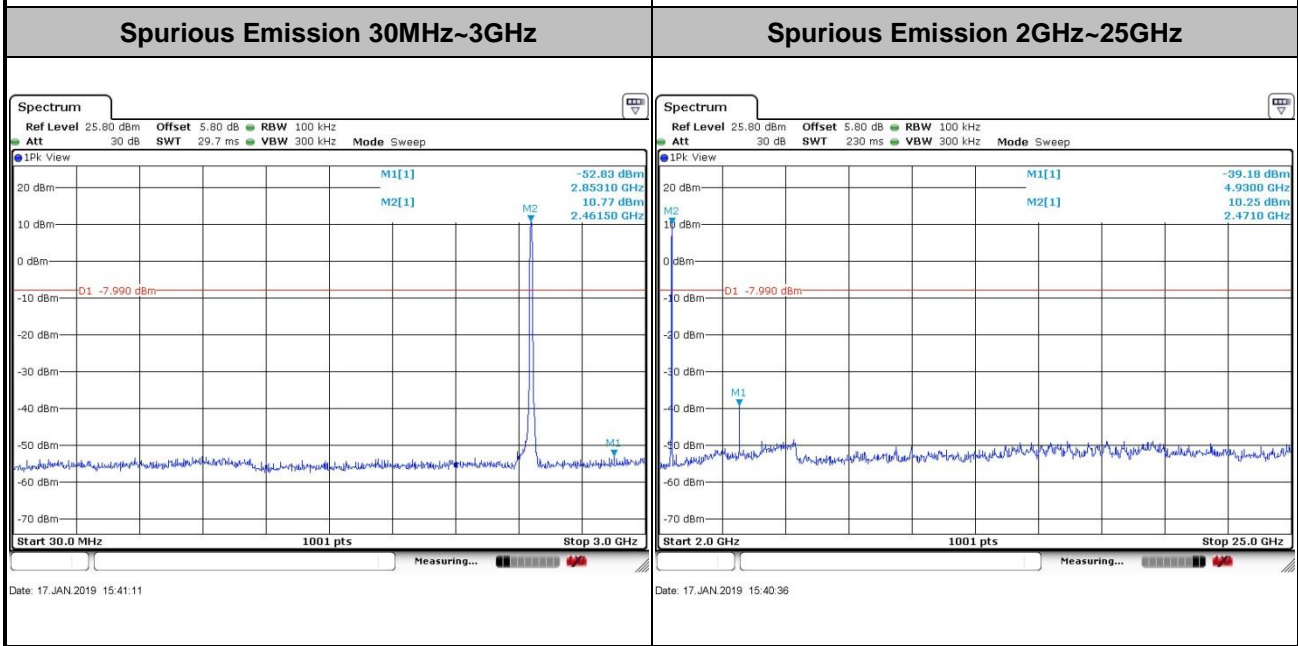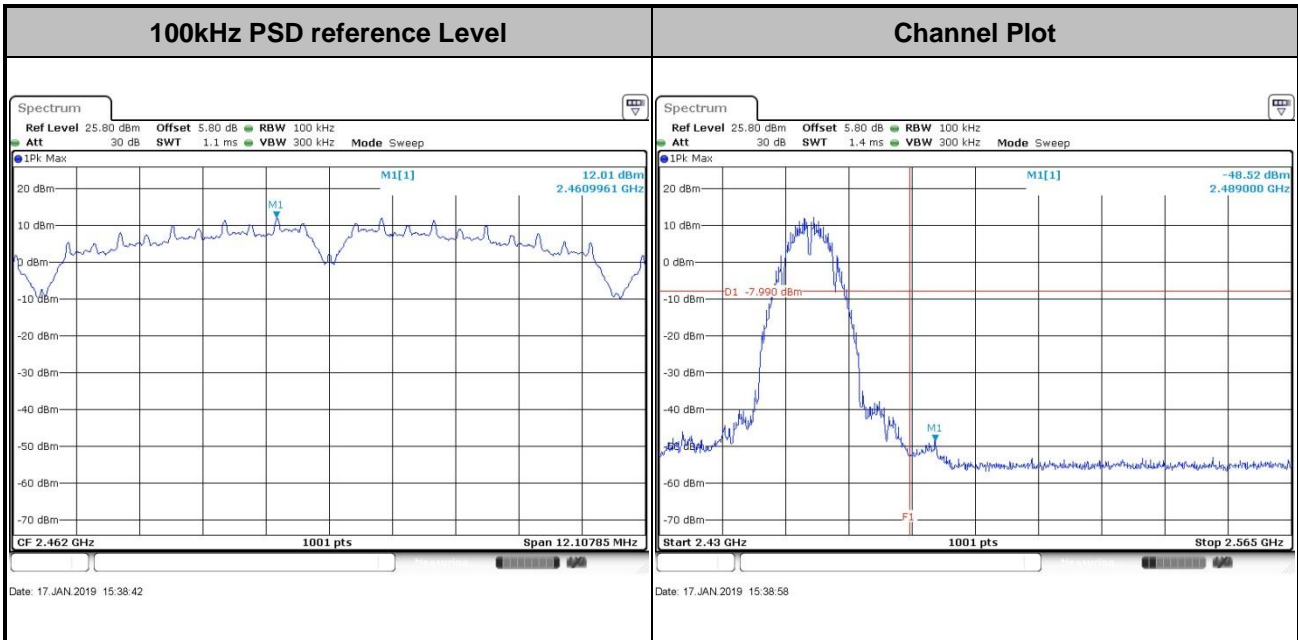






Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

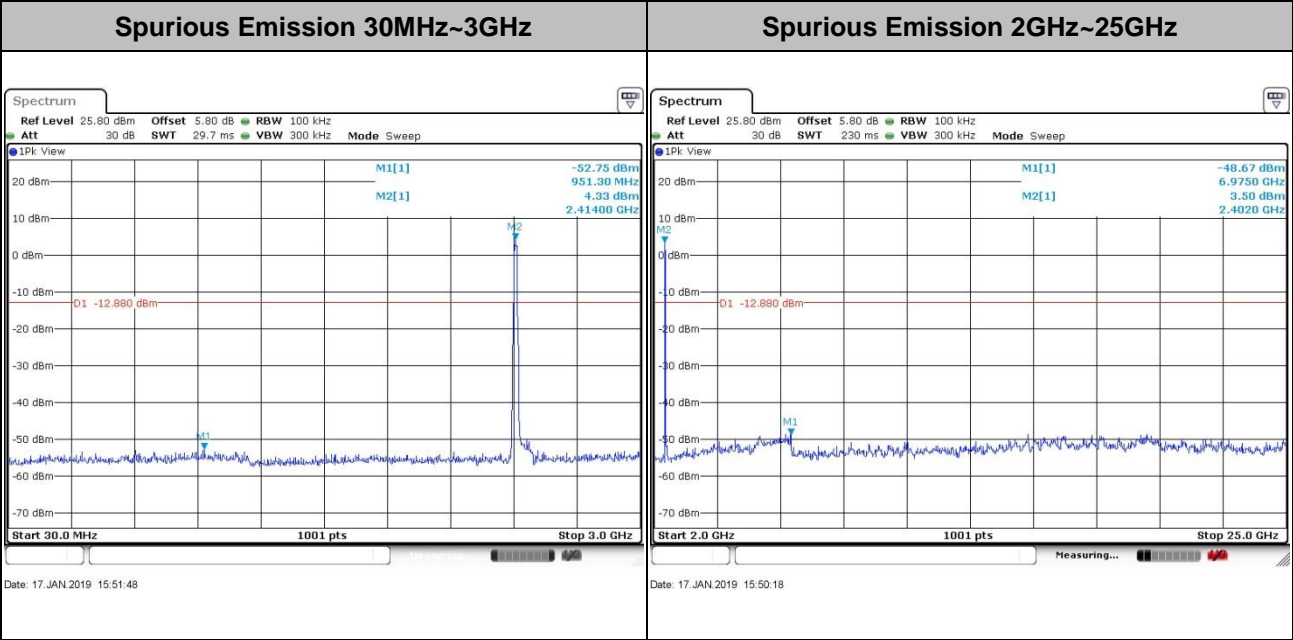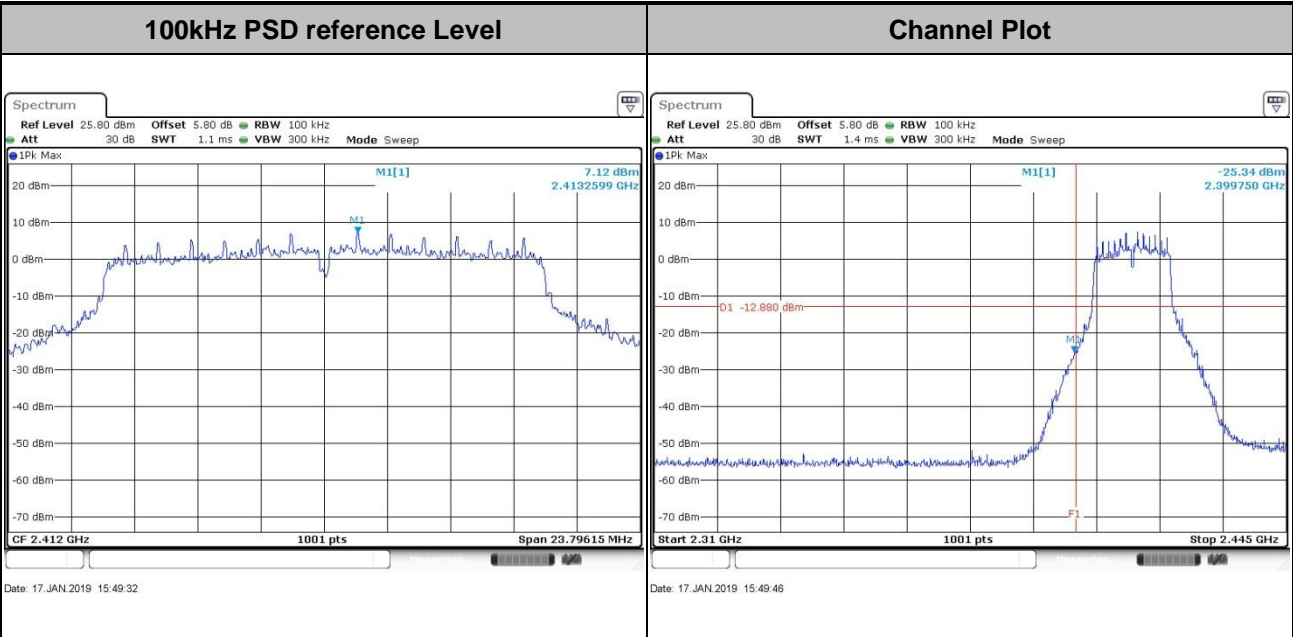





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

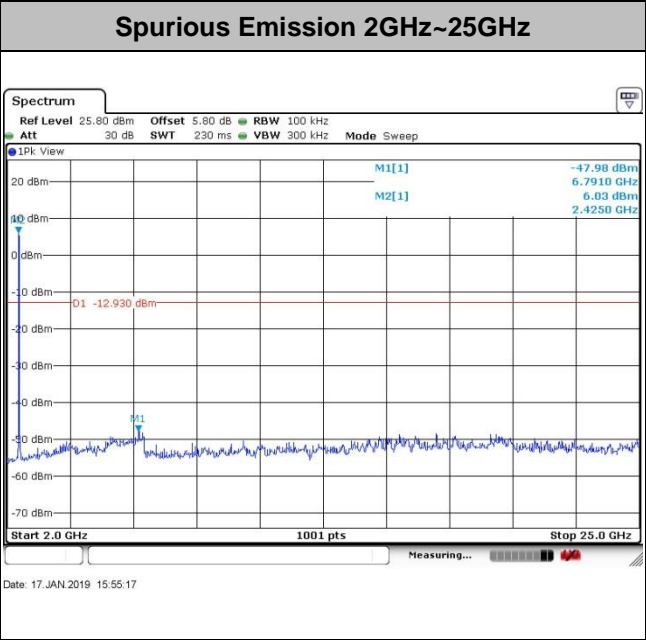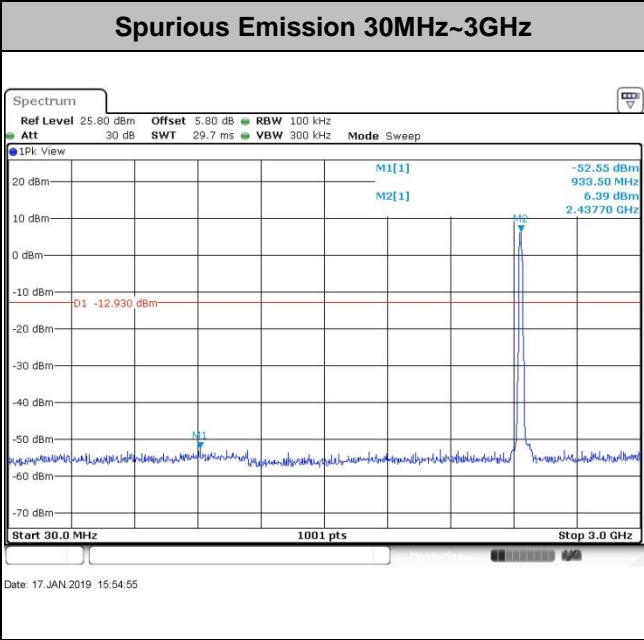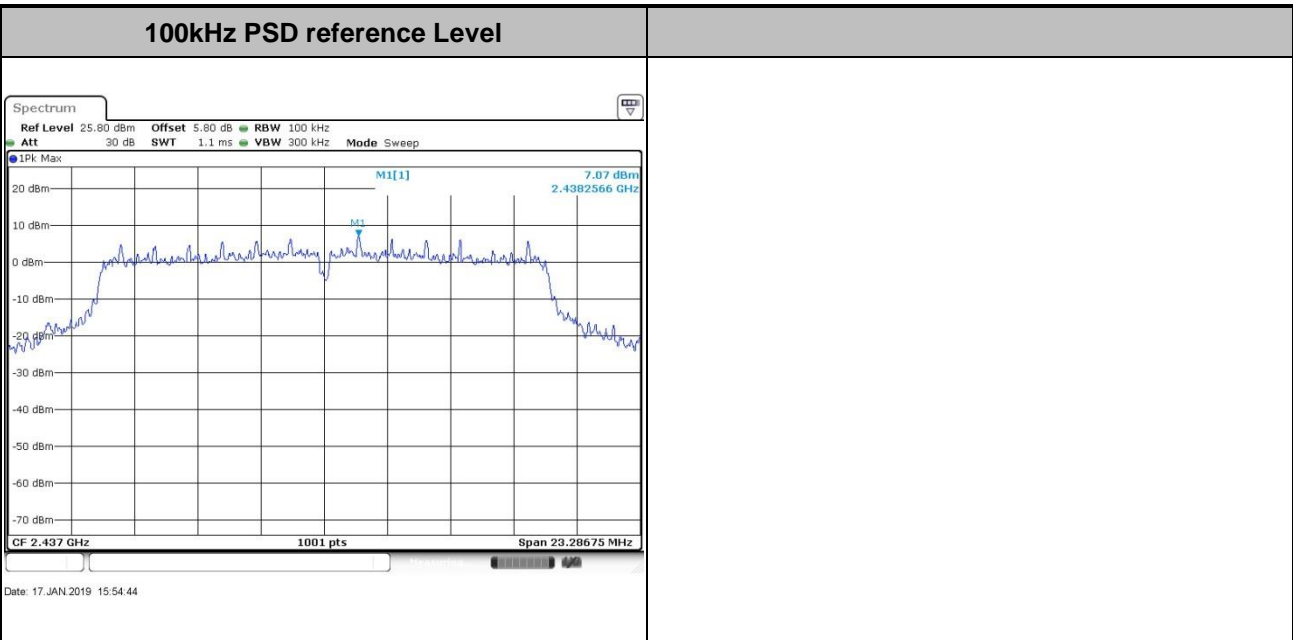





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

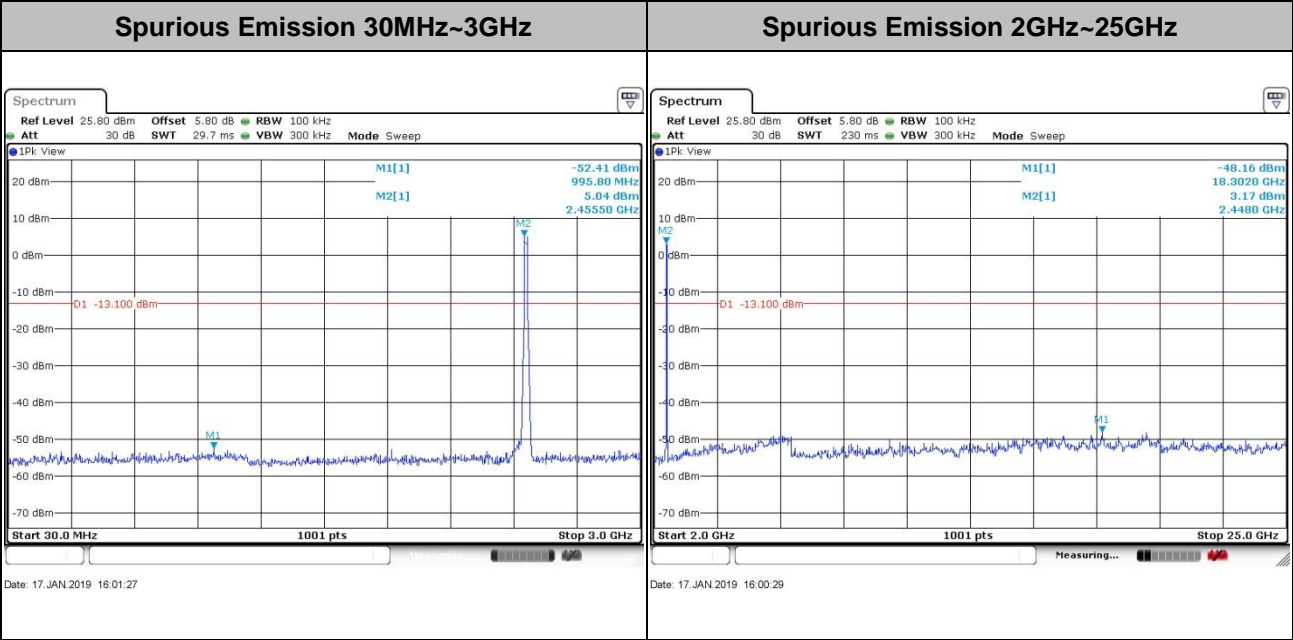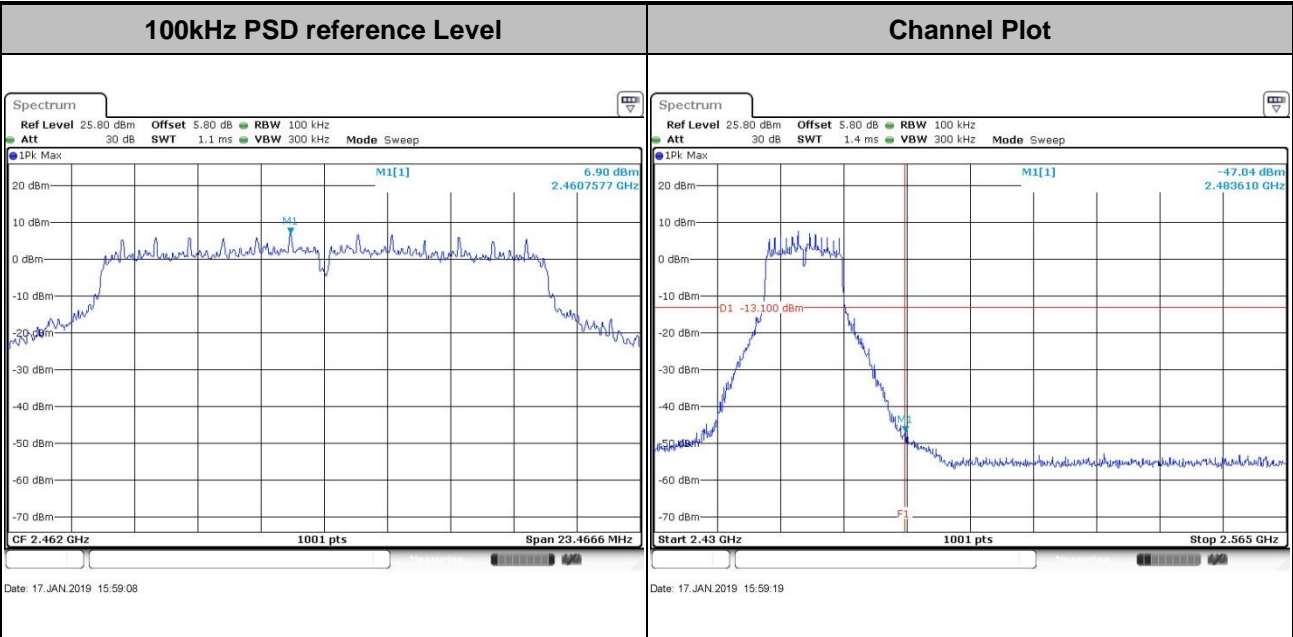




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

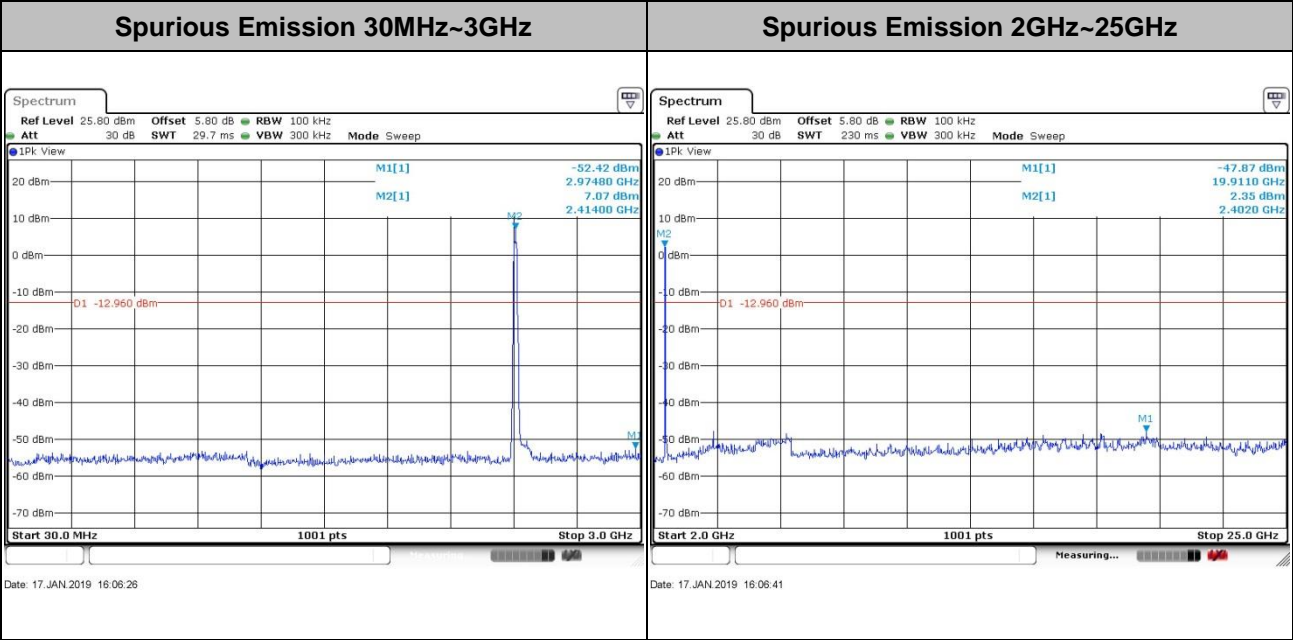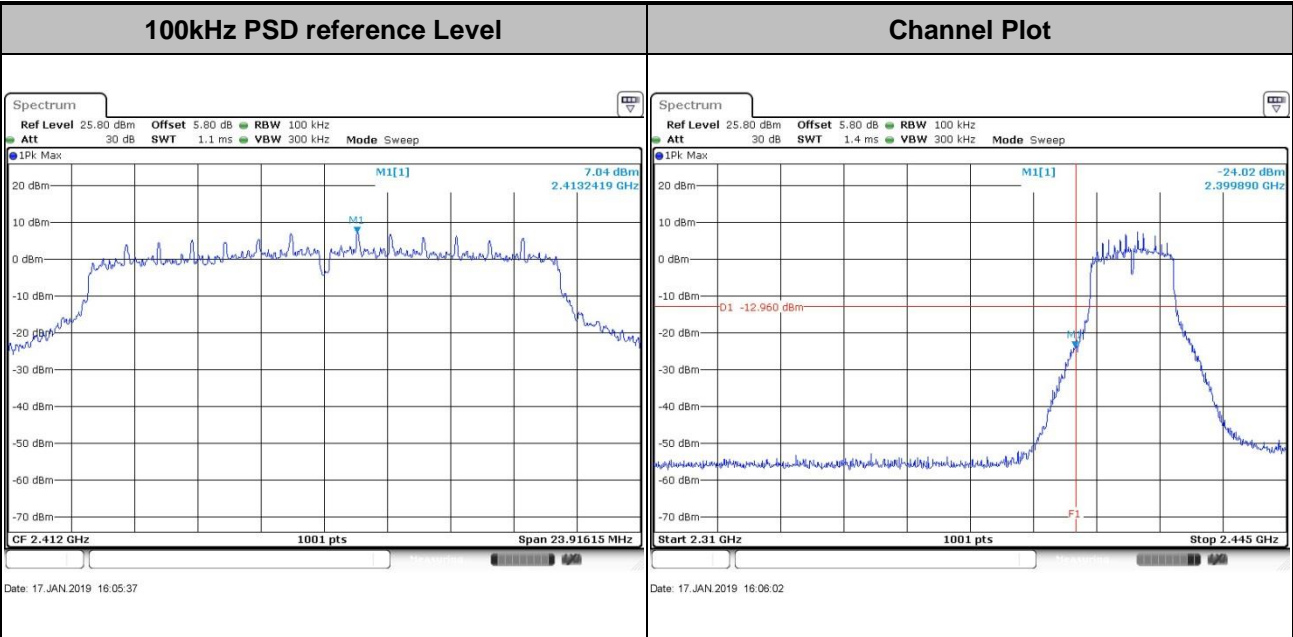




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

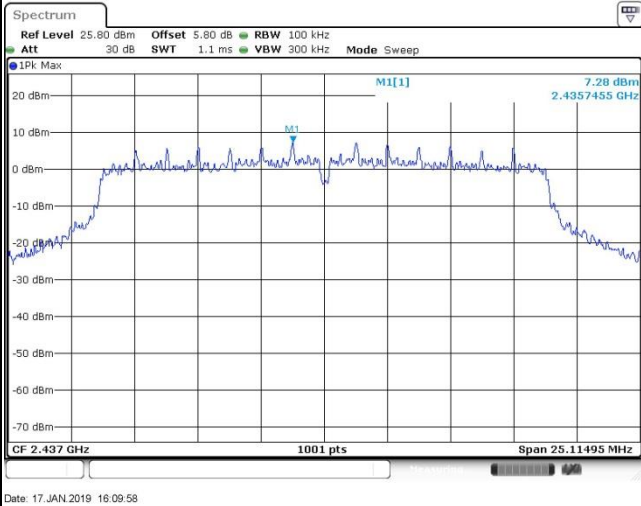

Spurious Emission 30MHz~3GHz


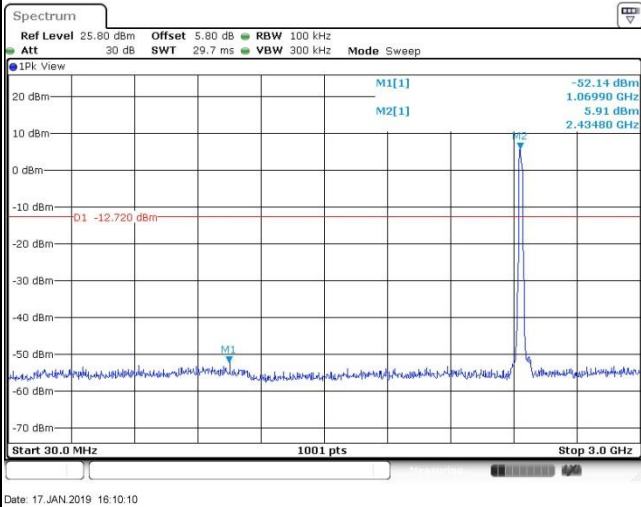


Spurious Emission 2GHz~25GHz

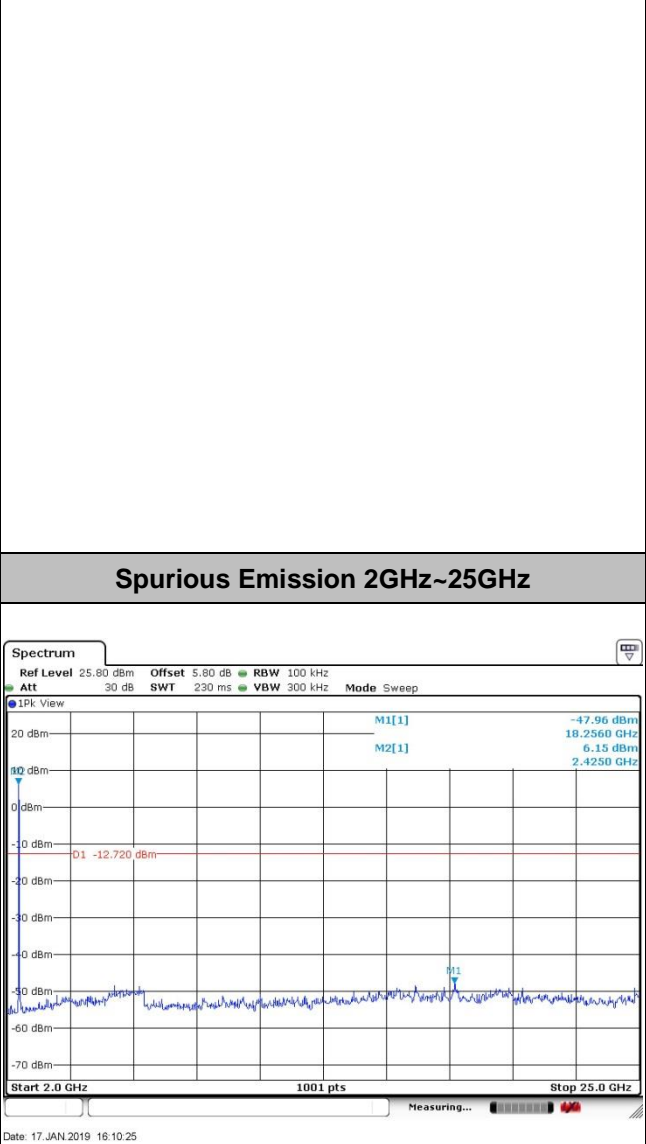





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

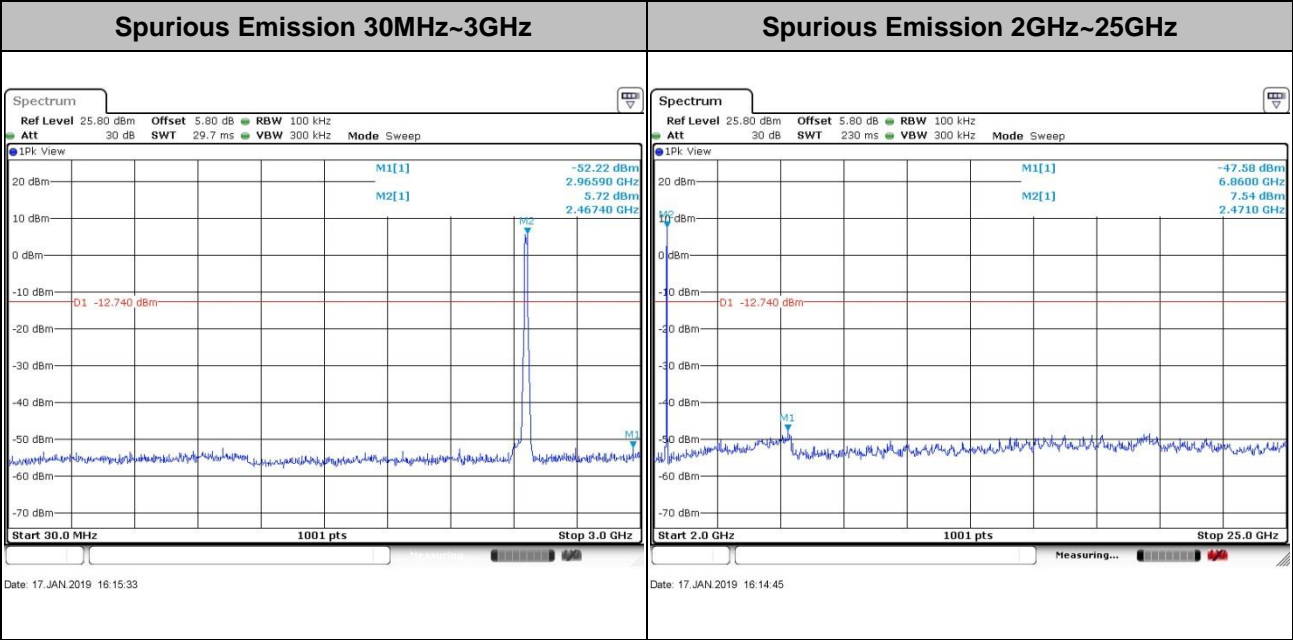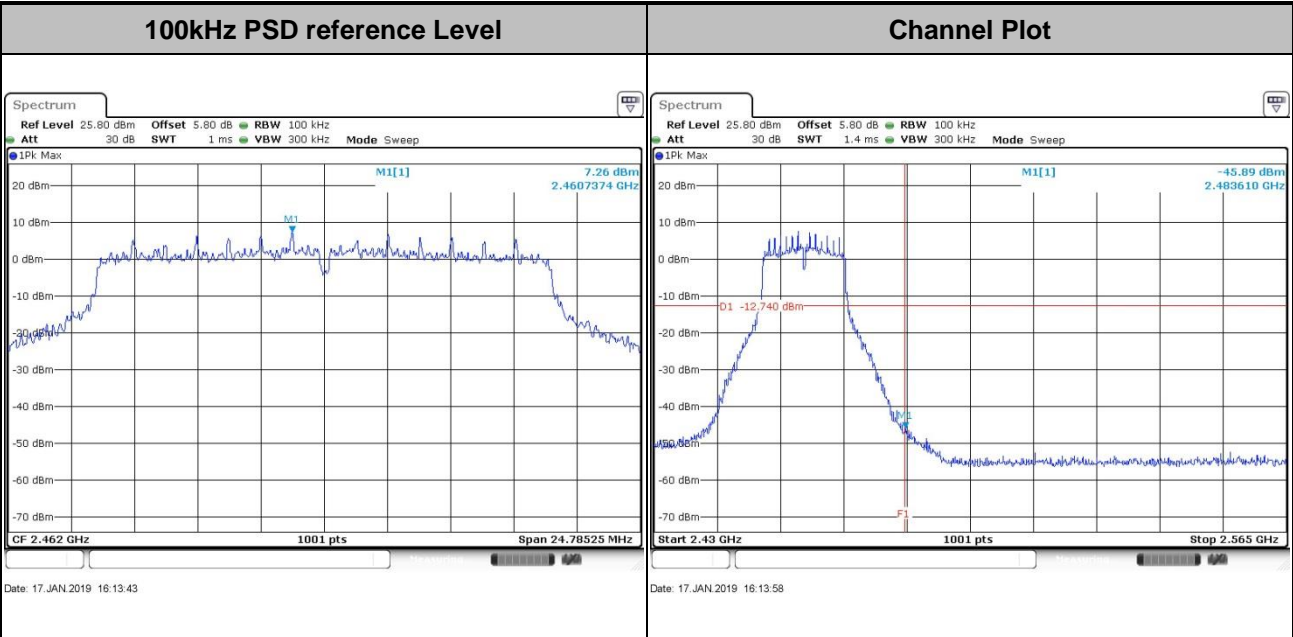






Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

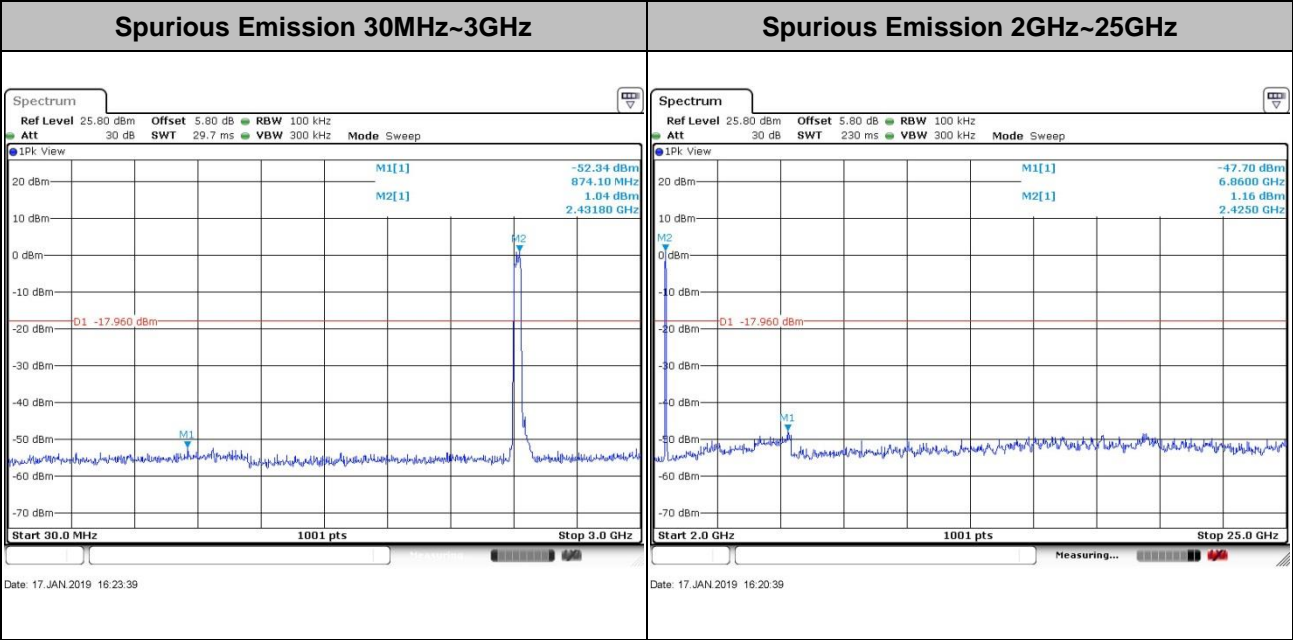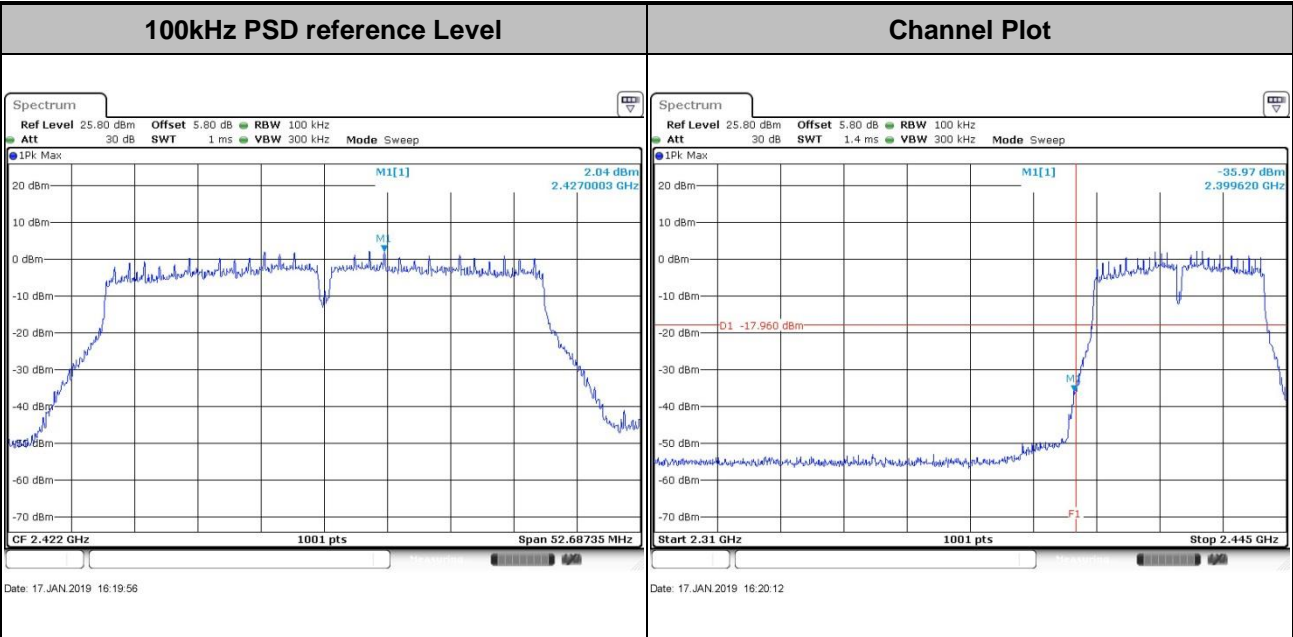





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

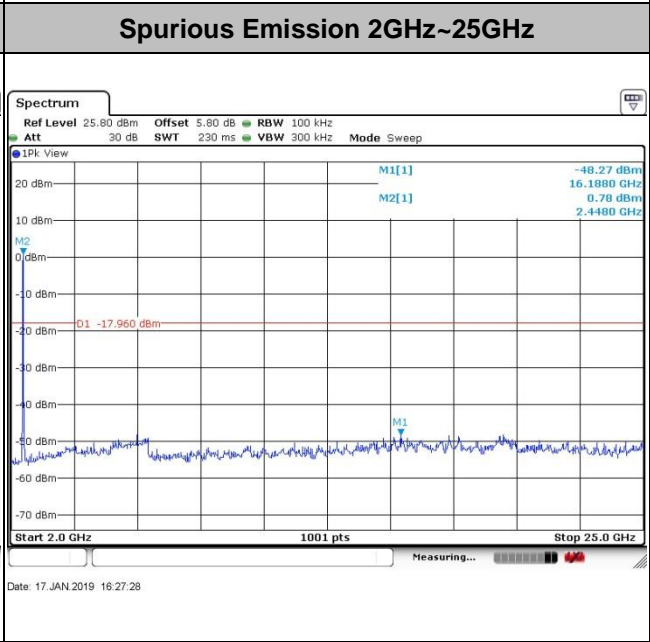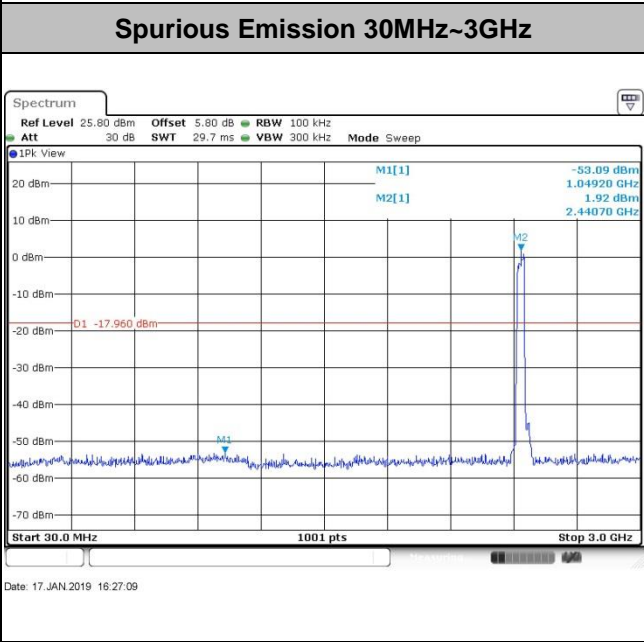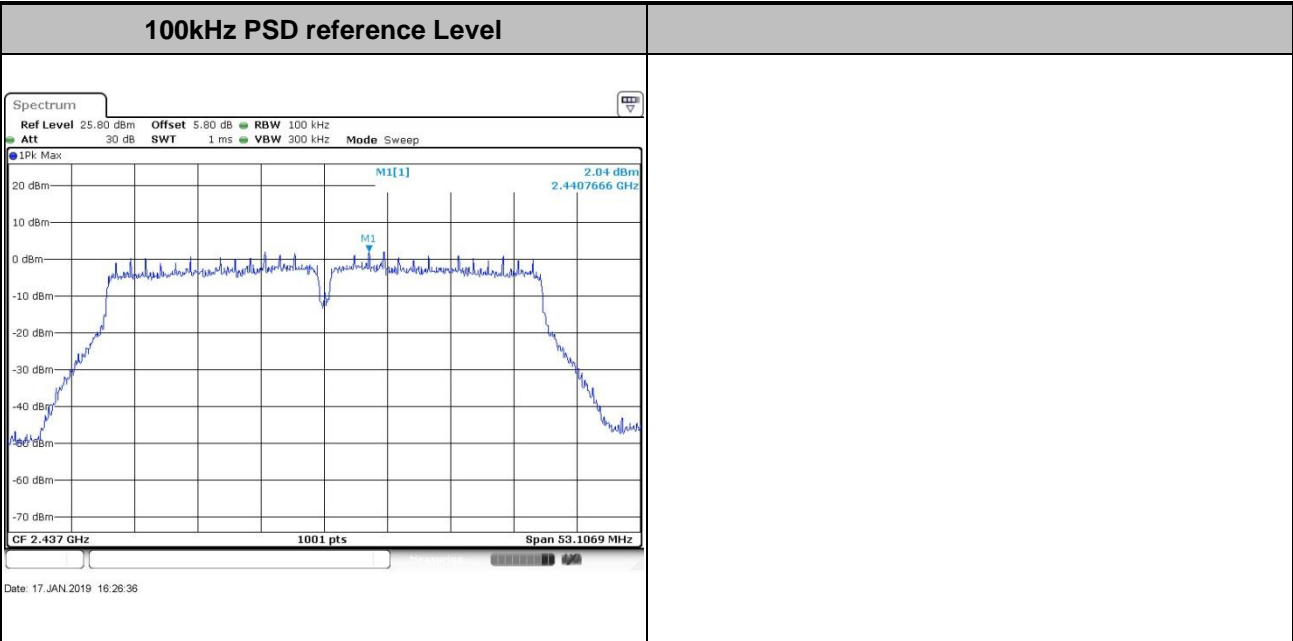



Test Mode : 802.11n HT40 Test Channel : 09

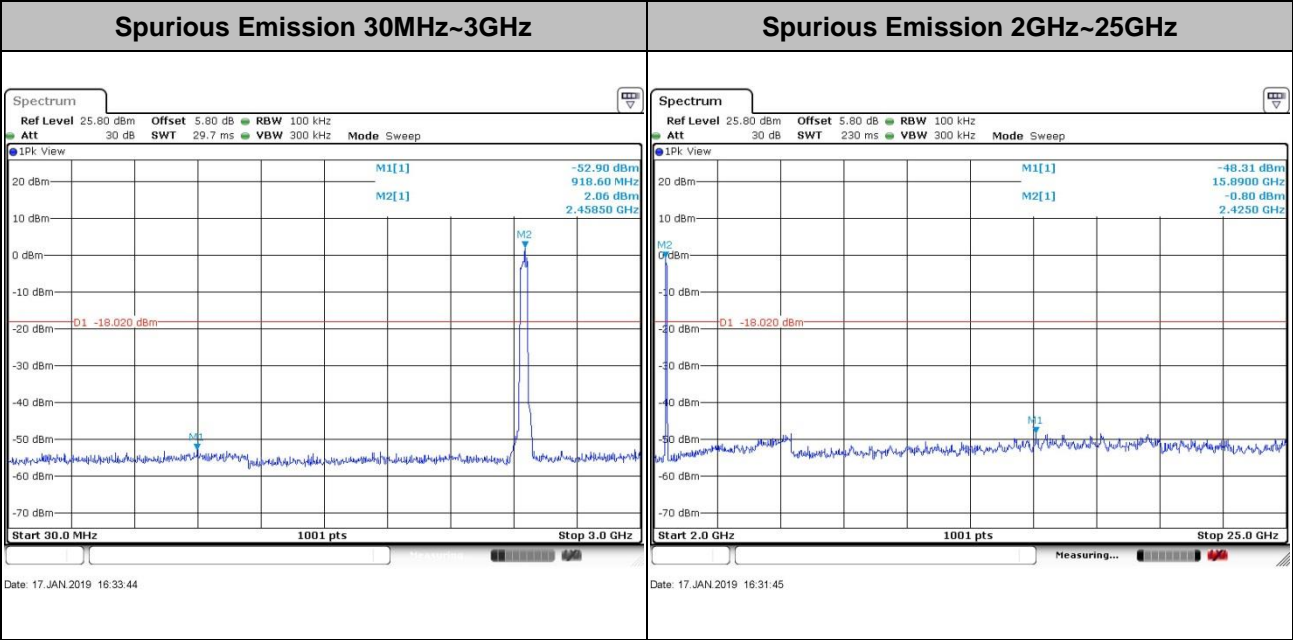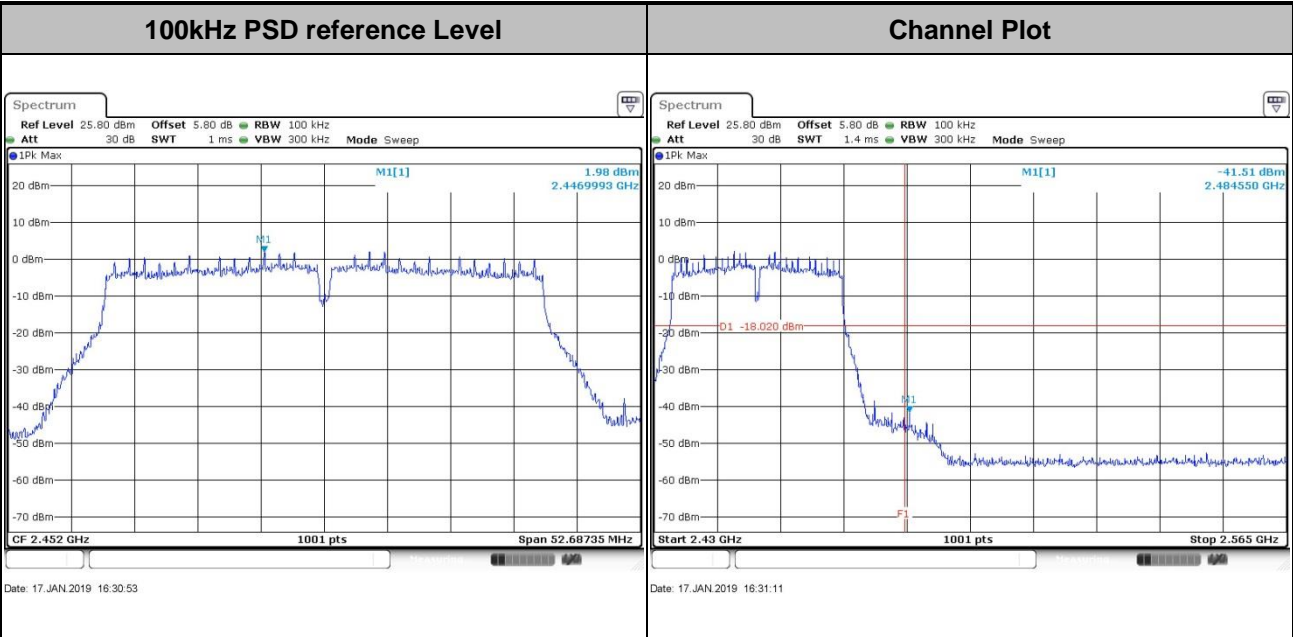



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

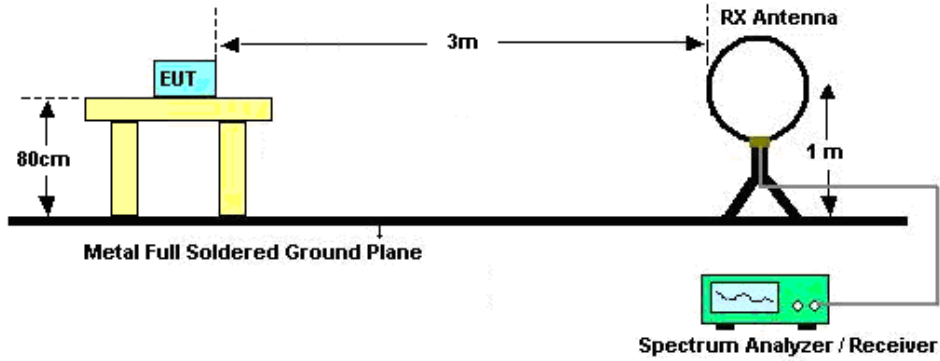

For radiated emissions from 30MHz to 1GHz

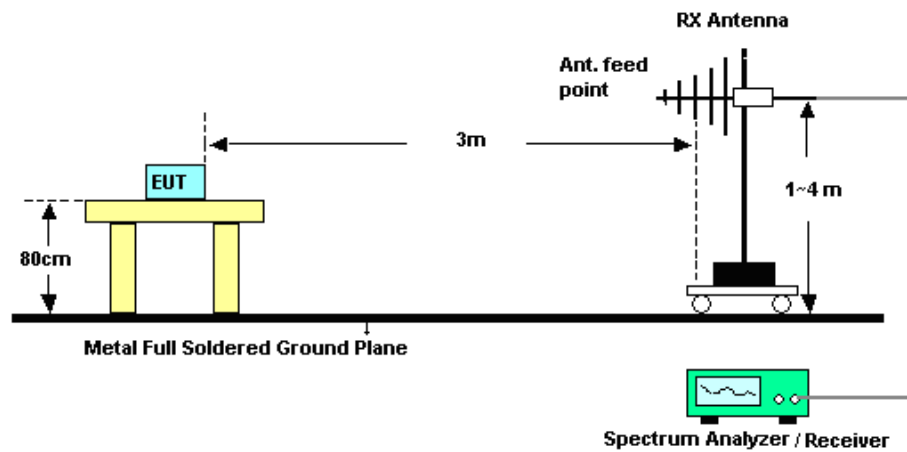

For radiated emissions above 1GHz

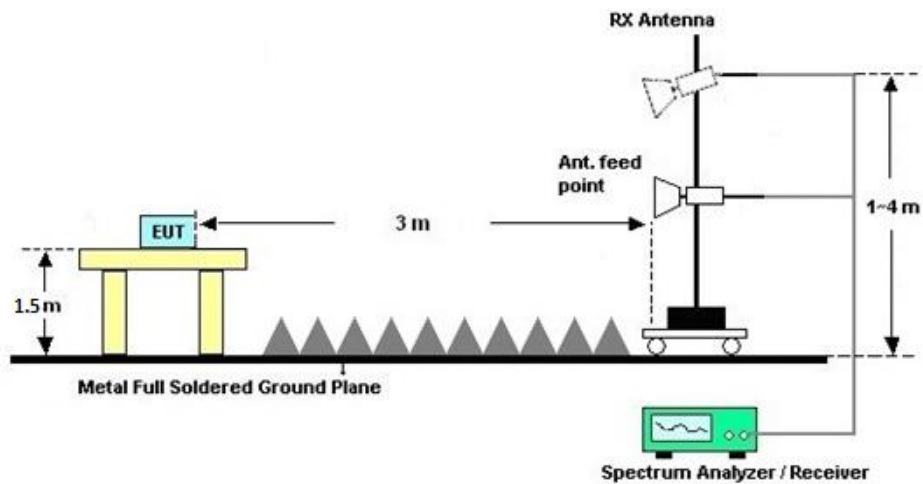



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

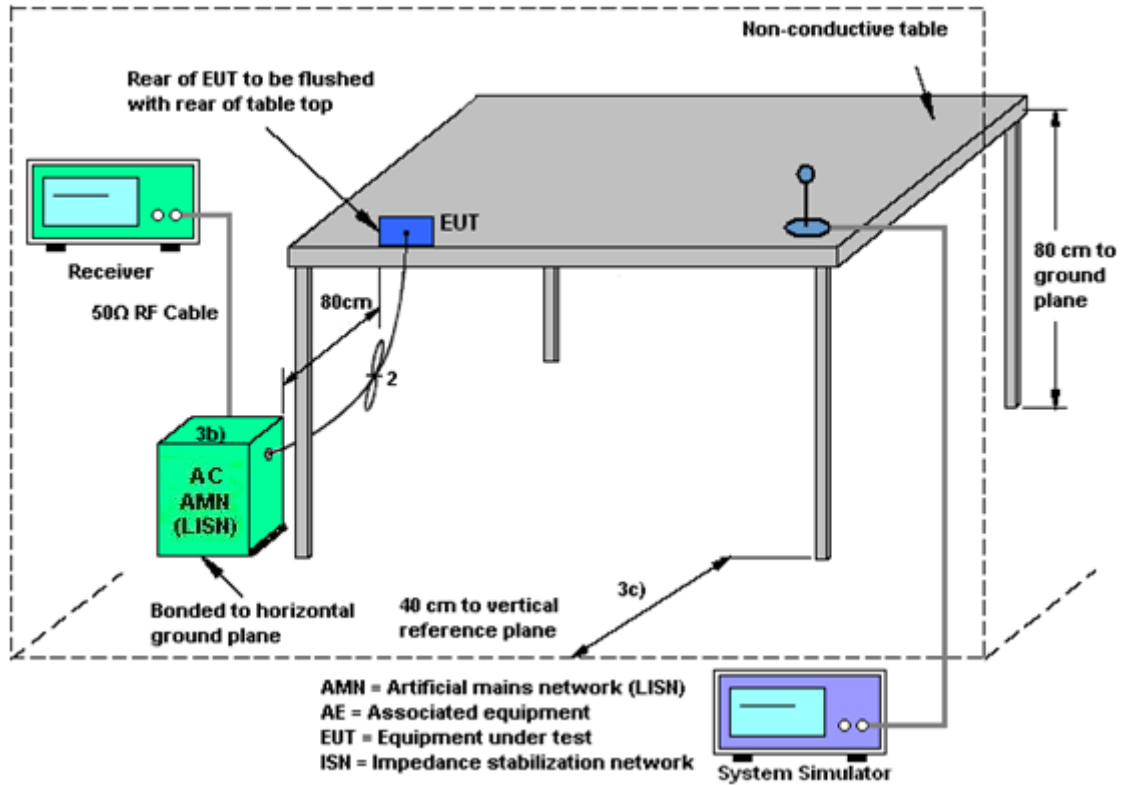

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Jan. 17, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Jan. 17, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Jan. 17, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Oct. 12, 2018	Jan. 25, 2019	Oct. 11, 2019	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz-44GHz	Jun. 25, 2018	Jan. 25, 2019	Jun. 24, 2019	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Jan. 25, 2019	Oct. 18, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 29, 2018	Jan. 25, 2019	Jan. 28, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	Jan. 25, 2019	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Jan. 25, 2019	Feb. 06, 2019	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Jan. 25, 2019	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 08, 2018	Jan. 25, 2019	Feb. 07, 2019	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Jan. 25, 2019	Apr. 16, 2019	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 18, 2018	Jan. 25, 2019	Apr. 17, 2019	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 25, 2019	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 25, 2019	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 25, 2019	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Jan. 15, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Jan. 15, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Jan. 15, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Jan. 15, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Ivan Zhang	Temperature:	21~24	°C
Test Date:	2019/1/17	Relative Humidity:	49~51	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.79	8.05	0.50	Pass
11b	1Mbps	1	6	2437	13.99	8.07	0.50	Pass
11b	1Mbps	1	11	2462	13.99	8.07	0.50	Pass
11g	6Mbps	1	1	2412	17.38	15.86	0.50	Pass
11g	6Mbps	1	6	2437	17.73	15.52	0.50	Pass
11g	6Mbps	1	11	2462	17.78	15.64	0.50	Pass
HT20	MCS0	1	1	2412	18.73	15.94	0.50	Pass
HT20	MCS0	1	6	2437	18.78	16.74	0.50	Pass
HT20	MCS0	1	11	2462	18.88	16.52	0.50	Pass
HT40	MCS0	1	3	2422	36.36	35.12	0.50	Pass
HT40	MCS0	1	6	2437	36.56	35.40	0.50	Pass
HT40	MCS0	1	9	2452	36.56	35.12	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	23.05	30.00	-8.00	15.05	36.00	Pass
11b	1Mbps	1	6	2437	23.30	30.00	-8.00	15.30	36.00	Pass
11b	1Mbps	1	11	2462	22.95	30.00	-8.00	14.95	36.00	Pass
11g	6Mbps	1	1	2412	23.64	30.00	-8.00	15.64	36.00	Pass
11g	6Mbps	1	6	2437	23.79	30.00	-8.00	15.79	36.00	Pass
11g	6Mbps	1	11	2462	23.47	30.00	-8.00	15.47	36.00	Pass
HT20	MCS0	1	1	2412	22.85	30.00	-8.00	14.85	36.00	Pass
HT20	MCS0	1	6	2437	22.81	30.00	-8.00	14.81	36.00	Pass
HT20	MCS0	1	11	2462	22.91	30.00	-8.00	14.91	36.00	Pass
HT40	MCS0	1	3	2422	23.15	30.00	-8.00	15.15	36.00	Pass
HT40	MCS0	1	6	2437	23.18	30.00	-8.00	15.18	36.00	Pass
HT40	MCS0	1	9	2452	23.25	30.00	-8.00	15.25	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	16.88
11b	1Mbps	1	6	2437	0.00	19.91
11b	1Mbps	1	11	2462	0.00	17.98
11g	6Mbps	1	1	2412	0.08	18.98
11g	6Mbps	1	6	2437	0.08	19.18
11g	6Mbps	1	11	2462	0.08	18.92
HT20	MCS0	1	1	2412	0.10	17.85
HT20	MCS0	1	6	2437	0.10	18.05
HT20	MCS0	1	11	2462	0.10	18.08
HT40	MCS0	1	3	2422	0.23	16.74
HT40	MCS0	1	6	2437	0.23	16.75
HT40	MCS0	1	9	2452	0.23	16.82


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-5.60	-8.00	8.00	Pass
11b	1Mbps	1	6	2437	-4.64	-8.00	8.00	Pass
11b	1Mbps	1	11	2462	-6.42	-8.00	8.00	Pass
11g	6Mbps	1	1	2412	-9.63	-8.00	8.00	Pass
11g	6Mbps	1	6	2437	-9.84	-8.00	8.00	Pass
11g	6Mbps	1	11	2462	-8.67	-8.00	8.00	Pass
HT20	MCS0	1	1	2412	-9.20	-8.00	8.00	Pass
HT20	MCS0	1	6	2437	-7.88	-8.00	8.00	Pass
HT20	MCS0	1	11	2462	-9.39	-8.00	8.00	Pass
HT40	MCS0	1	3	2422	-14.09	-8.00	8.00	Pass
HT40	MCS0	1	6	2437	-14.18	-8.00	8.00	Pass
HT40	MCS0	1	9	2452	-11.76	-8.00	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

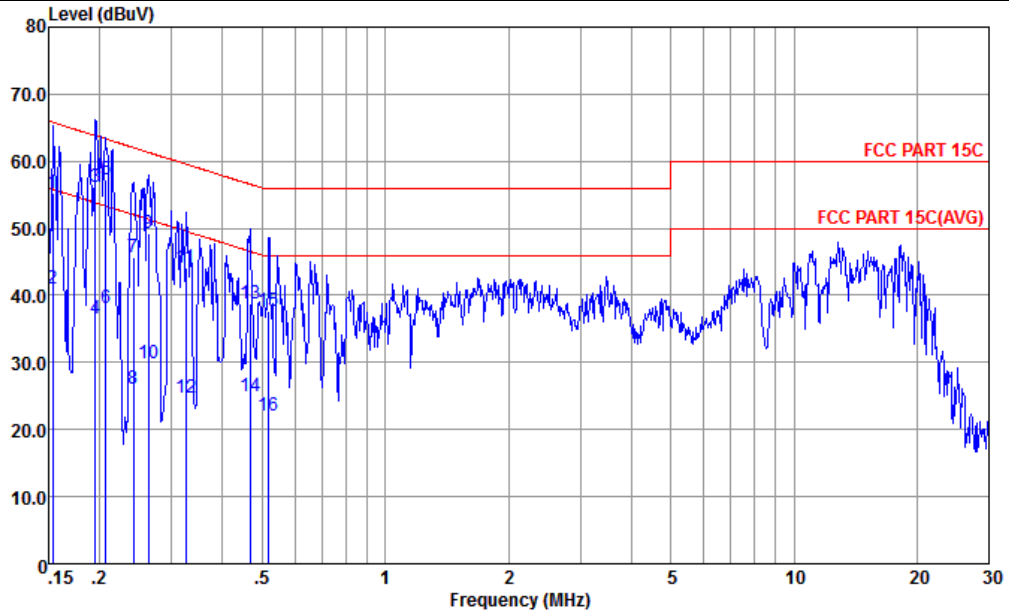


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-181013-060103 LINE
 mode : Mode 1
 : 352156100009624 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	55.30	-10.52	65.82	44.60	0.23	10.47	QP
2	0.153	41.00	-14.82	55.82	30.30	0.23	10.47	Average
3	0.195	56.20	-7.60	63.80	45.61	0.22	10.37	QP
4	0.195	36.50	-17.30	53.80	25.91	0.22	10.37	Average
5 *	0.207	57.18	-6.14	63.32	46.60	0.22	10.36	QP
6	0.207	38.08	-15.24	53.32	27.50	0.22	10.36	Average
7	0.242	45.76	-16.28	62.04	35.20	0.22	10.34	QP
8	0.242	26.06	-25.98	52.04	15.50	0.22	10.34	Average
9	0.263	49.35	-11.99	61.34	38.80	0.22	10.33	QP
10	0.263	29.85	-21.49	51.34	19.30	0.22	10.33	Average
11	0.325	44.02	-15.55	59.57	33.49	0.23	10.30	QP
12	0.325	24.72	-24.85	49.57	14.19	0.23	10.30	Average
13	0.466	38.67	-17.91	56.58	28.20	0.23	10.24	QP
14	0.466	24.97	-21.61	46.58	14.50	0.23	10.24	Average
15	0.518	37.67	-18.33	56.00	27.20	0.23	10.24	QP
16	0.518	21.97	-24.03	46.00	11.50	0.23	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	23.3~24.2°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

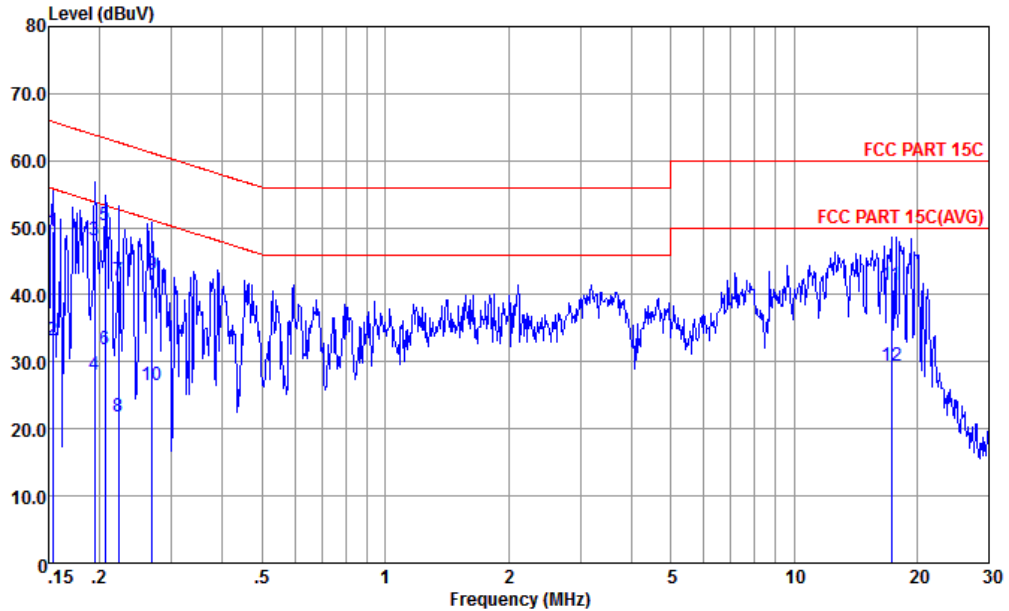

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-181013-060103 NEUTRAL

mode : Mode 1
 : 352156100009624 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	49.58	-16.24	65.82	38.90	0.21	10.47	QP
2	0.153	33.28	-22.54	55.82	22.60	0.21	10.47	Average
3	0.194	48.18	-15.66	63.84	37.61	0.20	10.37	QP
4	0.194	28.08	-25.76	53.84	17.51	0.20	10.37	Average
5 *	0.206	50.46	-12.90	63.36	39.90	0.20	10.36	QP
6	0.206	31.76	-21.60	53.36	21.20	0.20	10.36	Average
7	0.222	42.15	-20.59	62.74	31.60	0.20	10.35	QP
8	0.222	21.75	-30.99	52.74	11.20	0.20	10.35	Average
9	0.269	43.02	-18.14	61.16	32.50	0.20	10.32	QP
10	0.269	26.42	-24.74	51.16	15.90	0.20	10.32	Average
11	17.291	41.35	-18.65	60.00	30.61	0.30	10.44	QP
12	17.291	29.35	-20.65	50.00	18.61	0.30	10.44	Average



Appendix C. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2329.76	46.39	-27.61	74	48.4	25.38	5.55	32.94	100	143	P	H
		2389.95	35.66	-18.34	54	37.46	25.6	5.63	33.03	100	143	A	H
	*	2414	98.77	-	-	100.36	25.79	5.65	33.03	100	143	P	H
	*	2414	93.51	-	-	95.1	25.79	5.65	33.03	100	143	A	H
		2386.83	47.19	-26.81	74	48.96	25.6	5.63	33	310	108	P	V
		2389.95	35.46	-18.54	54	37.26	25.6	5.63	33.03	310	108	A	V
	*	2414	95.87	-	-	97.46	25.79	5.65	33.03	310	108	P	V
	*	2414	92.66	-	-	94.25	25.79	5.65	33.03	310	108	A	V
802.11b CH 11 2462MHz	*	2462	100.92	-	-	101.55	26.34	5.7	32.67	100	66	P	H
	*	2460	95.68	-	-	96.31	26.34	5.7	32.67	100	66	A	H
		2483.62	54.83	-19.17	74	55.07	26.53	5.72	32.49	100	66	P	H
		2487.34	38.05	-15.95	54	38.29	26.53	5.72	32.49	100	66	A	H
	*	2462	97.17	-	-	97.8	26.34	5.7	32.67	392	67	P	V
	*	2464	93.79	-	-	94.42	26.34	5.7	32.67	392	67	A	V
		2483.51	53.2	-20.8	74	53.44	26.53	5.72	32.49	392	67	P	V
		2483.8	38.07	-15.93	54	38.31	26.53	5.72	32.49	392	67	A	V

Remark	1. No other spurious found.
	2. All results are PASS against Peak and Average limit line.



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		4824	43.66	-30.34	74	68.06	30.92	8.43	63.75	150	360	P	H
CH 01		4824	53.1	-20.9	74	77.5	30.92	8.43	63.75	100	37	P	V
2412MHz		4824	50.9	-3.1	54	75.3	30.92	8.43	63.75	100	37	A	V
802.11b		4872	44.13	-29.87	74	68.38	31.05	8.43	63.73	150	360	P	H
		7311	40.47	-33.53	74	59.25	35.52	10.07	64.37	150	360	P	H
CH 06		4872	52.55	-21.45	74	76.8	31.05	8.43	63.73	100	35	P	V
2437MHz		4872	50.72	-3.28	54	74.97	31.05	8.43	63.73	100	35	A	V
		7311	41.15	-32.85	74	59.93	35.52	10.07	64.37	150	0	P	V
802.11b		4926	45.58	-28.42	74	69.67	31.18	8.44	63.71	150	360	P	H
		7386	41.97	-32.03	74	60.51	35.69	10.15	64.38	150	360	P	H
CH 11		4926	52.72	-21.28	74	76.81	31.18	8.44	63.71	100	32	P	V
2462MHz		4926	50.82	-3.18	54	74.91	31.18	8.44	63.71	100	32	A	V
		7386	40.24	-33.76	74	58.78	35.69	10.15	64.38	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.82	49.2	-24.8	74	51	25.6	5.63	33.03	100	128	P	H
		2389.95	38.21	-15.79	54	40.01	25.6	5.63	33.03	100	128	A	H
	*	2416	101.19	-	-	102.6	25.79	5.65	32.85	100	128	P	H
	*	2414	93.03	-	-	94.62	25.79	5.65	33.03	100	128	A	H
		2389.56	49.27	-24.73	74	51.04	25.6	5.63	33	400	360	P	V
		2389.95	37.16	-16.84	54	38.96	25.6	5.63	33.03	400	360	A	V
	*	2414	99.7	-	-	101.29	25.79	5.65	33.03	400	360	P	V
	*	2414	92.08	-	-	93.67	25.79	5.65	33.03	400	360	A	V
802.11g CH 11 2462MHz	*	2460	103.04	-	-	103.67	26.34	5.7	32.67	100	337	P	H
	*	2462	95	-	-	95.63	26.34	5.7	32.67	100	337	A	H
		2483.8	53.44	-20.56	74	53.68	26.53	5.72	32.49	100	337	P	H
		2483.5	42.38	-11.62	54	42.62	26.53	5.72	32.49	100	337	A	H
	*	2462	98.5	-	-	99.13	26.34	5.7	32.67	306	275	P	V
	*	2462	89.96	-	-	90.59	26.34	5.7	32.67	306	275	A	V
		2483.8	51.07	-22.93	74	51.31	26.53	5.72	32.49	306	275	P	V
		2483.5	39.54	-14.46	54	39.78	26.53	5.72	32.49	306	275	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains test results for channels 01, 06, and 11 across various frequencies and levels.



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.82	49.08	-24.92	74	50.88	25.6	5.63	33.03	100	242	P	H
		2389.95	39.28	-14.72	54	41.08	25.6	5.63	33.03	100	242	A	H
	*	2412	102.03	-	-	103.62	25.79	5.65	33.03	100	242	P	H
	*	2414	94.22	-	-	95.81	25.79	5.65	33.03	100	242	A	H
		2389.95	54	-20	74	55.8	25.6	5.63	33.03	356	284	P	V
		2389.95	37.17	-16.83	54	38.97	25.6	5.63	33.03	356	284	A	V
	*	2410	99.18	-	-	100.77	25.79	5.65	33.03	356	284	P	V
	*	2414	90.45	-	-	92.04	25.79	5.65	33.03	356	284	A	V
802.11n HT20 CH 11 2462MHz		2464	99.55	-	-	100.18	26.34	5.7	32.67	100	331	P	H
		2462	92.44	-	-	93.07	26.34	5.7	32.67	100	331	A	H
		2483.68	52.17	-21.83	74	52.41	26.53	5.72	32.49	100	331	P	H
		2483.5	43.38	-10.62	54	43.62	26.53	5.72	32.49	100	331	A	H
		* 2462	97.87	-	-	98.5	26.34	5.7	32.67	300	279	P	V
		* 2462	88.61	-	-	89.24	26.34	5.7	32.67	300	279	A	V
			2483.68	49.13	-24.87	74	49.37	26.53	5.72	32.49	300	279	P
		2483.62	39.7	-14.3	54	39.94	26.53	5.72	32.49	300	279	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 13 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains test results for 802.11n HT20 channels at 4824, 4872, 4926 MHz.



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.69	60.68	-13.32	74	62.45	25.6	5.63	33	193	118	P	H
		2389.95	40.43	-13.57	54	42.23	25.6	5.63	33.03	193	118	A	H
	*	2426	98.25	-	-	99.46	25.97	5.67	32.85	193	118	P	H
	*	2424	90.02	-	-	91.23	25.97	5.67	32.85	193	118	A	H
		2483.56	62.64	-11.36	74	62.88	26.53	5.72	32.49	193	118	P	H
		2483.98	42.38	-11.62	54	42.62	26.53	5.72	32.49	193	118	A	H
		2389.69	58.2	-15.8	74	59.97	25.6	5.63	33	400	360	P	V
		2389.95	39.14	-14.86	54	40.94	25.6	5.63	33.03	400	360	A	V
	*	2426	95.44	-	-	96.65	25.97	5.67	32.85	400	360	P	V
	*	2424	87.75	-	-	88.96	25.97	5.67	32.85	400	360	A	V
	2483.5	58.94	-15.06	74	59.18	26.53	5.72	32.49	400	360	P	V	
	2483.8	39.12	-14.88	54	39.36	26.53	5.72	32.49	400	360	A	V	
802.11n HT40 CH 09 2452MHz		2389.95	58.68	-15.32	74	60.48	25.6	5.63	33.03	100	109	P	H
		2389.95	38.99	-15.01	54	40.79	25.6	5.63	33.03	100	109	A	H
	*	2450	98.38	-	-	99.21	26.16	5.68	32.67	100	109	P	H
	*	2450	90.57	-	-	91.4	26.16	5.68	32.67	100	109	A	H
		2483.92	65.91	-8.09	74	66.15	26.53	5.72	32.49	100	109	P	H
		2483.62	46.3	-7.7	54	46.54	26.53	5.72	32.49	100	109	A	H
		2389.69	53.88	-20.12	74	55.65	25.6	5.63	33	391	101	P	V
		2389.95	36.68	-17.32	54	38.48	25.6	5.63	33.03	391	101	A	V
	*	2456	97.54	-	-	98.17	26.34	5.7	32.67	391	101	P	V
	*	2456	89.4	-	-	90.03	26.34	5.7	32.67	391	101	A	V
	2483.56	64.26	-9.74	74	64.5	26.53	5.72	32.49	391	101	P	V	
	2483.51	46.75	-7.25	54	46.99	26.53	5.72	32.49	391	101	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 13 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains multiple rows of test data for different channels and frequencies.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



15C Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		30	19.59	-20.41	40	26.46	24.5	0.61	31.98	100	0	P	H
		88.2	17.81	-25.69	43.5	34.08	14.68	0.97	31.92	-	-	P	H
		128.94	19.38	-24.12	43.5	32.48	17.69	1.15	31.94	-	-	P	H
		259.89	16.3	-29.7	46	27.23	19.3	1.75	31.98	-	-	P	H
		765.26	24	-22	46	28.05	25.38	2.78	32.21	-	-	P	H
		840.92	24.31	-21.69	46	27.18	26.04	2.94	31.85	-	-	P	H
		30	19.93	-20.07	40	26.8	24.5	0.61	31.98	100	0	P	V
		114.39	14.62	-28.88	43.5	27.67	17.79	1.09	31.93	-	-	P	V
		305.48	16.57	-29.43	46	27.6	19.15	1.83	32.01	-	-	P	V
		573.2	21.23	-24.77	46	27.07	24	2.53	32.37	-	-	P	V
		829.28	24.1	-21.9	46	27.14	25.97	2.92	31.93	-	-	P	V
		944.71	25.15	-28.85	54	26.2	26.89	3.1	31.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.28	-	-	10Hz
802.11n HT20	97.79	1.920	0.521	0.56KHz
802.11n HT40	94.93	0.949	1.053	1.1KHz

802.11b

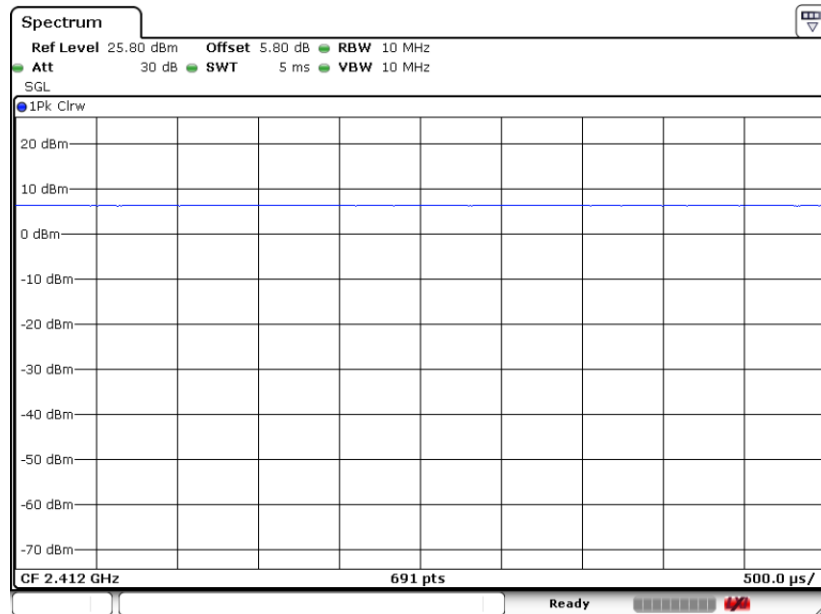




802.11g

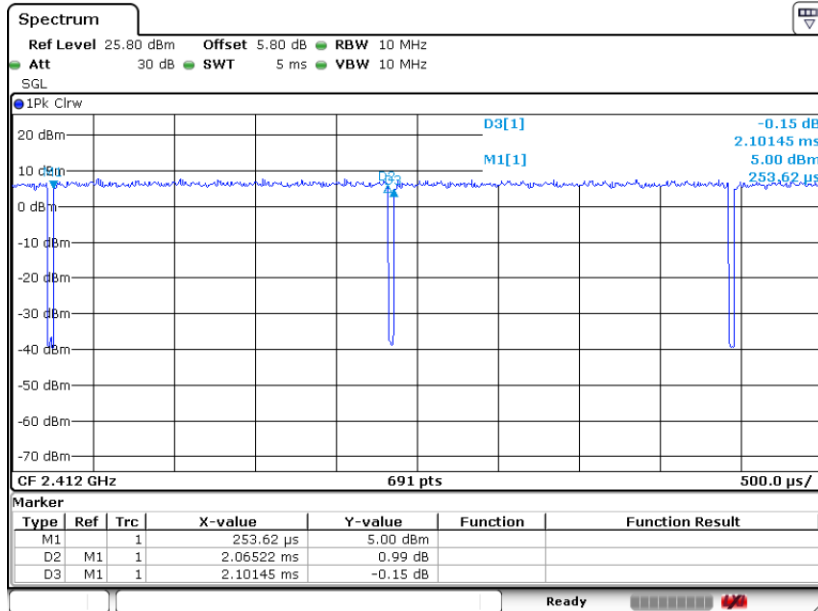

802.11n20

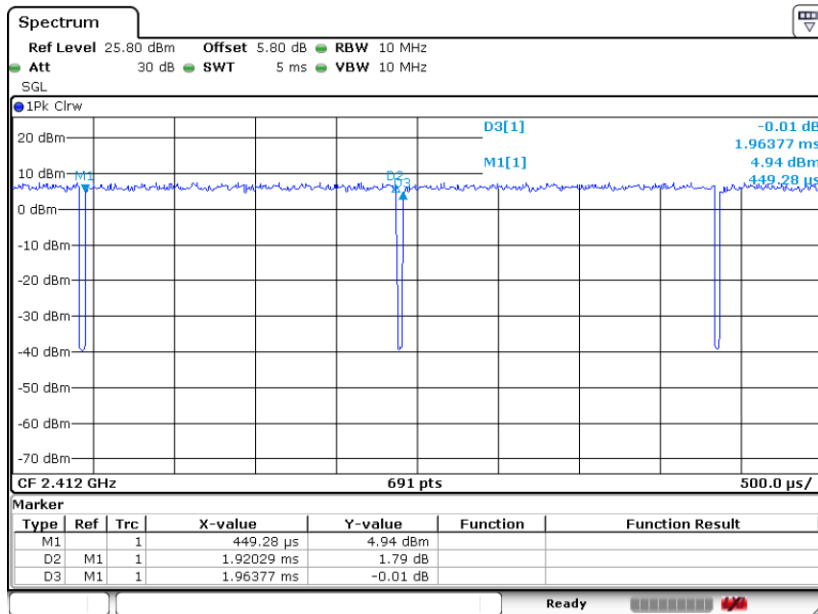



802.11n40

