



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1970-1, XT1970-2
FCC ID : IHDT56XT1
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Dec. 22, 2018 and testing was completed on Jan. 18, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY3

SUMMARY OF TEST RESULT4

1. GENERAL DESCRIPTION.....5

 1.1. Applicant5

 1.2. Manufacturer5

 1.3. Product Feature of Equipment Under Test5

 1.4. Product Specification of Equipment Under Test6

 1.5. Modification of EUT.....7

 1.6. Specification of Accessory7

 1.7. Test Location.....9

 1.8. Applicable Standards9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 12

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 20

4. LIST OF MEASURING EQUIPMENT 25

5. UNCERTAINTY OF EVALUATION..... 26

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.39 dB at 0.162 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.11 dB at 37.760 MHz for peak



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1970-1, XT1970-2
FCC ID	IHDT56XT1
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC/GNSS/FM Receiver
IMEI Code	Conduction: Sample 1: 352170100023196/352170100023204 Radiation: Sample 1: 352170100023279/35217010002327901 Sample 2: 352171100002792
HW Version	DVT2
SW Version	PSA29.76
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1(model name XT1970-1) is dual SIM slot, sample 2(model name XT1970-2) is single SIM slot. According to the difference, we choose sample 1 to perform full test for conduction and radiation, sample 2 to verify the worst case of sample 1 for radiation.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 66 : 2110.7 MHz~ 2199.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz NFC : 13.56 MHz FM: 88 MHz - 108 MHz
Antenna Type	WWAN : Fixed Internal Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC : Coil Antenna FM : External Handset Antenna



Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM(16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM
---------------------------	---

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Salom)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(EU)	Brand Name	Motorola (Salom)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(UK)	Brand Name	Motorola (Salom)	Model Name	SC-53
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(IN)	Brand Name	Motorola (Salom)	Model Name	SC-54
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(AU)	Brand Name	Motorola (Salom)	Model Name	SC-55
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(AR)	Brand Name	Motorola (Salom)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(BR)	Brand Name	Motorola (Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 1(PRC)	Brand Name	Motorola (Salom)	Model Name	SC-58
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		



AC Adapter 1 (Chile)	Brand Name	Motorola (Salom)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2(US)	Brand Name	Motorola (Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2(EU)	Brand Name	Motorola (Chenyang)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2(UK)	Brand Name	Motorola (Chenyang)	Model Name	SC-53
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2(AU)	Brand Name	Motorola (Chenyang)	Model Name	SC-55
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2(AR)	Brand Name	Motorola (Chenyang)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2(PRC)	Brand Name	Motorola (Chenyang)	Model Name	SC-58
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 3(BR)	Brand Name	Motorola (Salom/Flex)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 4(BR)	Brand Name	Motorola (Tenpao/Cliptech)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
Battery	Brand Name	Motorola (ATL)	Model Name	KR40
	Power Rating	3.8Vdc,3500mAh	Type	Li-ion, Polymer
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	SH38C37773
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core		
Earphone 2	Brand Name	Motorola (jiahe)	Model Name	SH38C44959
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core		
USB Cable 1	Brand Name	Motorola (LiQi)	Model Name	L32B-053000100/L32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	S32B-053000100/S32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



1.7. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN5013	630927

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Test Items	Function Type
AC Conducted Emission	Mode 1 : GSM850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + Earphone 1 for Sample 1
	Mode 2 : GSM1900 Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable 2(Charging from Adapter 2) + Earphone 2 for Sample 1
	Mode 3 : WCDMA Band V Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4+ USB Cable 2(Charging from Adapter 3) + Earphone 2 for Sample 1
	Mode 4 : LTE Band 4 RX(Middle) + Bluetooth Idle + WLAN (5G) Idle + NFC On + USB Cable 2(Charging from Adapter 4) + Earphone 2 for Sample 1
	Mode 5 : LTE Band 7 Rx + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98MHz) + USB Cable 2(Charging from Adapter 4) + Earphone 2 for Sample 1
	Mode 6 : LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + USB Cable 1(Data Link with Notebook) + Earphone 2 for Sample 1
	Mode 7 : LTE Band 17 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + USB Cable 2(Data Link with Notebook) + Earphone 2 for Sample 1
	Mode 8 : LTE Band 4 RX(Middle) + Bluetooth Idle + WLAN (5G) Idle + NFC On + USB Cable 3(Charging from Adapter 4) + Earphone 2 for Sample 1

Radiated Emissions	<p>Mode 1 : GSM850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + Earphone 1 for Sample 1</p> <p>Mode 2 : GSM1900 Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable 2(Charging from Adapter 2) + Earphone 2 for Sample 1</p> <p>Mode 3 : WCDMA Band V Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4+ USB Cable 1(Charging from Adapter 3) + Earphone 1 for Sample 1</p> <p>Mode 4 : LTE Band 4 RX(Middle) + Bluetooth Idle + WLAN (5G) Idle + NFC On + USB Cable 1(Charging from Adapter 4) + Earphone 1 for Sample 1</p> <p>Mode 5 : LTE Band 7 Rx + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98MHz) + USB Cable 1(Charging from Adapter 4) + Earphone 1 for Sample 1</p> <p>Mode 6 : LTE Band 12 Rx((Middle) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + USB Cable 1(Data Link with Notebook) + Earphone 1 for Sample 1</p> <p>Mode 7 : LTE Band 17 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + USB Cable 2(Data Link with Notebook) + Earphone 1 for Sample 1</p> <p>Mode 8 : LTE Band 12 Rx((Middle) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + USB Cable 1(Data Link with Notebook) + Earphone 1 for Sample 2</p> <p>Mode 9 : LTE Band 12 Rx((Middle) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + USB Cable 3(Data Link with Notebook) + Earphone 1 for Sample 1</p>
--------------------	---

Remark:

1. The worst case of AC is mode 4; only the test data of this mode is reported.
2. The worst case of RE is mode 6; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. GNSS Rx = BDS + GLONASS + GPS
5. Pre-scanned Low/Middle/High channel for GSM/WCDMA/LTE Band 12/17, FM Rx. the worst channel was recorded in this report.

2.2. Connection Diagram of Test System

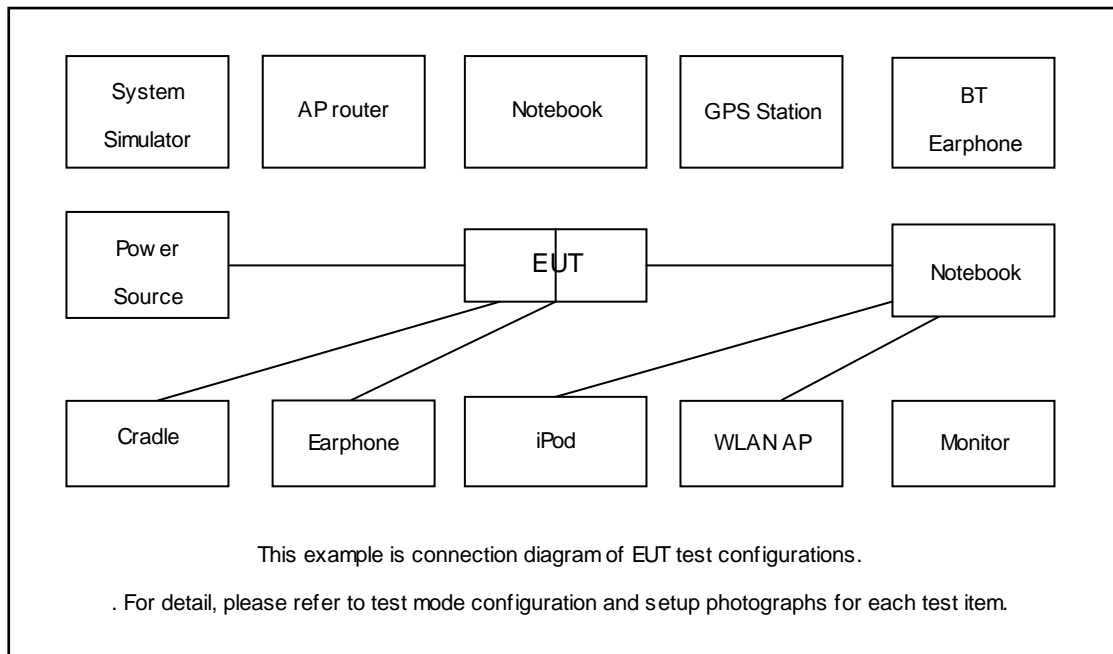

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded,1.8m
3.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
4.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
5.	WLAN AP	TP-LINK	TL-WDR5600	N/A	N/A	Unshielded,1.8m
6.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
7.	Bluetooth Earphone	Lenovo	LBH301	N/A	N/A	N/A
8.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Notebook	DELL	MT320	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	SD Card	Kingston	8GB	N/A	N/A	N/A
11.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
12.	Hard Disk	Lenovo	F310	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on camera to capture images.
4. Turn on MPEG4 function.
5. Turn on FM receiver function to make the EUT receive continuous signals from FM station
6. Turn on NFC function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

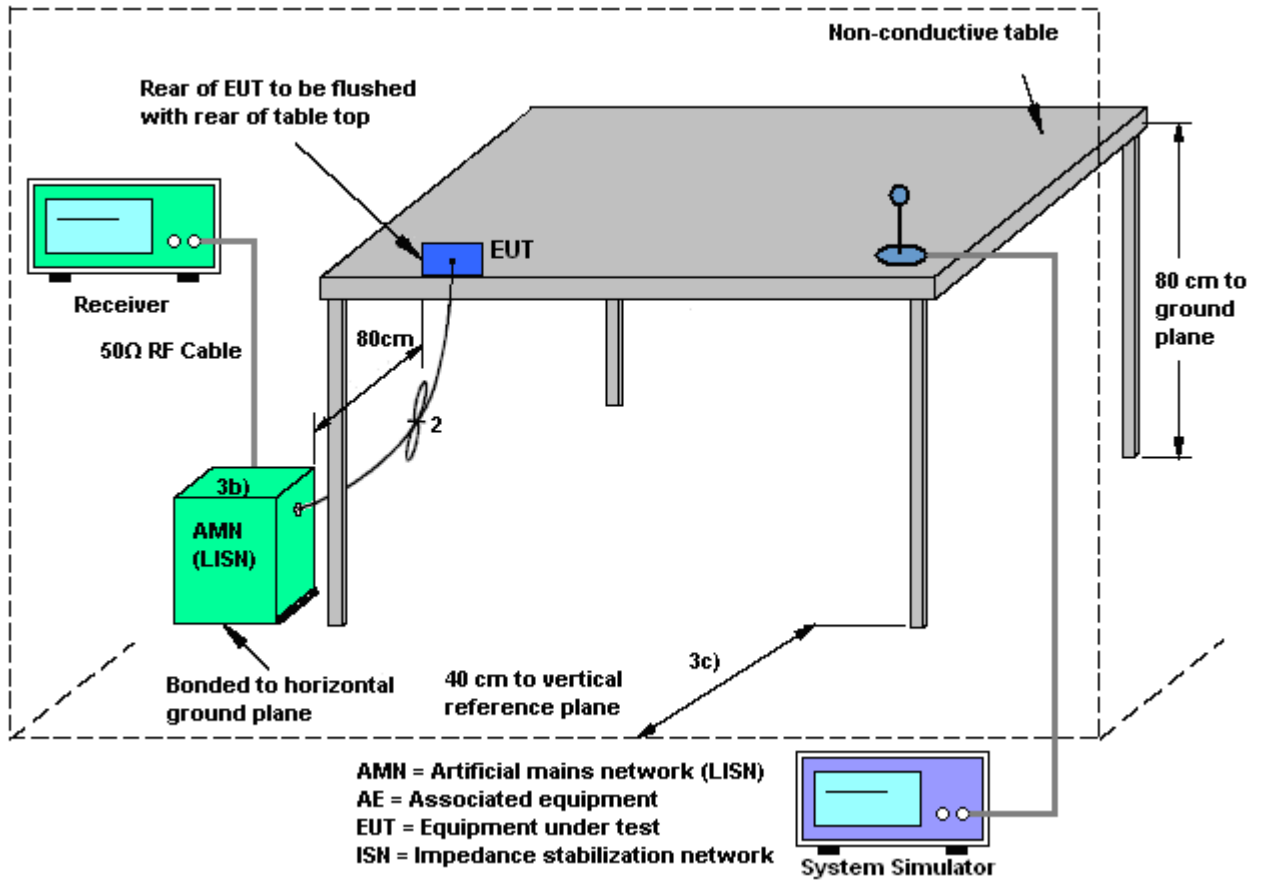



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

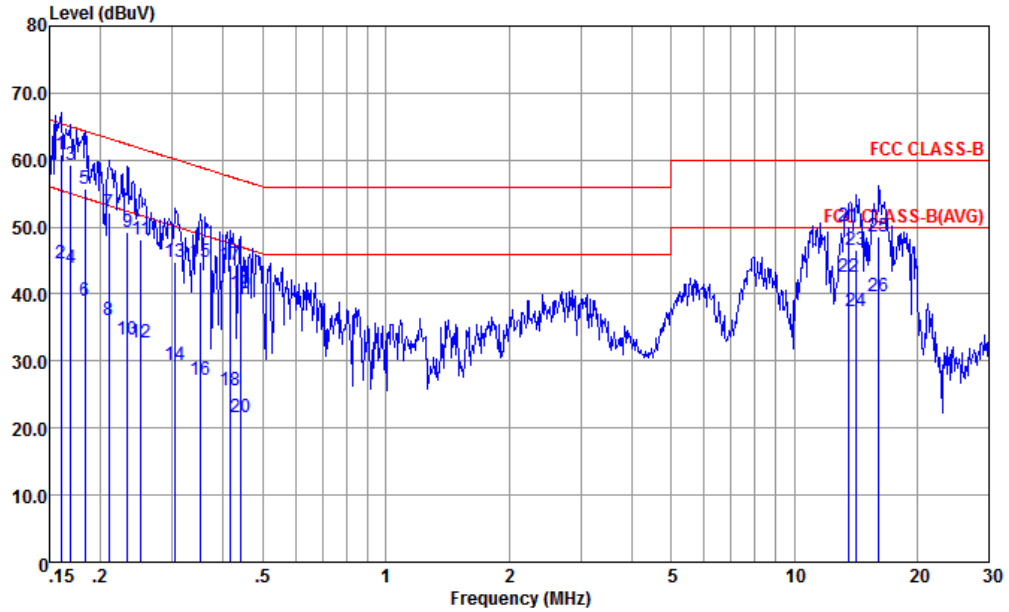


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-181013-060103 LINE
 Project : (FC) 8D2002
 mode : Mode 4
 : 352170100023196/352170100023204 #12

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.160	60.88	-4.59	65.47	50.20	0.23	10.45	QP
2	0.160	44.58	-10.89	55.47	33.90	0.23	10.45	Average
3	0.169	59.26	-5.73	64.99	48.60	0.23	10.43	QP
4	0.169	43.86	-11.13	54.99	33.20	0.23	10.43	Average
5	0.183	55.82	-8.51	64.33	45.20	0.22	10.40	QP
6	0.183	38.92	-15.41	54.33	28.30	0.22	10.40	Average
7	0.209	52.08	-11.15	63.23	41.50	0.22	10.36	QP
8	0.209	36.18	-17.05	53.23	25.60	0.22	10.36	Average
9	0.233	49.16	-13.19	62.35	38.60	0.22	10.34	QP
10	0.233	33.16	-19.19	52.35	22.60	0.22	10.34	Average
11	0.251	48.06	-13.67	61.73	37.51	0.22	10.33	QP
12	0.251	32.76	-18.97	51.73	22.21	0.22	10.33	Average
13	0.305	44.73	-15.37	60.10	34.20	0.22	10.31	QP
14	0.305	29.43	-20.67	50.10	18.90	0.22	10.31	Average
15	0.350	44.71	-14.25	58.96	34.19	0.23	10.29	QP
16	0.350	27.11	-21.85	48.96	16.59	0.23	10.29	Average
17	0.417	44.39	-13.12	57.51	33.90	0.23	10.26	QP



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	#21 and #22 are the NFC RF fundamental signals which can be ignore		

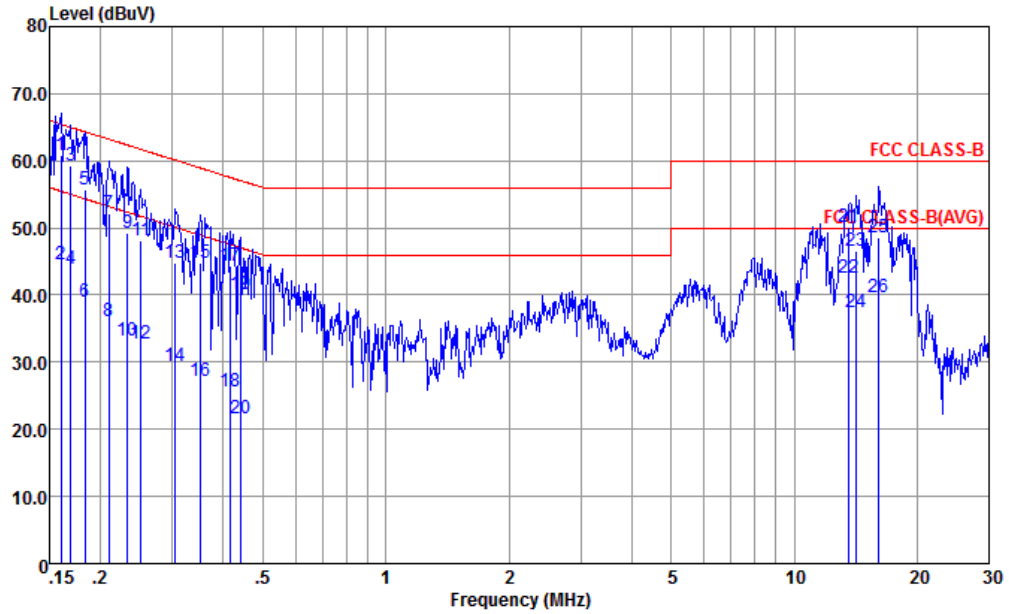


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-181013-060103 LINE
 Project : (FC) 8D2002
 mode : Mode 4
 : 352170100023196/352170100023204 #12

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	0.417	25.69	-21.82	47.51	15.20	0.23	10.26 Average
19	0.440	40.08	-16.99	57.07	29.60	0.23	10.25 QP
20	0.440	21.68	-25.39	47.07	11.20	0.23	10.25 Average
21	13.560	50.21		39.50	0.33	10.38	QP
22	13.560	42.61		31.90	0.33	10.38	Average
23	14.138	46.63	-13.37	60.00	35.90	0.34	10.39 QP
24	14.138	37.33	-12.67	50.00	26.60	0.34	10.39 Average
25	16.140	48.62	-11.38	60.00	37.80	0.40	10.42 QP
26	16.140	39.72	-10.28	50.00	28.90	0.40	10.42 Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

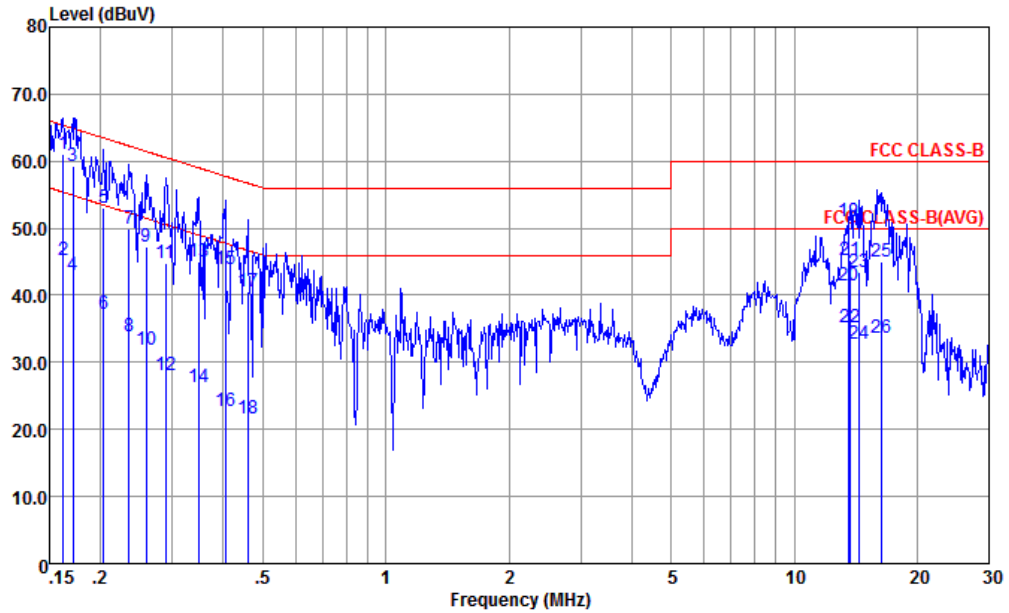


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-181013-060103 NEUTRAL
 Project : (FC) 8D2002
 mode : Mode 4
 : 352170100023196/352170100023204 #12

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	Remark
1 *	0.162	60.95	-4.39	65.34	50.29	0.21	10.45	QP
2	0.162	45.15	-10.19	55.34	34.49	0.21	10.45	Average
3	0.171	59.23	-5.67	64.90	48.59	0.21	10.43	QP
4	0.171	42.93	-11.97	54.90	32.29	0.21	10.43	Average
5	0.204	53.06	-10.39	63.45	42.50	0.20	10.36	QP
6	0.204	37.16	-16.29	53.45	26.60	0.20	10.36	Average
7	0.235	49.84	-12.42	62.26	39.30	0.20	10.34	QP
8	0.235	33.84	-18.42	52.26	23.30	0.20	10.34	Average
9	0.259	47.33	-14.14	61.47	36.80	0.20	10.33	QP
10	0.259	31.83	-19.64	51.47	21.30	0.20	10.33	Average
11	0.289	44.71	-15.83	60.54	34.20	0.20	10.31	QP
12	0.289	28.01	-22.53	50.54	17.50	0.20	10.31	Average
13	0.348	45.08	-13.92	59.00	34.60	0.19	10.29	QP
14	0.348	26.38	-22.62	49.00	15.90	0.19	10.29	Average
15	0.404	43.96	-13.81	57.77	33.51	0.19	10.26	QP
16	0.404	22.82	-24.95	47.77	12.37	0.19	10.26	Average
17	0.459	40.64	-16.07	56.71	30.20	0.19	10.25	QP



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	#19 and #20 are the NFC RF fundamental signals which can be ignore		

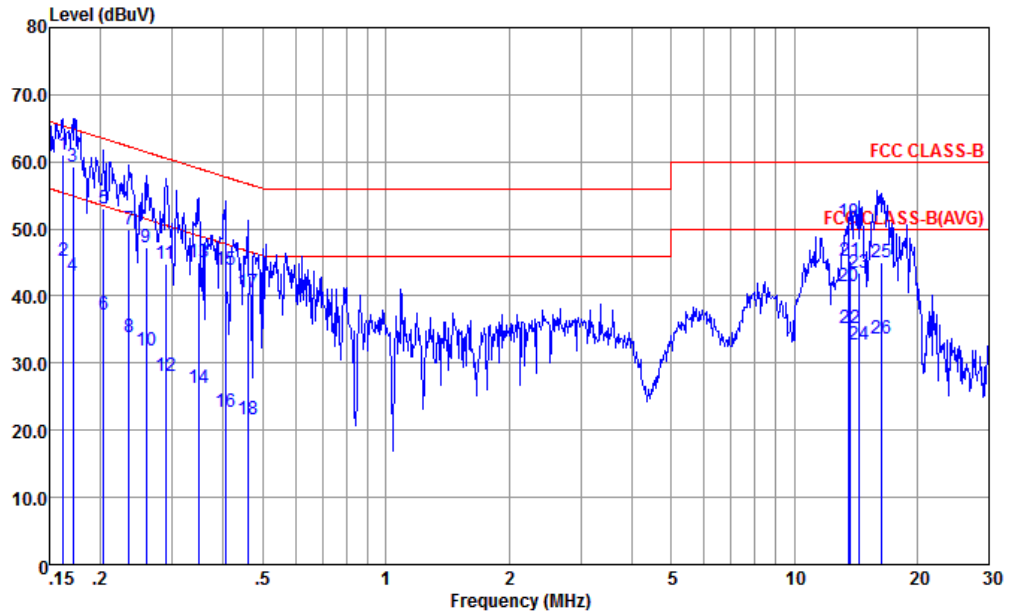

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-181013-060103 NEUTRAL
 Project : (FC) 8D2002
 mode : Mode 4
 : 352170100023196/352170100023204 #12

Freq	Level	Over Limit	Limit	Read	LISN	Cable	Loss	Remark
MHz	dBuV		dB	dBuV	dB	dB	dB	
18	0.459	21.64	-25.07	46.71	11.20	0.19	10.25	Average
19	13.560	51.14		40.50	0.26	10.38		QP
20	13.560	41.54		30.90	0.26	10.38		Average
21	13.695	45.14	-14.86	60.00	34.50	0.26	10.38	QP
22	13.695	35.14	-14.86	50.00	24.50	0.26	10.38	Average
23	14.364	43.56	-16.44	60.00	32.90	0.27	10.39	QP
24	14.364	32.86	-17.14	50.00	22.20	0.27	10.39	Average
25	16.398	45.02	-14.98	60.00	34.29	0.30	10.43	QP
26	16.398	33.62	-16.38	50.00	22.89	0.30	10.43	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

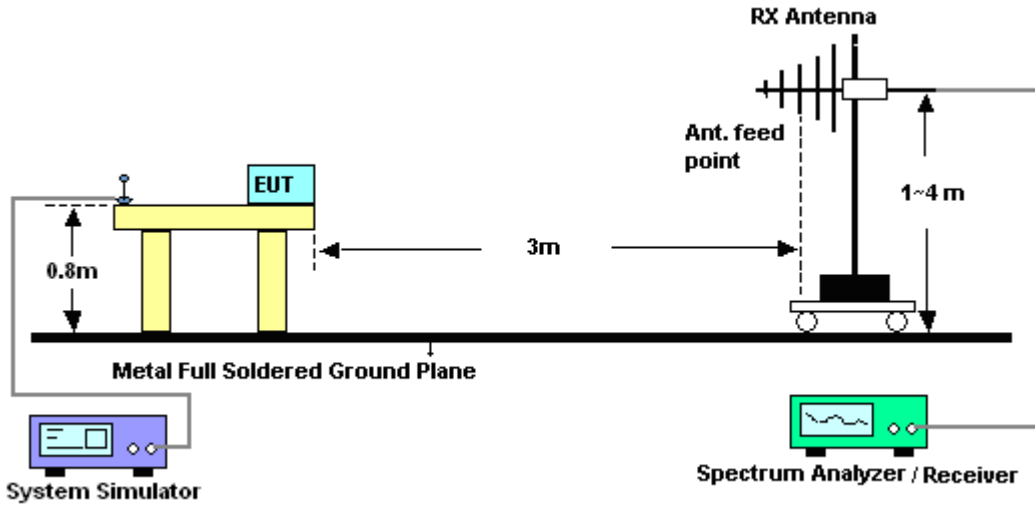


For radiated emissions above 1GHz

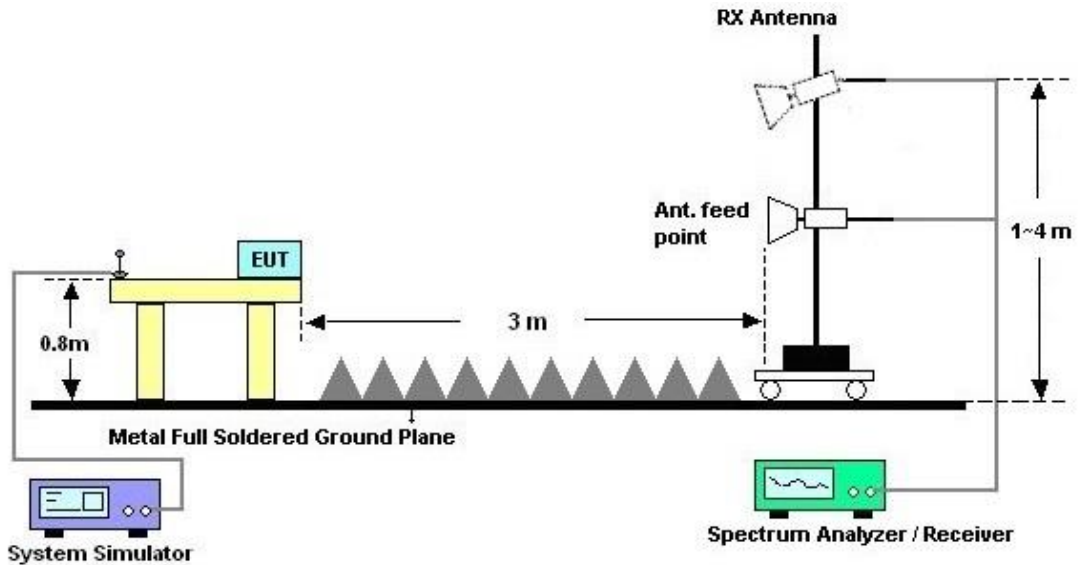



3.2.5. Test Result of Radiated Emission

Test Engineer :	IMP Xu	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

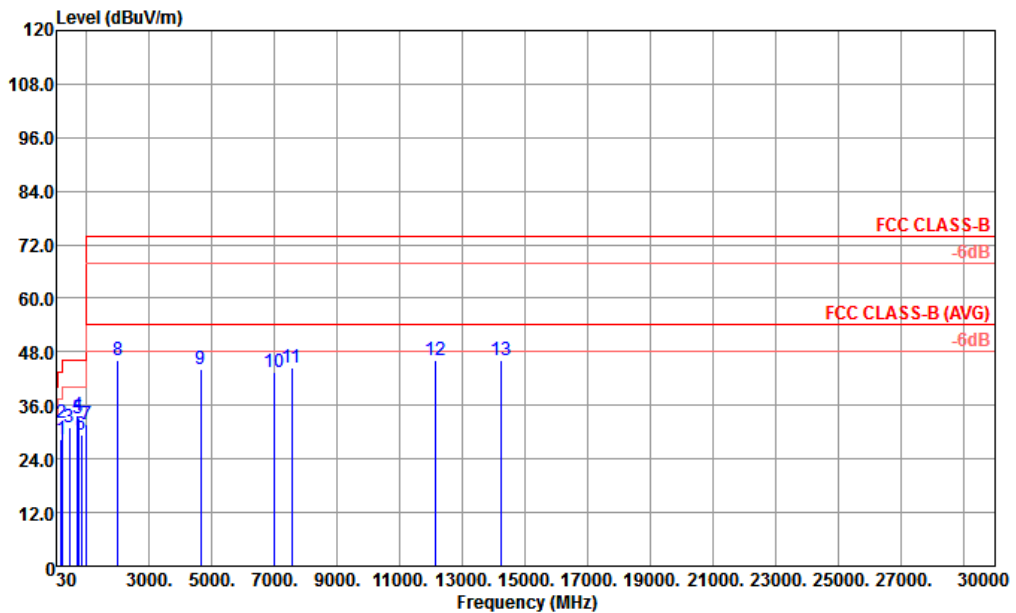


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49922-3M HORIZONTAL
 Project : (FC)8D2002
 Mode : 6
 IMEI : 352170100023279/35217010002327901 #11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	187.14	28.56	-14.94	43.50	43.85	15.23	1.39	31.91	---	---	Peak
2	214.30	32.06	-11.44	43.50	47.29	15.16	1.53	31.92	100	0	Peak
3	450.98	31.08	-14.92	46.00	38.75	22.42	2.13	32.22	---	---	Peak
4	714.82	33.83	-12.17	46.00	38.70	24.77	2.67	32.31	---	---	Peak
5	737.13	33.22			37.74	25.04	2.71	32.27	---	---	Peak
6	828.31	29.58	-16.42	46.00	32.62	25.97	2.92	31.93	---	---	Peak
7	996.12	31.60	-22.40	54.00	31.51	27.46	3.19	30.56	---	---	Peak
8	2000.00	46.19	-27.81	74.00	48.08	30.30	4.55	36.74	---	---	Peak
9	4632.00	44.11	-29.89	74.00	37.26	35.79	7.87	36.81	---	---	Peak
10	6968.00	43.47	-30.53	74.00	35.52	35.61	9.11	36.77	---	---	Peak
11	7536.00	44.37	-29.63	74.00	36.14	35.97	9.30	37.04	---	---	Peak
12	12114.00	46.23	-27.77	74.00	30.30	39.78	11.90	35.75	---	---	Peak
13	14238.00	46.16	-27.84	74.00	28.70	40.61	12.74	35.89	---	---	Peak



Test Engineer :	IMP Xu	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

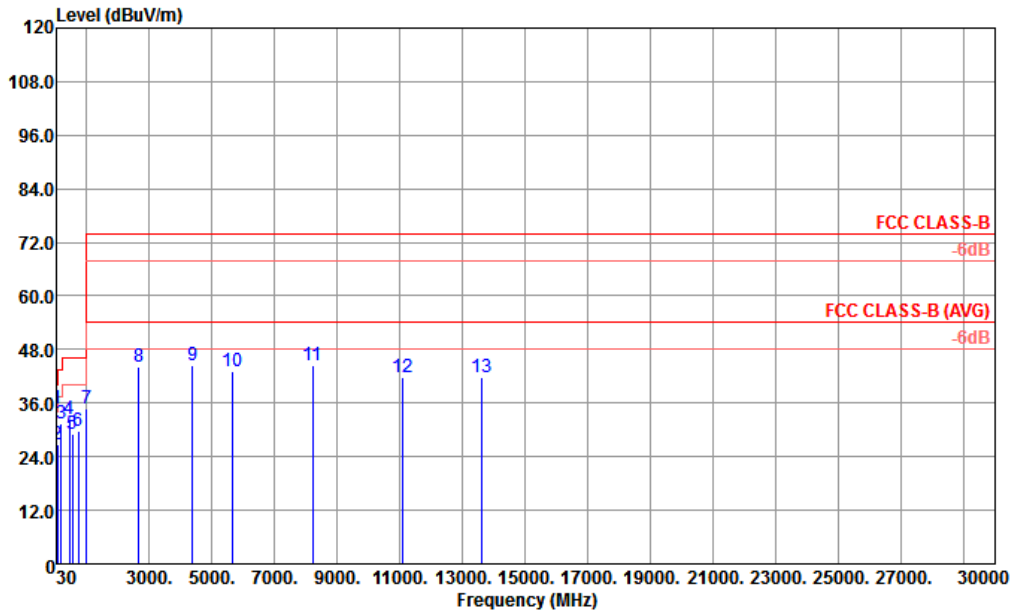

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49922-3M VERTICAL
 Project : (FC)8D2002
 Mode : 6
 IMEI : 352170100023279/35217010002327901 #11

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 !	37.76	34.89	-5.11	40.00	46.27	19.94	0.64	31.96	100	0 Peak
2	75.59	26.82	-13.18	40.00	45.00	12.82	0.91	31.91	---	---
3	185.20	31.52	-11.98	43.50	46.82	15.23	1.38	31.91	---	---
4	451.95	32.29	-13.71	46.00	39.95	22.43	2.13	32.22	---	---
5	532.46	29.18	-16.82	46.00	35.51	23.55	2.43	32.31	---	---
6	737.13	29.73	-	-	34.25	25.04	2.71	32.27	---	---
7	1000.00	34.83	-19.17	54.00	34.65	27.50	3.20	30.52	---	---
8	2664.00	44.28	-29.72	74.00	43.95	31.76	5.38	36.81	---	---
9	4384.00	44.46	-29.54	74.00	38.48	35.72	7.11	36.85	---	---
10	5672.00	43.04	-30.96	74.00	36.63	34.97	8.16	36.72	---	---
11	8216.00	44.33	-29.67	74.00	36.56	35.29	9.77	37.29	---	---
12	11070.00	41.81	-32.19	74.00	29.04	38.98	11.43	37.64	---	---
13	13599.00	41.63	-32.37	74.00	24.57	39.68	12.65	35.27	---	---



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCi7	100768	9kHz~7GHz;	Apr. 19, 2018	Jan. 18, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Jan. 18, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 22, 2018	Jan. 18, 2019	Nov. 21, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Jan. 18, 2019	Oct. 11, 2019	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Aug. 08, 2018	Jan. 07, 2019	Aug. 07, 2019	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44G,MAX 30dB	Oct. 10, 2018	Jan. 07, 2019	Oct. 09, 2019	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~2GHz	Jan. 29, 2018	Jan. 07, 2019	Jan. 28, 2019	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 21, 2018	Jan. 07, 2019	Jan. 20, 2019	Radiation (03CH02-KS)
SHF-EHF Horn	Schw arzbeck	BBHA 9170	BBHA 170249	15GHz~40GHz	Feb. 07, 2018	Jan. 07, 2019	Feb. 06, 2019	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 06, 2018	Jan. 07, 2019	Aug. 05, 2019	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 18, 2018	Jan. 07, 2019	Apr. 17, 2019	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 08, 2018	Jan. 07, 2019	Feb. 07, 2019	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 07, 2019	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 07, 2019	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 07, 2019	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------