

#01_HAC_E_GSM850_GSM Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 83.69 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 39.53 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 38.6 dBV/m	Grid 2 M4 39.53 dBV/m	Grid 3 M4 39.45 dBV/m
Grid 4 M4 38.31 dBV/m	Grid 5 M4 39.45 dBV/m	Grid 6 M4 39.36 dBV/m
Grid 7 M4 38.01 dBV/m	Grid 8 M4 39.04 dBV/m	Grid 9 M4 38.9 dBV/m

Cursor:

Total = 39.53 dBV/m

E Category: M4

Location: -4.5, -19.5, 8.7 mm

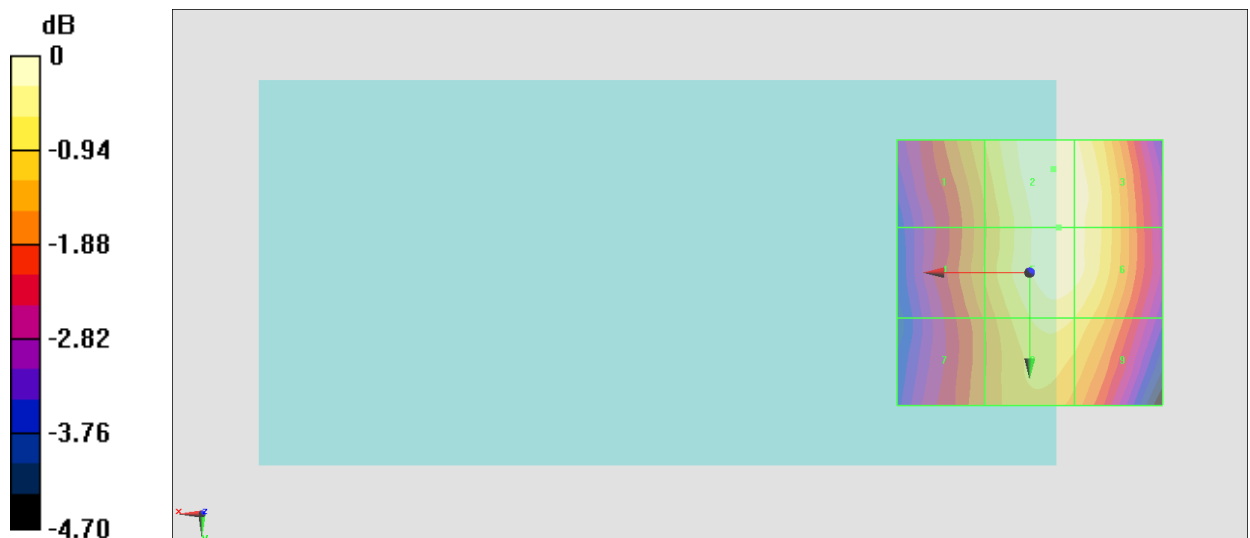

0 dB = 94.78 V/m = 39.53 dBV/m

#02_HAC_E_GSM850_GSM Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 91.22 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.52 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M4 39.46 dBV/m	Grid 2 M3 40.52 dBV/m	Grid 3 M3 40.43 dBV/m
Grid 4 M4 39.06 dBV/m	Grid 5 M3 40.33 dBV/m	Grid 6 M3 40.3 dBV/m
Grid 7 M4 38.7 dBV/m	Grid 8 M4 39.71 dBV/m	Grid 9 M4 39.62 dBV/m

Cursor:

Total = 40.52 dBV/m

E Category: M3

Location: -4.5, -22, 8.7 mm

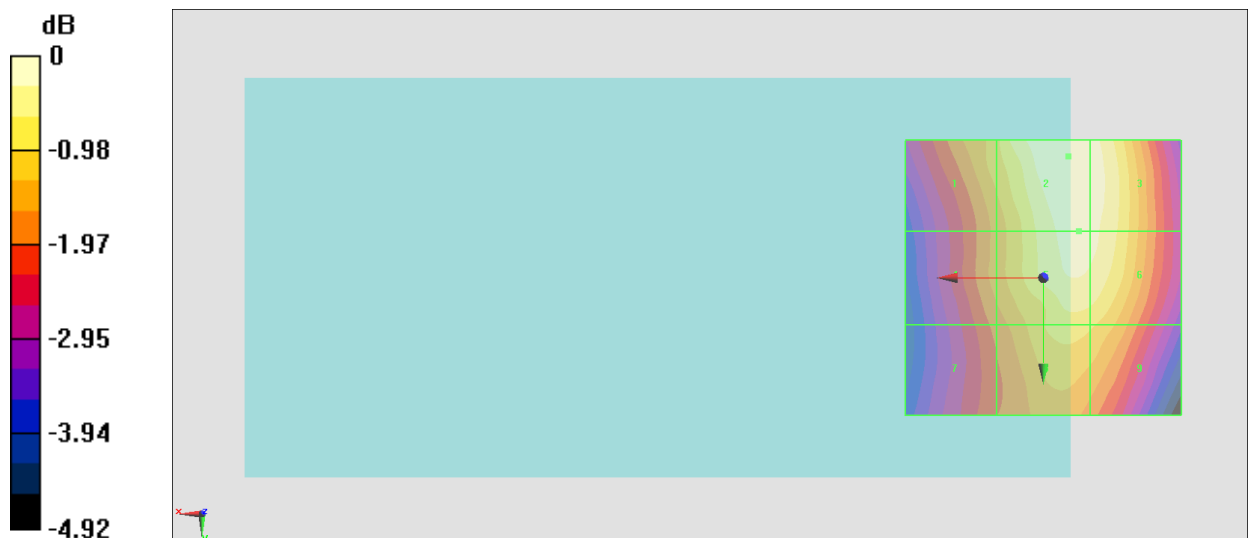

0 dB = 106.2 V/m = 40.52 dBV/m

#03_HAC_E_GSM850_GSM Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 81.92 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 39.93 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 38.5 dBV/m	Grid 2 M4 39.93 dBV/m	Grid 3 M4 39.9 dBV/m
Grid 4 M4 37.9 dBV/m	Grid 5 M4 39.72 dBV/m	Grid 6 M4 39.72 dBV/m
Grid 7 M4 37.56 dBV/m	Grid 8 M4 39.03 dBV/m	Grid 9 M4 39 dBV/m

Cursor:

Total = 39.93 dBV/m

E Category: M4

Location: -6.5, -21, 8.7 mm

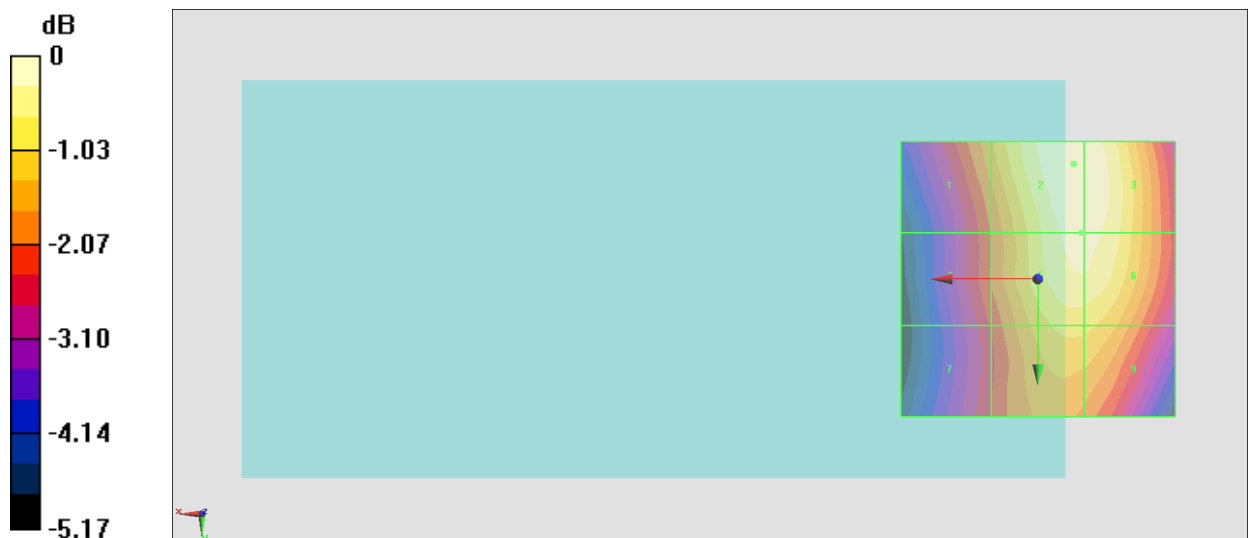

0 dB = 99.18 V/m = 39.93 dBV/m

#04_HAC_E_GSM1900_GSM Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.84 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.48 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 30.32 dBV/m	Grid 2 M3 32.29 dBV/m	Grid 3 M3 32.36 dBV/m
Grid 4 M3 30.13 dBV/m	Grid 5 M3 33.42 dBV/m	Grid 6 M3 33.42 dBV/m
Grid 7 M3 31.48 dBV/m	Grid 8 M3 33.48 dBV/m	Grid 9 M3 33.47 dBV/m

Cursor:

Total = 33.48 dBV/m

E Category: M3

Location: -7.5, 14.5, 8.7 mm

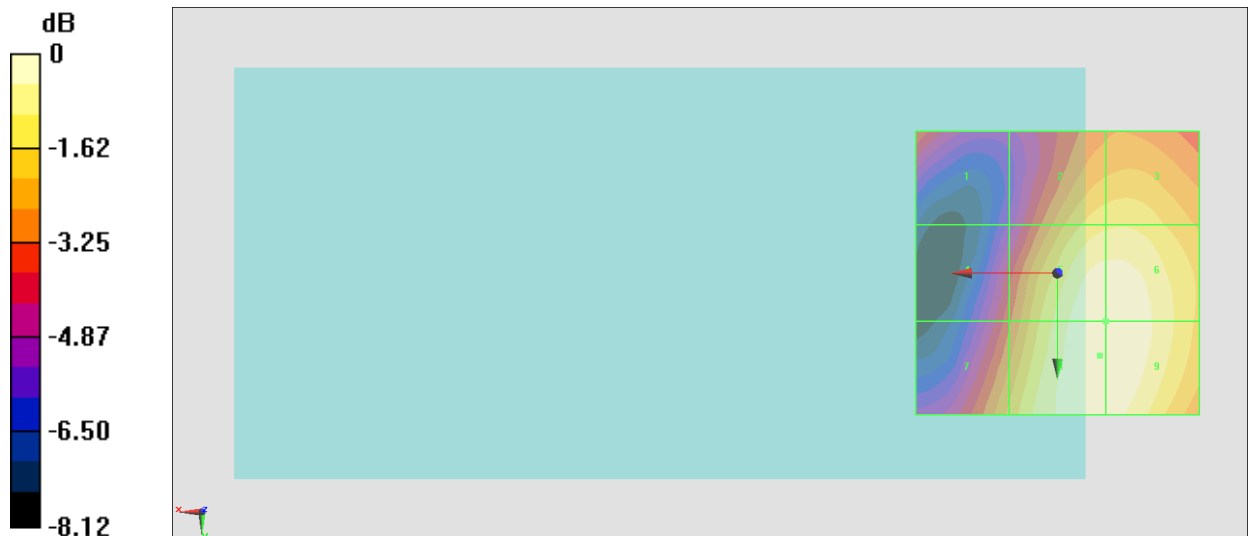

0 dB = 47.18 V/m = 33.48 dBV/m

#05_HAC_E_GSM1900_GSM Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 37.19 V/m; Power Drift = -0.08 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.87 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.88 dBV/m	Grid 2 M3 32.3 dBV/m	Grid 3 M3 32.31 dBV/m
Grid 4 M3 30.52 dBV/m	Grid 5 M3 33.68 dBV/m	Grid 6 M3 33.68 dBV/m
Grid 7 M3 31.61 dBV/m	Grid 8 M3 33.87 dBV/m	Grid 9 M3 33.85 dBV/m

Cursor:

Total = 33.87 dBV/m

E Category: M3

Location: -7, 19.5, 8.7 mm

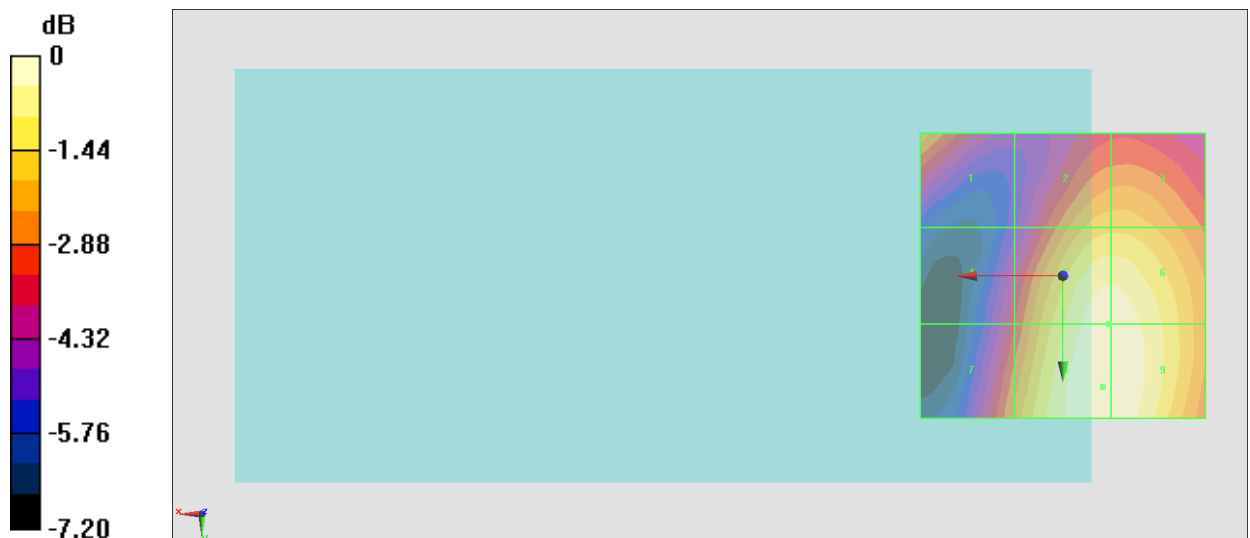

0 dB = 49.36 V/m = 33.87 dBV/m

#06_HAC_E_GSM1900_GSM Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.92 V/m; Power Drift = -0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.66 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 32.24 dBV/m	Grid 2 M3 33.24 dBV/m	Grid 3 M3 33.27 dBV/m
Grid 4 M3 31.31 dBV/m	Grid 5 M3 34.46 dBV/m	Grid 6 M3 34.46 dBV/m
Grid 7 M3 32.41 dBV/m	Grid 8 M3 34.65 dBV/m	Grid 9 M3 34.65 dBV/m

Cursor:

Total = 34.65 dBV/m

E Category: M3

Location: -7.5, 18.5, 8.7 mm

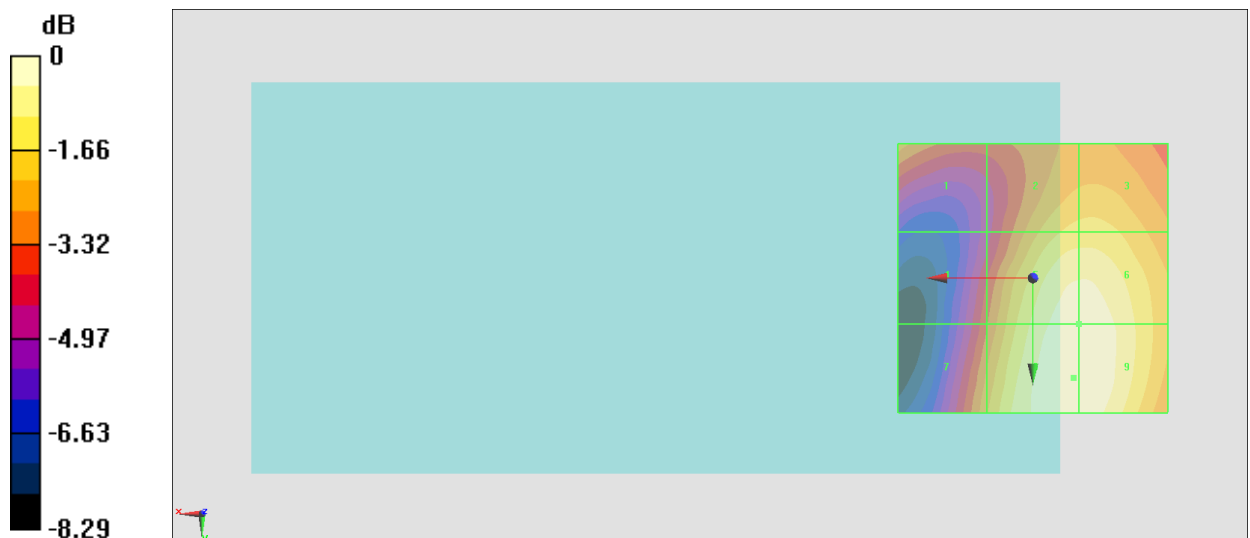

0 dB = 54.04 V/m = 34.65 dBV/m

#07_HAC_E_GSM1900_GSM Voice_Ch810;Battery 2

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 36.03 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.69 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.71 dBV/m	Grid 2 M3 32.24 dBV/m	Grid 3 M3 32.26 dBV/m
Grid 4 M3 30.26 dBV/m	Grid 5 M3 33.51 dBV/m	Grid 6 M3 33.51 dBV/m
Grid 7 M3 31.33 dBV/m	Grid 8 M3 33.69 dBV/m	Grid 9 M3 33.67 dBV/m

Cursor:

Total = 33.69 dBV/m

E Category: M3

Location: -7, 19, 8.7 mm

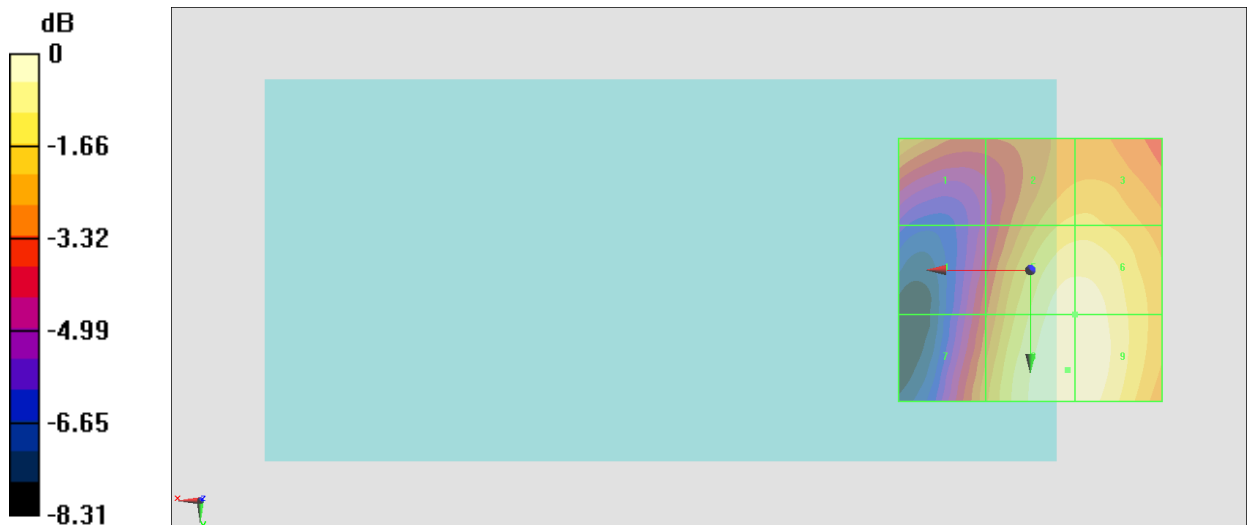

0 dB = 48.34 V/m = 33.69 dBV/m

#08_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 1/8th Rate_Ch1013

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 824.7 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.7 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.48 V/m; Power Drift = -0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 30.61 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 29.57 dBV/m	Grid 2 M4 30.61 dBV/m	Grid 3 M4 30.59 dBV/m
Grid 4 M4 29.26 dBV/m	Grid 5 M4 30.56 dBV/m	Grid 6 M4 30.5 dBV/m
Grid 7 M4 28.93 dBV/m	Grid 8 M4 30.02 dBV/m	Grid 9 M4 29.94 dBV/m

Cursor:

Total = 30.61 dBV/m

E Category: M4

Location: -6.5, -17.5, 8.7 mm

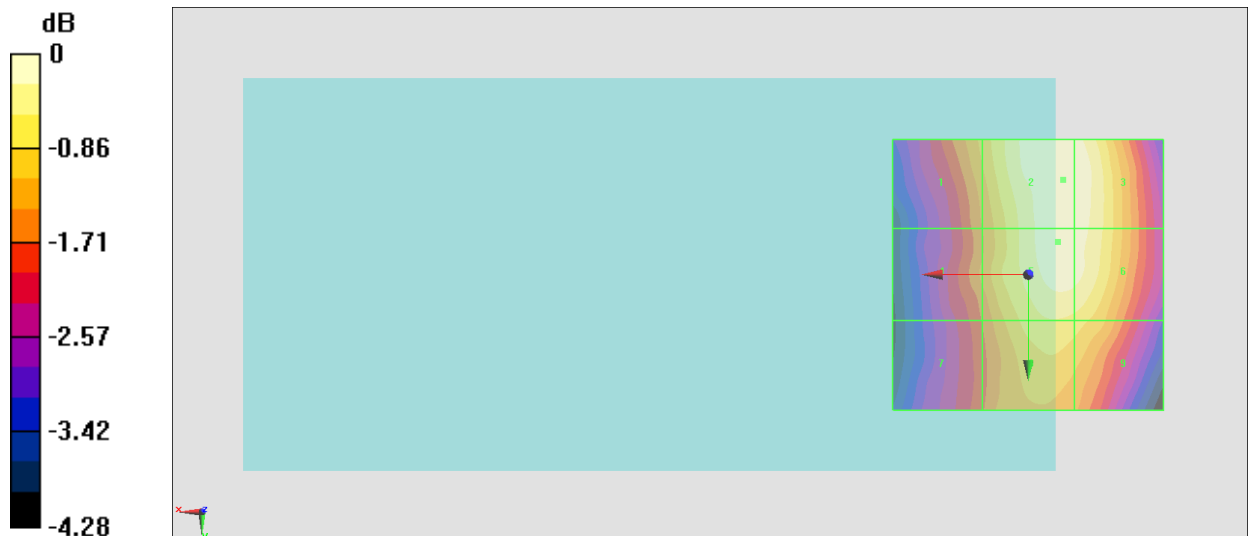

0 dB = 33.92 V/m = 30.61 dBV/m

#09_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 1/8th Rate_Ch384

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 836.52 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.52 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.03 V/m; Power Drift = 0.10 dB

Applied MIF = 3.26 dB

RF audio interference level = 30.65 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 29.52 dBV/m	Grid 2 M4 30.65 dBV/m	Grid 3 M4 30.59 dBV/m
Grid 4 M4 28.92 dBV/m	Grid 5 M4 30.4 dBV/m	Grid 6 M4 30.4 dBV/m
Grid 7 M4 28.47 dBV/m	Grid 8 M4 29.63 dBV/m	Grid 9 M4 29.58 dBV/m

Cursor:

Total = 30.65 dBV/m

E Category: M4

Location: -5.5, -20, 8.7 mm

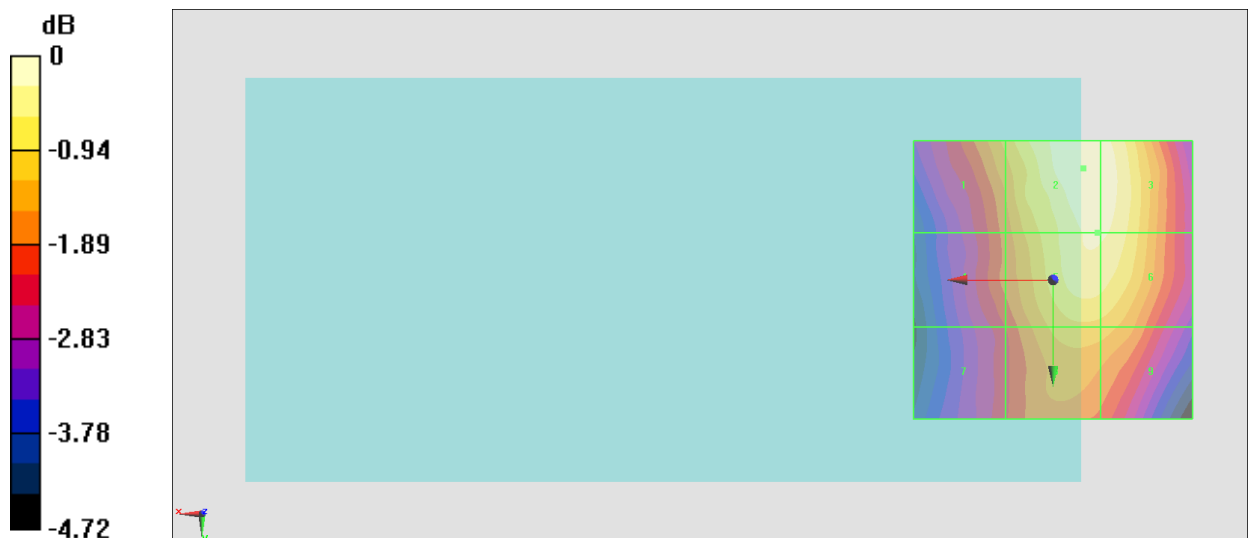

0 dB = 34.09 V/m = 30.65 dBV/m

#10_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 1/8th Rate_Ch777

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 848.31 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.31 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.77 V/m; Power Drift = 0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 29.91 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 28.2 dBV/m	Grid 2 M4 29.91 dBV/m	Grid 3 M4 29.9 dBV/m
Grid 4 M4 27.64 dBV/m	Grid 5 M4 29.65 dBV/m	Grid 6 M4 29.65 dBV/m
Grid 7 M4 27.18 dBV/m	Grid 8 M4 28.7 dBV/m	Grid 9 M4 28.69 dBV/m

Cursor:

Total = 29.91 dBV/m

E Category: M4

Location: -7.5, -21, 8.7 mm

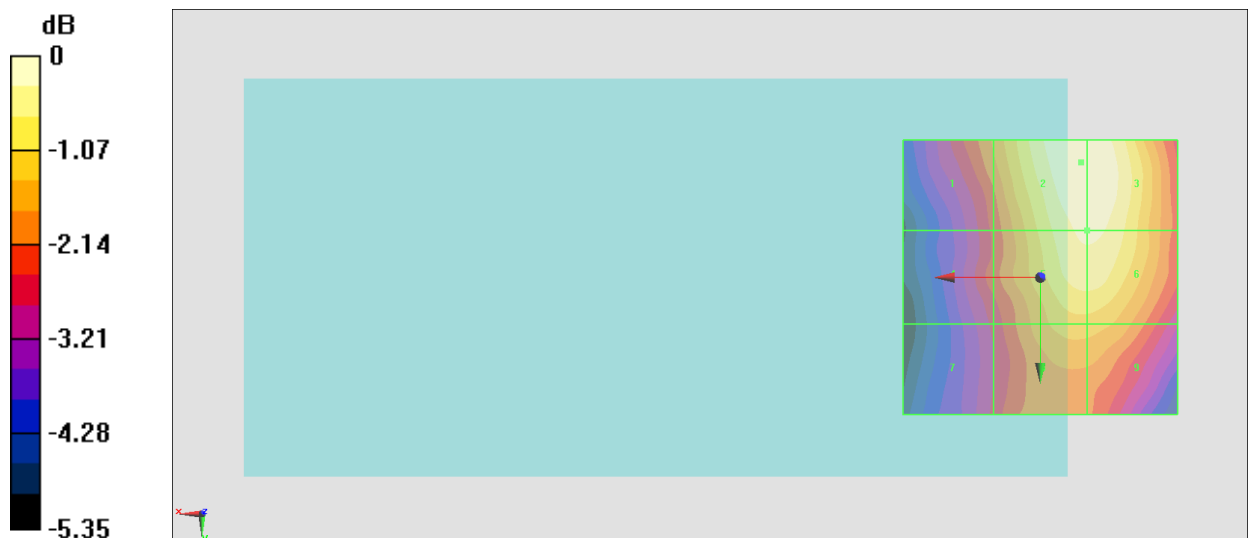

0 dB = 31.30 V/m = 29.91 dBV/m

#11_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 1/8th Rate_Ch25

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1851.25 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1851.25 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.60 V/m; Power Drift = 0.02 dB

Applied MIF = 3.26 dB

RF audio interference level = 27.42 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.13 dBV/m	Grid 2 M4 26.31 dBV/m	Grid 3 M4 26.31 dBV/m
Grid 4 M4 24.5 dBV/m	Grid 5 M4 27.34 dBV/m	Grid 6 M4 27.31 dBV/m
Grid 7 M4 25.46 dBV/m	Grid 8 M4 27.42 dBV/m	Grid 9 M4 27.4 dBV/m

Cursor:

Total = 27.42 dBV/m

E Category: M4

Location: -7, 15, 8.7 mm

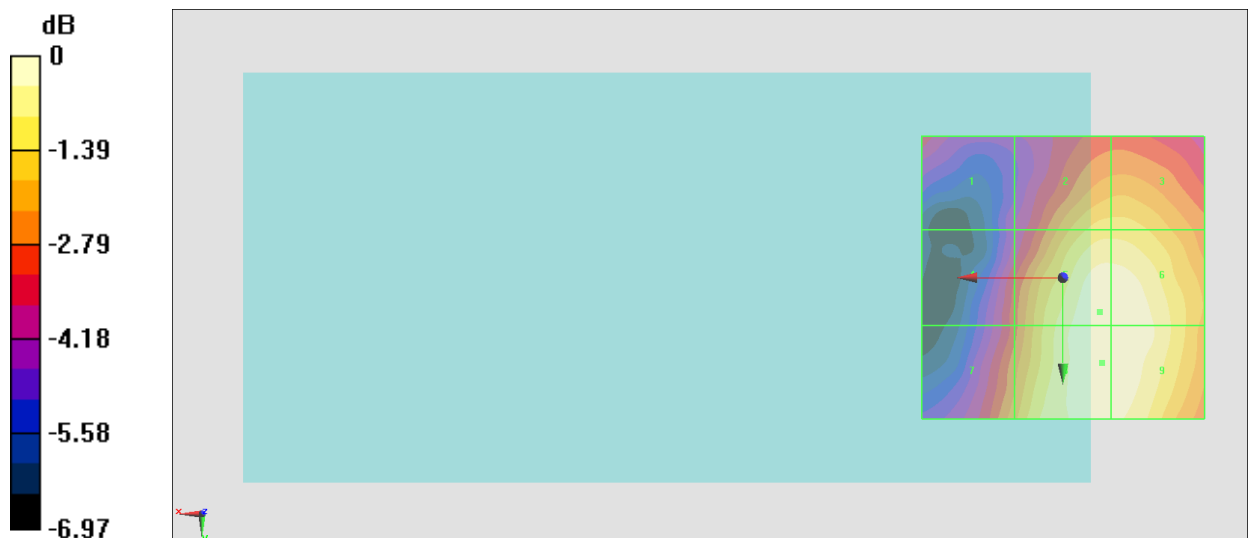

0 dB = 23.50 V/m = 27.42 dBV/m

#12_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 1/8th Rate_Ch600

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1880 MHz; Duty Cycle: 1:17.7419
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.79 V/m; Power Drift = 0.07 dB

Applied MIF = 3.26 dB

RF audio interference level = 27.60 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.62 dBV/m	Grid 2 M4 26.54 dBV/m	Grid 3 M4 26.53 dBV/m
Grid 4 M4 24.52 dBV/m	Grid 5 M4 27.57 dBV/m	Grid 6 M4 27.57 dBV/m
Grid 7 M4 25.15 dBV/m	Grid 8 M4 27.6 dBV/m	Grid 9 M4 27.6 dBV/m

Cursor:

Total = 27.60 dBV/m

E Category: M4

Location: -7.5, 13.5, 8.7 mm

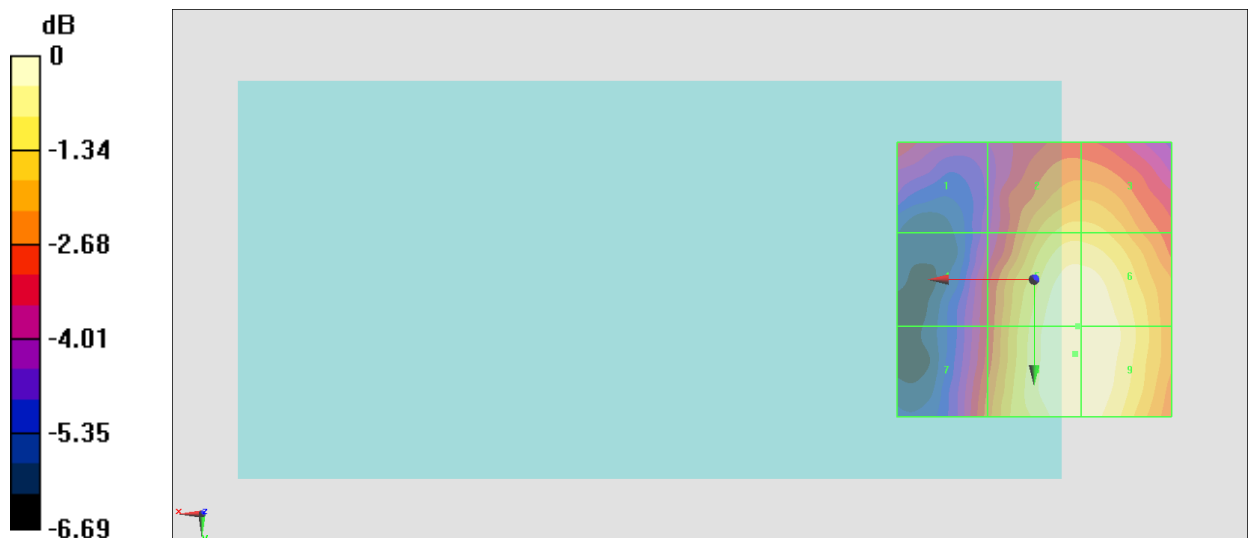

0 dB = 24.00 V/m = 27.60 dBV/m

#13_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 1/8th Rate_Ch1175

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1908.75 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1908.75 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.77 V/m; Power Drift = 0.03 dB

Applied MIF = 3.26 dB

RF audio interference level = 27.48 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.81 dBV/m	Grid 2 M4 26.79 dBV/m	Grid 3 M4 26.82 dBV/m
Grid 4 M4 24.31 dBV/m	Grid 5 M4 27.47 dBV/m	Grid 6 M4 27.47 dBV/m
Grid 7 M4 25.18 dBV/m	Grid 8 M4 27.48 dBV/m	Grid 9 M4 27.48 dBV/m

Cursor:

Total = 27.48 dBV/m

E Category: M4

Location: -9.5, 13.5, 8.7 mm

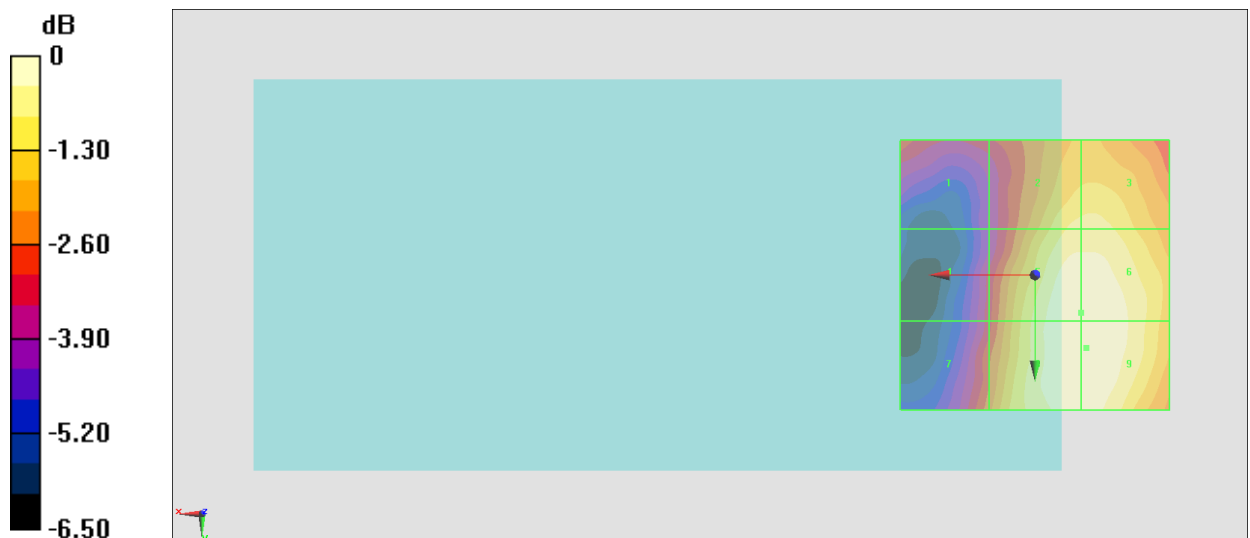

0 dB = 23.66 V/m = 27.48 dBV/m

#14_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 1/8th Rate_Ch476

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 817.9 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 817.9 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.42 V/m; Power Drift = 0.06 dB

Applied MIF = 3.26 dB

RF audio interference level = 30.53 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 29.64 dBV/m	Grid 2 M4 30.53 dBV/m	Grid 3 M4 30.41 dBV/m
Grid 4 M4 29.31 dBV/m	Grid 5 M4 30.51 dBV/m	Grid 6 M4 30.41 dBV/m
Grid 7 M4 28.98 dBV/m	Grid 8 M4 30.03 dBV/m	Grid 9 M4 29.91 dBV/m

Cursor:

Total = 30.53 dBV/m

E Category: M4

Location: -5, -15.5, 8.7 mm

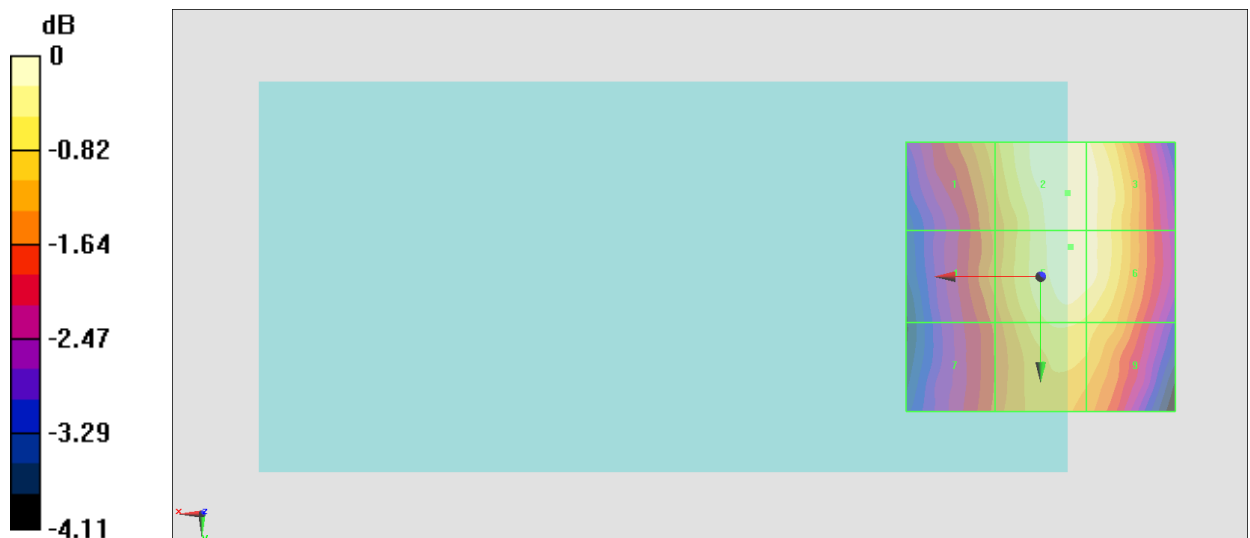

0 dB = 33.60 V/m = 30.53 dBV/m

#15_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 1/8th Rate_Ch580

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 820.5 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 820.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.89 V/m; Power Drift = -0.05 dB

Applied MIF = 3.26 dB

RF audio interference level = 30.92 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 30.02 dBV/m	Grid 2 M4 30.92 dBV/m	Grid 3 M4 30.83 dBV/m
Grid 4 M4 29.64 dBV/m	Grid 5 M4 30.77 dBV/m	Grid 6 M4 30.74 dBV/m
Grid 7 M4 29.34 dBV/m	Grid 8 M4 30.31 dBV/m	Grid 9 M4 30.15 dBV/m

Cursor:

Total = 30.92 dBV/m

E Category: M4

Location: -5, -16, 8.7 mm

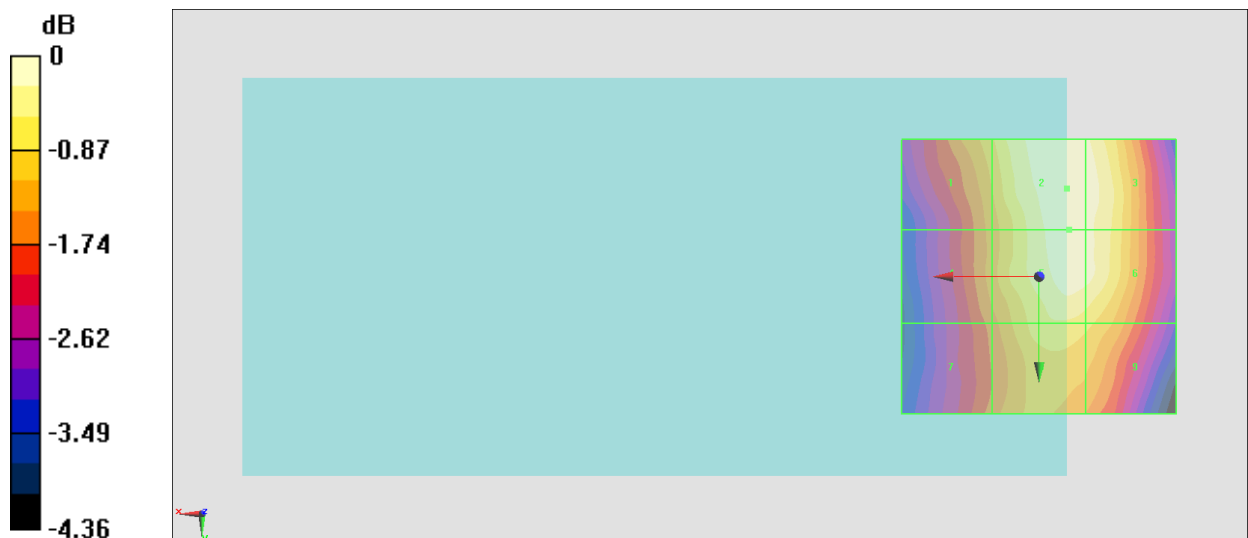

0 dB = 35.15 V/m = 30.92 dBV/m

#16_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 1/8th Rate_Ch684

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 823.1 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 823.1 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.85 V/m; Power Drift = 0.11 dB

Applied MIF = 3.26 dB

RF audio interference level = 31.05 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 30.09 dBV/m	Grid 2 M4 31.05 dBV/m	Grid 3 M4 31 dBV/m
Grid 4 M4 29.69 dBV/m	Grid 5 M4 30.94 dBV/m	Grid 6 M4 30.89 dBV/m
Grid 7 M4 29.34 dBV/m	Grid 8 M4 30.39 dBV/m	Grid 9 M4 30.34 dBV/m

Cursor:

Total = 31.05 dBV/m

E Category: M4

Location: -6, -16, 8.7 mm

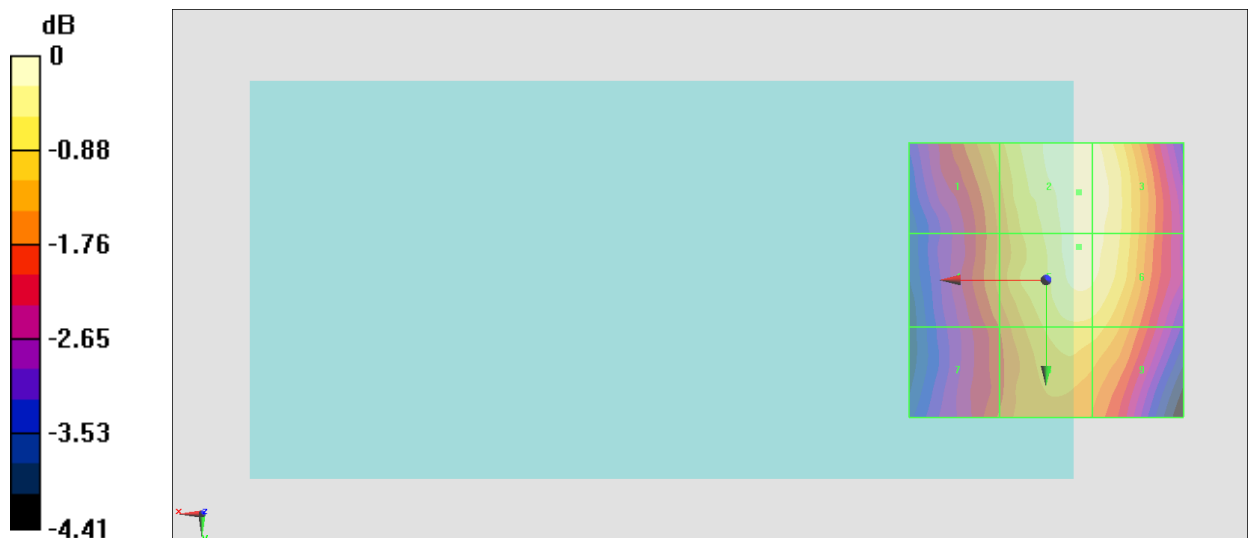

0 dB = 35.70 V/m = 31.05 dBV/m

#17_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.29 V/m; Power Drift = -0.05 dB

Applied MIF = -1.62 dB

RF audio interference level = 23.70 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 18.9 dBV/m	Grid 2 M4 21.94 dBV/m	Grid 3 M4 22.08 dBV/m
Grid 4 M4 19.52 dBV/m	Grid 5 M4 23.15 dBV/m	Grid 6 M4 23.27 dBV/m
Grid 7 M4 23.7 dBV/m	Grid 8 M4 23.14 dBV/m	Grid 9 M4 23.29 dBV/m

Cursor:

Total = 23.70 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

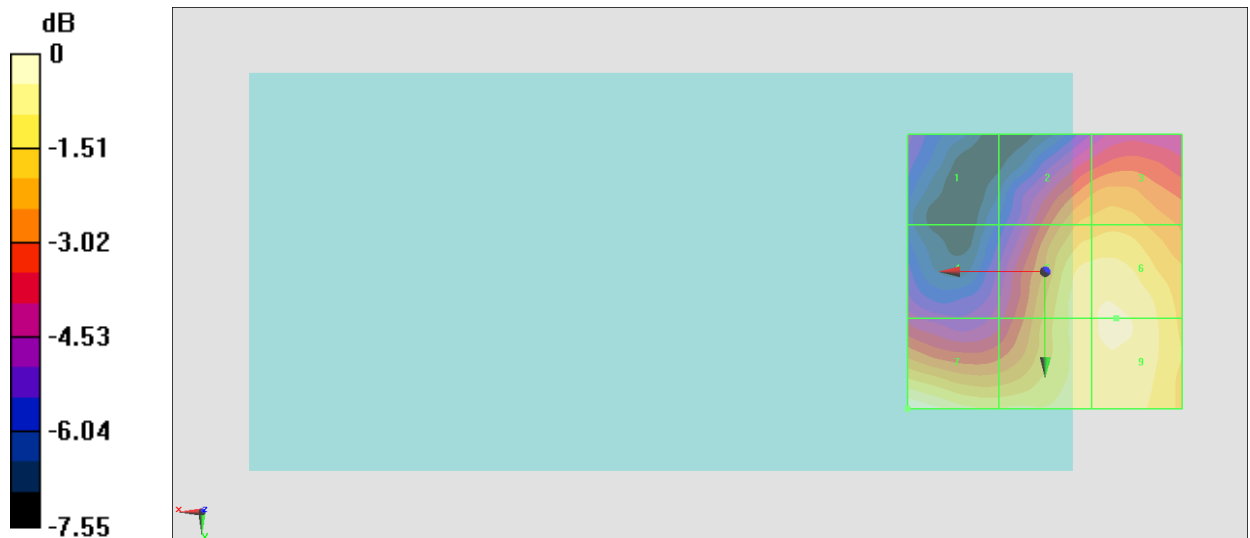

0 dB = 15.31 V/m = 23.70 dBV/m

#18_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.45 V/m; Power Drift = 0.00 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.87 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.75 dBV/m	Grid 2 M4 21.19 dBV/m	Grid 3 M4 21.34 dBV/m
Grid 4 M4 17.51 dBV/m	Grid 5 M4 21.76 dBV/m	Grid 6 M4 21.87 dBV/m
Grid 7 M4 21.14 dBV/m	Grid 8 M4 21.77 dBV/m	Grid 9 M4 21.77 dBV/m

Cursor:

Total = 21.87 dBV/m

E Category: M4

Location: -10.5, 1, 8.7 mm

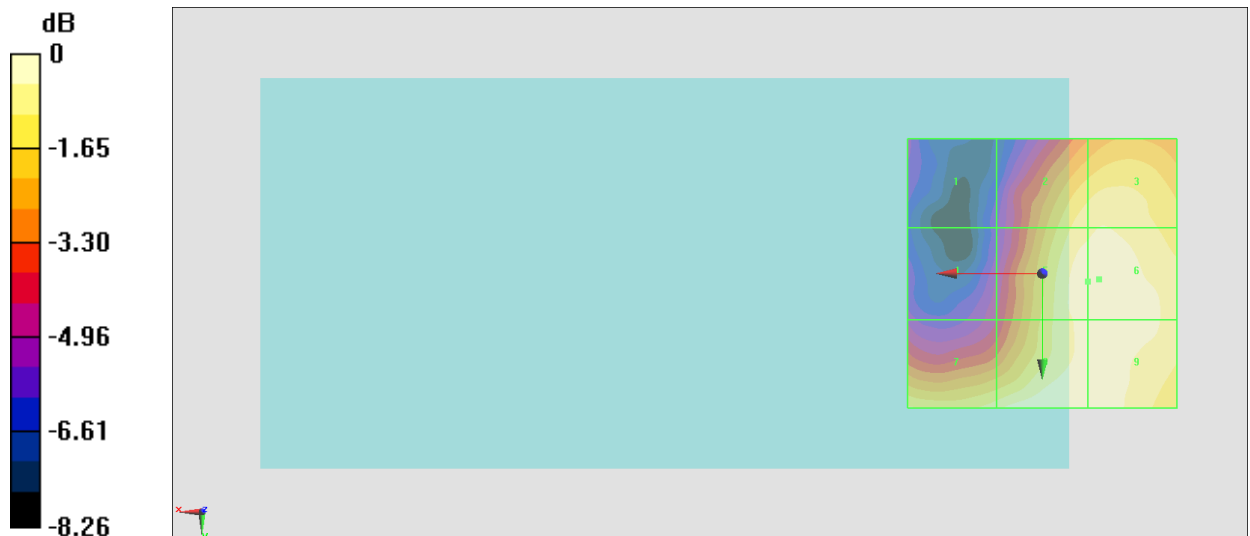

0 dB = 12.40 V/m = 21.87 dBV/m

#19_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.69 V/m; Power Drift = -0.06 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.05 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.28 dBV/m	Grid 2 M4 20.48 dBV/m	Grid 3 M4 20.54 dBV/m
Grid 4 M4 16.95 dBV/m	Grid 5 M4 21.01 dBV/m	Grid 6 M4 21.05 dBV/m
Grid 7 M4 19.72 dBV/m	Grid 8 M4 20.95 dBV/m	Grid 9 M4 20.96 dBV/m

Cursor:

Total = 21.05 dBV/m

E Category: M4

Location: -10.5, 1, 8.7 mm

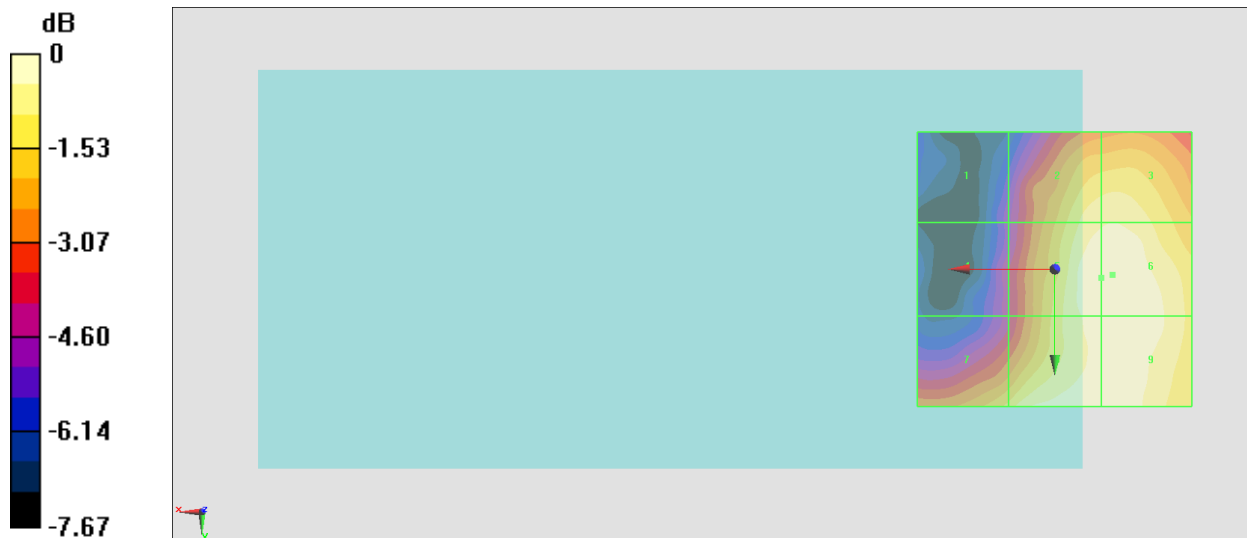

0 dB = 11.28 V/m = 21.05 dBV/m

#20_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.47 V/m; Power Drift = -0.15 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.98 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.67 dBV/m	Grid 2 M4 20.37 dBV/m	Grid 3 M4 20.41 dBV/m
Grid 4 M4 16.59 dBV/m	Grid 5 M4 20.41 dBV/m	Grid 6 M4 20.47 dBV/m
Grid 7 M4 20.01 dBV/m	Grid 8 M4 20.98 dBV/m	Grid 9 M4 20.97 dBV/m

Cursor:

Total = 20.98 dBV/m

E Category: M4

Location: -5.5, 25, 8.7 mm

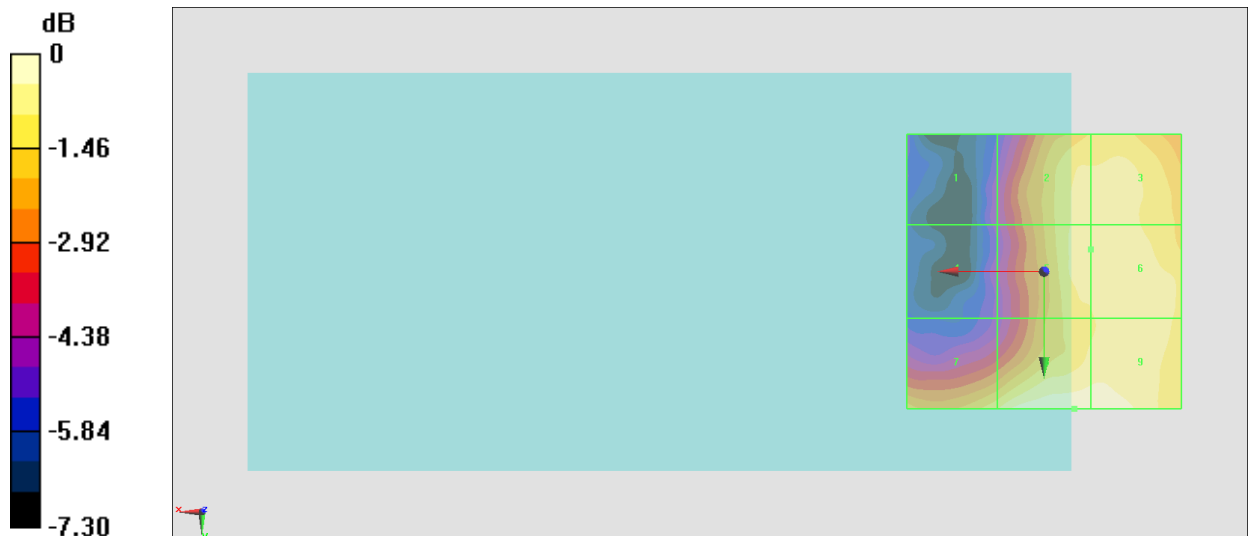

0 dB = 11.20 V/m = 20.98 dBV/m

#21_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.85 V/m; Power Drift = 0.07 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.22 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.45 dBV/m	Grid 2 M4 19.99 dBV/m	Grid 3 M4 20.02 dBV/m
Grid 4 M4 15.36 dBV/m	Grid 5 M4 19.09 dBV/m	Grid 6 M4 19.16 dBV/m
Grid 7 M4 18.76 dBV/m	Grid 8 M4 20.22 dBV/m	Grid 9 M4 20.22 dBV/m

Cursor:

Total = 20.22 dBV/m

E Category: M4

Location: -8.5, 25, 8.7 mm

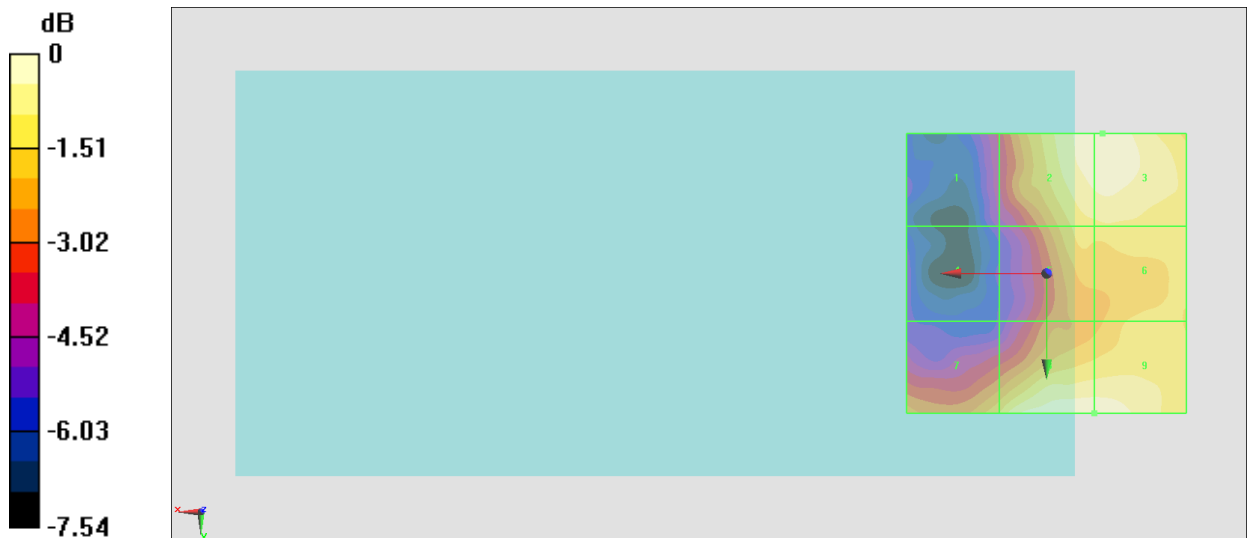

0 dB = 10.26 V/m = 20.22 dBV/m

#22_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.22 V/m; Power Drift = -0.03 dB

Applied MIF = -1.62 dB

RF audio interference level = 22.15 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.92 dBV/m	Grid 2 M4 20.35 dBV/m	Grid 3 M4 20.38 dBV/m
Grid 4 M4 18.61 dBV/m	Grid 5 M4 21.99 dBV/m	Grid 6 M4 22.07 dBV/m
Grid 7 M4 21.92 dBV/m	Grid 8 M4 22.05 dBV/m	Grid 9 M4 22.15 dBV/m

Cursor:

Total = 22.15 dBV/m

E Category: M4

Location: -12, 12.5, 8.7 mm

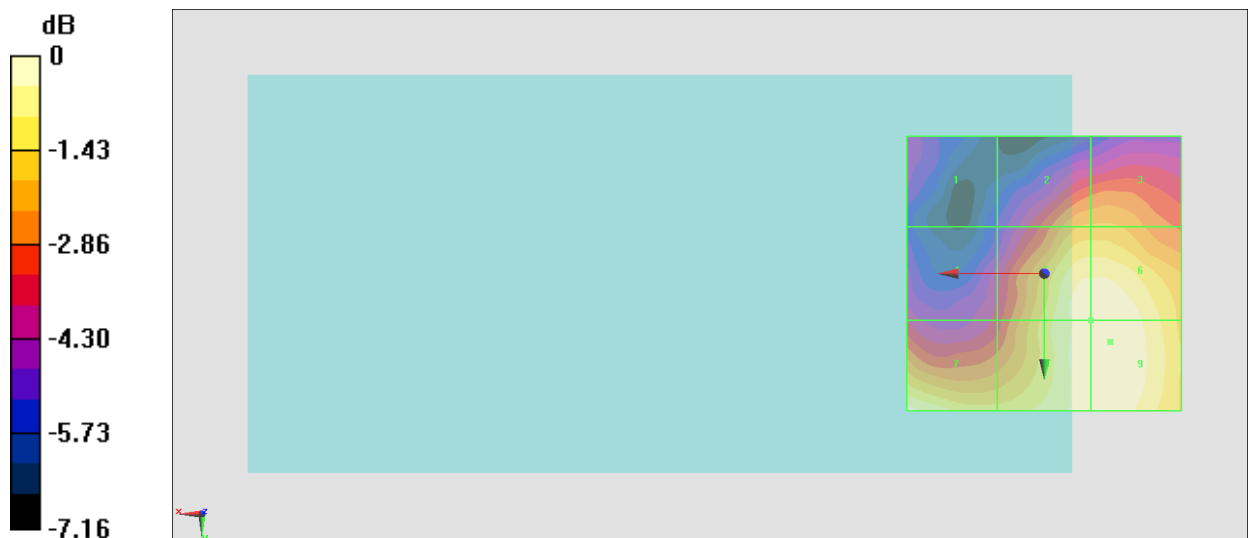

0 dB = 12.81 V/m = 22.15 dBV/m

#23_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.52 V/m; Power Drift = 0.04 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.06 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.25 dBV/m	Grid 2 M4 19.9 dBV/m	Grid 3 M4 20.06 dBV/m
Grid 4 M4 16.95 dBV/m	Grid 5 M4 20.8 dBV/m	Grid 6 M4 20.98 dBV/m
Grid 7 M4 19.6 dBV/m	Grid 8 M4 20.72 dBV/m	Grid 9 M4 21.06 dBV/m

Cursor:

Total = 21.06 dBV/m

E Category: M4

Location: -14.5, 10, 8.7 mm

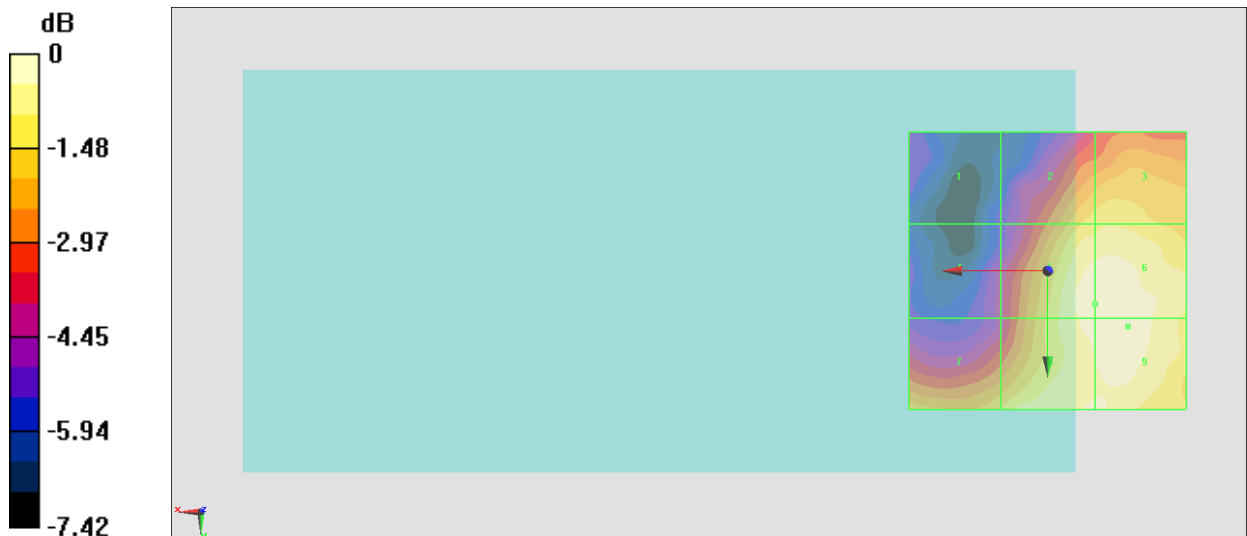

0 dB = 11.30 V/m = 21.06 dBV/m

#24_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.56 V/m; Power Drift = -0.14 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.20 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 15.37 dBV/m	Grid 2 M4 19.03 dBV/m	Grid 3 M4 19.06 dBV/m
Grid 4 M4 16.53 dBV/m	Grid 5 M4 20.15 dBV/m	Grid 6 M4 20.16 dBV/m
Grid 7 M4 18.72 dBV/m	Grid 8 M4 20.16 dBV/m	Grid 9 M4 20.2 dBV/m

Cursor:

Total = 20.20 dBV/m

E Category: M4

Location: -10, 25, 8.7 mm

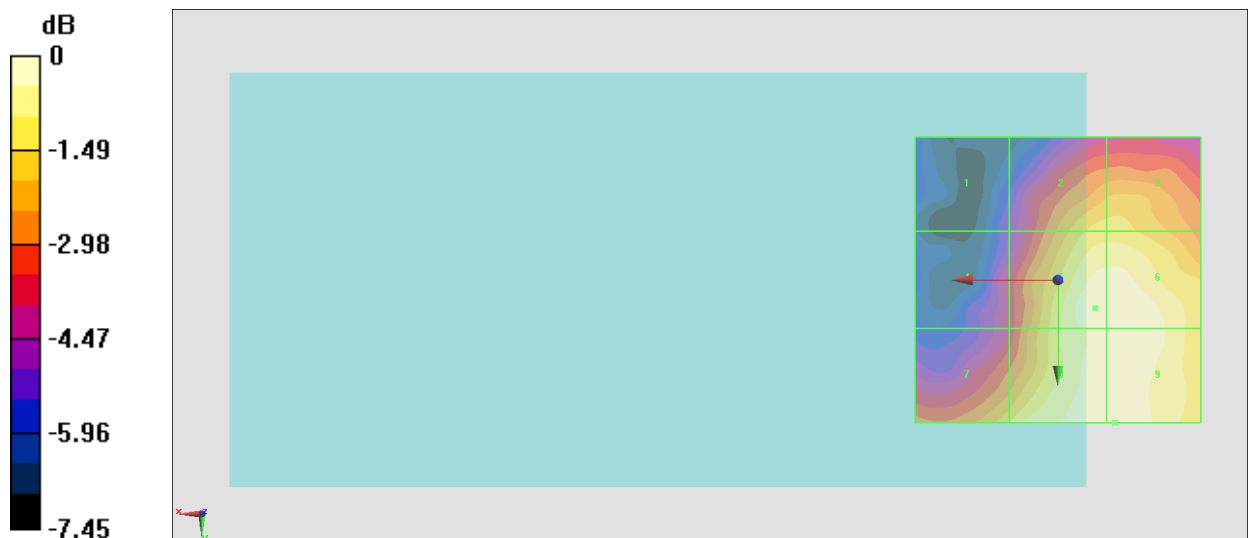

0 dB = 10.24 V/m = 20.21 dBV/m

#25_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.84 V/m; Power Drift = -0.04 dB

Applied MIF = -1.62 dB

RF audio interference level = 18.97 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 15.32 dBV/m	Grid 2 M4 18.77 dBV/m	Grid 3 M4 18.84 dBV/m
Grid 4 M4 14.85 dBV/m	Grid 5 M4 18.73 dBV/m	Grid 6 M4 18.79 dBV/m
Grid 7 M4 17.84 dBV/m	Grid 8 M4 18.97 dBV/m	Grid 9 M4 18.97 dBV/m

Cursor:

Total = 18.97 dBV/m

E Category: M4

Location: -9, 25, 8.7 mm

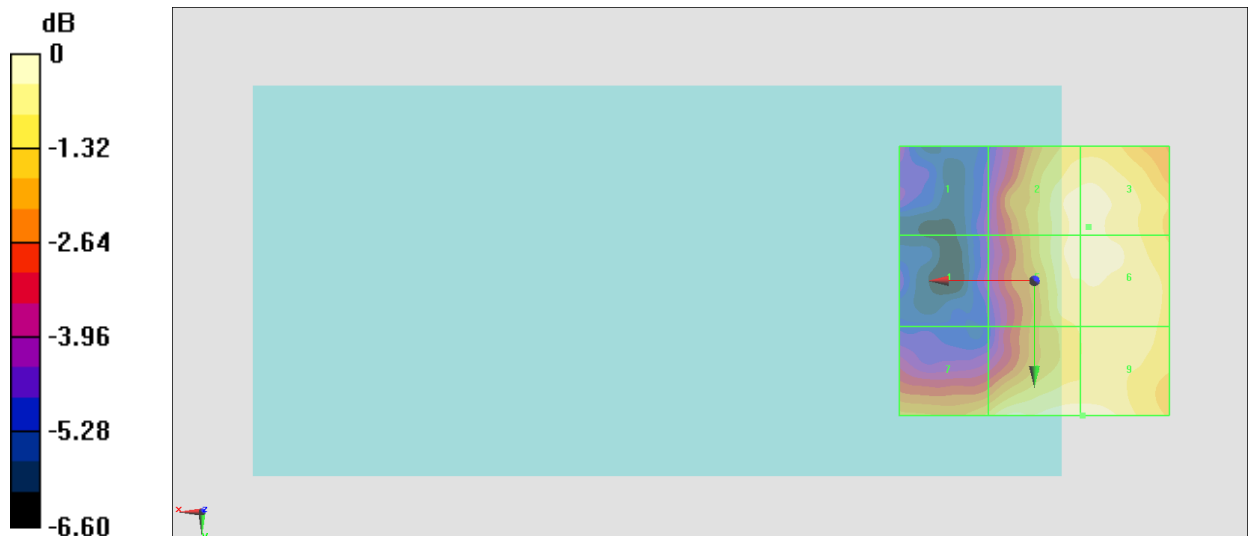

0 dB = 8.884 V/m = 18.97 dBV/m

#26_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.087 V/m; Power Drift = 0.14 dB

Applied MIF = -1.62 dB

RF audio interference level = 18.24 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 14.72 dBV/m	Grid 2 M4 17.94 dBV/m	Grid 3 M4 18 dBV/m
Grid 4 M4 14.52 dBV/m	Grid 5 M4 17.31 dBV/m	Grid 6 M4 17.39 dBV/m
Grid 7 M4 16.76 dBV/m	Grid 8 M4 18.21 dBV/m	Grid 9 M4 18.24 dBV/m

Cursor:

Total = 18.24 dBV/m

E Category: M4

Location: -9.5, 25, 8.7 mm

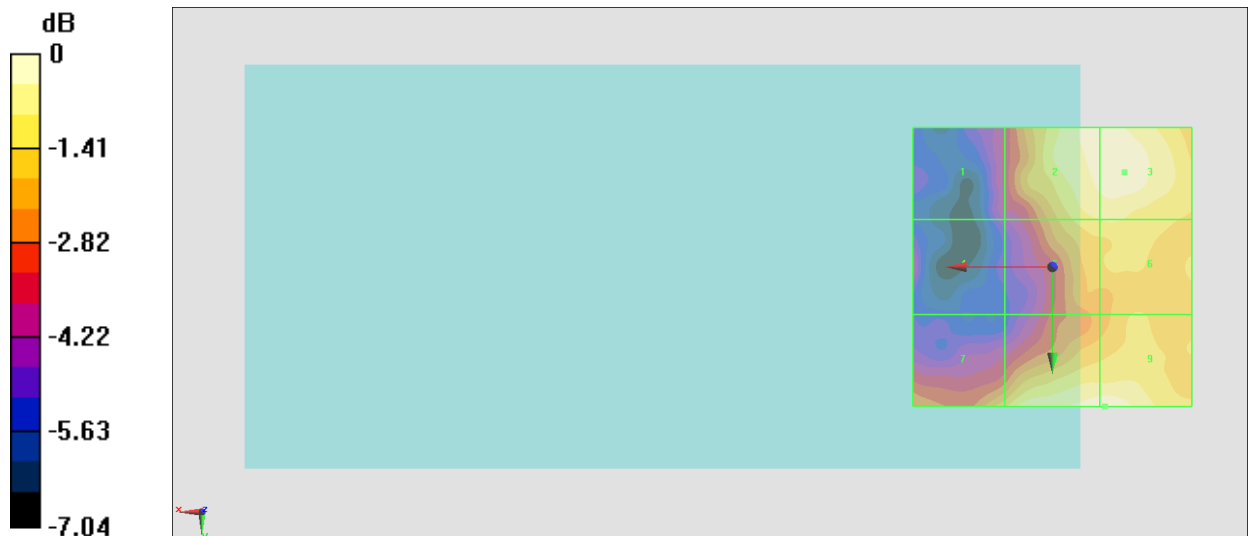

0 dB = 8.169 V/m = 18.24 dBV/m