

#01_HAC_E_GSM850_GSM Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.97 V/m; Power Drift = -0.08 dB

Applied MIF = 3.63 dB

RF audio interference level = 38.66 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 37.51 dBV/m	Grid 2 M4 38.66 dBV/m	Grid 3 M4 38.57 dBV/m
Grid 4 M4 37.09 dBV/m	Grid 5 M4 38.5 dBV/m	Grid 6 M4 38.47 dBV/m
Grid 7 M4 36.73 dBV/m	Grid 8 M4 37.95 dBV/m	Grid 9 M4 37.91 dBV/m

Cursor:

Total = 38.66 dBV/m

E Category: M4

Location: -5, -20.5, 7.7 mm

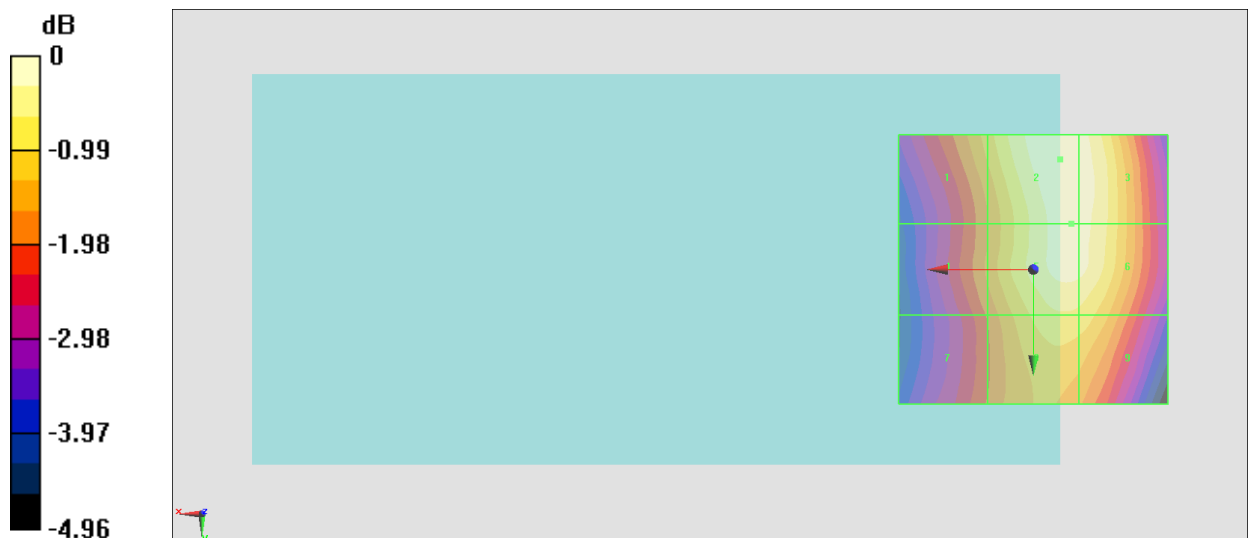

0 dB = 85.69 V/m = 38.66 dBV/m

#02_HAC_E_GSM850_GSM Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.84 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 39.48 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 38.32 dBV/m	Grid 2 M4 39.48 dBV/m	Grid 3 M4 39.38 dBV/m
Grid 4 M4 37.55 dBV/m	Grid 5 M4 39.14 dBV/m	Grid 6 M4 39.12 dBV/m
Grid 7 M4 37.05 dBV/m	Grid 8 M4 38.29 dBV/m	Grid 9 M4 38.21 dBV/m

Cursor:

Total = 39.48 dBV/m

E Category: M4

Location: -4.5, -24.5, 7.7 mm

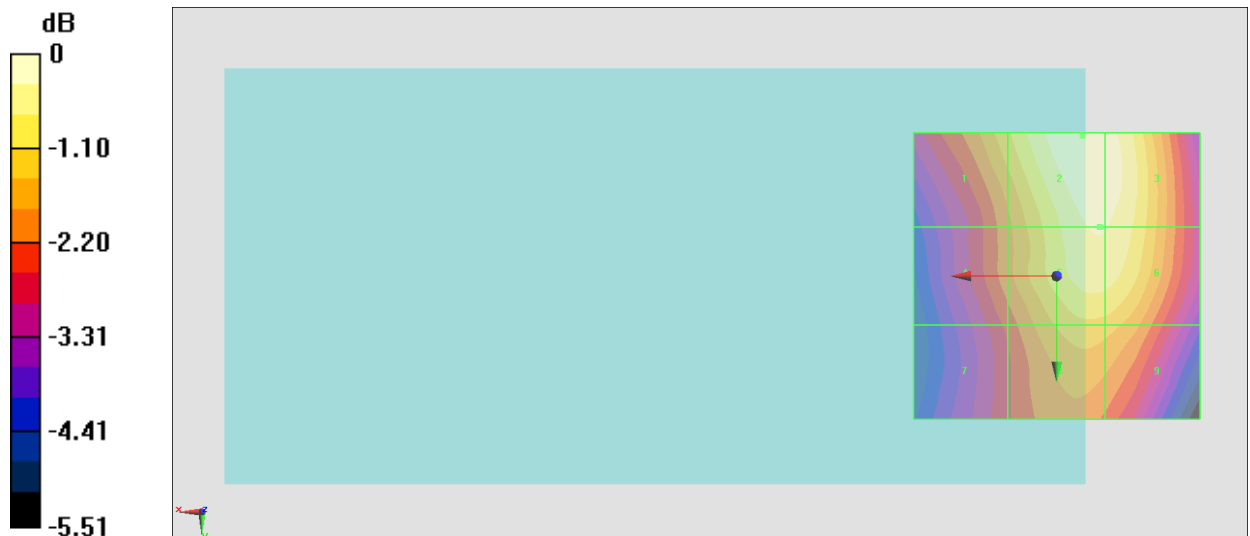

0 dB = 94.14 V/m = 39.48 dBV/m

#03_HAC_E_GSM850_GSM Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.12 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 39.79 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 38.18 dBV/m	Grid 2 M4 39.79 dBV/m	Grid 3 M4 39.77 dBV/m
Grid 4 M4 37.3 dBV/m	Grid 5 M4 39.45 dBV/m	Grid 6 M4 39.45 dBV/m
Grid 7 M4 36.78 dBV/m	Grid 8 M4 38.43 dBV/m	Grid 9 M4 38.42 dBV/m

Cursor:

Total = 39.79 dBV/m

E Category: M4

Location: -7, -23, 7.7 mm

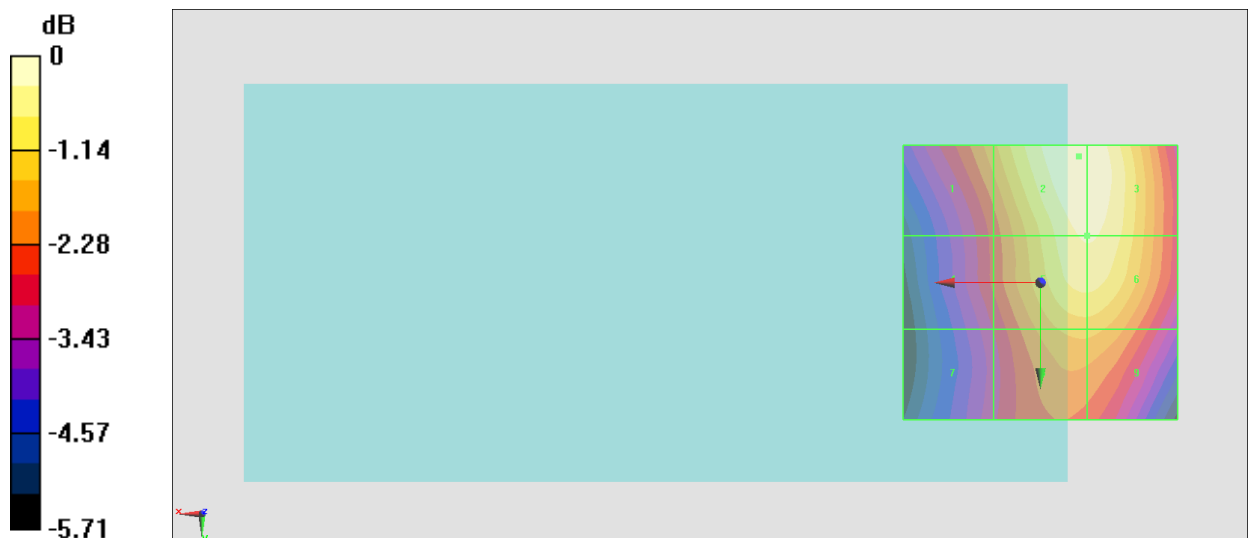

0 dB = 97.62 V/m = 39.79 dBV/m

#04_HAC_E_GSM1900_GSM Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.01 V/m; Power Drift = 0.00 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.92 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M4 28.74 dBV/m	Grid 2 M3 30.72 dBV/m	Grid 3 M3 30.77 dBV/m
Grid 4 M4 28.49 dBV/m	Grid 5 M3 31.89 dBV/m	Grid 6 M3 31.89 dBV/m
Grid 7 M4 29.83 dBV/m	Grid 8 M3 31.92 dBV/m	Grid 9 M3 31.92 dBV/m

Cursor:

Total = 31.92 dBV/m

E Category: M3

Location: -8.5, 12, 7.7 mm

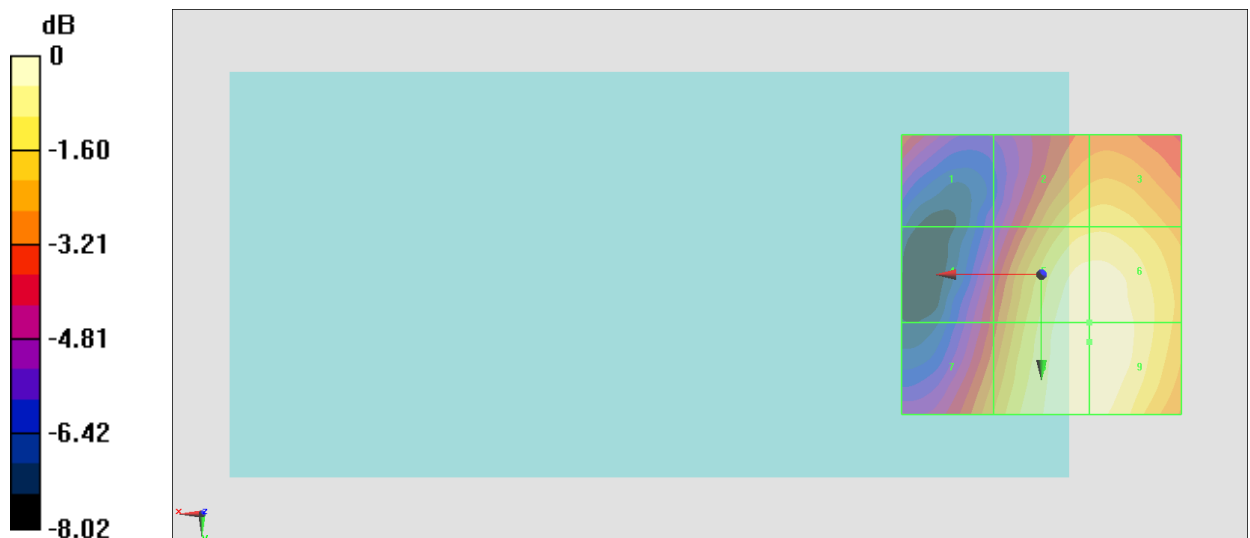

0 dB = 39.45 V/m = 31.92 dBV/m

#05_HAC_E_GSM1900_GSM Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 32.56 V/m; Power Drift = 0.00 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.09 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 30.68 dBV/m	Grid 2 M3 31.55 dBV/m	Grid 3 M3 31.55 dBV/m
Grid 4 M4 29.56 dBV/m	Grid 5 M3 32.94 dBV/m	Grid 6 M3 32.94 dBV/m
Grid 7 M3 30.64 dBV/m	Grid 8 M3 33.09 dBV/m	Grid 9 M3 33.08 dBV/m

Cursor:

Total = 33.09 dBV/m

E Category: M3

Location: -7.5, 17.5, 7.7 mm

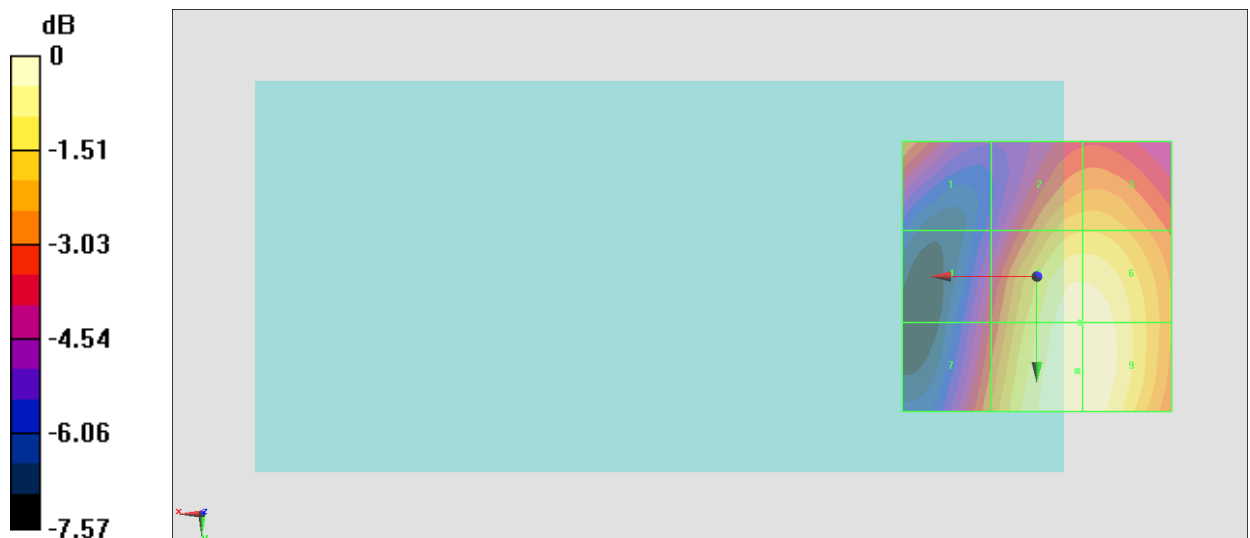

0 dB = 45.14 V/m = 33.09 dBV/m

#06_HAC_E_GSM1900_GSM Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.15 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.62 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.05 dBV/m	Grid 2 M3 32.3 dBV/m	Grid 3 M3 32.31 dBV/m
Grid 4 M3 30.1 dBV/m	Grid 5 M3 33.47 dBV/m	Grid 6 M3 33.47 dBV/m
Grid 7 M3 31.23 dBV/m	Grid 8 M3 33.62 dBV/m	Grid 9 M3 33.62 dBV/m

Cursor:

Total = 33.62 dBV/m

E Category: M3

Location: -8, 17, 7.7 mm

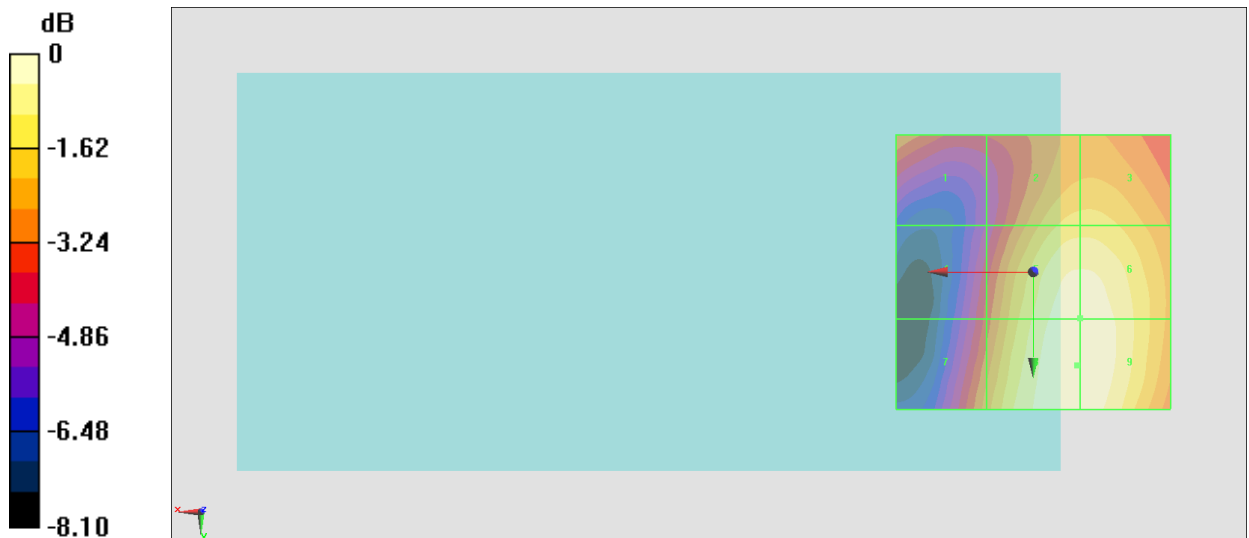

0 dB = 47.98 V/m = 33.62 dBV/m

#07_HAC_E_GSM1900_GSM Voice_Ch810;Battery 2

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.24 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.65 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.07 dBV/m	Grid 2 M3 32.33 dBV/m	Grid 3 M3 32.34 dBV/m
Grid 4 M3 30.12 dBV/m	Grid 5 M3 33.5 dBV/m	Grid 6 M3 33.5 dBV/m
Grid 7 M3 31.26 dBV/m	Grid 8 M3 33.65 dBV/m	Grid 9 M3 33.65 dBV/m

Cursor:

Total = 33.65 dBV/m

E Category: M3

Location: -8, 17, 7.7 mm

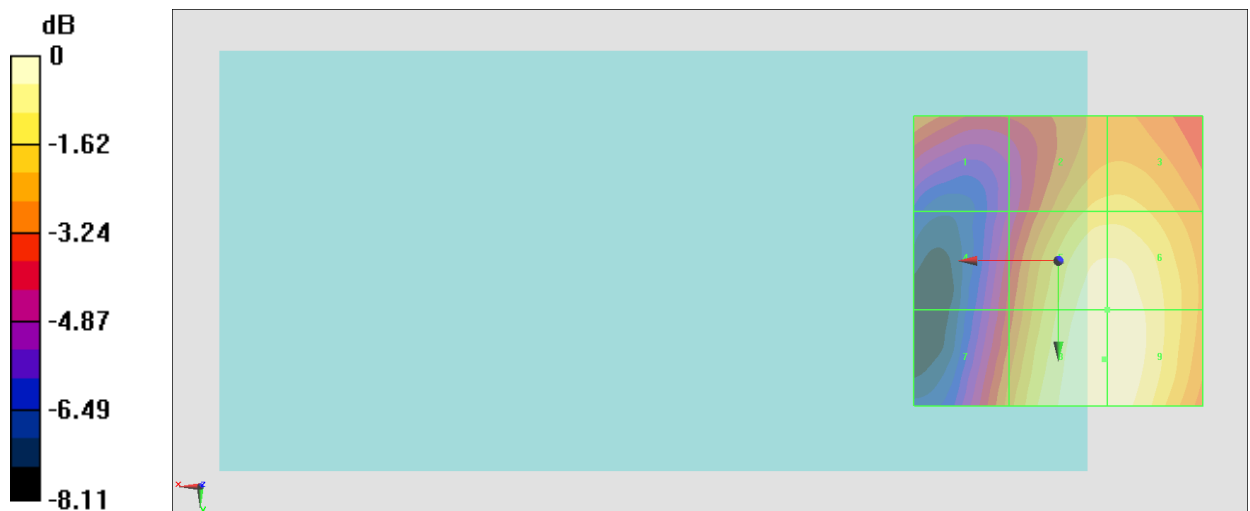

0 dB = 48.15 V/m = 33.65 dBV/m

#08_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 1/8th Rate_Ch1013

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 824.7 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.7 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.68 V/m; Power Drift = -0.07 dB

Applied MIF = 3.26 dB

RF audio interference level = 30.21 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 28.93 dBV/m	Grid 2 M4 30.21 dBV/m	Grid 3 M4 30.18 dBV/m
Grid 4 M4 28.28 dBV/m	Grid 5 M4 29.99 dBV/m	Grid 6 M4 29.99 dBV/m
Grid 7 M4 27.8 dBV/m	Grid 8 M4 29.1 dBV/m	Grid 9 M4 29.07 dBV/m

Cursor:

Total = 30.21 dBV/m

E Category: M4

Location: -6, -23, 8.7 mm

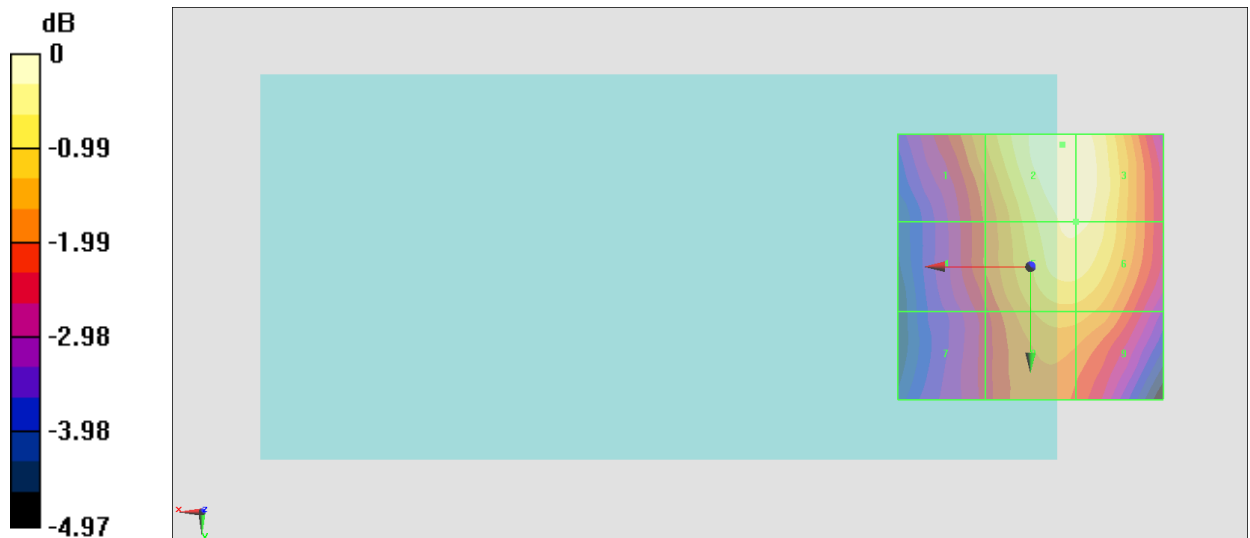

0 dB = 32.38 V/m = 30.21 dBV/m

#09_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 1/8th Rate_Ch384

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 836.52 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.52 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.05 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 30.27 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 28.79 dBV/m	Grid 2 M4 30.27 dBV/m	Grid 3 M4 30.26 dBV/m
Grid 4 M4 28.13 dBV/m	Grid 5 M4 29.94 dBV/m	Grid 6 M4 29.94 dBV/m
Grid 7 M4 27.72 dBV/m	Grid 8 M4 28.86 dBV/m	Grid 9 M4 28.83 dBV/m

Cursor:

Total = 30.27 dBV/m

E Category: M4

Location: -7.5, -23.5, 8.7 mm

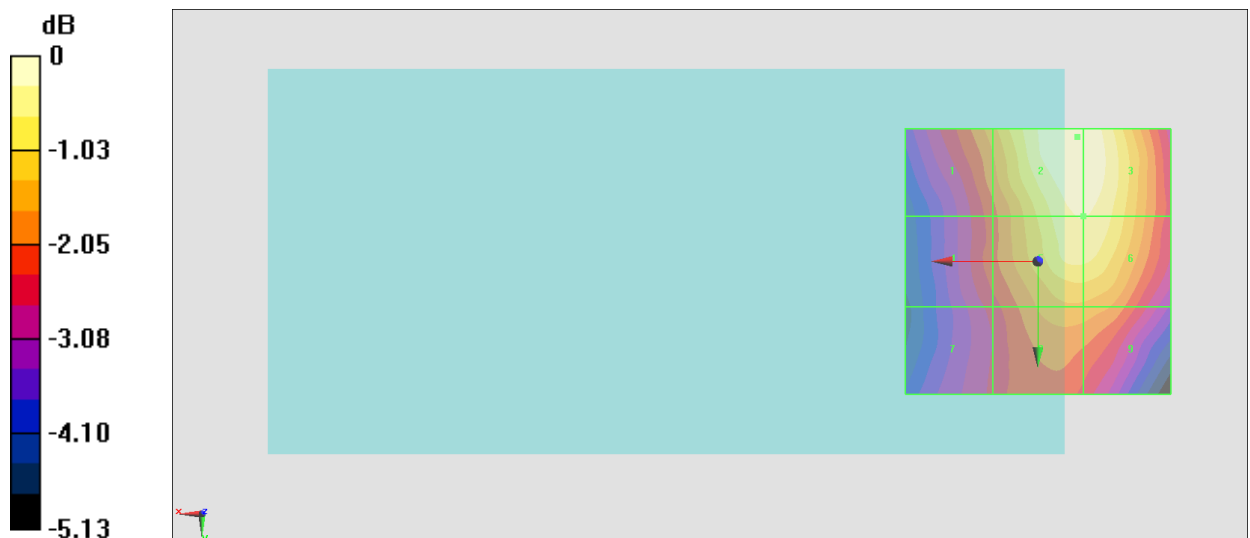

0 dB = 32.62 V/m = 30.27 dBV/m

#10_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 1/8th Rate_Ch777

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 848.31 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.31 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.19 V/m; Power Drift = 0.12 dB

Applied MIF = 3.26 dB

RF audio interference level = 28.81 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 27.45 dBV/m	Grid 2 M4 28.72 dBV/m	Grid 3 M4 28.71 dBV/m
Grid 4 M4 27.78 dBV/m	Grid 5 M4 28.81 dBV/m	Grid 6 M4 28.76 dBV/m
Grid 7 M4 27.86 dBV/m	Grid 8 M4 28.49 dBV/m	Grid 9 M4 28.38 dBV/m

Cursor:

Total = 28.81 dBV/m

E Category: M4

Location: -6, -3, 8.7 mm

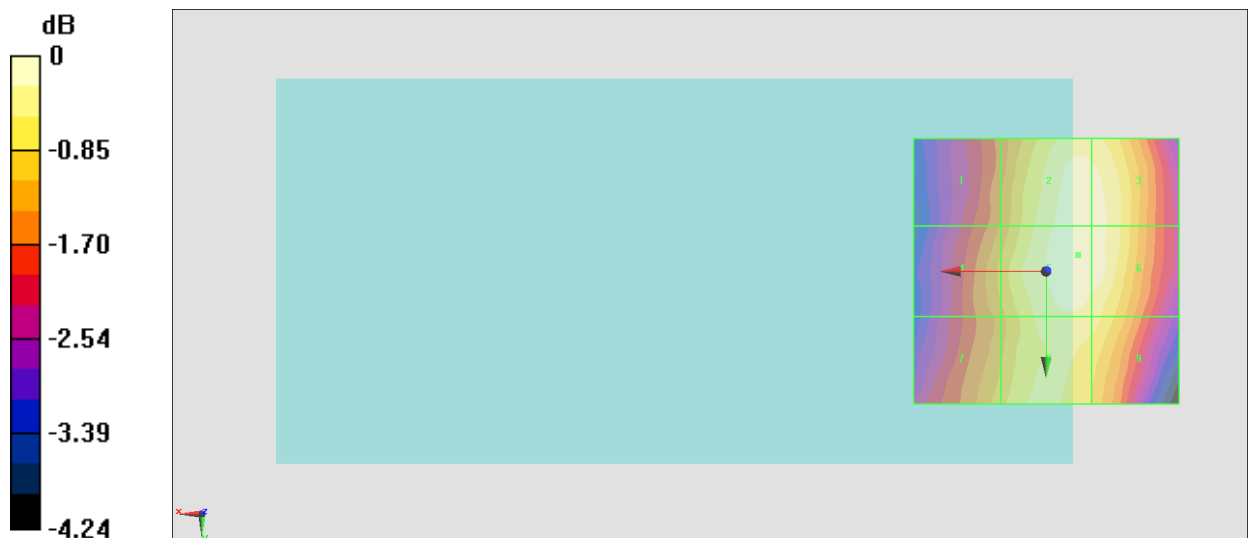

0 dB = 27.57 V/m = 28.81 dBV/m

#11_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 1/8th Rate_Ch25

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1851.25 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1851.25 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.89 V/m; Power Drift = 0.02 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.22 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.42 dBV/m	Grid 2 M4 25.07 dBV/m	Grid 3 M4 25.07 dBV/m
Grid 4 M4 23.15 dBV/m	Grid 5 M4 26.13 dBV/m	Grid 6 M4 26.13 dBV/m
Grid 7 M4 24.14 dBV/m	Grid 8 M4 26.22 dBV/m	Grid 9 M4 26.19 dBV/m

Cursor:

Total = 26.22 dBV/m

E Category: M4

Location: -6.5, 15.5, 8.7 mm

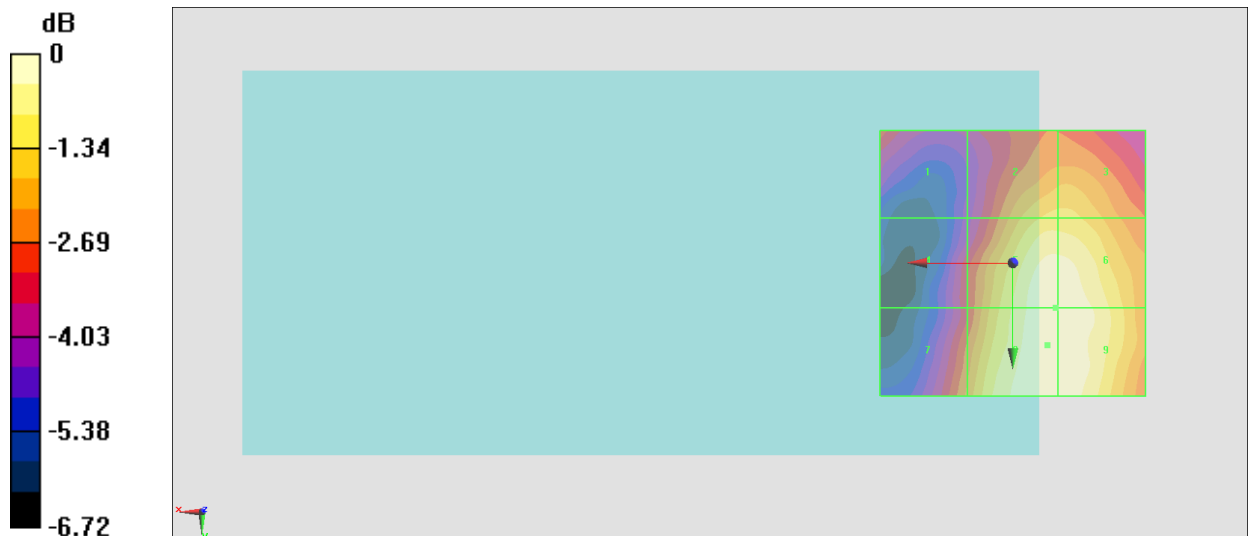

0 dB = 20.45 V/m = 26.21 dBV/m

#12_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 1/8th Rate_Ch600

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1880 MHz; Duty Cycle: 1:17.7419
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.03 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.72 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.8 dBV/m	Grid 2 M4 26.01 dBV/m	Grid 3 M4 26.03 dBV/m
Grid 4 M4 23.3 dBV/m	Grid 5 M4 26.72 dBV/m	Grid 6 M4 26.72 dBV/m
Grid 7 M4 23.74 dBV/m	Grid 8 M4 26.68 dBV/m	Grid 9 M4 26.69 dBV/m

Cursor:

Total = 26.72 dBV/m

E Category: M4

Location: -9.5, 1.5, 8.7 mm

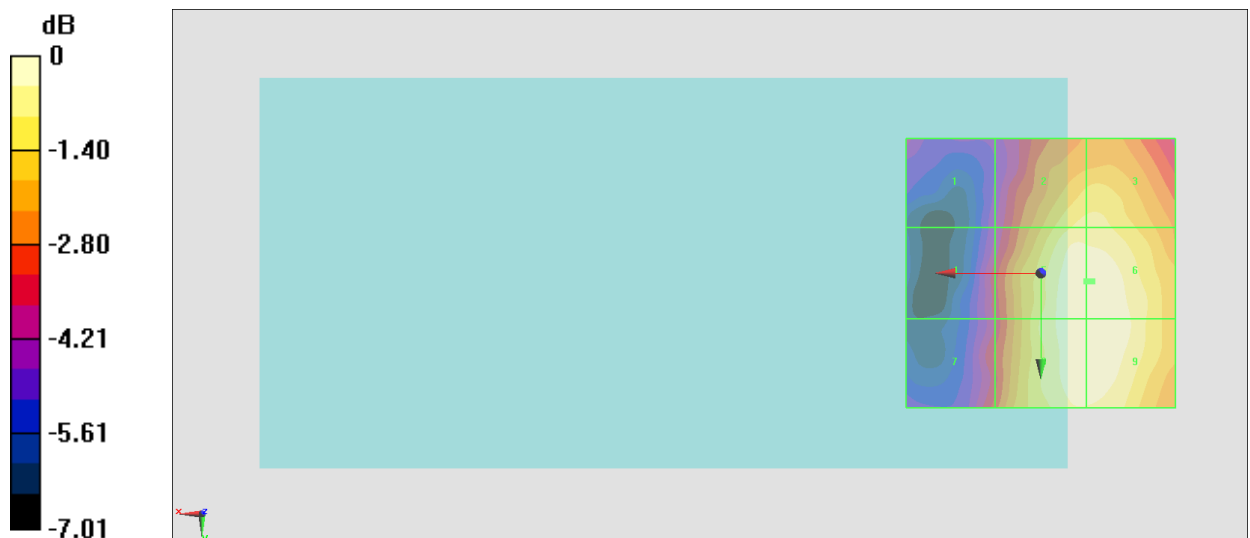

0 dB = 21.69 V/m = 26.73 dBV/m

#13_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 1/8th Rate_Ch1175

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1908.75 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1908.75 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.29 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.74 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.84 dBV/m	Grid 2 M4 26.06 dBV/m	Grid 3 M4 26.06 dBV/m
Grid 4 M4 23.44 dBV/m	Grid 5 M4 26.73 dBV/m	Grid 6 M4 26.74 dBV/m
Grid 7 M4 23.92 dBV/m	Grid 8 M4 26.73 dBV/m	Grid 9 M4 26.74 dBV/m

Cursor:

Total = 26.74 dBV/m

E Category: M4

Location: -9.5, 9, 8.7 mm

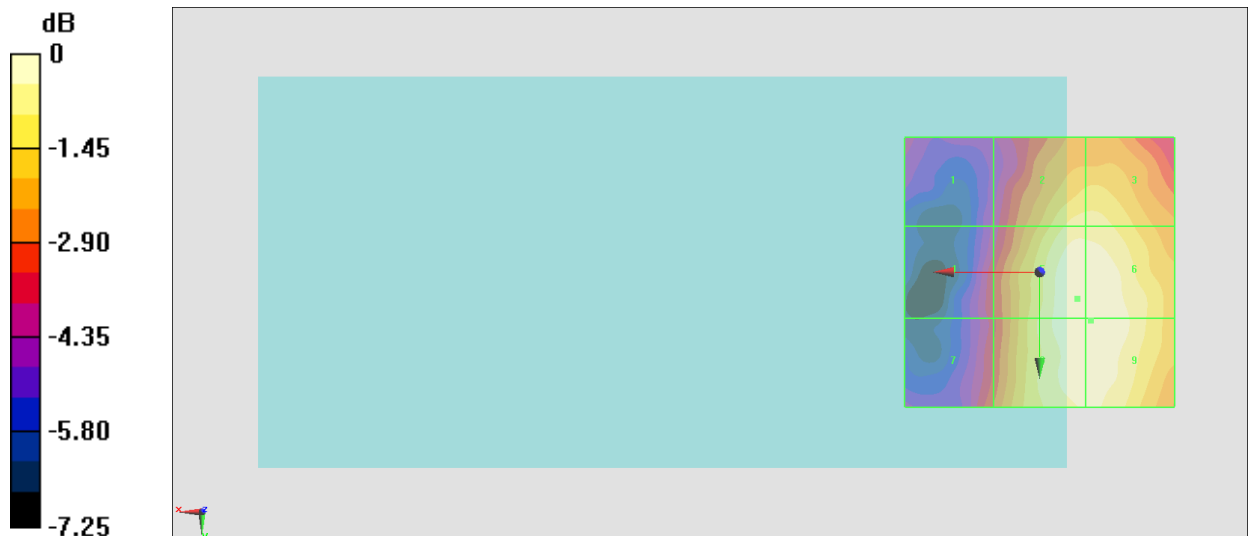

0 dB = 21.73 V/m = 26.74 dBV/m

#14_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 1/8th Rate_Ch476

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 817.9 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 817.9 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.81 V/m; Power Drift = -0.00 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.68 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 22.68 dBV/m	Grid 2 M4 26.04 dBV/m	Grid 3 M4 26.06 dBV/m
Grid 4 M4 23.33 dBV/m	Grid 5 M4 26.68 dBV/m	Grid 6 M4 26.67 dBV/m
Grid 7 M4 23.54 dBV/m	Grid 8 M4 26.65 dBV/m	Grid 9 M4 26.65 dBV/m

Cursor:

Total = 26.68 dBV/m

E Category: M4

Location: -7, 5, 8.7 mm



0 dB = 21.59 V/m = 26.69 dBV/m

#15_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 1/8th Rate_Ch580

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 820.5 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 820.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.84 V/m; Power Drift = 0.05 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.71 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.78 dBV/m	Grid 2 M4 25.93 dBV/m	Grid 3 M4 25.94 dBV/m
Grid 4 M4 23.24 dBV/m	Grid 5 M4 26.7 dBV/m	Grid 6 M4 26.69 dBV/m
Grid 7 M4 23.82 dBV/m	Grid 8 M4 26.68 dBV/m	Grid 9 M4 26.71 dBV/m

Cursor:

Total = 26.71 dBV/m

E Category: M4

Location: -13, 10, 8.7 mm

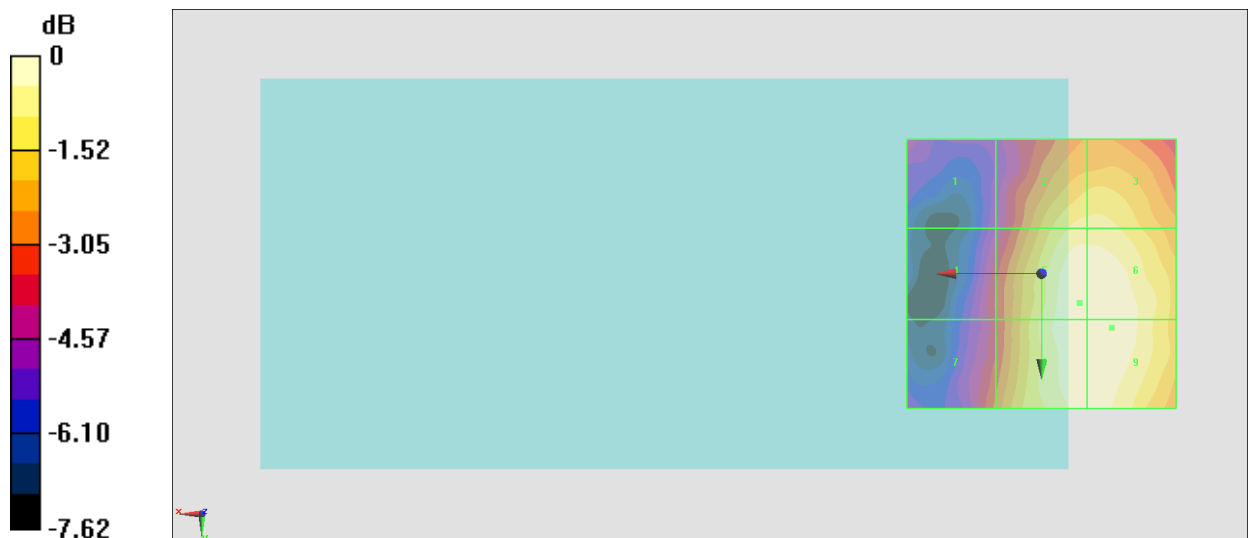

0 dB = 21.65 V/m = 26.71 dBV/m

#16_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 1/8th Rate_Ch684

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 823.1 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 823.1 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.66 V/m; Power Drift = 0.06 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.21 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.41 dBV/m	Grid 2 M4 25.07 dBV/m	Grid 3 M4 25.07 dBV/m
Grid 4 M4 23.01 dBV/m	Grid 5 M4 26.06 dBV/m	Grid 6 M4 26.04 dBV/m
Grid 7 M4 24.01 dBV/m	Grid 8 M4 26.21 dBV/m	Grid 9 M4 26.21 dBV/m

Cursor:

Total = 26.21 dBV/m

E Category: M4

Location: -8.5, 25, 8.7 mm

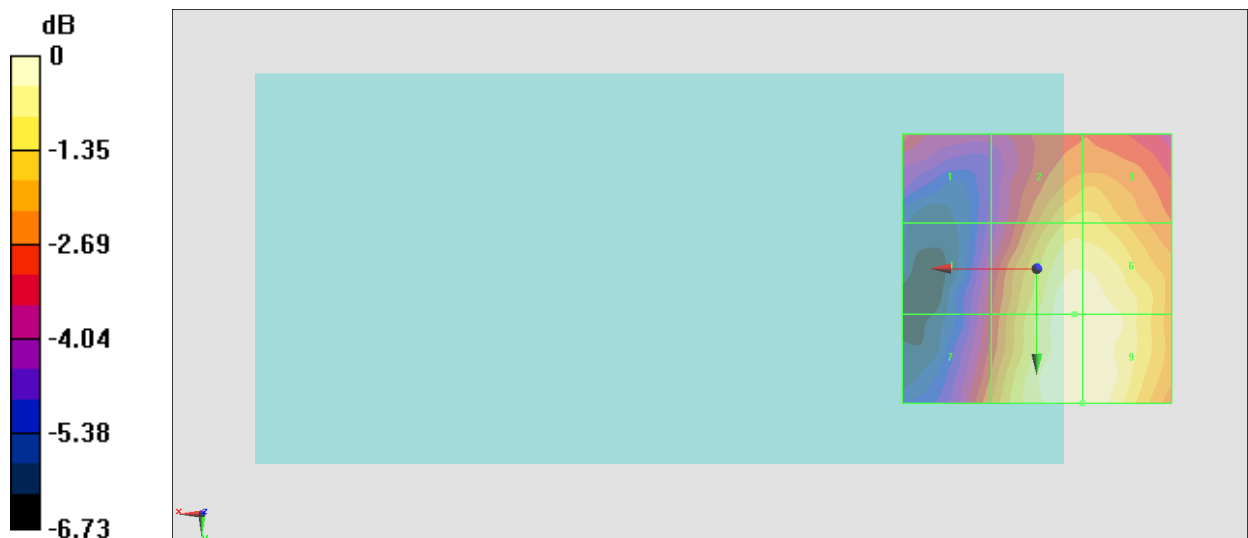

0 dB = 20.44 V/m = 26.21 dBV/m

#17_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.38 V/m; Power Drift = 0.06 dB

Applied MIF = -1.62 dB

RF audio interference level = 23.39 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 18.8 dBV/m	Grid 2 M4 21.77 dBV/m	Grid 3 M4 21.78 dBV/m
Grid 4 M4 19.66 dBV/m	Grid 5 M4 23.01 dBV/m	Grid 6 M4 23.03 dBV/m
Grid 7 M4 23.39 dBV/m	Grid 8 M4 23.07 dBV/m	Grid 9 M4 23.1 dBV/m

Cursor:

Total = 23.39 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

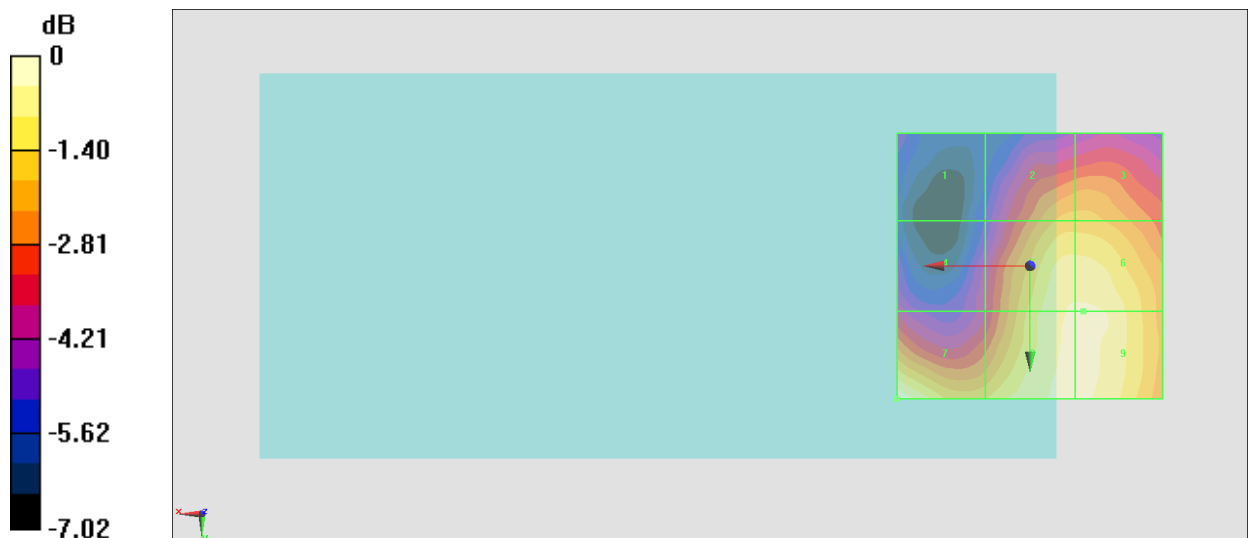

0 dB = 14.78 V/m = 23.39 dBV/m

#18_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.46 V/m; Power Drift = 0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.43 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.23 dBV/m	Grid 2 M4 21.09 dBV/m	Grid 3 M4 21.14 dBV/m
Grid 4 M4 17.75 dBV/m	Grid 5 M4 21.42 dBV/m	Grid 6 M4 21.43 dBV/m
Grid 7 M4 21.21 dBV/m	Grid 8 M4 21.39 dBV/m	Grid 9 M4 21.37 dBV/m

Cursor:

Total = 21.43 dBV/m

E Category: M4

Location: -10, 1.5, 8.7 mm

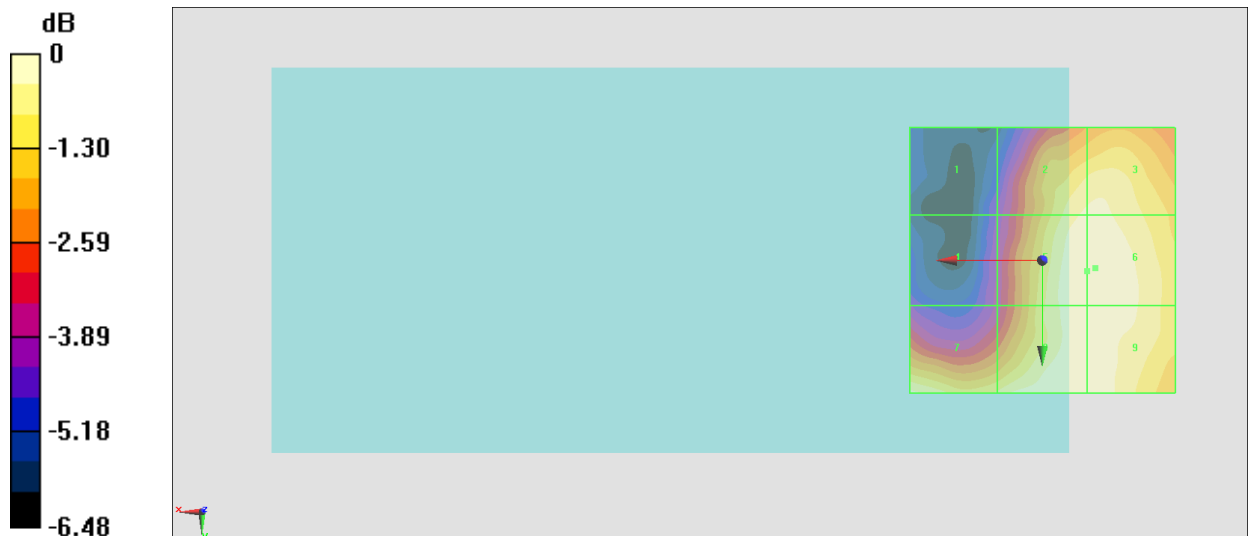

0 dB = 11.79 V/m = 21.43 dBV/m

#19_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.46 V/m; Power Drift = 0.02 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.53 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.91 dBV/m	Grid 2 M4 20.01 dBV/m	Grid 3 M4 20.01 dBV/m
Grid 4 M4 17.22 dBV/m	Grid 5 M4 20.53 dBV/m	Grid 6 M4 20.51 dBV/m
Grid 7 M4 19.17 dBV/m	Grid 8 M4 20.41 dBV/m	Grid 9 M4 20.41 dBV/m

Cursor:

Total = 20.53 dBV/m

E Category: M4

Location: -7, 1, 8.7 mm

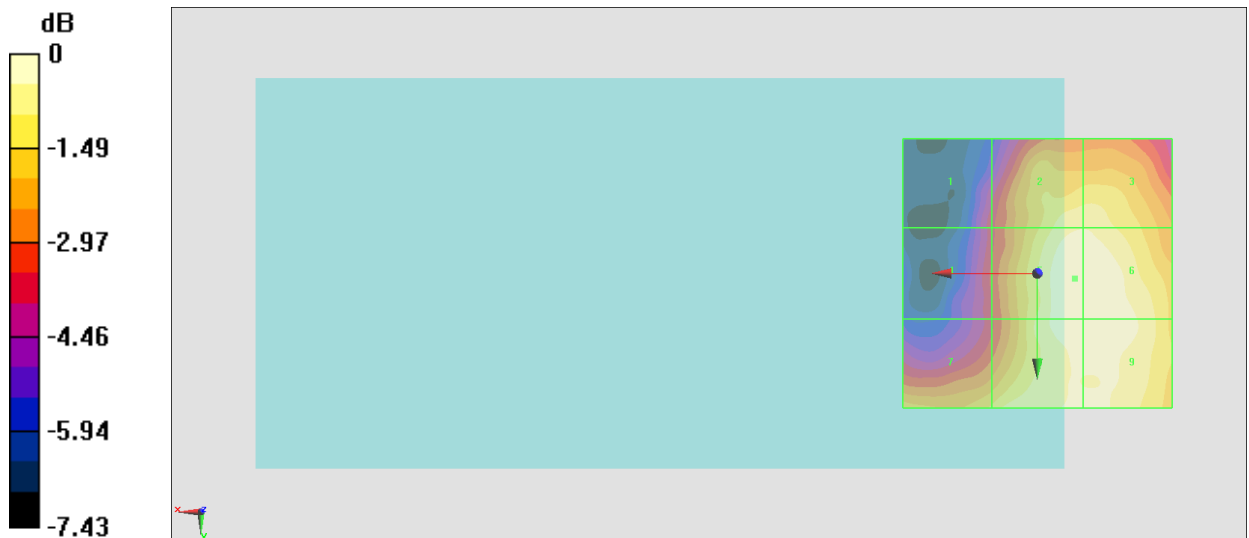

0 dB = 10.63 V/m = 20.53 dBV/m

#20_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.98 V/m; Power Drift = -0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.84 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.01 dBV/m	Grid 2 M4 19.77 dBV/m	Grid 3 M4 19.72 dBV/m
Grid 4 M4 16.22 dBV/m	Grid 5 M4 19.44 dBV/m	Grid 6 M4 19.44 dBV/m
Grid 7 M4 19.44 dBV/m	Grid 8 M4 19.84 dBV/m	Grid 9 M4 19.64 dBV/m

Cursor:

Total = 19.84 dBV/m

E Category: M4

Location: 4, 25, 8.7 mm

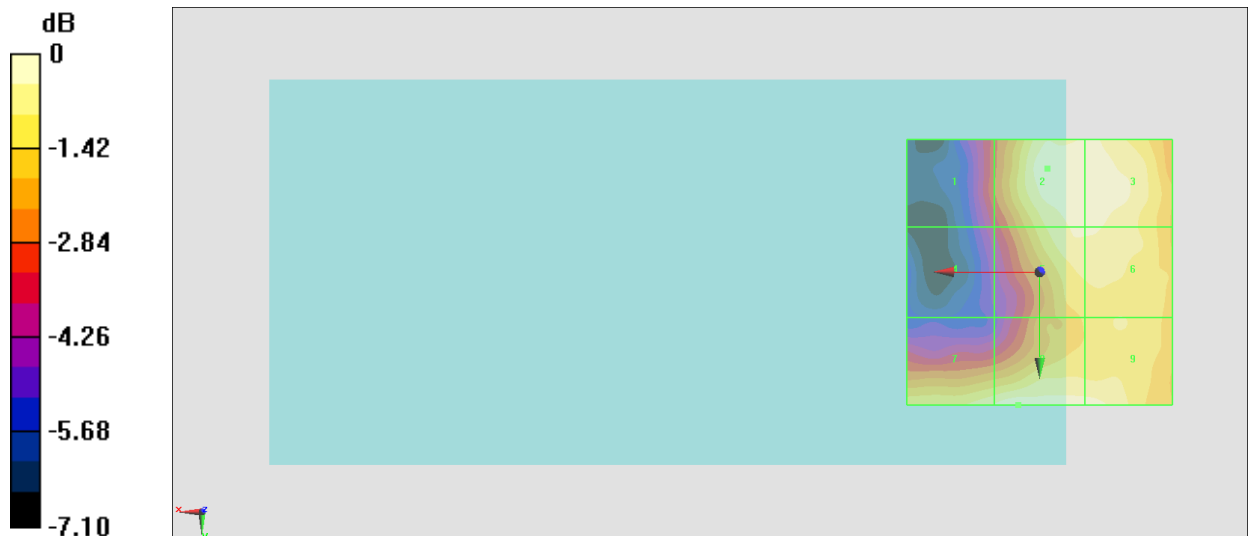

0 dB = 9.816 V/m = 19.84 dBV/m

#21_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.780 V/m; Power Drift = -0.10 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.80 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.72 dBV/m	Grid 2 M4 19.8 dBV/m	Grid 3 M4 19.68 dBV/m
Grid 4 M4 14.87 dBV/m	Grid 5 M4 18.14 dBV/m	Grid 6 M4 18.2 dBV/m
Grid 7 M4 18.28 dBV/m	Grid 8 M4 18.86 dBV/m	Grid 9 M4 18.7 dBV/m

Cursor:

Total = 19.80 dBV/m

E Category: M4

Location: -2, -23.5, 8.7 mm

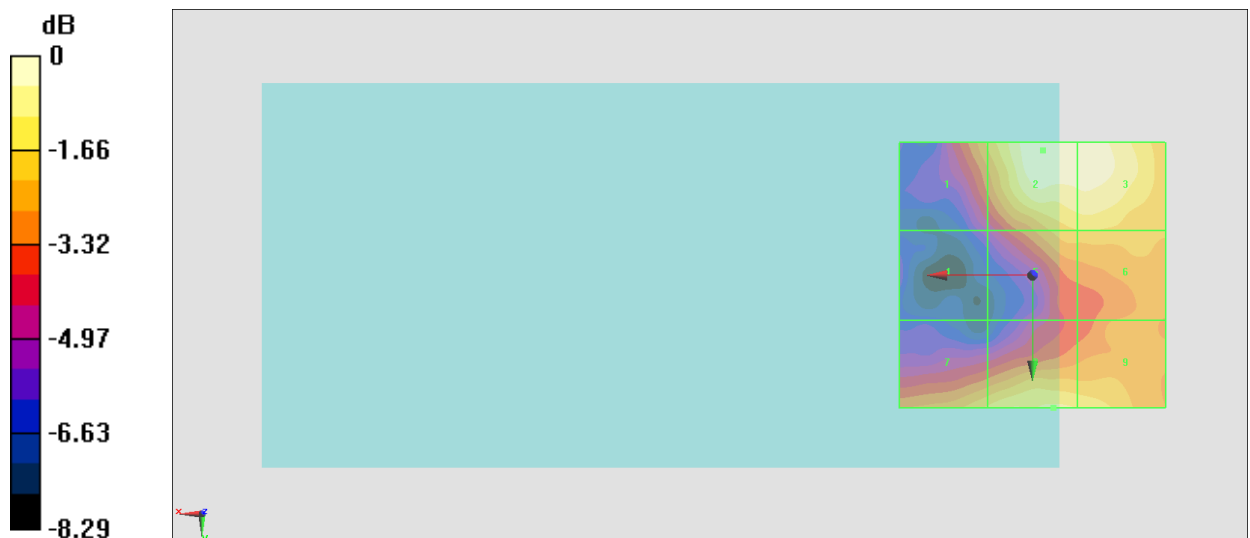

0 dB = 9.775 V/m = 19.80 dBV/m

#22_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.38 V/m; Power Drift = -0.00 dB

Applied MIF = -1.62 dB

RF audio interference level = 25.81 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.74 dBV/m	Grid 2 M4 22.35 dBV/m	Grid 3 M4 22.43 dBV/m
Grid 4 M4 23.86 dBV/m	Grid 5 M4 23.68 dBV/m	Grid 6 M4 23.75 dBV/m
Grid 7 M4 25.81 dBV/m	Grid 8 M4 23.92 dBV/m	Grid 9 M4 23.93 dBV/m

Cursor:

Total = 25.81 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

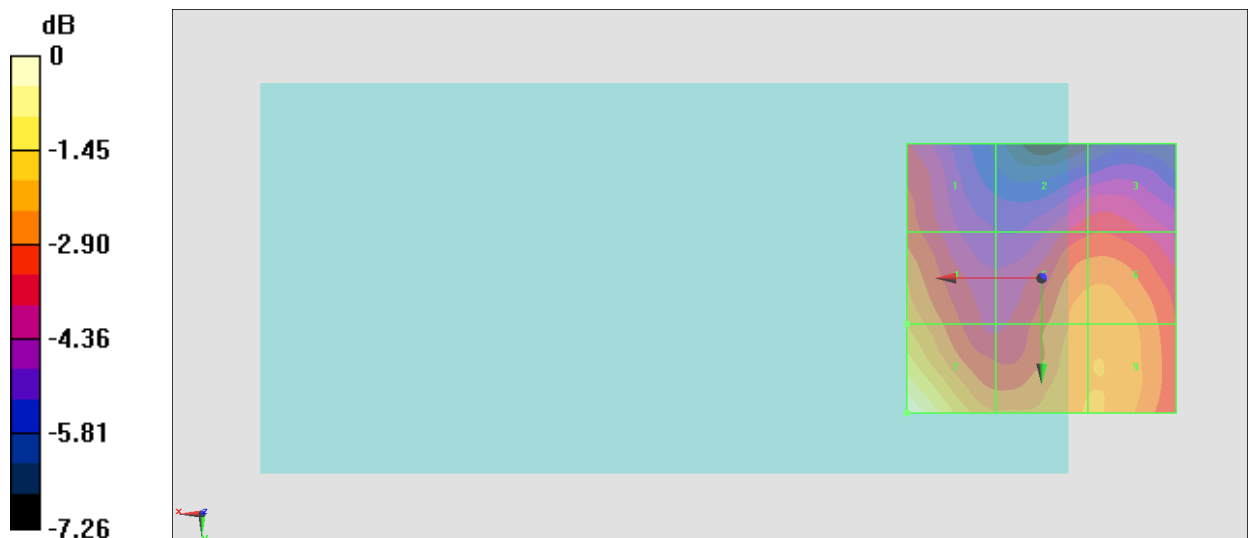

0 dB = 19.51 V/m = 25.81 dBV/m

#23_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.95 V/m; Power Drift = 0.09 dB

Applied MIF = -1.62 dB

RF audio interference level = 24.32 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.23 dBV/m	Grid 2 M4 22.08 dBV/m	Grid 3 M4 22.18 dBV/m
Grid 4 M4 22.91 dBV/m	Grid 5 M4 22.47 dBV/m	Grid 6 M4 22.53 dBV/m
Grid 7 M4 24.32 dBV/m	Grid 8 M4 22.71 dBV/m	Grid 9 M4 22.53 dBV/m

Cursor:

Total = 24.32 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

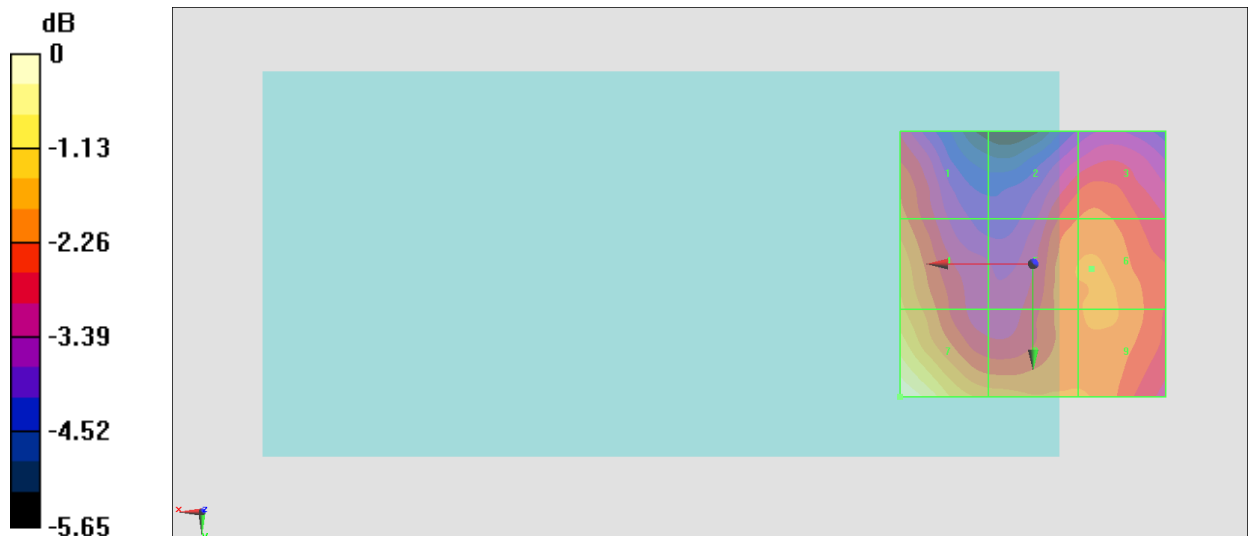

0 dB = 16.45 V/m = 24.32 dBV/m

#24_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.98 V/m; Power Drift = 0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.57 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.95 dBV/m	Grid 2 M4 20.92 dBV/m	Grid 3 M4 20.97 dBV/m
Grid 4 M4 17.28 dBV/m	Grid 5 M4 21.48 dBV/m	Grid 6 M4 21.56 dBV/m
Grid 7 M4 20.25 dBV/m	Grid 8 M4 21.39 dBV/m	Grid 9 M4 21.57 dBV/m

Cursor:

Total = 21.57 dBV/m

E Category: M4

Location: -13.5, 9.5, 8.7 mm

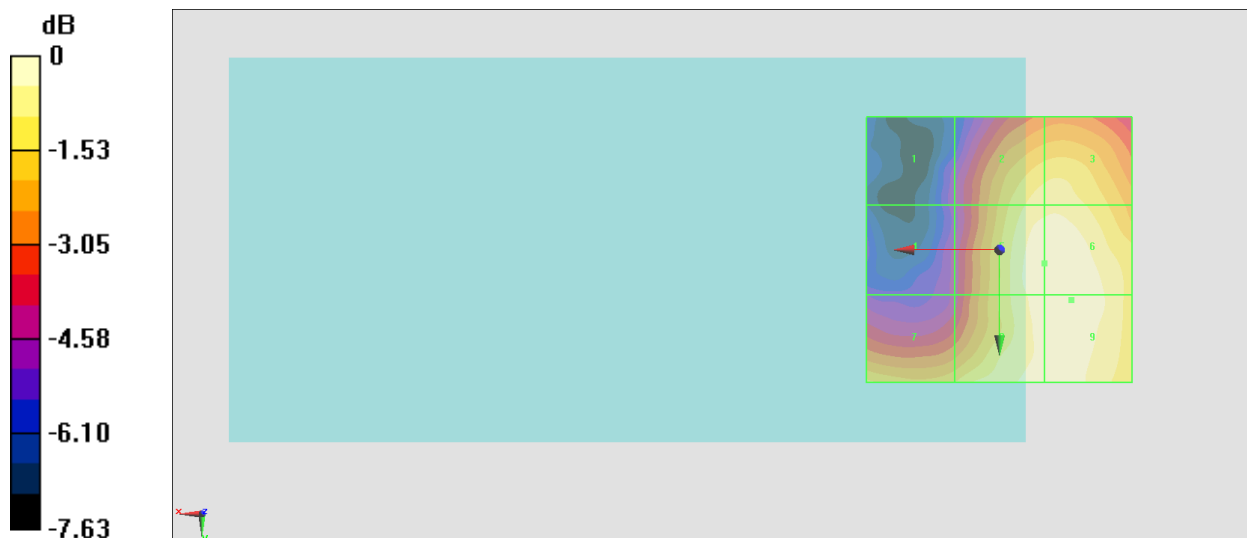

0 dB = 11.98 V/m = 21.57 dBV/m

#25_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.17 V/m; Power Drift = 0.07 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.90 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.85 dBV/m	Grid 2 M4 20.81 dBV/m	Grid 3 M4 20.9 dBV/m
Grid 4 M4 16.12 dBV/m	Grid 5 M4 20.41 dBV/m	Grid 6 M4 20.52 dBV/m
Grid 7 M4 20.34 dBV/m	Grid 8 M4 20.8 dBV/m	Grid 9 M4 20.8 dBV/m

Cursor:

Total = 20.90 dBV/m

E Category: M4

Location: -11, -15.5, 8.7 mm

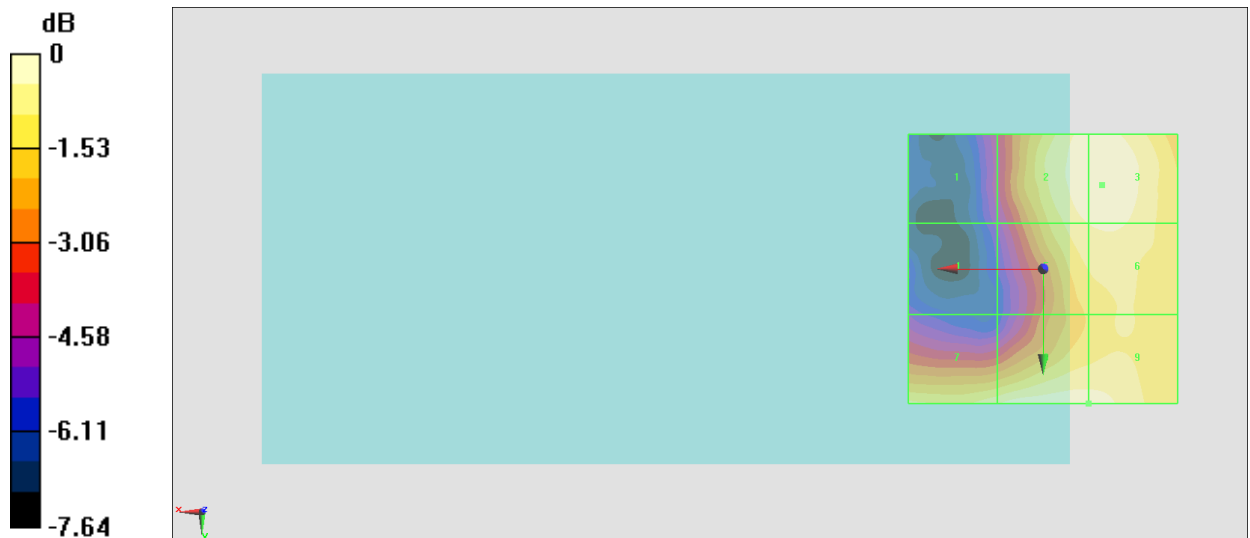

0 dB = 11.09 V/m = 20.90 dBV/m

#26_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.704 V/m; Power Drift = 0.18 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.05 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.87 dBV/m	Grid 2 M4 21.03 dBV/m	Grid 3 M4 21.05 dBV/m
Grid 4 M4 15.46 dBV/m	Grid 5 M4 19.18 dBV/m	Grid 6 M4 19.3 dBV/m
Grid 7 M4 19.28 dBV/m	Grid 8 M4 20.17 dBV/m	Grid 9 M4 20.13 dBV/m

Cursor:

Total = 21.05 dBV/m

E Category: M4

Location: -9.5, -25, 8.7 mm

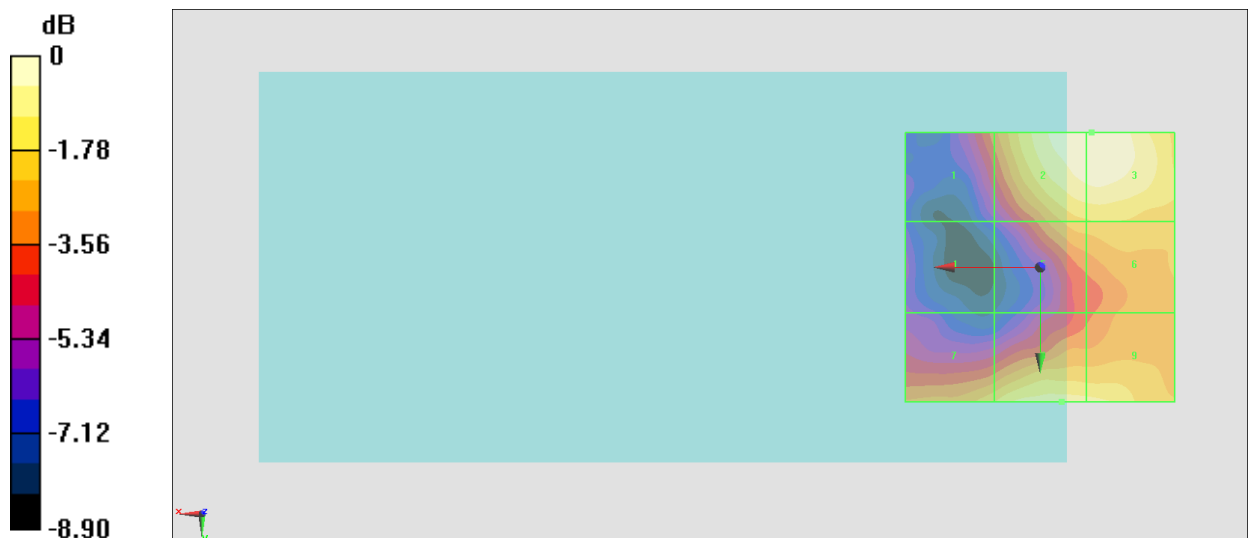

0 dB = 11.28 V/m = 21.05 dBV/m