

#01_HAC_E_GSM850_GSM Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.73 V/m; Power Drift = -0.17 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.21 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.09 dBV/m	Grid 2 M4 24.66 dBV/m	Grid 3 M4 24.28 dBV/m
Grid 4 M4 25.27 dBV/m	Grid 5 M4 25.4 dBV/m	Grid 6 M4 24.98 dBV/m
Grid 7 M4 26.06 dBV/m	Grid 8 M4 26.21 dBV/m	Grid 9 M4 25.07 dBV/m

Cursor:

Total = 26.21 dBV/m

E Category: M4

Location: 4, 24, 8.7 mm

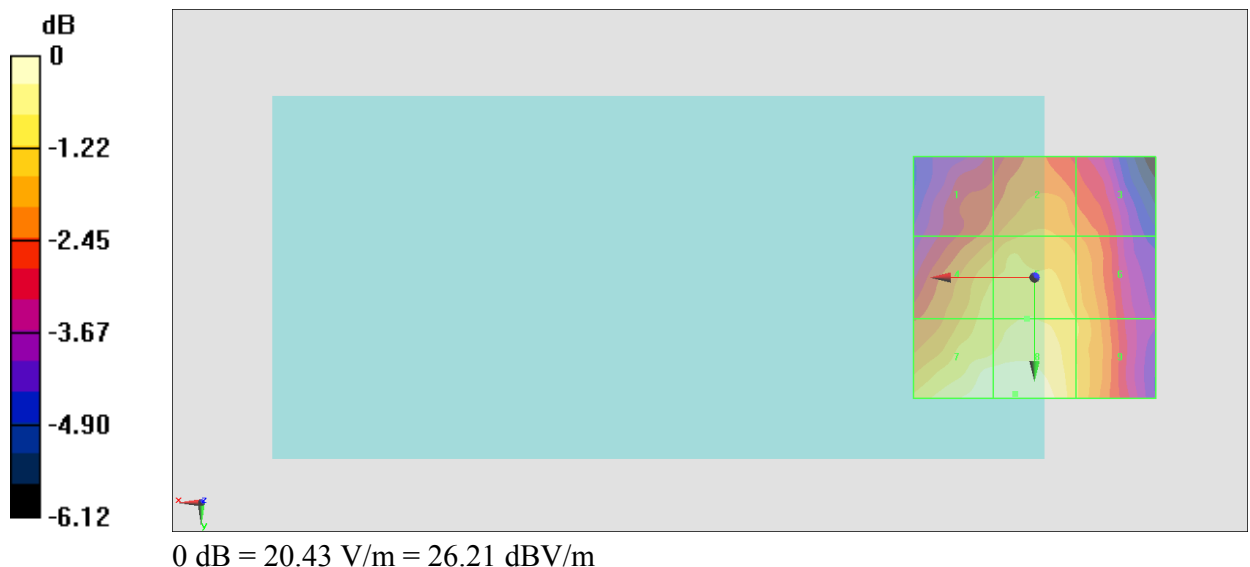

#02_HAC_E_GSM850_GSM Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.26 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.70 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 24.15 dBV/m	Grid 2 M4 24.79 dBV/m	Grid 3 M4 24.24 dBV/m
Grid 4 M4 25.49 dBV/m	Grid 5 M4 25.79 dBV/m	Grid 6 M4 25.34 dBV/m
Grid 7 M4 26.63 dBV/m	Grid 8 M4 26.7 dBV/m	Grid 9 M4 25.76 dBV/m

Cursor:

Total = 26.70 dBV/m

E Category: M4

Location: 2, 25, 8.7 mm



#03_HAC_E_GSM850_GSM Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.72 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.88 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.97 dBV/m	Grid 2 M4 24.06 dBV/m	Grid 3 M4 23.75 dBV/m
Grid 4 M4 24.3 dBV/m	Grid 5 M4 24.97 dBV/m	Grid 6 M4 24.81 dBV/m
Grid 7 M4 25.67 dBV/m	Grid 8 M4 25.88 dBV/m	Grid 9 M4 25.12 dBV/m

Cursor:

Total = 25.88 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

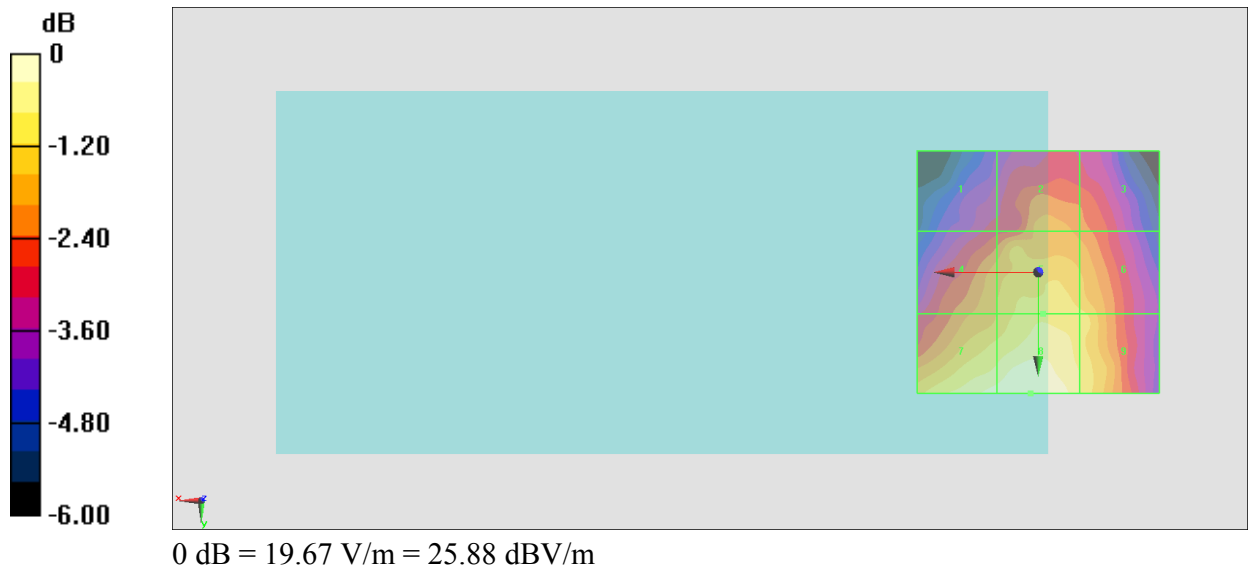

#04_HAC_E_GSM1900_GSM Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.586 V/m; Power Drift = 0.19 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.79 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 24.81 dBV/m	Grid 2 M4 25.79 dBV/m	Grid 3 M4 25.44 dBV/m
Grid 4 M4 20.05 dBV/m	Grid 5 M4 21.44 dBV/m	Grid 6 M4 22.16 dBV/m
Grid 7 M4 24.8 dBV/m	Grid 8 M4 25.36 dBV/m	Grid 9 M4 24.8 dBV/m

Cursor:

Total = 25.79 dBV/m

E Category: M4

Location: -1.5, -25, 8.7 mm



#05_HAC_E_GSM1900_GSM Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.305 V/m; Power Drift = 0.12 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.91 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.55 dBV/m	Grid 2 M4 25.91 dBV/m	Grid 3 M4 25.71 dBV/m
Grid 4 M4 19.56 dBV/m	Grid 5 M4 20.81 dBV/m	Grid 6 M4 21.28 dBV/m
Grid 7 M4 24.47 dBV/m	Grid 8 M4 24.85 dBV/m	Grid 9 M4 23.91 dBV/m

Cursor:

Total = 25.91 dBV/m

E Category: M4

Location: -2.5, -25, 8.7 mm

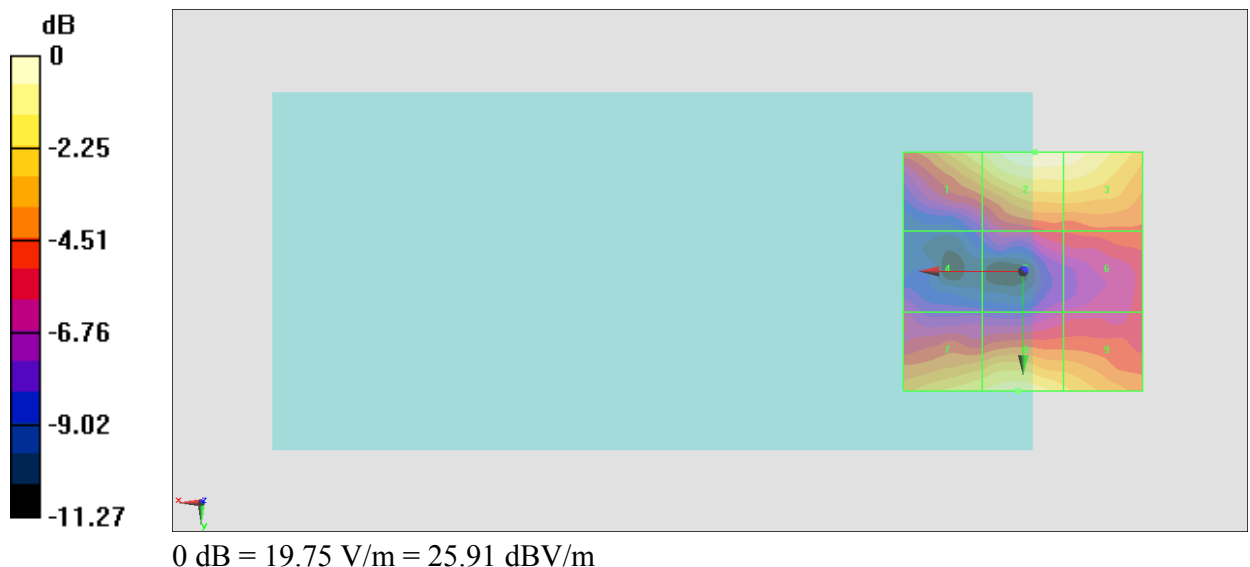

#06_HAC_E_GSM1900_GSM Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.991 V/m; Power Drift = -0.18 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.30 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 26 dBV/m	Grid 2 M4 27.3 dBV/m	Grid 3 M4 26.98 dBV/m
Grid 4 M4 20.92 dBV/m	Grid 5 M4 23.32 dBV/m	Grid 6 M4 23.94 dBV/m
Grid 7 M4 25.67 dBV/m	Grid 8 M4 25.91 dBV/m	Grid 9 M4 25.17 dBV/m

Cursor:

Total = 27.30 dBV/m

E Category: M4

Location: -1.5, -25, 8.7 mm

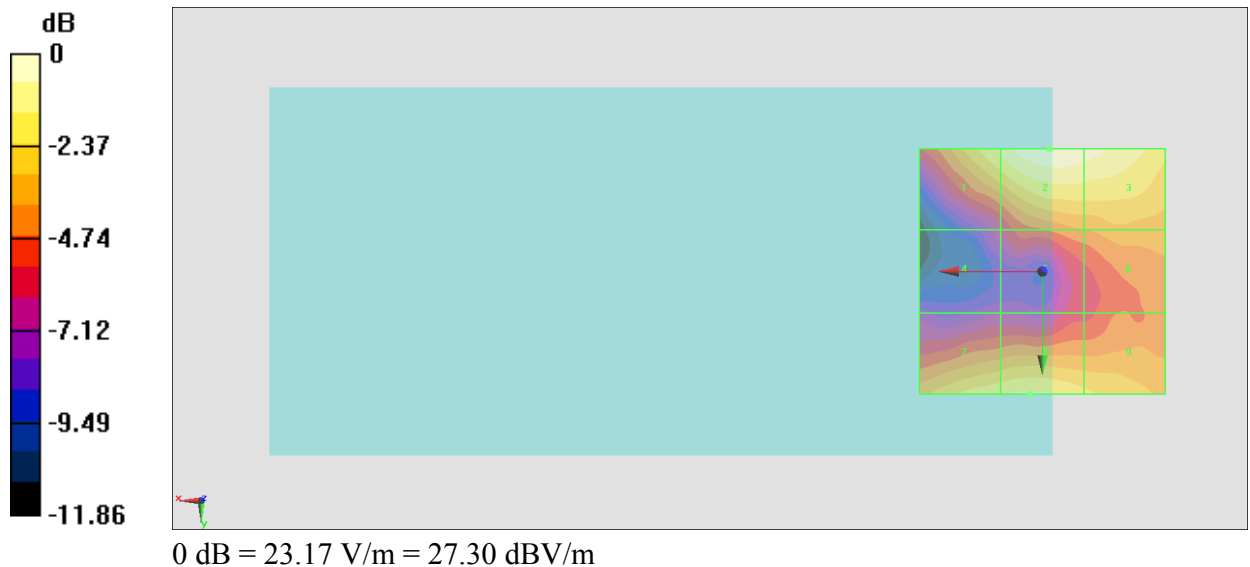

#07_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40670

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2598 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2598 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.092 V/m; Power Drift = 0.08 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.32 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.38 dBV/m	Grid 2 M4 19.32 dBV/m	Grid 3 M4 19.11 dBV/m
Grid 4 M4 13.59 dBV/m	Grid 5 M4 15.54 dBV/m	Grid 6 M4 15.47 dBV/m
Grid 7 M4 13.32 dBV/m	Grid 8 M4 15.49 dBV/m	Grid 9 M4 15.05 dBV/m

Cursor:

Total = 19.32 dBV/m

E Category: M4

Location: -5, -25, 8.7 mm

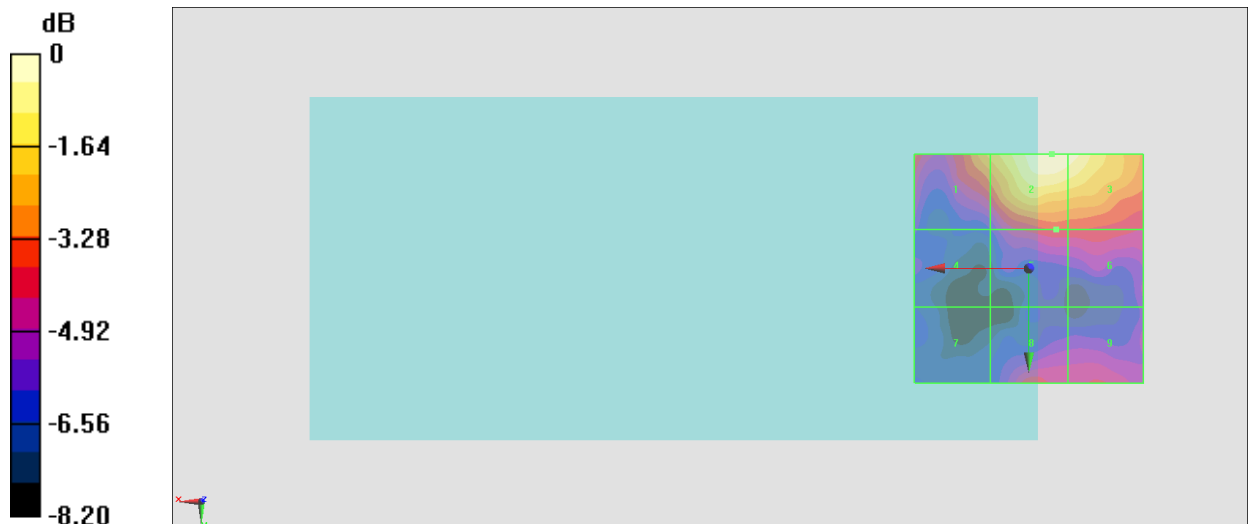

0 dB = 9.244 V/m = 19.32 dBV/m

#08_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40140

Communication System: 10172 - CAC, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2545 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2545 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.711 V/m; Power Drift = -0.11 dB

Applied MIF = -1.62 dB

RF audio interference level = 17.96 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 16.66 dBV/m	Grid 2 M4 17.96 dBV/m	Grid 3 M4 17.9 dBV/m
Grid 4 M4 13.01 dBV/m	Grid 5 M4 14.27 dBV/m	Grid 6 M4 14.37 dBV/m
Grid 7 M4 12.89 dBV/m	Grid 8 M4 15.5 dBV/m	Grid 9 M4 15.3 dBV/m

Cursor:

Total = 17.96 dBV/m

E Category: M4

Location: -5, -25, 8.7 mm

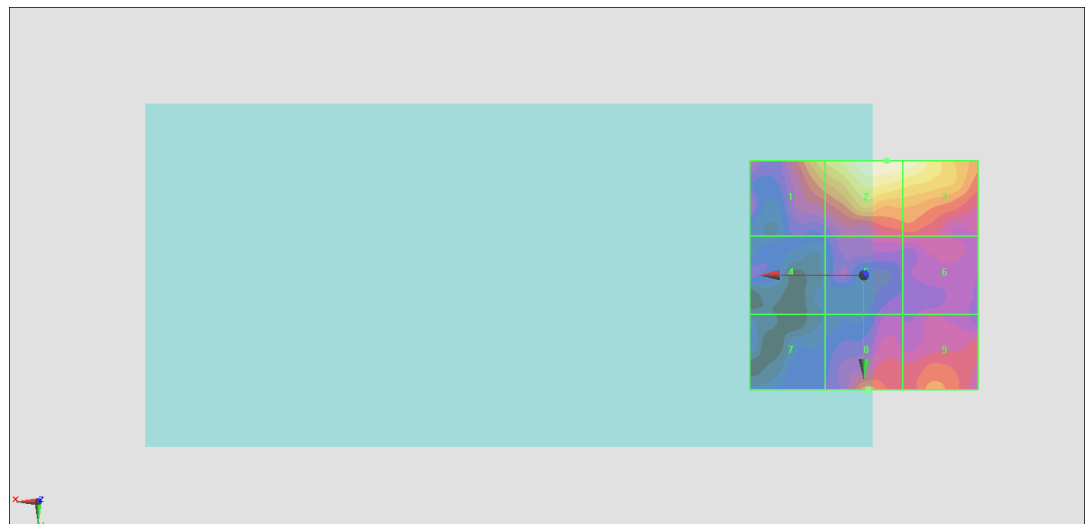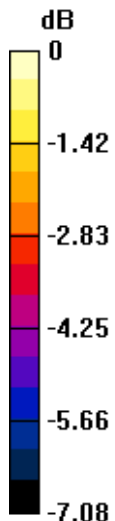

0 dB = 7.904 V/m = 17.96 dBV/m

#09_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40400

Communication System: 10172 - CAC, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2571 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2571 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.298 V/m; Power Drift = 0.14 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.08 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.64 dBV/m	Grid 2 M4 20.08 dBV/m	Grid 3 M4 19.92 dBV/m
Grid 4 M4 14.42 dBV/m	Grid 5 M4 16.64 dBV/m	Grid 6 M4 16.89 dBV/m
Grid 7 M4 14.09 dBV/m	Grid 8 M4 16.35 dBV/m	Grid 9 M4 16.74 dBV/m

Cursor:

Total = 20.08 dBV/m

E Category: M4

Location: -5, -25, 8.7 mm

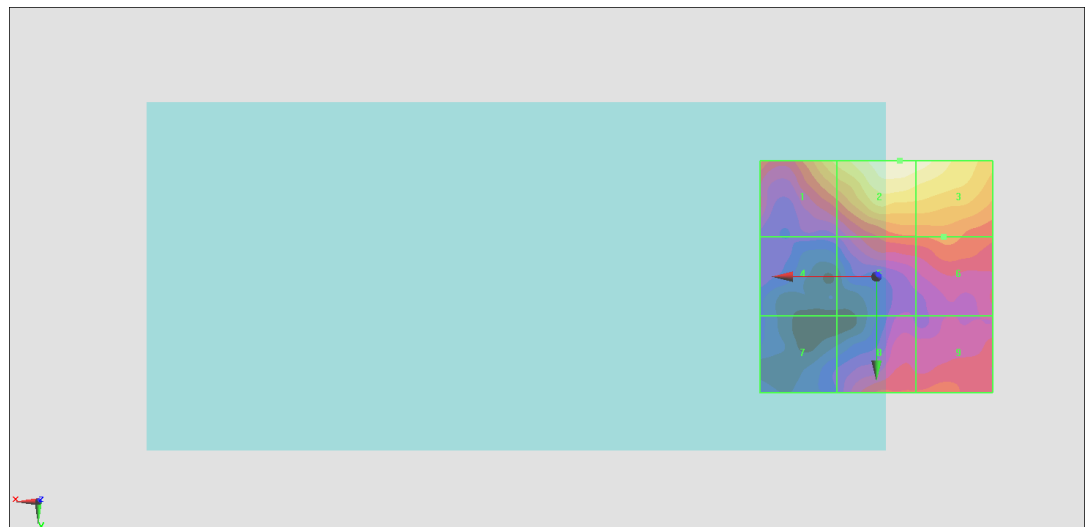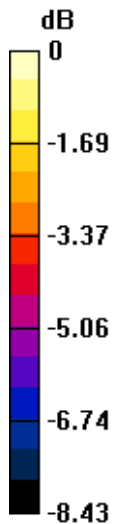

0 dB = 10.09 V/m = 20.08 dBV/m

#10_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41140

Communication System: 10172 - CAC, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2645 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2645 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.955 V/m; Power Drift = 0.11 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.97 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 18.46 dBV/m	Grid 2 M4 19.97 dBV/m	Grid 3 M4 19.67 dBV/m
Grid 4 M4 14.54 dBV/m	Grid 5 M4 16.98 dBV/m	Grid 6 M4 16.99 dBV/m
Grid 7 M4 14.27 dBV/m	Grid 8 M4 14.95 dBV/m	Grid 9 M4 14.64 dBV/m

Cursor:

Total = 19.97 dBV/m

E Category: M4

Location: -4, -25, 8.7 mm

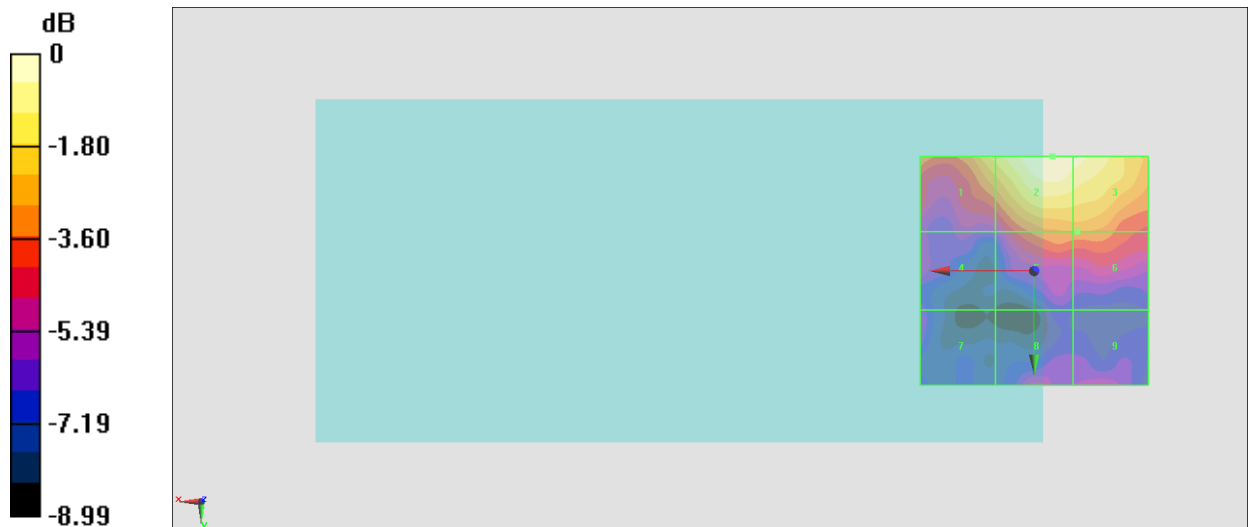

0 dB = 9.967 V/m = 19.97 dBV/m

#11_HAC_E_WLAN2.4GHz_802.11g_6Mbps_Ch6

Communication System: 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5893

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.237 V/m; Power Drift = 0.13 dB

Applied MIF = 0.12 dB

RF audio interference level = 12.34 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 11.11 dBV/m	Grid 2 M4 11.54 dBV/m	Grid 3 M4 11.19 dBV/m
Grid 4 M4 11.76 dBV/m	Grid 5 M4 11.96 dBV/m	Grid 6 M4 11.35 dBV/m
Grid 7 M4 12.34 dBV/m	Grid 8 M4 12.12 dBV/m	Grid 9 M4 11.8 dBV/m

Cursor:

Total = 12.34 dBV/m

E Category: M4

Location: 25, 11.5, 8.7 mm

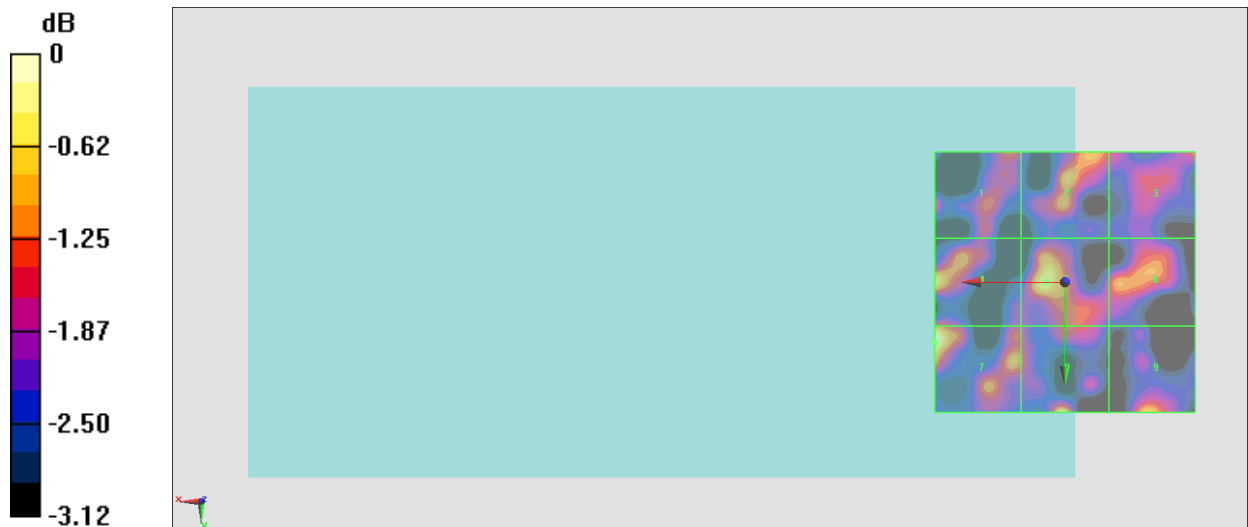

0 dB = 4.141 V/m = 12.34 dBV/m

#12_HAC_E_WLAN2.4GHz_802.11g_6Mbps_Ch1

Communication System: 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5893

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.496 V/m; Power Drift = 0.07 dB

Applied MIF = 0.12 dB

RF audio interference level = 12.16 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 11.94 dBV/m	Grid 2 M4 12.16 dBV/m	Grid 3 M4 10.53 dBV/m
Grid 4 M4 11.58 dBV/m	Grid 5 M4 11.88 dBV/m	Grid 6 M4 11.77 dBV/m
Grid 7 M4 11.02 dBV/m	Grid 8 M4 12.01 dBV/m	Grid 9 M4 11.26 dBV/m

Cursor:

Total = 12.16 dBV/m

E Category: M4

Location: -1.5, -20, 8.7 mm

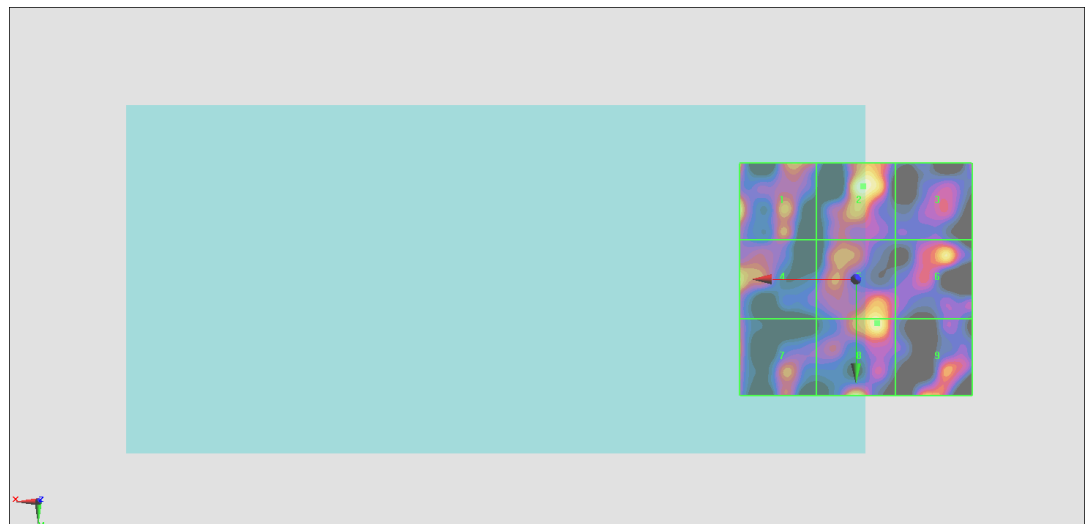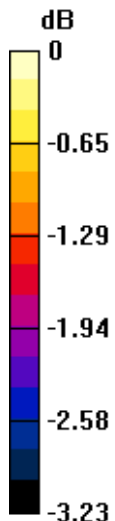

0 dB = 4.054 V/m = 12.16 dBV/m

#13_HAC_E_WLAN2.4GHz_802.11g_6Mbps_Ch11

Communication System: 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2462 MHz; Duty Cycle: 1:12.5893

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2462 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.519 V/m; Power Drift = 0.03 dB

Applied MIF = 0.12 dB

RF audio interference level = 12.97 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 12.13 dBV/m	Grid 2 M4 12.97 dBV/m	Grid 3 M4 11.94 dBV/m
Grid 4 M4 11.96 dBV/m	Grid 5 M4 12.09 dBV/m	Grid 6 M4 12.52 dBV/m
Grid 7 M4 11.83 dBV/m	Grid 8 M4 12.39 dBV/m	Grid 9 M4 11.93 dBV/m

Cursor:

Total = 12.97 dBV/m

E Category: M4

Location: 0, -15, 8.7 mm

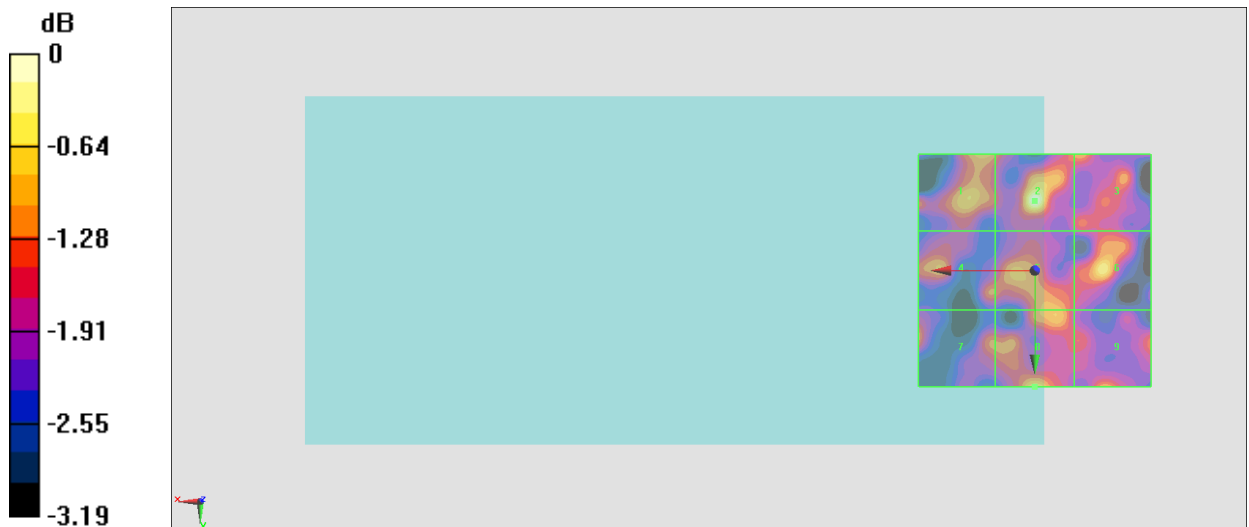

0 dB = 4.449 V/m = 12.97 dBV/m