



<b>BT CH 78 2480MHz</b>	*	2480	99.59	-	-	96.82	27.54	6.33	31.1	354	311	P	H
	*	2480	74.8	-	-	-	-	-	-	-	-	A	H
		2483.52	46.7	-27.3	74	43.94	27.53	6.33	31.1	354	311	P	H
		2483.52	21.91	-32.09	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	104.64	-	-	101.87	27.54	6.33	31.1	100	16	P	V
	*	2480	79.85	-	-	-	-	-	-	-	-	A	V
		2483.52	51.52	-22.48	74	48.76	27.53	6.33	31.1	100	16	P	V
		2483.52	26.73	-27.27	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	35.15	-38.85	74	53.48	31.21	9.62	59.16	100	0	P	H	
		4804	10.36	-43.64	54	-	-	-	-	-	-	A	H	
													H	
													H	
			4804	35.19	-38.81	74	53.52	31.21	9.62	59.16	100	0	P	V
			4804	10.4	-43.6	54	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	35.87	-38.13	74	54.18	31.24	9.63	59.18	100	0	P	H	
		4882	11.08	-42.92	54	-	-	-	-	-	-	A	H	
		7323	41.19	-32.81	74	52.11	36.55	11.7	59.17	100	0	P	H	
		7323	16.4	-37.6	54	-	-	-	-	-	-	A	H	
			4882	34.74	-39.26	74	53.05	31.24	9.63	59.18	100	0	P	V
			4882	9.95	-44.05	54	-	-	-	-	-	-	A	V
			7323	42.46	-31.54	74	53.38	36.55	11.7	59.17	100	0	P	V
			7323	17.67	-36.33	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	35.58	-38.42	74	53.58	31.54	9.65	59.19	100	0	P	H	
		4960	10.79	-43.21	54	-	-	-	-	-	-	A	H	
		7440	41.18	-32.82	74	51.98	36.56	11.76	59.12	100	0	P	H	
		7440	16.39	-37.61	54	-	-	-	-	-	-	A	H	
			4960	37.11	-36.89	74	55.11	31.54	9.65	59.19	100	0	P	V
			4960	12.32	-41.68	54	-	-	-	-	-	-	A	V
			7440	41.39	-32.61	74	52.19	36.56	11.76	59.12	100	0	P	V
			7440	16.6	-37.4	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		52.31	23.75	-16.25	40	41.92	13.41	0.95	32.53	-	-	P	H	
		96.93	23.22	-20.28	43.5	38.6	15.68	1.33	32.39	-	-	P	H	
		298.69	38.1	-7.9	46	48.76	19.27	2.28	32.21	100	0	P	H	
		325.85	31.05	-14.95	46	41.2	19.63	2.35	32.13	-	-	P	H	
		426.73	29.92	-16.08	46	36.7	22.7	2.66	32.14	-	-	P	H	
		722.58	34.22	-11.78	46	35.38	27.3	3.48	31.94	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			35.82	26.94	-13.06	40	36.49	22.13	0.77	32.45	100	0	P	V
			82.38	26.16	-13.84	40	43.58	13.78	1.24	32.44	-	-	P	V
			298.69	31.01	-14.99	46	41.67	19.27	2.28	32.21	-	-	P	V
			324.88	29.68	-16.32	46	39.87	19.6	2.35	32.14	-	-	P	V
			405.39	32.09	-13.91	46	39.34	22.11	2.6	31.96	-	-	P	V
			518.88	31.73	-14.27	46	37.4	24.1	2.96	32.73	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Leo Lee, Mancy Chou and Bigshow Wang	Temperature :	23.9~25.2°C
		Relative Humidity :	53~60%



### Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)


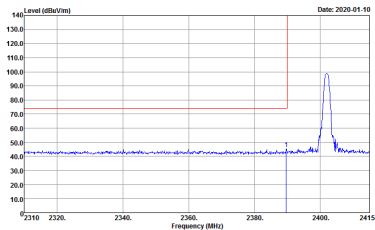
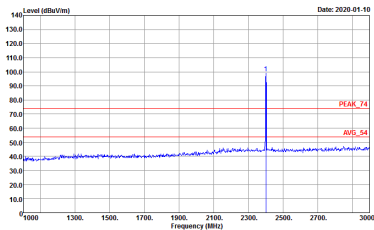
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH00 2402MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH15-HY            Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 900635</p>	 <p>Site : 03CH15-HY            Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 900635</p>

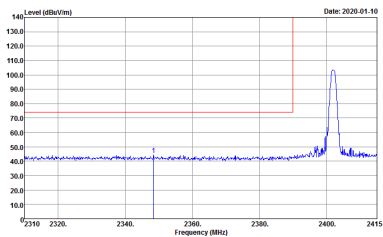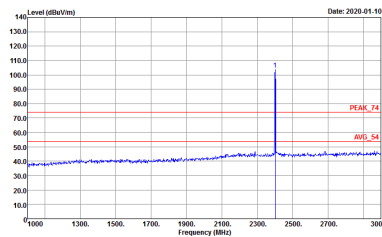




BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH00 2402MHz		
Vertical		Fundamental
Peak	 <p data-bbox="430 728 702 795">Site : 03CH15-11Y Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : 900635</p>	 <p data-bbox="901 728 1173 795">Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 900635</p>



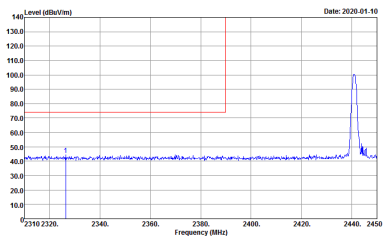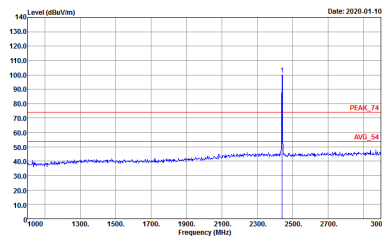
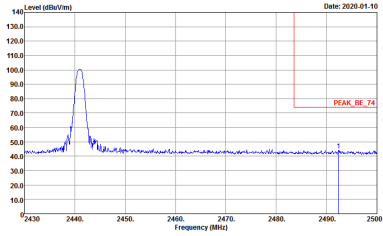


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2020-01-10</p> <p>Site : 03CH15-HY            Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL            Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Project : 9D0635</p>	 <p>Date: 2020-01-10</p> <p>Site : 03CH15-HY            Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL            Detector : Peak            Project : 9D0635</p>
<p><b>Peak</b></p>	 <p>Date: 2020-01-10</p> <p>Site : 03CH15-HY            Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL            Detector : Peak            Project : 9D0635</p>	<p><b>Left blank</b></p>

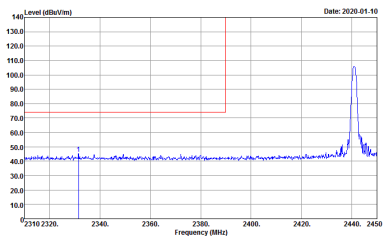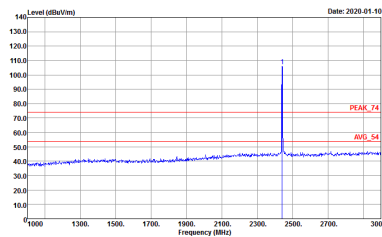
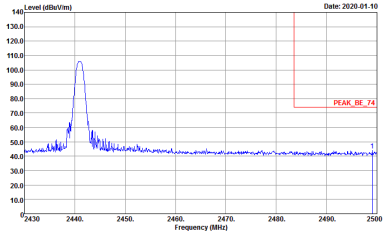


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH15-HY            Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL            Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Project : 9D0635</p>	 <p>Site : 03CH15-HY            Condition : PEAK_74 3m 91200_15_1620 VERTICAL            Detector : Peak            Project : 9D0635</p>
Peak	 <p>Site : 03CH15-HY            Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL            Detector : Peak            Project : 9D0635</p>	Left blank

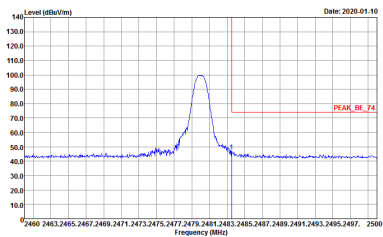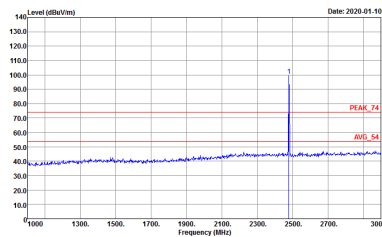

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH15-11Y Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 900635</p>	 <p>Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 900635</p>

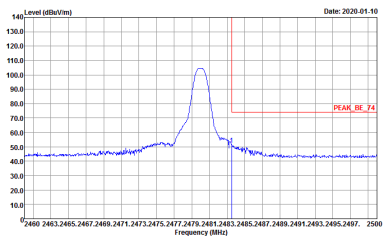
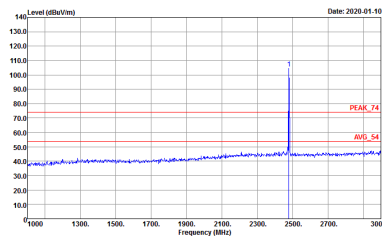


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
Vertical		Fundamental
Peak	 <p data-bbox="430 728 813 795">Site : 03CH15-11Y Condition : PEAK_BE_74 3m 9120D_15_1620 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 900635</p>	 <p data-bbox="901 728 1284 795">Site : 03CH15-11Y Condition : PEAK_74 3m 9120D_15_1620 VERTICAL Detector : Peak Project : 900635</p>





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

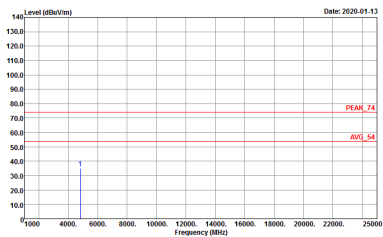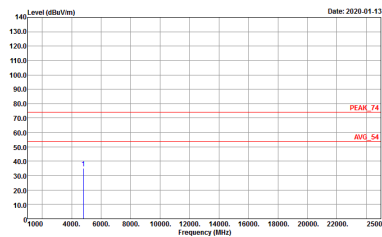BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635</p>	 <p>Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635</p>

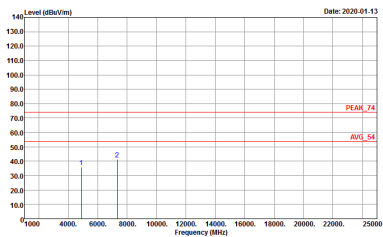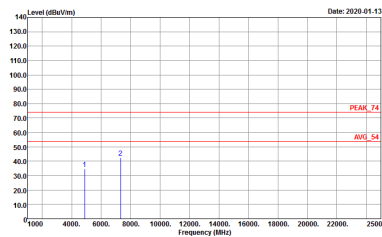

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH39 2441MHz	
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635</p>	 <p>Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635</p>

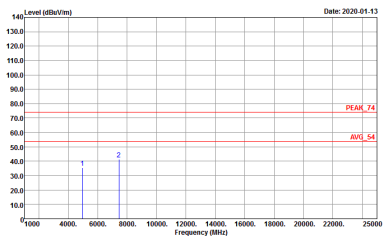
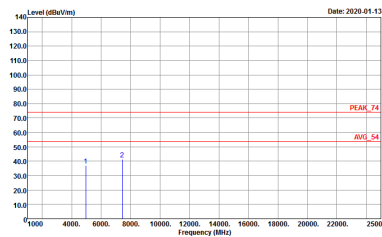


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH78 2480MHz		
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635</p>	 <p>Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635</p>



Emission below 1GHz

2.4GHz BT (LF)

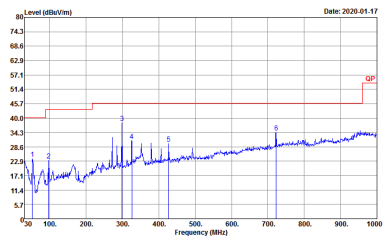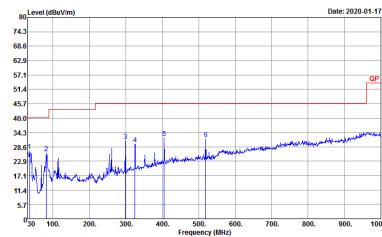
BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p data-bbox="430 873 813 929">Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 HORIZONTAL Detector : Peak Project : 9D0635</p>	 <p data-bbox="901 873 1284 929">Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 VERTICAL Detector : Peak Project : 9D0635</p>






# Appendix E. Duty Cycle Plots

### DH5 on time (One Pulse) Plot on Channel 39

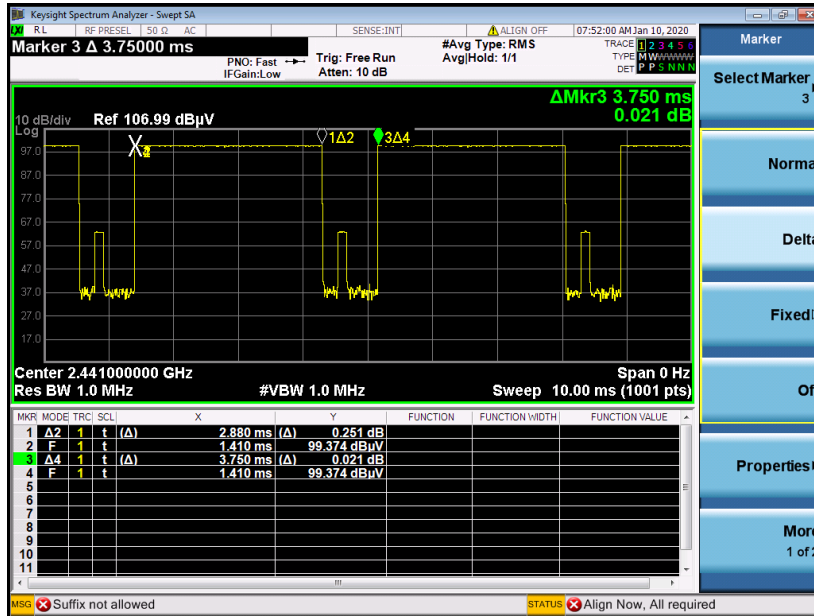

### on time (Count Pulses) Plot on Channel 39

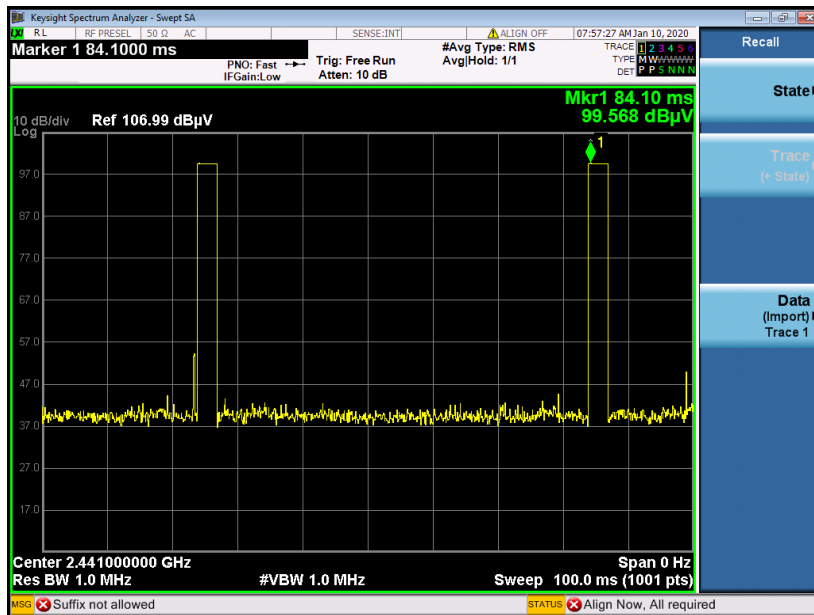

#### Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

—————THE END—————