



# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2041-4, XT2041-6, XT2041-7, XT2041DL  
FCC ID : IHDT56YL1  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Sep. 20, 2019 and testing was completed on Oct. 05, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 8

    1.7. Test Software ..... 8

    1.8. Applicable Standards ..... 8

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 13

    2.4. EUT Operation Test Setup ..... 14

**3. TEST RESULT ..... 15**

    3.1. Test of AC Conducted Emission Measurement ..... 15

    3.2. Test of Radiated Emission Measurement ..... 19

**4. LIST OF MEASURING EQUIPMENT ..... 23**

**5. UNCERTAINTY OF EVALUATION ..... 24**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC992001	Rev. 01	Initial issue of report	Dec. 10, 2019



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.82 dB at 0.535 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.19 dB at 46.490 MHz for Quasi-Peak

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2041-4, XT2041-6, XT2041-7, XT2041DL
FCC ID	IHDT56YL1
EUT supports Radios application	CDMA/GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conduction: 357244100012064 Radiation: 357244100011785
HW Version	DVT2
SW Version	QPM30.55
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different model names are for different market requirement.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 14 : 790.5 MHz ~ 795.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA2000 BC10: 817.9 MHz ~ 823.1 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 14 : 760.5 MHz ~ 765.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 29 : 718.5 MHz ~ 726.5 MHz LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 2110.7 MHz~ 2199.3 MHz LTE Band 71: 619.5 MHz ~ 649.5MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz



	<p>CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz          CDMA2000 BC10: 862.9 MHz ~ 868.1 MHz          802.11b/g/n: 2412 MHz ~ 2462 MHz          802.11a/n/ac: 5180 MHz ~ 5240 MHz;                            5260 MHz ~ 5320 MHz;                            5500 MHz ~ 5700 MHz                            5745 MHz ~ 5825 MHz          Bluetooth: 2402 MHz ~ 2480 MHz          GNSS : 1559 MHz ~ 1610 MHz          FM: 87.5 MHz ~ 108 MHz</p>
<b>Antenna Type</b>	<p>WWAN : PIFA Antenna          WLAN : Loop Antenna          Bluetooth : Loop Antenna          GNSS: Loop Antenna          FM : External Handset Antenna</p>
<b>Type of Modulation</b>	<p>GSM: GMSK          GPRS: GMSK          EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK          WCDMA : BPSK (Uplink)          HSDPA/DC-HSDPA : QPSK (Uplink)          HSUPA : QPSK (Uplink)          HSPA+ : 16QAM (16QAM uplink is not supported)          DC-HSDPA : 64QAM          LTE: QPSK / 16QAM / 64QAM          CDMA2000 1xRTT: QPSK          CDMA2000 1xEV-DO: QPSK/8PSK          802.11b : DSSS (DBPSK / DQPSK / CCK)          802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)          Bluetooth LE : GFSK          Bluetooth (1Mbps) : GFSK          Bluetooth (2Mbps) : π/4-DQPSK          Bluetooth (3Mbps) : 8-DPSK          GNSS : BPSK          FM</p>

Note: GNSS Rx = Galileo Rx + GLONASS Rx + GPS Rx

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



### 1.9. Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Acbel)	Model Name	SC-41
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2	Brand Name	Motorola(Chenyang)	Model Name	SC-41
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5Vdc, 2000mA		
Battery	Brand Name	Motorola ( Amperex )	Model Name	KX50
	Power Rating	3.8Vdc, 4700mAh	Type	Li-ion polymer
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18C24367
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name	SC18C24368
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + Camera(Rear) + USB Cable 1(Charging from Adapter 1)
	Mode 2: PCS 1900 Rx + Bluetooth Idle + WLAN Idle(5G) + Earphone + Camera(Front) + USB Cable 2(Charging from Adapter 2)
	Mode 3: CDMA BC10 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + MPEG4 + USB Cable 1(Charging from Adapter 1)
	Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN Idle(5G) + Earphone + FM Rx(98MHz) + USB Cable 1(Charging from Adapter 1)
	Mode 5: LTE Band 17 Rx(High) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 1(Charging from Adapter 1)
	Mode 6: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN Idle(5G) + Earphone + GNSS Rx + USB Cable 1(Data Link with Notebook)
	Mode 7: LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 2(Data Link with Notebook)
	Mode 8: LTE Band 14 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 1(Charging from Adapter 1)
	Mode 9: LTE Band 71 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 1(Charging from Adapter 1)
	Mode 10: LTE Band 29 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 1(Charging from Adapter 1)




Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + Camera(Rear) + USB Cable 1(Charging from Adapter 1)</p> <p>Mode 2: PCS 1900 Rx + Bluetooth Idle + WLAN Idle(5G) + Earphone + Camera(Front) + USB Cable 2(Charging from Adapter 2)</p> <p>Mode 3: CDMA BC10 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + MPEG4 + USB Cable 1(Charging from Adapter 1)</p> <p>Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN Idle(5G) + Earphone + FM Rx(88MHz) + USB Cable 1(Charging from Adapter 1)</p> <p>Mode 5: LTE Band 17 Rx(High) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 1(Charging from Adapter 1)</p> <p>Mode 6: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN Idle(5G) + Earphone + GNSS Rx + USB Cable 1(Data Link with Notebook)</p> <p>Mode 7: LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 2(Data Link with Notebook)</p> <p>Mode 8: LTE Band 14 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 2(Data Link with Notebook)</p> <p>Mode 9: LTE Band 71 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 2(Data Link with Notebook)</p> <p>Mode 10 : LTE Band 29 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Earphone + GNSS Rx + USB Cable 2(Data Link with Notebook)</p>
--------------------	--

**Remark:**

1. The worst case of AC is mode 5; only the test data of this mode is reported.
2. The worst case of RE is mode 7; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel for GSM 850/CDMA BC0/BC10/LTE Band 5/12/13/14/17/26/29 and FM Rx, the worst channel was recorded in this report.

## 2.2.Connection Diagram of Test System

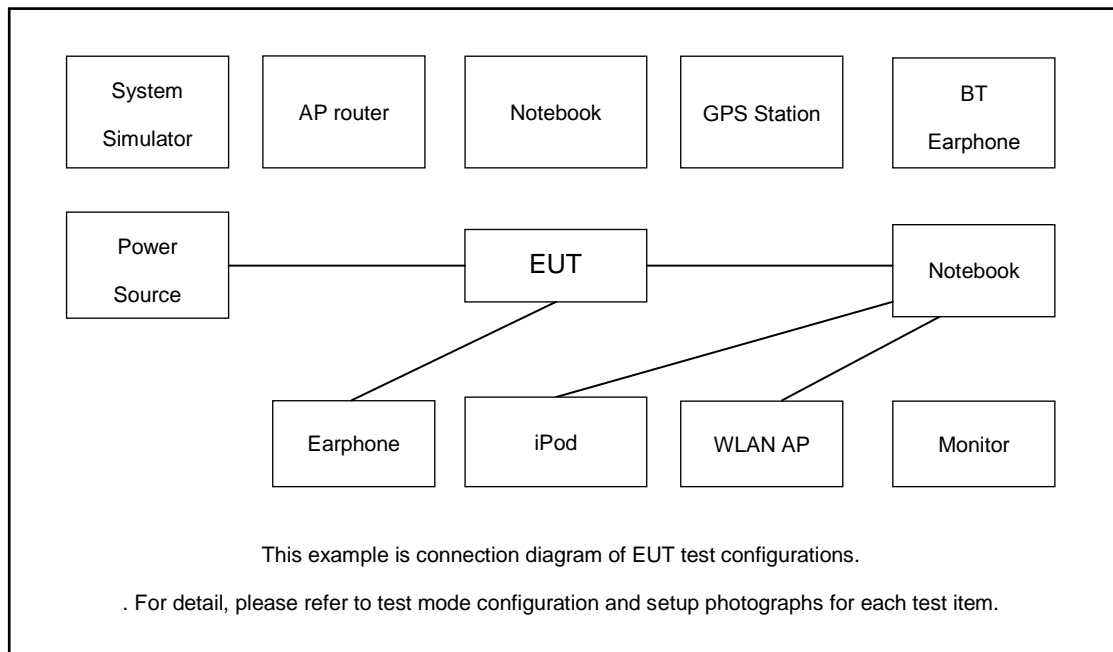

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded,1.8m
3.	GNSS Station	R&S	SMBV100A	258305	N/A	N/A
4.	FM Station	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
5.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
6.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
7.	WLAN AP	ASUS	AC66U	N/A	N/A	Unshielded,1.8m
8.	Bluetooth Earphone	Lenovo	LBH 308	N/A	N/A	N/A
9.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
10.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
11.	Notebook	Dell	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
14.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
15.	Hard disk	Lenovo	FH310	Fcc DoC	Shielded, 1.2m	N/A
16.	Earphone	N/A	N/A	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or LTE or CDMA2000 idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on FM function to make the EUT receive continuous signals from FM station.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

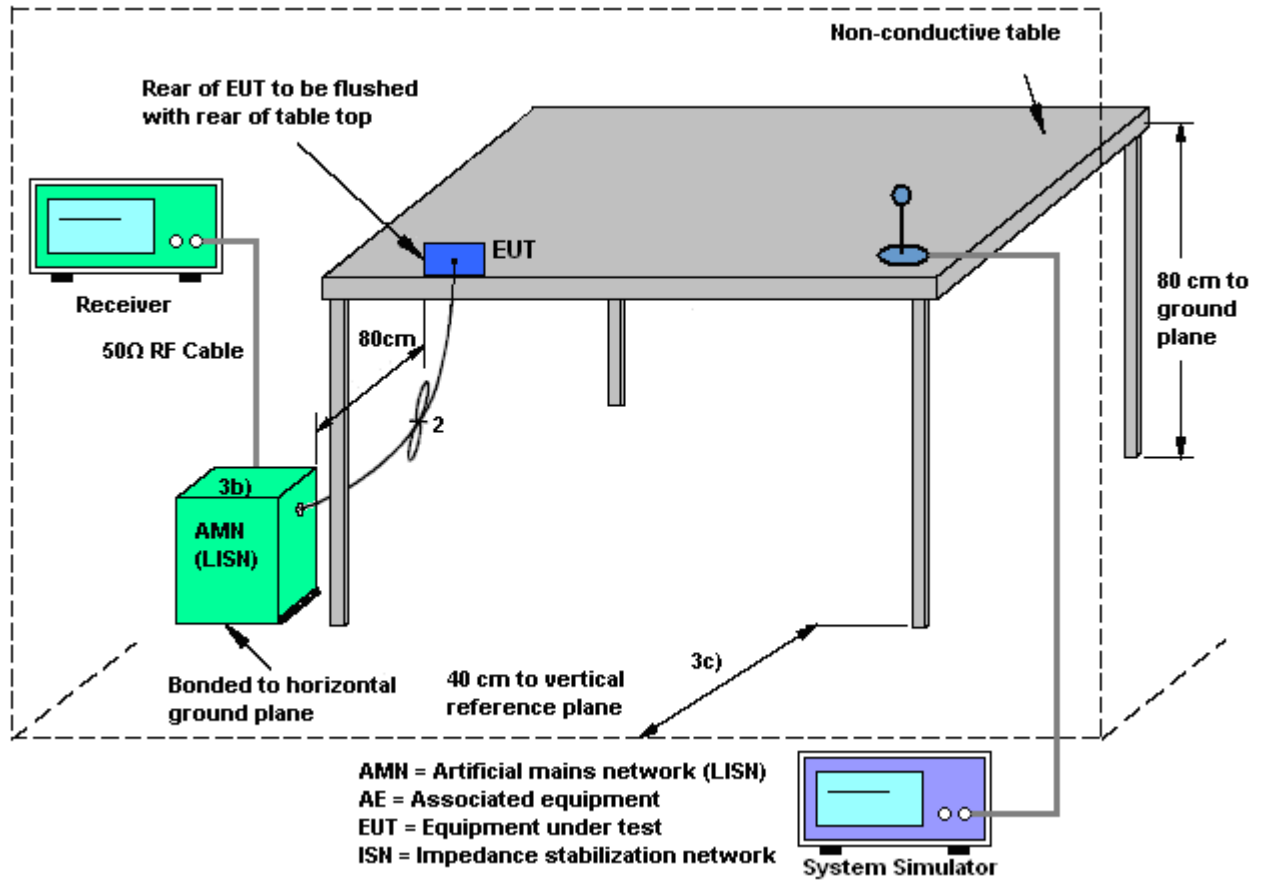






3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Eko Guan	Temperature :	22.3~23.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

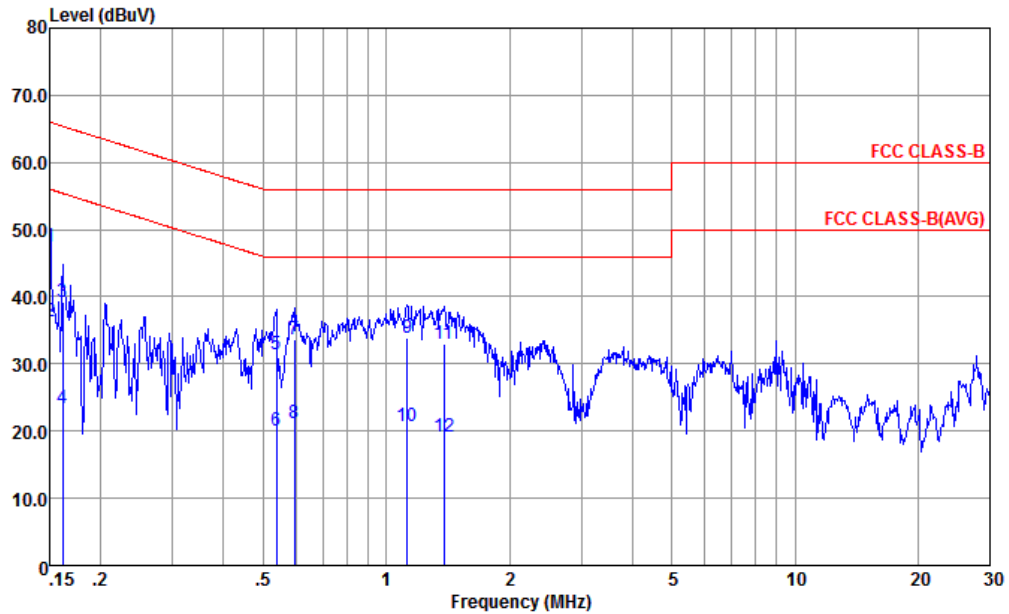


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-181119-060105 LINE  
 Project : (FC) 992001  
 mode : Mode 5  
 : 357244100012064

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.150	47.37	-18.63	66.00	36.80	0.09	10.48	QP
2	0.150	36.27	-19.73	56.00	25.70	0.09	10.48	Average
3	0.162	39.25	-26.13	65.38	28.70	0.10	10.45	QP
4	0.162	23.35	-32.03	55.38	12.80	0.10	10.45	Average
5	0.538	31.51	-24.49	56.00	21.10	0.17	10.24	QP
6	0.538	20.11	-25.89	46.00	9.70	0.17	10.24	Average
7	0.595	33.62	-22.38	56.00	23.20	0.18	10.24	QP
8	0.595	21.12	-24.88	46.00	10.70	0.18	10.24	Average
9	1.123	33.94	-22.06	56.00	23.51	0.20	10.23	QP
10	1.123	20.64	-25.36	46.00	10.21	0.20	10.23	Average
11	1.381	32.94	-23.06	56.00	22.50	0.21	10.23	QP
12	1.381	19.24	-26.76	46.00	8.80	0.21	10.23	Average



Test Engineer :	Eko Guan	Temperature :	22.3~23.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

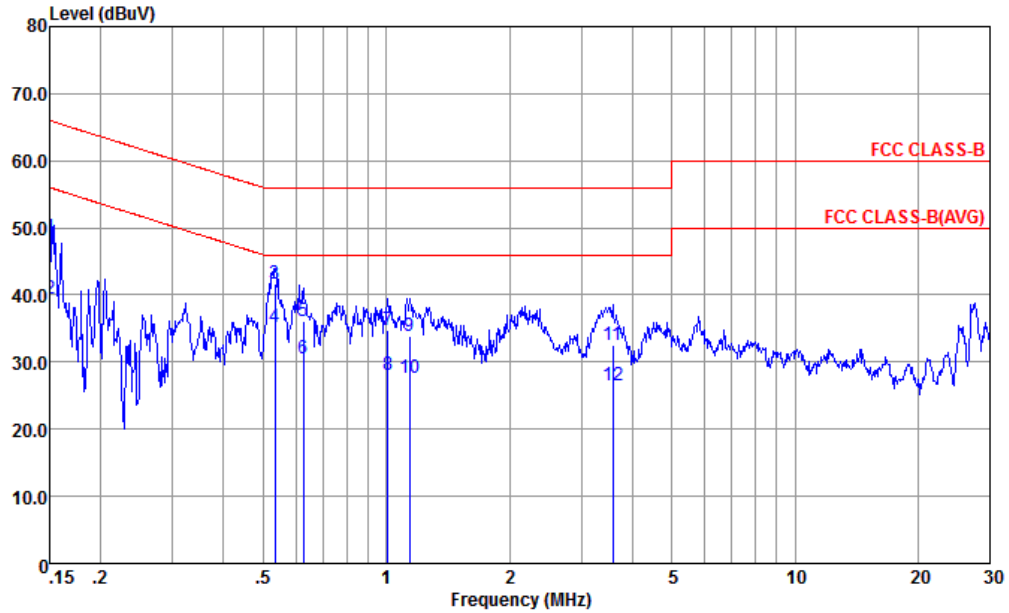

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-181119-060105 NEUTRAL  
 Project : (FC) 992001  
 mode : Mode 5  
 : 357244100012064

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.150	48.56	-17.44	66.00	37.90	0.18	10.48	QP
2	0.150	39.36	-16.64	56.00	28.70	0.18	10.48	Average
3	0.535	41.58	-14.42	56.00	31.19	0.15	10.24	QP
4 *	0.535	35.18	-10.82	46.00	24.79	0.15	10.24	Average
5	0.627	36.08	-19.92	56.00	25.70	0.14	10.24	QP
6	0.627	30.58	-15.42	46.00	20.20	0.14	10.24	Average
7	1.010	34.66	-21.34	56.00	24.30	0.13	10.23	QP
8	1.010	28.06	-17.94	46.00	17.70	0.13	10.23	Average
9	1.141	33.97	-22.03	56.00	23.61	0.13	10.23	QP
10	1.141	27.57	-18.43	46.00	17.21	0.13	10.23	Average
11	3.584	32.52	-23.48	56.00	22.10	0.17	10.25	QP
12	3.584	26.52	-19.48	46.00	16.10	0.17	10.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

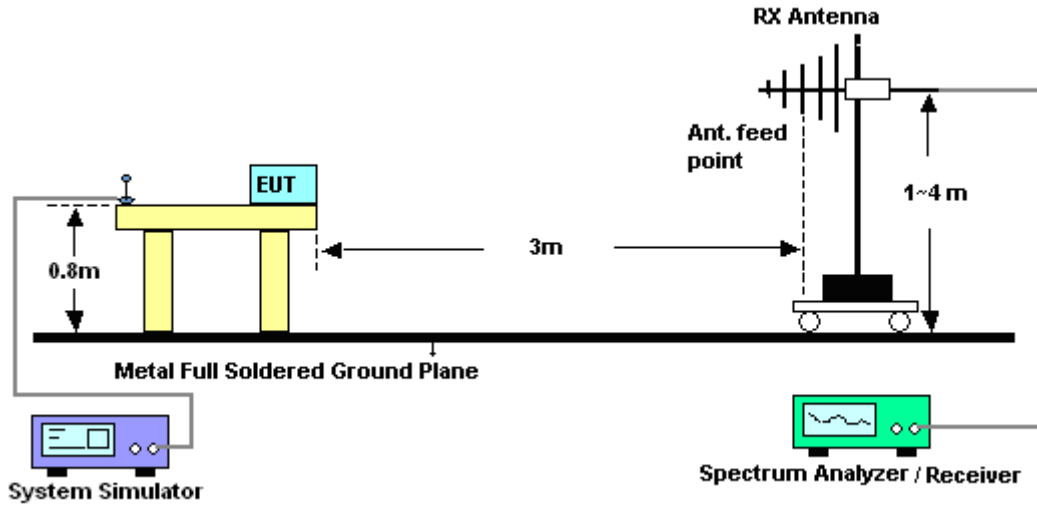


For radiated emissions above 1GHz

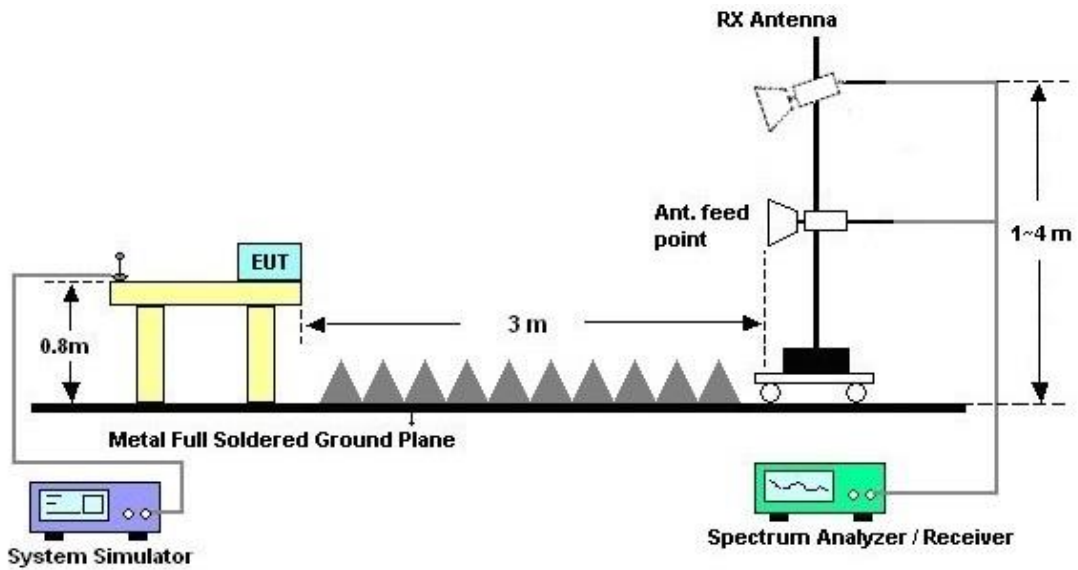



3.2.5. Test Result of Radiated Emission

Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

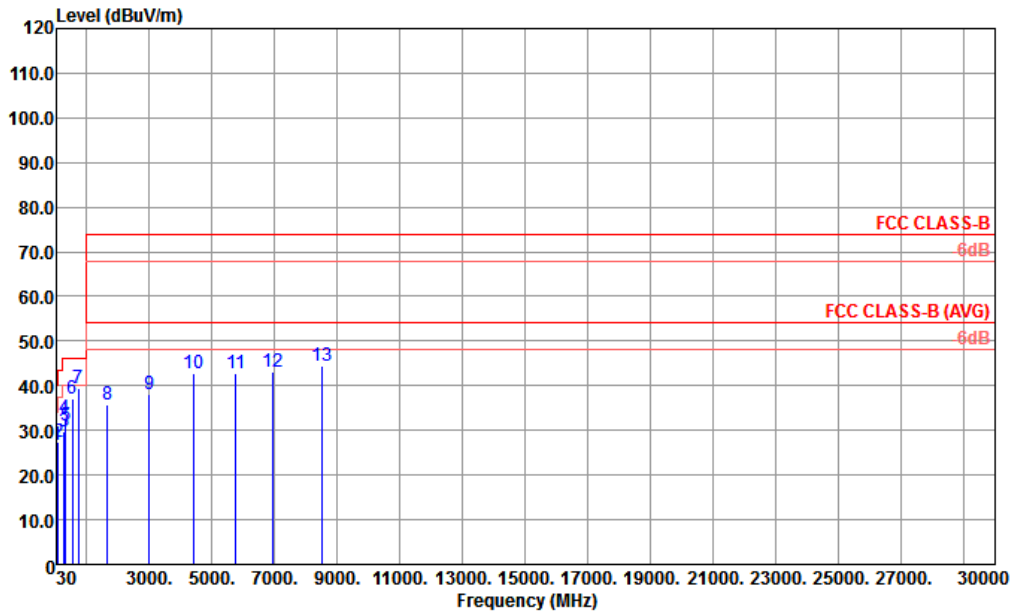


Site : 03CH06-KS  
 Condition : FCC CLASS-B 3m LF 49922-3M HORIZONTAL  
 Project : (FC)992001  
 Mode : 7  
 IMEI : 357244100011785

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	46.490	26.71	-13.29	40.00	41.59	16.27	0.79	31.94	---	---	Peak
2	96.930	27.42	-16.08	43.50	42.37	15.84	1.14	31.93	---	---	Peak
3	271.530	29.75	-16.25	46.00	40.89	18.96	1.91	32.01	---	---	Peak
4	312.270	32.72	-13.28	46.00	43.11	19.62	2.01	32.02	---	---	Peak
5	332.640	31.10	-14.90	46.00	40.94	20.15	2.06	32.05	---	---	Peak
6	532.460	37.10	-8.90	46.00	41.86	24.94	2.61	32.31	100	0	Peak
7	737.130	39.59			40.71	28.04	3.11	32.27	---	---	Peak
8	1672.000	35.61	-38.39	74.00	36.59	28.20	4.64	33.82	---	---	Peak
9	3000.000	37.96	-36.04	74.00	31.04	32.80	6.32	32.20	---	---	Peak
10	4392.000	42.72	-31.28	74.00	33.04	33.53	7.90	31.75	---	---	Peak
11	5760.000	42.78	-31.22	74.00	30.25	34.81	8.97	31.25	---	---	Peak
12	6944.000	43.25	-30.75	74.00	29.31	35.30	9.94	31.30	---	---	Peak
13	8520.000	44.60	-29.40	74.00	28.77	36.49	11.27	31.93	---	---	Peak



Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

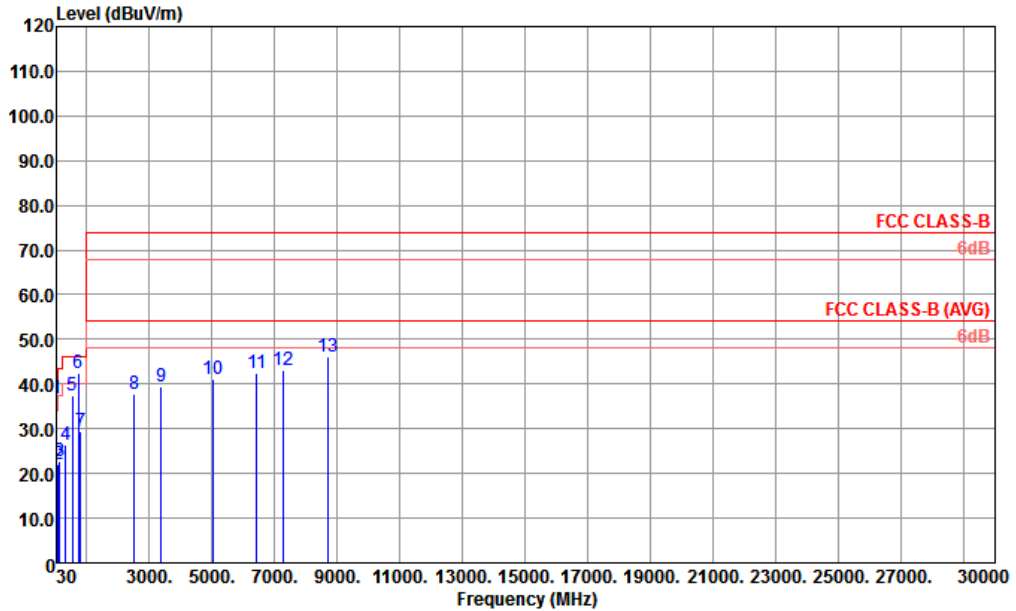

Site : 03CH06-KS  
 Condition : FCC CLASS-B 3m LF 49922-3M VERTICAL  
 Project : (FC)992001  
 Mode : 7  
 IMEI : 357244100011785

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	46.490	36.81	-3.19	40.00	51.69	16.27	0.79	31.94	100	278	QP
2	95.960	21.91	-21.59	43.50	36.99	15.72	1.13	31.93	---	---	Peak
3	141.550	22.85	-20.65	43.50	36.45	17.03	1.31	31.94	---	---	Peak
4	331.670	26.27	-19.73	46.00	36.14	20.12	2.06	32.05	---	---	Peak
5	533.430	37.56	-8.44	46.00	42.29	24.97	2.61	32.31	---	---	Peak
6 !	737.130	42.38			43.50	28.04	3.11	32.27	---	---	Peak
7	796.300	29.52	-16.48	46.00	30.17	28.22	3.26	32.13	---	---	Peak
8	2512.000	37.79	-36.21	74.00	32.87	32.00	5.74	32.82	---	---	Peak
9	3368.000	39.58	-34.42	74.00	32.54	32.42	6.79	32.17	---	---	Peak
10	5056.000	41.17	-32.83	74.00	29.98	33.96	8.44	31.21	---	---	Peak
11	6416.000	42.33	-31.67	74.00	29.21	35.17	9.53	31.58	---	---	Peak
12	7256.000	43.26	-30.74	74.00	28.99	35.77	10.12	31.62	---	---	Peak
13	8712.000	46.09	-27.91	74.00	29.93	36.37	11.52	31.73	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Jul. 18, 2019	Sep. 27, 2019	Jul. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 16, 2019	Sep. 27, 2019	Apr. 18, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 28, 2018	Sep. 27, 2019	Dec. 27, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 27, 2019	Sep. 27, 2019	Jan. 26, 2020	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Sep. 27, 2019	Jan. 04, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Sep. 27, 2019	Jan. 13, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9kHz ~1GHZ	Aug. 06, 2019	Sep. 27, 2019	Aug. 05, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2019	Sep. 27, 2019	Apr. 14, 2020	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 27, 2019	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 27, 2019	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 27, 2019	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2019	Oct. 05, 2019	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Oct. 05, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Oct. 05, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Oct. 05, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------