

# HAC\_E\_Dipole\_835

## DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

## E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 126.6 V/m; Power Drift = -0.10 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 110.2 V/m

Average value of Total=(110.2+107.9) / 2 = 109.05 V/m

PMF scaled E-field


Grid 1 M4 <b>109.8 V/m</b>	Grid 2 M4 <b>110.2 V/m</b>	Grid 3 M4 <b>104.6 V/m</b>
Grid 4 M4 <b>62.33 V/m</b>	Grid 5 M4 <b>62.44 V/m</b>	Grid 6 M4 <b>59.98 V/m</b>
Grid 7 M4 <b>107.2 V/m</b>	Grid 8 M4 <b>107.9 V/m</b>	Grid 9 M4 <b>104.4 V/m</b>

### Cursor:

Total = 110.2 V/m

E Category: M4

Location: 2, -72, 9.7 mm

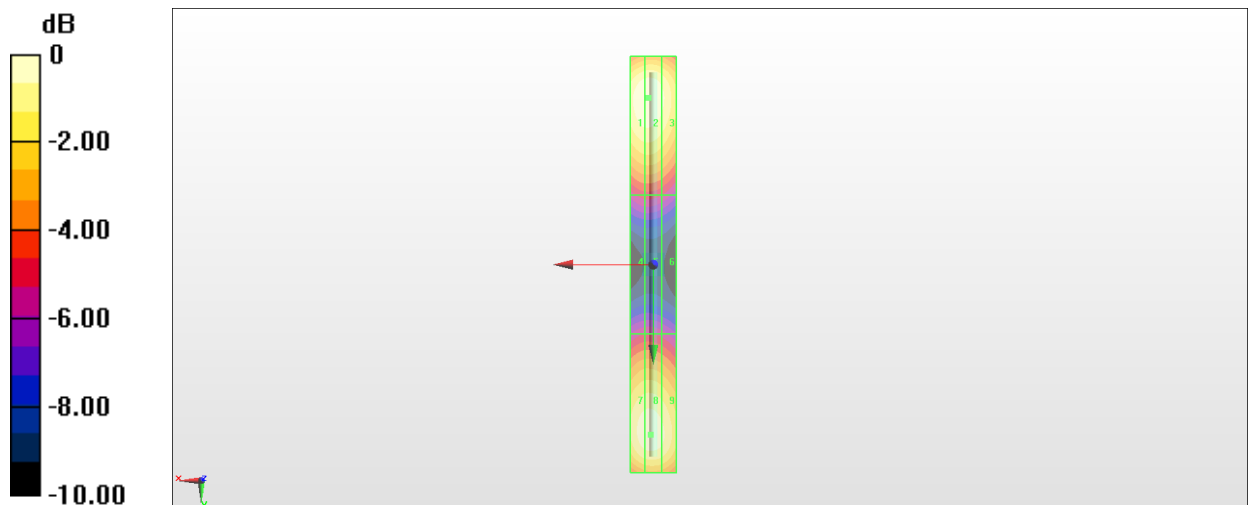

0 dB = 110.2 V/m = 40.84 dBV/m

# HAC\_E\_Dipole\_1880

## DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C

### DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

## E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm


Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 152.7 V/m; Power Drift = 0.01 dB  
 PMR not calibrated. PMF = 1.000 is applied.  
 E-field emissions = 86.42 V/m  
 Average value of Total=(86.42+85.7) / 2 = 86.06 V/m

PMF scaled E-field

Grid 1 <b>M3</b> <b>86.06 V/m</b>	Grid 2 <b>M3</b> <b>86.42 V/m</b>	Grid 3 <b>M3</b> <b>83.65 V/m</b>
Grid 4 <b>M3</b> <b>64.05 V/m</b>	Grid 5 <b>M3</b> <b>64.13 V/m</b>	Grid 6 <b>M4</b> <b>62.90 V/m</b>
Grid 7 <b>M3</b> <b>84.75 V/m</b>	Grid 8 <b>M3</b> <b>85.70 V/m</b>	Grid 9 <b>M3</b> <b>83.42 V/m</b>

### Cursor:

Total = 86.42 V/m  
 E Category: M3  
 Location: 1.5, -33.5, 9.7 mm

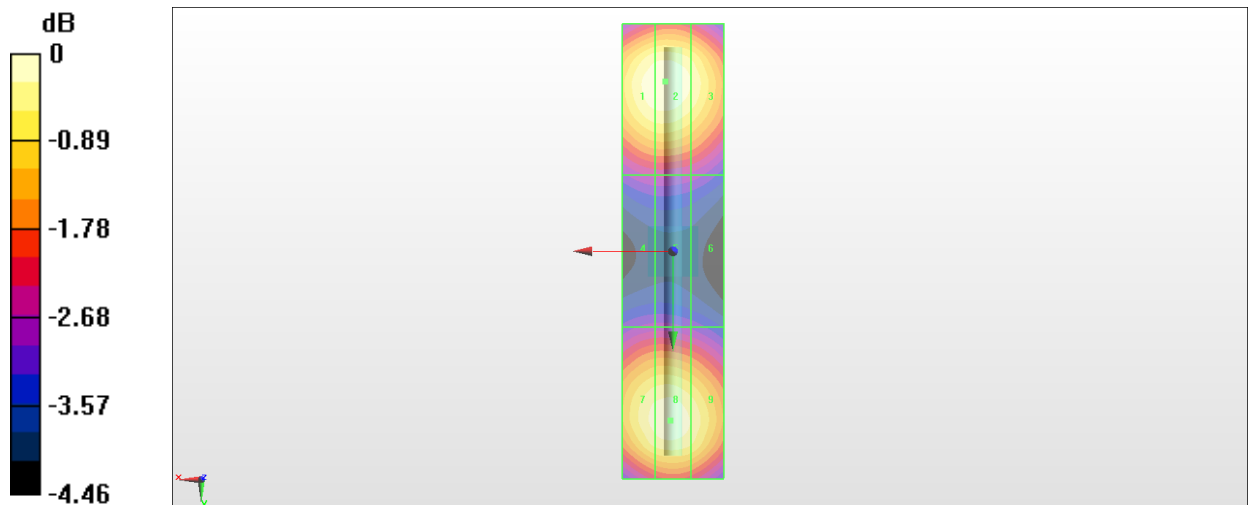

0 dB = 86.42 V/m = 38.73 dBV/m

# HAC\_E\_Dipole\_2450

## DUT: HAC Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C

### DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - measurement distance from the probe sensor center to CD2450 = 10mm & 15mm 2/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 81.62 V/m; Power Drift = 0.04 dB  
 PMR not calibrated. PMF = 1.000 is applied.  
 E-field emissions = 85.31 V/m  
 Average value of Total=(85.31+85.25) / 2 = 85.28 V/m

PMF scaled E-field



Grid 1 <b>M3</b> <b>84.91 V/m</b>	Grid 2 <b>M3</b> <b>85.31 V/m</b>	Grid 3 <b>M3</b> <b>82.34 V/m</b>
Grid 4 <b>M3</b> <b>75.87 V/m</b>	Grid 5 <b>M3</b> <b>75.97 V/m</b>	Grid 6 <b>M3</b> <b>74.06 V/m</b>
Grid 7 <b>M3</b> <b>84.55 V/m</b>	Grid 8 <b>M3</b> <b>85.25 V/m</b>	Grid 9 <b>M3</b> <b>82.32 V/m</b>

**Cursor:**

Total = 85.31 V/m

E Category: M3

Location: 1.5, -24, 9.7 mm

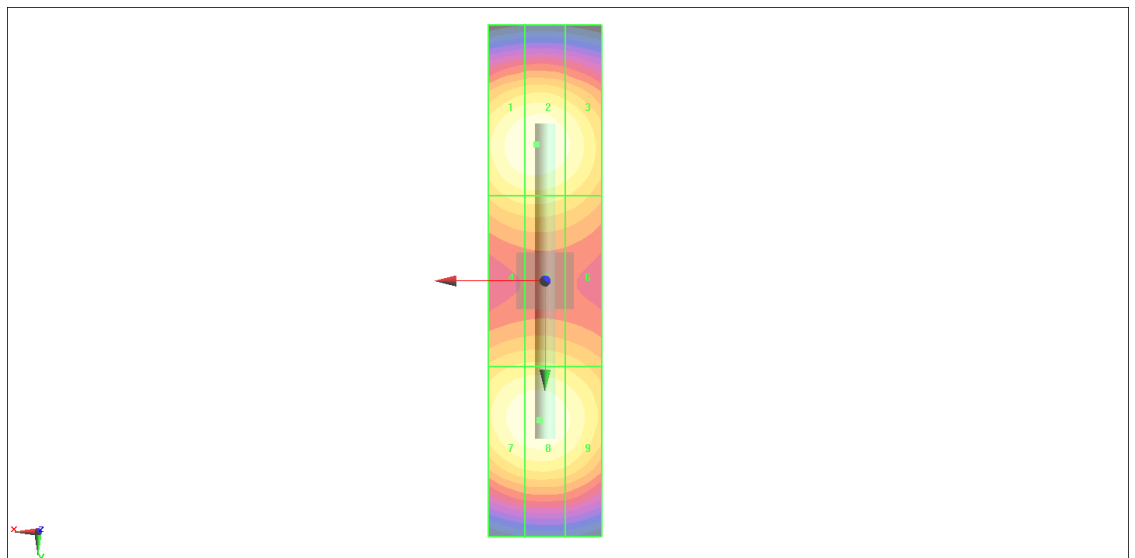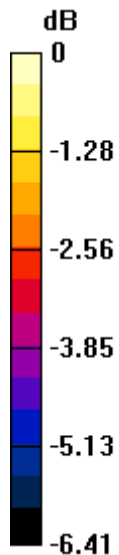

0 dB = 85.31 V/m = 38.62 dBV/m

# HAC\_E\_Dipole\_2600

## DUT: HAC Dipole 2600 MHz

Communication System: CW ; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

## E Scan - measurement distance from the probe sensor center to CD2600 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 64.06 V/m; Power Drift = -0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 82.48 V/m

Average value of Total=(82.40+82.48) / 2 = 82.44 V/m

PMF scaled E-field


Grid 1 <b>M3</b> <b>82.02 V/m</b>	Grid 2 <b>M3</b> <b>82.40 V/m</b>	Grid 3 <b>M3</b> <b>79.55 V/m</b>
Grid 4 <b>M3</b> <b>76.99 V/m</b>	Grid 5 <b>M3</b> <b>77.09 V/m</b>	Grid 6 <b>M3</b> <b>75.75 V/m</b>
Grid 7 <b>M3</b> <b>81.25 V/m</b>	Grid 8 <b>M3</b> <b>82.48 V/m</b>	Grid 9 <b>M3</b> <b>81.00 V/m</b>

### Cursor:

Total = 82.48 V/m

E Category: M3

Location: 0, 22.5, 9.7 mm

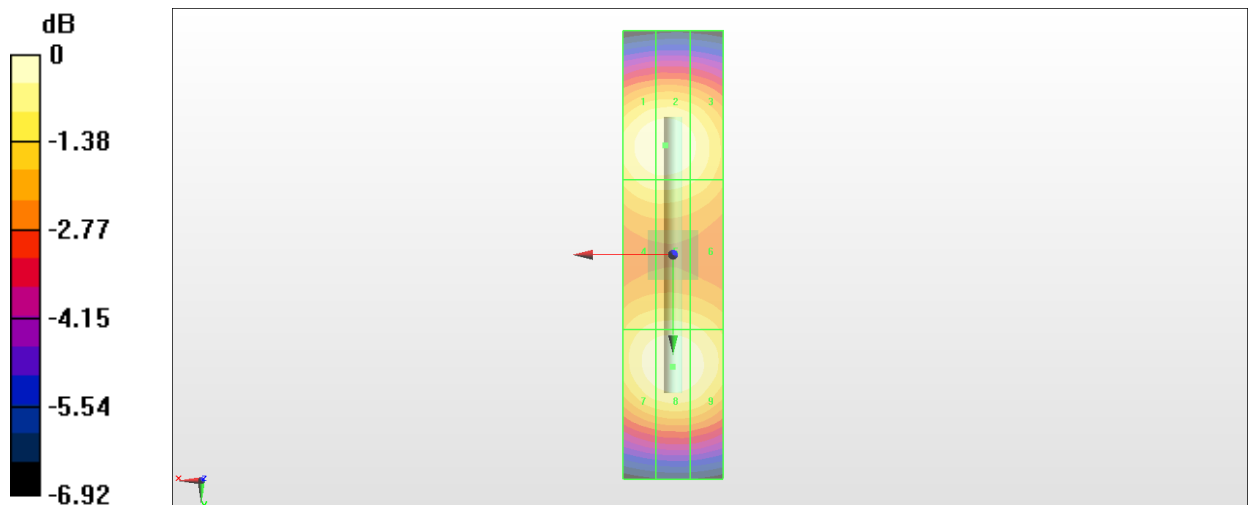

0 dB = 82.48 V/m = 38.33 dBV/m