

#01_HAC_E_GSM850_GSM Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 70.18 V/m; Power Drift = -0.07 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 38.23 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 37.14 dBV/m	Grid 2 M4 37.46 dBV/m	Grid 3 M4 36.77 dBV/m
Grid 4 M4 37.48 dBV/m	Grid 5 M4 37.75 dBV/m	Grid 6 M4 37.13 dBV/m
Grid 7 M4 37.97 dBV/m	Grid 8 M4 38.23 dBV/m	Grid 9 M4 37.41 dBV/m

Cursor:

Total = 38.23 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm



0 dB = 81.59 V/m = 38.23 dBV/m

#02_HAC_E_GSM850_GSM Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.6896
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 67.52 V/m; Power Drift = 0.08 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 38.13 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 36.83 dBV/m	Grid 2 M4 37.18 dBV/m	Grid 3 M4 36.49 dBV/m
Grid 4 M4 37.19 dBV/m	Grid 5 M4 37.53 dBV/m	Grid 6 M4 36.86 dBV/m
Grid 7 M4 37.89 dBV/m	Grid 8 M4 38.13 dBV/m	Grid 9 M4 37.17 dBV/m

Cursor:

Total = 38.13 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

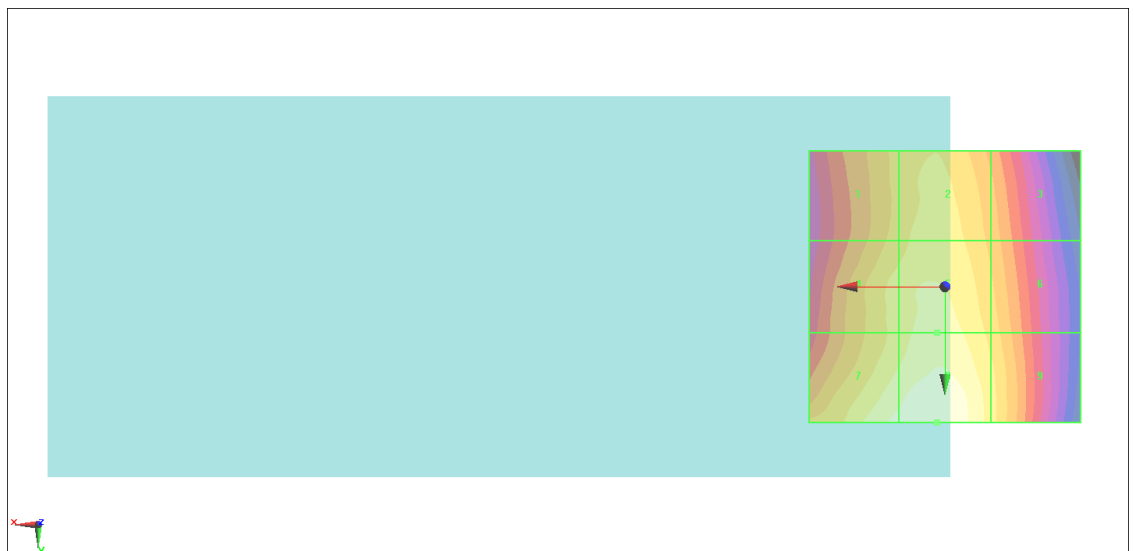

0 dB = 80.68 V/m = 38.14 dBV/m

#03_HAC_E_GSM850_GSM Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm



Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 62.98 V/m; Power Drift = 0.04 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 37.22 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 35.77 dBV/m	Grid 2 M4 36.38 dBV/m	Grid 3 M4 35.91 dBV/m
Grid 4 M4 36.17 dBV/m	Grid 5 M4 36.73 dBV/m	Grid 6 M4 36.27 dBV/m
Grid 7 M4 36.81 dBV/m	Grid 8 M4 37.22 dBV/m	Grid 9 M4 36.55 dBV/m

Cursor:
 Total = 37.22 dBV/m
 E Category: M4
 Location: 0.5, 25, 8.7 mm

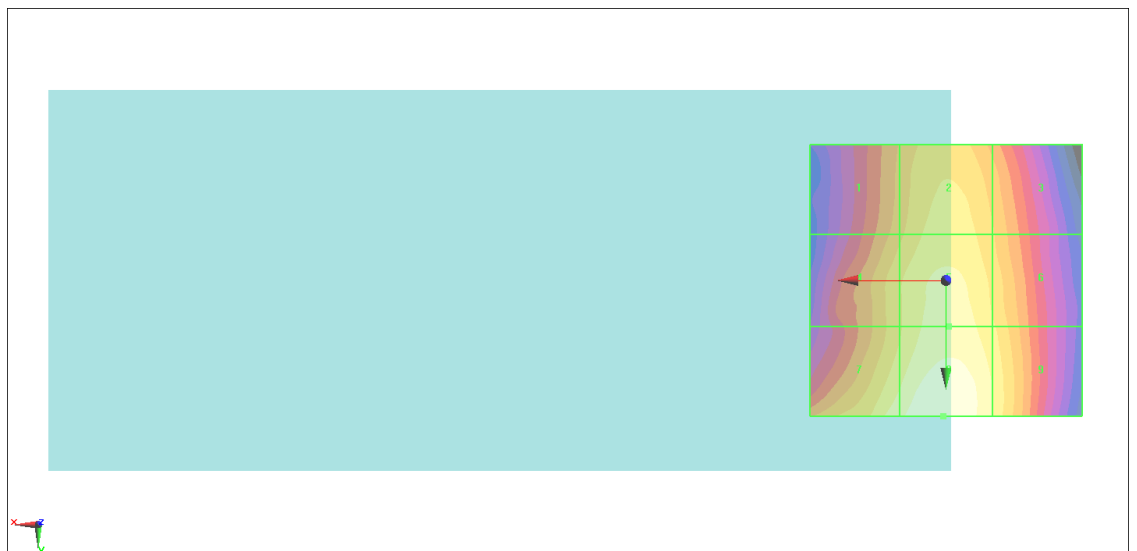

0 dB = 72.63 V/m = 37.22 dBV/m

#04_HAC_E_GSM1900_GSM Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 7.963 V/m; Power Drift = 0.06 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 26.53 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.3 dBV/m	Grid 2 M4 22.88 dBV/m	Grid 3 M4 19.73 dBV/m
Grid 4 M4 23.65 dBV/m	Grid 5 M4 23.29 dBV/m	Grid 6 M4 22.57 dBV/m
Grid 7 M4 25.88 dBV/m	Grid 8 M4 26.53 dBV/m	Grid 9 M4 26.06 dBV/m

Cursor:

Total = 26.53 dBV/m

E Category: M4

Location: -0.5, 25, 8.7 mm

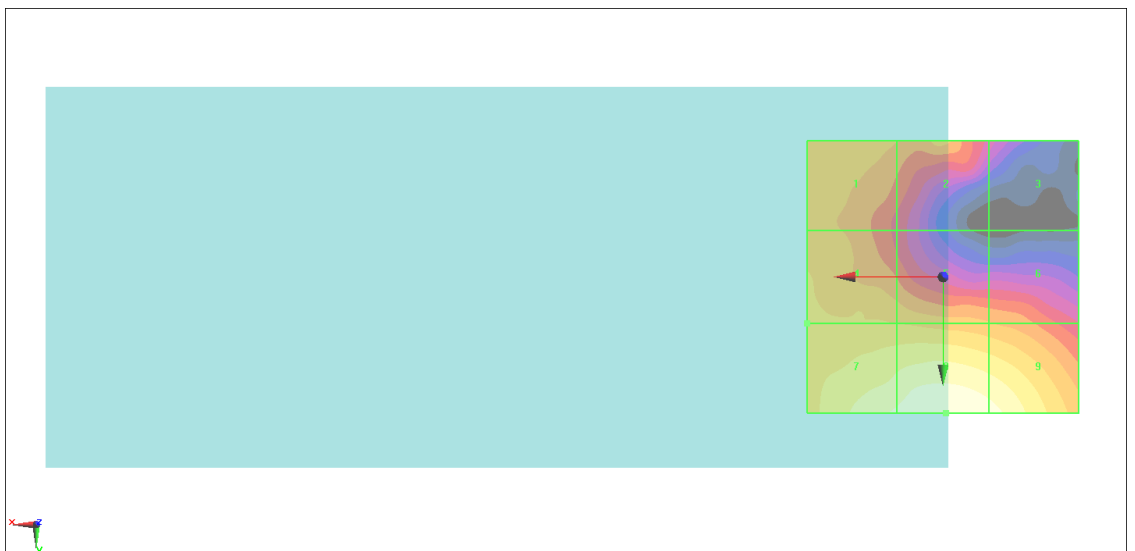

0 dB = 21.21 V/m = 26.53 dBV/m

#05_HAC_E_GSM1900_GSM Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm



Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 7.884 V/m; Power Drift = -0.10 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 25.17 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 23.37 dBV/m	Grid 2 M4 20.88 dBV/m	Grid 3 M4 16.35 dBV/m
Grid 4 M4 23.96 dBV/m	Grid 5 M4 23.02 dBV/m	Grid 6 M4 20.47 dBV/m
Grid 7 M4 24.92 dBV/m	Grid 8 M4 25.17 dBV/m	Grid 9 M4 24.08 dBV/m

Cursor:
 Total = 25.17 dBV/m
 E Category: M4
 Location: 1.5, 25, 8.7 mm

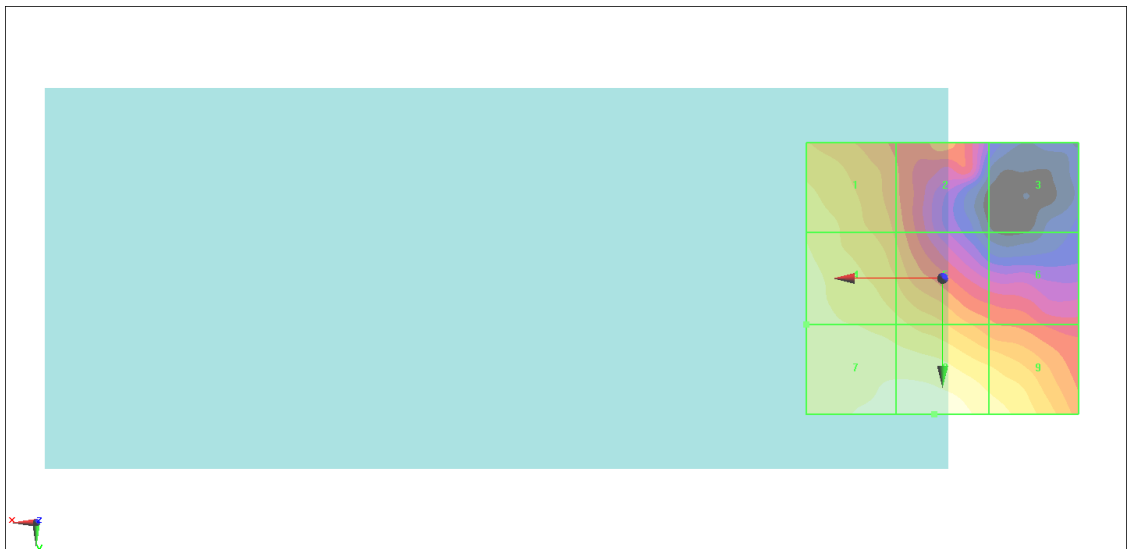

0 dB = 18.14 V/m = 25.17 dBV/m

#06_HAC_E_GSM1900_GSM Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 6.776 V/m; Power Drift = -0.16 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 23.72 dBV/m



Emission category: M4

MIF scaled E-field

Grid 1 M4 23.23 dBV/m	Grid 2 M4 21.03 dBV/m	Grid 3 M4 15.7 dBV/m
Grid 4 M4 23.72 dBV/m	Grid 5 M4 21.88 dBV/m	Grid 6 M4 17.73 dBV/m
Grid 7 M4 23.7 dBV/m	Grid 8 M4 22.53 dBV/m	Grid 9 M4 19.21 dBV/m

Cursor:

Total = 23.72 dBV/m
 E Category: M4
 Location: 25, 5, 8.7 mm

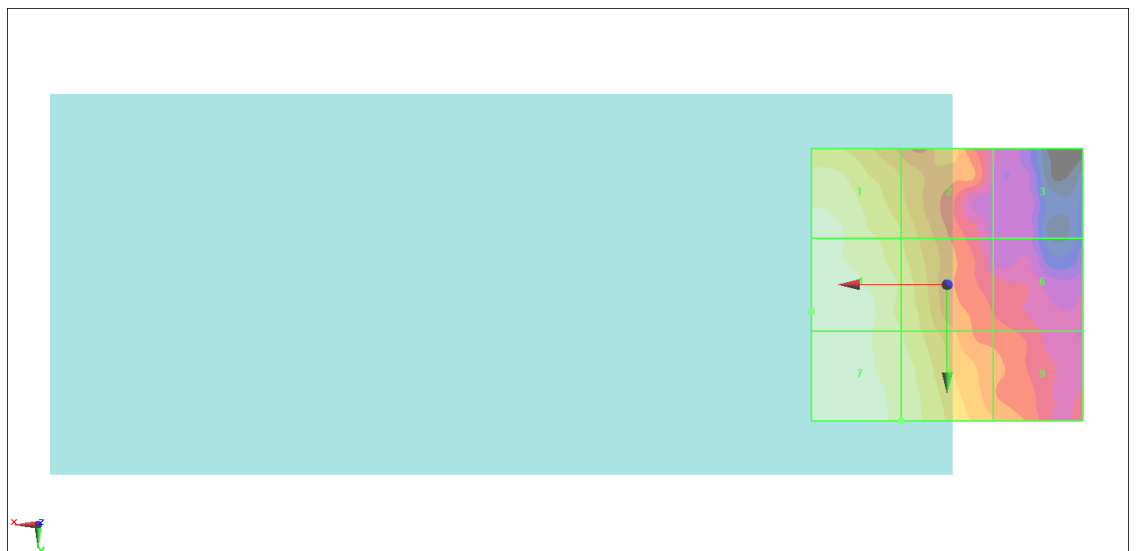

0 dB = 15.35 V/m = 23.72 dBV/m

#07_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch1013

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 824.7 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.7 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm



Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 36.22 V/m; Power Drift = -0.07 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 29.54 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.34 dBV/m	Grid 2 M4 29.38 dBV/m	Grid 3 M4 29.26 dBV/m
Grid 4 M4 27.71 dBV/m	Grid 5 M4 29.54 dBV/m	Grid 6 M4 29.4 dBV/m
Grid 7 M4 27.64 dBV/m	Grid 8 M4 28.88 dBV/m	Grid 9 M4 28.68 dBV/m

Cursor:
 Total = 29.54 dBV/m
 E Category: M4
 Location: -5, -1, 8.7 mm

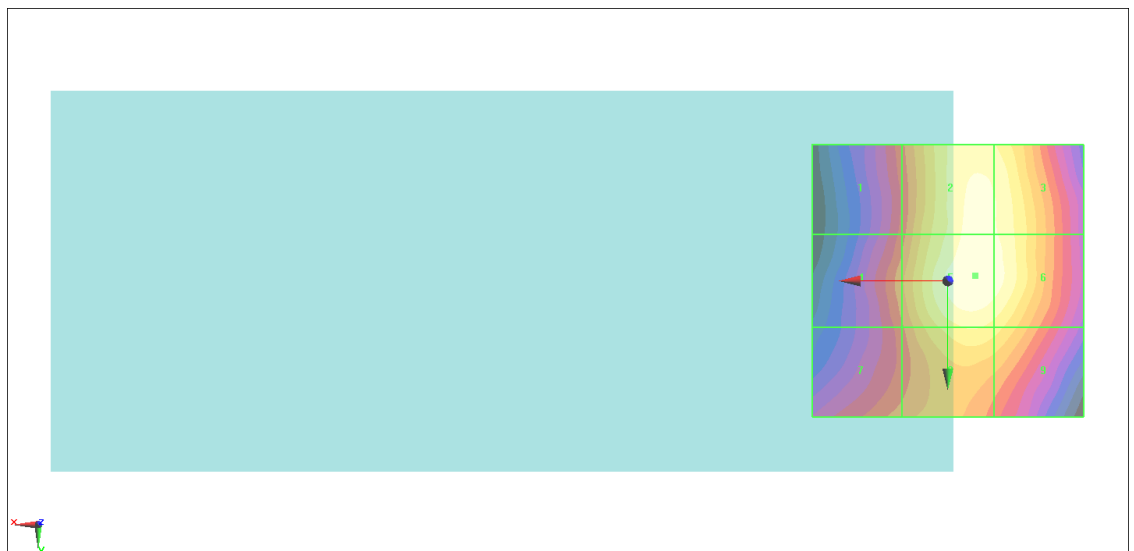

0 dB = 30.00 V/m = 29.54 dBV/m

#08_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch384

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 836.52 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.52 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 33.27 V/m; Power Drift = -0.10 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 30.19 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 26.39 dBV/m	Grid 2 M4 28.03 dBV/m	Grid 3 M4 27.88 dBV/m
Grid 4 M4 28.01 dBV/m	Grid 5 M4 28.39 dBV/m	Grid 6 M4 28.09 dBV/m
Grid 7 M4 30.19 dBV/m	Grid 8 M4 28.22 dBV/m	Grid 9 M4 27.56 dBV/m

Cursor:

Total = 30.19 dBV/m

E Category: M4

Location: 14.5, 25, 8.7 mm



0 dB = 32.31 V/m = 30.19 dBV/m

#09_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch777

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 848.31 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.31 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm



Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 25.31 V/m; Power Drift = -0.16 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 28.76 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 25.97 dBV/m	Grid 2 M4 26.45 dBV/m	Grid 3 M4 25.29 dBV/m
Grid 4 M4 27.41 dBV/m	Grid 5 M4 27.61 dBV/m	Grid 6 M4 26.6 dBV/m
Grid 7 M4 27.97 dBV/m	Grid 8 M4 28.76 dBV/m	Grid 9 M4 27.5 dBV/m

Cursor:
 Total = 28.76 dBV/m
 E Category: M4
 Location: 4.5, 25, 8.7 mm

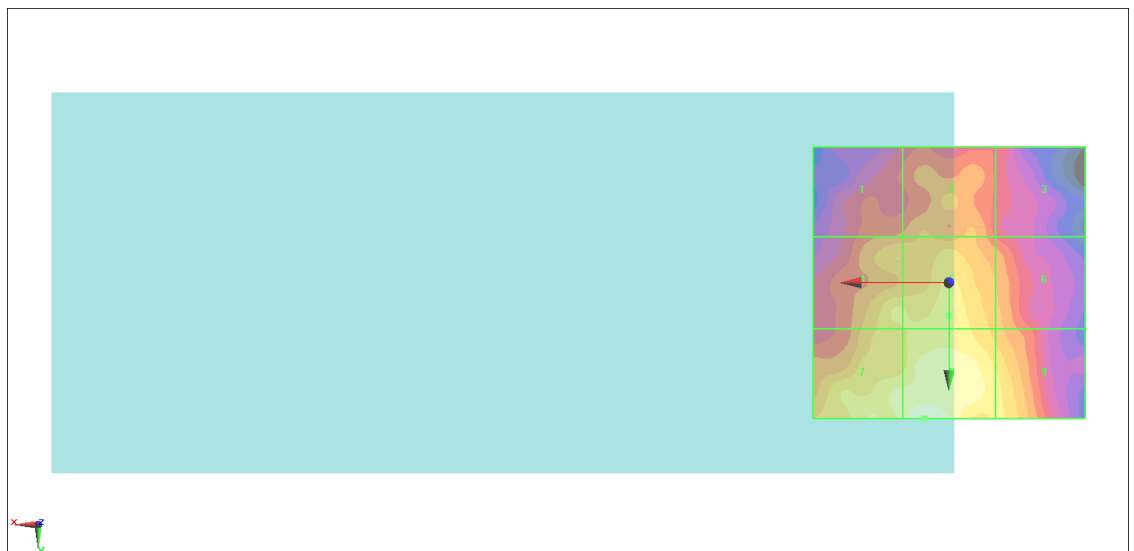

0 dB = 27.42 V/m = 28.76 dBV/m

#10_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch25

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1851.25 MHz; Duty Cycle: 1:17.746

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1851.25 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.720 V/m; Power Drift = -0.14 dB

Applied MIF = 3.26 dB


RF audio interference level = 20.62 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 14.95 dBV/m	Grid 2 M4 14.95 dBV/m	Grid 3 M4 13.75 dBV/m
Grid 4 M4 14.78 dBV/m	Grid 5 M4 16.95 dBV/m	Grid 6 M4 16.65 dBV/m
Grid 7 M4 18.43 dBV/m	Grid 8 M4 20.62 dBV/m	Grid 9 M4 20.05 dBV/m

Cursor:
 Total = 20.62 dBV/m
 E Category: M4
 Location: -1, 25, 8.7 mm

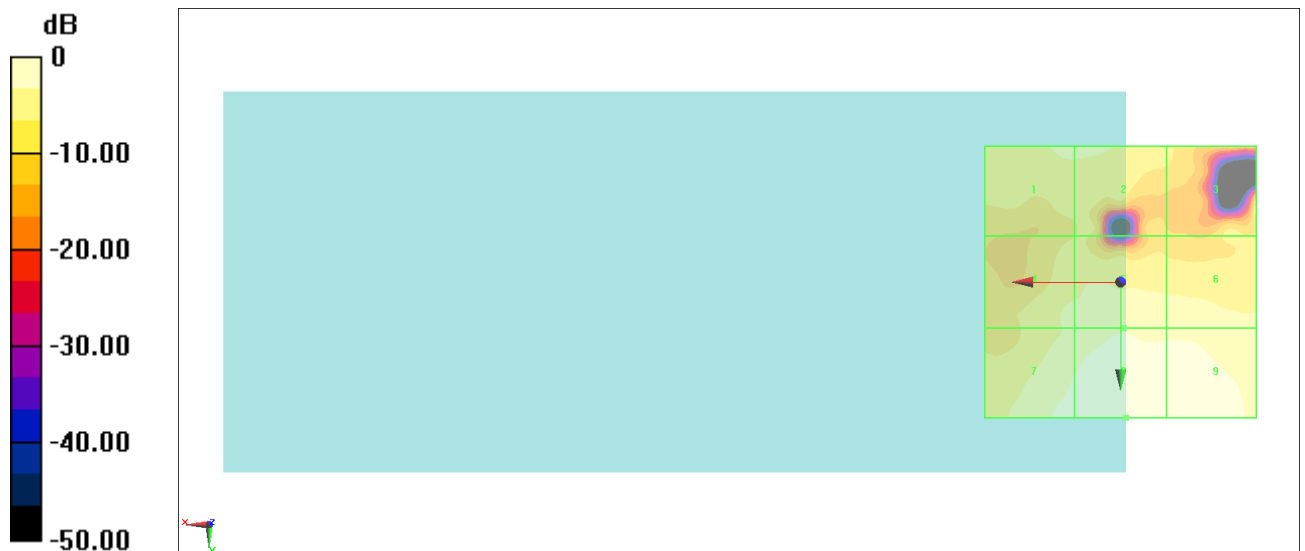

0 dB = 10.74 V/m = 20.62 dBV/m

#11_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch600

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1880 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 3.382 V/m; Power Drift = 0.06 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 18.32 dBV/m


Emission category: M4

MIF scaled E-field

Grid 1 M4 11.23 dBV/m	Grid 2 M4 11.35 dBV/m	Grid 3 M4 11.35 dBV/m
Grid 4 M4 12.77 dBV/m	Grid 5 M4 15.51 dBV/m	Grid 6 M4 14.91 dBV/m
Grid 7 M4 17.18 dBV/m	Grid 8 M4 18.32 dBV/m	Grid 9 M4 18.2 dBV/m

Cursor:

Total = 18.32 dBV/m
 E Category: M4
 Location: -3.5, 25, 8.7 mm

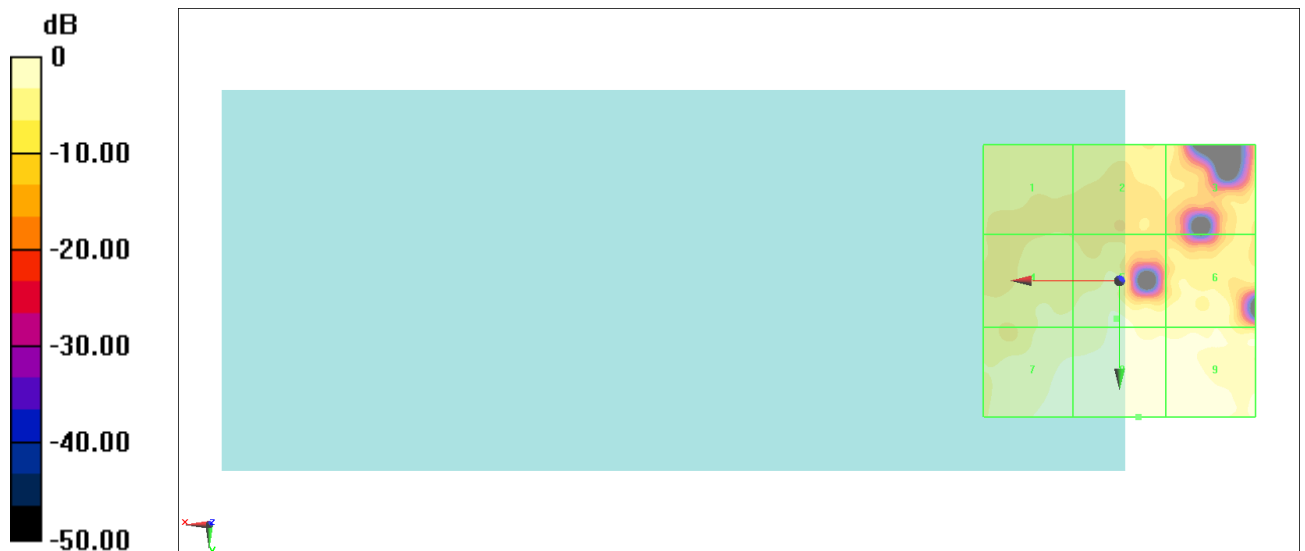

0 dB = 8.242 V/m = 18.32 dBV/m

#12_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch1175

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1908.75 MHz; Duty Cycle: 1:17.746

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1908.75 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.155 V/m; Power Drift = -0.07 dB

Applied MIF = 3.26 dB

RF audio interference level = 16.95 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 10.76 dBV/m	Grid 2 M4 12.05 dBV/m	Grid 3 M4 12.73 dBV/m
Grid 4 M4 11.78 dBV/m	Grid 5 M4 16.26 dBV/m	Grid 6 M4 13.95 dBV/m
Grid 7 M4 13.06 dBV/m	Grid 8 M4 16.95 dBV/m	Grid 9 M4 14.7 dBV/m

Cursor:

Total = 16.95 dBV/m

E Category: M4

Location: -5, 10, 8.7 mm

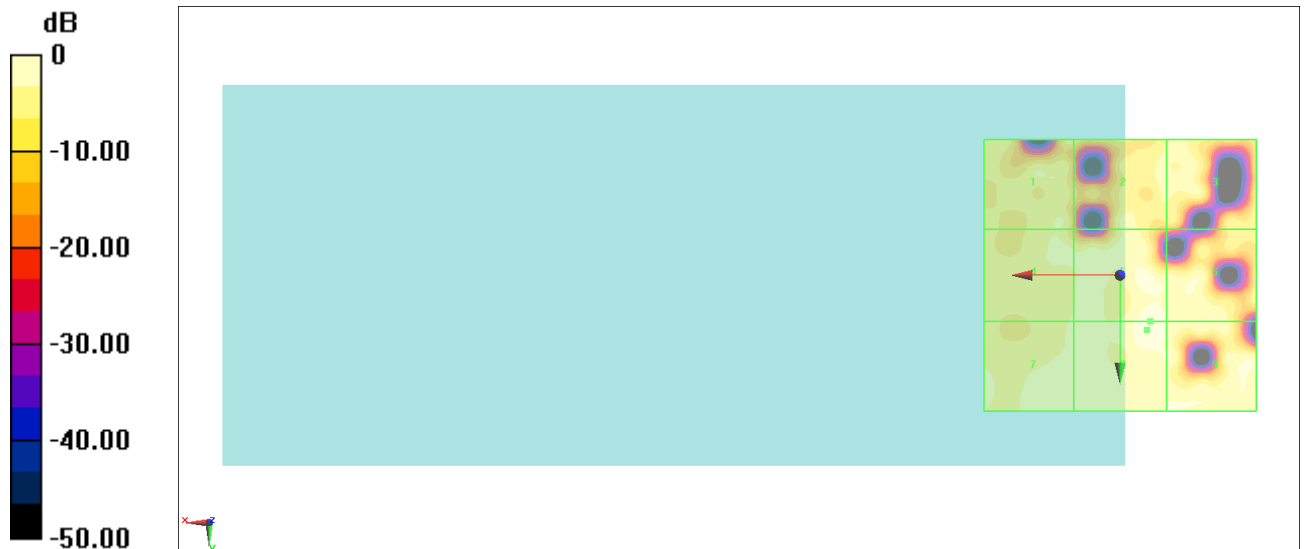

0 dB = 7.039 V/m = 16.95 dBV/m

#13_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 18th Rate_Ch476

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 817.9 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 817.9 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 35.35 V/m; Power Drift = -0.08 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 30.51 dBV/m



Emission category: M4

MIF scaled E-field

Grid 1 M4 27.58 dBV/m	Grid 2 M4 29.93 dBV/m	Grid 3 M4 29.22 dBV/m
Grid 4 M4 27.73 dBV/m	Grid 5 M4 30.03 dBV/m	Grid 6 M4 29.3 dBV/m
Grid 7 M4 27.78 dBV/m	Grid 8 M4 30.51 dBV/m	Grid 9 M4 28.76 dBV/m

Cursor:

Total = 30.51 dBV/m
 E Category: M4
 Location: 4.5, 10, 8.7 mm

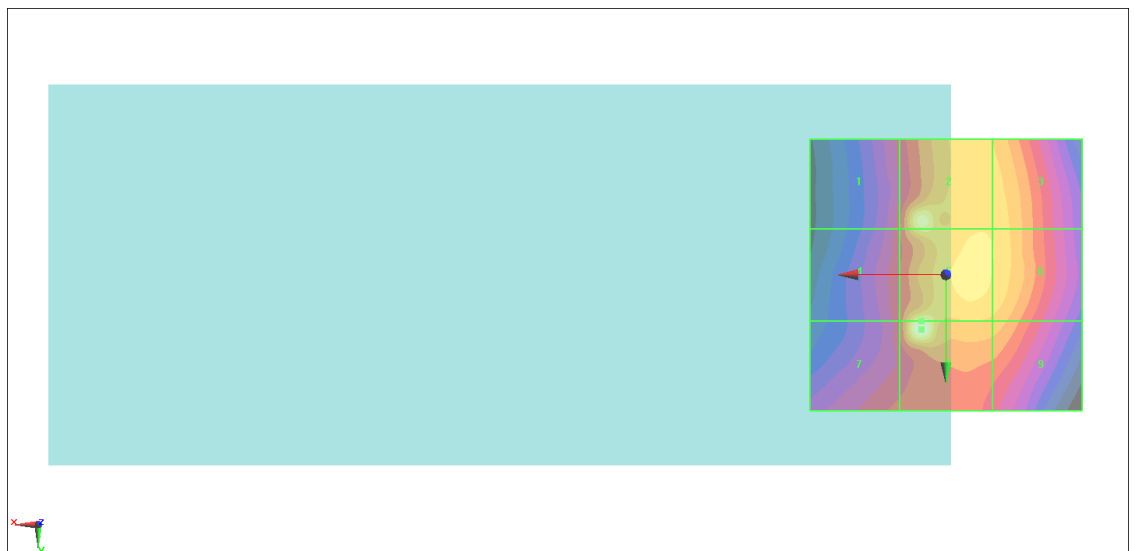

0 dB = 33.54 V/m = 30.51 dBV/m

#14_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 18th Rate_Ch580

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 820.5 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 820.5 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm



Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 36.65 V/m; Power Drift = -0.04 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 29.83 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.71 dBV/m	Grid 2 M4 29.6 dBV/m	Grid 3 M4 29.48 dBV/m
Grid 4 M4 28.03 dBV/m	Grid 5 M4 29.83 dBV/m	Grid 6 M4 29.67 dBV/m
Grid 7 M4 27.92 dBV/m	Grid 8 M4 29.14 dBV/m	Grid 9 M4 28.96 dBV/m

Cursor:
 Total = 29.83 dBV/m
 E Category: M4
 Location: -5, -1, 8.7 mm

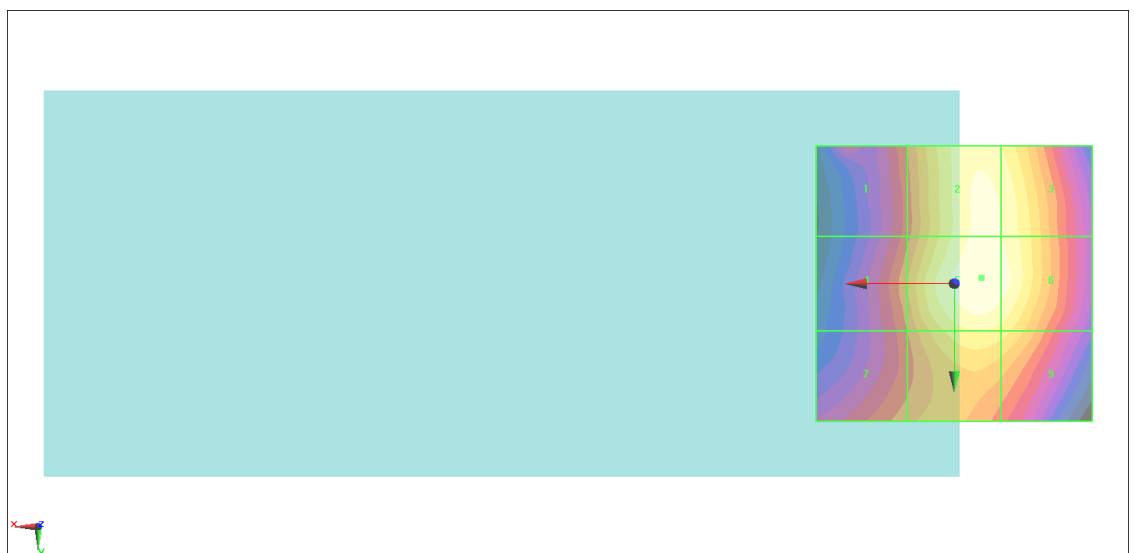

0 dB = 31.00 V/m = 29.83 dBV/m

#15_HAC_E_CDMA BC10_1xRTT, RC1 SO3, 18th Rate_Ch684

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 823.1 MHz; Duty Cycle: 1:17.746
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 823.1 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)



E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 36.39 V/m; Power Drift = 0.01 dB
 Applied MIF = 3.26 dB
 RF audio interference level = 29.60 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 M4 27.45 dBV/m	Grid 2 M4 29.46 dBV/m	Grid 3 M4 29.38 dBV/m
Grid 4 M4 27.76 dBV/m	Grid 5 M4 29.6 dBV/m	Grid 6 M4 29.44 dBV/m
Grid 7 M4 27.62 dBV/m	Grid 8 M4 28.94 dBV/m	Grid 9 M4 28.75 dBV/m

Cursor:
 Total = 29.60 dBV/m
 E Category: M4
 Location: -5, -1, 8.7 mm

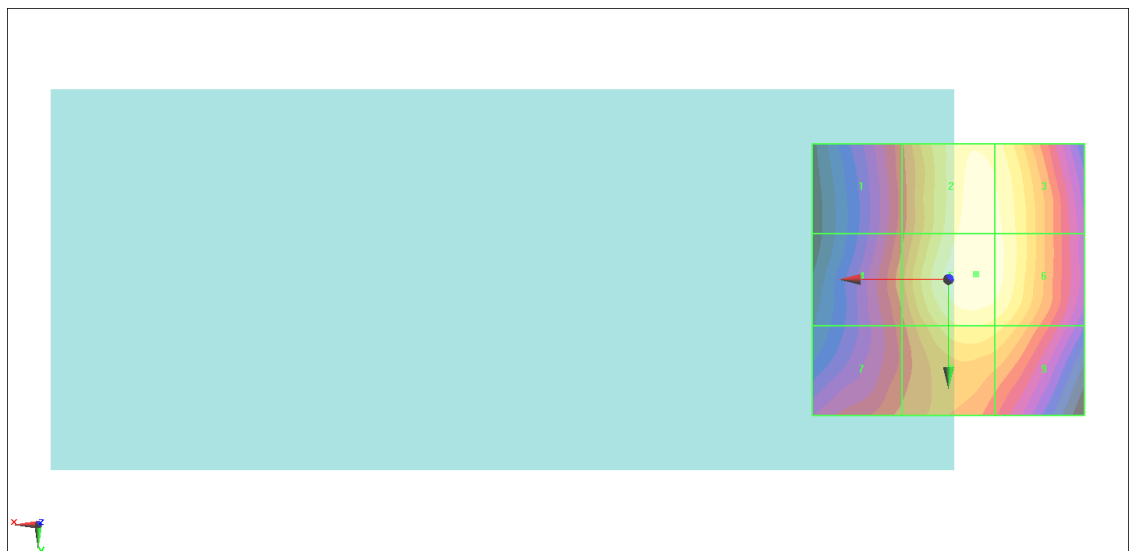

0 dB = 30.21 V/m = 29.60 dBV/m

#16_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.81 V/m; Power Drift = -0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 24.82 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.61 dBV/m	Grid 2 M4 24.82 dBV/m	Grid 3 M4 24.57 dBV/m
Grid 4 M4 21.64 dBV/m	Grid 5 M4 22.88 dBV/m	Grid 6 M4 22.74 dBV/m
Grid 7 M4 20.3 dBV/m	Grid 8 M4 20.42 dBV/m	Grid 9 M4 20.38 dBV/m

Cursor:

Total = 24.82 dBV/m

E Category: M4

Location: -2, -25, 8.7 mm

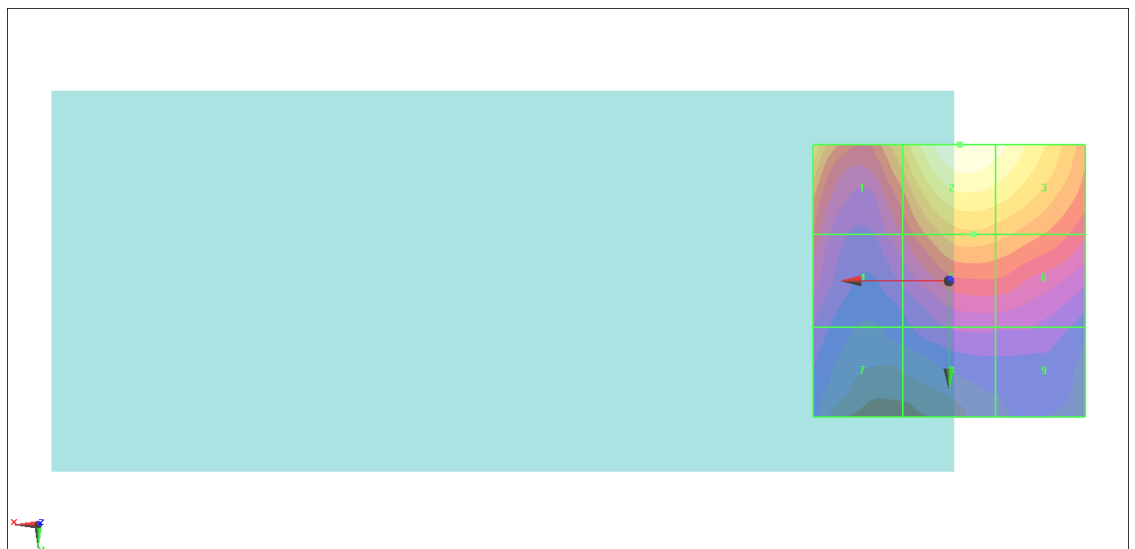

0 dB = 17.43 V/m = 24.82 dBV/m

#17_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 20.90 V/m; Power Drift = -0.09 dB

Applied MIF = -1.62 dB

RF audio interference level = 25.82 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.34 dBV/m	Grid 2 M4 25.82 dBV/m	Grid 3 M4 25.37 dBV/m
Grid 4 M4 22.46 dBV/m	Grid 5 M4 23.88 dBV/m	Grid 6 M4 23.72 dBV/m
Grid 7 M4 21.91 dBV/m	Grid 8 M4 22.74 dBV/m	Grid 9 M4 22.71 dBV/m

Cursor:

Total = 25.82 dBV/m

E Category: M4

Location: -1.5, -25, 8.7 mm



0 dB = 19.54 V/m = 25.82 dBV/m

#18_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 21.59 V/m; Power Drift = 0.03 dB

Applied MIF = -1.62 dB

RF audio interference level = 25.61 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.58 dBV/m	Grid 2 M4 25.61 dBV/m	Grid 3 M4 25.34 dBV/m
Grid 4 M4 21.58 dBV/m	Grid 5 M4 24.02 dBV/m	Grid 6 M4 23.91 dBV/m
Grid 7 M4 20.65 dBV/m	Grid 8 M4 22.92 dBV/m	Grid 9 M4 22.81 dBV/m

Cursor:

Total = 25.61 dBV/m

E Category: M4

Location: -2.5, -25, 8.7 mm



0 dB = 19.07 V/m = 25.61 dBV/m

#19_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.25 V/m; Power Drift = 0.00 dB

Applied MIF = -1.62 dB

RF audio interference level = 26.29 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 25.09 dBV/m	Grid 2 M4 26.29 dBV/m	Grid 3 M4 26.23 dBV/m
Grid 4 M4 22.53 dBV/m	Grid 5 M4 24.81 dBV/m	Grid 6 M4 24.79 dBV/m
Grid 7 M4 21.6 dBV/m	Grid 8 M4 23.81 dBV/m	Grid 9 M4 23.8 dBV/m

Cursor:

Total = 26.29 dBV/m

E Category: M4

Location: -6, -25, 8.7 mm



0 dB = 20.62 V/m = 26.29 dBV/m

#20_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.76 V/m; Power Drift = -0.00 dB

Applied MIF = -1.62 dB

RF audio interference level = 26.36 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 25.44 dBV/m	Grid 2 M4 26.36 dBV/m	Grid 3 M4 26.22 dBV/m
Grid 4 M4 22.85 dBV/m	Grid 5 M4 24.75 dBV/m	Grid 6 M4 24.74 dBV/m
Grid 7 M4 22.63 dBV/m	Grid 8 M4 24.63 dBV/m	Grid 9 M4 24.62 dBV/m

Cursor:

Total = 26.36 dBV/m

E Category: M4

Location: -5.5, -25, 8.7 mm



0 dB = 20.80 V/m = 26.36 dBV/m

#21_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 22.63 V/m; Power Drift = -0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 26.59 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 24.83 dBV/m	Grid 2 M4 26.59 dBV/m	Grid 3 M4 26.28 dBV/m
Grid 4 M4 22.48 dBV/m	Grid 5 M4 24.88 dBV/m	Grid 6 M4 24.81 dBV/m
Grid 7 M4 20.07 dBV/m	Grid 8 M4 22.65 dBV/m	Grid 9 M4 22.64 dBV/m

Cursor:

Total = 26.59 dBV/m

E Category: M4

Location: -2.5, -25, 8.7 mm

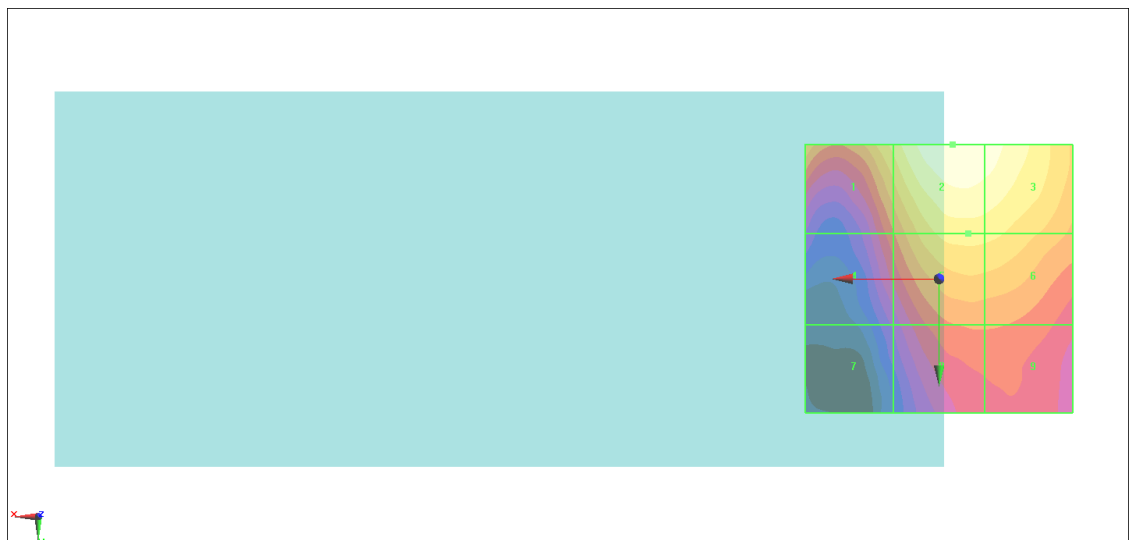

0 dB = 21.35 V/m = 26.59 dBV/m

#22_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.61 V/m; Power Drift = -0.14 dB

Applied MIF = -1.62 dB

RF audio interference level = 27.45 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 25.98 dBV/m	Grid 2 M4 27.45 dBV/m	Grid 3 M4 27.17 dBV/m
Grid 4 M4 23.01 dBV/m	Grid 5 M4 25.56 dBV/m	Grid 6 M4 25.53 dBV/m
Grid 7 M4 21.58 dBV/m	Grid 8 M4 24.62 dBV/m	Grid 9 M4 24.62 dBV/m

Cursor:

Total = 27.45 dBV/m

E Category: M4

Location: -2, -25, 8.7 mm

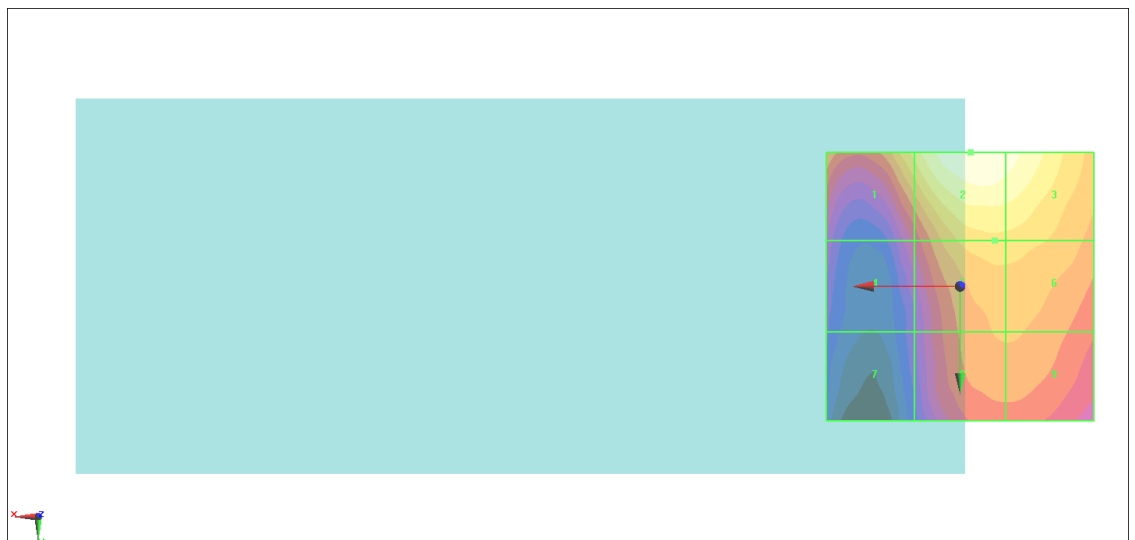

0 dB = 23.58 V/m = 27.45 dBV/m

#23_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch40620

Communication System LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.50 V/m; Power Drift = -0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 27.02 dBV/m

Emission category: M4



MIF scaled E-field

Grid 1 M4 25.26 dBV/m	Grid 2 M4 27.02 dBV/m	Grid 3 M4 26.7 dBV/m
Grid 4 M4 22.47 dBV/m	Grid 5 M4 24.95 dBV/m	Grid 6 M4 24.92 dBV/m
Grid 7 M4 21.03 dBV/m	Grid 8 M4 23.77 dBV/m	Grid 9 M4 23.77 dBV/m

Total = 27.02 dBV/m

E Category: M4

Location: -3, -25, 8.7 mm

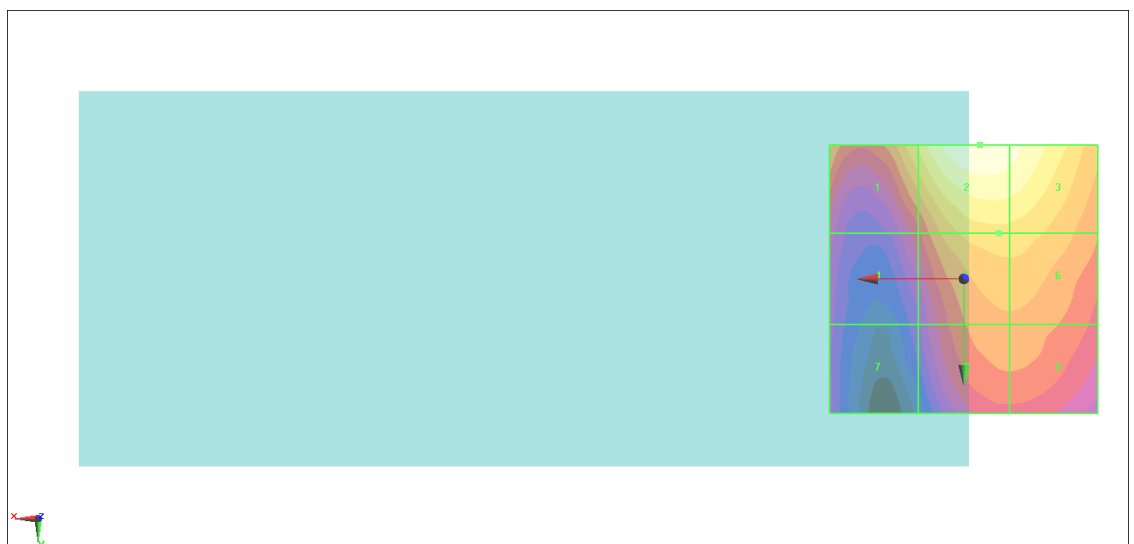

0 dB = 22.44 V/m = 27.02 dBV/m

#24_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.48 V/m; Power Drift = -0.05 dB

Applied MIF = -1.62 dB

RF audio interference level = 27.34 dBV/m

Emission category: M4



MIF scaled E-field

Grid 1 M4 26.35 dBV/m	Grid 2 M4 27.34 dBV/m	Grid 3 M4 27.09 dBV/m
Grid 4 M4 23.85 dBV/m	Grid 5 M4 25.49 dBV/m	Grid 6 M4 25.41 dBV/m
Grid 7 M4 23.09 dBV/m	Grid 8 M4 24.5 dBV/m	Grid 9 M4 24.5 dBV/m

Total = 27.34 dBV/m

E Category: M4

Location: -2.5, -25, 8.7 mm

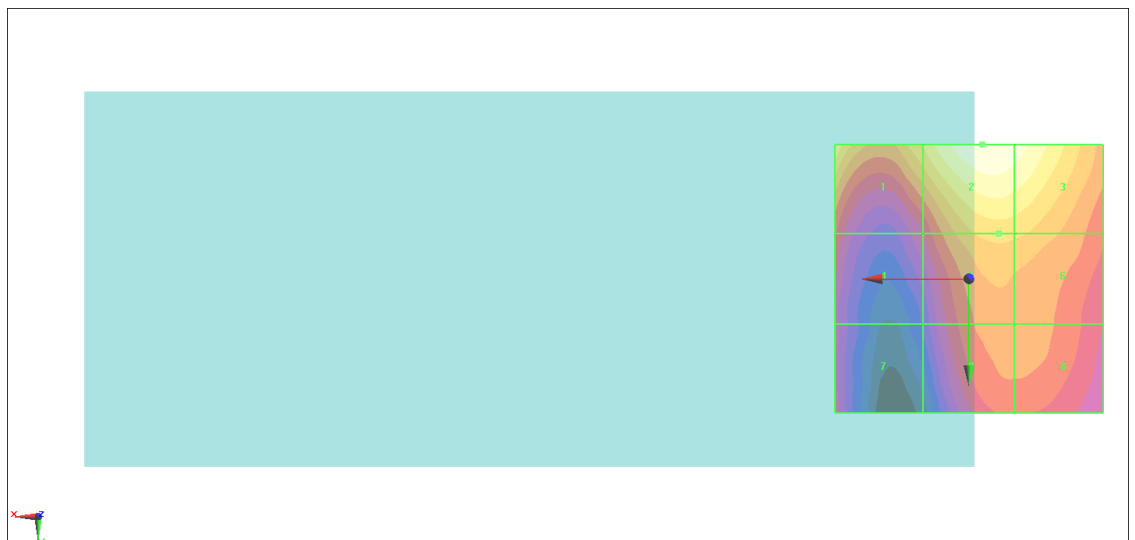

0 dB = 23.27 V/m = 27.34 dBV/m

#25_HAC_E_LTE Band 41_20M_QPSK_1_0_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.01 V/m; Power Drift = 0.18 dB

Applied MIF = -1.62 dB

RF audio interference level = 27.04 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 26.51 dBV/m	Grid 2 M4 27.04 dBV/m	Grid 3 M4 26.65 dBV/m
Grid 4 M4 24.41 dBV/m	Grid 5 M4 25.67 dBV/m	Grid 6 M4 25.54 dBV/m
Grid 7 M4 24.46 dBV/m	Grid 8 M4 25.31 dBV/m	Grid 9 M4 25.31 dBV/m

Cursor:

Total = 27.04 dBV/m

E Category: M4

Location: -3, -25, 8.7 mm

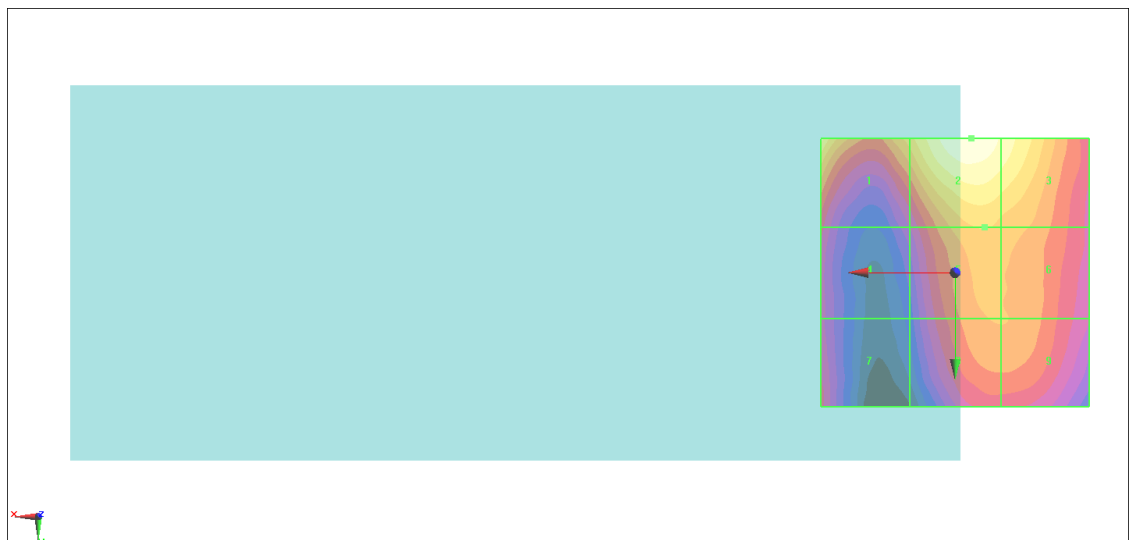

0 dB = 22.49 V/m = 27.04 dBV/m