


# FCC SAR Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2052-2,XT2052-2PP,XT2052-3  
FCC ID : IHDT56YQ2  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Dec. 21, 2019 and testing was started from Feb. 10, 2020 and completed on Mar. 20, 2020. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

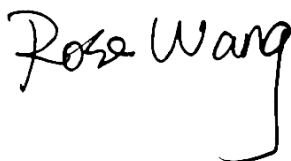

Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



**Sporton International (Kunshan) Inc.**  
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 6
3. Guidance Applied ..... 6
4. Equipment Under Test (EUT) Information ..... 7
4.1 General Information ..... 7
4.2 General LTE SAR Test and Reporting Considerations ..... 9
5. Proximity Sensor Triggering Test ..... 11
5.1 Proximity sensor triggering distances(Per KDB616217§6.2) ..... 11
6. RF Exposure Limits ..... 28
6.1 Uncontrolled Environment ..... 28
6.2 Controlled Environment ..... 28
7. Specific Absorption Rate (SAR) ..... 29
7.1 Introduction ..... 29
7.2 SAR Definition ..... 29
8. System Description and Setup ..... 30
8.1 E-Field Probe ..... 31
8.2 Data Acquisition Electronics (DAE) ..... 31
8.3 Phantom ..... 32
8.4 Device Holder ..... 33
9. Measurement Procedures ..... 34
9.1 Spatial Peak SAR Evaluation ..... 34
9.2 Power Reference Measurement ..... 35
9.3 Area Scan ..... 35
9.4 Zoom Scan ..... 36
9.5 Volume Scan Procedures ..... 36
9.6 Power Drift Monitoring ..... 36
10. Test Equipment List ..... 37
11. System Verification ..... 38
11.1 Tissue Simulating Liquids ..... 38
11.2 Tissue Verification ..... 39
11.3 System Performance Check Results ..... 40
12. RF Exposure Positions ..... 41
12.1 Ear and handset reference point ..... 41
12.2 Definition of the cheek position ..... 42
12.3 Definition of the tilt position ..... 43
12.4 Body Worn Accessory ..... 44
12.5 Product Specific 10g SAR Exposure ..... 45
12.6 Wireless Router ..... 45
13. Conducted RF Output Power (Unit: dBm) ..... 46
14. SAR Test Results ..... 54
14.1 Head SAR ..... 57
14.2 Hotspot SAR ..... 61
14.3 Body Worn Accessory SAR ..... 67
14.4 Product specific 10g SAR ..... 72
14.5 Repeated SAR Measurement ..... 75
15. Simultaneous Transmission Analysis ..... 76
15.2 Head Exposure Conditions ..... 77
15.3 Hotspot Exposure Conditions ..... 78
15.4 Body-Worn Accessory Exposure Conditions ..... 80
15.5 Product specific 10g SAR Exposure Conditions ..... 82
15.6 SPLSR Evaluation and Analysis ..... 84
16. Supplemental Tuner Tests Results ..... 117
16.1 Supplemental Tuner Head & Body SAR Results ..... 117
17. Uncertainty Assessment ..... 118
18. References ..... 119
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos
Appendix E. Conducted RF Output Power Table
Appendix F. Supplemental Tuner SAR Results



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA9D2102-01	Rev. 01	Initial issue of report	Apr. 08, 2020



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2052-2,XT2052-2PP,XT2052-3**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.30	1.37	1.37	1.59
		GSM1900	<0.10	1.23	1.24	
	WCDMA	Band II	<0.10	1.22	1.22	
		Band IV	<0.10	1.37	1.37	
		Band V	0.39	1.22	1.22	
	LTE	Band 2	<0.10	1.24	1.24	
		Band 66/Band 4	<0.10	<b>1.39</b>	<b>1.39</b>	
		Band 5	0.42	1.34	1.34	
		Band 12	0.31	1.02	1.02	
		Band 13	0.41	1.12	1.12	
		Band 14	0.45	1.25	1.15	
		Band 30	0.34	1.25	1.25	
DTS	WLAN	2.4GHz WLAN	<b>1.08</b>	0.97	0.83	1.59
NII		5GHz WLAN	0.17	1.19	1.19	1.55
DSS	Bluetooth	2.4GHz Bluetooth	0.18	<0.10	<0.10	1.55
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)		Highest Simultaneous Transmission 10g SAR (W/kg)	
Licensed	GSM	GSM850	1.55		3.82	
		GSM1900	1.87			
	WCDMA	Band II	<b>3.34</b>			
		Band IV	3.27			
		Band V	2.34			
	LTE	Band 2	3.28			
		Band 66/Band 4	3.09			
		Band 5	1.87			
		Band 14	1.00			
		Band 30	2.73			
DTS	WLAN	2.4GHz WLAN	0.42		2.12	
NII		5GHz WLAN	2.52		3.82	
Date of Testing:			2020/2/10~2020/3/20			
<b>Remark:</b> This device supports LTE B4 and B66. Since the supported frequency span for LTE B4 falls completely within the supports frequency span for LTE B66, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66.						



**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



## 2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2052-2,XT2052-2PP,XT2052-3
FCC ID	IHDT56YQ2
IMEI Code	351641110013790
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	DVT2
SW Version	QPG30.69
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<b>Remark:</b> 1. 802.11n-HT40 is not supported in 2.4GHz WLAN. 2. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 4. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 5. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. 6. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz. 7. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV/V, LTE band 2/4/5/30/66 and WLAN5.2GHz/5.3GHz/5.5GHz/5.8GHz reduced power will be active. 8. P-sensor can detect handheld state, WCDMA band II/IV and LTE B2/4/30/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.	



9. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV/V, LTE band 2/4/5/30/66 and WLAN/5.2GHz/WLAN/5.8GHz.
10. For P-sensor reduced power level is higher than hotspot reduced power for GSM1900, WCDMA band II/IV, LTE band 2/4/66, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
11. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V and LTE Band 2/4/5/12/13/14/66, WWAN antenna 2 frequency band include LTE Band 30.
12. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the WCDMA and LTE modes of WWAN antenna 1. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information on section16.





4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56YQ2																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 30: 5MHz, 10MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R12, Cat4																																																														
CA Support	Not Supported																																																														
LTE MPR permanently built-in by design	<p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes 1. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 2/4/5/30/66 reduced power will be active 2. P-sensor can detect handheld sate, LTE B2/4/30/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active. 3. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 2/4/5/30/66.																																																														




Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20475	830.5	20500	832
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20575	842.5	20550	840
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23085	707	23110	710
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23105	708.5	23080	706
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		785	
M	23230		782		23230		782		23230		782	
H	23255		784.5		23230		782		23255		785	
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793		23355		795.5	
M	23330		793		23330		793		23330		793	
H	23355		795.5		23330		793		23355		795.5	
LTE Band 30												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	27685		2307.5		27710		2310		27735		2312.5	
M	27710		2310		27710		2310		27710		2310	
H	27735		2312.5		27710		2310		27735		2312.5	
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

## 5. Proximity Sensor Triggering Test

### 5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

- Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5825MHz) and lowest (835MHz) frequency was used for proximity sensor triggering testing.
- Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
- When the proximity sensor is active, GSM1900, WCDMA band II/IV/V, LTE band 2/4/5/30/66 and WLAN5.2GHz/5.3GHz/5.5GHz/5.8GHz reduced power will be active for front/ back body worn SAR.
- P-sensor can detect handheld state, WCDMA band II/IV and LTE B2/4/30/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active for handheld SAR.
- The proximity sensors used to detect the proximity of the user's body at the front or back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:  
Front: [15 mm](#)  
Back: [19 mm](#)
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for handheld:  
Front: [5 mm](#)  
Back: [9 mm](#)  
Bottom side: [11 mm](#)

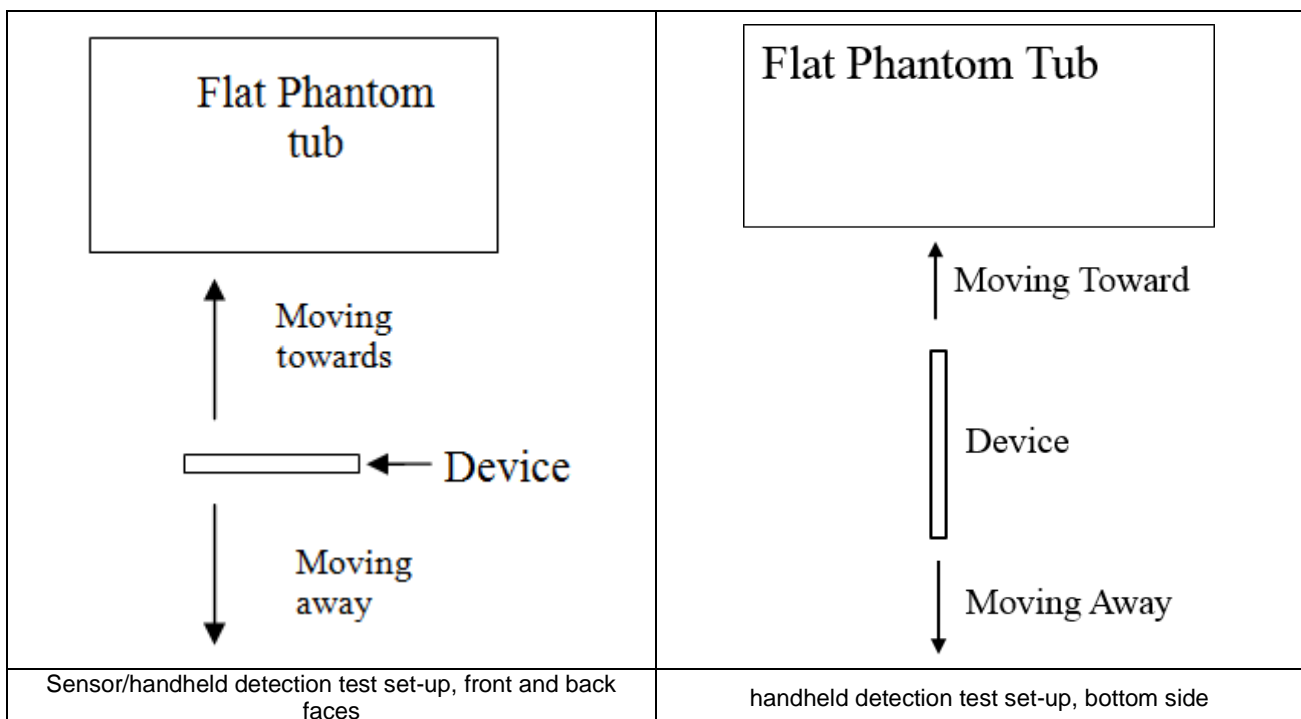



<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	17	25	20	34


TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GPRS1900 2 Tx slots	27.5	24.5	3.0
WCDMA Band II	24	17.0	7.0
WCDMA Band IV	24	17.5	6.5
WCDMA Band V	24	23.0	1.0
LTE Band 2	24	17.0	7.0
LTE Band 4	24	17.5	6.5
LTE Band 5	24	23.0	1.0
LTE Band 30	24	19.0	5.0
LTE Band 66	24	17.5	6.5
WLAN5.2GHz	17	12.5	4.5
WLAN5.3GHz	17	11.0	6.0
WLAN5.5GHz	17	11.5	5.5
WLAN5.8GHz	18	14.0	4.0



Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)


Front

Distance	55	52	49	46	43	40	37	34	31	28	25	22	21	20	19	18	17	16	15	14	13	10	7	4	1	0
GPRS1900 2 Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23
LTE Band 2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17
LTE Band 4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band 5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23
LTE Band 30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19	19	19	19	19	19	19	19	19	19
LTE Band 66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.2GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
WLAN5.3GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	11	11	11	11	11	11	11	11	11	11
WLAN5.5GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
WLAN5.8GHz	18	18	18	18	18	18	18	18	18	18	18	18	18	18	18	18	14	14	14	14	14	14	14	14	14	14

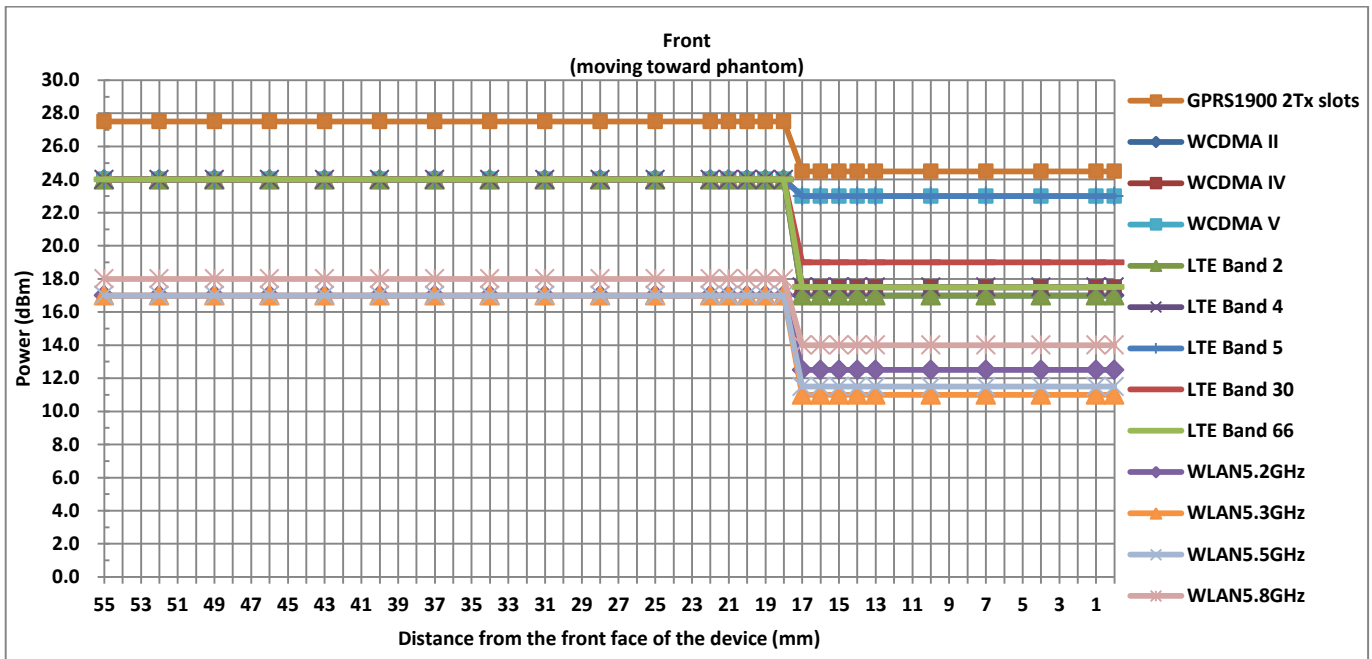




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																										
Front																										
Distance	55	54	51	48	45	42	39	36	33	30	29	28	27	26	25	24	23	22	21	18	15	12	9	6	3	0
GPRS1900 2 Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17	17	17
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band 2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17	17	17
LTE Band 4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band 5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band 30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19	19	19	19	19	19	19	19	19	19	19	19
LTE Band 66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.2GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
WLAN5.3GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	11	11	11	11	11	11	11	11	11	11	11	11
WLAN5.5GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
WLAN5.8GHz	18	18	18	18	18	18	18	18	18	18	18	18	18	18	14	14	14	14	14	14	14	14	14	14	14	14

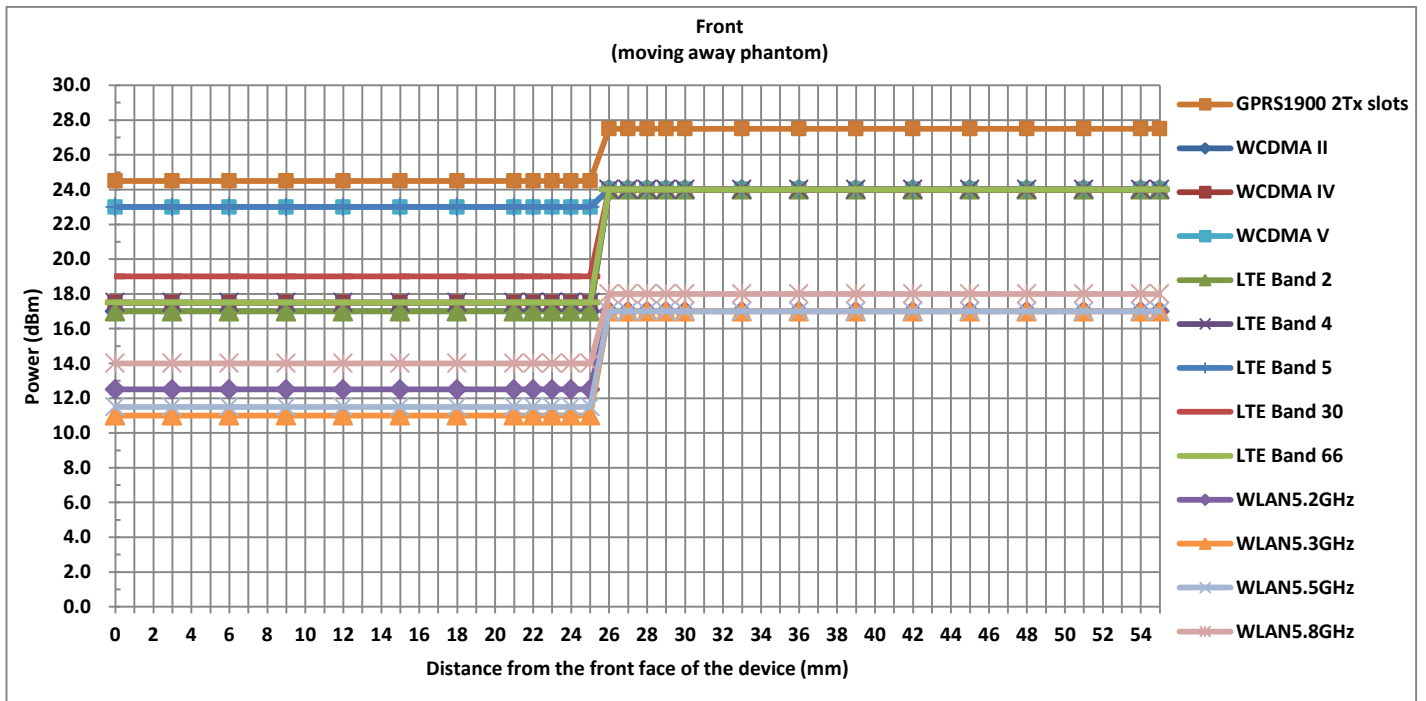






Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																										
Back																										
Distance	55	52	49	46	43	40	37	34	31	28	25	24	23	22	21	20	19	18	17	16	13	10	7	4	1	0
GPRS1900 2 Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17	17
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23	23
LTE Band 2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17	17
LTE Band 4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band 5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23	23
LTE Band 30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19	19	19	19	19	19	19	19	19	19	19
LTE Band 66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.2GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
WLAN5.3GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	11	11	11	11	11	11	11	11	11	11	11
WLAN5.5GHz	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
WLAN5.8GHz	18	18	18	18	18	18	18	18	18	18	18	18	18	18	18	14	14	14	14	14	14	14	14	14	14	14

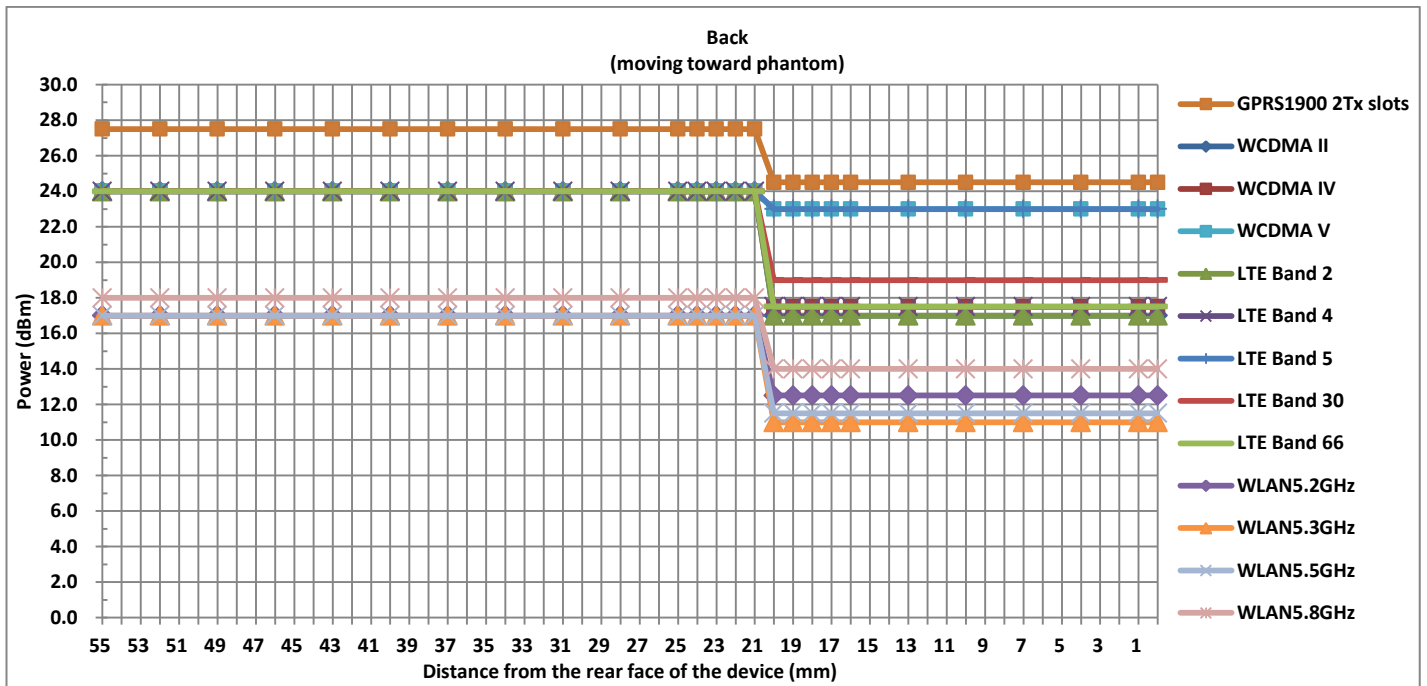



Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																										
Back																										
Distance	55	54	51	48	45	42	39	38	37	36	35	34	33	32	31	30	27	24	21	18	15	12	9	6	3	0
GPRS1900 2 Tx slots	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	27.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band 2	24	24	24	24	24	24	24	24	24	24	24	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17
LTE Band 4	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band 5	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band 30	24	24	24	24	24	24	24	24	24	24	24	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
LTE Band 66	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.2GHz	17	17	17	17	17	17	17	17	17	17	17	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
WLAN5.3GHz	17	17	17	17	17	17	17	17	17	17	17	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
WLAN5.5GHz	17	17	17	17	17	17	17	17	17	17	17	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
WLAN5.8GHz	18	18	18	18	18	18	18	18	18	18	18	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14

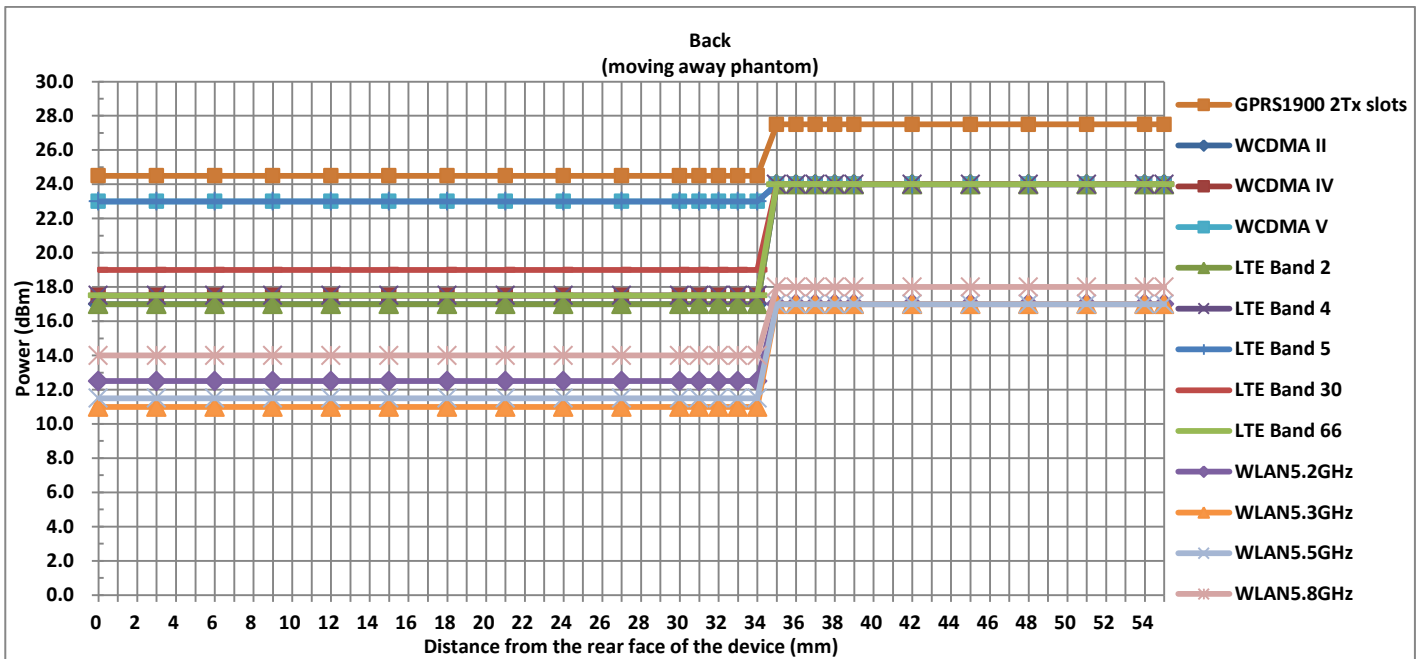




**<Handheld>**

Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	15	12	17	12	16

TX. Band	Handheld Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
WCDMA II	24	21	3
WCDMA IV	24	21	3
LTE Band2	24	20.5	3.5
LTE Band4	24	21	3
LTE Band30	24	21	3
LTE Band66	24	21	3




Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	11	10	9	8	7	6	5	4	3	2	0
WCDMA II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
WCDMA IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
LTE Band30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
LTE Band66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21

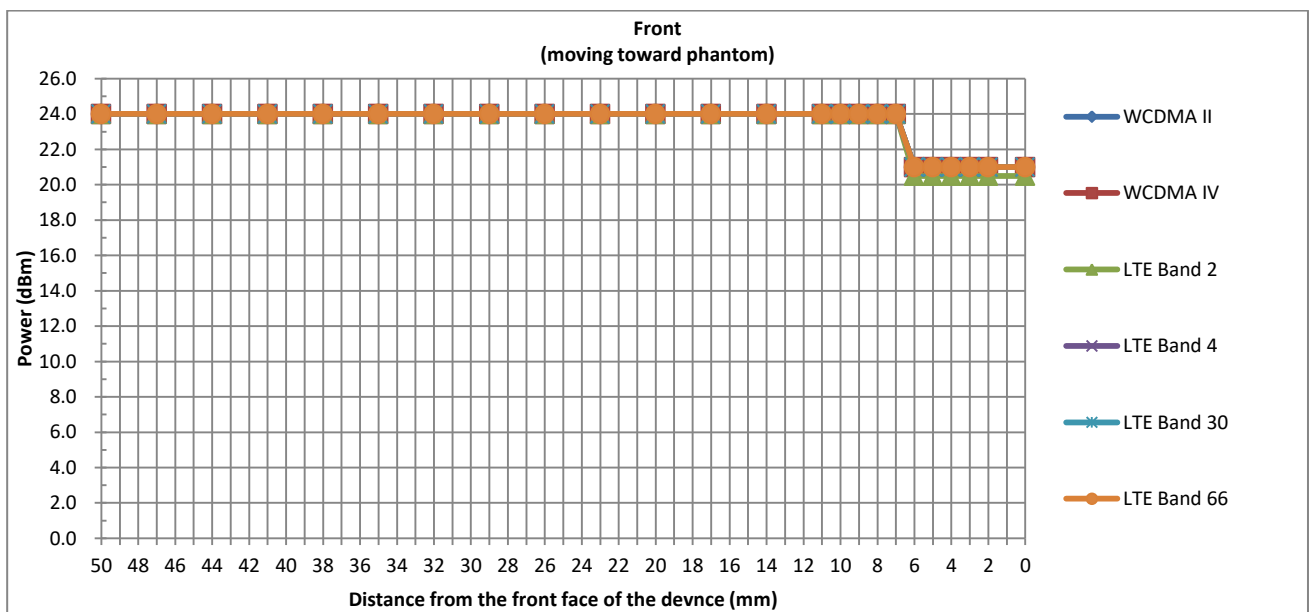




Handheld Triggering Distance (mm) and Triggering Power (dBm)																											
Front																											
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	3	0
WCDMA II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21	21
WCDMA IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21	21

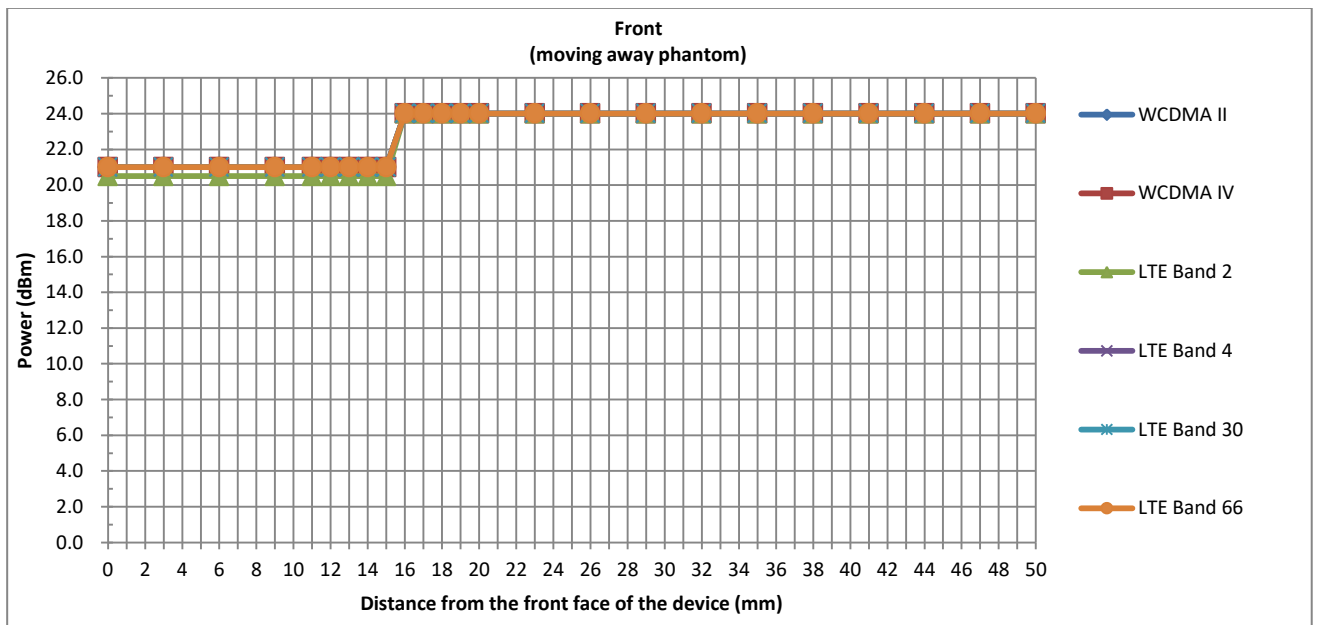




Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Back																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	16	15	14	13	12	11	10	9	8	5	2	0
WCDMA II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
WCDMA IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21

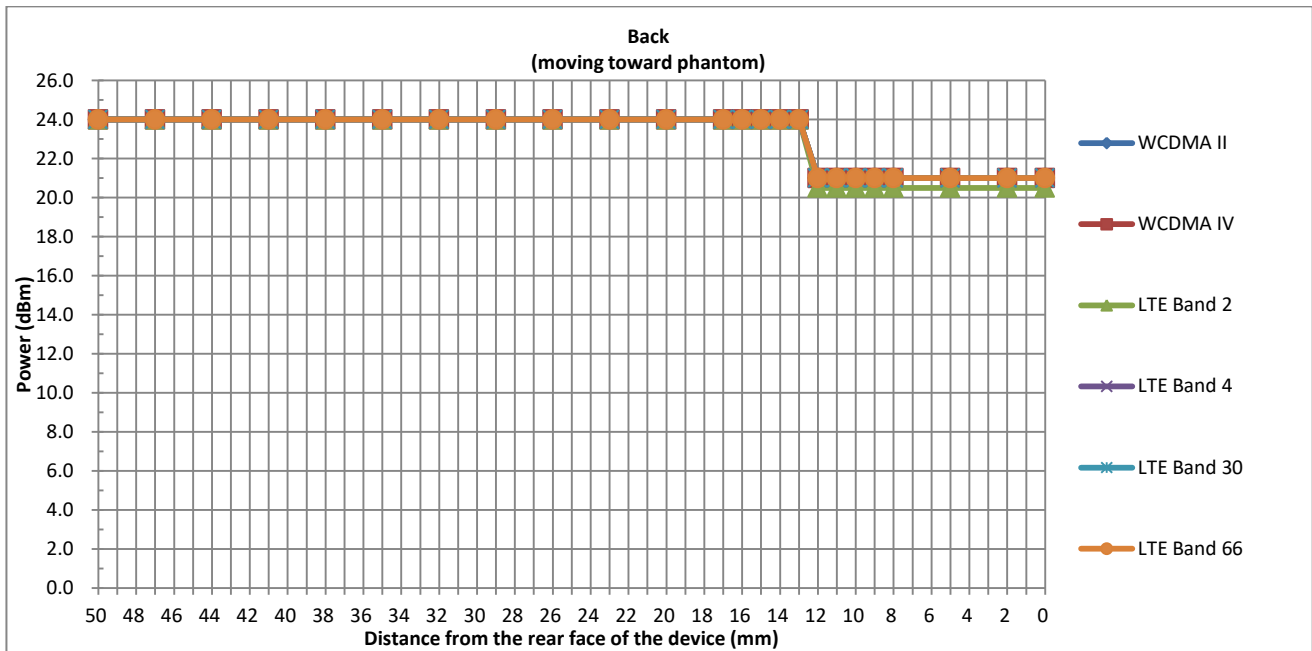






Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Back																									
Distance	50	49	46	43	40	37	34	31	28	25	22	21	20	19	18	17	16	15	14	13	12	9	6	3	0
WCDMA II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
WCDMA IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
LTE Band30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
LTE Band66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21

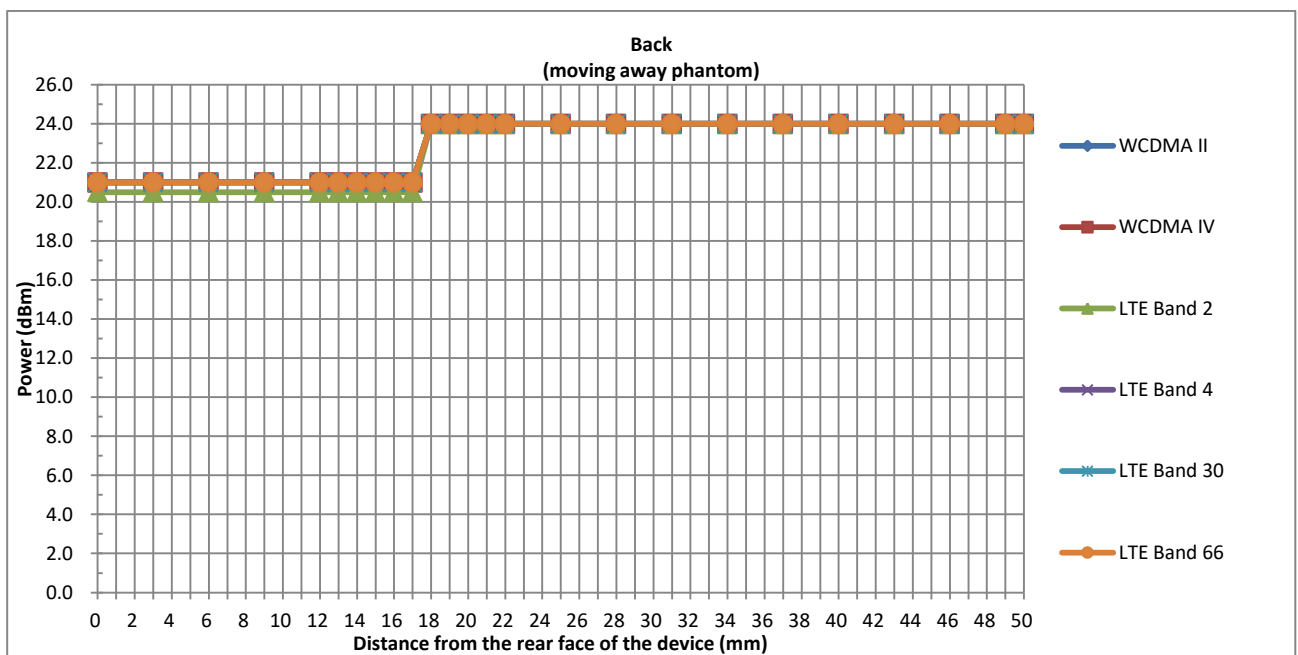




Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Bottom Side																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	16	15	14	13	12	11	10	9	8	5	2	0
WCDMA II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
WCDMA IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21

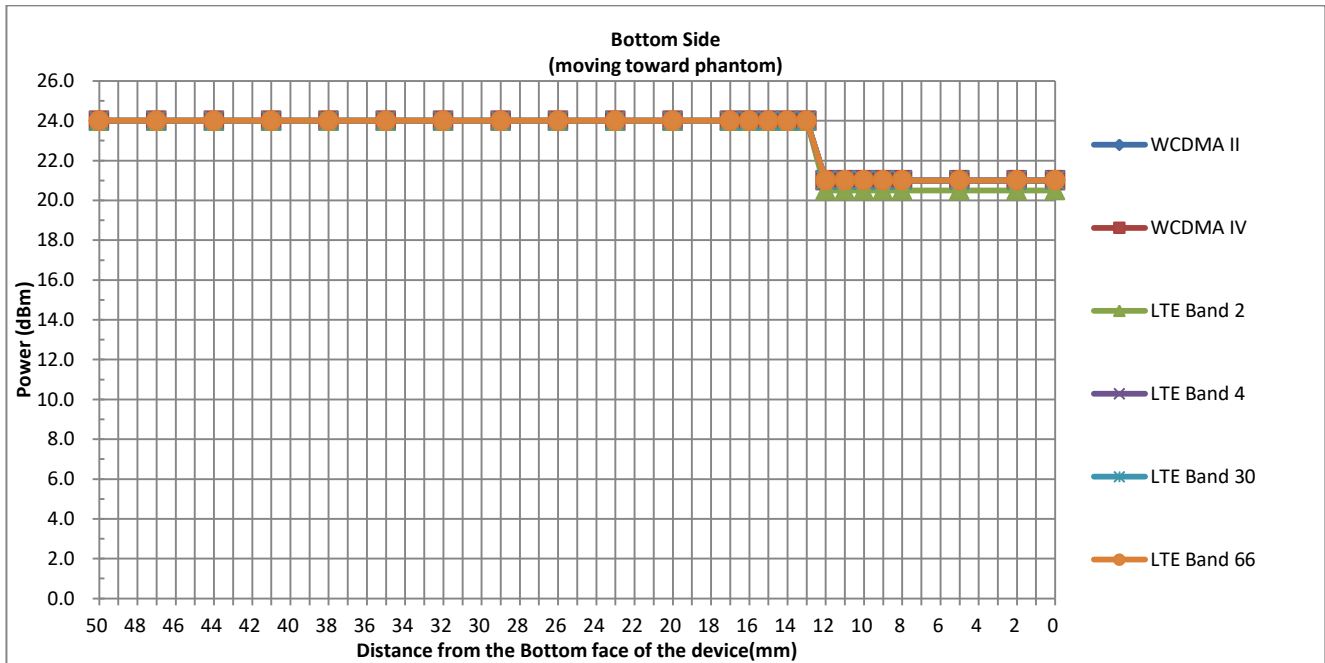



Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Bottom Side																								
Distance	50	48	45	42	39	36	33	30	27	24	21	20	19	18	17	16	15	14	13	12	9	6	3	0
WCDMA II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21
WCDMA IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21
LTE Band30	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21
LTE Band66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21

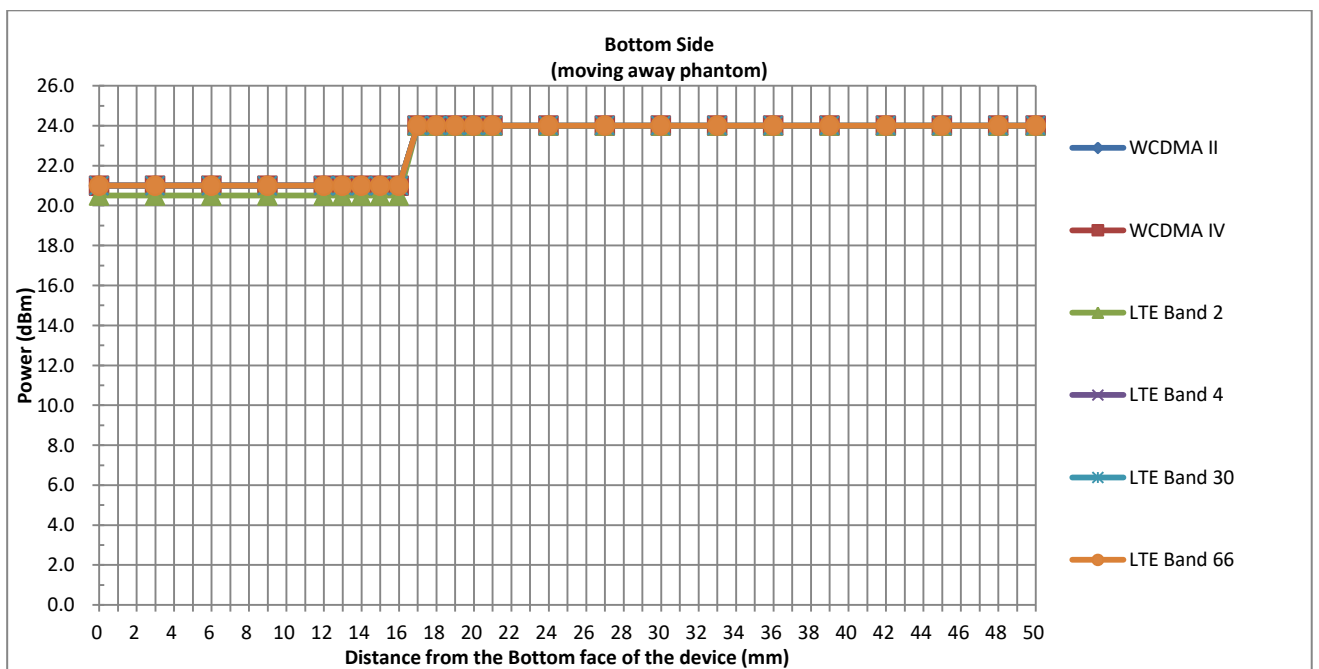

## **6. RF Exposure Limits**

### **6.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **6.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## 7. Specific Absorption Rate (SAR)

### 7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

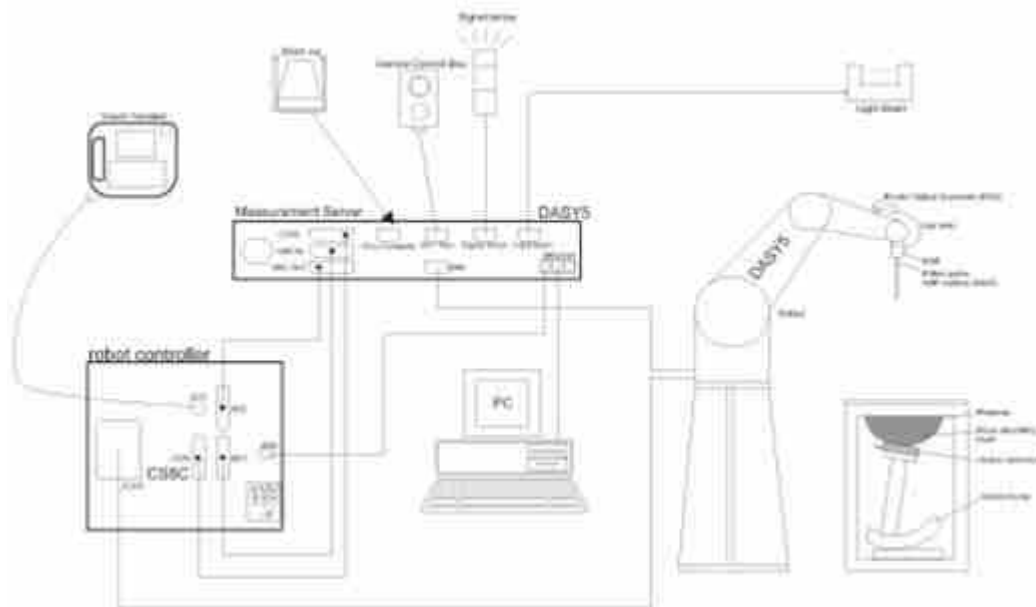


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

**8.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**8.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Photo of DAE**


**8.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.



## 8.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## 9. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### 9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2020/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2300MHz System Validation Kit	D2300V2	1055	2018/9/20	2021/9/19
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2020/9/23
SPEAG	Data Acquisition Electronics	DAE4	1210	2019/7/23	2020/7/22
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2019/5/27	2020/5/26
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2019/10/28	2020/10/27
Anritsu	Vector Signal Generator	MG3710A	6201682672	2020/1/8	2021/1/7
Rohde & Schwarz	Power Meter	NRVD	102081	2019/8/15	2020/8/14
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2019/8/14	2020/8/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2019/8/14	2020/8/13
R&S	CBT BLUETOOTH TESTER	CBT	101641	2020/1/8	2021/1/7
EXA	Spectrum Analyzer	FSV7	101631	2020/1/8	2021/1/7
Testo	Hygrometer	608-H1	1241332088	2020/1/8	2021/1/7
FLUKE	DIGITAC THERMOMETER	51II	97240029	2019/8/15	2020/8/14
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	

**Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

## 11. System Verification

### 11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.



Fig 11.1 Photo of Liquid Height for Head SAR

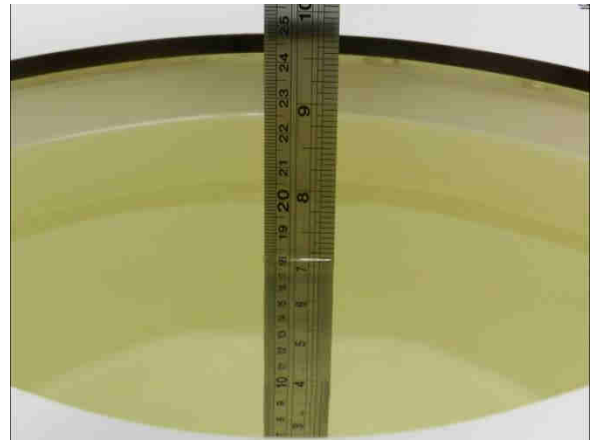


Fig 11.2 Photo of Liquid Height for Body SAR



**11.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Head	22.7	0.901	42.337	0.89	41.90	1.24	1.04	±5	2020/2/10
835	Head	22.9	0.884	42.118	0.90	41.50	-1.78	1.49	±5	2020/2/15
1750	Head	22.6	1.403	39.055	1.37	40.10	2.41	-2.61	±5	2020/2/20
1900	Head	22.7	1.392	38.174	1.40	40.00	-0.57	-4.57	±5	2020/2/25
2300	Head	22.8	1.718	39.874	1.67	39.50	2.87	0.95	±5	2020/2/23
2450	Head	22.8	1.890	39.240	1.80	39.20	5.00	0.10	±5	2020/2/26
5250	Head	22.7	4.595	36.402	4.71	35.90	-2.44	1.40	±5	2020/3/15
5600	Head	22.8	4.986	35.822	5.07	35.50	-1.66	0.91	±5	2020/3/18
5750	Head	22.8	5.160	35.569	5.22	35.40	-1.15	0.48	±5	2020/3/20



### 11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/2/10	750	Head	250	1087	3857	1210	2.18	8.36	8.72	4.31
2020/2/15	835	Head	250	4d151	3857	1210	2.34	9.30	9.36	0.65
2020/2/20	1750	Head	250	1090	3857	1210	9.56	36.40	38.24	5.05
2020/2/25	1900	Head	250	5d170	3857	1210	9.94	39.00	39.76	1.95
2020/2/23	2300	Head	250	1055	3857	1210	12.50	48.70	50	2.67
2020/2/26	2450	Head	250	908	3857	1210	12.10	52.80	48.4	-8.33
2020/3/15	5250	Head	100	1113	3857	1210	8.02	80.50	80.2	-0.37
2020/3/18	5600	Head	100	1113	3857	1210	8.31	83.40	83.1	-0.36
2020/3/20	5750	Head	100	1113	3857	1210	7.62	80.00	76.2	-4.75

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/2/10	750	Head	250	1087	3857	1210	1.46	5.65	5.84	3.36
2020/2/15	835	Head	250	4d151	3857	1210	1.53	6.16	6.12	-0.65
2020/2/20	1750	Head	250	1090	3857	1210	5.07	19.20	20.28	5.63
2020/2/25	1900	Head	250	5d170	3857	1210	5.07	20.30	20.28	-0.10
2020/2/23	2300	Head	250	1055	3857	1210	5.86	23.20	23.44	1.03
2020/2/26	2450	Head	250	908	3857	1210	5.56	24.20	22.24	-8.10
2020/3/15	5250	Head	100	1113	3857	1210	2.32	23.10	23.2	0.43
2020/3/18	5600	Head	100	1113	3857	1210	2.38	23.80	23.8	0.00
2020/3/20	5750	Head	100	1113	3857	1210	2.18	22.80	21.8	-4.39

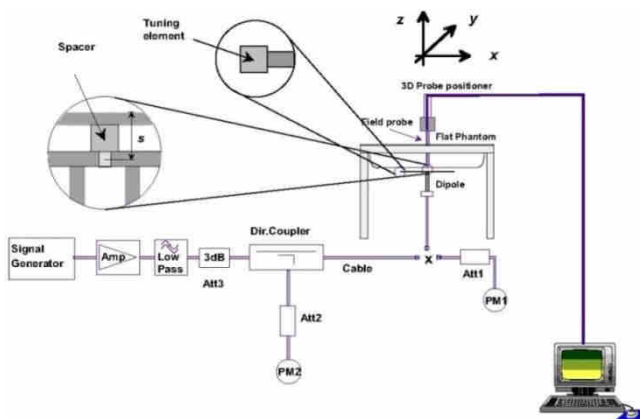


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo



## 12. RF Exposure Positions

### 12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

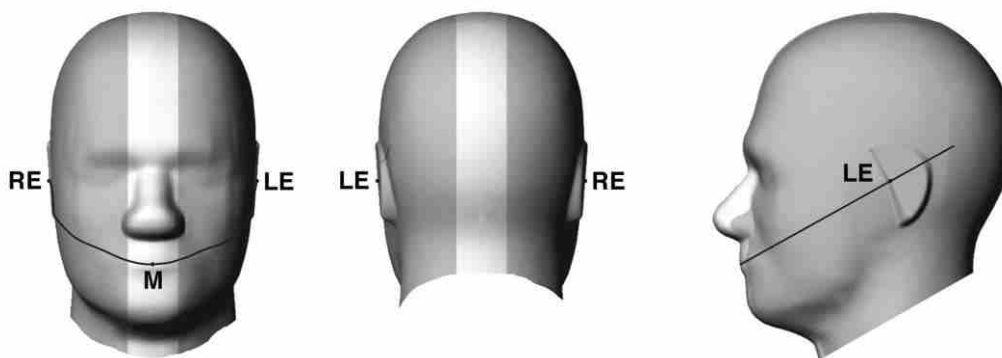


Fig 12.1.1 Front, back, and side views of SAM twin phantom

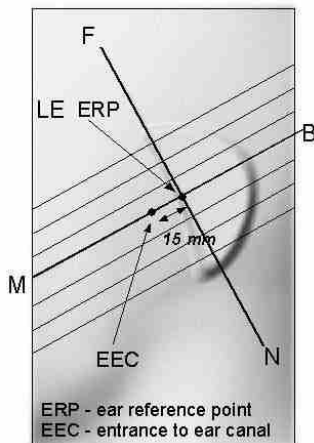


Fig 12.1.2 Close-up side view of phantom showing the ear region.

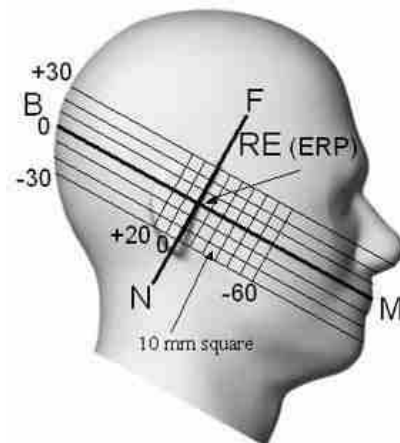


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

## 12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

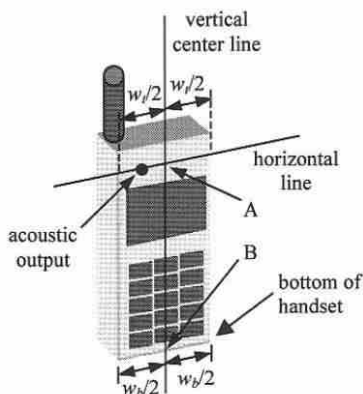


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

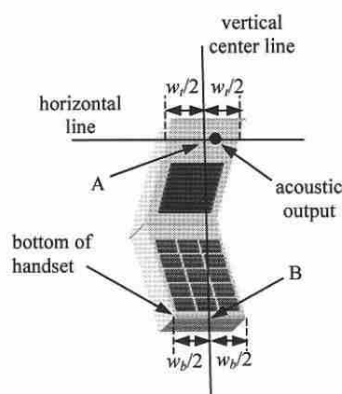


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”


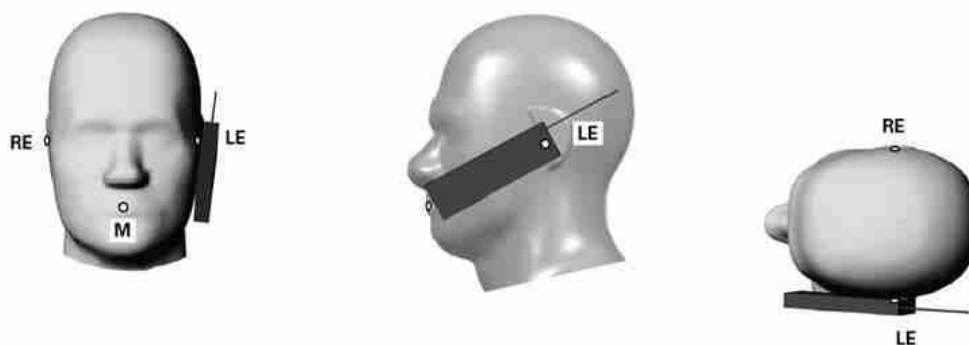


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

**12.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

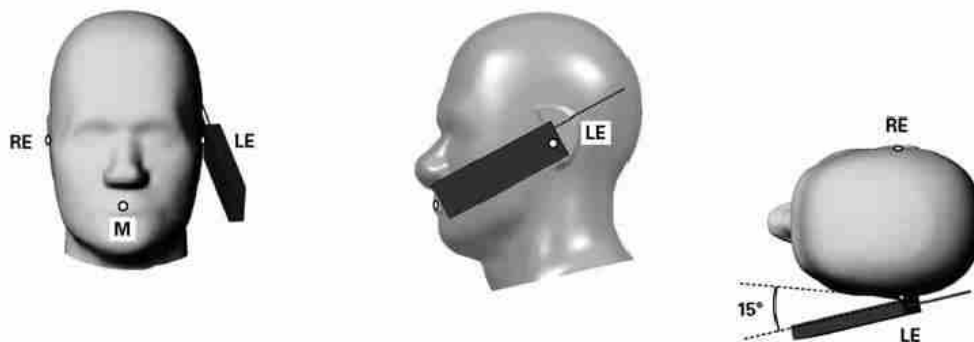

**Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

## 12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

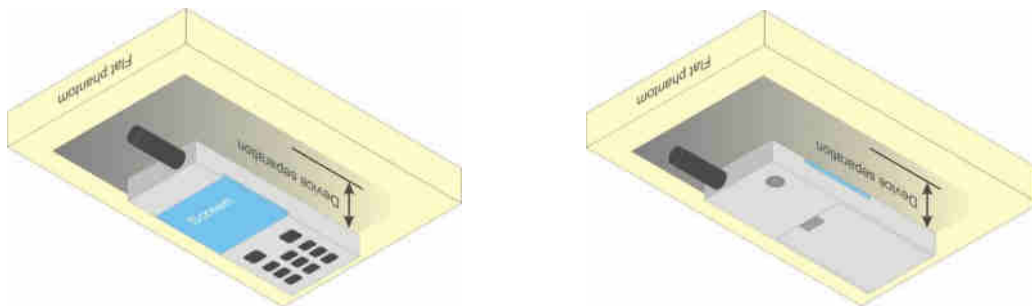


Fig 12.4 Body Worn Position

### 12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### 12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
2.4GHz WLAN & BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	No	Yes
2.4GHz WLAN & BT	Yes	Yes	Yes	No	Yes	No
5GHz WLAN	Yes	Yes	Yes	No	Yes	No

Note:

1. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V and LTE Band 2/4/5/12/13/14/66, WWAN antenna 2 frequency band include LTE Band 30.
2. 2.4GHz WLAN & BT Antenna is located at the Right-top of the device
3. 5GHz WLAN Antenna is located at the Right-top of the device

### **13. Conducted RF Output Power (Unit: dBm)**

The detailed conducted power table can refer to Appendix E.

#### **<GSM Conducted Power>**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

#### **<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

#### **HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.



Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{DQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{DQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

Setup Configuration

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_{sf}$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CDI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CDI} = 5/15$  with  $\beta_{HS} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**



**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

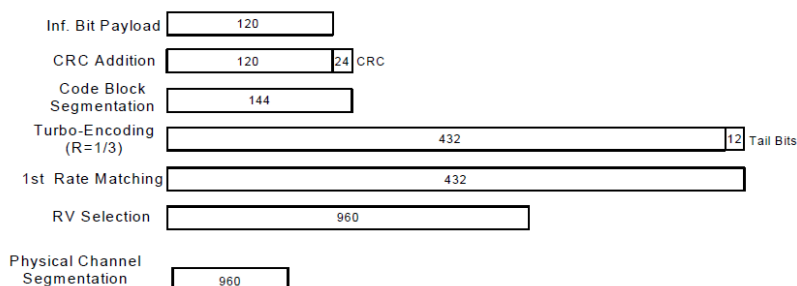

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 SAR test was covered by B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



**64QAM**



**16QAM**

**<WLAN Conducted Power>**

**General Note:**


1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. When receiver on, 802.11b/g/n-HT20, for WLAN2.4GHz reduced power will be active, only chose 802.11b 1Mbps mode to perform SAR testing for higher power than other modes.
6. When sensors on/hotspot, 802.11a/n-HT20/HT40 for WLAN5.2&5.3GHz&5.5GHz&5.8GHz reduced power will be active, only chose 802.11a 6Mbps mode to perform SAR testing for higher power than other modes.



<2.4GHz Bluetooth>

General Note:

- 1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
- 2. The Bluetooth duty cycle is 76.99 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

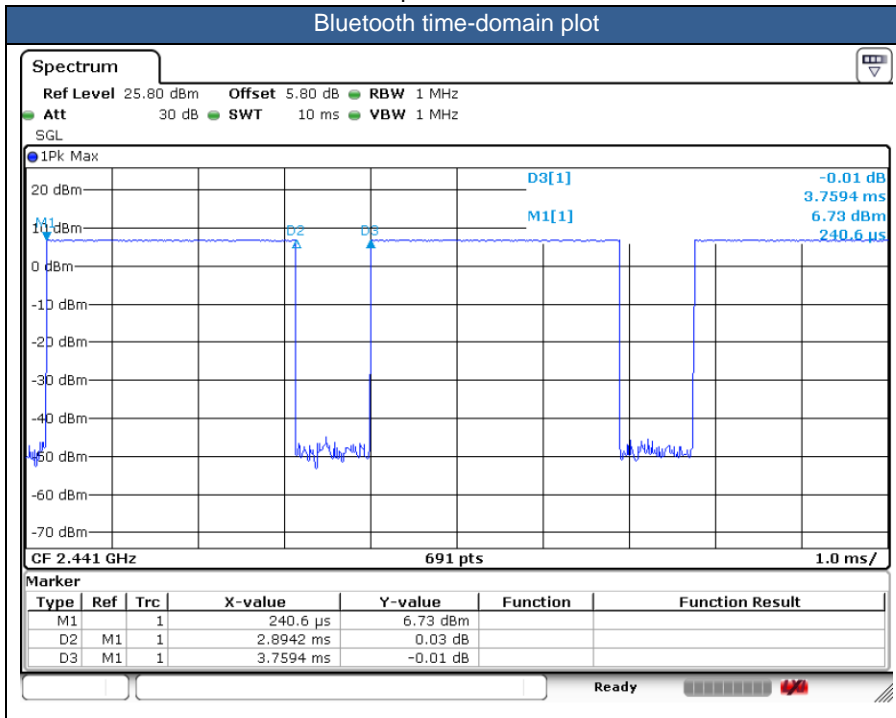

## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or  $2.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or  $1.5$  W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or  $1.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is  $\geq 0.8$ W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. When headset SAR is less than or equal than without headset SAR, no need to verify the remaining channels for headset SAR.
5. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz.
6. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV/V, LTE band 2/4/5/30/66 and WLAN5.2GHz/5.3GHz/5.5GHz/5.8GHz reduced power will be active.
7. P-sensor can detect handheld state, WCDMA band II/IV and LTE B2/4/30/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.
8. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV/V, LTE band 2/4/5/30/66 and WLAN/5.2GHz/WLAN/5.8GHz.
9. For P-sensor reduced power level is higher than hotspot reduced power for GSM1900, WCDMA band II/IV, LTE band 2/4/66, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
10. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V and LTE Band 2/4/5/12/13/14/66, WWAN antenna 2 frequency band include LTE Band 30.
11. 2.4GHz WLAN & BT Antenna is located at the Right-top of the device
12. 5GHz WLAN Antenna is located at the Right-top of the device
13. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the  $1.2$  W/kg SAR test reduction threshold.
  - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than  $1.2$ W/kg of GSM850/GSM1900, WCDMA Band II/IV/V, LTE Band 2/4/5/14/30/66, and WLAN 5.2/5.8GHz therefore product specific 10g SAR is necessary.
  - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
  - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
14. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:  
Front: [15 mm](#)  
Back: [19 mm](#)
15. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for handheld:  
Front: [5 mm](#)  
Back: [9 mm](#)



Bottom side: [11 mm](#)

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq$  ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**WCDMA Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”.
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq$  ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq$  1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq$  0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $>$  1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is  $>$  not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq$  1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq$  1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. This device supports HPUE for LTE band 41 with class 2 level, so HPUE SAR has been performed.
7. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE B4 SAR test was covered by LTE B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band





**WLAN/Bluetooth Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. Bluetooth 15mm front SAR and 19mm back SAR performed for co-located with WWAN analysis.





14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 2 Tx slots	Right Cheek	Full	128	824.2	29.76	30.50	1.186	-0.17	0.252	<b>0.299</b>
	GSM850	GPRS 2 Tx slots	Right Tilted	Full	128	824.2	29.76	30.50	1.186	-0.1	0.192	0.228
	GSM850	GPRS 2 Tx slots	Left Cheek	Full	128	824.2	29.76	30.50	1.186	-0.02	0.215	0.255
	GSM850	GPRS 2 Tx slots	Left Tilted	Full	128	824.2	29.76	30.50	1.186	-0.01	0.192	0.228
	GSM1900	GPRS 2 Tx slots	Right Cheek	Full	810	1909.8	26.57	27.50	1.239	-0.03	0.006	0.007
	GSM1900	GPRS 2 Tx slots	Right Tilted	Full	810	1909.8	26.57	27.50	1.239	0.06	0.006	0.007
02	GSM1900	GPRS 2 Tx slots	Left Cheek	Full	810	1909.8	26.57	27.50	1.239	0.03	0.013	<b>0.016</b>
	GSM1900	GPRS 2 Tx slots	Left Tilted	Full	810	1909.8	26.57	27.50	1.239	0.06	0.005	0.006

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II	RMC 12.2Kbps	Right Cheek	Full	9400	1880	23.62	24.00	1.091	0.05	0.081	<b>0.089</b>
	WCDMA II	RMC 12.2Kbps	Right Tilted	Full	9400	1880	23.62	24.00	1.091	0.09	0.026	0.029
	WCDMA II	RMC 12.2Kbps	Left Cheek	Full	9400	1880	23.62	24.00	1.091	0.08	0.048	0.052
	WCDMA II	RMC 12.2Kbps	Left Tilted	Full	9400	1880	23.62	24.00	1.091	0.01	0.035	0.039
	WCDMA IV	RMC 12.2Kbps	Right Cheek	Full	1513	1752.6	23.56	24.00	1.107	0.08	0.058	0.064
	WCDMA IV	RMC 12.2Kbps	Right Tilted	Full	1513	1752.6	23.56	24.00	1.107	0.12	0.034	0.037
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	Full	1513	1752.6	23.56	24.00	1.107	0.08	0.065	<b>0.072</b>
	WCDMA IV	RMC 12.2Kbps	Left Tilted	Full	1513	1752.6	23.56	24.00	1.107	0.12	0.037	0.041
05	WCDMA V	RMC 12.2Kbps	Right Cheek	Full	4233	846.6	23.37	24.00	1.156	0.14	0.339	<b>0.392</b>
	WCDMA V	RMC 12.2Kbps	Right Tilted	Full	4233	846.6	23.37	24.00	1.156	0.03	0.173	0.200
	WCDMA V	RMC 12.2Kbps	Left Cheek	Full	4233	846.6	23.37	24.00	1.156	-0.11	0.273	0.316
	WCDMA V	RMC 12.2Kbps	Left Tilted	Full	4233	846.6	23.37	24.00	1.156	0.05	0.166	0.192



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Full	18900	1880	23.11	24.00	1.227	-0.06	0.038	0.047
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Full	18900	1880	22.10	23.00	1.230	0.05	0.018	0.022
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Full	18900	1880	23.11	24.00	1.227	0.01	0.012	0.015
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Full	18900	1880	22.10	23.00	1.230	-0.06	0.013	0.016
06	LTE Band 2	20M	QPSK	1	0	Left Cheek	Full	18900	1880	23.11	24.00	1.227	0.02	0.047	<b>0.058</b>
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Full	18900	1880	22.10	23.00	1.230	0.07	0.026	0.031
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Full	18900	1880	23.11	24.00	1.227	0.02	0.033	0.041
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Full	18900	1880	22.10	23.00	1.230	0.03	0.017	0.020
07	LTE Band 66	20M	QPSK	1	0	Right Cheek	Full	132322	1745	23.26	24.00	1.186	0.03	0.059	<b>0.070</b>
	LTE Band 66	20M	QPSK	50	0	Right Cheek	Full	132322	1745	22.42	23.00	1.143	0.06	0.032	0.037
	LTE Band 66	20M	QPSK	1	0	Right Tilted	Full	132322	1745	23.26	24.00	1.186	-0.03	0.035	0.041
	LTE Band 66	20M	QPSK	50	0	Right Tilted	Full	132322	1745	22.42	23.00	1.143	0.05	0.019	0.021
	LTE Band 66	20M	QPSK	1	0	Left Cheek	Full	132322	1745	23.26	24.00	1.186	0.06	0.050	0.059
	LTE Band 66	20M	QPSK	50	0	Left Cheek	Full	132322	1745	22.42	23.00	1.143	0.05	0.031	0.035
	LTE Band 66	20M	QPSK	1	0	Left Tilted	Full	132322	1745	23.26	24.00	1.186	-0.01	0.032	0.038
	LTE Band 66	20M	QPSK	50	0	Left Tilted	Full	132322	1745	22.42	23.00	1.143	0.06	0.018	0.020
08	LTE Band 5	10M	QPSK	1	49	Right Cheek	Full	20525	836.5	23.27	24.00	1.183	0.09	0.351	<b>0.415</b>
	LTE Band 5	10M	QPSK	25	12	Right Cheek	Full	20525	836.5	22.30	23.00	1.175	-0.02	0.120	0.141
	LTE Band 5	10M	QPSK	1	49	Right Tilted	Full	20525	836.5	23.27	24.00	1.183	-0.01	0.173	0.205
	LTE Band 5	10M	QPSK	25	12	Right Tilted	Full	20525	836.5	22.30	23.00	1.175	-0.06	0.088	0.104
	LTE Band 5	10M	QPSK	1	49	Left Cheek	Full	20525	836.5	23.27	24.00	1.183	0.01	0.257	0.304
	LTE Band 5	10M	QPSK	25	12	Left Cheek	Full	20525	836.5	22.30	23.00	1.175	0.09	0.134	0.157
	LTE Band 5	10M	QPSK	1	49	Left Tilted	Full	20525	836.5	23.27	24.00	1.183	0.13	0.196	0.232
	LTE Band 5	10M	QPSK	25	12	Left Tilted	Full	20525	836.5	22.30	23.00	1.175	-0.04	0.093	0.109
09	LTE Band 12	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	22.96	24.00	1.271	0.08	0.240	<b>0.305</b>
	LTE Band 12	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	22.15	23.00	1.216	0.07	0.149	0.181
	LTE Band 12	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	22.96	24.00	1.271	-0.09	0.134	0.170
	LTE Band 12	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	22.15	23.00	1.216	0.04	0.084	0.102
	LTE Band 12	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	22.96	24.00	1.271	0.15	0.235	0.299
	LTE Band 12	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	22.15	23.00	1.216	-0.01	0.137	0.167
	LTE Band 12	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	22.96	24.00	1.271	0.04	0.193	0.245
	LTE Band 12	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	22.15	23.00	1.216	0.17	0.091	0.111
10	LTE Band 13	10M	QPSK	1	25	Right Cheek	Full	23230	782	23.45	24.00	1.135	0.04	0.362	<b>0.411</b>
	LTE Band 13	10M	QPSK	25	0	Right Cheek	Full	23230	782	22.32	23.00	1.169	0.06	0.237	0.277
	LTE Band 13	10M	QPSK	1	25	Right Tilted	Full	23230	782	23.45	24.00	1.135	0.05	0.251	0.285
	LTE Band 13	10M	QPSK	25	0	Right Tilted	Full	23230	782	22.32	23.00	1.169	0.02	0.123	0.144
	LTE Band 13	10M	QPSK	1	25	Left Cheek	Full	23230	782	23.45	24.00	1.135	0.06	0.293	0.333
	LTE Band 13	10M	QPSK	25	0	Left Cheek	Full	23230	782	22.32	23.00	1.169	0.02	0.154	0.180
	LTE Band 13	10M	QPSK	1	25	Left Tilted	Full	23230	782	23.45	24.00	1.135	0.08	0.226	0.257
	LTE Band 13	10M	QPSK	25	0	Left Tilted	Full	23230	782	22.32	23.00	1.169	0.05	0.128	0.150



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
11	LTE Band 14	10M	QPSK	1	0	Right Cheek	Full	23330	793	23.56	24.00	1.107	-0.01	0.405	<b>0.448</b>
	LTE Band 14	10M	QPSK	25	25	Right Cheek	Full	23330	793	22.27	23.00	1.183	0.03	0.185	0.219
	LTE Band 14	10M	QPSK	1	0	Right Tilted	Full	23330	793	23.56	24.00	1.107	0.03	0.241	0.267
	LTE Band 14	10M	QPSK	25	25	Right Tilted	Full	23330	793	22.27	23.00	1.183	0.01	0.111	0.131
	LTE Band 14	10M	QPSK	1	0	Left Cheek	Full	23330	793	23.56	24.00	1.107	-0.08	0.284	0.314
	LTE Band 14	10M	QPSK	25	25	Left Cheek	Full	23330	793	22.27	23.00	1.183	0.05	0.125	0.148
	LTE Band 14	10M	QPSK	1	0	Left Tilted	Full	23330	793	23.56	24.00	1.107	0.07	0.237	0.262
	LTE Band 14	10M	QPSK	25	25	Left Tilted	Full	23330	793	22.27	23.00	1.183	0.01	0.115	0.136
	LTE Band 30	10M	QPSK	1	0	Right Cheek	Full	27710	2310	23.26	24.00	1.186	-0.07	0.208	0.247
	LTE Band 30	10M	QPSK	25	0	Right Cheek	Full	27710	2310	22.13	23.00	1.222	0.02	0.125	0.153
	LTE Band 30	10M	QPSK	1	0	Right Tilted	Full	27710	2310	23.26	24.00	1.186	0.02	0.134	0.159
	LTE Band 30	10M	QPSK	25	0	Right Tilted	Full	27710	2310	22.13	23.00	1.222	0.02	0.081	0.099
12	LTE Band 30	10M	QPSK	1	0	Left Cheek	Full	27710	2310	23.26	24.00	1.186	-0.12	0.289	<b>0.343</b>
	LTE Band 30	10M	QPSK	25	0	Left Cheek	Full	27710	2310	22.13	23.00	1.222	0.08	0.173	0.211
	LTE Band 30	10M	QPSK	1	0	Left Tilted	Full	27710	2310	23.26	24.00	1.186	0.01	0.071	0.084
	LTE Band 30	10M	QPSK	25	0	Left Tilted	Full	27710	2310	22.13	23.00	1.222	0.18	0.068	0.083



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	6	2437	16.45	17.00	1.135	97.59	1.025	0.02	0.422	0.491
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	6	2437	16.45	17.00	1.135	97.59	1.025	0.05	0.420	0.489
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	6	2437	16.45	17.00	1.135	97.59	1.025	0.14	0.929	<b>1.081</b>
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	1	2412	16.15	17.00	1.216	97.59	1.025	-0.05	0.668	0.833
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	6	2437	16.45	17.00	1.135	97.59	1.025	-0.01	0.562	0.654

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0.06	0.078	0.086
	Bluetooth	1Mbps	Right Tilted	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0.08	0.072	0.079
14	Bluetooth	1Mbps	Left Cheek	Full	78	2480	9.44	9.50	1.014	76.99	1.082	-0.07	0.164	<b>0.180</b>
	Bluetooth	1Mbps	Left Tilted	Full	78	2480	9.44	9.50	1.014	76.99	1.082	-0.08	0.123	0.135

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Full	60	5300	16.53	17.00	1.114	87.04	1.149	0.03	0.076	0.097
15	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Full	60	5300	16.53	17.00	1.114	87.04	1.149	-0.09	0.079	<b>0.102</b>
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Full	60	5300	16.53	17.00	1.114	87.04	1.149	-0.03	0.054	0.069
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Full	60	5300	16.53	17.00	1.114	87.04	1.149	-0.02	0.075	0.096
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Full	124	5620	16.58	17.00	1.101	87.04	1.149	0.01	0.058	0.073
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Full	124	5620	16.58	17.00	1.101	87.04	1.149	-0.04	0.069	0.087
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Full	124	5620	16.58	17.00	1.101	87.04	1.149	0.12	0.049	0.062
16	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Full	124	5620	16.58	17.00	1.101	87.04	1.149	-0.01	0.074	<b>0.093</b>
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	Full	165	5825	17.97	18.00	1.006	87.04	1.149	-0.01	0.101	0.117
17	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	Full	165	5825	17.97	18.00	1.006	87.04	1.149	-0.09	0.143	<b>0.165</b>
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	Full	165	5825	17.97	18.00	1.006	87.04	1.149	-0.07	0.073	0.084
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	Full	165	5825	17.97	18.00	1.006	87.04	1.149	-0.01	0.095	0.110



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	5mm	Full	128	824.2	29.76	30.50	1.186	0.09	1.120	1.328
	GSM850	GPRS 2 Tx slots	Front	5mm	Full	189	836.4	29.62	30.50	1.225	0.08	0.986	1.207
	GSM850	GPRS 2 Tx slots	Front	5mm	Full	251	848.8	29.57	30.50	1.239	-0.07	0.807	1.000
	GSM850	GPRS 2 Tx slots	Back	5mm	Full	128	824.2	29.76	30.50	1.186	0.09	1.150	1.364
18	GSM850	GPRS 2 Tx slots	Back	5mm	Full	189	836.4	29.62	30.50	1.225	-0.14	1.120	1.372
	GSM850	GPRS 2 Tx slots	Back	5mm	Full	251	848.8	29.57	30.50	1.239	0.16	0.867	1.074
	GSM850	GPRS 2 Tx slots	Left Side	5mm	Full	128	824.2	29.76	30.50	1.186	-0.12	0.284	0.337
	GSM850	GPRS 2 Tx slots	Right Side	5mm	Full	128	824.2	29.76	30.50	1.186	0.1	0.563	0.668
	GSM850	GPRS 2 Tx slots	Bottom Side	5mm	Full	128	824.2	29.76	30.50	1.186	-0.02	0.987	1.170
	GSM850	GPRS 2 Tx slots	Bottom Side	5mm	Full	189	836.4	29.62	30.50	1.225	0.03	0.868	1.063
	GSM850	GPRS 2 Tx slots	Bottom Side	5mm	Full	251	848.8	29.57	30.50	1.239	-0.09	0.728	0.902
	GSM1900	GPRS 2 Tx slots	Front	5mm	Reduced	810	1909.8	23.44	24.50	1.276	0.04	0.850	1.085
	GSM1900	GPRS 2 Tx slots	Front	5mm	Reduced	512	1850.2	23.31	24.50	1.315	0.05	0.876	1.152
	GSM1900	GPRS 2 Tx slots	Front	5mm	Reduced	661	1880	23.42	24.50	1.282	0.03	0.833	1.068
	GSM1900	GPRS 2 Tx slots	Back	5mm	Reduced	810	1909.8	23.44	24.50	1.276	0.07	0.913	1.165
19	GSM1900	GPRS 2 Tx slots	Back	5mm	Reduced	512	1850.2	23.31	24.50	1.315	0.05	0.936	1.231
	GSM1900	GPRS 2 Tx slots	Back	5mm	Reduced	661	1880	23.42	24.50	1.282	0.05	0.911	1.168
	GSM1900	GPRS 2 Tx slots	Left Side	5mm	Reduced	810	1909.8	20.87	22.00	1.297	-0.07	0.008	0.010
	GSM1900	GPRS 2 Tx slots	Right Side	5mm	Reduced	810	1909.8	20.87	22.00	1.297	0.02	0.014	0.018
	GSM1900	GPRS 2 Tx slots	Bottom Side	5mm	Reduced	810	1909.8	20.87	22.00	1.297	0.01	0.696	0.903
	GSM1900	GPRS 2 Tx slots	Bottom Side	5mm	Reduced	512	1850.2	20.70	22.00	1.349	0.02	0.620	0.836
	GSM1900	GPRS 2 Tx slots	Bottom Side	5mm	Reduced	661	1880	20.83	22.00	1.309	0.01	0.860	1.126



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	Reduced	9400	1880	16.78	17.00	1.052	0.02	0.751	0.790
	WCDMA II	RMC 12.2Kbps	Front	5mm	Reduced	9262	1852.4	16.73	17.00	1.064	0.04	0.762	0.811
	WCDMA II	RMC 12.2Kbps	Front	5mm	Reduced	9538	1907.6	16.53	17.00	1.114	0.08	0.778	0.867
	WCDMA II	RMC 12.2Kbps	Back	5mm	Reduced	9400	1880	16.78	17.00	1.052	0.09	1.090	1.147
	WCDMA II	RMC 12.2Kbps	Back	5mm	Reduced	9262	1852.4	16.73	17.00	1.064	0.07	1.100	1.171
20	WCDMA II	RMC 12.2Kbps	Back	5mm	Reduced	9538	1907.6	16.53	17.00	1.114	0.09	1.090	1.215
	WCDMA II	RMC 12.2Kbps	Left Side	5mm	Reduced	9400	1880	13.81	14.50	1.172	0.09	0.010	0.012
	WCDMA II	RMC 12.2Kbps	Right Side	5mm	Reduced	9400	1880	13.81	14.50	1.172	0.01	0.012	0.014
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9400	1880	13.81	14.50	1.172	-0.03	0.695	0.815
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9262	1852.4	13.75	14.50	1.189	-0.03	0.692	0.822
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9538	1907.6	13.71	14.50	1.199	0.19	1.010	1.211
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Reduced	1513	1752.6	16.85	17.50	1.161	0.03	0.930	1.080
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Reduced	1312	1712.4	16.76	17.50	1.186	0.02	0.820	0.972
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Reduced	1413	1732.6	16.82	17.50	1.169	0.05	0.888	1.039
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Reduced	1513	1752.6	16.85	17.50	1.161	0.01	1.110	1.289
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Reduced	1312	1712.4	16.76	17.50	1.186	-0.03	1.040	1.233
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Reduced	1413	1732.6	16.82	17.50	1.169	0.06	1.060	1.240
	WCDMA IV	RMC 12.2Kbps	Left Side	5mm	Reduced	1513	1752.6	14.28	15.00	1.180	0.01	0.057	0.067
	WCDMA IV	RMC 12.2Kbps	Right Side	5mm	Reduced	1513	1752.6	14.28	15.00	1.180	0.02	0.062	0.073
21	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1513	1752.6	14.28	15.00	1.180	0.01	1.160	1.369
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1312	1712.4	14.17	15.00	1.211	-0.03	1.010	1.223
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1413	1732.6	14.27	15.00	1.183	0.01	1.100	1.301
	WCDMA V	RMC 12.2Kbps	Front	5mm	Reduced	4233	846.6	21.87	23.00	1.297	-0.09	0.874	1.134
22	WCDMA V	RMC 12.2Kbps	Front	5mm	Reduced	4182	836.4	21.86	23.00	1.300	-0.08	0.936	1.217
	WCDMA V	RMC 12.2Kbps	Front	5mm	Reduced	4132	826.4	21.84	23.00	1.306	-0.01	0.919	1.200
	WCDMA V	RMC 12.2Kbps	Back	5mm	Reduced	4233	846.6	21.87	23.00	1.297	0.06	0.851	1.104
	WCDMA V	RMC 12.2Kbps	Back	5mm	Reduced	4182	836.4	21.86	23.00	1.300	0.12	0.896	1.165
	WCDMA V	RMC 12.2Kbps	Back	5mm	Reduced	4132	826.4	21.84	23.00	1.306	0.08	0.853	1.114
	WCDMA V	RMC 12.2Kbps	Left Side	5mm	Reduced	4233	846.6	21.87	23.00	1.297	-0.08	0.292	0.379
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	Reduced	4233	846.6	21.87	23.00	1.297	0.09	0.639	0.829
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Reduced	4233	846.6	21.87	23.00	1.297	0.1	0.698	0.905
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Reduced	4182	836.4	21.86	23.00	1.300	0.02	0.711	0.924
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Reduced	4132	826.4	21.84	23.00	1.306	0.09	0.918	1.199





<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Reduced	18900	1880	16.48	17.00	1.127	0.02	0.787	0.887
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Reduced	18700	1860	16.38	17.00	1.153	0.05	0.780	0.900
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Reduced	19100	1900	16.20	17.00	1.202	0.04	0.766	0.921
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Reduced	18900	1880	16.37	17.00	1.156	0.01	0.760	0.879
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Reduced	18700	1860	16.24	17.00	1.191	-0.07	0.911	1.085
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Reduced	19100	1900	16.18	17.00	1.208	-0.01	0.888	1.073
	LTE Band 2	20M	QPSK	100	0	Front	5mm	Reduced	18900	1880	16.30	17.00	1.175	0.01	0.912	1.072
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Reduced	18900	1880	16.48	17.00	1.127	0.02	0.787	0.887
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Reduced	18700	1860	16.38	17.00	1.153	0.06	0.801	0.924
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Reduced	19100	1900	16.20	17.00	1.202	-0.04	0.930	1.118
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Reduced	18900	1880	16.37	17.00	1.156	0.04	0.788	0.911
23	LTE Band 2	20M	QPSK	50	0	Back	5mm	Reduced	18700	1860	16.24	17.00	1.191	0.02	1.040	1.239
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Reduced	19100	1900	16.18	17.00	1.208	0.02	0.997	1.204
	LTE Band 2	20M	QPSK	100	0	Back	5mm	Reduced	18900	1880	16.30	17.00	1.175	0.02	1.050	1.234
	LTE Band 2	20M	QPSK	1	0	Left Side	5mm	Reduced	18900	1880	14.45	15.00	1.135	0.04	0.023	0.026
	LTE Band 2	20M	QPSK	50	0	Left Side	5mm	Reduced	18900	1880	14.42	15.00	1.143	0.08	0.020	0.023
	LTE Band 2	20M	QPSK	1	0	Right Side	5mm	Reduced	18900	1880	14.45	15.00	1.135	0.05	0.025	0.028
	LTE Band 2	20M	QPSK	50	0	Right Side	5mm	Reduced	18900	1880	14.42	15.00	1.143	0.07	0.019	0.022
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Reduced	18900	1880	14.45	15.00	1.135	-0.03	1.070	1.214
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Reduced	18700	1860	14.23	15.00	1.194	0.09	1.080	1.290
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Reduced	19100	1900	14.44	15.00	1.138	-0.05	1.030	1.172
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Reduced	18900	1880	14.42	15.00	1.143	-0.01	1.040	1.189
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Reduced	18700	1860	14.37	15.00	1.156	-0.05	1.040	1.202
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Reduced	19100	1900	14.39	15.00	1.151	-0.06	0.996	1.146
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5mm	Reduced	18900	1880	14.38	15.00	1.153	-0.03	1.050	1.211
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Reduced	132322	1745	16.93	17.50	1.140	0.19	0.918	1.047
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Reduced	132072	1720	16.77	17.50	1.183	0.1	0.813	0.962
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Reduced	132572	1770	16.84	17.50	1.164	0.02	0.932	1.085
	LTE Band 66	20M	QPSK	50	0	Front	5mm	Reduced	132322	1745	16.78	17.50	1.180	0.02	0.956	1.128
	LTE Band 66	20M	QPSK	50	0	Front	5mm	Reduced	132072	1720	16.72	17.50	1.197	0.05	0.890	1.065
	LTE Band 66	20M	QPSK	50	0	Front	5mm	Reduced	132572	1770	16.73	17.50	1.194	0.09	1.030	1.230
	LTE Band 66	20M	QPSK	100	0	Front	5mm	Reduced	132322	1745	16.79	17.50	1.178	-0.03	1.020	1.201
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Reduced	132322	1745	16.93	17.50	1.140	0.03	0.996	1.136
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Reduced	132072	1720	16.77	17.50	1.183	0.02	0.851	1.007
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Reduced	132572	1770	16.84	17.50	1.164	0.15	1.010	1.176
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Reduced	132322	1745	16.78	17.50	1.180	0.02	1.030	1.216
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Reduced	132072	1720	16.72	17.50	1.197	-0.07	1.010	1.209
24	LTE Band 66	20M	QPSK	50	0	Back	5mm	Reduced	132572	1770	16.73	17.50	1.194	0.05	1.160	1.385
	LTE Band 66	20M	QPSK	100	0	Back	5mm	Reduced	132322	1745	16.79	17.50	1.178	0.12	1.120	1.319
	LTE Band 66	20M	QPSK	1	0	Left Side	5mm	Reduced	132322	1745	14.58	15.00	1.102	0.04	0.029	0.032
	LTE Band 66	20M	QPSK	50	0	Left Side	5mm	Reduced	132322	1745	14.27	15.00	1.183	0.04	0.029	0.034
	LTE Band 66	20M	QPSK	1	0	Right Side	5mm	Reduced	132322	1745	14.58	15.00	1.102	-0.03	0.039	0.043
	LTE Band 66	20M	QPSK	50	0	Right Side	5mm	Reduced	132322	1745	14.27	15.00	1.183	-0.02	0.040	0.047
	LTE Band 66	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132322	1745	14.58	15.00	1.102	0.08	0.932	1.027
	LTE Band 66	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132072	1720	14.23	15.00	1.194	0.02	0.763	0.911
	LTE Band 66	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132572	1770	14.13	15.00	1.222	0.01	0.964	1.178
	LTE Band 66	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132322	1745	14.27	15.00	1.183	0.09	0.927	1.097
	LTE Band 66	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132072	1720	14.10	15.00	1.230	-0.01	0.807	0.993
	LTE Band 66	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132572	1770	14.23	15.00	1.194	0.02	1.010	1.206
	LTE Band 66	20M	QPSK	100	0	Bottom Side	5mm	Reduced	132322	1745	14.20	15.00	1.202	-0.03	0.959	1.153



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
25	LTE Band 5	10M	QPSK	1	0	Front	5mm	Reduced	20525	836.5	22.12	23.00	1.225	0.01	1.090	<b>1.335</b>
	LTE Band 5	10M	QPSK	25	0	Front	5mm	Reduced	20525	836.5	21.87	23.00	1.297	0.06	0.693	0.899
	LTE Band 5	10M	QPSK	50	0	Front	5mm	Reduced	20525	836.5	21.84	23.00	1.306	-0.01	0.687	0.897
	LTE Band 5	10M	QPSK	1	0	Back	5mm	Reduced	20525	836.5	22.12	23.00	1.225	0.12	0.945	1.157
	LTE Band 5	10M	QPSK	25	0	Back	5mm	Reduced	20525	836.5	21.87	23.00	1.297	0.08	0.593	0.769
	LTE Band 5	10M	QPSK	50	0	Back	5mm	Reduced	20525	836.5	21.84	23.00	1.306	0.11	0.599	0.782
	LTE Band 5	10M	QPSK	1	0	Left Side	5mm	Reduced	20525	836.5	22.12	23.00	1.225	0.16	0.281	0.344
	LTE Band 5	10M	QPSK	25	0	Left Side	5mm	Reduced	20525	836.5	21.87	23.00	1.297	0.02	0.198	0.257
	LTE Band 5	10M	QPSK	1	0	Right Side	5mm	Reduced	20525	836.5	22.12	23.00	1.225	0.11	0.573	0.702
	LTE Band 5	10M	QPSK	25	0	Right Side	5mm	Reduced	20525	836.5	21.87	23.00	1.297	0.16	0.365	0.473
	LTE Band 5	10M	QPSK	1	0	Bottom Side	5mm	Reduced	20525	836.5	22.12	23.00	1.225	-0.03	0.993	1.216
	LTE Band 5	10M	QPSK	25	0	Bottom Side	5mm	Reduced	20525	836.5	21.87	23.00	1.297	0.03	0.561	0.728
	LTE Band 5	10M	QPSK	50	0	Bottom Side	5mm	Reduced	20525	836.5	21.84	23.00	1.306	0	0.564	0.737
26	LTE Band 12	10M	QPSK	1	0	Front	5mm	Full	23095	707.5	22.96	24.00	1.271	-0.03	0.805	<b>1.023</b>
	LTE Band 12	10M	QPSK	25	0	Front	5mm	Full	23095	707.5	22.15	23.00	1.216	0.02	0.400	0.486
	LTE Band 12	10M	QPSK	50	0	Front	5mm	Full	23095	707.5	21.93	23.00	1.279	0.01	0.375	0.480
	LTE Band 12	10M	QPSK	1	0	Back	5mm	Full	23095	707.5	22.96	24.00	1.271	-0.02	0.749	0.952
	LTE Band 12	10M	QPSK	25	0	Back	5mm	Full	23095	707.5	22.15	23.00	1.216	-0.06	0.338	0.411
	LTE Band 12	10M	QPSK	50	0	Back	5mm	Full	23095	707.5	21.93	23.00	1.279	0.03	0.387	0.495
	LTE Band 12	10M	QPSK	1	0	Left Side	5mm	Full	23095	707.5	22.96	24.00	1.271	0.03	0.435	0.553
	LTE Band 12	10M	QPSK	25	0	Left Side	5mm	Full	23095	707.5	22.15	23.00	1.216	0.04	0.228	0.277
	LTE Band 12	10M	QPSK	1	0	Right Side	5mm	Full	23095	707.5	22.96	24.00	1.271	-0.15	0.032	0.041
	LTE Band 12	10M	QPSK	25	0	Right Side	5mm	Full	23095	707.5	22.15	23.00	1.216	0.02	0.023	0.028
	LTE Band 12	10M	QPSK	1	0	Bottom Side	5mm	Full	23095	707.5	22.96	24.00	1.271	0.17	0.660	0.839
	LTE Band 12	10M	QPSK	25	0	Bottom Side	5mm	Full	23095	707.5	22.15	23.00	1.216	-0.07	0.319	0.388
	LTE Band 12	10M	QPSK	50	0	Bottom Side	5mm	Full	23095	707.5	21.93	23.00	1.279	0.01	0.288	0.368
27	LTE Band 13	10M	QPSK	1	25	Front	5mm	Full	23230	782	23.45	24.00	1.135	-0.1	0.986	<b>1.119</b>
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Full	23230	782	22.32	23.00	1.169	0.03	0.742	0.868
	LTE Band 13	10M	QPSK	50	0	Front	5mm	Full	23230	782	22.21	23.00	1.199	-0.06	0.715	0.858
	LTE Band 13	10M	QPSK	1	25	Back	5mm	Full	23230	782	23.45	24.00	1.135	-0.02	0.812	0.922
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Full	23230	782	22.32	23.00	1.169	-0.05	0.636	0.744
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Full	23230	782	22.21	23.00	1.199	0.02	0.634	0.760
	LTE Band 13	10M	QPSK	1	25	Left Side	5mm	Full	23230	782	23.45	24.00	1.135	-0.13	0.609	0.691
	LTE Band 13	10M	QPSK	25	0	Left Side	5mm	Full	23230	782	22.32	23.00	1.169	0.09	0.321	0.375
	LTE Band 13	10M	QPSK	1	25	Right Side	5mm	Full	23230	782	23.45	24.00	1.135	0.08	0.828	0.940
	LTE Band 13	10M	QPSK	25	0	Right Side	5mm	Full	23230	782	22.32	23.00	1.169	0.16	0.511	0.598
	LTE Band 13	10M	QPSK	50	0	Right Side	5mm	Full	23230	782	22.21	23.00	1.199	0.01	0.406	0.487
	LTE Band 13	10M	QPSK	1	25	Bottom Side	5mm	Full	23230	782	23.45	24.00	1.135	0.11	0.825	0.936
	LTE Band 13	10M	QPSK	25	0	Bottom Side	5mm	Full	23230	782	22.32	23.00	1.169	-0.03	0.481	0.563
	LTE Band 13	10M	QPSK	50	0	Bottom Side	5mm	Full	23230	782	22.21	23.00	1.199	0.01	0.491	0.589





Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 14	10M	QPSK	1	0	Front	5mm	Full	23330	793	23.56	24.00	1.107	0.05	1.040	1.151
	LTE Band 14	10M	QPSK	25	25	Front	5mm	Full	23330	793	22.27	23.00	1.183	0.02	0.498	0.589
	LTE Band 14	10M	QPSK	50	0	Front	5mm	Full	23330	793	22.11	23.00	1.227	0.08	0.522	0.641
	LTE Band 14	10M	QPSK	1	0	Back	5mm	Full	23330	793	23.56	24.00	1.107	0.05	0.986	1.091
	LTE Band 14	10M	QPSK	25	25	Back	5mm	Full	23330	793	22.27	23.00	1.183	0.05	0.527	0.623
	LTE Band 14	10M	QPSK	50	0	Back	5mm	Full	23330	793	22.11	23.00	1.227	0.1	0.559	0.686
	LTE Band 14	10M	QPSK	1	0	Left Side	5mm	Full	23330	793	23.56	24.00	1.107	-0.07	0.647	0.716
	LTE Band 14	10M	QPSK	25	25	Left Side	5mm	Full	23330	793	22.27	23.00	1.183	0.07	0.253	0.299
	LTE Band 14	10M	QPSK	1	0	Right Side	5mm	Full	23330	793	23.56	24.00	1.107	0.04	0.816	0.903
	LTE Band 14	10M	QPSK	25	25	Right Side	5mm	Full	23330	793	22.27	23.00	1.183	0.1	0.467	0.552
	LTE Band 14	10M	QPSK	50	0	Right Side	5mm	Full	23330	793	22.11	23.00	1.227	0.03	0.473	0.581
28	LTE Band 14	10M	QPSK	1	0	Bottom Side	5mm	Full	23330	793	23.56	24.00	1.107	-0.03	1.130	1.250
	LTE Band 14	10M	QPSK	25	25	Bottom Side	5mm	Full	23330	793	22.27	23.00	1.183	-0.04	0.429	0.508
	LTE Band 14	10M	QPSK	50	0	Bottom Side	5mm	Full	23330	793	22.11	23.00	1.227	0.01	0.483	0.593
	LTE Band 30	10M	QPSK	1	0	Front	5mm	Reduced	27710	2310	17.82	19.00	1.312	-0.05	0.400	0.525
	LTE Band 30	10M	QPSK	25	0	Front	5mm	Reduced	27710	2310	17.51	19.00	1.409	0.07	0.469	0.661
	LTE Band 30	10M	QPSK	1	0	Back	5mm	Reduced	27710	2310	17.82	19.00	1.312	0.06	0.868	1.139
29	LTE Band 30	10M	QPSK	25	0	Back	5mm	Reduced	27710	2310	17.51	19.00	1.409	-0.01	0.890	1.254
	LTE Band 30	10M	QPSK	50	0	Back	5mm	Reduced	27710	2310	17.39	19.00	1.449	-0.08	0.595	0.862
	LTE Band 30	10M	QPSK	1	0	Left Side	5mm	Reduced	27710	2310	17.82	19.00	1.312	-0.01	0.508	0.667
	LTE Band 30	10M	QPSK	25	0	Left Side	5mm	Reduced	27710	2310	17.51	19.00	1.409	-0.11	0.496	0.699
	LTE Band 30	10M	QPSK	1	0	Right Side	5mm	Reduced	27710	2310	17.82	19.00	1.312	0.11	0.074	0.097
	LTE Band 30	10M	QPSK	25	0	Right Side	5mm	Reduced	27710	2310	17.51	19.00	1.409	0.02	0.073	0.103
	LTE Band 30	10M	QPSK	1	0	Bottom Side	5mm	Reduced	27710	2310	17.82	19.00	1.312	0.08	0.650	0.853
	LTE Band 30	10M	QPSK	25	0	Bottom Side	5mm	Reduced	27710	2310	17.51	19.00	1.409	0.07	0.625	0.881



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	-0.03	0.586	0.786
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	0.09	0.617	0.828
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Full	1	2412	19.25	20.50	1.335	97.59	1.025	0.05	0.487	0.666
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	0.02	0.483	0.648
30	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	-0.02	0.723	0.970
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Full	1	2412	19.25	20.50	1.335	97.59	1.025	0.17	0.516	0.706

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0.06	0.068	0.074
	Bluetooth	1Mbps	Back	5mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	-0.13	0.077	0.085
	Bluetooth	1Mbps	Right Side	5mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0.04	0.036	0.039
31	Bluetooth	1Mbps	Top Side	5mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0.13	0.084	0.092

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	5mm	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	0.02	0.003	0.004
32	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	-0.02	0.888	1.193
	WLAN5.2GHz	802.11a 6Mbps	Right Side	5mm	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	0.01	0.051	0.069
	WLAN5.2GHz	802.11a 6Mbps	Top Side	5mm	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	0.02	0.051	0.068
	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Reduced	40	5200	11.79	12.50	1.178	87.04	1.149	-0.02	0.736	0.996
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	0.03	0.018	0.023
35	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	-0.06	0.901	1.193
	WLAN5.8GHz	802.11a 6Mbps	Right Side	5mm	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	0.01	0.067	0.089
	WLAN5.8GHz	802.11a 6Mbps	Top Side	5mm	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	0.05	0.079	0.105
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	165	5825	13.31	14.00	1.172	87.04	1.149	-0.18	0.759	1.022



14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	5mm		Full	128	824.2	29.76	30.50	1.186	0.09	1.120	1.328
	GSM850	GPRS 2 Tx slots	Front	5mm		Full	189	836.4	29.62	30.50	1.225	0.08	0.986	1.207
	GSM850	GPRS 2 Tx slots	Front	5mm		Full	251	848.8	29.57	30.50	1.239	-0.07	0.807	1.000
	GSM850	GPRS 2 Tx slots	Back	5mm		Full	128	824.2	29.76	30.50	1.186	0.09	1.150	1.364
36	GSM850	GPRS 2 Tx slots	Back	5mm		Full	189	836.4	29.62	30.50	1.225	-0.14	1.120	1.372
	GSM850	GPRS 2 Tx slots	Back	5mm	Headset	Full	189	836.4	29.62	30.50	1.225	0.03	0.827	1.013
	GSM850	GPRS 2 Tx slots	Back	5mm		Full	251	848.8	29.57	30.50	1.239	0.16	0.867	1.074
	GSM1900	GPRS 2 Tx slots	Front	5mm		Reduced	810	1909.8	23.44	24.50	1.276	0.04	0.850	1.085
	GSM1900	GPRS 2 Tx slots	Front	5mm		Reduced	512	1850.2	23.31	24.50	1.315	0.05	0.876	1.152
	GSM1900	GPRS 2 Tx slots	Front	5mm		Reduced	661	1880	23.42	24.50	1.282	0.03	0.833	1.068
	GSM1900	GPRS 2 Tx slots	Back	5mm		Reduced	810	1909.8	23.44	24.50	1.276	0.07	0.913	1.165
	GSM1900	GPRS 2 Tx slots	Back	5mm		Reduced	512	1850.2	23.31	24.50	1.315	-0.03	0.936	1.231
	GSM1900	GPRS 2 Tx slots	Back	5mm		Reduced	661	1880	23.42	24.50	1.282	0.05	0.911	1.168
37	GSM1900	GPRS 2 Tx slots	Back	5mm	Headset	Reduced	512	1850.2	23.31	24.50	1.315	0.08	0.943	1.240
	GSM1900	GPRS 2 Tx slots	Back	5mm	Headset	Reduced	661	1880	23.42	24.50	1.282	0.02	0.815	1.045
	GSM1900	GPRS 2 Tx slots	Back	5mm	Headset	Reduced	810	1909.8	23.44	24.50	1.276	0.04	0.848	1.082
	GSM1900	GPRS 2 Tx slots	Front	15mm		Full	810	1909.8	26.57	27.50	1.239	0.01	0.325	0.403
	GSM1900	GPRS 2 Tx slots	Back	19mm		Full	810	1909.8	26.57	27.50	1.239	0.01	0.333	0.413



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm		Reduced	9400	1880	16.78	17.00	1.052	0.02	0.751	0.790
	WCDMA II	RMC 12.2Kbps	Front	5mm		Reduced	9262	1852.4	16.73	17.00	1.064	0.04	0.762	0.811
	WCDMA II	RMC 12.2Kbps	Front	5mm		Reduced	9538	1907.6	16.53	17.00	1.114	0.08	0.778	0.867
	WCDMA II	RMC 12.2Kbps	Back	5mm		Reduced	9400	1880	16.78	17.00	1.052	0.09	1.090	1.147
	WCDMA II	RMC 12.2Kbps	Back	5mm		Reduced	9262	1852.4	16.73	17.00	1.064	0.07	1.100	1.171
38	WCDMA II	RMC 12.2Kbps	Back	5mm		Reduced	9538	1907.6	16.53	17.00	1.114	0.09	1.090	1.215
	WCDMA II	RMC 12.2Kbps	Back	5mm	Headset	Reduced	9538	1907.6	16.53	17.00	1.114	-0.07	1.090	1.215
	WCDMA II	RMC 12.2Kbps	Back	5mm	Headset	Reduced	9262	1852.4	16.73	17.00	1.064	0.05	1.040	1.107
	WCDMA II	RMC 12.2Kbps	Back	5mm	Headset	Reduced	9400	1880	16.78	17.00	1.052	0.08	1.070	1.126
	WCDMA II	RMC 12.2Kbps	Front	15mm		Full	9400	1880	23.62	24.00	1.091	0.03	1.010	1.102
	WCDMA II	RMC 12.2Kbps	Back	19mm		Full	9400	1880	23.62	24.00	1.091	0.01	1.170	1.277
	WCDMA IV	RMC 12.2Kbps	Front	5mm		Reduced	1513	1752.6	16.85	17.50	1.161	0.03	0.930	1.080
	WCDMA IV	RMC 12.2Kbps	Front	5mm		Reduced	1312	1712.4	16.76	17.50	1.186	0.02	0.820	0.972
	WCDMA IV	RMC 12.2Kbps	Front	5mm		Reduced	1413	1732.6	16.82	17.50	1.169	0.05	0.888	1.039
	WCDMA IV	RMC 12.2Kbps	Back	5mm		Reduced	1513	1752.6	16.85	17.50	1.161	0.01	1.110	1.289
	WCDMA IV	RMC 12.2Kbps	Back	5mm		Reduced	1312	1712.4	16.76	17.50	1.186	-0.03	1.040	1.233
	WCDMA IV	RMC 12.2Kbps	Back	5mm		Reduced	1413	1732.6	16.82	17.50	1.169	0.06	1.060	1.240
39	WCDMA IV	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1513	1752.6	16.85	17.50	1.161	0.04	1.180	1.371
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1312	1712.4	16.76	17.50	1.186	-0.02	1.050	1.245
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1413	1732.6	16.82	17.50	1.169	0.02	1.130	1.322
	WCDMA IV	RMC 12.2Kbps	Front	15mm		Full	1513	1752.6	23.56	24.00	1.107	0.03	0.917	1.015
	WCDMA IV	RMC 12.2Kbps	Back	19mm		Full	1513	1752.6	23.56	24.00	1.107	0.03	0.928	1.027
	WCDMA V	RMC 12.2Kbps	Front	5mm		Reduced	4233	846.6	21.87	23.00	1.297	-0.09	0.874	1.134
40	WCDMA V	RMC 12.2Kbps	Front	5mm		Reduced	4182	836.4	21.86	23.00	1.300	-0.08	0.936	1.217
	WCDMA V	RMC 12.2Kbps	Front	5mm		Reduced	4132	826.4	21.84	23.00	1.306	-0.01	0.919	1.200
	WCDMA V	RMC 12.2Kbps	Front	5mm	Headset	Reduced	4182	836.4	21.86	23.00	1.300	-0.02	0.603	0.784
	WCDMA V	RMC 12.2Kbps	Back	5mm		Reduced	4233	846.6	21.87	23.00	1.297	0.06	0.851	1.104
	WCDMA V	RMC 12.2Kbps	Back	5mm		Reduced	4182	836.4	21.86	23.00	1.300	0.12	0.896	1.165
	WCDMA V	RMC 12.2Kbps	Back	5mm		Reduced	4132	826.4	21.84	23.00	1.306	0.08	0.853	1.114
	WCDMA V	RMC 12.2Kbps	Front	15mm		Full	4233	846.6	23.37	24.00	1.156	0.08	0.304	0.351
	WCDMA V	RMC 12.2Kbps	Back	19mm		Full	4233	846.6	23.37	24.00	1.156	0.04	0.263	0.304



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm		Reduced	18900	1880	16.48	17.00	1.127	0.02	0.787	0.887
	LTE Band 2	20M	QPSK	1	0	Front	5mm		Reduced	18700	1860	16.38	17.00	1.153	0.05	0.780	0.900
	LTE Band 2	20M	QPSK	1	0	Front	5mm		Reduced	19100	1900	16.20	17.00	1.202	0.04	0.766	0.921
	LTE Band 2	20M	QPSK	50	0	Front	5mm		Reduced	18900	1880	16.37	17.00	1.156	0.01	0.760	0.879
	LTE Band 2	20M	QPSK	50	0	Front	5mm		Reduced	18700	1860	16.24	17.00	1.191	-0.07	0.911	1.085
	LTE Band 2	20M	QPSK	50	0	Front	5mm		Reduced	19100	1900	16.18	17.00	1.208	-0.01	0.888	1.073
	LTE Band 2	20M	QPSK	100	0	Front	5mm		Reduced	18900	1880	16.30	17.00	1.175	0.01	0.912	1.072
	LTE Band 2	20M	QPSK	1	0	Back	5mm		Reduced	18900	1880	16.48	17.00	1.127	0.02	0.787	0.887
	LTE Band 2	20M	QPSK	1	0	Back	5mm		Reduced	18700	1860	16.38	17.00	1.153	0.06	0.801	0.924
	LTE Band 2	20M	QPSK	1	0	Back	5mm		Reduced	19100	1900	16.20	17.00	1.202	-0.04	0.930	1.118
	LTE Band 2	20M	QPSK	50	0	Back	5mm		Reduced	18900	1880	16.37	17.00	1.156	0.04	0.788	0.911
41	LTE Band 2	20M	QPSK	50	0	Back	5mm		Reduced	18700	1860	16.24	17.00	1.191	0.02	1.040	1.239
	LTE Band 2	20M	QPSK	50	0	Back	5mm		Reduced	19100	1900	16.18	17.00	1.208	0.02	0.997	1.204
	LTE Band 2	20M	QPSK	100	0	Back	5mm		Reduced	18900	1880	16.30	17.00	1.175	0.02	1.050	1.234
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Headset	Reduced	18700	1860	16.24	17.00	1.191	0.05	1.030	1.227
	LTE Band 2	20M	QPSK	1	0	Front	15mm		Full	18900	1880	23.11	24.00	1.227	0.03	0.959	1.177
	LTE Band 2	20M	QPSK	1	0	Back	19mm		Full	18900	1880	23.11	24.00	1.227	0.01	0.971	1.192
	LTE Band 66	20M	QPSK	1	0	Front	5mm		Reduced	132322	1745	16.93	17.50	1.140	0.19	0.918	1.047
	LTE Band 66	20M	QPSK	1	0	Front	5mm		Reduced	132072	1720	16.77	17.50	1.183	0.1	0.813	0.962
	LTE Band 66	20M	QPSK	1	0	Front	5mm		Reduced	132572	1770	16.84	17.50	1.164	0.02	0.932	1.085
	LTE Band 66	20M	QPSK	50	0	Front	5mm		Reduced	132322	1745	16.78	17.50	1.180	0.02	0.956	1.128
	LTE Band 66	20M	QPSK	50	0	Front	5mm		Reduced	132072	1720	16.72	17.50	1.197	0.05	0.890	1.065
	LTE Band 66	20M	QPSK	50	0	Front	5mm		Reduced	132572	1770	16.73	17.50	1.194	0.09	1.030	1.230
	LTE Band 66	20M	QPSK	100	0	Front	5mm		Reduced	132322	1745	16.79	17.50	1.178	-0.03	1.020	1.201
	LTE Band 66	20M	QPSK	1	0	Back	5mm		Reduced	132322	1745	16.93	17.50	1.140	0.03	0.996	1.136
	LTE Band 66	20M	QPSK	1	0	Back	5mm		Reduced	132072	1720	16.77	17.50	1.183	0.02	0.851	1.007
	LTE Band 66	20M	QPSK	1	0	Back	5mm		Reduced	132572	1770	16.84	17.50	1.164	0.15	1.010	1.176
	LTE Band 66	20M	QPSK	50	0	Back	5mm		Reduced	132322	1745	16.78	17.50	1.180	0.02	1.030	1.216
	LTE Band 66	20M	QPSK	50	0	Back	5mm		Reduced	132072	1720	16.72	17.50	1.197	-0.07	1.010	1.209
42	LTE Band 66	20M	QPSK	50	0	Back	5mm		Reduced	132572	1770	16.73	17.50	1.194	0.05	1.160	1.385
	LTE Band 66	20M	QPSK	100	0	Back	5mm		Reduced	132322	1745	16.79	17.50	1.178	0.12	1.120	1.319
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Headset	Reduced	132572	1770	16.73	17.50	1.194	0.03	1.120	1.337
	LTE Band 66	20M	QPSK	1	0	Front	15mm		Full	132322	1745	23.26	24.00	1.186	0.03	0.898	1.065
	LTE Band 66	20M	QPSK	1	0	Back	19mm		Full	132322	1745	23.26	24.00	1.186	0.01	0.871	1.033
43	LTE Band 5	10M	QPSK	1	0	Front	5mm		Reduced	20525	836.5	22.12	23.00	1.225	0.01	1.090	1.335
	LTE Band 5	10M	QPSK	25	0	Front	5mm		Reduced	20525	836.5	21.87	23.00	1.297	0.06	0.693	0.899
	LTE Band 5	10M	QPSK	50	0	Front	5mm		Reduced	20525	836.5	21.84	23.00	1.306	-0.01	0.687	0.897
	LTE Band 5	10M	QPSK	1	0	Front	5mm	Headset	Reduced	20525	836.5	22.12	23.00	1.225	0	1.060	1.298
	LTE Band 5	10M	QPSK	1	0	Back	5mm		Reduced	20525	836.5	22.12	23.00	1.225	0.12	0.945	1.157
	LTE Band 5	10M	QPSK	25	0	Back	5mm		Reduced	20525	836.5	21.87	23.00	1.297	0.08	0.593	0.769
	LTE Band 5	10M	QPSK	50	0	Back	5mm		Reduced	20525	836.5	21.84	23.00	1.306	0.11	0.599	0.782
	LTE Band 5	10M	QPSK	1	49	Front	15mm		Full	20525	836.5	23.27	24.00	1.183	0.02	0.342	0.405
	LTE Band 5	10M	QPSK	1	49	Back	19mm		Full	20525	836.5	23.27	24.00	1.183	0.04	0.299	0.354



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
44	LTE Band 12	10M	QPSK	1	0	Front	5mm	Full	23095	707.5	22.96	24.00	1.271	-0.03	0.805	1.023
	LTE Band 12	10M	QPSK	25	0	Front	5mm	Full	23095	707.5	22.15	23.00	1.216	0.02	0.400	0.486
	LTE Band 12	10M	QPSK	50	0	Front	5mm	Full	23095	707.5	21.93	23.00	1.279	0.01	0.375	0.480
	LTE Band 12	10M	QPSK	1	0	Back	5mm	Full	23095	707.5	22.96	24.00	1.271	-0.02	0.749	0.952
	LTE Band 12	10M	QPSK	25	0	Back	5mm	Full	23095	707.5	22.15	23.00	1.216	-0.06	0.338	0.411
	LTE Band 12	10M	QPSK	50	0	Back	5mm	Full	23095	707.5	21.93	23.00	1.279	0.03	0.387	0.495
45	LTE Band 13	10M	QPSK	1	25	Front	5mm	Full	23230	782	23.45	24.00	1.135	-0.1	0.986	1.119
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Full	23230	782	22.32	23.00	1.169	0.03	0.742	0.868
	LTE Band 13	10M	QPSK	50	0	Front	5mm	Full	23230	782	22.21	23.00	1.199	-0.06	0.715	0.858
	LTE Band 13	10M	QPSK	1	25	Back	5mm	Full	23230	782	23.45	24.00	1.135	-0.02	0.812	0.922
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Full	23230	782	22.32	23.00	1.169	-0.05	0.636	0.744
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Full	23230	782	22.21	23.00	1.199	0.02	0.634	0.760
46	LTE Band 14	10M	QPSK	1	0	Front	5mm	Full	23330	793	23.56	24.00	1.107	0.05	1.040	1.151
	LTE Band 14	10M	QPSK	25	25	Front	5mm	Full	23330	793	22.27	23.00	1.183	0.02	0.498	0.589
	LTE Band 14	10M	QPSK	50	0	Front	5mm	Full	23330	793	22.11	23.00	1.227	0.08	0.522	0.641
	LTE Band 14	10M	QPSK	1	0	Back	5mm	Full	23330	793	23.56	24.00	1.107	0.05	0.986	1.091
	LTE Band 14	10M	QPSK	25	25	Back	5mm	Full	23330	793	22.27	23.00	1.183	0.05	0.527	0.623
	LTE Band 14	10M	QPSK	50	0	Back	5mm	Full	23330	793	22.11	23.00	1.227	0.1	0.559	0.686
	LTE Band 30	10M	QPSK	1	0	Front	5mm	Reduced	27710	2310	17.82	19.00	1.312	-0.05	0.400	0.525
	LTE Band 30	10M	QPSK	25	0	Front	5mm	Reduced	27710	2310	17.51	19.00	1.409	0.07	0.469	0.661
	LTE Band 30	10M	QPSK	1	0	Back	5mm	Reduced	27710	2310	17.82	19.00	1.312	0.06	0.868	1.139
47	LTE Band 30	10M	QPSK	25	0	Back	5mm	Reduced	27710	2310	17.51	19.00	1.409	-0.01	0.890	1.254
	LTE Band 30	10M	QPSK	50	0	Back	5mm	Reduced	27710	2310	17.39	19.00	1.449	-0.08	0.595	0.862
	LTE Band 30	10M	QPSK	1	0	Front	15mm	Full	27710	2310	23.26	24.00	1.186	0.01	0.412	0.489
	LTE Band 30	10M	QPSK	1	0	Back	19mm	Full	27710	2310	23.26	24.00	1.186	0.03	0.346	0.410





<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	-0.03	0.586	0.786
48	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	0.09	0.617	0.828
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Full	1	2412	19.25	20.50	1.335	97.59	1.025	0.05	0.487	0.666
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	0.03	0.239	0.321
	WLAN2.4GHz	802.11b 1Mbps	Back	19mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	0	0.189	0.254

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0.06	0.068	0.074
49	Bluetooth	1Mbps	Back	5mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	-0.13	0.077	0.085
	Bluetooth	1Mbps	Front	15mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0	NA	NA
	Bluetooth	1Mbps	Back	19mm	Full	78	2480	9.44	9.50	1.014	76.99	1.082	0	NA	NA

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	5mm	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	0.02	0.003	0.004
50	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	-0.02	0.888	1.193
	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Reduced	40	5200	11.79	12.50	1.178	87.04	1.149	-0.02	0.736	0.996
	WLAN5.2GHz	802.11a 6Mbps	Front	15mm	Full	44	5220	16.44	17.00	1.138	87.04	1.149	0.01	NA	NA
	WLAN5.2GHz	802.11a 6Mbps	Back	19mm	Full	44	5220	16.44	17.00	1.138	87.04	1.149	-0.06	0.810	1.059
	WLAN5.3GHz	802.11a 6Mbps	Front	5mm	Reduced	60	5300	10.76	11.00	1.056	87.04	1.149	0.01	NA	NA
	WLAN5.3GHz	802.11a 6Mbps	Back	5mm	Reduced	60	5300	10.76	11.00	1.056	87.04	1.149	-0.09	0.869	1.055
51	WLAN5.3GHz	802.11a 6Mbps	Back	5mm	Reduced	64	5320	10.40	11.00	1.148	87.04	1.149	-0.09	0.864	1.140
	WLAN5.3GHz	802.11a 6Mbps	Front	15mm	Full	64	5320	16.50	17.00	1.122	87.04	1.149	0.01	0.031	0.040
	WLAN5.3GHz	802.11a 6Mbps	Back	19mm	Full	64	5320	16.50	17.00	1.122	87.04	1.149	-0.19	0.880	1.134
	WLAN5.5GHz	802.11a 6Mbps	Front	5mm	Reduced	100	5500	10.28	11.50	1.323	87.04	1.149	0.01	0.004	0.007
52	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	Reduced	100	5500	10.28	11.50	1.323	87.04	1.149	0.02	0.780	1.186
	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	Reduced	124	5620	9.71	11.50	1.510	87.04	1.149	0.06	0.506	0.878
	WLAN5.5GHz	802.11a 6Mbps	Front	15mm	Full	100	5500	15.55	17.00	1.396	87.04	1.149	0.03	NA	NA
	WLAN5.5GHz	802.11a 6Mbps	Back	19mm	Full	100	5500	15.55	17.00	1.396	87.04	1.149	-0.09	0.686	1.101
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	0.03	0.018	0.023
53	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	-0.06	0.901	1.193
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	165	5825	13.31	14.00	1.172	87.04	1.149	-0.18	0.759	1.022
	WLAN5.8GHz	802.11a 6Mbps	Front	15mm	Full	157	5785	17.75	18.00	1.059	87.04	1.149	-0.06	NA	NA
	WLAN5.8GHz	802.11a 6Mbps	Back	19mm	Full	157	5785	17.75	18.00	1.059	87.04	1.149	-0.06	0.681	0.829



14.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
54	GSM850	GPRS 2 Tx slots	Front	0mm	Full	128	824.2	29.76	30.50	1.186	0.13	1.310	1.553
	GSM850	GPRS 2 Tx slots	Back	0mm	Full	128	824.2	29.76	30.50	1.186	0.18	1.090	1.292
55	GSM1900	GPRS 2 Tx slots	Back	0mm	Full	810	1909.8	26.57	27.50	1.239	0.03	1.510	1.871
	GSM1900	GPRS 2 Tx slots	Bottom Side	0mm	Full	810	1909.8	26.57	27.50	1.239	0.01	1.250	1.548

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	Reduced	9400	1880	20.05	21.00	1.245	0.02	1.950	2.427
	WCDMA II	RMC 12.2Kbps	Front	0mm	Reduced	9262	1852.4	19.99	21.00	1.262	0.03	2.000	2.524
	WCDMA II	RMC 12.2Kbps	Front	0mm	Reduced	9538	1907.6	19.75	21.00	1.334	0.02	1.940	2.587
	WCDMA II	RMC 12.2Kbps	Back	0mm	Reduced	9400	1880	20.05	21.00	1.245	0.09	1.960	2.439
56	WCDMA II	RMC 12.2Kbps	Back	0mm	Reduced	9262	1852.4	19.99	21.00	1.262	0.02	2.650	3.344
	WCDMA II	RMC 12.2Kbps	Back	0mm	Reduced	9538	1907.6	19.75	21.00	1.334	0.09	1.960	2.614
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Reduced	9400	1880	20.05	21.00	1.245	-0.13	1.600	1.991
	WCDMA II	RMC 12.2Kbps	Front	5mm	Full	9400	1880	23.62	24.00	1.091	0.03	1.720	1.877
	WCDMA II	RMC 12.2Kbps	Back	9mm	Full	9400	1880	23.62	24.00	1.091	0.03	1.550	1.692
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Full	9400	1880	23.62	24.00	1.091	0.01	1.940	2.117
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Reduced	1513	1752.6	20.42	21.00	1.143	0.07	2.100	2.400
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Reduced	1312	1712.4	20.39	21.00	1.151	0.04	1.970	2.267
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Reduced	1413	1732.6	20.40	21.00	1.148	0.02	1.960	2.250
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Reduced	1513	1752.6	20.42	21.00	1.143	0.02	2.090	2.389
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Reduced	1312	1712.4	20.39	21.00	1.151	0.07	1.900	2.187
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Reduced	1413	1732.6	20.40	21.00	1.148	0.09	1.850	2.124
57	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1513	1752.6	20.42	21.00	1.143	0.07	2.860	3.269
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1312	1712.4	20.39	21.00	1.151	-0.02	2.490	2.865
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1413	1732.6	20.40	21.00	1.148	-0.09	2.500	2.870
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Full	1513	1752.6	23.56	24.00	1.107	0.1	1.050	1.162
	WCDMA IV	RMC 12.2Kbps	Back	9mm	Full	1513	1752.6	23.56	24.00	1.107	-0.06	0.797	0.882
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Full	1513	1752.6	23.56	24.00	1.107	0.05	1.170	1.295
58	WCDMA V	RMC 12.2Kbps	Front	0mm	Full	4233	846.6	23.37	24.00	1.156	0.13	2.020	2.335
	WCDMA V	RMC 12.2Kbps	Front	0mm	Full	4182	836.4	23.31	24.00	1.172	0.01	1.760	2.063
	WCDMA V	RMC 12.2Kbps	Front	0mm	Full	4132	826.4	23.27	24.00	1.183	0.01	1.450	1.715
	WCDMA V	RMC 12.2Kbps	Back	0mm	Full	4233	846.6	23.37	24.00	1.156	0.07	1.630	1.884
	WCDMA V	RMC 12.2Kbps	Bottom Side	0mm	Full	4233	846.6	23.37	24.00	1.156	0.07	1.510	1.746





<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Reduced	18900	1880	19.82	20.50	1.169	0.02	2.330	2.725
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Reduced	18700	1860	19.43	20.50	1.279	0.01	2.400	3.071
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Reduced	19100	1900	19.48	20.50	1.265	0.06	2.240	2.833
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Reduced	18900	1880	19.65	20.50	1.216	0.08	2.320	2.822
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Reduced	18700	1860	19.54	20.50	1.247	0.06	2.380	2.969
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Reduced	19100	1900	19.53	20.50	1.250	0.09	2.220	2.776
	LTE Band 2	20M	QPSK	100	0	Front	0mm	Reduced	18900	1880	19.63	20.50	1.222	0.06	2.310	2.822
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Reduced	18900	1880	19.82	20.50	1.169	0.05	2.420	2.830
59	LTE Band 2	20M	QPSK	1	0	Back	0mm	Reduced	18700	1860	19.43	20.50	1.279	0.02	2.560	3.275
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Reduced	19100	1900	19.48	20.50	1.265	0.09	2.240	2.833
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Reduced	18900	1880	19.65	20.50	1.216	0.06	2.400	2.919
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Reduced	18700	1860	19.54	20.50	1.247	0.01	2.530	3.156
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Reduced	19100	1900	19.53	20.50	1.250	0.08	2.200	2.751
	LTE Band 2	20M	QPSK	100	0	Back	0mm	Reduced	18900	1880	19.63	20.50	1.222	0.07	2.360	2.883
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	Reduced	18900	1880	19.82	20.50	1.169	-0.03	1.590	1.860
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0mm	Reduced	18900	1880	19.65	20.50	1.216	0.02	1.540	1.873
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Full	18900	1880	23.11	24.00	1.227	0.01	1.570	1.927
	LTE Band 2	20M	QPSK	1	0	Back	9mm	Full	18900	1880	23.11	24.00	1.227	0.03	1.290	1.583
	LTE Band 2	20M	QPSK	1	0	Bottom Side	11mm	Full	18900	1880	23.11	24.00	1.227	0.01	1.540	1.890
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132322	1745	20.46	21.00	1.132	-0.05	2.130	2.412
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132072	1720	20.29	21.00	1.178	-0.07	2.030	2.391
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132572	1770	20.31	21.00	1.172	0.01	2.360	2.766
	LTE Band 66	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132322	1745	20.29	21.00	1.178	-0.05	2.220	2.614
	LTE Band 66	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132072	1720	20.11	21.00	1.227	-0.05	2.160	2.651
60	LTE Band 66	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132572	1770	20.23	21.00	1.194	-0.04	2.590	3.092
	LTE Band 66	20M	QPSK	100	0	Bottom Side	0mm	Reduced	132322	1745	20.23	21.00	1.194	-0.06	2.290	2.734
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Reduced	132322	1745	20.46	21.00	1.132	0.07	1.570	1.778
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Reduced	132322	1745	20.29	21.00	1.178	0.04	1.430	1.684
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Reduced	132322	1745	20.46	21.00	1.132	0.01	1.430	1.619
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Reduced	132322	1745	20.29	21.00	1.178	0.05	1.650	1.943
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Full	132322	1745	23.26	24.00	1.186	-0.1	1.070	1.269
	LTE Band 66	20M	QPSK	1	0	Back	9mm	Full	132322	1745	23.26	24.00	1.186	0.04	0.948	1.124
	LTE Band 66	20M	QPSK	1	0	Bottom Side	11mm	Full	132322	1745	23.26	24.00	1.186	-0.07	1.170	1.387
61	LTE Band 5	10M	QPSK	1	49	Front	0mm	Full	20525	836.5	23.27	24.00	1.183	-0.05	1.580	1.869
	LTE Band 5	10M	QPSK	25	12	Front	0mm	Full	20525	836.5	22.30	23.00	1.175	0.03	0.823	0.967
	LTE Band 5	10M	QPSK	1	49	Back	0mm	Full	20525	836.5	23.27	24.00	1.183	0.03	1.400	1.656
	LTE Band 5	10M	QPSK	25	12	Back	0mm	Full	20525	836.5	22.30	23.00	1.175	0.01	0.740	0.869
	LTE Band 5	10M	QPSK	1	49	Bottom Side	0mm	Full	20525	836.5	23.27	24.00	1.183	0.01	1.490	1.763
	LTE Band 5	10M	QPSK	25	12	Bottom Side	0mm	Full	20525	836.5	22.30	23.00	1.175	0.03	0.785	0.922
62	LTE Band 14	10M	QPSK	1	0	Bottom Side	0mm	Full	23330	793	23.56	24.00	1.107	0.02	0.899	0.995
	LTE Band 14	10M	QPSK	25	25	Bottom Side	0mm	Full	23330	793	22.27	23.00	1.183	0.02	0.501	0.593
	LTE Band 30	10M	QPSK	1	0	Back	0mm	Reduced	27710	2310	20.42	21.00	1.143	0.02	2.020	2.309
63	LTE Band 30	10M	QPSK	25	0	Back	0mm	Reduced	27710	2310	20.12	21.00	1.225	0.09	2.230	2.731
	LTE Band 30	10M	QPSK	50	0	Back	0mm	Reduced	27710	2310	20.04	21.00	1.247	0.02	1.580	1.971
	LTE Band 30	10M	QPSK	1	0	Bottom Side	0mm	Reduced	27710	2310	20.42	21.00	1.143	0.09	1.740	1.989
	LTE Band 30	10M	QPSK	25	0	Bottom Side	0mm	Reduced	27710	2310	20.12	21.00	1.225	0.02	1.690	2.070
	LTE Band 30	10M	QPSK	50	0	Bottom Side	0mm	Reduced	27710	2310	20.04	21.00	1.247	0.03	1.190	1.484
	LTE Band 30	10M	QPSK	1	0	Front	5mm	Full	27710	2310	23.26	24.00	1.186	0.03	0.564	0.669
	LTE Band 30	10M	QPSK	1	0	Back	9mm	Full	27710	2310	23.26	24.00	1.186	0.03	0.446	0.529
	LTE Band 30	10M	QPSK	1	0	Bottom Side	11mm	Full	27710	2310	23.26	24.00	1.186	0.06	0.437	0.518



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
64	WLAN2.4GHz	802.11b 1Mbps	Back	9mm	Full	6	2437	19.33	20.50	1.309	97.59	1.025	-0.02	0.315	<b>0.423</b>

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Full	44	5220	16.44	17.00	1.138	87.04	1.149	0.01	1.810	2.366
65	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Full	40	5200	16.37	17.00	1.156	87.04	1.149	0.09	1.900	<b>2.524</b>
	WLAN5.2GHz	802.11a 6Mbps	Back	9mm	Full	44	5220	16.44	17.00	1.138	87.04	1.149	-0.02	0.385	0.503
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Full	60	5300	16.53	17.00	1.114	87.04	1.149	0.01	NA	NA
66	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Full	60	5300	16.53	17.00	1.114	87.04	1.149	-0.09	1.600	<b>2.047</b>
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Full	52	5260	16.52	17.00	1.117	87.04	1.149	-0.09	1.490	1.912
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Full	60	5300	16.53	17.00	1.114	87.04	1.149	0.01	0.081	0.104
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Full	60	5300	16.53	17.00	1.114	87.04	1.149	0.02	0.106	0.136
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Full	124	5620	16.58	17.00	1.102	87.04	1.149	0.03	0.023	0.029
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Full	124	5620	16.58	17.00	1.102	87.04	1.149	0.08	1.590	2.012
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Full	124	5620	16.58	17.00	1.102	87.04	1.149	0.02	0.118	0.149
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Full	124	5620	16.58	17.00	1.102	87.04	1.149	0.05	0.078	0.099
67	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Full	116	5580	16.46	17.00	1.132	87.04	1.149	0.09	1.560	<b>2.030</b>
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Full	165	5825	17.97	18.00	1.007	87.04	1.149	0.07	1.650	1.909
68	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Full	157	5785	17.75	18.00	1.059	87.04	1.149	0.01	1.570	<b>1.911</b>



14.5 Repeated SAR Measurement

<1g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Left Cheek	0mm	-	Reduced	6	2437	16.45	17.00	1.135	97.59	1.025	0.14	0.929	1	1.081
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Left Cheek	0mm	-	Reduced	6	2437	16.45	17.00	1.135	97.59	1.025	0.01	0.926	1.003	1.077
1st	GSM850	-	-	-	-	GPRS 2 Tx slots	Back	5mm	-	Full	128	824.2	29.76	30.50	1.186	-	1.000	0.09	1.150	1	1.364
2nd	GSM850	-	-	-	-	GPRS 2 Tx slots	Back	5mm	-	Full	128	824.2	29.76	30.50	1.186	-	1.000	0.02	1.130	1.018	1.340
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	-	Reduced	9262	1852.4	16.73	17.00	1.064	-	1.000	0.07	1.100	1	1.171
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	-	Reduced	9262	1852.4	16.73	17.00	1.064	-	1.000	0.03	1.090	1.009	1.160
1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1513	1752.6	16.85	17.50	1.161	-	1.000	0.04	1.180	1	1.371
2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1513	1752.6	16.85	17.50	1.161	-	1.000	-0.03	1.150	1.026	1.336
1st	LTE Band 14	10M	QPSK	1	0	-	Bottom Side	5mm	-	Full	23330	793	23.56	24.00	1.107	-	1.000	-0.03	1.130	1	1.250
2nd	LTE Band 14	10M	QPSK	1	0	-	Bottom Side	5mm	-	Full	23330	793	23.56	24.00	1.107	-	1.000	0.04	1.110	1.018	1.228
1st	LTE Band 30	10M	QPSK	25	0	-	Back	5mm	-	Reduced	27710	2310	17.51	19.00	1.409	62.9	1.006	-0.01	0.890	1	1.254
2nd	LTE Band 30	10M	QPSK	25	0	-	Back	5mm	-	Reduced	27710	2310	17.51	19.00	1.409	62.9	1.006	0.02	0.880	1.011	1.240
1st	WLAN5GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	-	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	-0.02	0.888	1	1.193
2nd	WLAN5GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	-	Reduced	44	5220	11.82	12.50	1.169	87.04	1.149	0.02	0.855	1.039	1.149
1st	WLAN5GHz	-	-	-	-	802.11a 6Mbps	Back	19mm	-	Full	64	5320	16.50	17.00	1.122	87.04	1.149	-0.19	0.880	1	1.134
2nd	WLAN5GHz	-	-	-	-	802.11a 6Mbps	Back	19mm	-	Full	64	5320	16.50	17.00	1.122	87.04	1.149	0.02	0.850	1.035	1.096
1st	WLAN5GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	-	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	-0.06	0.901	1	1.193
2nd	WLAN5GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	-	Reduced	157	5785	13.38	14.00	1.153	87.04	1.149	0.03	0.898	1.003	1.189

<10g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Reduced	9262	1852.4	19.99	21.00	1.262	-	1.000	0.02	2.650	1	3.344
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Reduced	9262	1852.4	19.99	21.00	1.262	-	1.000	0.08	2.610	1.015	3.293
1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1513	1752.6	20.42	21.00	1.143	-	1.000	0.07	2.860	1	3.269
2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1513	1752.6	20.42	21.00	1.143	-	1.000	0.02	2.830	1.011	3.234
1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	0mm	Full	4233	846.6	23.37	24.00	1.156	-	1.000	0.13	2.020	1	2.335
2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	0mm	Full	4233	846.6	23.37	24.00	1.156	-	1.000	0.01	2.010	1.005	2.324
1st	LTE Band 30	10M	QPSK	25	0	-	Back	0mm	Reduced	27710	2310	20.12	21.00	1.225	62.9	1.006	0.09	2.230	1	2.731
2nd	LTE Band 30	10M	QPSK	25	0	-	Back	0mm	Reduced	27710	2310	20.12	21.00	1.225	62.9	1.006	0.03	2.210	1.009	2.706

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

### 15. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		Yes
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		Yes
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		Yes
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
13.	GSM Voice + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
14.	GPRS/EDGE + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
15.	WCDMA + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
16.	LTE + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
17.	GSM Voice + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes		Yes
18.	GPRS/EDGE + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
19.	WCDMA + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
20.	LTE + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
21.	WLAN5.2/5.8GHz+ Bluetooth	Yes	Yes	Yes	Yes
22.	WLAN5.3/5.5GHz + Bluetooth	Yes	Yes	Yes	Yes
23.	GSM Voice + Bluetooth	Yes	Yes		Yes
24.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
25.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
26.	LTE + Bluetooth	Yes	Yes	Yes	Yes

**General Note:**

- This device supports VoIP in GPRS, EGPRS, WCDMA, CDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, CDMA, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT character, WLAN 5GHz and Bluetooth can transmit simultaneously. WWAN+WLAN5GHz+Bluetooth can represent WWAN+WLAN5GHz or WWAN+ Bluetooth, So no need to do co-located analysis separately.
- Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
  - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - If  $SPLSR \leq 0.04$  for 1g SAR and  $SPLSR \leq 0.10$  for 10g SAR , simultaneously transmission SAR measurement is not necessary.
  - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
  - The SPLSR calculated results please refer to section 15.5.



15.2 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2	1+3+4
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM	GSM850	Right Cheek at 0mm	0.299	0.491	0.117	0.086	0.79	0.50
		Right Tilted at 0mm	0.228	0.489	0.165	0.079	0.72	0.47
		Left Cheek at 0mm	0.255	1.081	0.084	0.180	1.34	0.52
		Left Tilted at 0mm	0.228	0.654	0.110	0.135	0.88	0.47
	GSM1900	Right Cheek at 0mm	0.007	0.491	0.117	0.086	0.50	0.21
		Right Tilted at 0mm	0.007	0.489	0.165	0.079	0.50	0.25
		Left Cheek at 0mm	0.016	1.081	0.084	0.180	1.10	0.28
		Left Tilted at 0mm	0.006	0.654	0.110	0.135	0.66	0.25
WCDMA	WCDMA II	Right Cheek at 0mm	0.089	0.491	0.117	0.086	0.58	0.29
		Right Tilted at 0mm	0.029	0.489	0.165	0.079	0.52	0.27
		Left Cheek at 0mm	0.052	1.081	0.084	0.180	1.13	0.32
		Left Tilted at 0mm	0.039	0.654	0.110	0.135	0.69	0.28
	WCDMA IV	Right Cheek at 0mm	0.064	0.491	0.117	0.086	0.56	0.27
		Right Tilted at 0mm	0.037	0.489	0.165	0.079	0.53	0.28
		Left Cheek at 0mm	0.072	1.081	0.084	0.180	1.15	0.34
		Left Tilted at 0mm	0.041	0.654	0.110	0.135	0.70	0.29
	WCDMA V	Right Cheek at 0mm	0.392	0.491	0.117	0.086	0.88	0.60
		Right Tilted at 0mm	0.200	0.489	0.165	0.079	0.69	0.44
		Left Cheek at 0mm	0.316	1.081	0.084	0.180	1.40	0.58
		Left Tilted at 0mm	0.192	0.654	0.110	0.135	0.85	0.44
LTE	LTE Band 2	Right Cheek at 0mm	0.047	0.491	0.117	0.086	0.54	0.25
		Right Tilted at 0mm	0.016	0.489	0.165	0.079	0.51	0.26
		Left Cheek at 0mm	0.058	1.081	0.084	0.180	1.14	0.32
		Left Tilted at 0mm	0.041	0.654	0.110	0.135	0.70	0.29
	LTE Band 5	Right Cheek at 0mm	0.415	0.491	0.117	0.086	0.91	0.62
		Right Tilted at 0mm	0.205	0.489	0.165	0.079	0.69	0.45
		Left Cheek at 0mm	0.304	1.081	0.084	0.180	1.39	0.57
		Left Tilted at 0mm	0.232	0.654	0.110	0.135	0.89	0.48
	LTE Band 12	Right Cheek at 0mm	0.305	0.491	0.117	0.086	0.80	0.51
		Right Tilted at 0mm	0.170	0.489	0.165	0.079	0.66	0.41
		Left Cheek at 0mm	0.299	1.081	0.084	0.180	1.38	0.56
		Left Tilted at 0mm	0.245	0.654	0.110	0.135	0.90	0.49
	LTE Band 13	Right Cheek at 0mm	0.411	0.491	0.117	0.086	0.90	0.61
		Right Tilted at 0mm	0.285	0.489	0.165	0.079	0.77	0.53
		Left Cheek at 0mm	0.333	1.081	0.084	0.180	1.41	0.60
		Left Tilted at 0mm	0.257	0.654	0.110	0.135	0.91	0.50
	LTE Band 14	Right Cheek at 0mm	0.448	0.491	0.117	0.086	0.94	0.65
		Right Tilted at 0mm	0.267	0.489	0.165	0.079	0.76	0.51
		Left Cheek at 0mm	0.314	1.081	0.084	0.180	1.40	0.58
		Left Tilted at 0mm	0.262	0.654	0.110	0.135	0.92	0.51
	LTE Band 30	Right Cheek at 0mm	0.247	0.491	0.117	0.086	0.74	0.45
		Right Tilted at 0mm	0.159	0.489	0.165	0.079	0.65	0.40
		Left Cheek at 0mm	0.343	1.081	0.084	0.180	1.42	0.61
		Left Tilted at 0mm	0.084	0.654	0.110	0.135	0.74	0.33
LTE Band 66	Right Cheek at 0mm	0.070	0.491	0.117	0.086	0.56	0.27	
	Right Tilted at 0mm	0.041	0.489	0.165	0.079	0.53	0.29	
	Left Cheek at 0mm	0.059	1.081	0.084	0.180	1.14	0.32	
	Left Tilted at 0mm	0.038	0.654	0.110	0.135	0.69	0.28	



15.3 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	Case No	SPLSR	1+3+4	Case No	SPLSR	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed			Summed			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			1g SAR (W/kg)			
GSM	GSM850	Front at 5mm	1.328	0.786	0.023	0.074	2.11	# 1	0.02	1.43		
		Back at 5mm	1.372	0.828	1.193	0.085	2.20	# 2	0.02	2.65	# 3	0.03
		Left side at 5mm	0.337				0.34			0.34		
		Right side at 5mm	0.668	0.648	0.089	0.039	1.32			0.80		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.170				1.17			1.17		
	GSM1900	Front at 5mm	1.152	0.786	0.023	0.074	1.94	# 4	0.02	1.25		
		Back at 5mm	1.231	0.828	1.193	0.085	2.06	# 5	0.02	2.51	# 6	0.03
		Left side at 5mm	0.010				0.01			0.01		
		Right side at 5mm	0.018	0.648	0.089	0.039	0.67			0.15		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.126				1.13			1.13		
WCDMA	WCDMA II	Front at 5mm	0.867	0.786	0.023	0.074	1.65	# 7	0.01	0.96		
		Back at 5mm	1.215	0.828	1.193	0.085	2.04	# 8	0.02	2.49	# 9	0.03
		Left side at 5mm	0.012				0.01			0.01		
		Right side at 5mm	0.014	0.648	0.089	0.039	0.66			0.14		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.211				1.21			1.21		
	WCDMA IV	Front at 5mm	1.080	0.786	0.023	0.074	1.87	#10	0.02	1.18		
		Back at 5mm	1.289	0.828	1.193	0.085	2.12	#11	0.02	2.57	# 12	0.03
		Left side at 5mm	0.067				0.07			0.07		
		Right side at 5mm	0.073	0.648	0.089	0.039	0.72			0.20		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.369				1.37			1.37		
	WCDMA V	Front at 5mm	1.217	0.786	0.023	0.074	2.00	# 13	0.02	1.31		
		Back at 5mm	1.165	0.828	1.193	0.085	1.99	# 14	0.02	2.44	# 15	0.03
		Left side at 5mm	0.379				0.38			0.38		
		Right side at 5mm	0.829	0.648	0.089	0.039	1.48			0.96		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.199				1.20			1.20		





WWAN Band	Exposure Position	1	2	3	4	1+2	Case No	SPLSR	1+3+4	Case No	SPLSR	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed			Summed			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			1g SAR (W/kg)			
LTE	LTE Band 2	Front at 5mm	1.085	0.786	0.023	0.074	1.87	# 16	0.02	1.18		
		Back at 5mm	1.239	0.828	1.193	0.085	2.07	#17	0.02	2.52	#18	0.03
		Left side at 5mm	0.026				0.03			0.03		
		Right side at 5mm	0.028	0.648	0.089	0.039	0.68			0.16		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.290				1.29			1.29		
	LTE Band 5	Front at 5mm	1.335	0.786	0.023	0.074	2.12	# 19	0.02	1.43		
		Back at 5mm	1.157	0.828	1.193	0.085	1.99	#20	0.02	2.44	# 21	0.03
		Left side at 5mm	0.344				0.34			0.34		
		Right side at 5mm	0.702	0.648	0.089	0.039	1.35			0.83		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.216				1.22			1.22		
	LTE Band 12	Front at 5mm	1.023	0.786	0.023	0.074	1.81	# 22	0.02	1.12		
		Back at 5mm	0.952	0.828	1.193	0.085	1.78	# 23	0.02	2.23	# 24	0.03
		Left side at 5mm	0.553				0.55			0.55		
		Right side at 5mm	0.041	0.648	0.089	0.039	0.69			0.17		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	0.839				0.84			0.84		
	LTE Band 13	Front at 5mm	1.119	0.786	0.023	0.074	1.91	# 25	0.02	1.22		
		Back at 5mm	0.922	0.828	1.193	0.085	1.75	# 26	0.02	2.20	# 27	0.03
		Left side at 5mm	0.691				0.69			0.69		
		Right side at 5mm	0.940	0.648	0.089	0.039	1.59			1.07		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	0.936				0.94			0.94		
	LTE Band 14	Front at 5mm	1.151	0.786	0.023	0.074	1.94	# 28	0.02	1.25		
		Back at 5mm	1.091	0.828	1.193	0.085	1.92	# 29	0.02	2.37	# 30	0.03
		Left side at 5mm	0.716				0.72			0.72		
		Right side at 5mm	0.903	0.648	0.089	0.039	1.55			1.03		
		Top side at 5mm		0.970	0.105	0.092	0.97			0.20		
		Bottom side at 5mm	1.250				1.25			1.25		
LTE Band 30	Front at 5mm	0.661	0.786	0.023	0.074	1.45			0.76			
	Back at 5mm	1.254	0.828	1.193	0.085	2.08	# 31	0.02	2.53	#32	0.03	
	Left side at 5mm	0.699				0.70			0.70			
	Right side at 5mm	0.103	0.648	0.089	0.039	0.75			0.23			
	Top side at 5mm		0.970	0.105	0.092	0.97			0.20			
	Bottom side at 5mm	0.881				0.88			0.88			
LTE Band 66	Front at 5mm	1.230	0.786	0.023	0.074	2.02	# 33	0.02	1.33			
	Back at 5mm	1.385	0.828	1.193	0.085	2.21	#34	0.02	2.66	# 35	0.03	
	Left side at 5mm	0.034				0.03			0.03			
	Right side at 5mm	0.047	0.648	0.089	0.039	0.70			0.18			
	Top side at 5mm		0.970	0.105	0.092	0.97			0.20			
	Bottom side at 5mm	1.206				1.21			1.21			



15.4 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	Case No	SPLSR	1+3+4	Case No	SPLSR	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed			Summed			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			1g SAR (W/kg)			
GSM	GSM850	Front at 5mm	1.328	0.786	0.023	0.074	2.11	# 1	0.02	1.43		
		Back at 5mm	1.372	0.828	1.193	0.085	2.20	# 2	0.02	2.65	# 3	0.03
		Back at 5mm Headset	1.013				1.01			1.01		
	GSM1900	Front at 5mm	1.152	0.786	0.031	0.074	1.94	# 4	0.02	1.26		
		Back at 5mm	1.231	0.828	1.193	0.085	2.06	# 5	0.02	2.51	# 6	0.03
		Back at 5mm Headset	1.240				1.24			1.24		
WCDMA	WCDMA II	Front at 5mm	0.867	0.786	0.031	0.074	1.65	# 7	0.01	0.97		
		Back at 5mm	1.215	0.828	1.193	0.085	2.04	# 8	0.02	2.49	# 9	0.03
		Back at 5mm Headset	1.215				1.22			1.22		
	WCDMA IV	Front at 5mm	1.080	0.786	0.031	0.074	1.87	# 10	0.02	1.19		
		Back at 5mm	1.289	0.828	1.193	0.085	2.12	# 11	0.02	2.57	# 12	0.03
		Back at 5mm Headset	1.371				1.37			1.37		
	WCDMA V	Front at 5mm	1.217	0.786	0.031	0.074	2.00	# 13	0.02	1.32		
		Back at 5mm	1.165	0.828	1.193	0.085	1.99	# 14	0.02	2.44	# 15	0.03
		Front at 5mm Headset	0.784				0.78			0.78		
LTE	LTE Band 2	Front at 5mm	1.085	0.786	0.031	0.074	1.87	# 16	0.02	1.19		
		Back at 5mm	1.239	0.828	1.193	0.085	2.07	# 17	0.02	2.52	# 18	0.03
		Back at 5mm Headset	1.227				1.23			1.23		
	LTE Band 5	Front at 5mm	1.335	0.786	0.031	0.074	2.12	# 19	0.02	1.44		
		Back at 5mm	1.157	0.828	1.193	0.085	1.99	# 20	0.02	2.44	# 21	0.03
		Front at 5mm Headset	1.298				1.30			1.30		
	LTE Band 12	Front at 5mm	1.023	0.786	0.023	0.074	1.81	# 22	0.02	1.12		
		Back at 5mm	0.952	0.828	1.193	0.085	1.78	# 23	0.02	2.23	# 24	0.03
	LTE Band 13	Front at 5mm	1.119	0.786	0.023	0.074	1.91	# 25	0.02	1.22		
		Back at 5mm	0.922	0.828	1.193	0.085	1.75	# 26	0.02	2.20	# 27	0.03
	LTE Band 14	Front at 5mm	1.151	0.786	0.023	0.074	1.94	# 28	0.02	1.25		
		Back at 5mm	1.091	0.828	1.193	0.085	1.92	# 29	0.02	2.37	# 30	0.03
	LTE Band 30	Front at 5mm	0.661	0.786	0.023	0.074	1.45			0.76		
		Back at 5mm	1.254	0.828	1.193	0.085	2.08	# 31	0.02	2.53	# 32	0.03
	LTE Band 66	Front at 5mm	1.230	0.786	0.031	0.074	2.02	# 33	0.02	1.34		
Back at 5mm		1.385	0.828	1.193	0.085	2.21	# 34	0.02	2.66	# 35	0.03	
Back at 5mm Headset		1.337				1.34			1.34			





WWAN Band		Exposure Position	1	2	3	1+2	1+3	Case No	SPLSR
			WWAN	2.4GHz WLAN	5GHz WLAN	Summed	Summed		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM1900	Front at 15mm	0.403	0.321	0.040	0.72	0.44		
		Back at 19mm	0.413	0.254	1.134	0.67	1.55		
WCDMA	WCDMA II	Front at 15mm	1.102	0.321	0.040	1.42	1.14		
		Back at 19mm	1.277	0.254	1.134	1.53	2.41	# 48	0.03
	WCDMA IV	Front at 15mm	1.015	0.321	0.040	1.34	1.06		
		Back at 19mm	1.027	0.254	1.134	1.28	2.16	# 49	0.02
	WCDMA V	Front at 15mm	0.351	0.321	0.040	0.67	0.39		
		Back at 19mm	0.304	0.254	1.134	0.56	1.44		
LTE	LTE Band 2	Front at 15mm	1.177	0.321	0.040	1.50	1.22		
		Back at 19mm	1.192	0.254	1.134	1.45	2.33	# 50	0.03
	LTE Band 5	Front at 15mm	0.405	0.321	0.040	0.73	0.45		
		Back at 19mm	0.354	0.254	1.134	0.61	1.49		
	LTE Band 30	Front at 15mm	0.489	0.321	0.040	0.81	0.53		
		Back at 19mm	0.410	0.254	1.134	0.66	1.54		
	LTE Band 66	Front at 15mm	1.065	0.321	0.040	1.39	1.11		
		Back at 19mm	1.033	0.254	1.134	1.29	2.17	# 51	0.02

Note: Bluetooth 15mm front SAR and 19mm back SAR have been performed for co-located with WWAN analysis. But for Bluetooth SAR is too small to find cube SAR, so co-located with WWAN/WLAN, Bluetooth SAR is considered zero.



15.5 Product specific 10g SAR Exposure Conditions

WWAN Band		Exposure Position	1	3	1+3 Summed 10g SAR (W/kg)	Case No	SPLSR
			WWAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)			
GSM	GSM850	Front at 0mm	1.553	0.029	1.58		
		Back at 0mm	1.292	2.524	3.82		
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
	GSM1900	Front at 0mm		0.029	0.03		
		Back at 0mm	1.871	2.524	4.40	# 36	0.07
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	1.548		1.55		
WCDMA	WCDMA II	Front at 0mm	2.587	0.029	2.62		
		Back at 0mm	3.344	2.524	5.87	# 38	0.10
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	1.991		1.99		
	WCDMA IV	Front at 0mm	2.400	0.029	2.43		
		Back at 0mm	2.389	2.524	4.91	# 40	0.08
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	3.269		3.27		
	WCDMA V	Front at 0mm	2.335	0.029	2.36		
		Back at 0mm	1.884	2.524	4.41	# 41	0.07
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	1.746		1.75		
LTE	LTE Band 2	Front at 0mm	3.071	0.029	3.10		
		Back at 0mm	3.275	2.524	5.80	# 43	0.10
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	1.873		1.87		
	LTE Band 5	Front at 0mm	1.869	0.029	1.90		
		Back at 0mm	1.656	2.524	4.18	# 44	0.06
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	1.763		1.76		
	LTE Band 14	Bottom side at 0mm	0.995		1.00		
	LTE Band 30	Front at 0mm		0.029	0.03		
		Back at 0mm	2.731	2.524	5.26	# 46	0.09
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
		Bottom side at 0mm	2.070		2.07		
	LTE Band 66	Front at 0mm	1.778	0.029	1.81		
		Back at 0mm	1.943	2.524	4.47	# 47	0.07
		Right side at 0mm		0.149	0.15		
		Top side at 0mm		0.136	0.14		
Bottom side at 0mm		3.092		3.09			




WWAN Band		Exposure Position	1	2	4	1+2 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN		
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
WCDMA	WCDMA II	Front at 5mm	1.877			1.88	1.88
		Back at 9mm	1.692	0.423	0.503	2.12	2.20
		Bottom Side at 11mm	2.117			2.12	2.12
	WCDMA IV	Front at 5mm	1.162			1.16	1.16
		Back at 9mm	0.882	0.423	0.503	1.31	1.39
		Bottom Side at 11mm	1.295			1.30	1.30
LTE	LTE Band 2	Front at 5mm	1.927			1.93	1.93
		Back at 9mm	1.583	0.423	0.503	2.01	2.09
		Bottom Side at 11mm	1.890			1.89	1.89
	LTE Band 30	Front at 5mm	0.669			0.67	0.67
		Back at 9mm	0.529	0.423	0.503	0.95	1.03
		Bottom Side at 11mm	0.518			0.52	0.52
	LTE Band 66	Front at 5mm	1.269			1.27	1.27
		Back at 9mm	1.124	0.423	0.503	1.55	1.63
		Bottom Side at 11mm	1.387			1.39	1.39

### 15.6 SPLSR Evaluation and Analysis


**General Note:**

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2.  $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$  for 1g SAR and  $SPLSR \leq 0.10$  for 10g SAR, simultaneously transmission SAR measurement is not necessary.


Case #01	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850			(mm)	X	Y	Z				
	WLAN2.4GHz	Front	0.786	5mm	25.6	77.2	-2.03	166.6	2.11	0.02	Not required

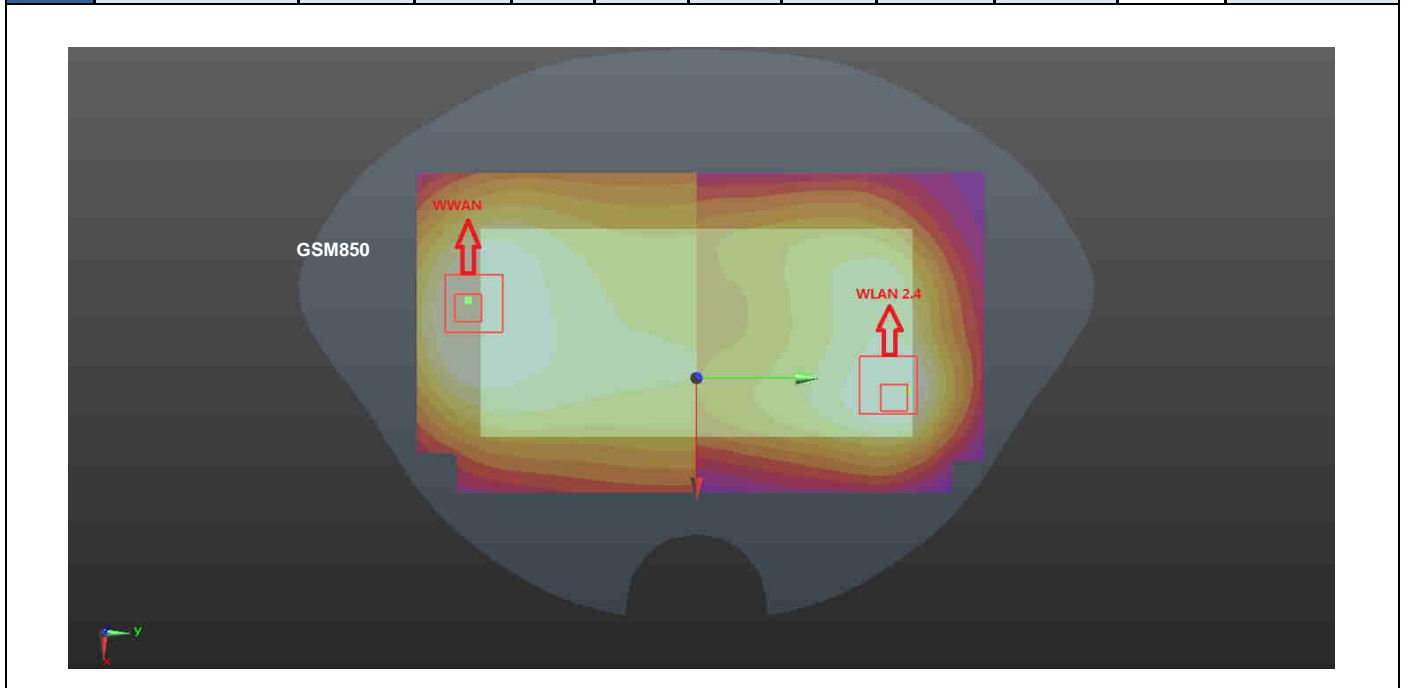


Case #02	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	WLAN2.4GHz	Back	1.372	5mm	4.9	-80.7	-2.21	158.2	2.20	0.02	Not required
			0.828	5mm	-34.2	72.6	-2.48				

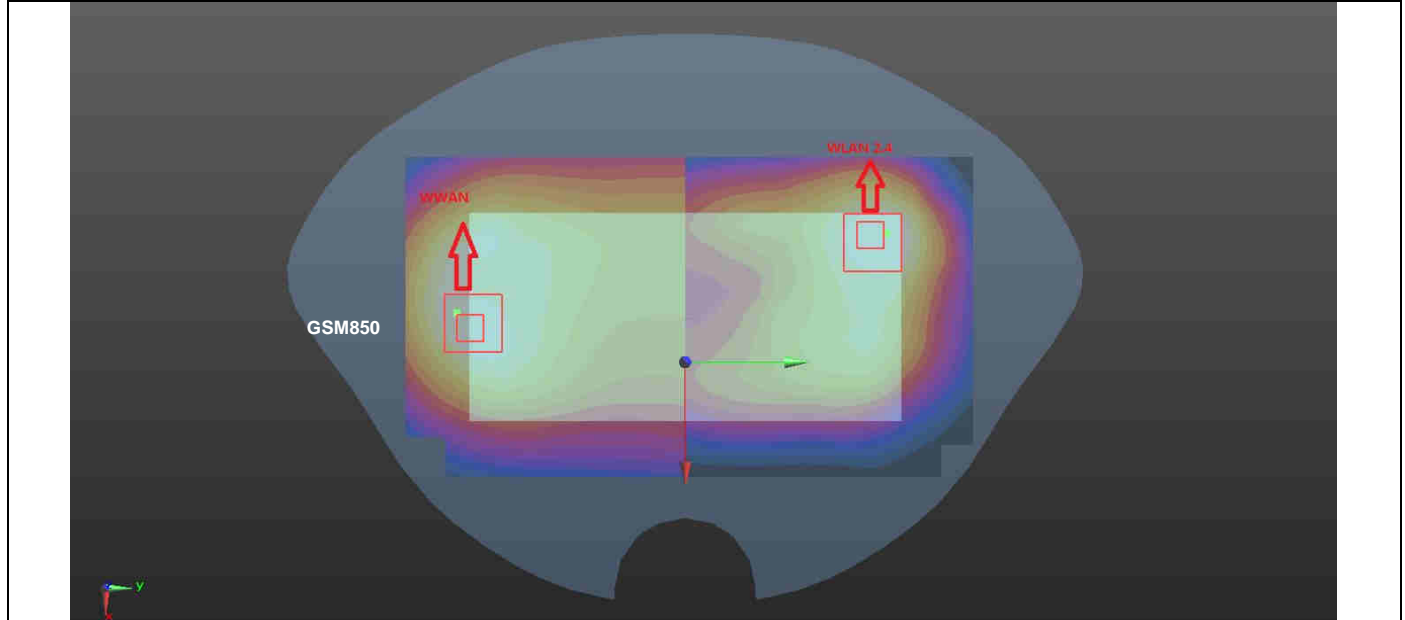


Case #03	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.372	5mm	4.9	-80.7	-2.21	156.9	2.65	0.03	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	GSM850	Back	1.372	5mm	4.9	-80.7	-2.21	131.3	2.65	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

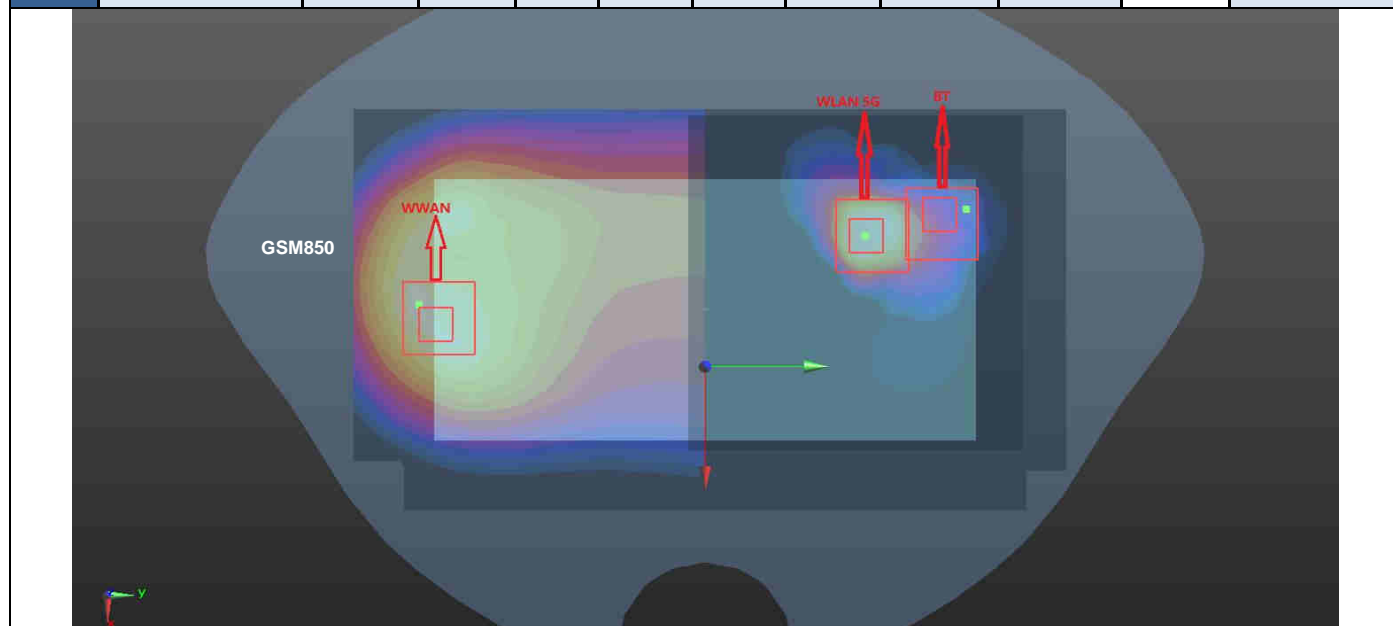


Case #04	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Front	1.152	5mm	8.8	-88.3	-1.47	166.4	1.94	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

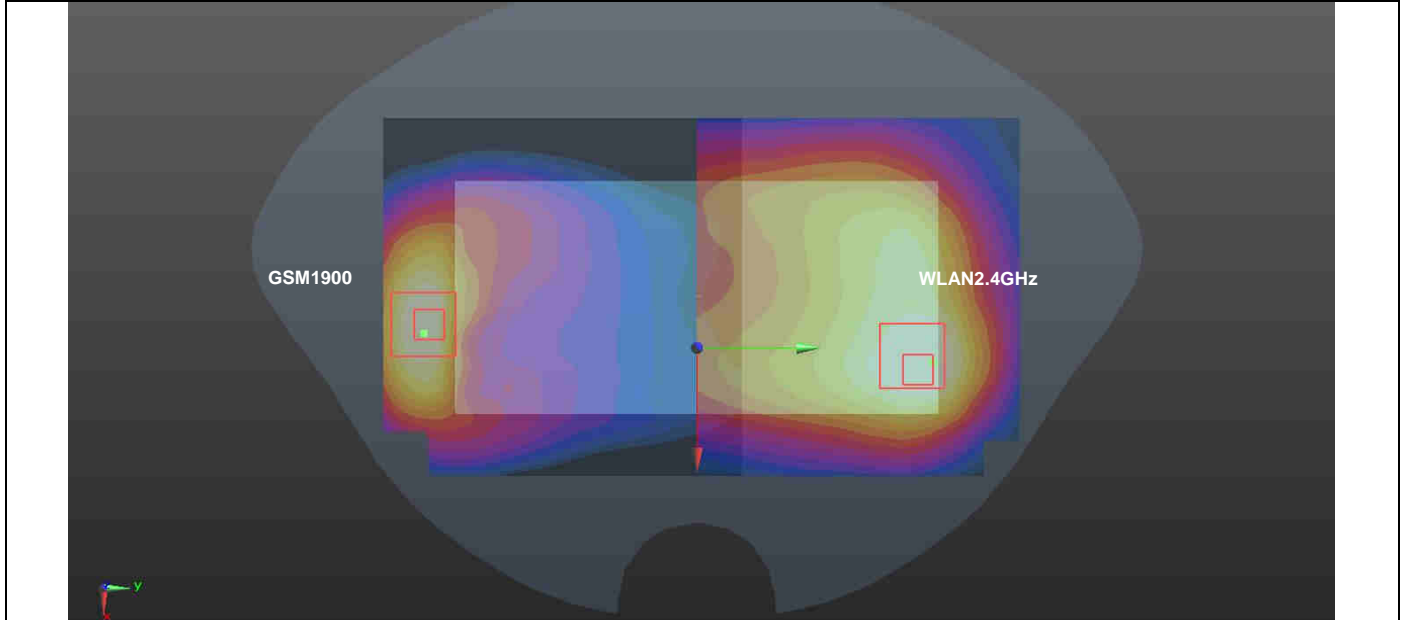

Case #05	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.231	5mm	1.5	-83.8	-1.47	160.4	2.06	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

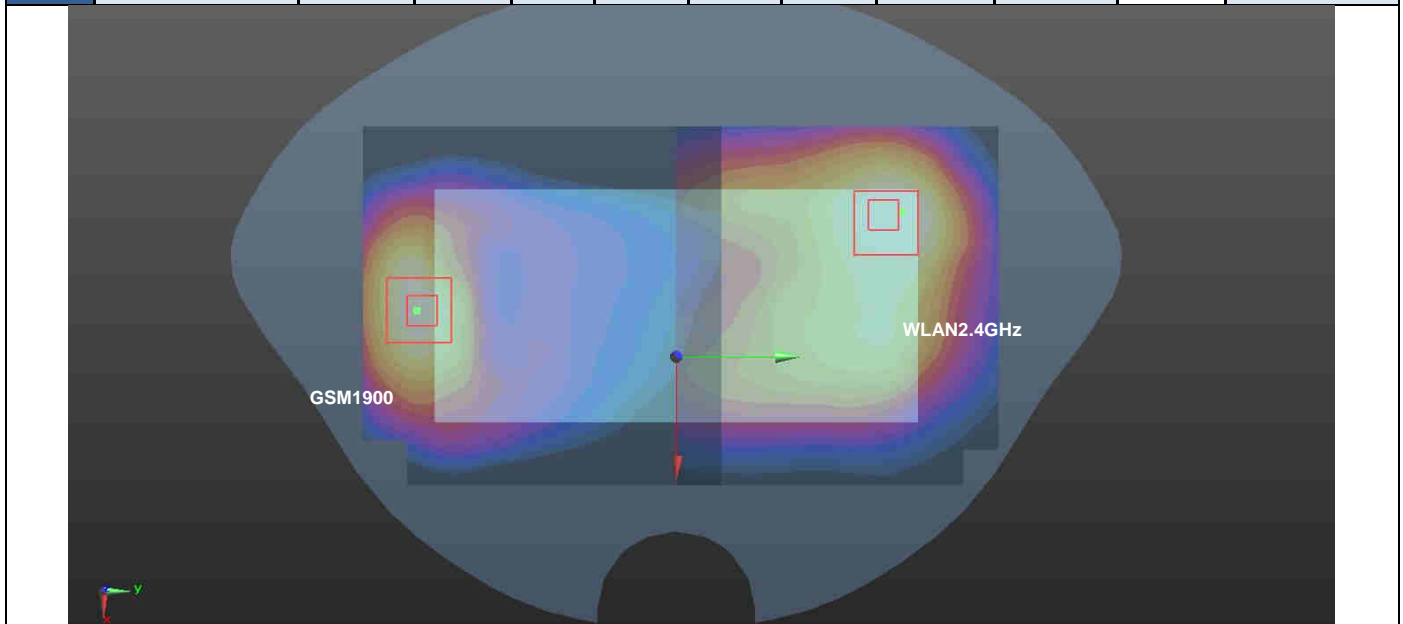


Case #06	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #06	GSM1900	Back	1.231	5mm	1.5	-83.8	-1.47	159.2	2.51	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	GSM1900	Back	1.231	5mm	1.5	-83.8	-1.47	133.8	2.51	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

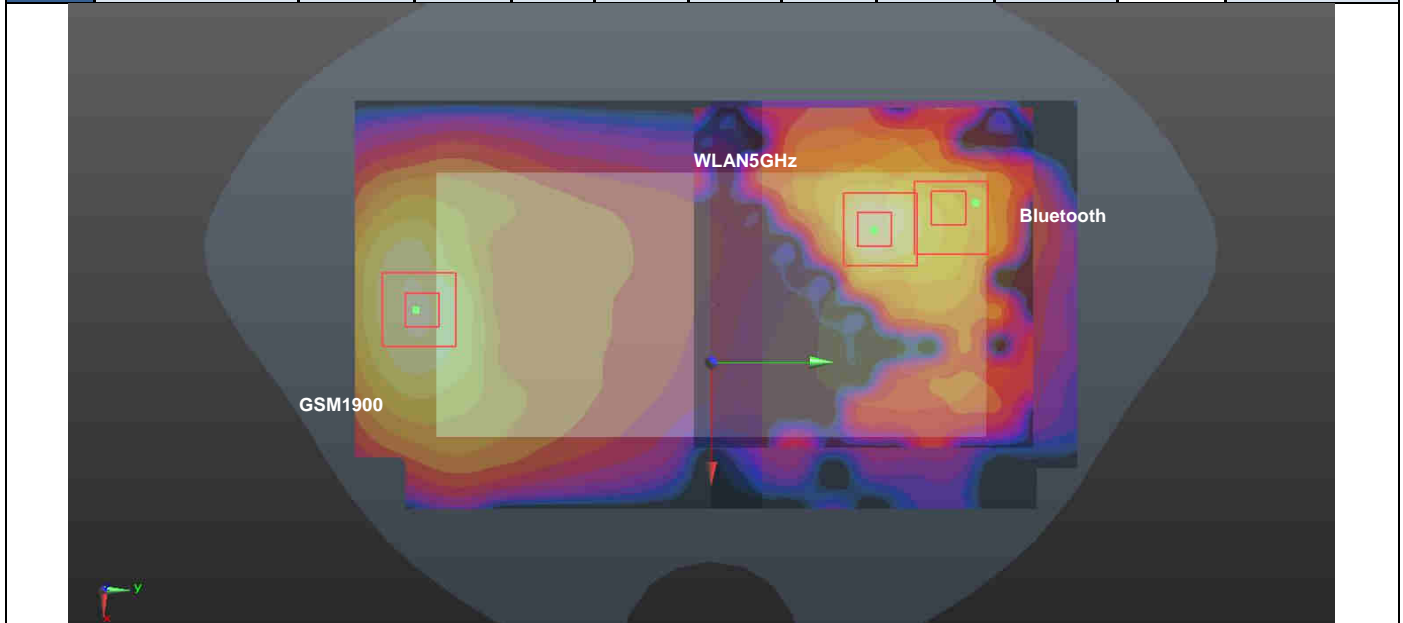





Case #07	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Front	0.867	5mm	10.7	-80.9	-1.52	158.8	1.65	0.01	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

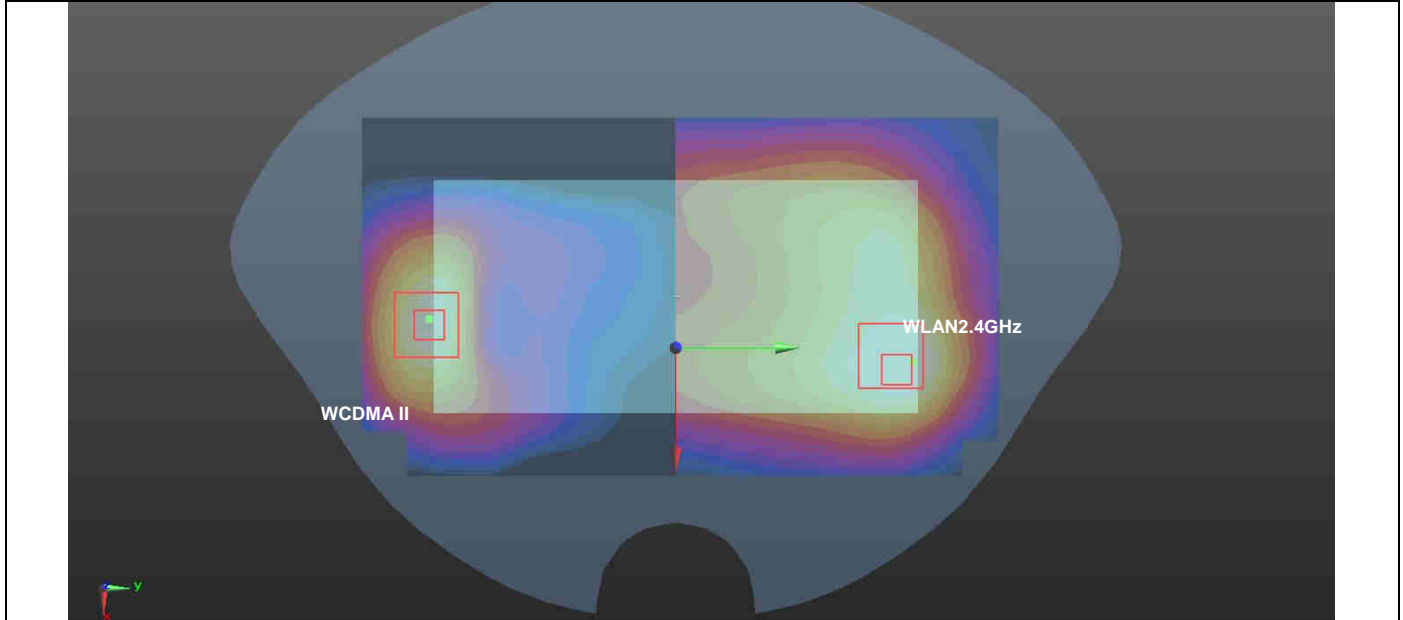


Case #08	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.215	5mm	1.2	-84	-1.57	160.6	2.04	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

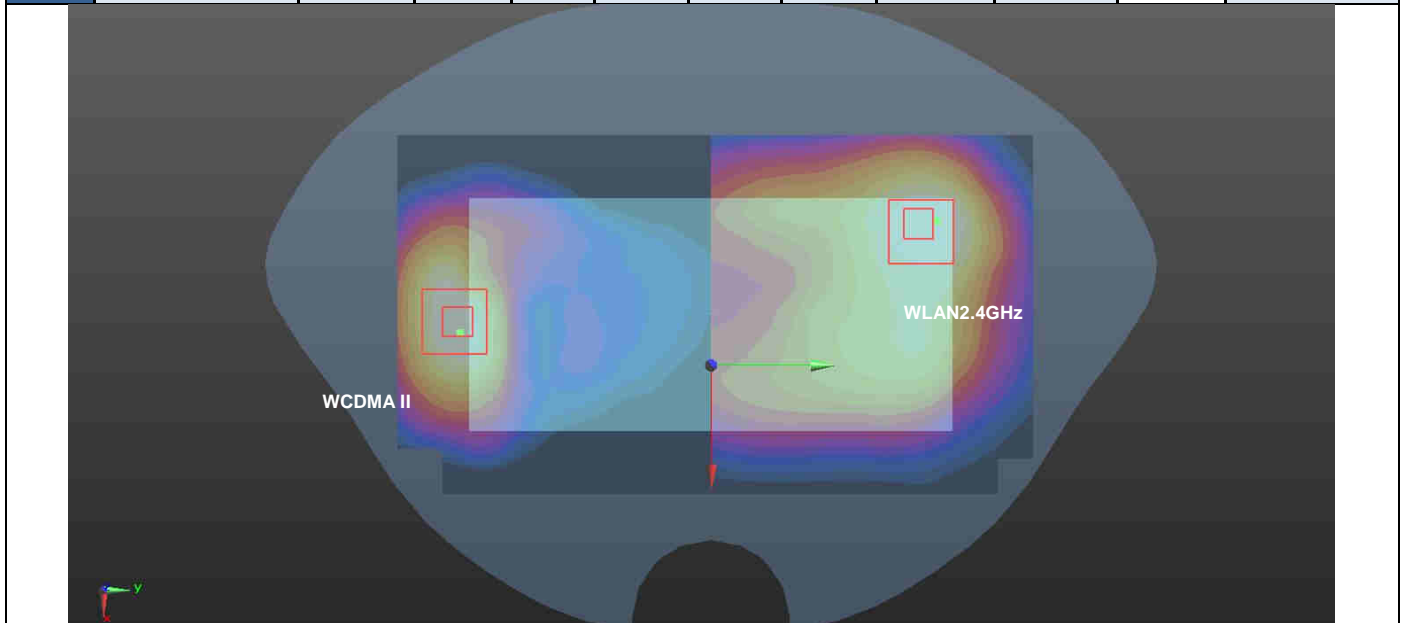


Case #09	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.215	5mm	1.2	-84	-1.57	159.3	2.49	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WCDMA II	Back	1.215	5mm	1.2	-84	-1.57	134.0	2.49	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

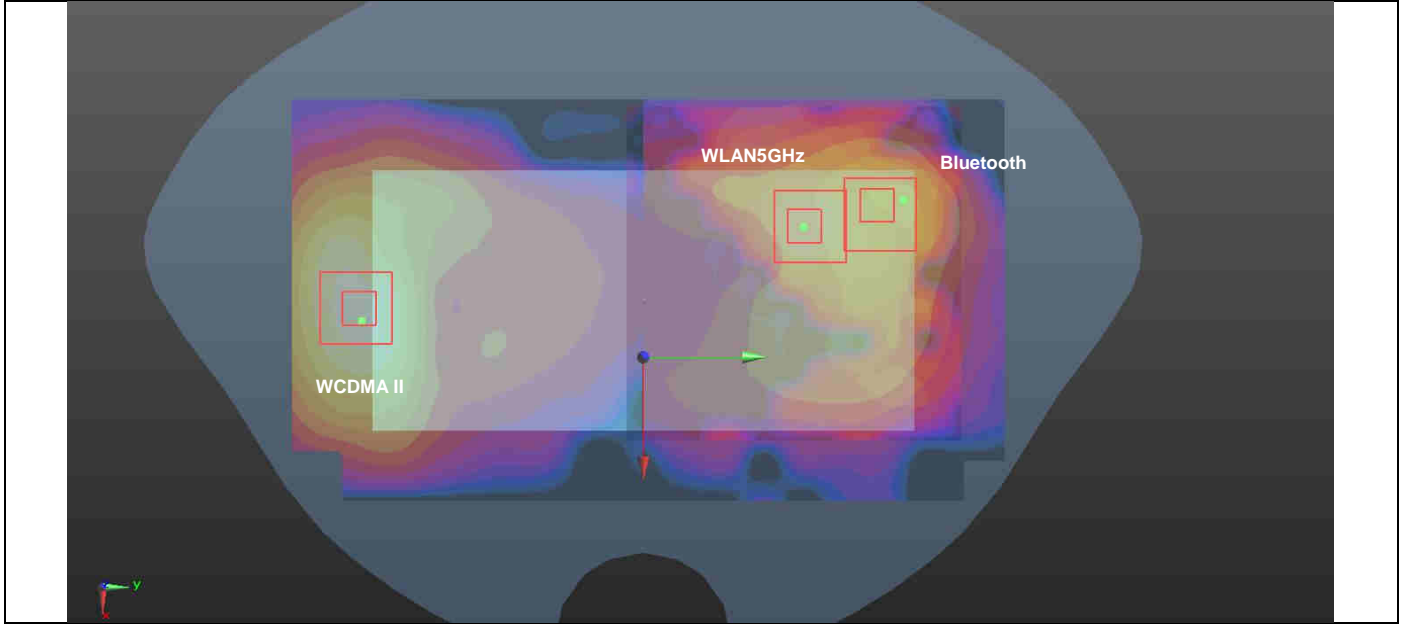


Case #10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Front	1.08	5mm	4.4	-82.4	-1.41	161.0	1.87	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

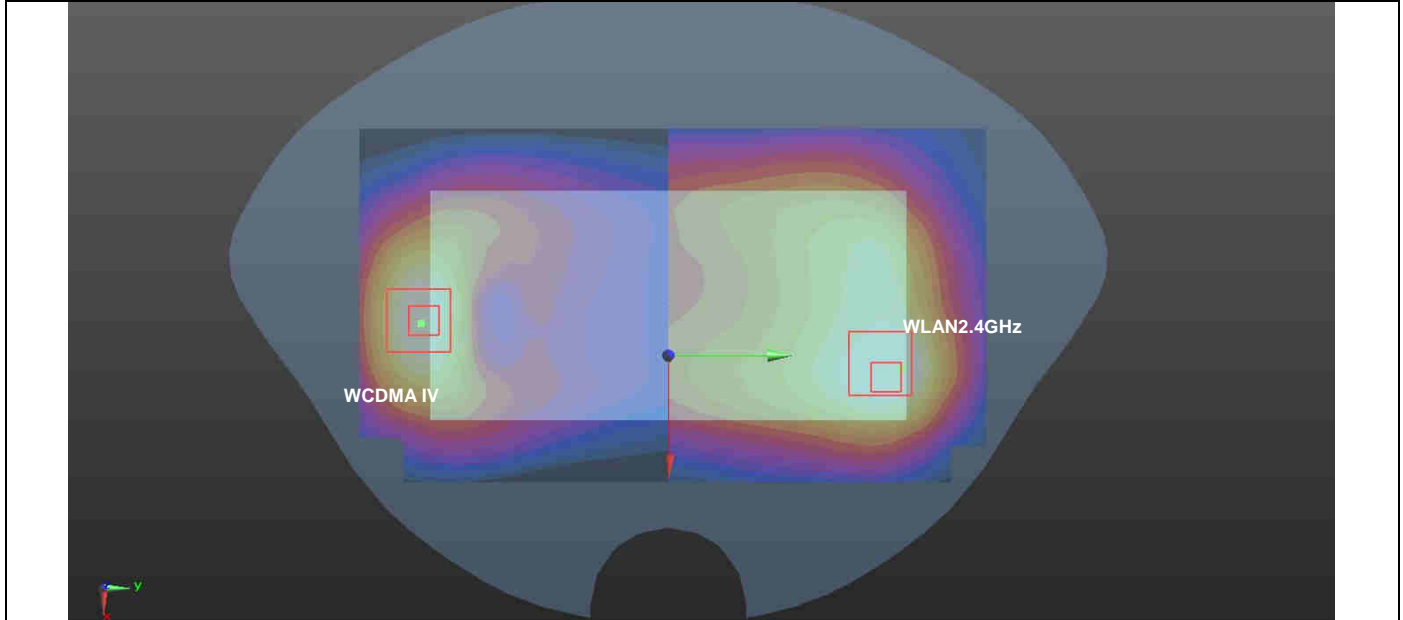


Case #11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Back	1.289	5mm	-6	-79.4	-1.72	154.6	2.12	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

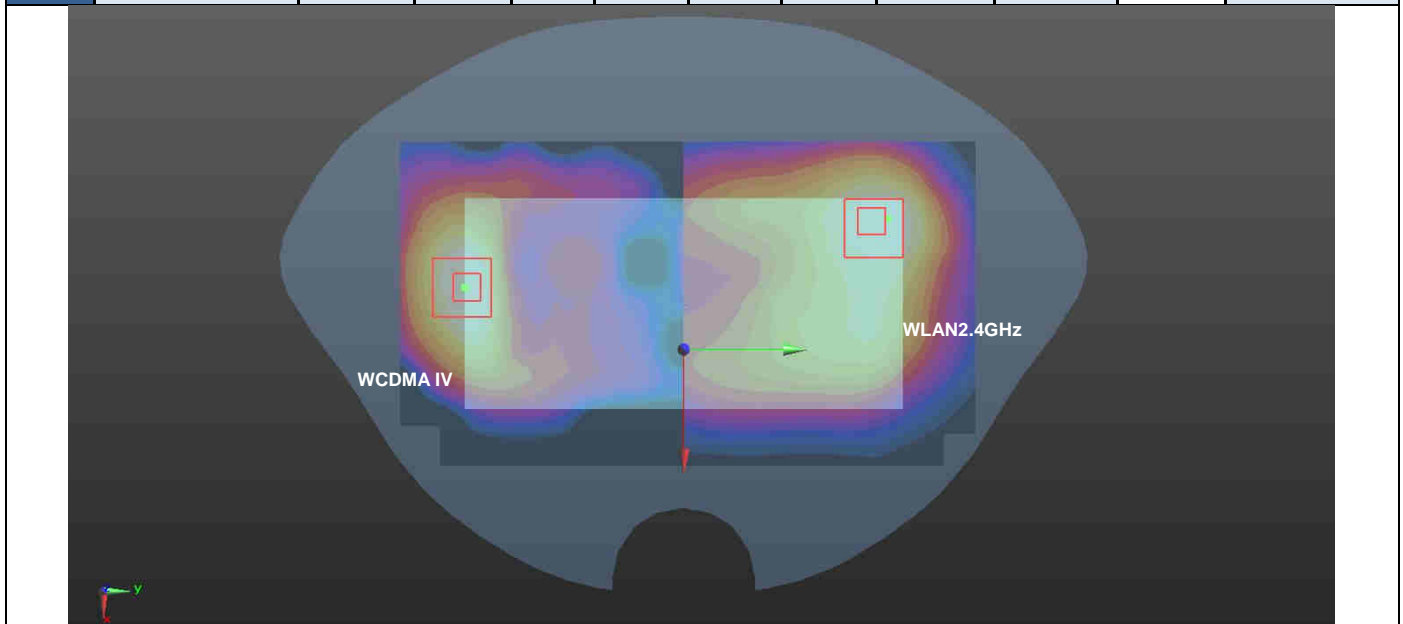


Case #12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #12	WCDMA IV	Back	1.289	5mm	-6	-79.4	-1.72	153.5	2.57	0.03	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
Case #12	WCDMA IV	Back	1.289	5mm	-6	-79.4	-1.72	128.7	2.57	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

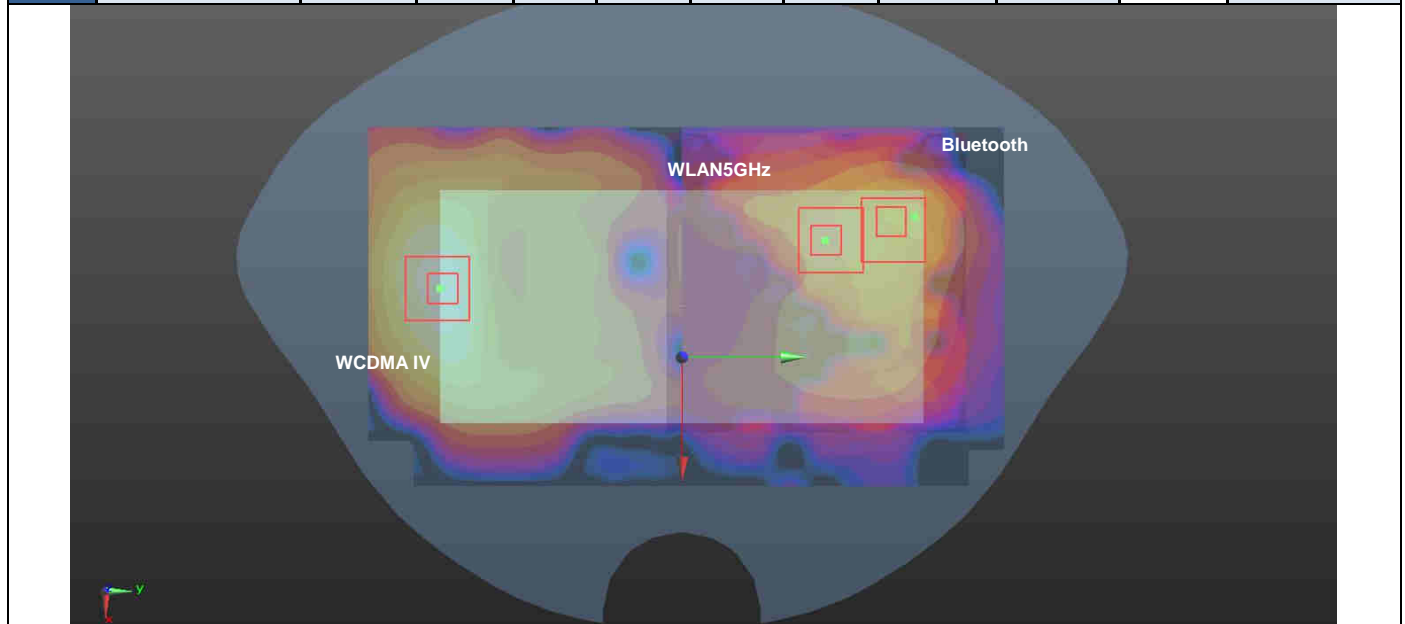


Case 13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Front	1.217	5mm	-7.2	-84	-1.69	164.5	2.00	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

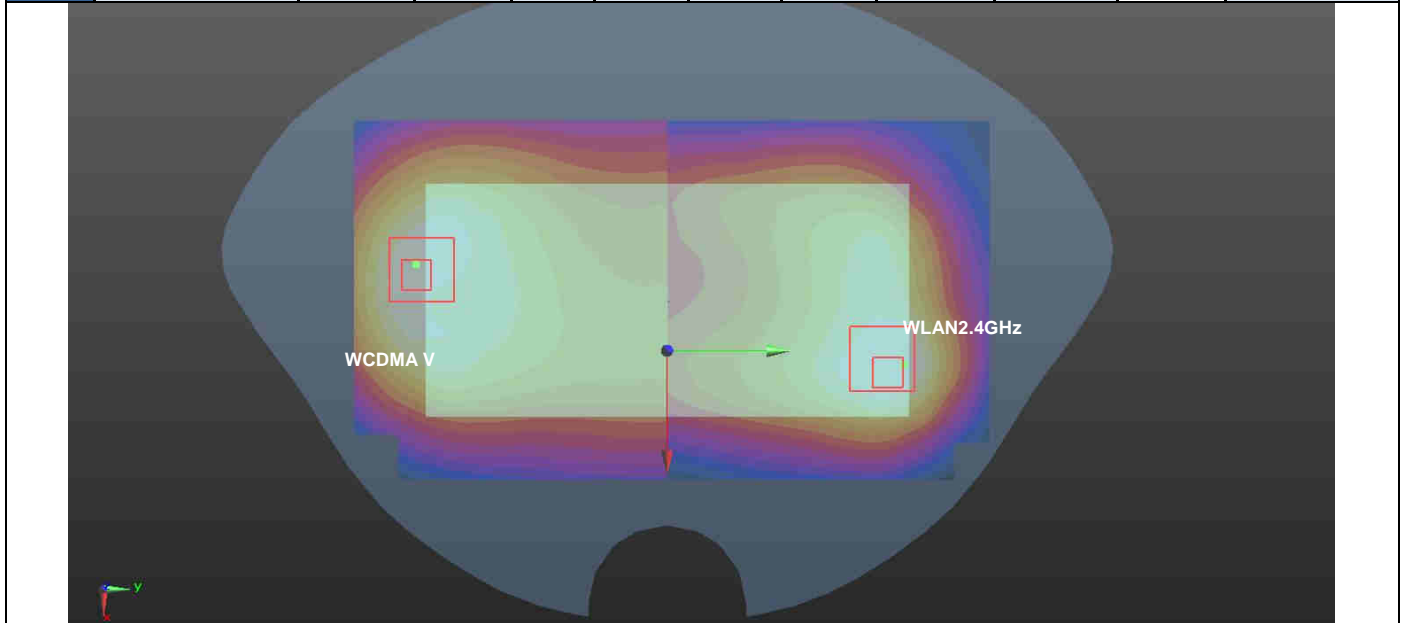


Case #14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Back	1.165	5mm	8	-82.2	-1.63	160.5	1.99	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

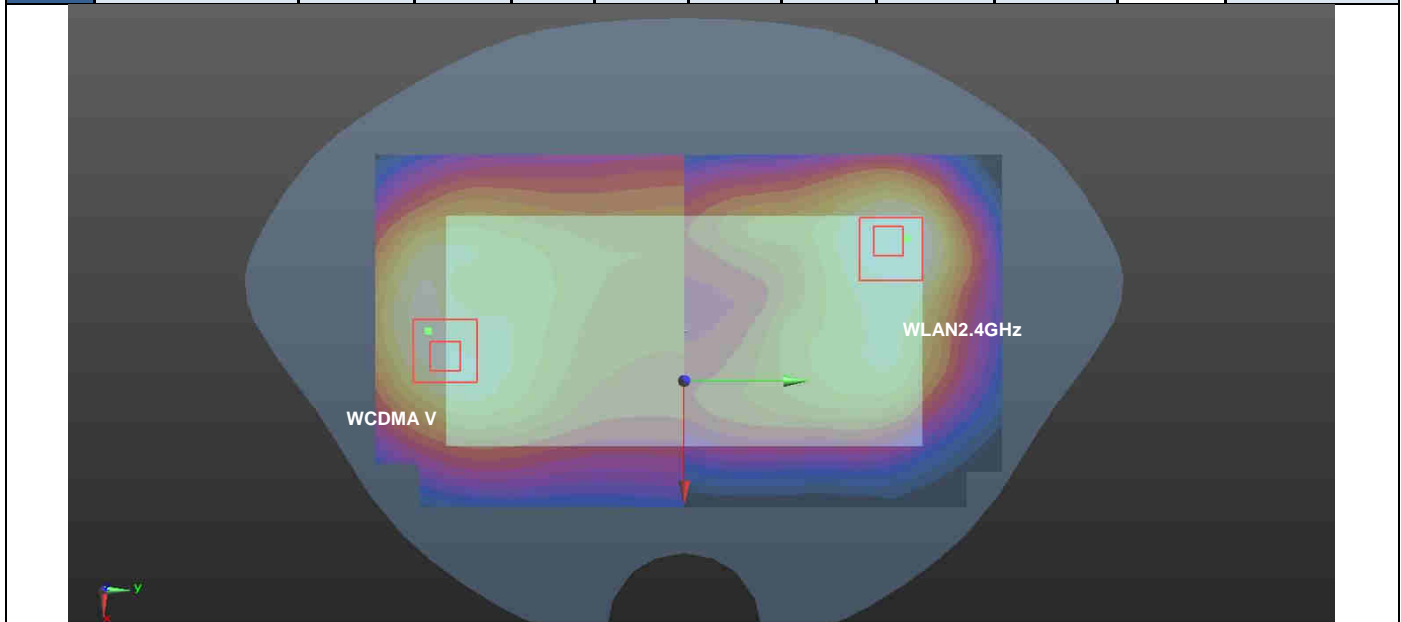


Case #15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #15	WCDMA V	Back	1.165	5mm	8	-82.2	-1.63	159.1	2.44	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
Case #15	WCDMA V	Back	1.165	5mm	8	-82.2	-1.63	133.3	2.44	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

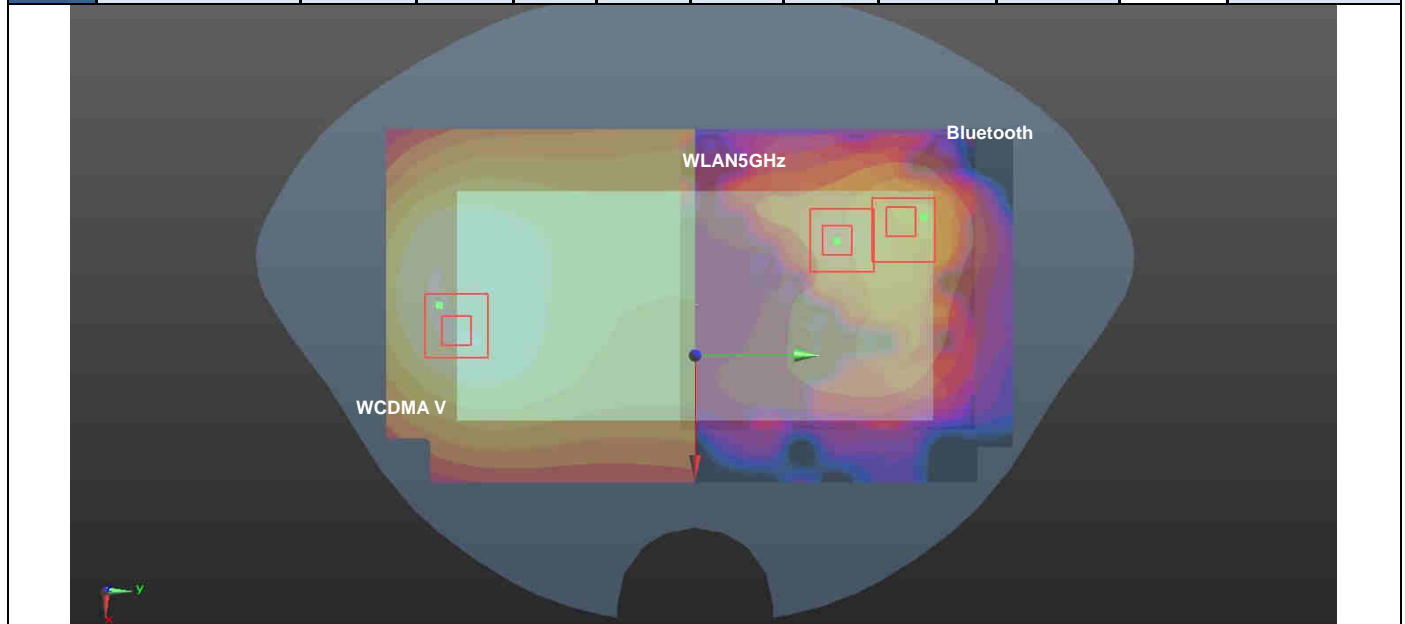


Case #16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Front	1.085	5mm	3.2	-88.4	-1.8	167.1	1.87	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

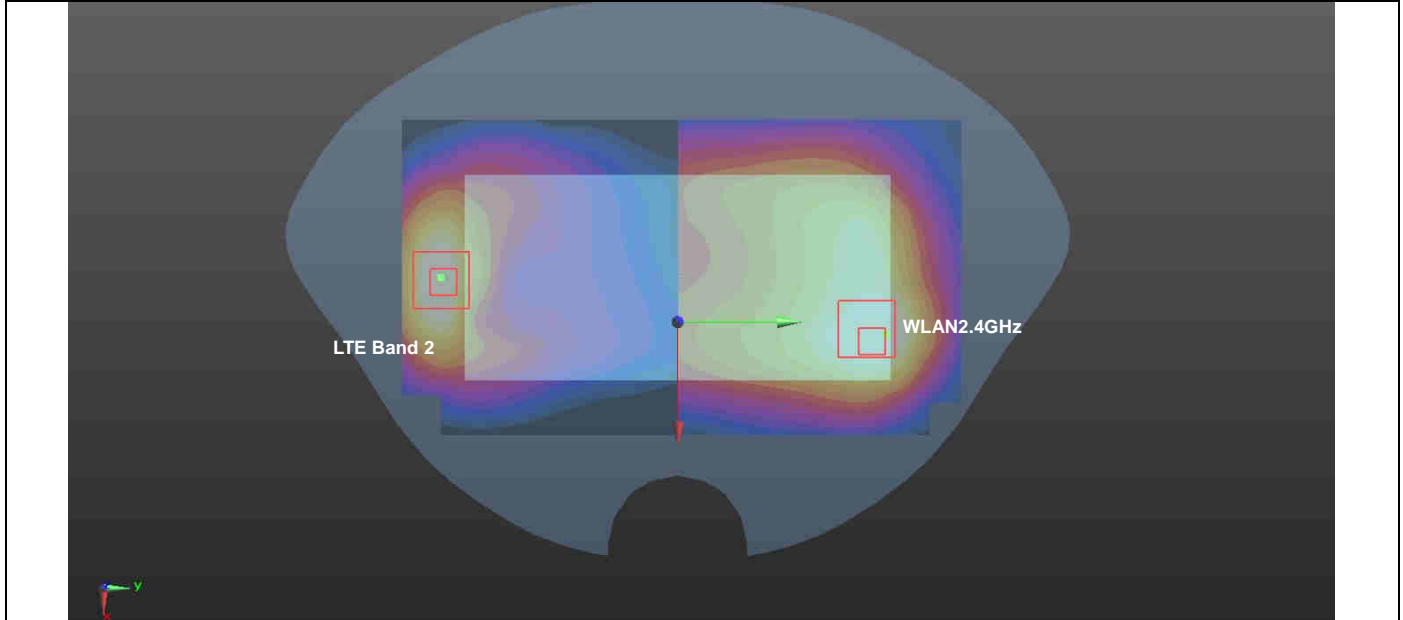

Case #17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Back	1.239	5mm	-9	-86.8	-1.86	161.4	2.07	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

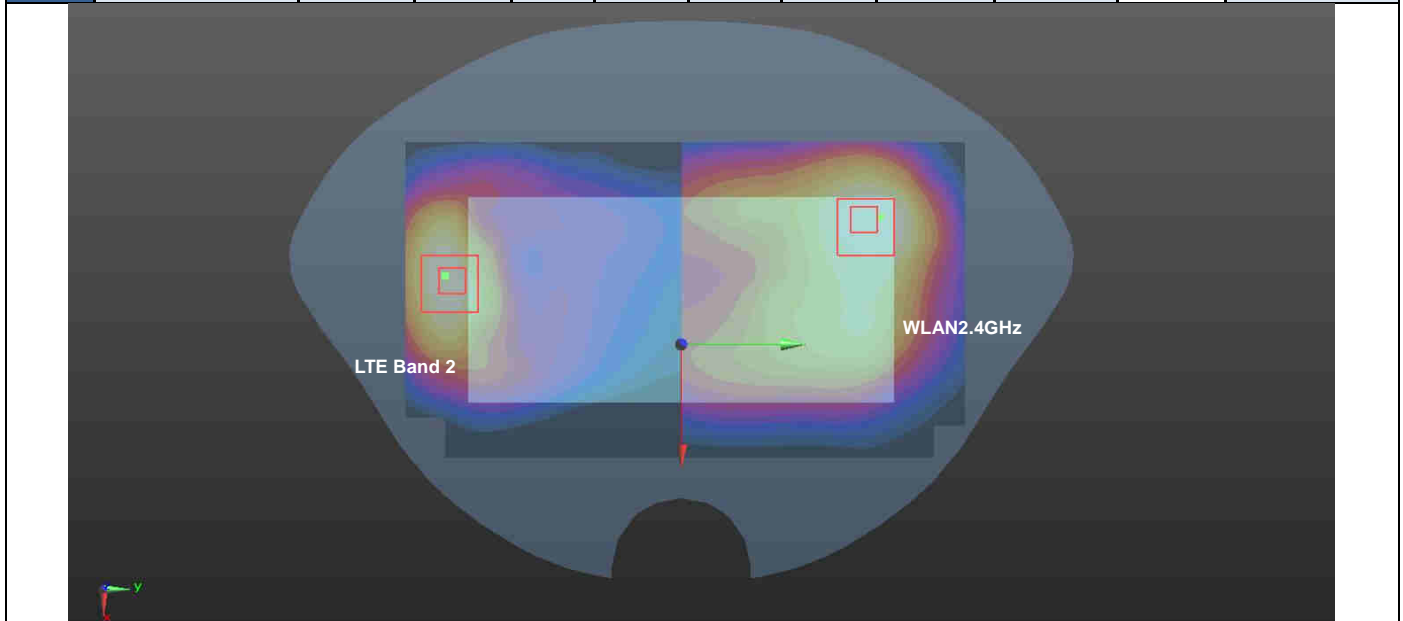


Case #18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #18	LTE Band 2	Back	1.239	5mm	-9	-86.8	-1.86	160.3	2.52	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 2	Back	1.239	5mm	-9	-86.8	-1.86	135.8	2.52	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

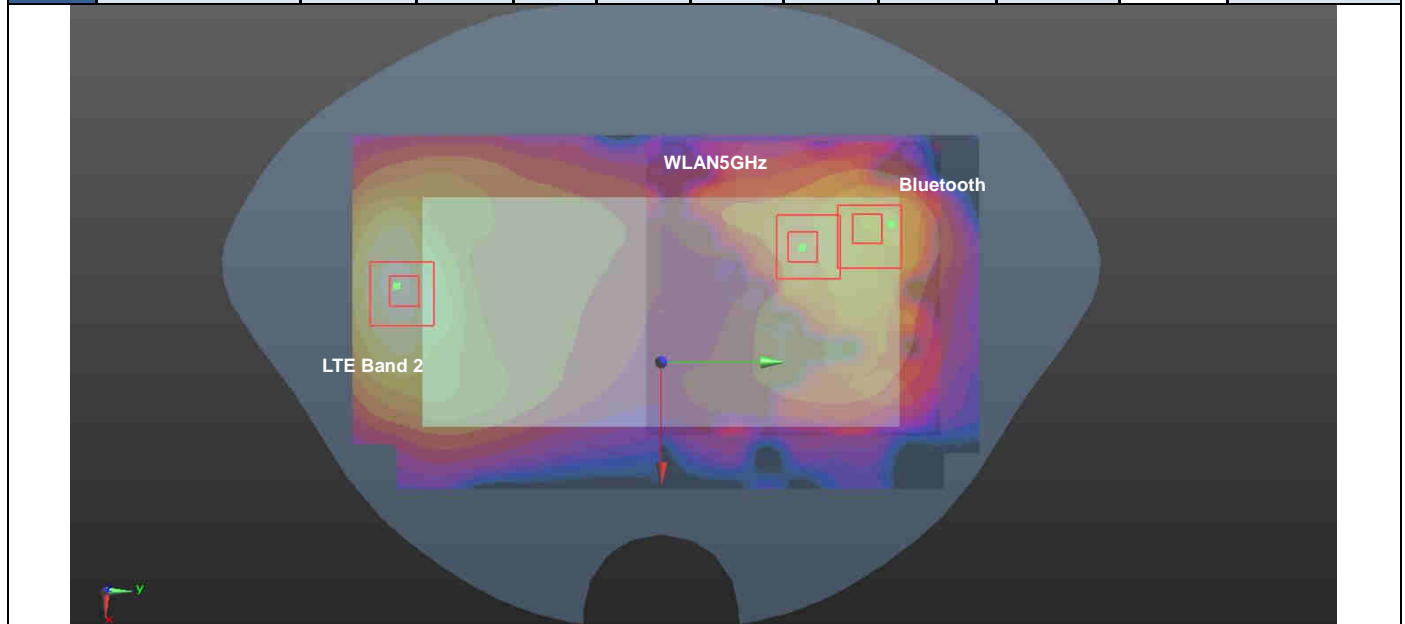





Case #19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Front	1.335	5mm	-6.3	-85.4	-2.1	165.7	2.12	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

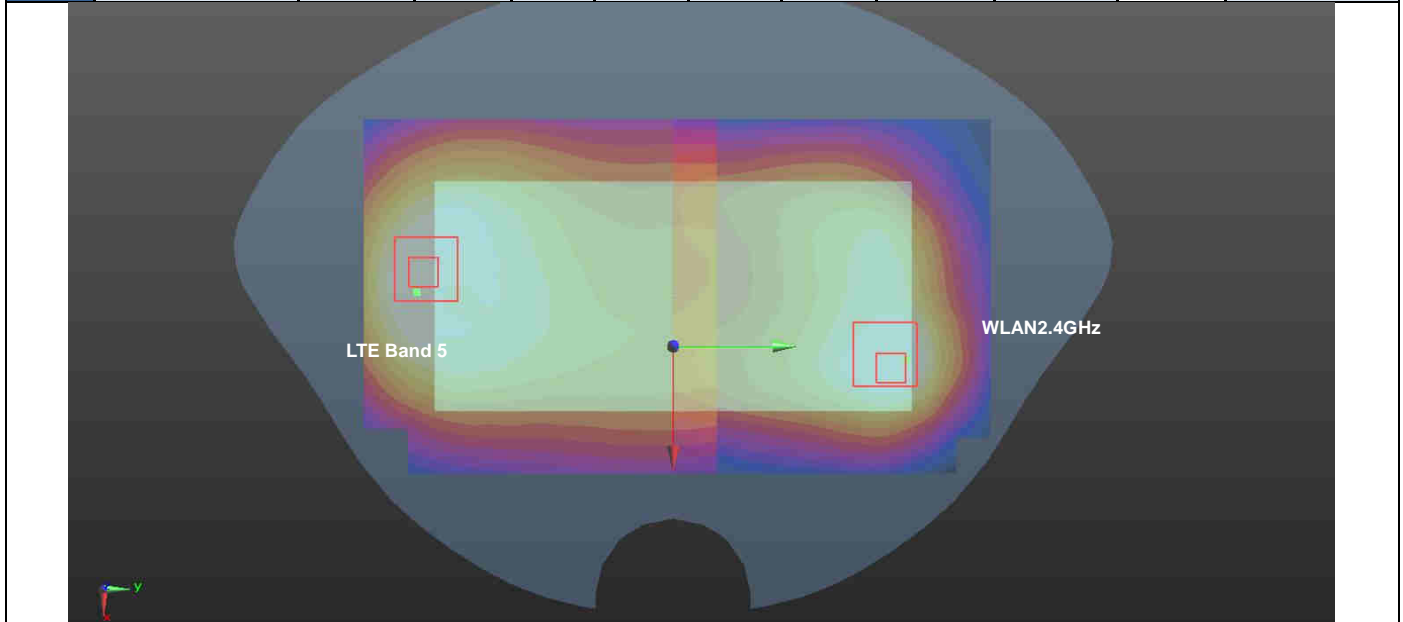


Case #20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Back	1.157	5mm	6.4	-80.7	-1.62	158.6	1.99	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

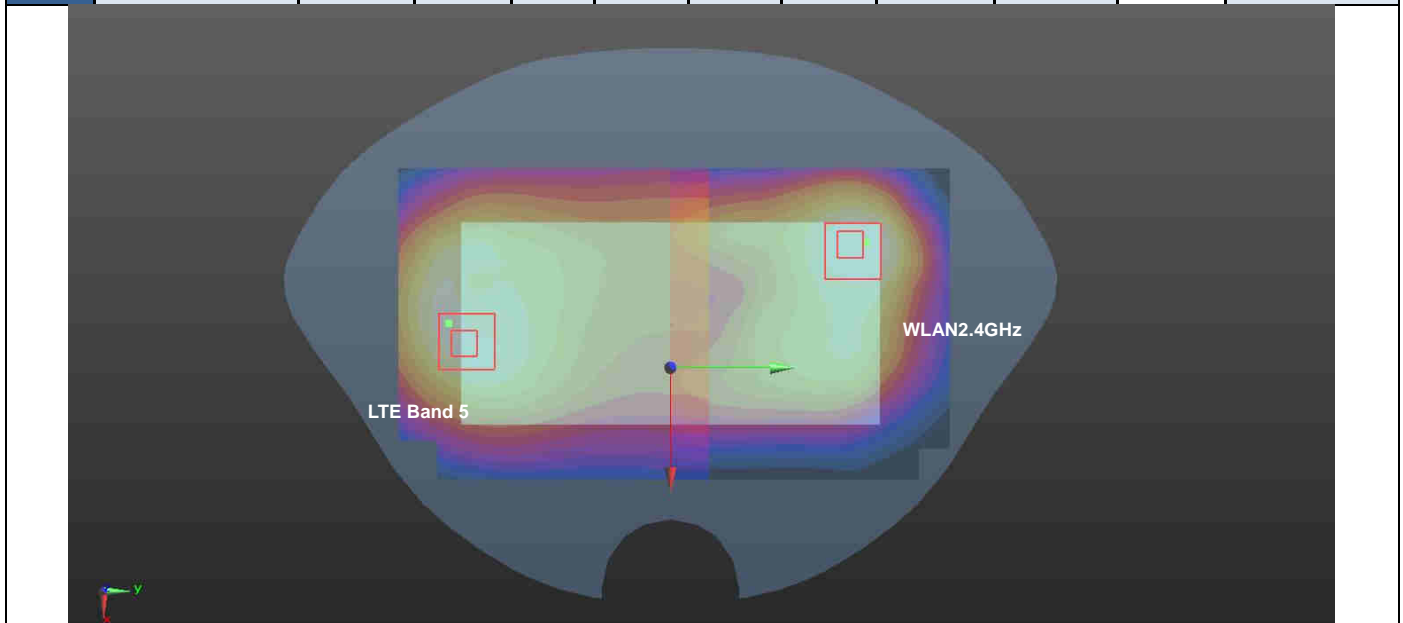


Case #21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Back	1.157	5mm	6.4	-80.7	-1.62	157.2	2.44	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 5	Back	1.157	5mm	6.4	-80.7	-1.62	131.5	2.44	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

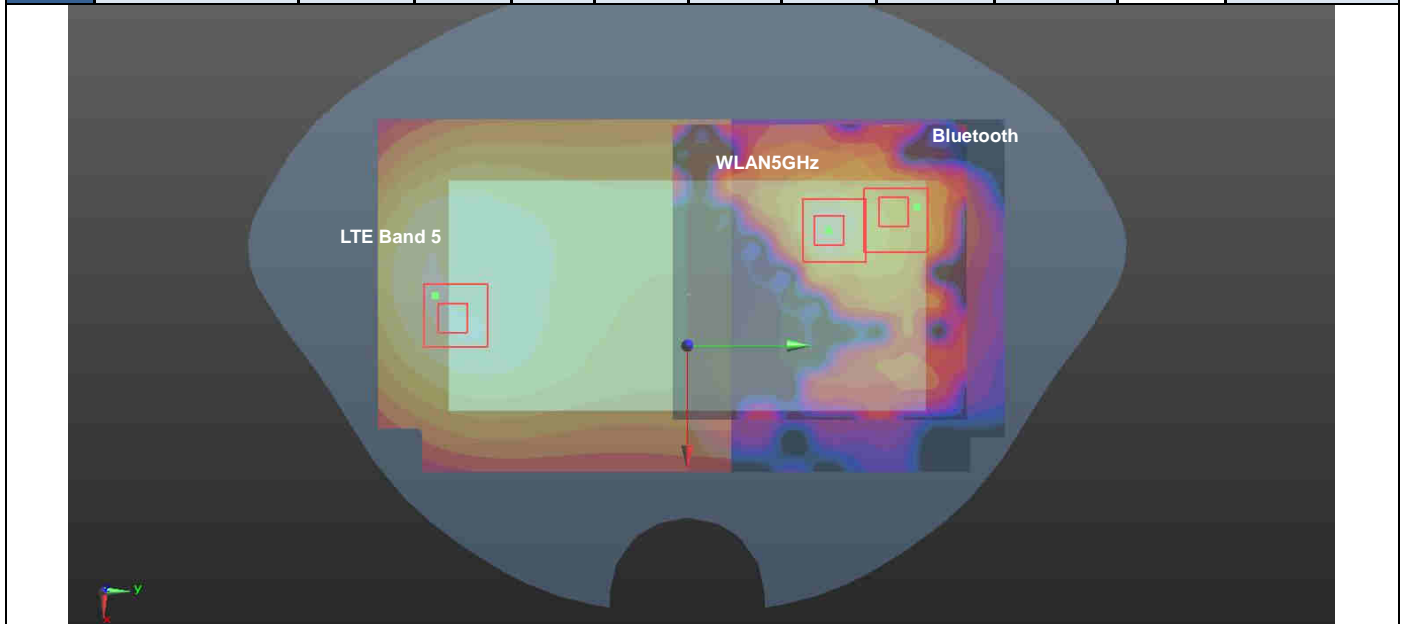


Case #22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 12	Front	1.023	5mm	-5.6	-78.3	-2.05	158.6	1.81	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

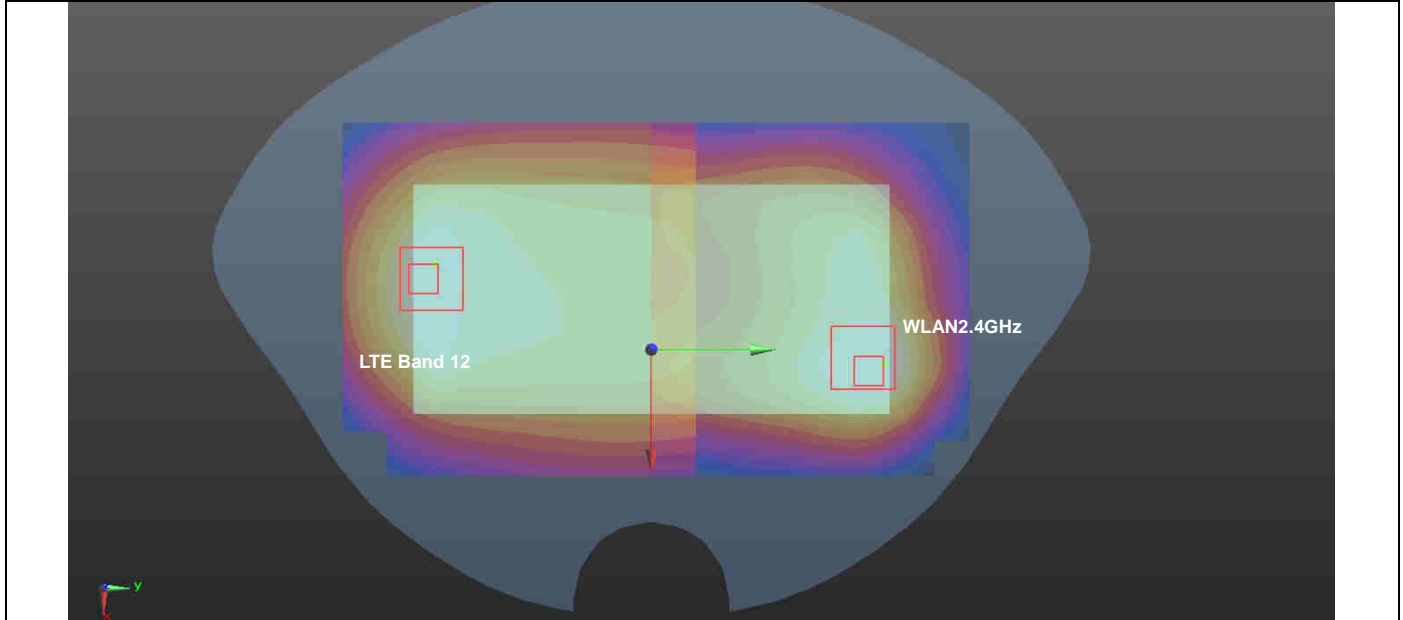


Case #23	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 12	Back	0.952	5mm	-25.4	-79.9	-2.25	152.8	1.78	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

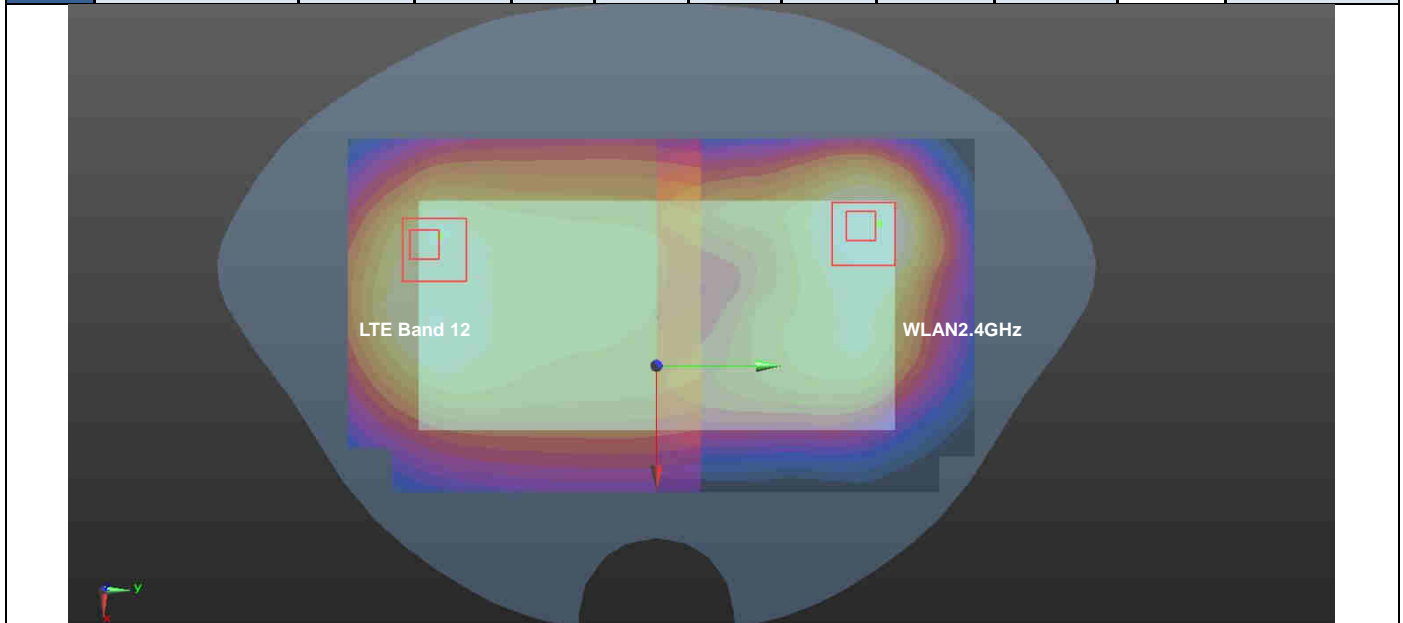


Case #24	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #24	LTE Band 12	Back	0.952	5mm	-25.4	-79.9	-2.25	152.0	2.23	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 12	Back	0.952	5mm	-25.4	-79.9	-2.25	129.1	2.23	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

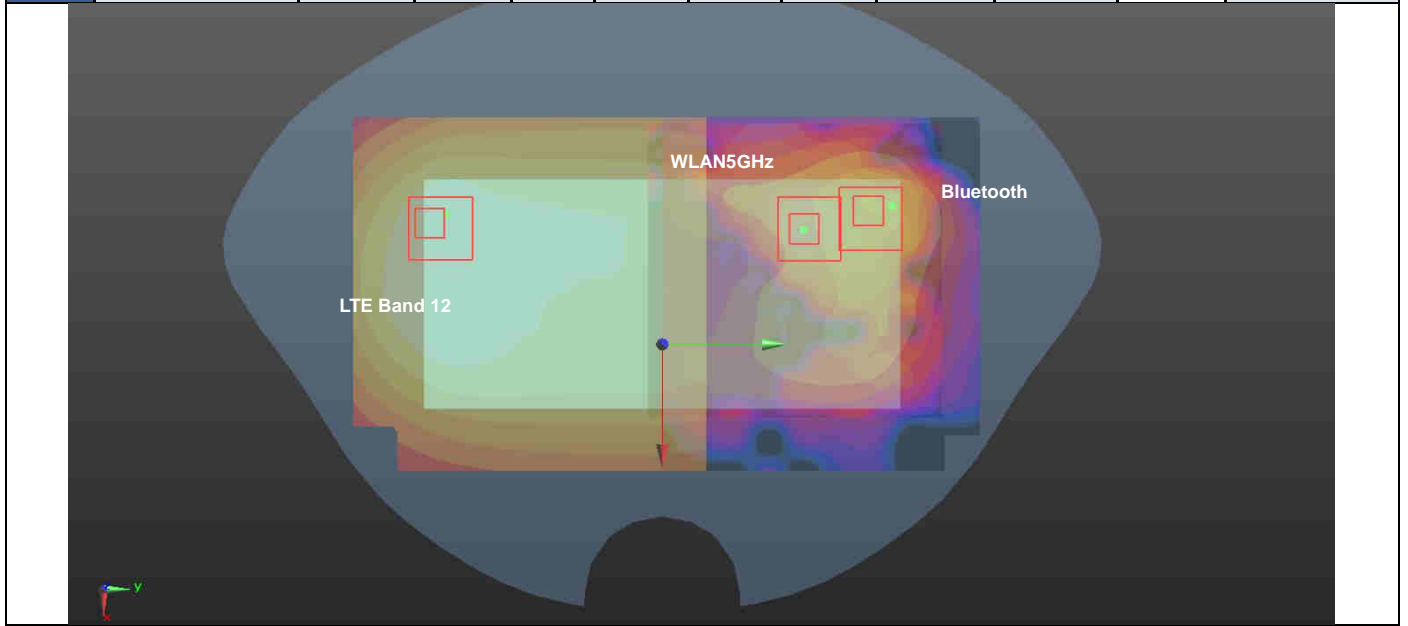


Case #25	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13	Front	1.119	5mm	-8.8	-78.2	-2.03	159.2	1.91	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

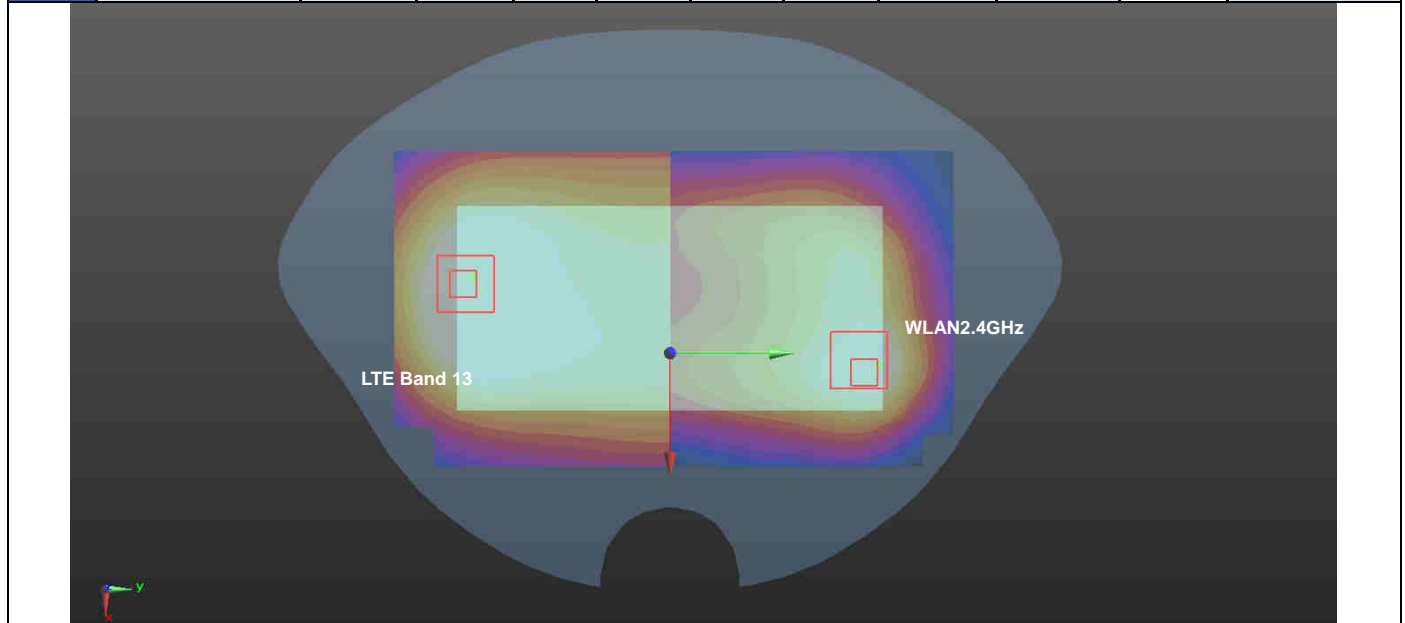


Case #26	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 13 Cube 0	Back	0.922	5mm	-22.5	-72	-2.39	145.1	1.75	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				
	LTE Band 13 Cube 1	Back	0.922	5mm	4.1	-78.3	-2.12	155.7	1.75	0.01	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

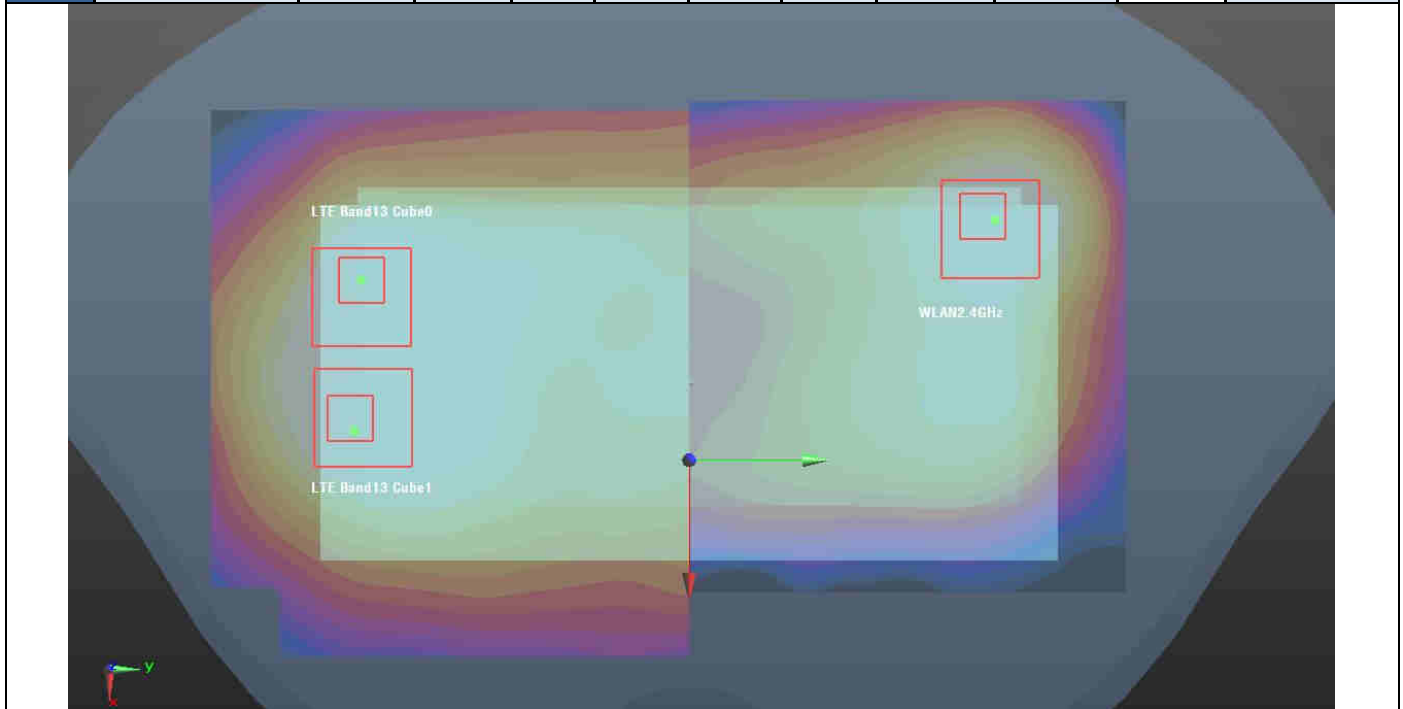


Case #27	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #27	LTE Band 13 Cube 0	Back	0.922	5mm	-22.5	-72	-2.39	144.3	2.20	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 13 Cube 0	Back	0.922	5mm	-22.5	-72	-2.39	121.0	2.20	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	LTE Band 13 Cube 1	Back	0.922	5mm	4.1	-78.3	-2.12	154.3	2.20	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
LTE Band 13 Cube 1	Back	0.922	5mm	4.1	-78.3	-2.12	128.8	2.20	0.03	Not required	
Bluetooth		0.085	5mm	-31	72	-2.48					
WLAN5GHz		1.193	5mm	-16.4	48.8	1.34					

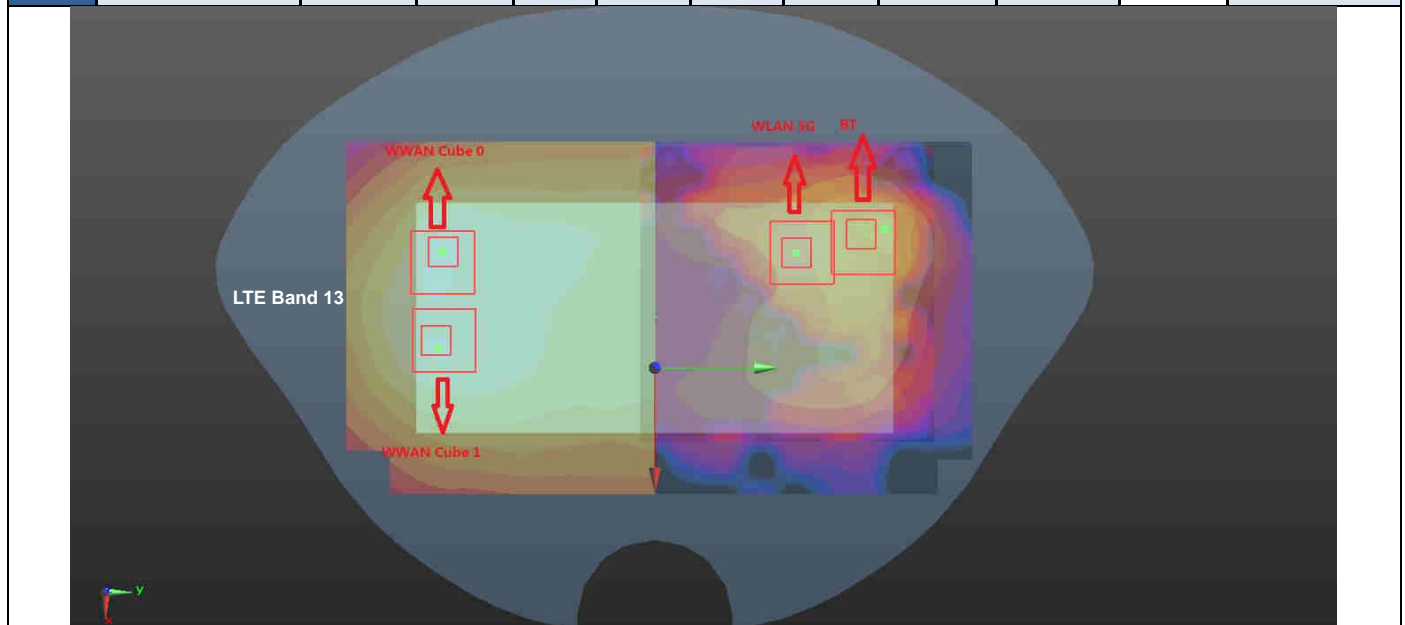

Case #28	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 14	Front	1.151	5mm	-8.9	-78.2	-2.04	159.2	1.94	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

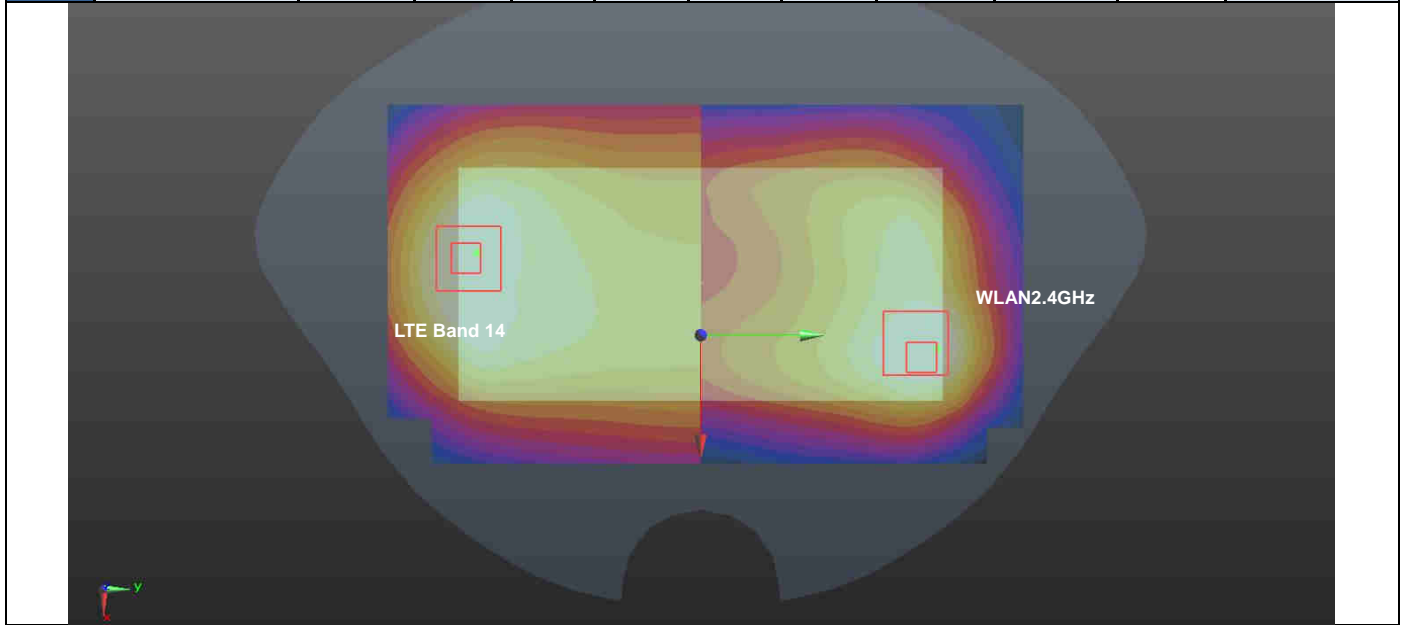


Case #29	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 14 Cube0	Back	1.091	5mm	5	-76.7	-1.96	154.4	1.92	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				
	LTE Band 14 Cube1	Back	1.091	5mm	5.9	-76.8	-1.95	154.7	1.92	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

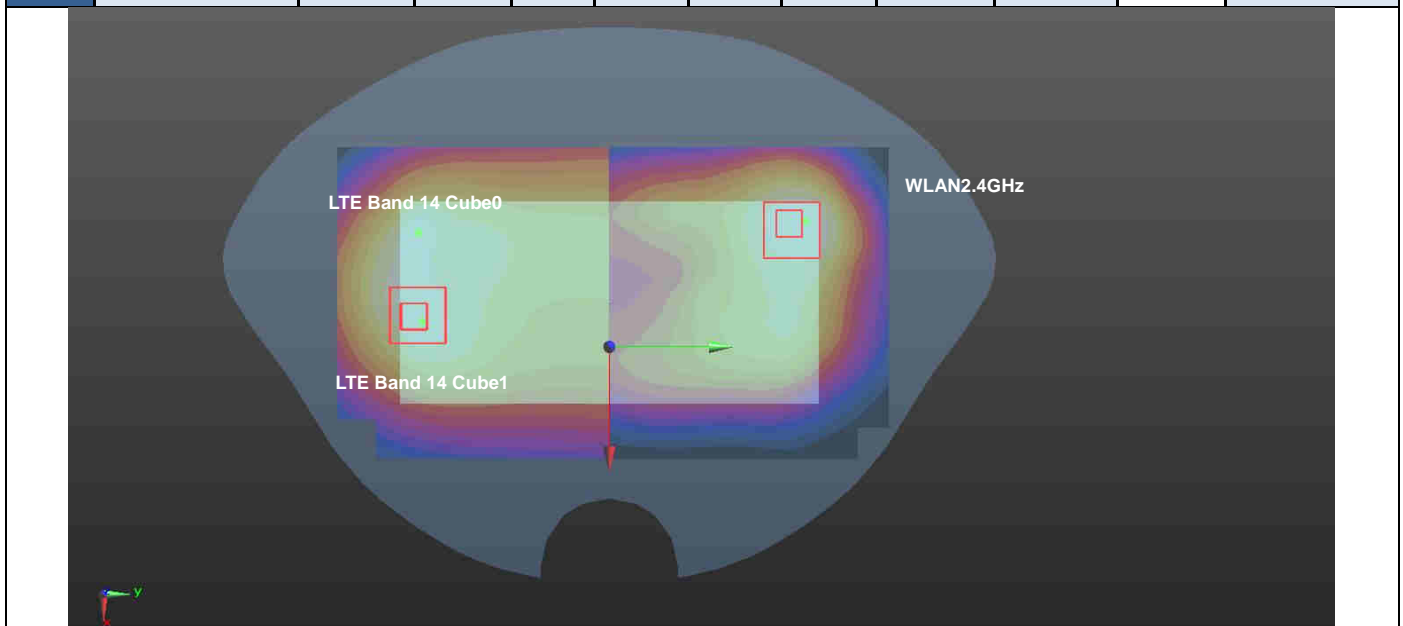





Case #30	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #30	LTE Band 14 Cube 0	Back	1.091	5mm	5	-76.7	-1.96	153.0	2.37	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 14 Cube 0	Back	1.091	5mm	5	-76.7	-1.96	127.4	2.37	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	LTE Band 14 Cube 1	Back	1.091	5mm	5.9	-76.8	-1.95	153.3	2.37	0.02	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 14 Cube 1	Back	1.091	5mm	5.9	-76.8	-1.95	127.6	2.37	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

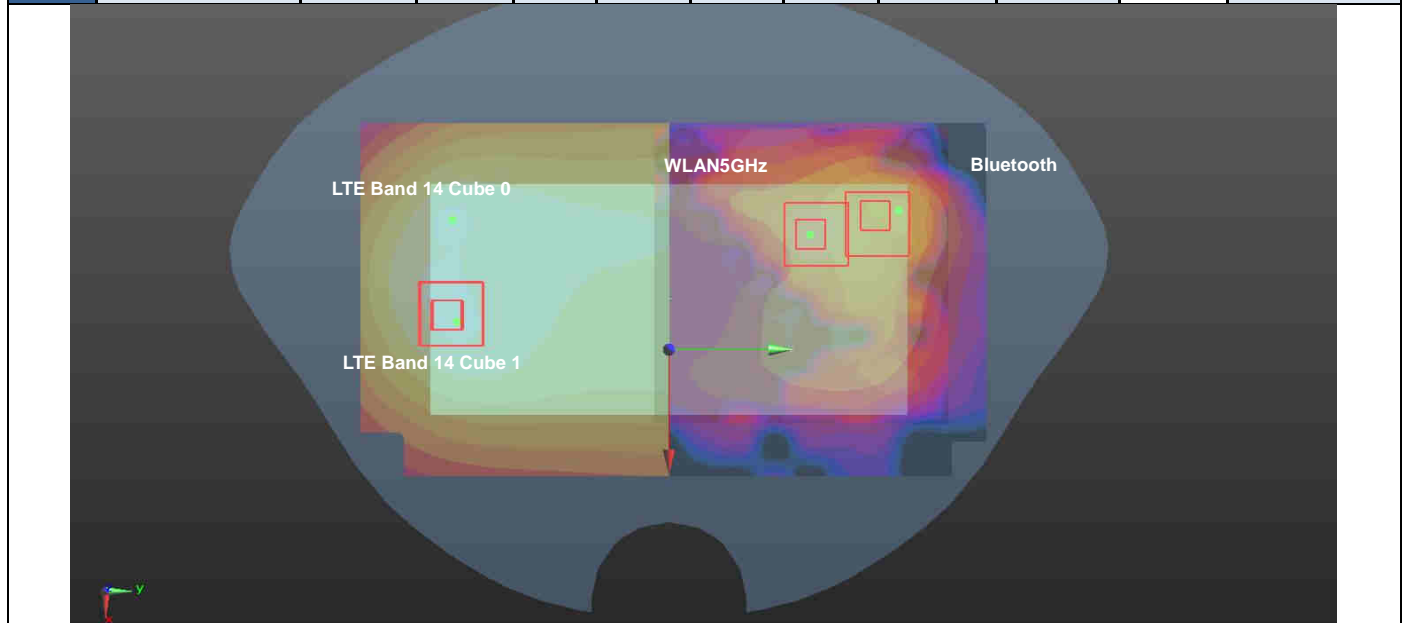


Case #31	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 30	Back	1.254	5mm	26.4	-71	-1.42	155.9	2.08	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

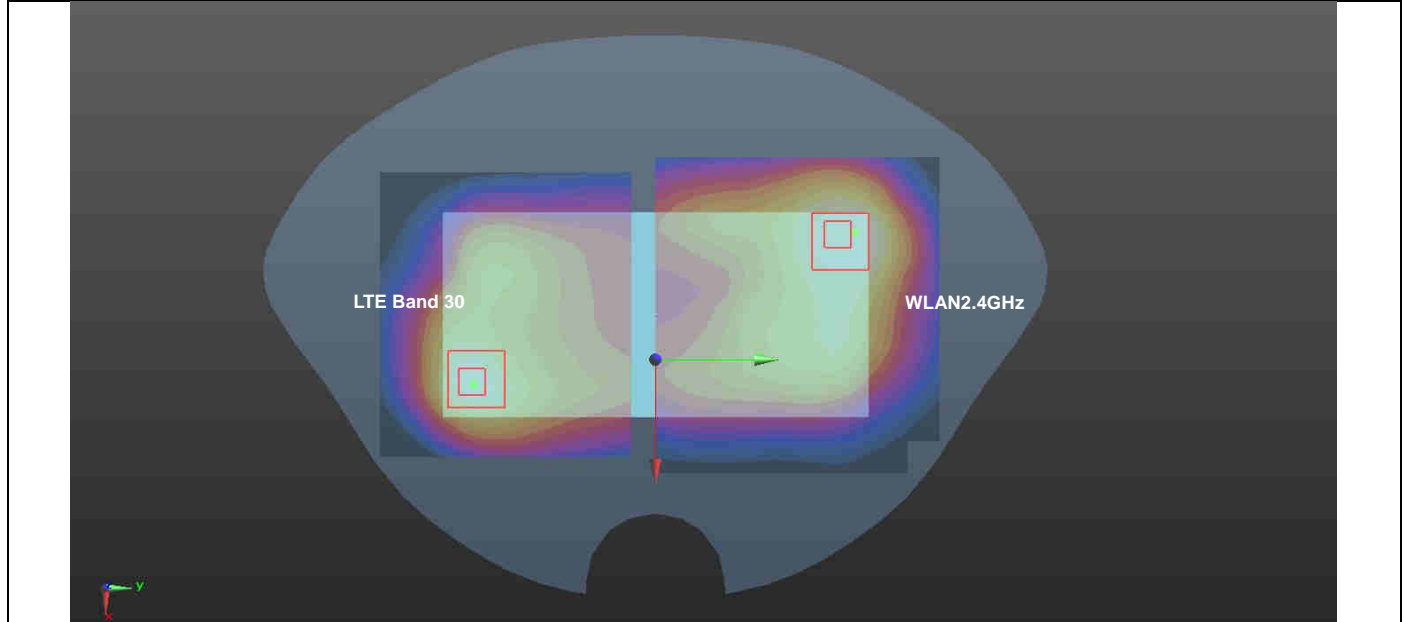


Case #32	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #32	LTE Band 30	Back	1.254	5mm	26.4	-71	-1.42	154.1	2.53	0.03	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
	LTE Band 30	Back	1.254	5mm	26.4	-71	-1.42	127.2	2.53	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

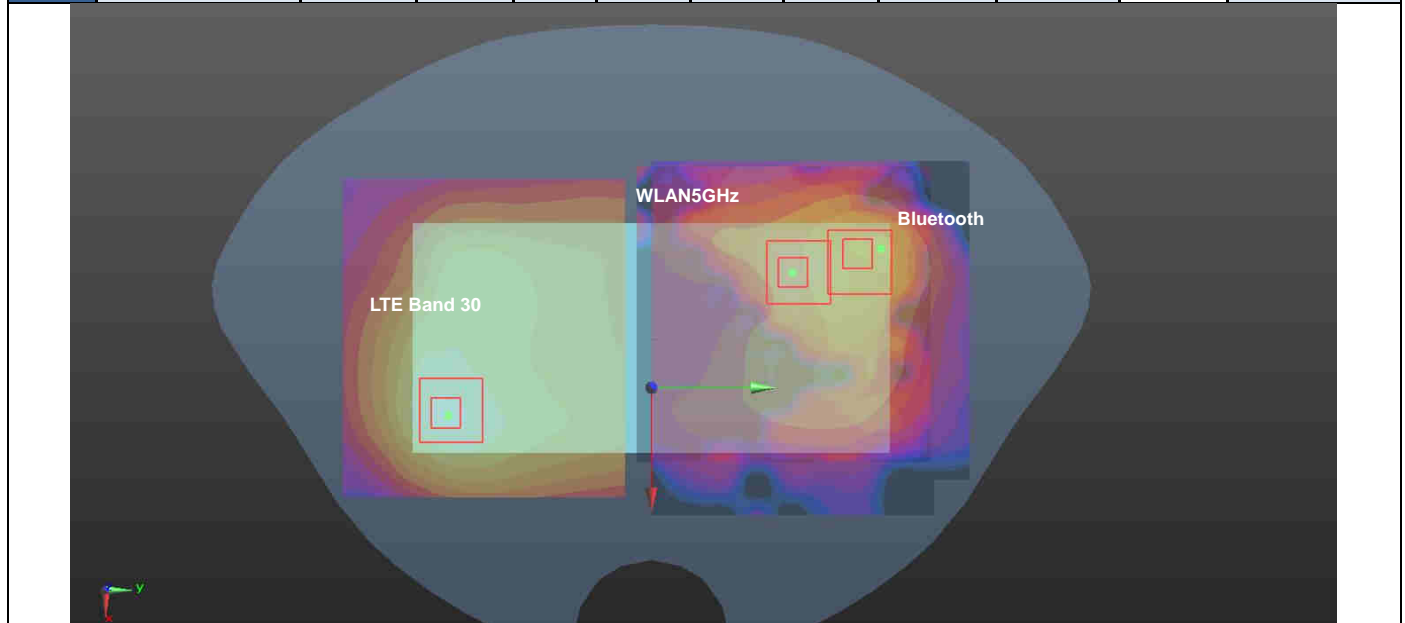


Case #33	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66	Front	1.23	5mm	1.6	-82.4	-1.66	161.4	2.02	0.02	Not required
	WLAN2.4GHz		0.786	5mm	25.6	77.2	-2.03				

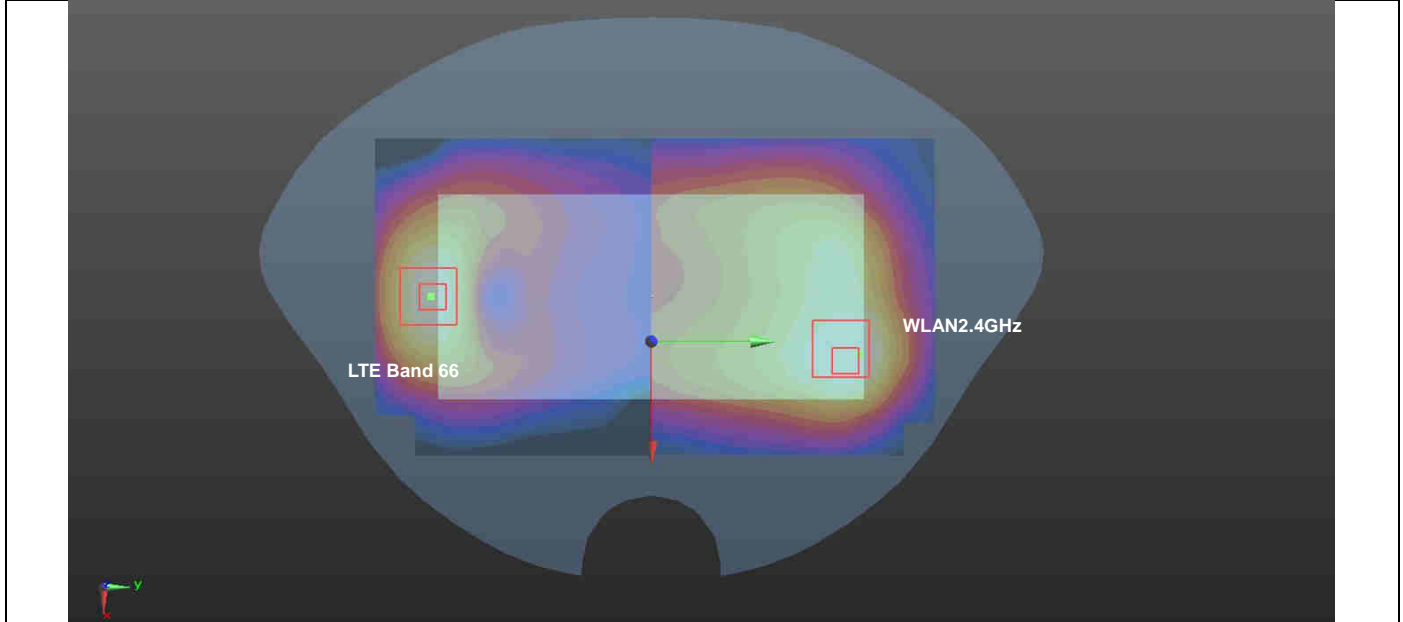


Case #34	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66	Back	1.385	5mm	-10.7	-79.5	-1.77	153.9	2.21	0.02	Not required
	WLAN2.4GHz		0.828	5mm	-34.2	72.6	-2.48				

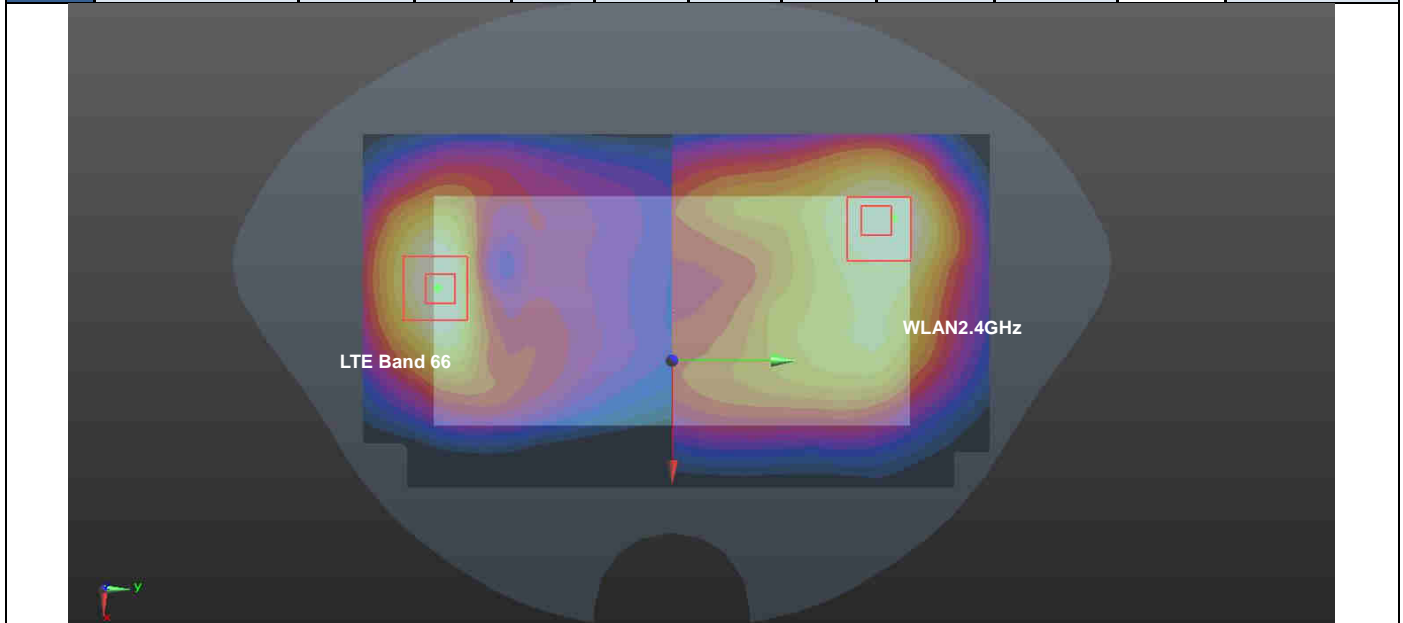


Case #35	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #35	LTE Band 66	Back	1.385	5mm	-10.7	-79.5	-1.77	152.9	2.66	0.03	Not required
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				
	Bluetooth		0.085	5mm	-31	72	-2.48				
Case #35	LTE Band 66	Back	1.385	5mm	-10.7	-79.5	-1.77	128.5	2.66	0.03	Not required
	Bluetooth		0.085	5mm	-31	72	-2.48				
	WLAN5GHz		1.193	5mm	-16.4	48.8	1.34				

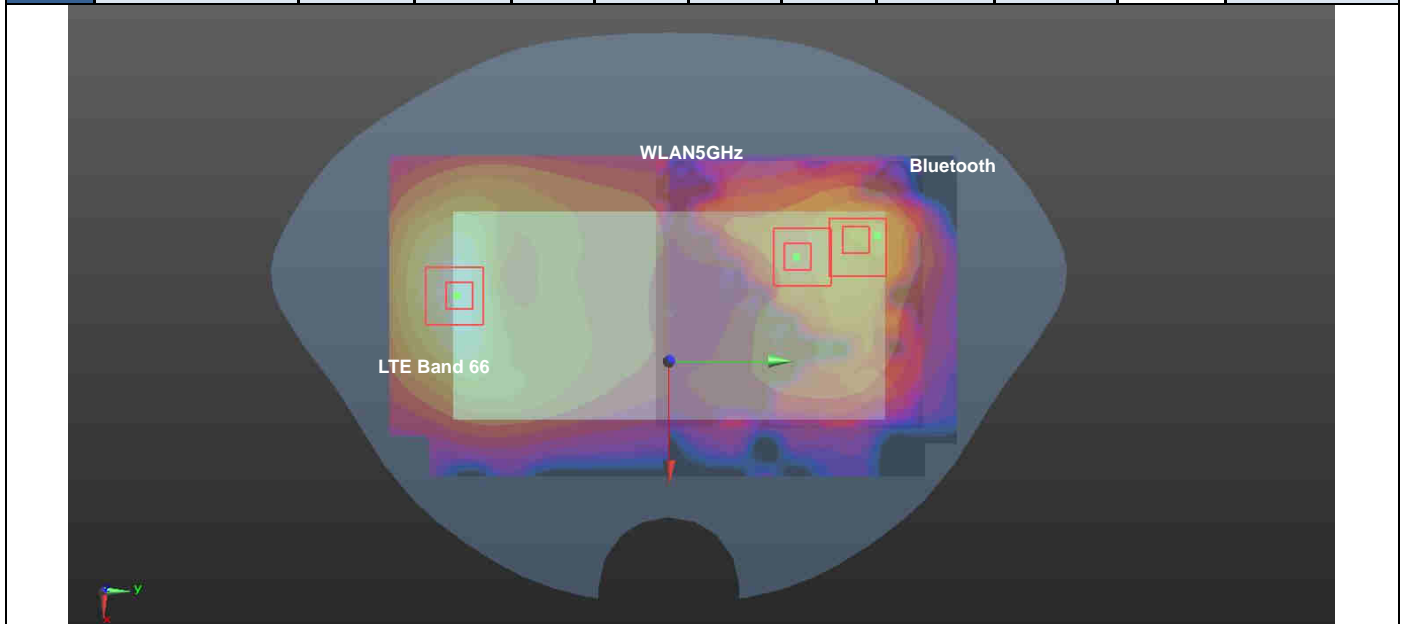


Case #36	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Back	1.871	0mm	6.6	-79.2	-1.1	136.7	4.40	0.07	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

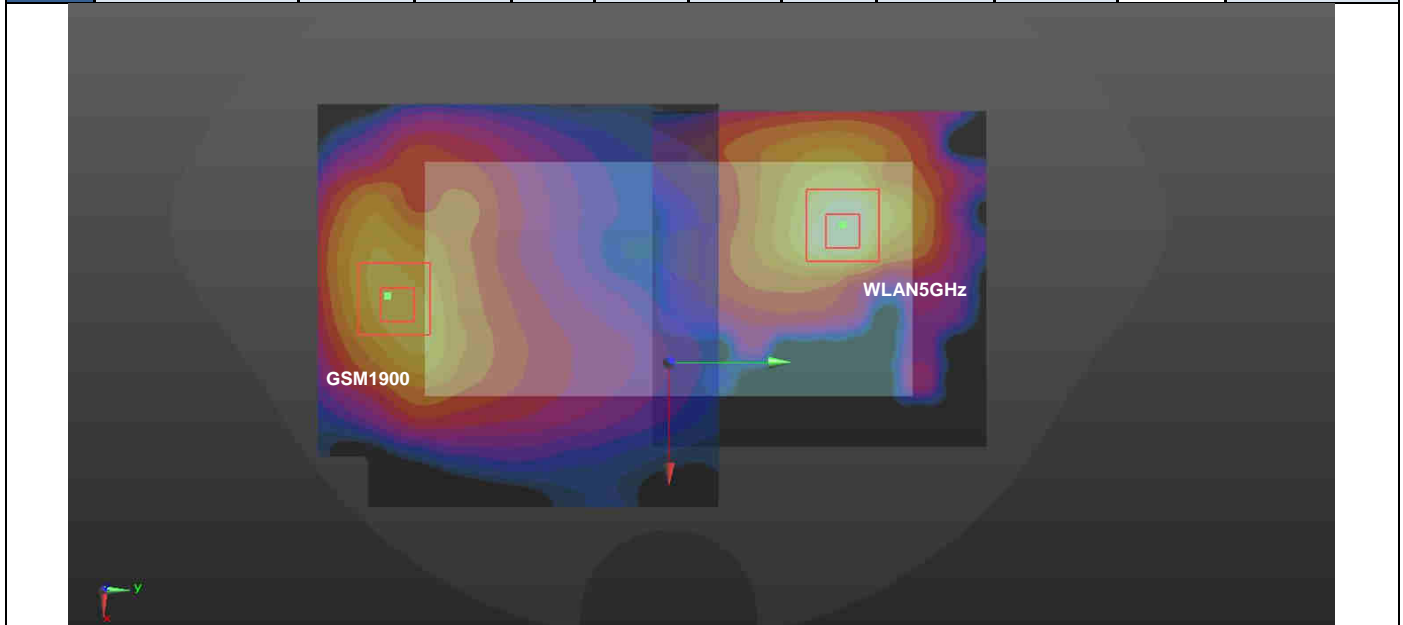


Case #38	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	3.344	0mm	9.5	-82.4	-0.98	140.4	5.87	0.10	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

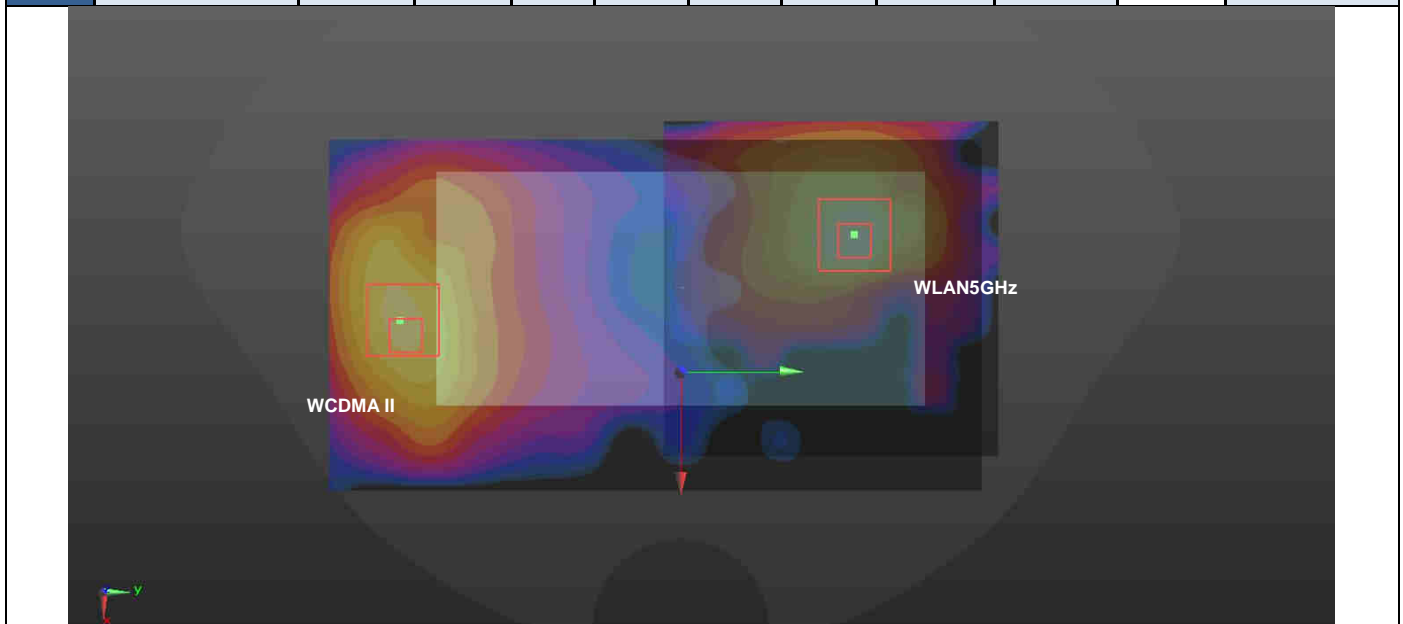


Case #40	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Back	2.389	0mm	15.4	-77.9	-1.41	137.4	4.91	0.08	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

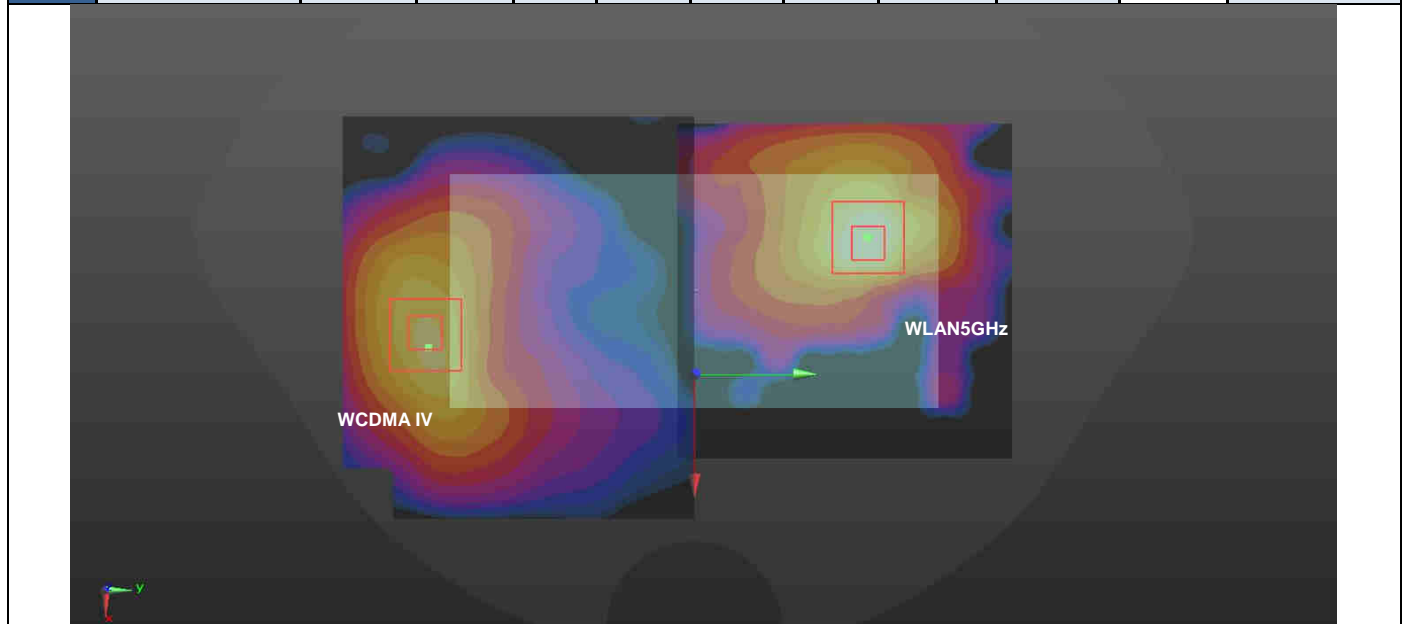

Case #	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #41	WCDMA V Cube0	Back	1.884	0mm	-24.3	-83.9	2.22	139.2	4.41	0.07	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				
	WCDMA V Cube1	Back	1.884	0mm	-21	-83.9	2.28	139.1	4.41	0.07	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

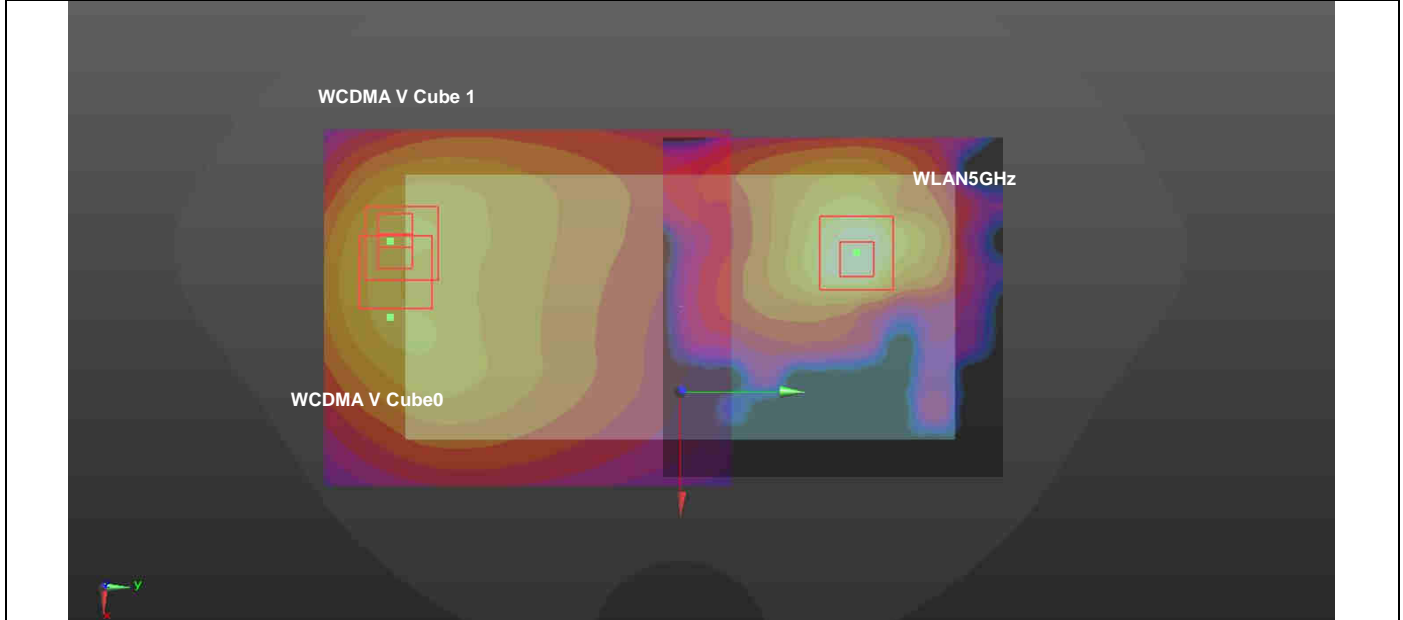


Case #	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #43	LTE Band 2	Back	3.275	0mm	14	-82.4	-1.41	141.4	5.80	0.10	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

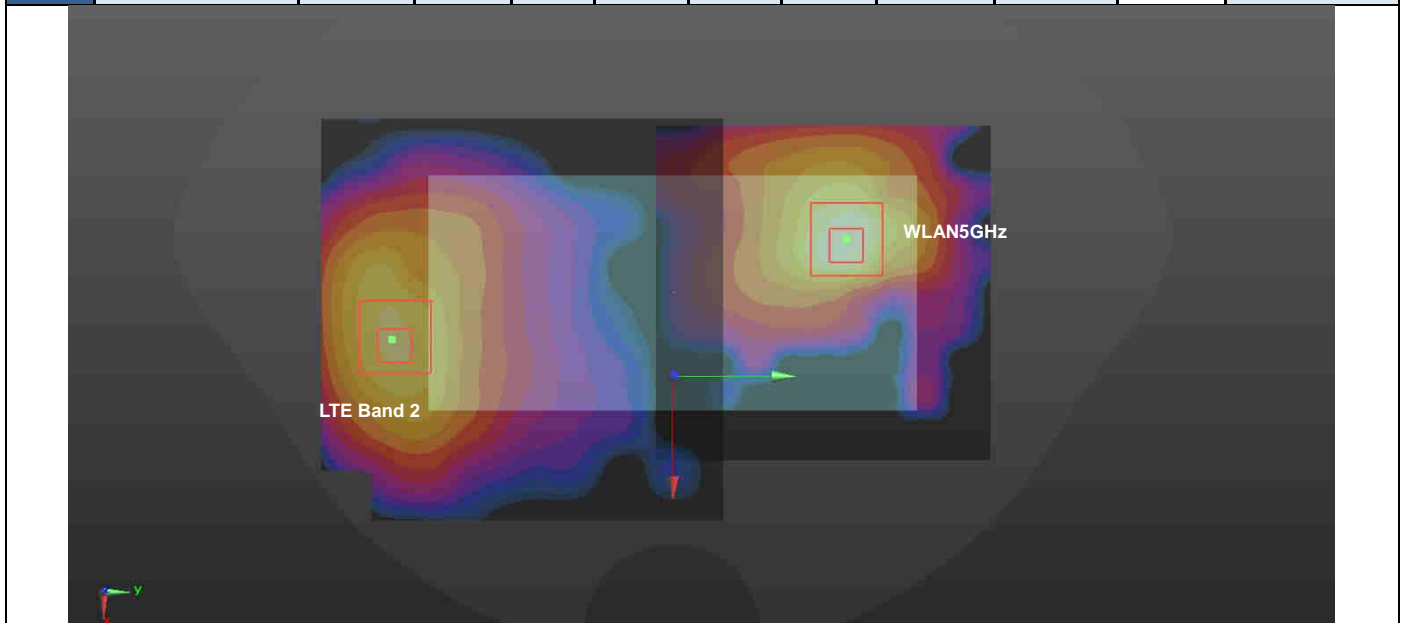





Case #44	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Back	1.656	0mm	-21.1	-83.5	2.11	138.7	4.18	0.06	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

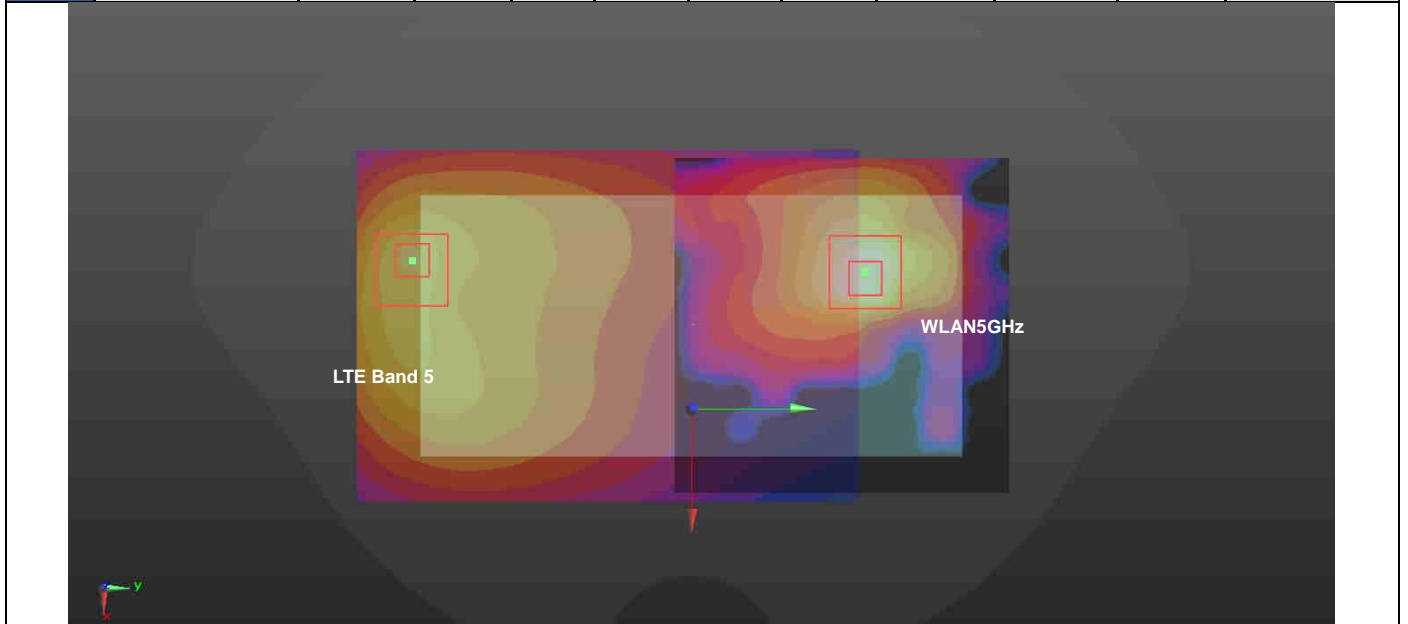


Case #46	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 30	Back	2.731	0mm	29.4	-76.2	-1.27	139.9	5.26	0.09	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

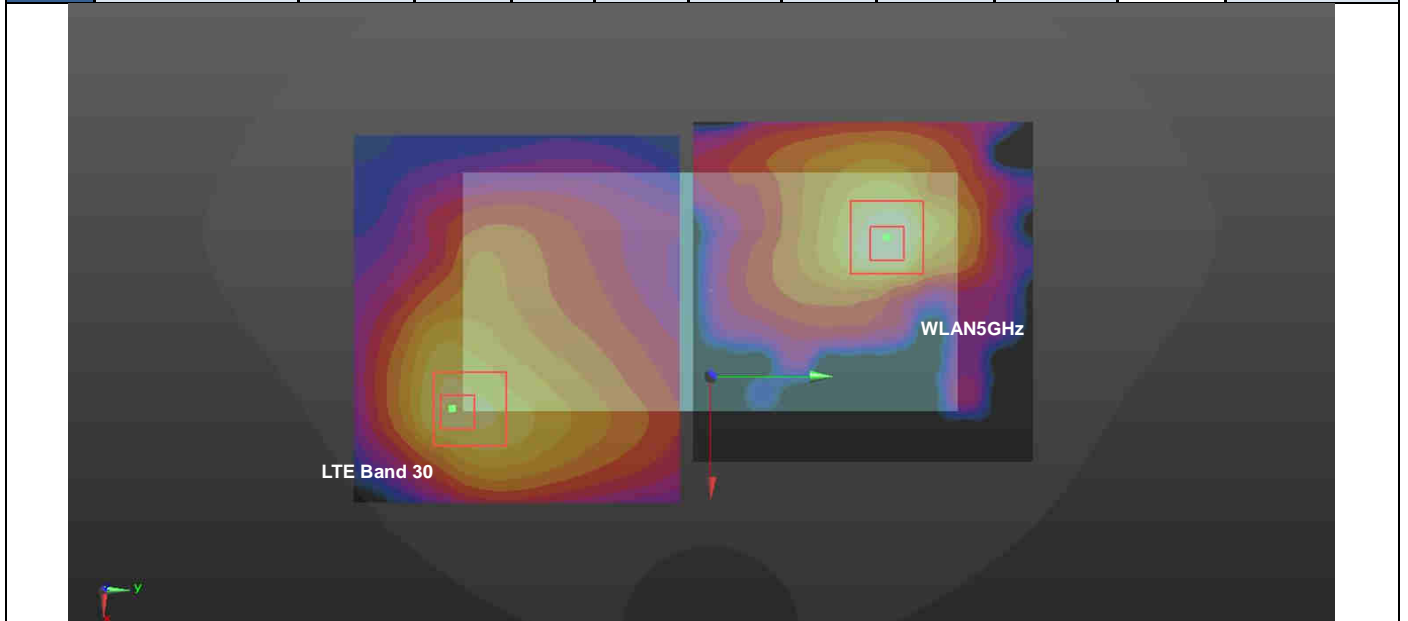


Case #47	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66	Back	1.943	0mm	13.8	-76.5	-1.59	135.6	4.47	0.07	Not required
	WLAN5GHz		2.524	0mm	-18.4	55.2	1.61				

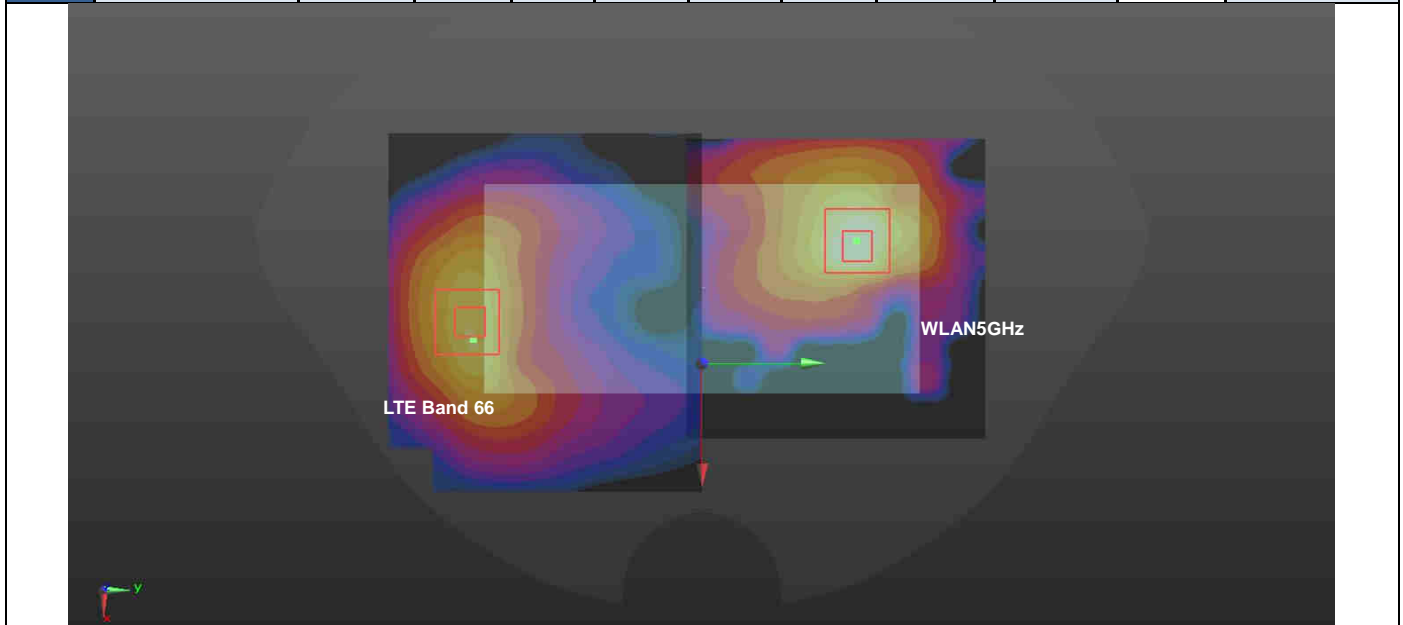


Case #48	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WCDMA II	Back	1.277	19mm	-6.1	-79.9	2.49	132.2	2.41	0.03	Not required
	WLAN5GHz		1.134	19mm	-15	52	1.45				

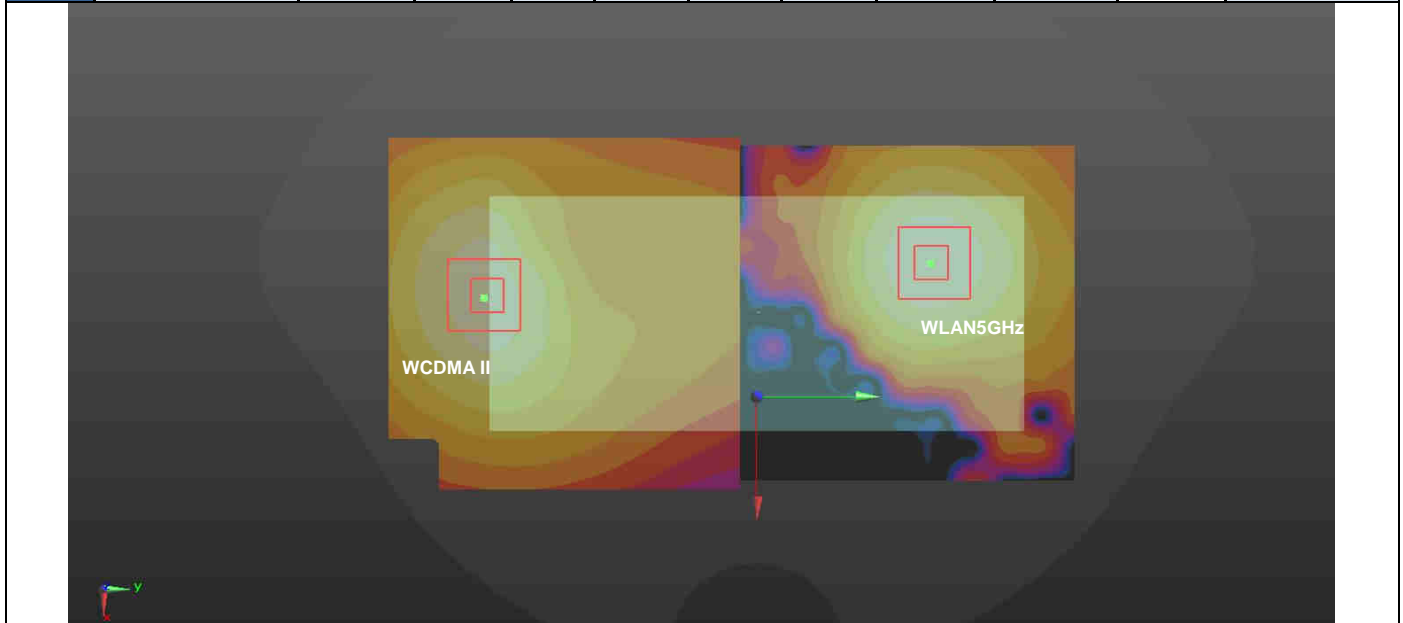


Case #49	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WCDMA IV	Back	1.027	19mm	-9.1	-83	2.27	135.1	2.16	0.02	Not required
	WLAN5GHz		1.134	19mm	-15	52	1.45				

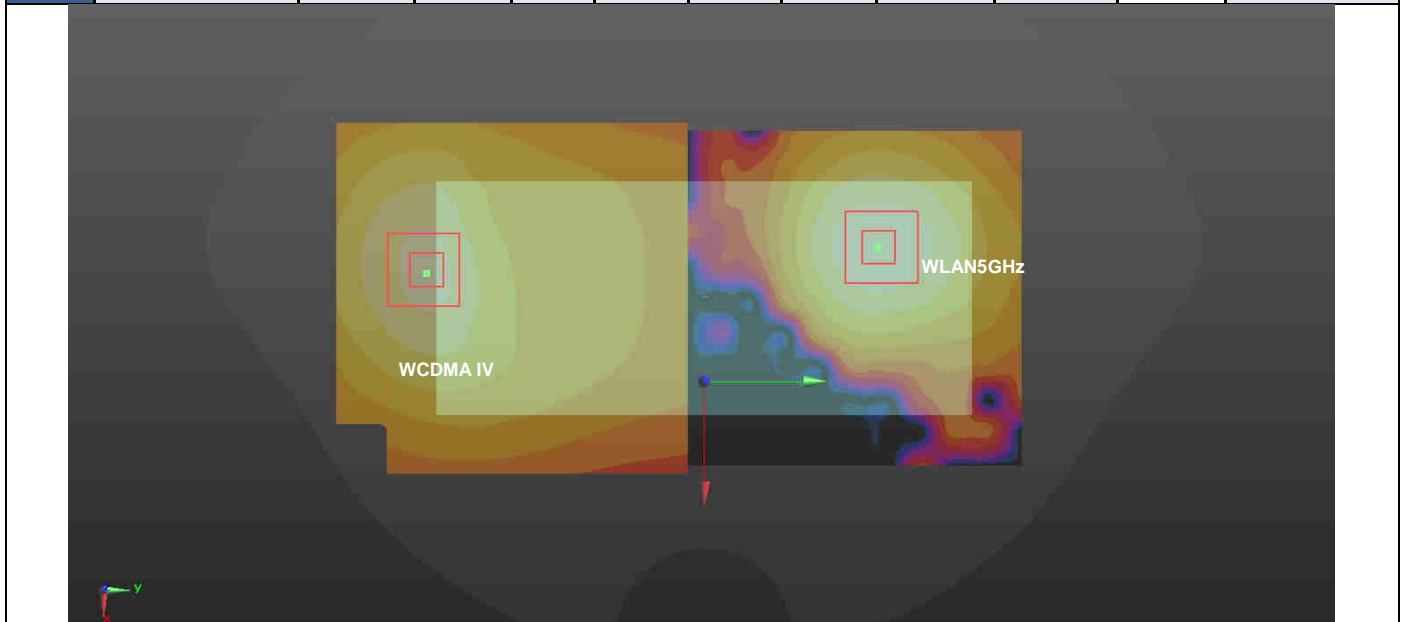

Case #50	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Back	1.192	19mm	-7.6	-81.4	2.28	133.6	2.33	0.03	Not required
	WLAN5GHz		1.134	19mm	-15	52	1.45				

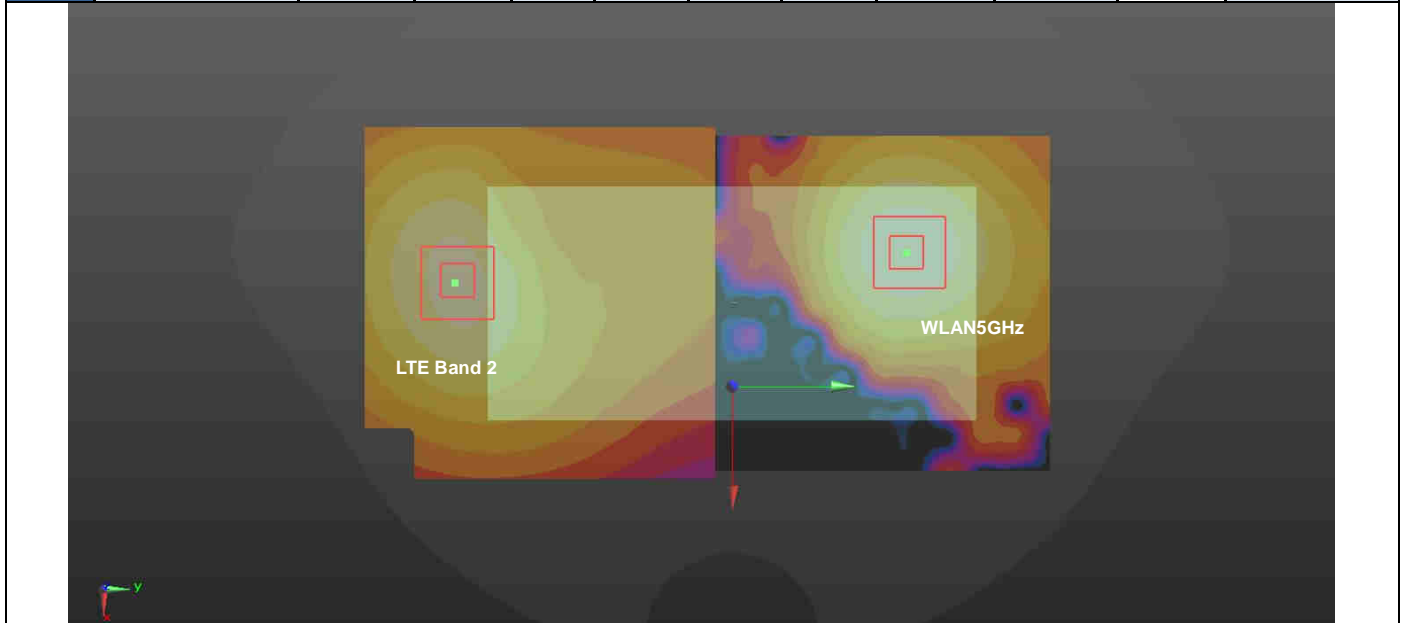

Case #51	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 66	Back	1.033	19mm	-7.5	-83	2.27	135.2	2.17	0.02	Not required
	WLAN5GHz		1.134	19mm	-15	52	1.45				

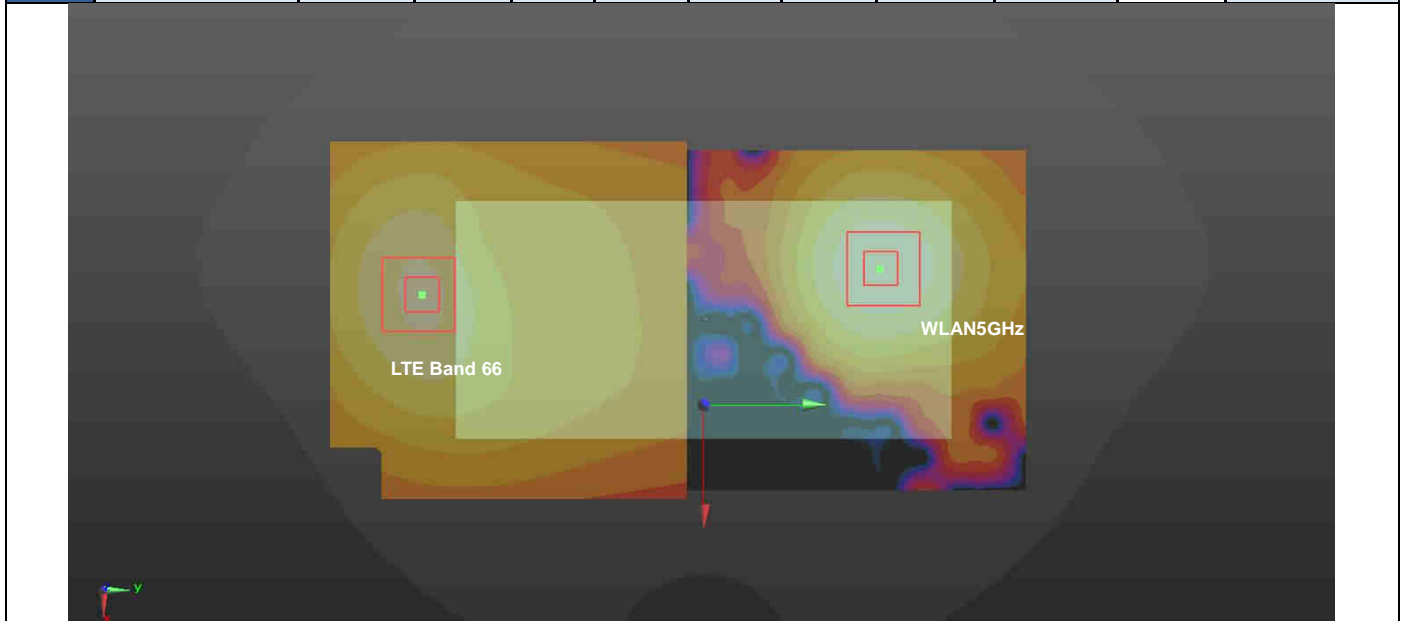

## **16. Supplemental Tuner Tests Results**

### **General Note:**

1. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
2. To evaluate all of the tuner states, the 144 tuner states are divided evenly among bands (except for GSM850/1900, WCDMA Band II/IV, LTE band 2/4/30/66), mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
3. According to workshop 2019, if any single point SAR measurement result is  $> 1.2$  W/kg for a band/exposure condition combination set, all supported tuner states are evaluated with single point SAR measurements for the combination. So we verified the single point SAR that bands with SAR value high than 1.2W/Kg.
4. The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

### **16.1 Supplemental Tuner Head & Body SAR Results**

Please refer to Appendix F.

**Test Engineer** : Nick Hu, Yuan Zhao, Jiaying Chang, Yuankai Kong



## **17. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

## 18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



**Appendix A. Plots of System Performance Check**

The plots are shown as follows.



**System Check\_Head\_750MHz**

**DUT: D750V3 - SN:1087**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL\_750 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.901 \text{ S/m}$ ;  $\epsilon_r = 42.337$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.77, 9.77, 9.77); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $2.72 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $49.41 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $3.23 \text{ W/kg}$

**SAR(1 g) =  $2.18 \text{ W/kg}$ ; SAR(10 g) =  $1.46 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.75 \text{ W/kg}$

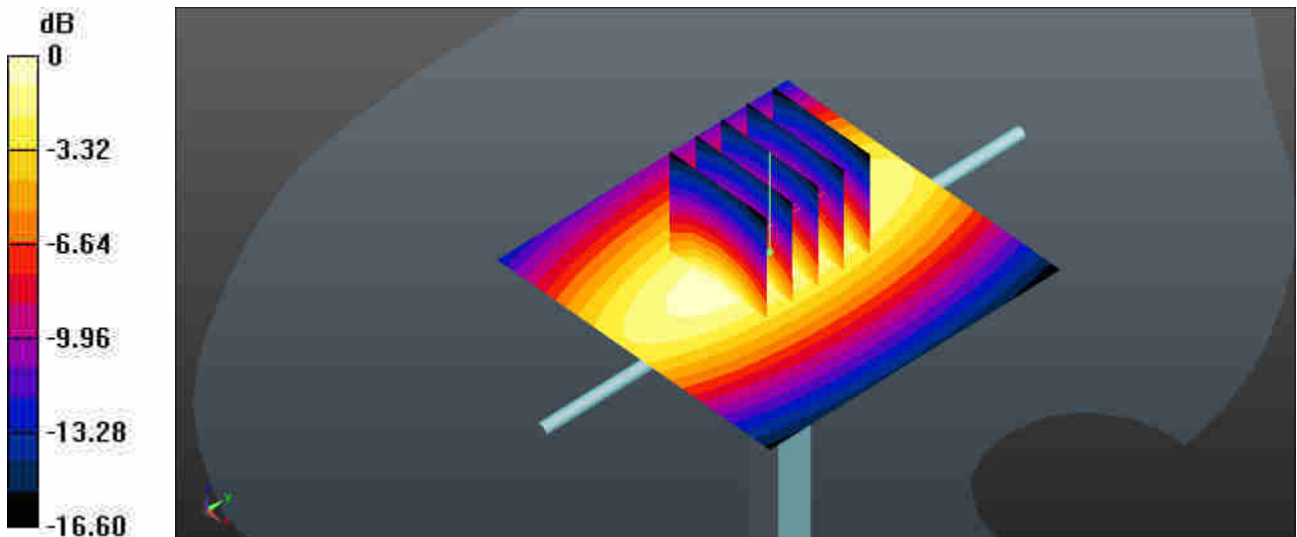

$0 \text{ dB} = 2.72 \text{ W/kg} = 4.35 \text{ dBW/kg}$

**System Check\_Head\_835MHz**

**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.884 \text{ S/m}$ ;  $\epsilon_r = 42.118$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.1 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $3.08 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $59.35 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $3.53 \text{ W/kg}$

**SAR(1 g) =  $2.34 \text{ W/kg}$ ; SAR(10 g) =  $1.53 \text{ W/kg}$**

Maximum value of SAR (measured) =  $3.13 \text{ W/kg}$

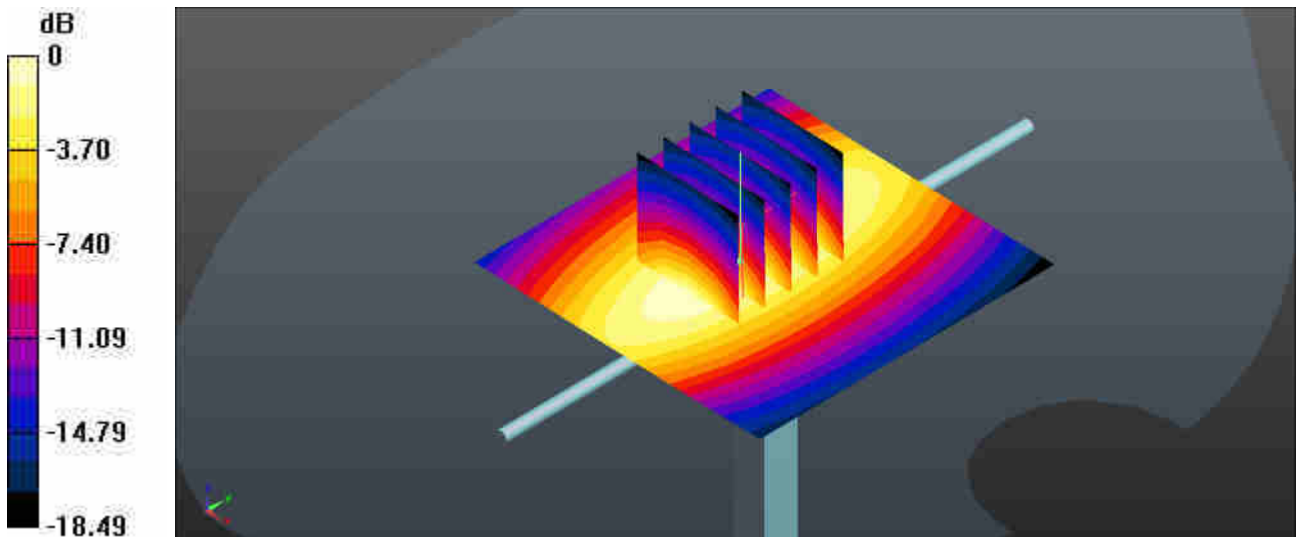

$0 \text{ dB} = 3.08 \text{ W/kg} = 4.89 \text{ dBW/kg}$

**System Check\_Head\_1750MHz**

**DUT: D1750V2 - SN:1090**


Communication System: UID 0, CW (0); Frequency: 1750 MHz;Duty Cycle: 1:1  
 Medium: HSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.055$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.46, 8.46, 8.46); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 14.8 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 101.0 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 17.6 W/kg  
**SAR(1 g) = 9.56 W/kg; SAR(10 g) = 5.07 W/kg**  
 Maximum value of SAR (measured) = 14.7 W/kg

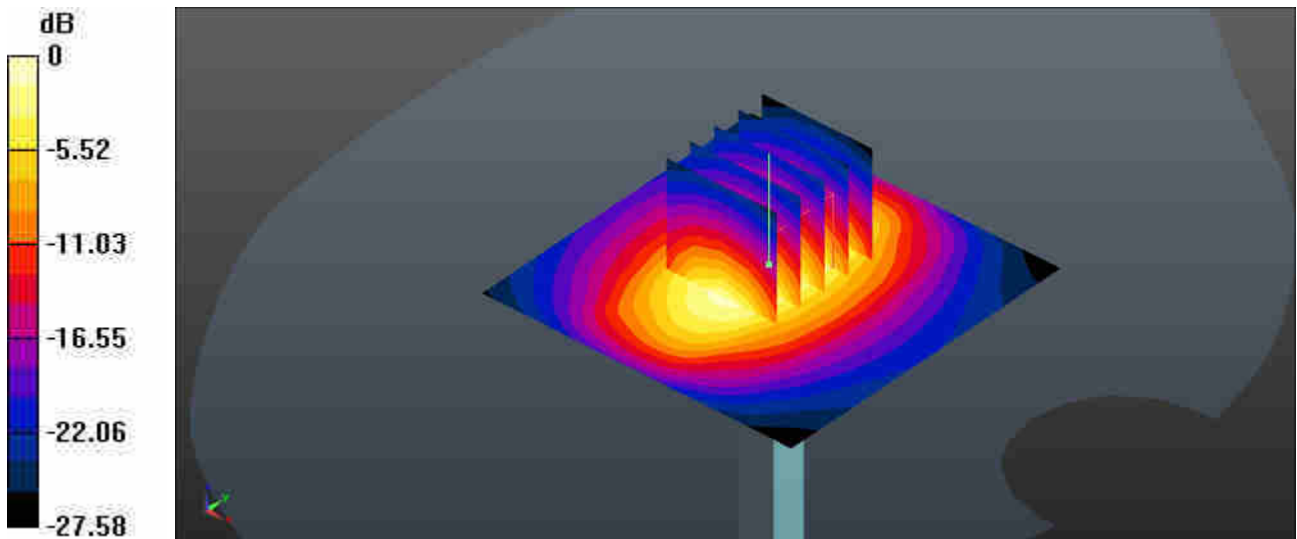

0 dB = 14.8 W/kg = 11.70 dBW/kg

**System Check\_Head\_1900MHz**

**DUT: D1900V2 - SN:5d170**


Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1  
 Medium: HSL\_1900 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.392 \text{ S/m}$ ;  $\epsilon_r = 38.174$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.10, 8.10, 8.10); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $14.8 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $85.22 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $19.0 \text{ W/kg}$   
**SAR(1 g) =  $9.94 \text{ W/kg}$ ; SAR(10 g) =  $5.07 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $14.5 \text{ W/kg}$

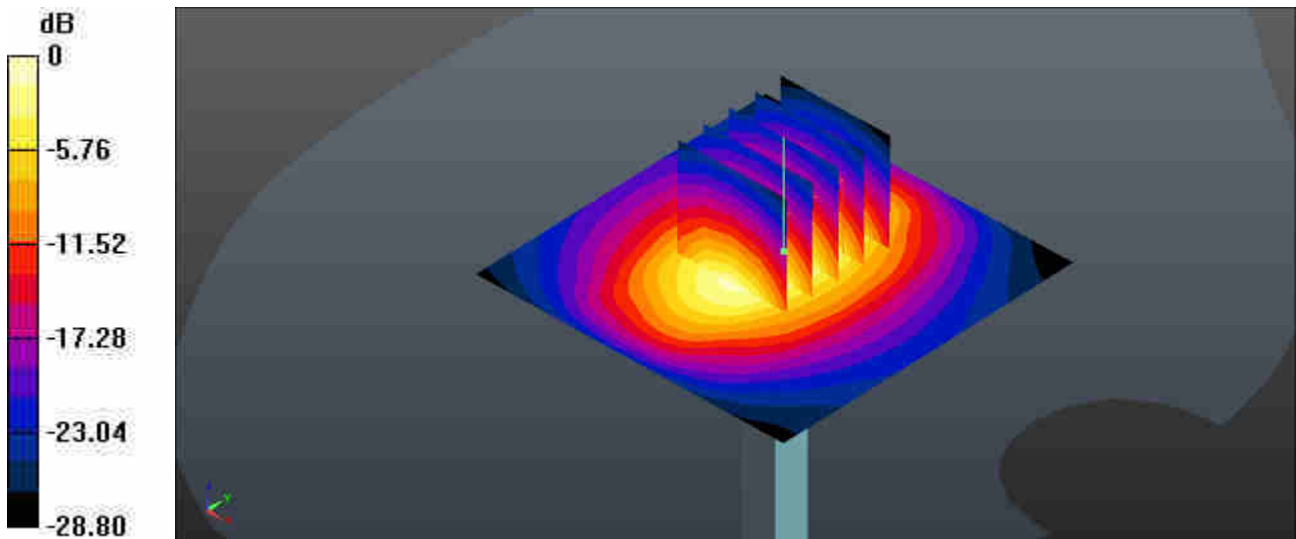

0 dB =  $14.8 \text{ W/kg} = 11.70 \text{ dBW/kg}$

**System Check\_Head\_2300MHz**

**DUT: D2300V2 - SN:1055**


Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1  
 Medium: HSL\_2300 Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.718$  S/m;  $\epsilon_r = 39.874$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.88, 7.88, 7.88); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 19.9 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 78.44 V/m; Power Drift = 0.08 dB  
 Peak SAR (extrapolated) = 25.7 W/kg  
**SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.86 W/kg**  
 Maximum value of SAR (measured) = 19.1 W/kg

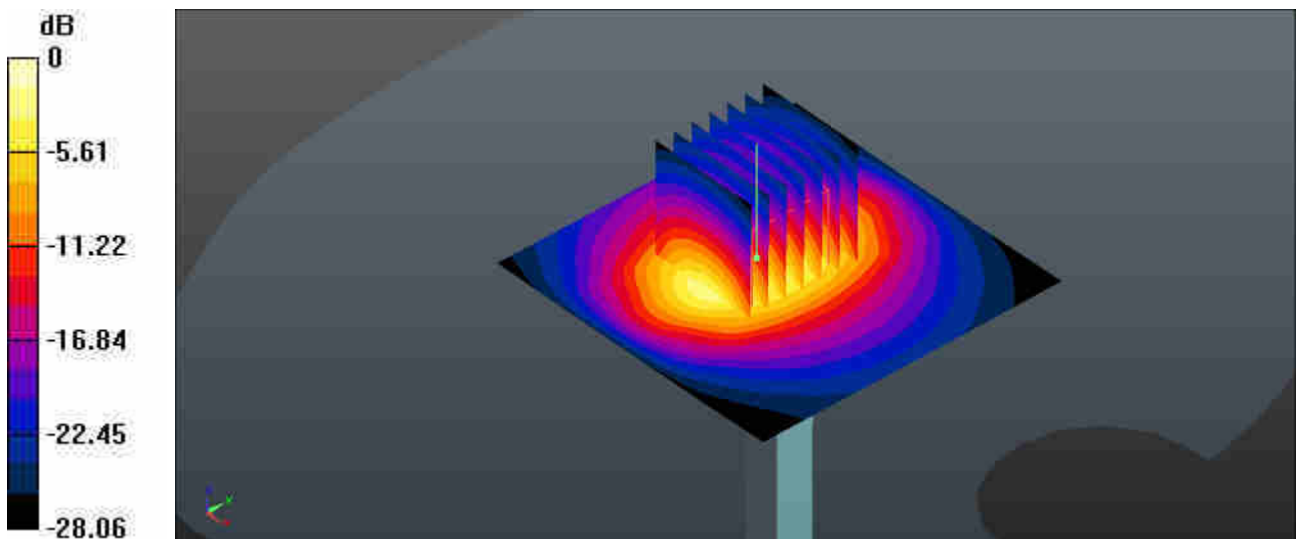

0 dB = 19.9 W/kg = 12.99 dBW/kg

**System Check\_Head\_2450MHz**

**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.89$  S/m;  $\epsilon_r = 39.24$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.50, 7.50, 7.50); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.1 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.10 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 25.3 W/kg

**SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.56 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

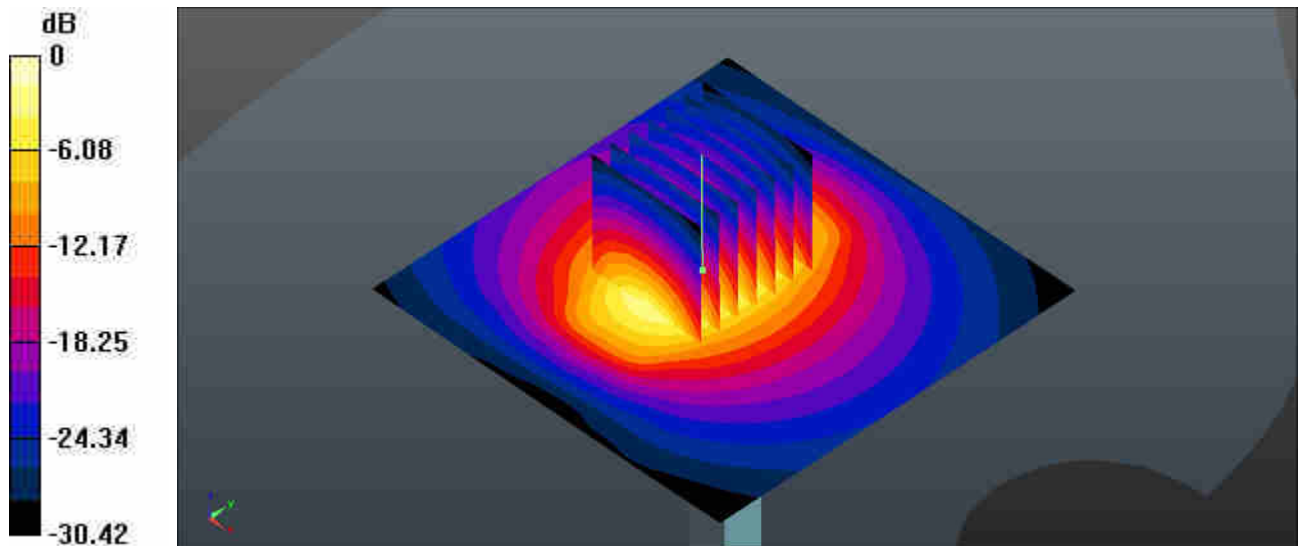

0 dB = 19.1 W/kg = 12.81 dBW/kg

### System Check\_Head\_5250MHz

**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: HSL\_5000 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.595$  S/m;  $\epsilon_r = 36.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.19, 5.19, 5.19); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: 1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.7 W/kg


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.59 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 29.7 W/kg

**SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.32 W/kg**

Maximum value of SAR (measured) = 18.0 W/kg

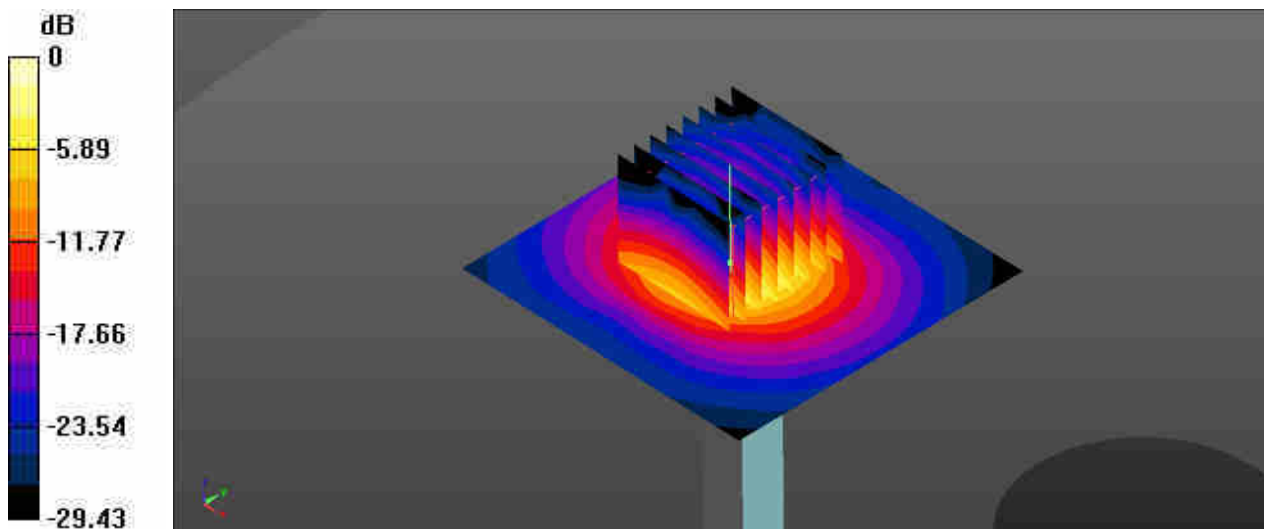

0 dB = 18.7 W/kg = 12.72 dBW/kg



### System Check\_Head\_5600MHz

**DUT: D5GHzV2 - SN:1113**


Communication System: UID 0, CW (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
Medium: HSL\_5000 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.986$  S/m;  $\epsilon_r = 35.822$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.92, 4.92, 4.92); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: 1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 21.0 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 43.06 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 33.4 W/kg  
**SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.38 W/kg**  
Maximum value of SAR (measured) = 19.3 W/kg

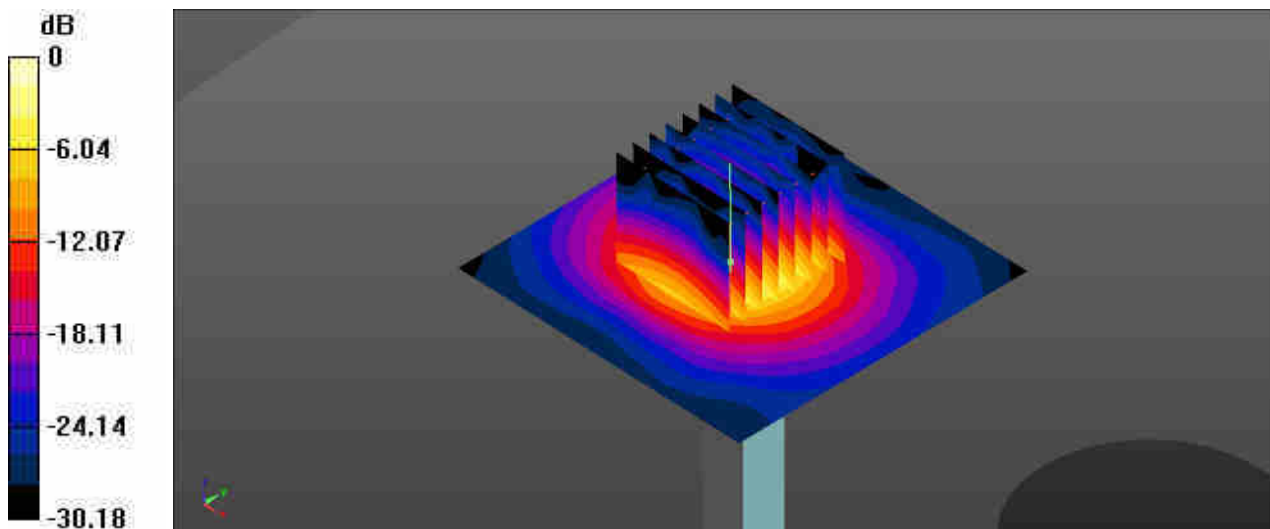

0 dB = 21.0 W/kg = 13.22 dBW/kg



### System Check\_Head\_5750MHz

**DUT: D5GHzV2 - SN:1113**


Communication System: UID 0, CW (0); Frequency: 5750 MHz;Duty Cycle: 1:1  
Medium: HSL\_5000 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.16$  S/m;  $\epsilon_r = 35.569$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.17, 5.17, 5.17); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: 1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 18.5 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 39.34 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 31.9 W/kg  
**SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.18 W/kg**  
Maximum value of SAR (measured) = 17.7 W/kg

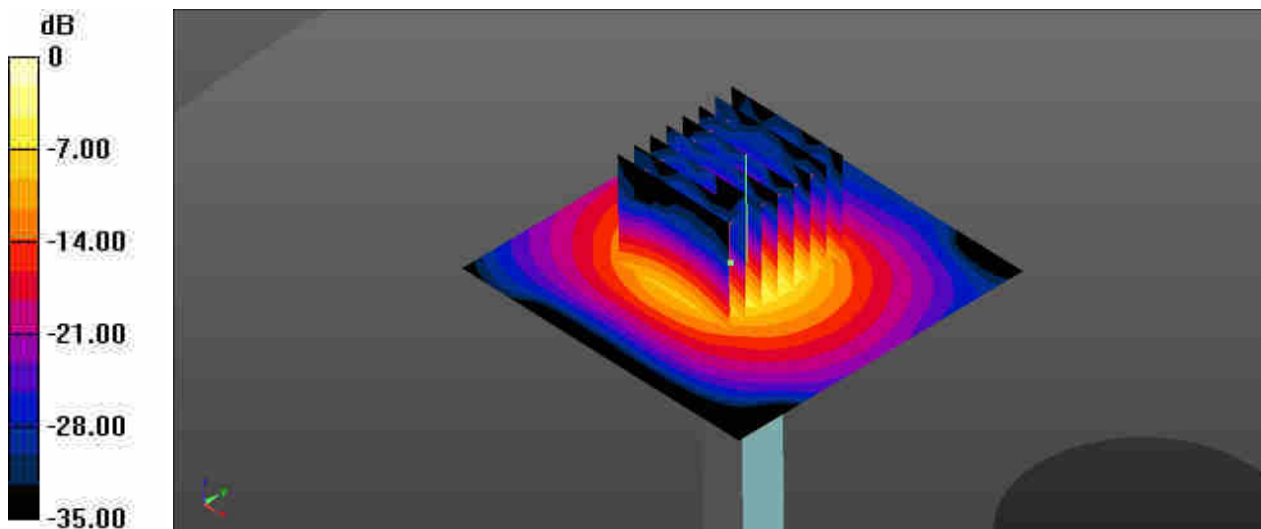

0 dB = 18.5 W/kg = 12.67 dBW/kg



**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.