



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2067-1
FCC ID : IHDT56YR1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 18, 2020 and testing was completed on Apr. 20, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 6
1.5 Modification of EUT 6
1.6 Specification of Accessory..... 7
1.7 Testing Location 9
1.8 Test Software..... 9
1.9 Applicable Standards..... 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Carrier Frequency and Channel 10
2.2 Test Mode 11
2.3 Connection Diagram of Test System 12
2.4 Support Unit used in test configuration and system 13
2.5 EUT Operation Test Setup 13
2.6 Measurement Results Explanation Example..... 13
3 TEST RESULT 14
3.1 6dB Bandwidth Measurement 14
3.2 Output Power Measurement..... 16
3.3 Power Spectral Density Measurement 17
3.4 Conducted Band Edges and Spurious Emission Measurement 19
3.5 Radiated Band Edges and Spurious Emission Measurement 37
3.6 AC Conducted Emission Measurement..... 41
3.7 Antenna Requirements 43
4 LIST OF MEASURING EQUIPMENT 44
5 UNCERTAINTY OF EVALUATION 45
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX D. DUTY CYCLE PLOTS
APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR011801C	Rev. 01	Initial issue of report	Apr. 22, 2020



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.20 dB at 4824.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.66 dB at 0.199 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2067-1
FCC ID	IHDT56YR1
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conduction: 351643110015619/351643110015627 Radiation: 351643110025071/351643110025089 Conducted: 351643110017052/351643110017060
HW Version	DVT2
SW Version	QPI30.56
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the sample 1 is dual SIM slot and the sample 2 is single SIM slot. According to the difference, we evaluate the sample 1 to perform test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.39 dBm (0.1377 W) 802.11g : 22.92 dBm (0.1959 W) 802.11n HT20 : 22.36 dBm (0.1722 W)
Antenna Type / Gain	PIFA Antenna type with gain -1.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	SC-53UK
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	SC-55AU
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3 (Chile)	Brand Name	Motorola(Salom)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3(BR)	Brand Name	Motorola(Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3 (BR Local Build)	Brand Name	Motorola(Flex/Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 4(IN)	Brand Name	Motorola(Salom)	Model Name	SC-54
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 4 (IN Local Build)	Brand Name	Motorola(Axiom/Salom)	Model Name	SC-54
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 5 (BR Local Build)	Brand Name	Motorola(Cliptech/Tenpao)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA , O/P: 5/9/12Vdc, 3000/2000/1500mA		
Battery	Brand Name	Motorola	Model Name	LG50
	Power Rating	3.8Vdc, 5000mAh	Type	Li-ion



Earphone 1	Brand Name	Motorola(Lianyun)	Model Name	MI181(SH38C37773)
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core		
Earphone 2	Brand Name	Motorola(Cosonic)	Model Name	MI181(SH38C44959)
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core		
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18C24367
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name	SC18C24368
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable1(Charging from Adapter 1) + Earphone 1 for Sample 1
Remark: For Radiated Test Cases, The tests were performed with Adapter 1, USB Cable 1 and Earphone1.	

2.3 Connection Diagram of Test System

For Radiation

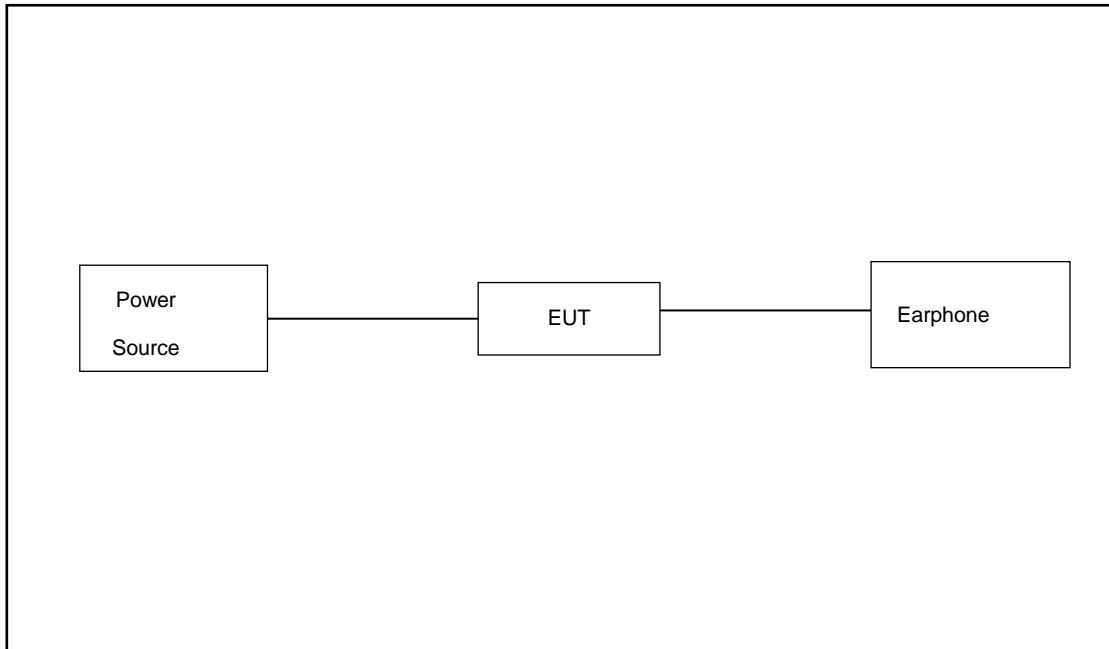

For Conducted Emission

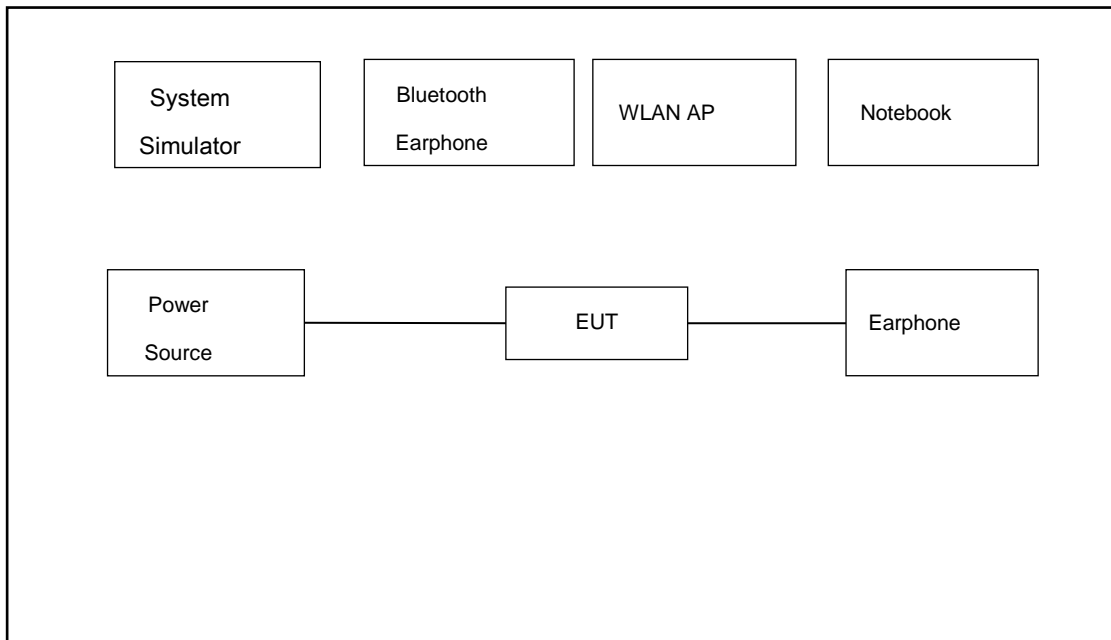



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 5.40 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 5.40 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

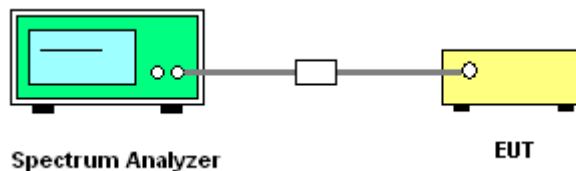



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

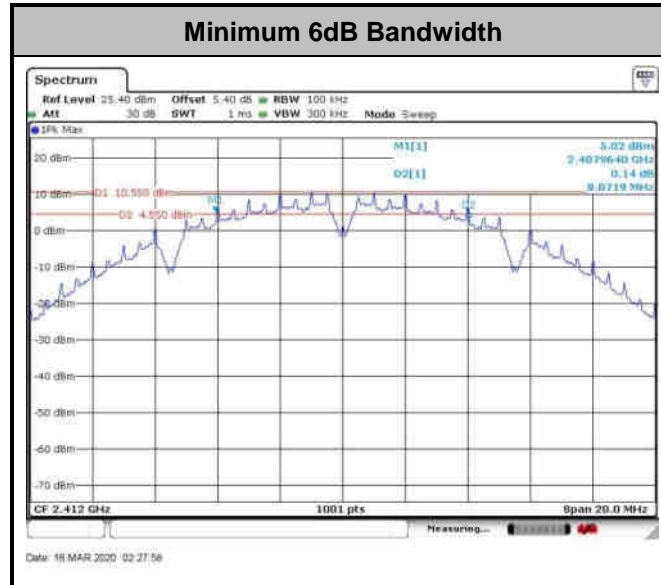

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

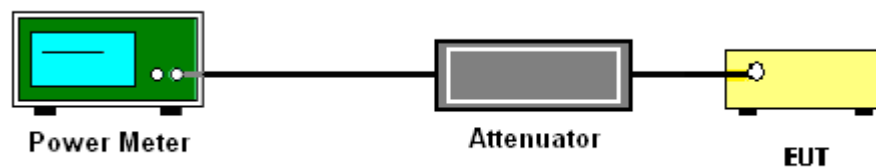

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

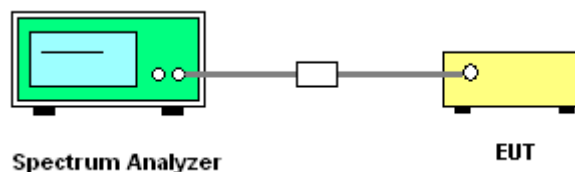



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

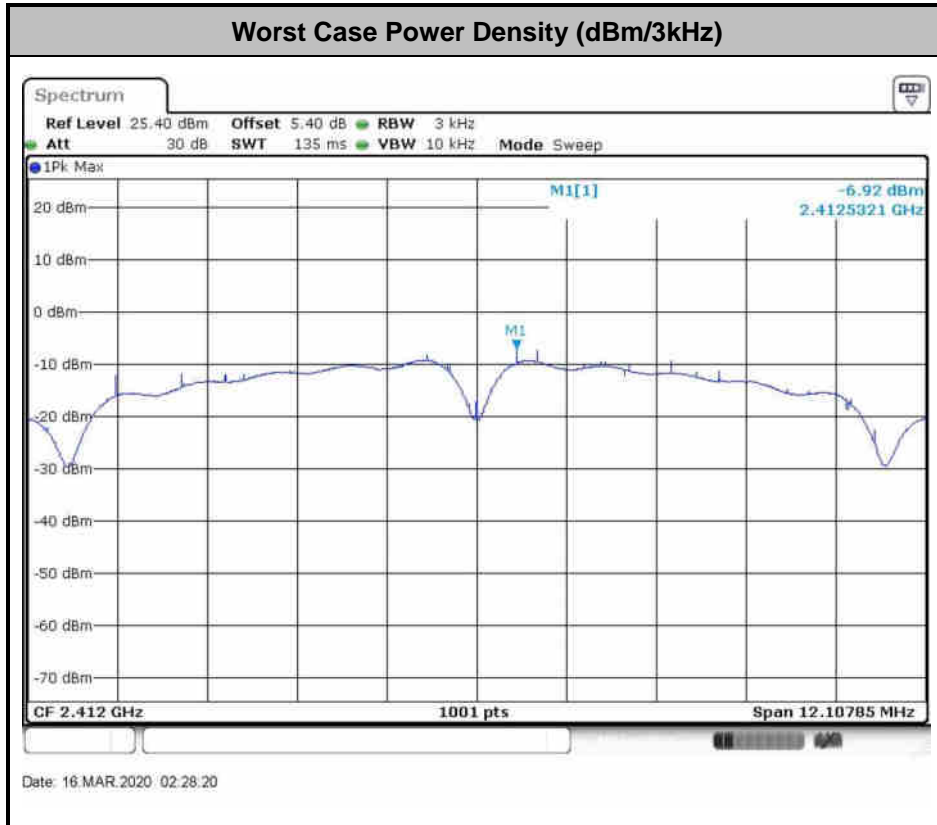

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup


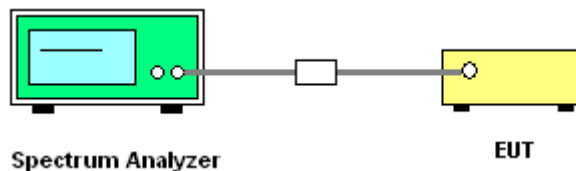




3.4.5 Test Result of Conducted Band Edges and Spurious Emission



Test Engineer : Lex Wu	Temperature :	21~25°C
	Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

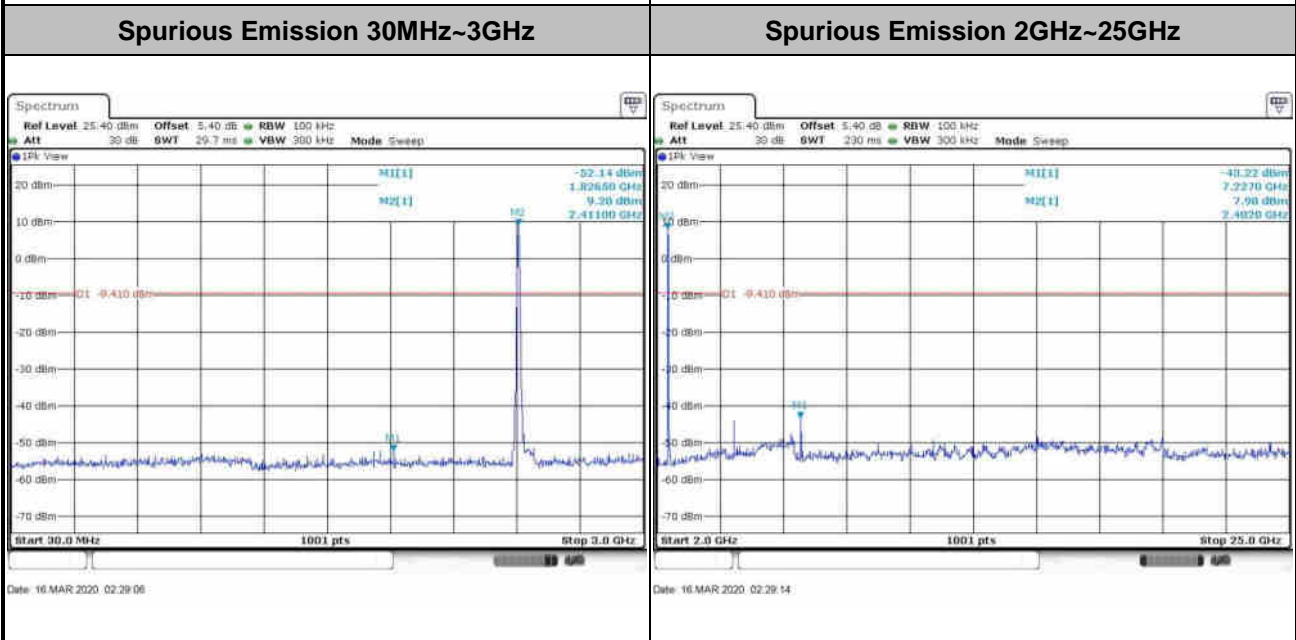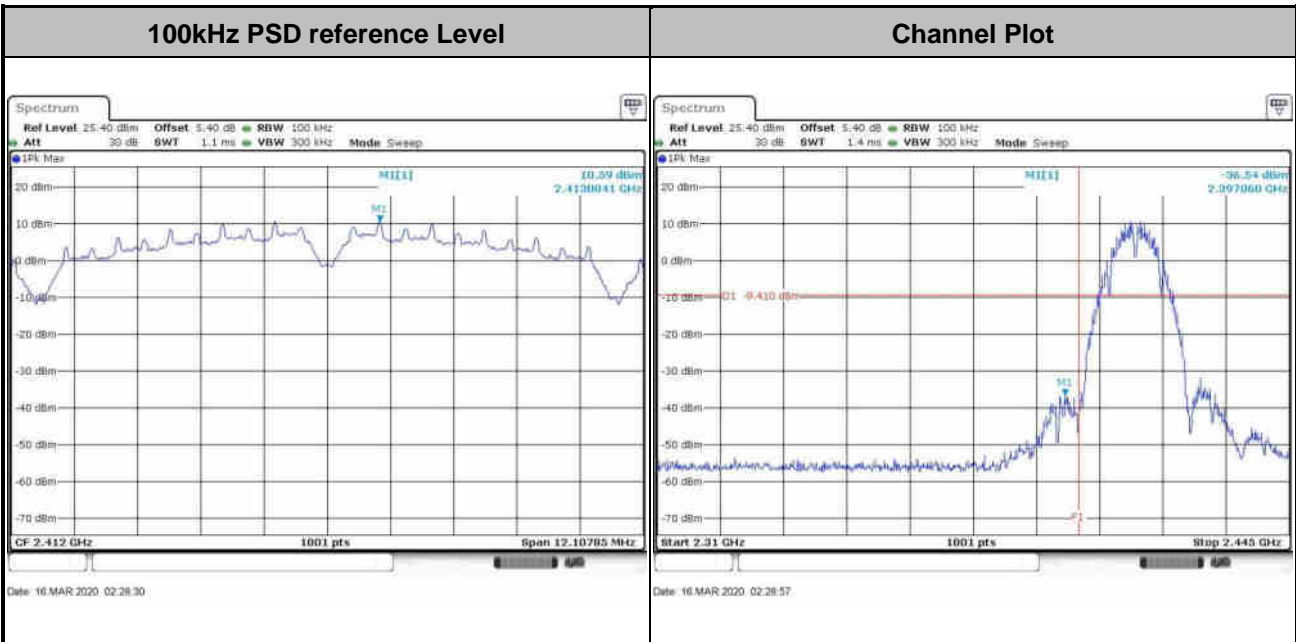





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

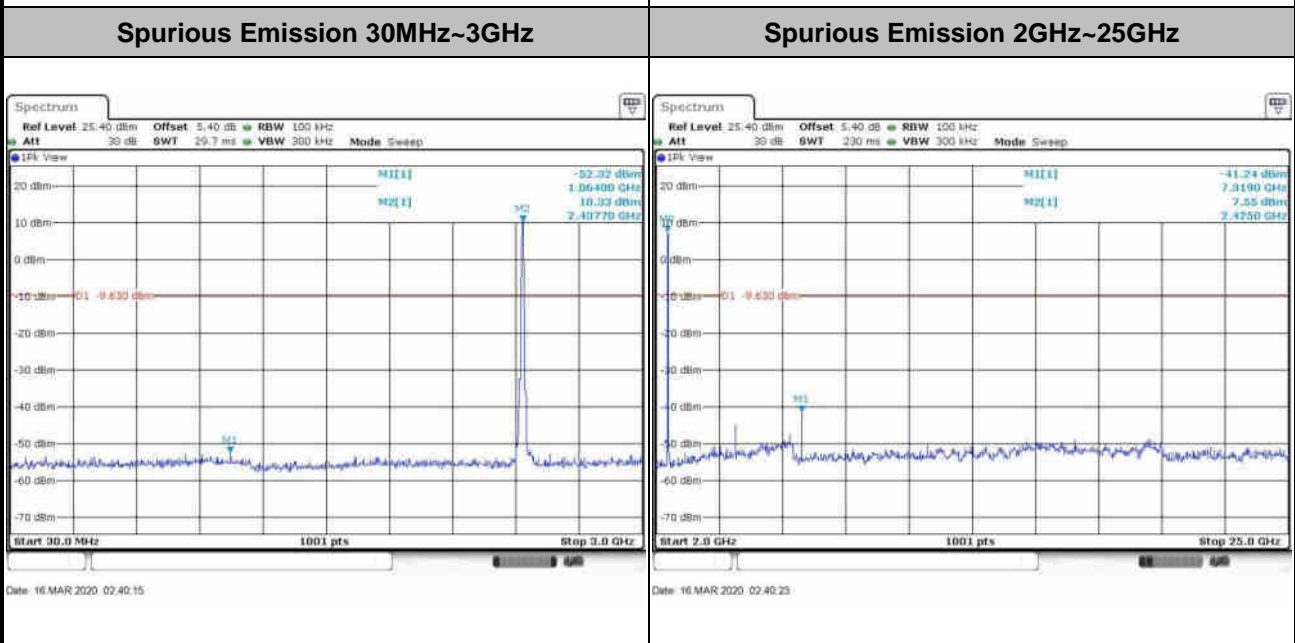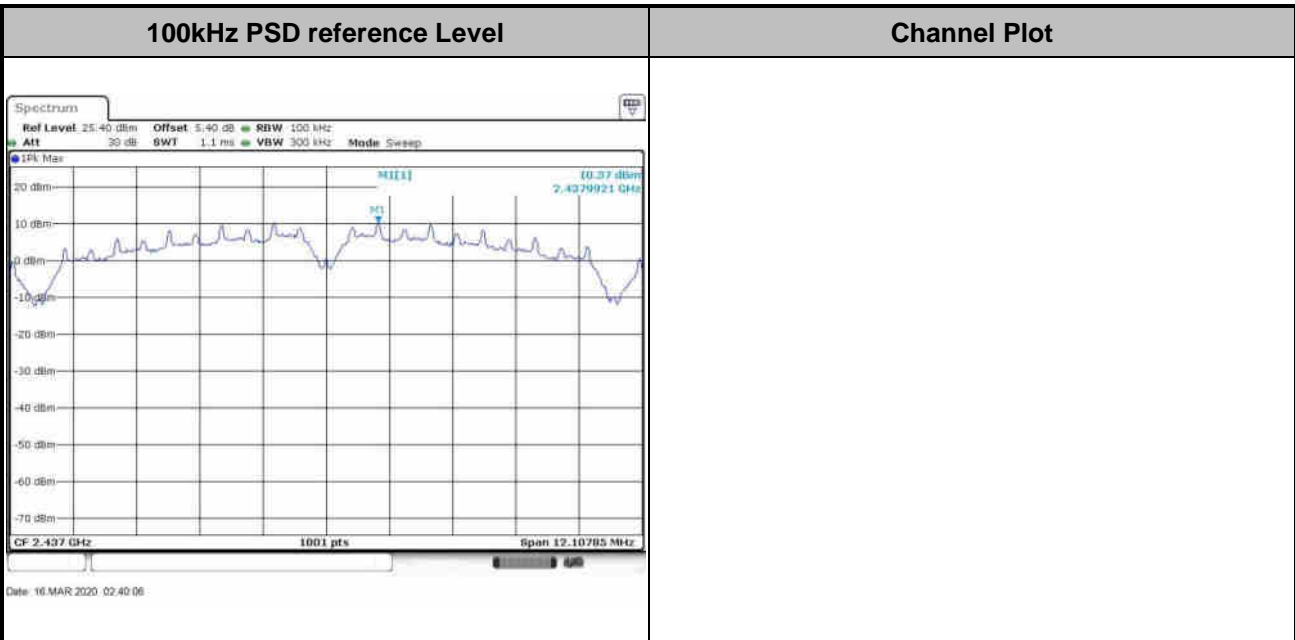





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

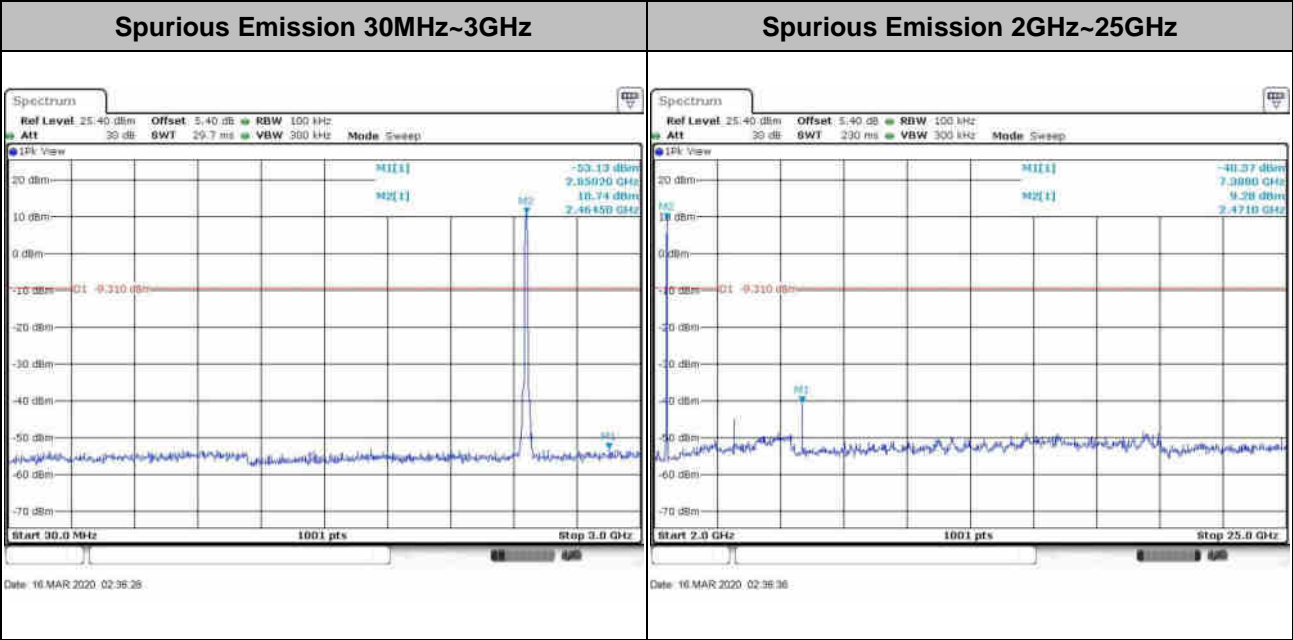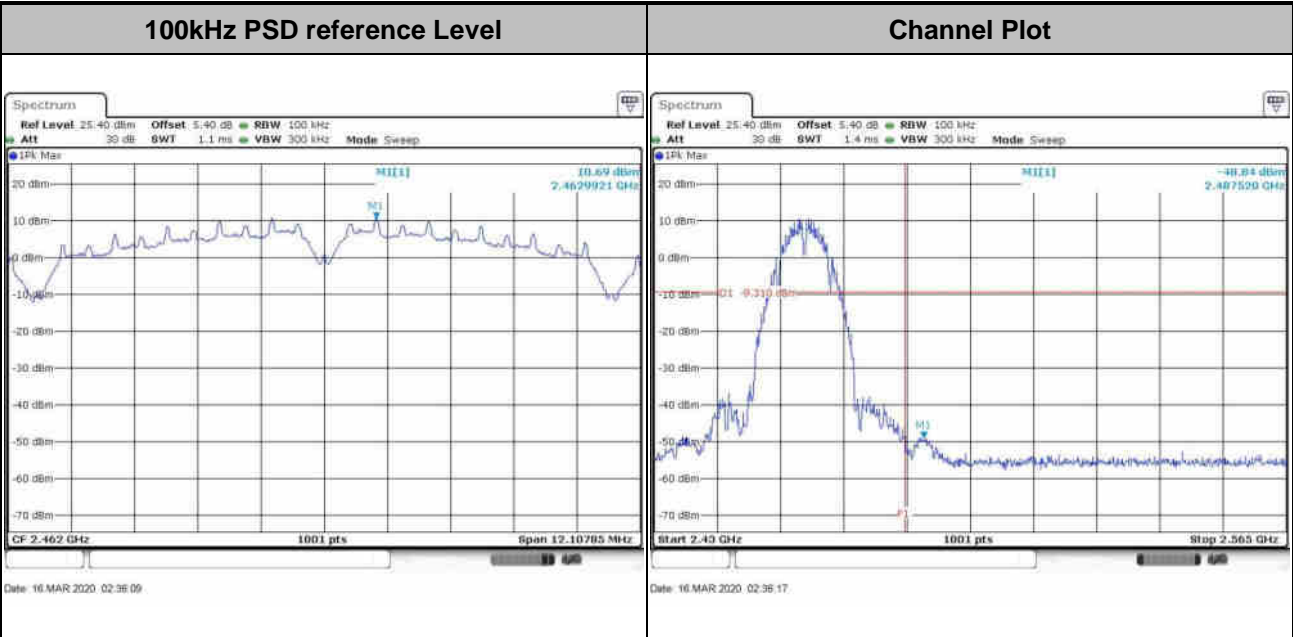





Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

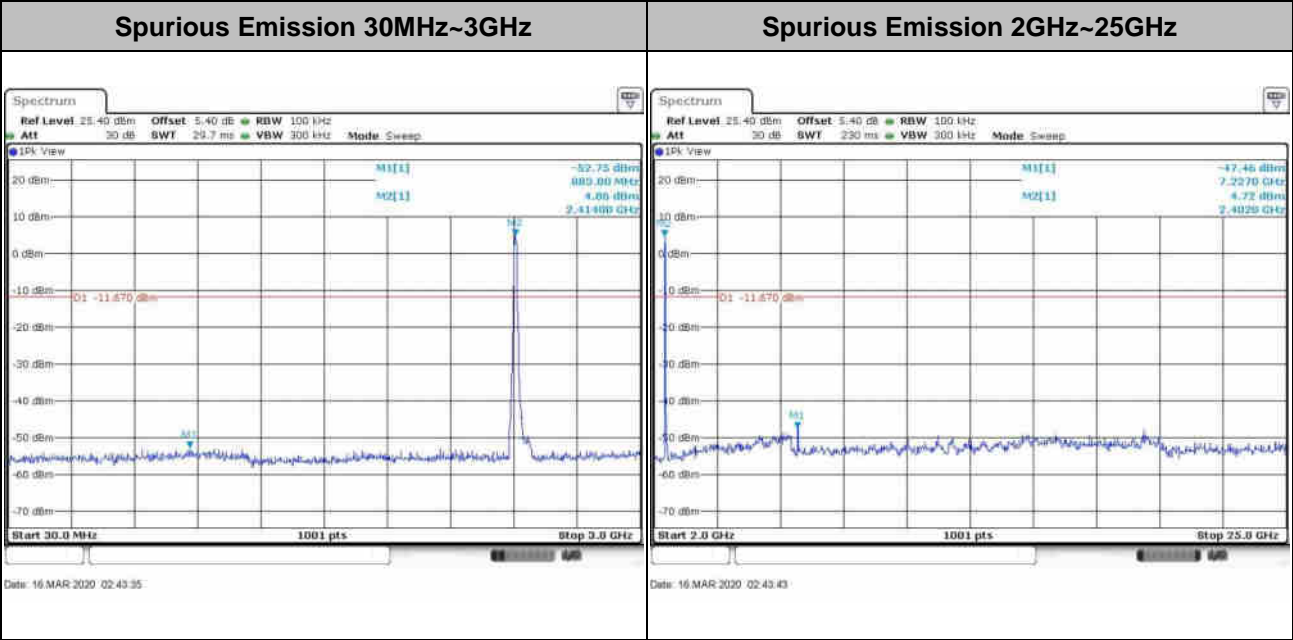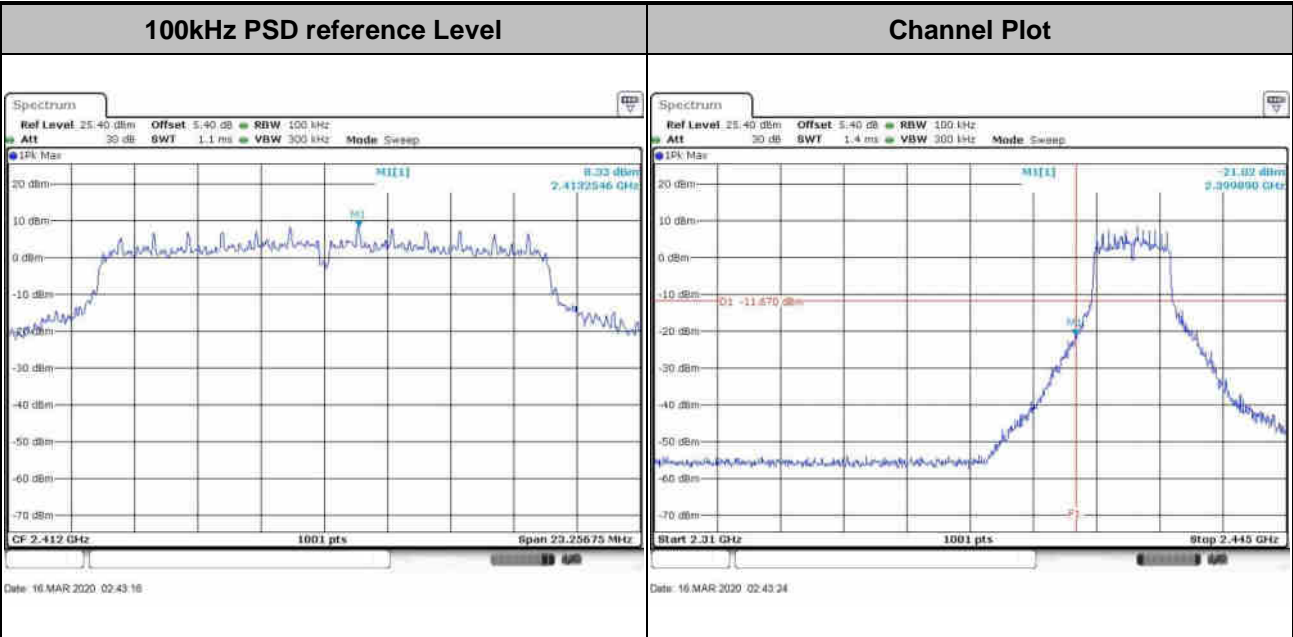




Test Mode :	802.11g	Test Channel :	02
-------------	---------	----------------	----

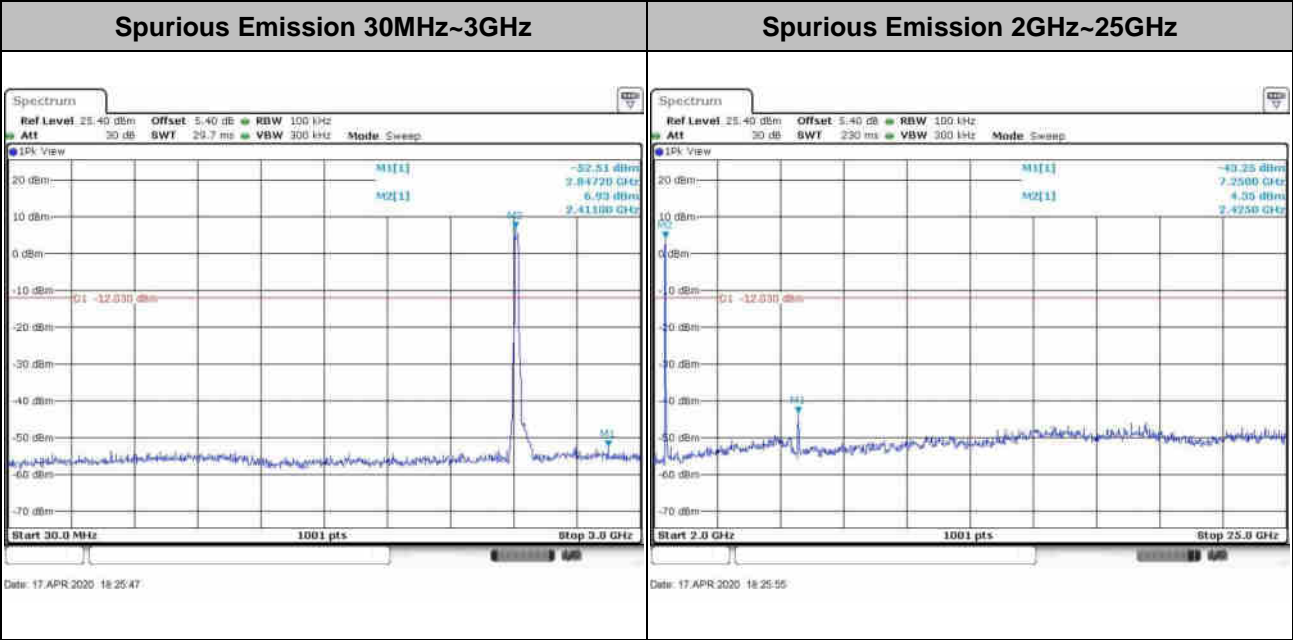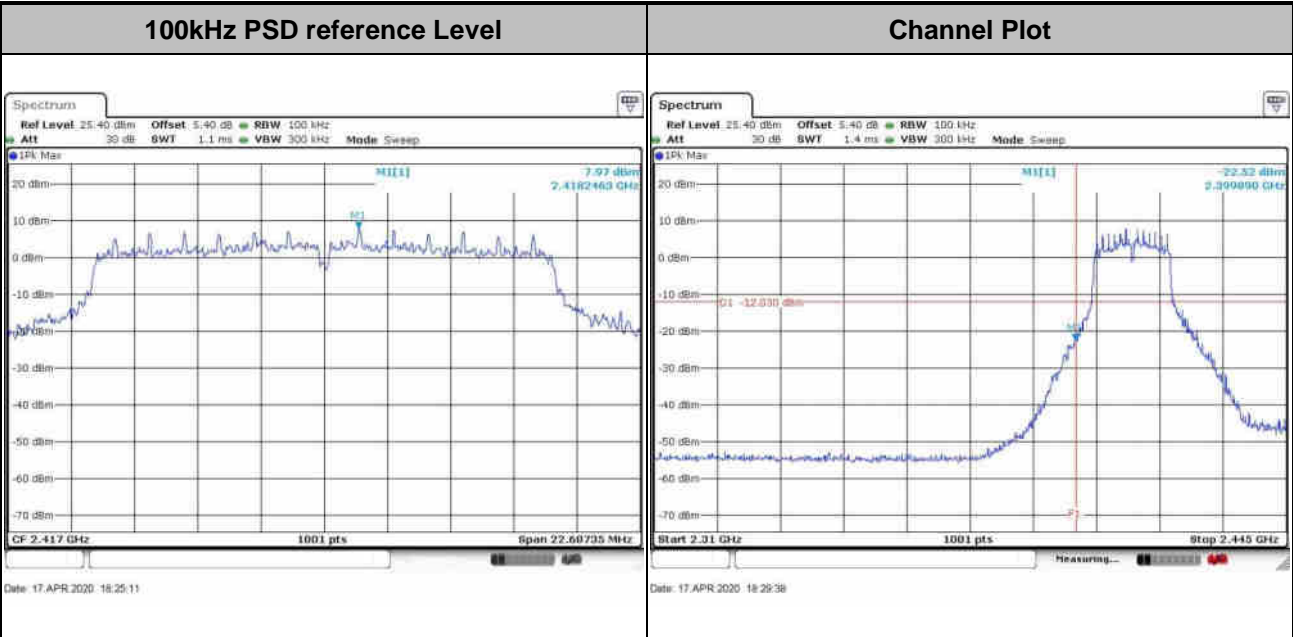





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level	Channel Plot
-----------------------------------	---------------------


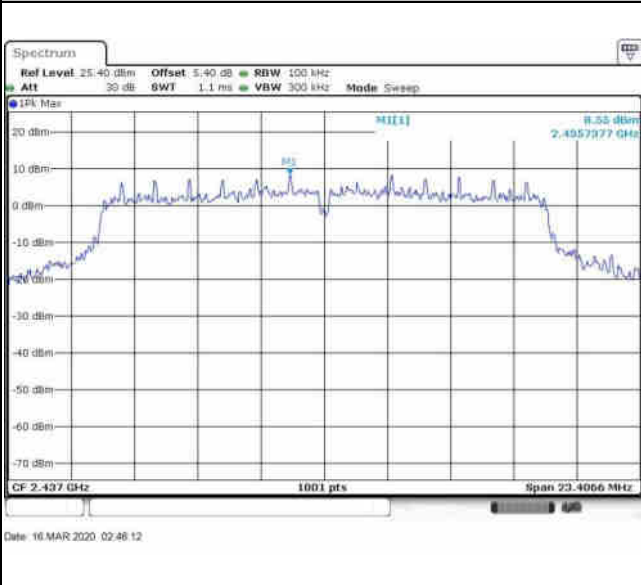


Spurious Emission 30MHz~3GHz	Spurious Emission 2GHz~25GHz
-------------------------------------	-------------------------------------

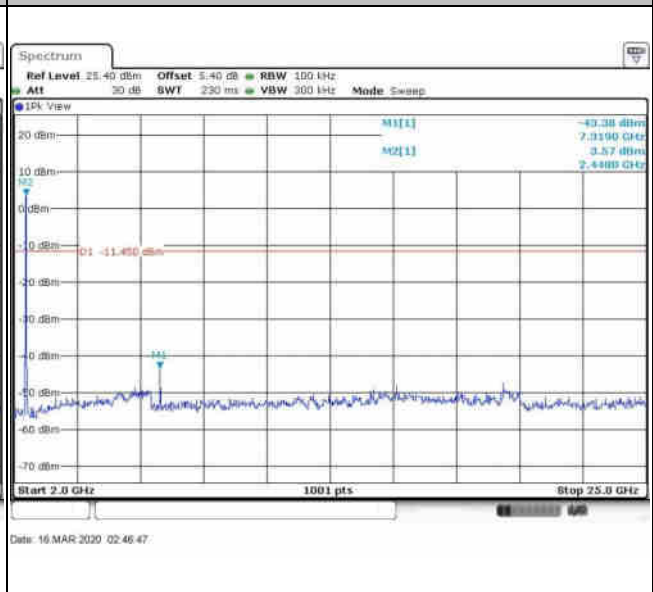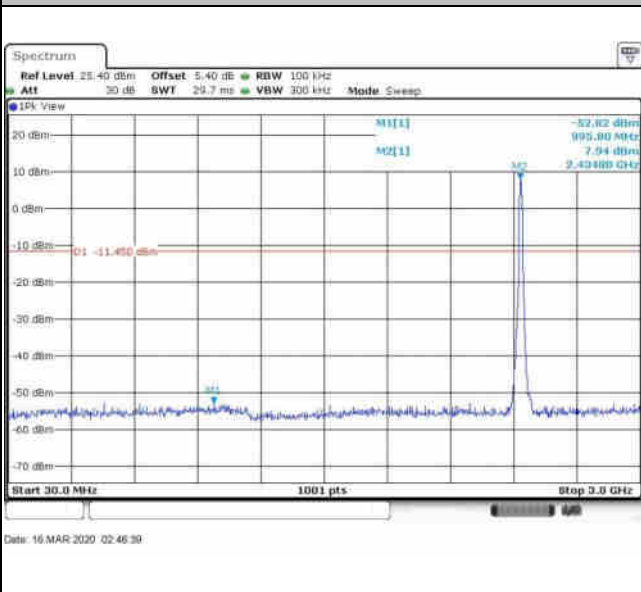





Test Mode :	802.11g	Test Channel :	08
-------------	---------	----------------	----

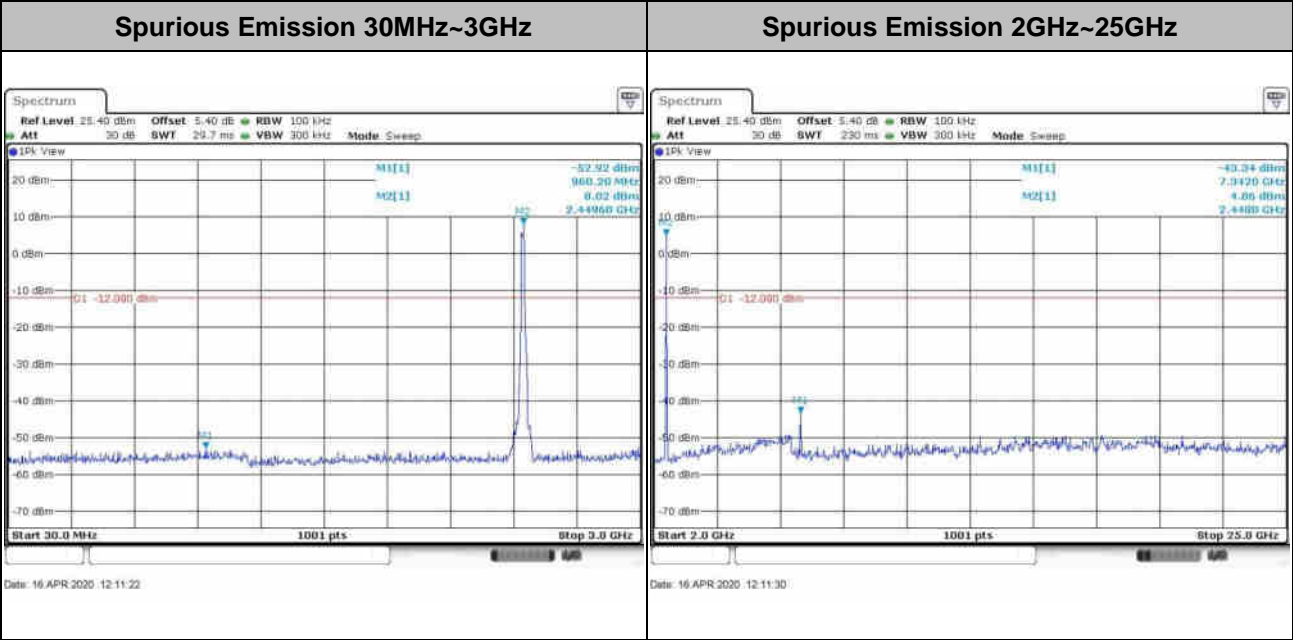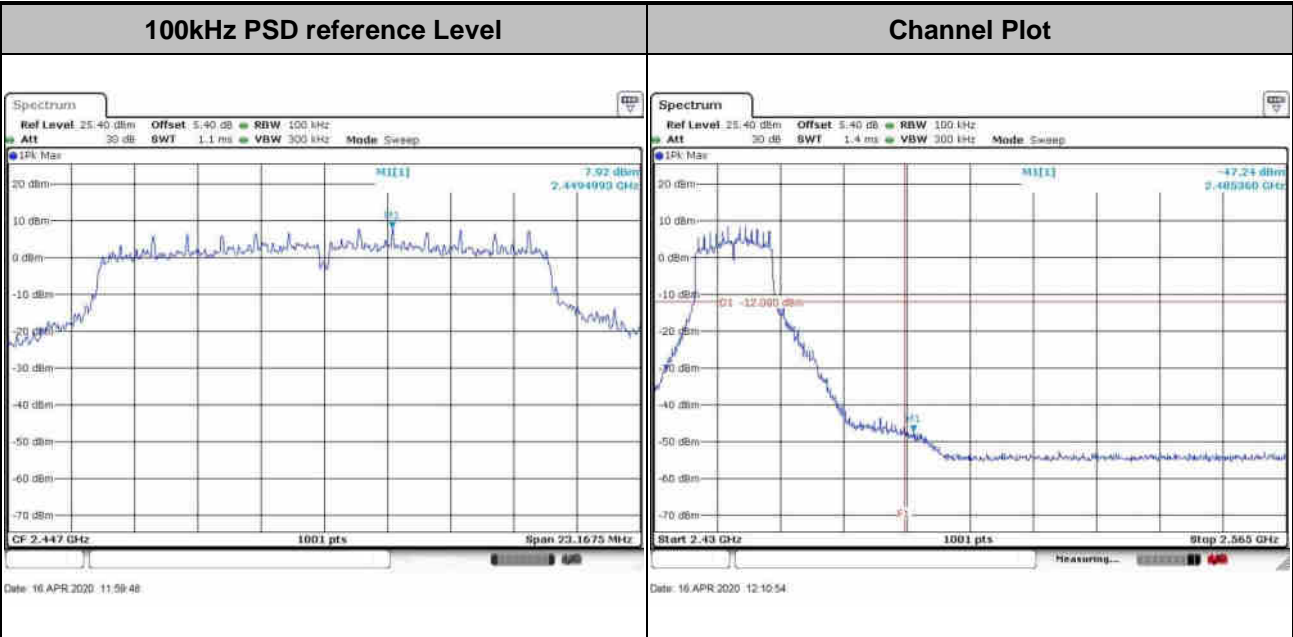





Test Mode :	802.11g	Test Channel :	09
-------------	---------	----------------	----

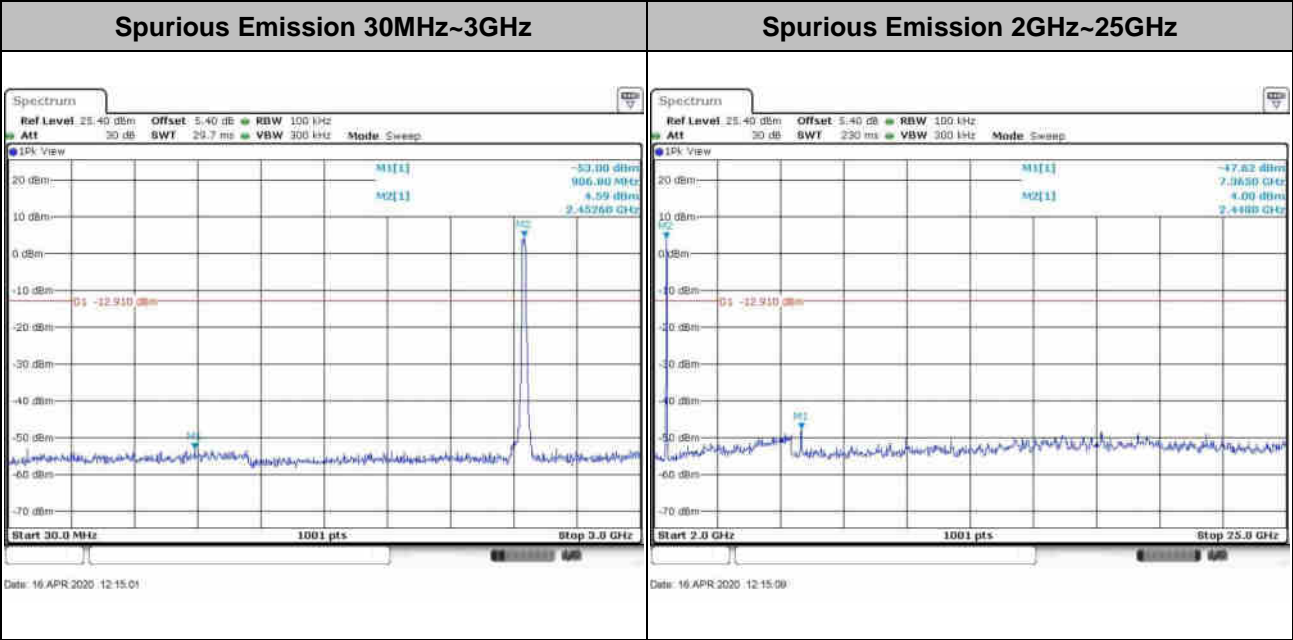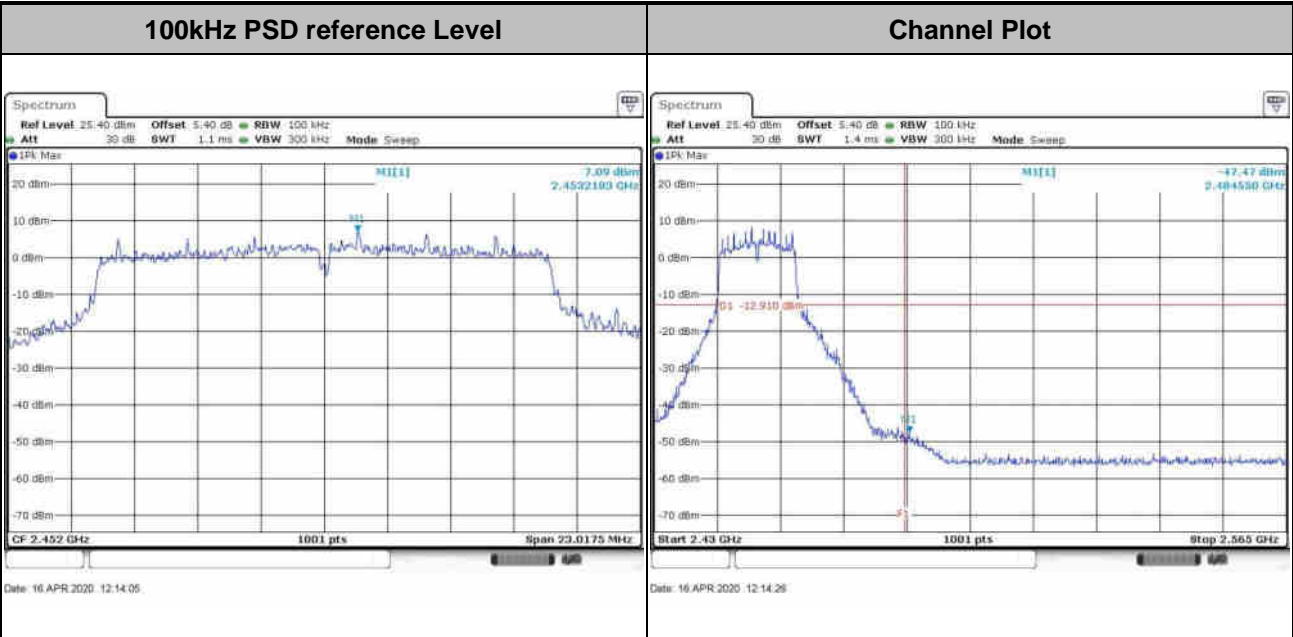





Test Mode :	802.11g	Test Channel :	10
-------------	---------	----------------	----

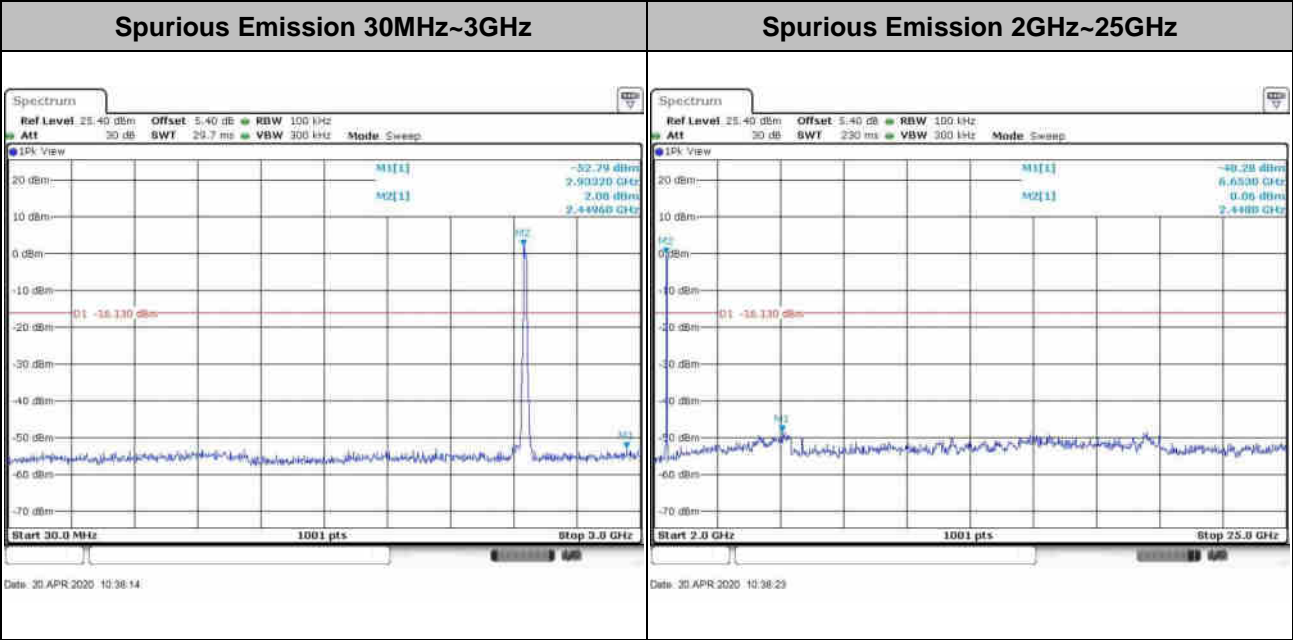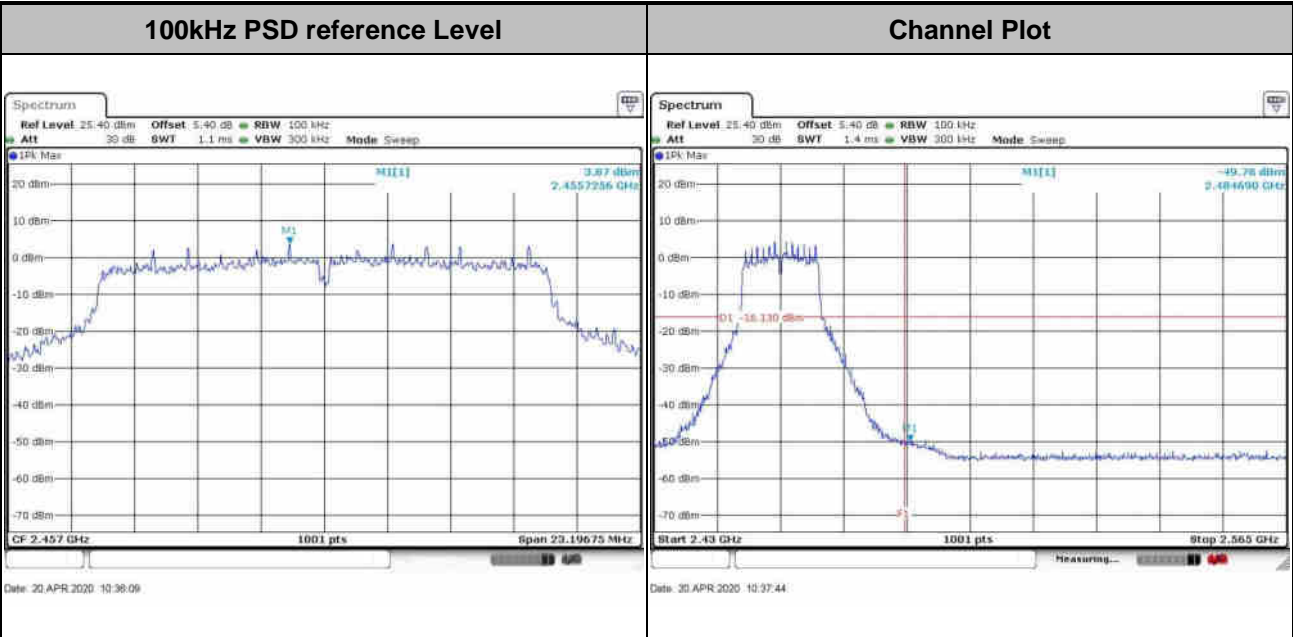





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

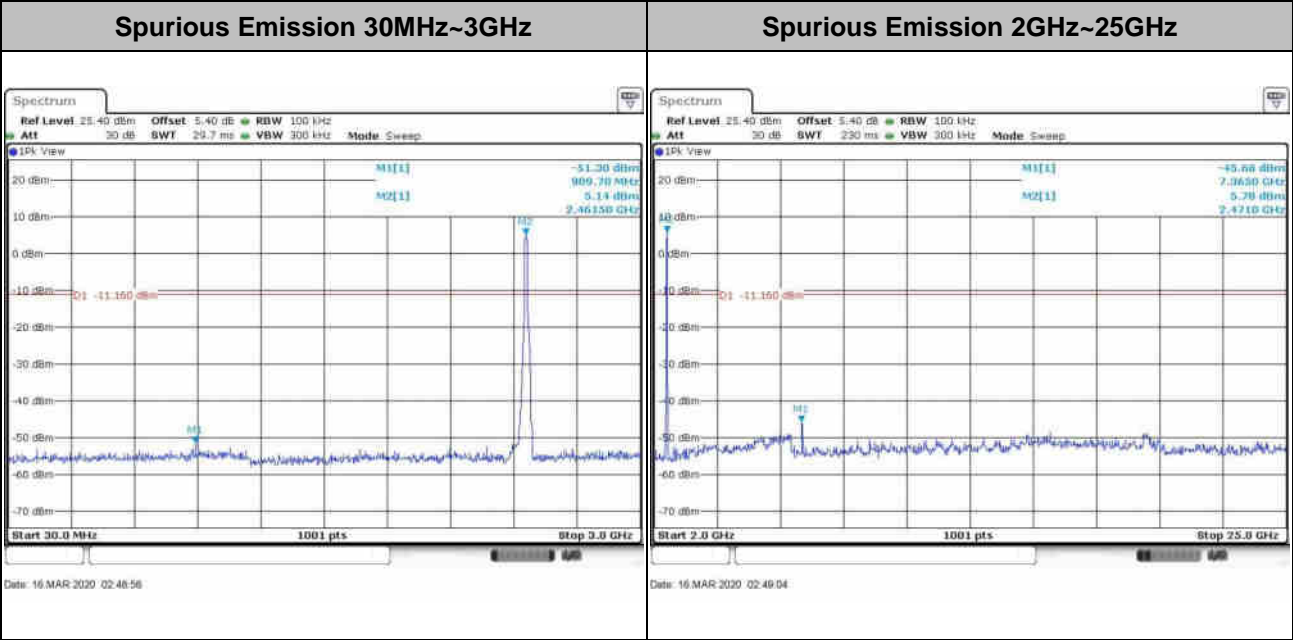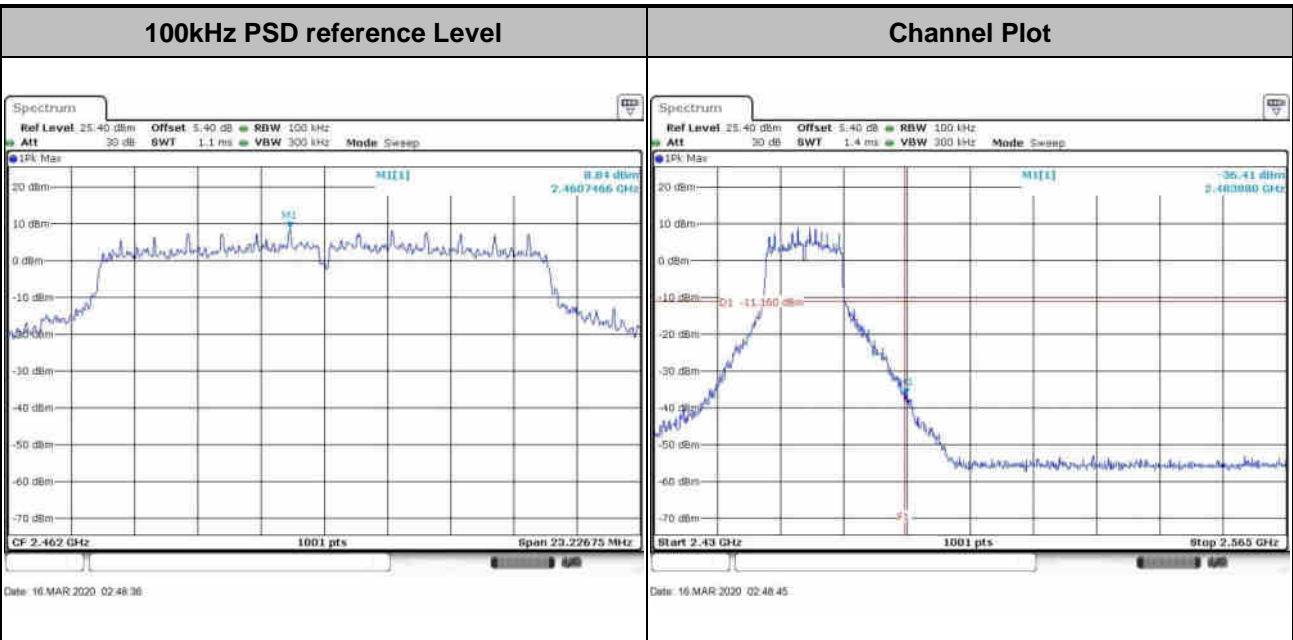





Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

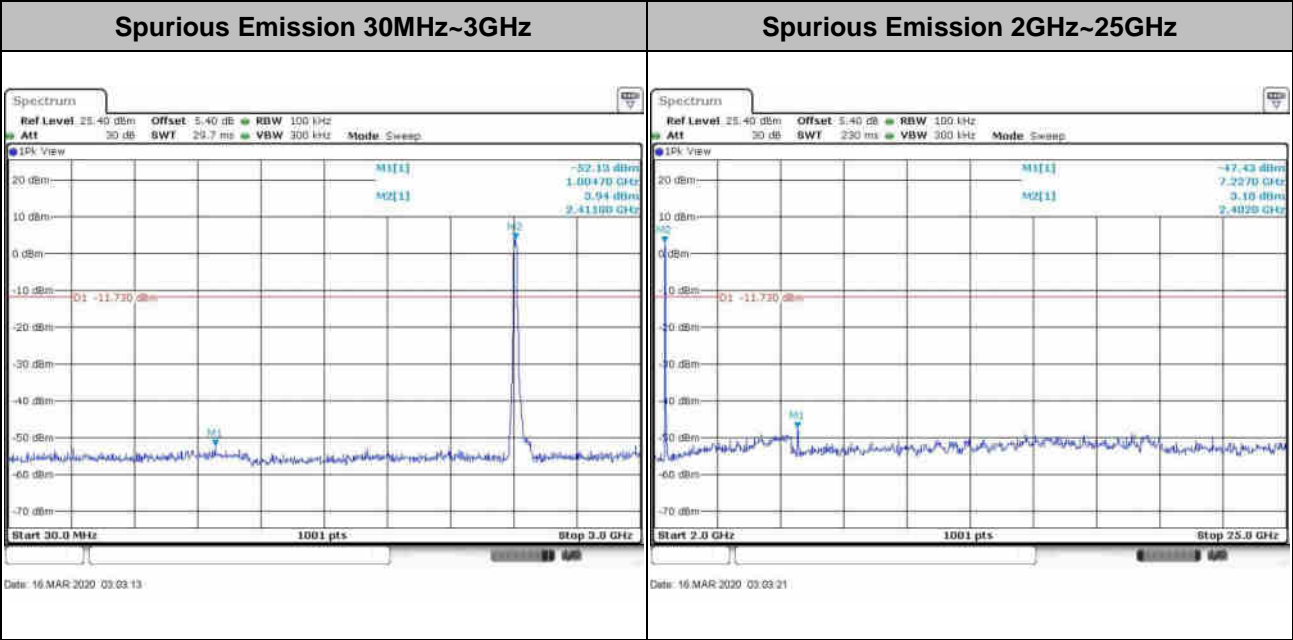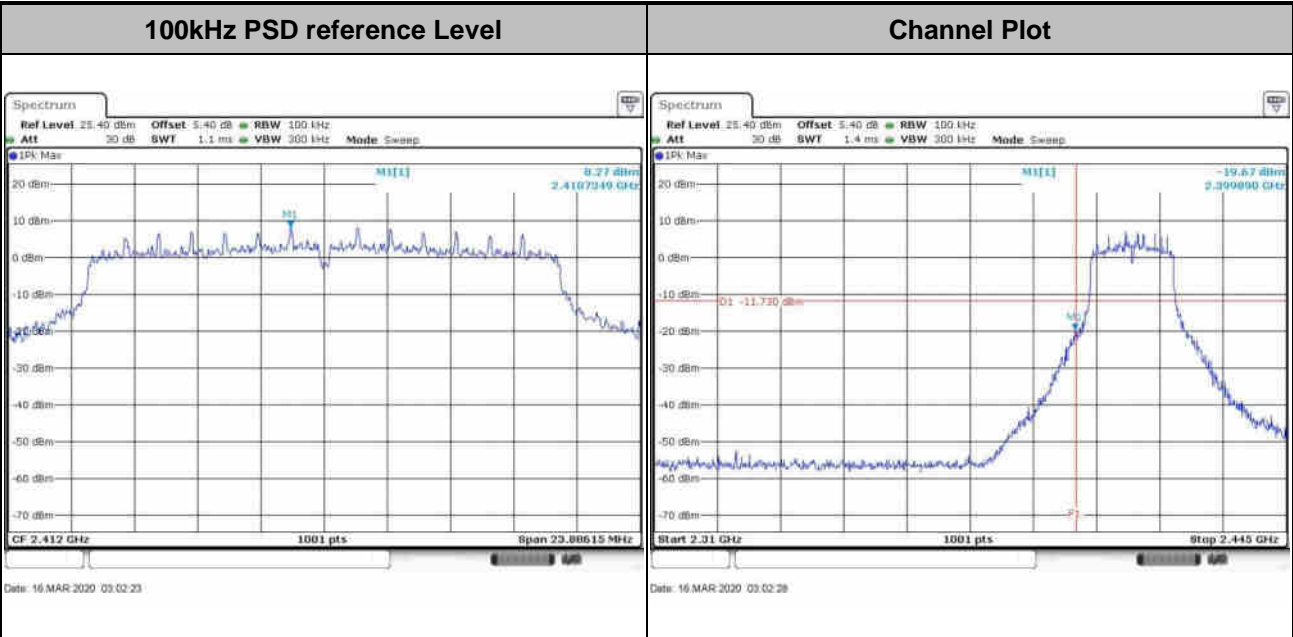





Test Mode :	802.11n HT20	Test Channel :	02
-------------	--------------	----------------	----

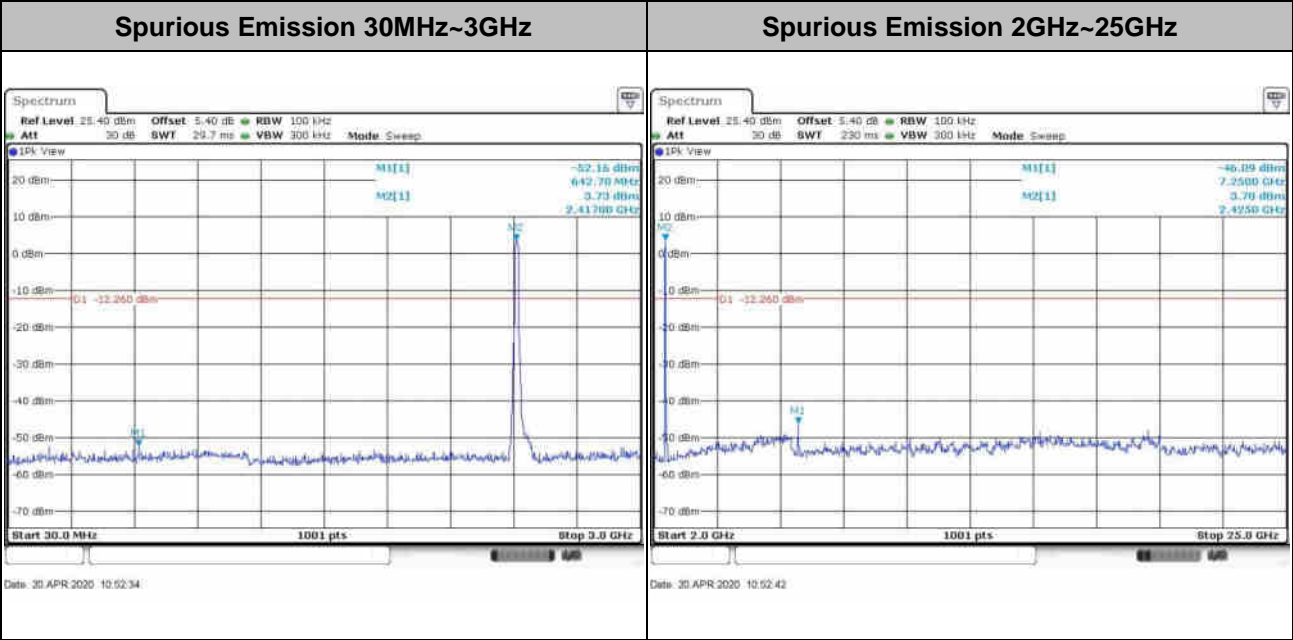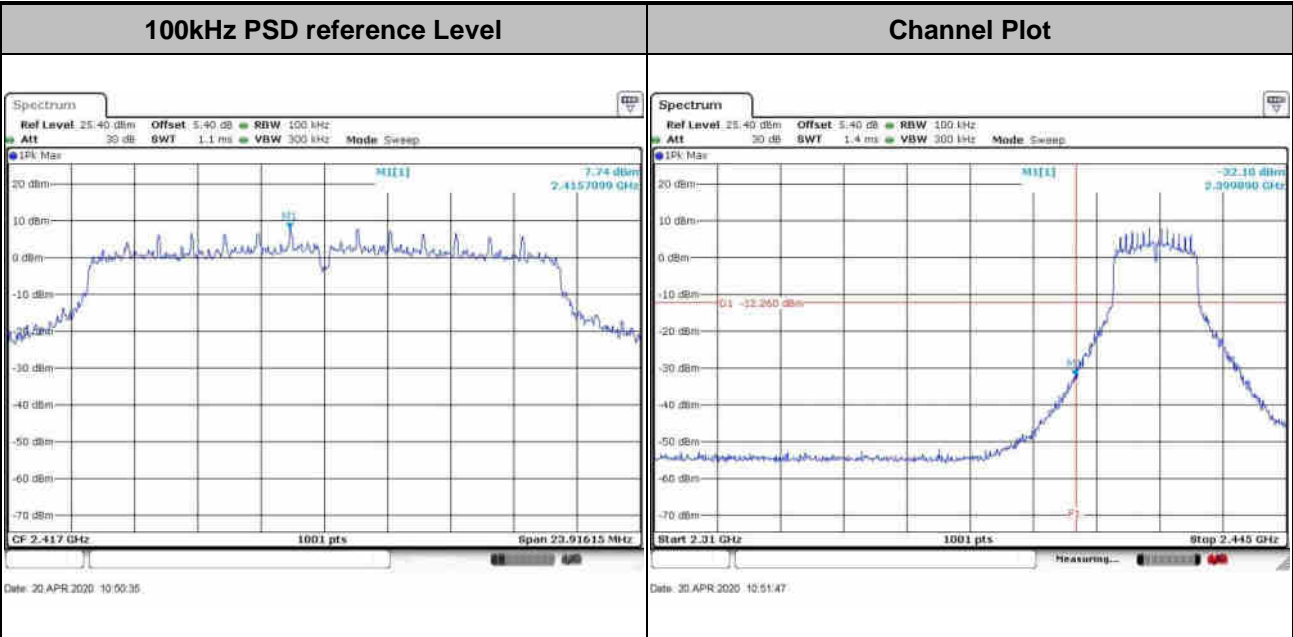





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

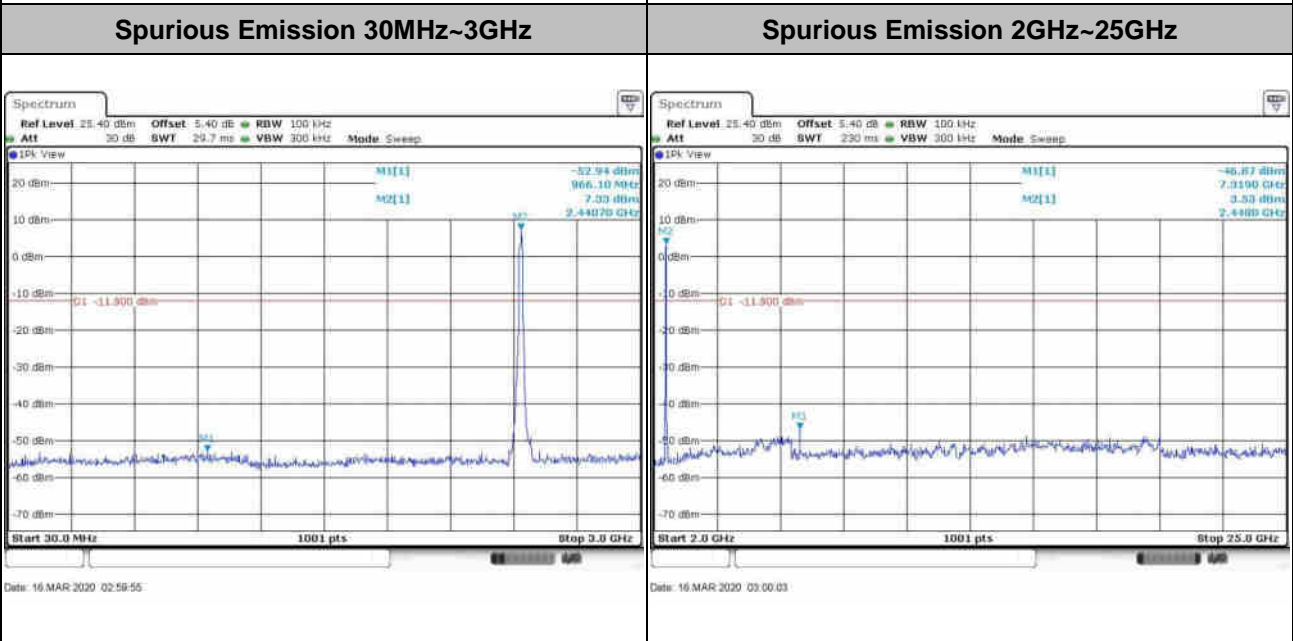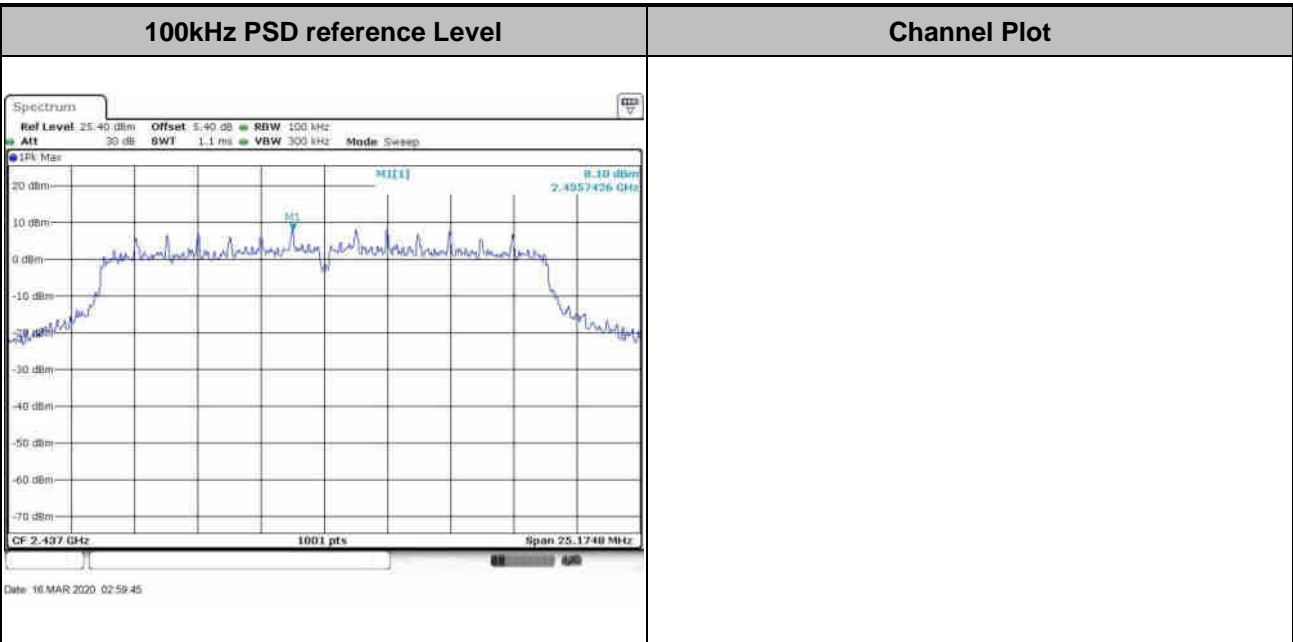





Test Mode :	802.11n HT20	Test Channel :	08
-------------	--------------	----------------	----

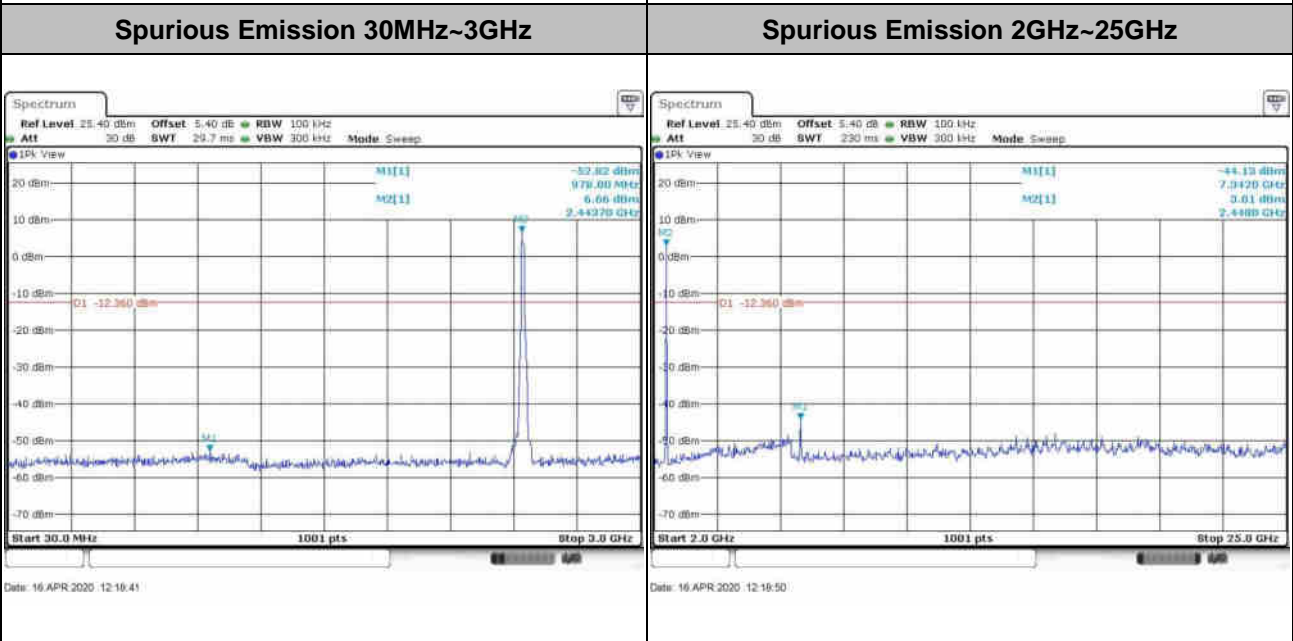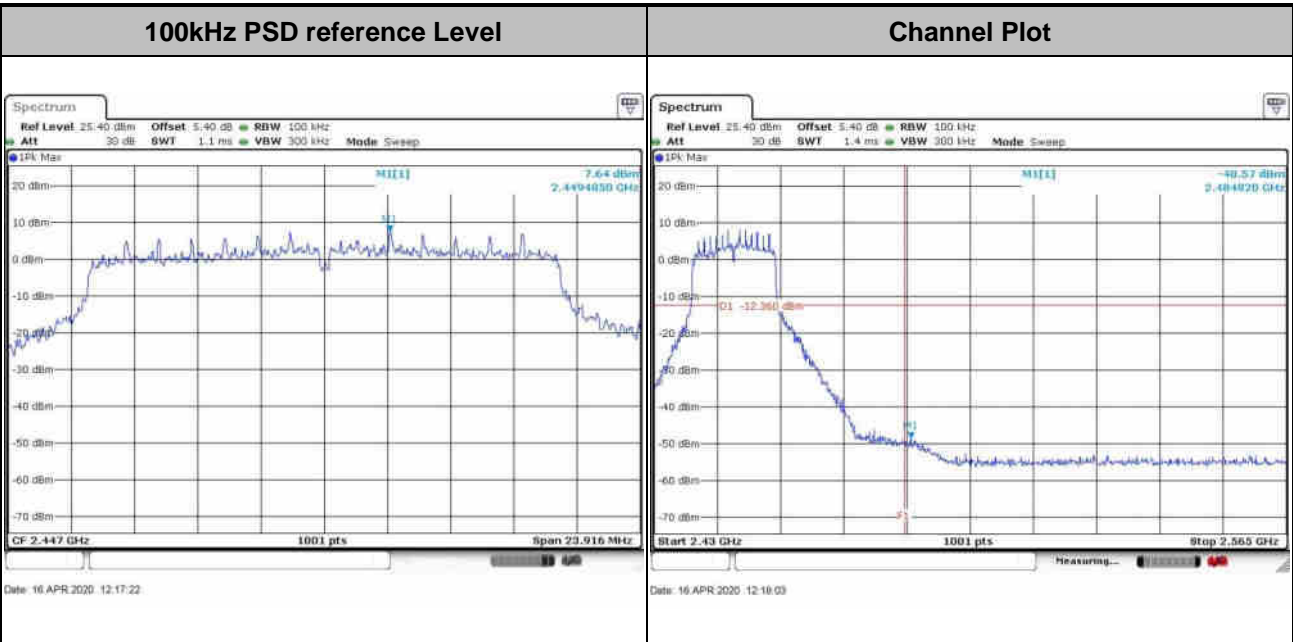





Test Mode :	802.11n HT20	Test Channel :	09
-------------	--------------	----------------	----

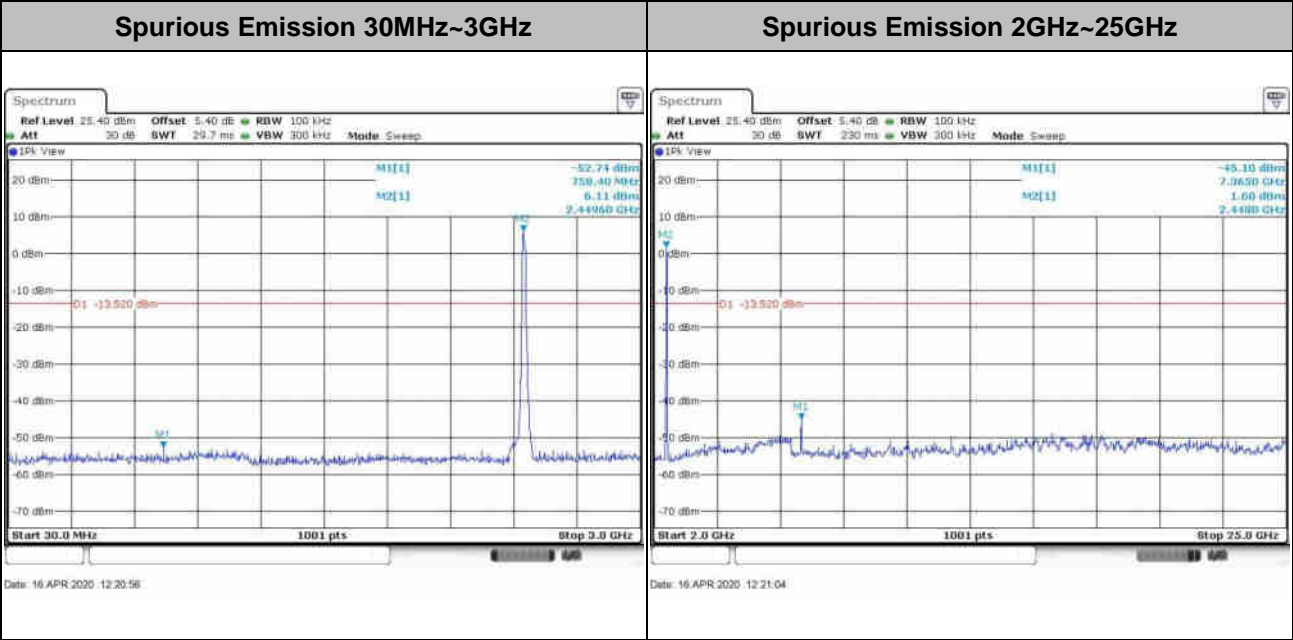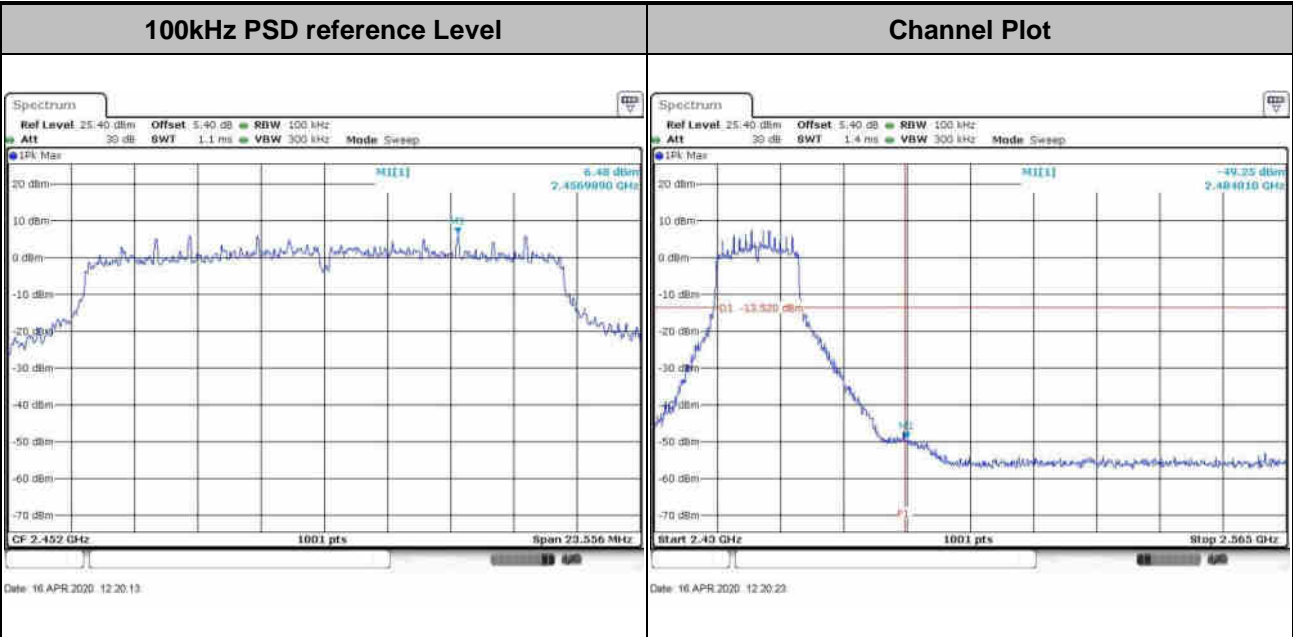





Test Mode :	802.11n HT20	Test Channel :	10
-------------	--------------	----------------	----

100kHz PSD reference Level	Channel Plot
-----------------------------------	---------------------

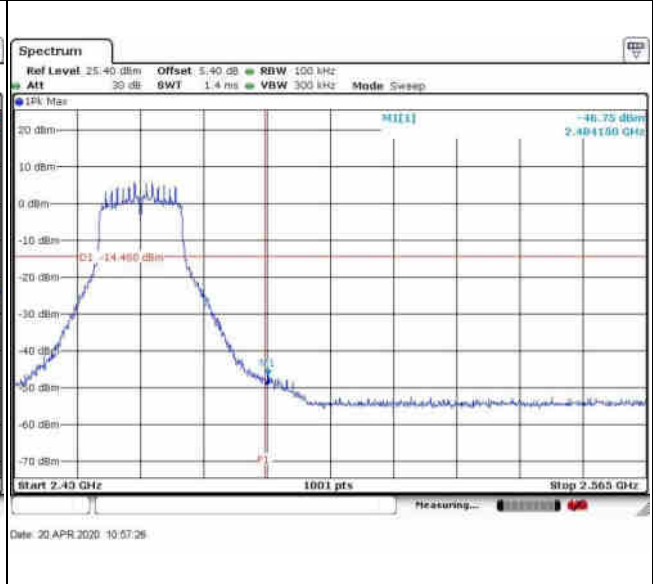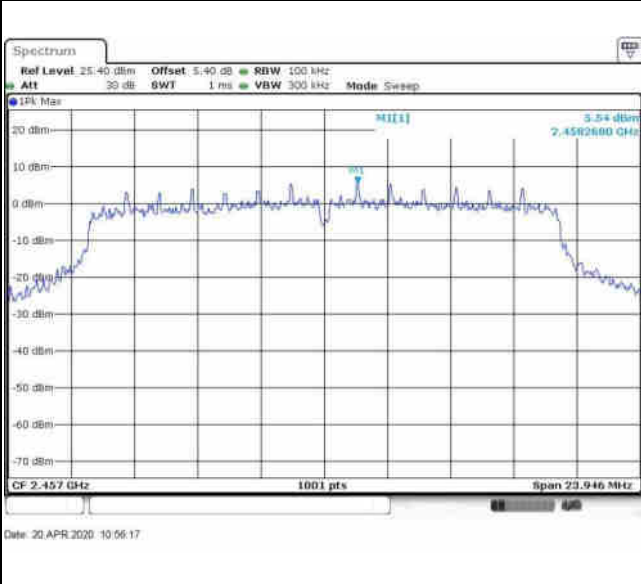


Spurious Emission 30MHz~3GHz	Spurious Emission 2GHz~25GHz
-------------------------------------	-------------------------------------

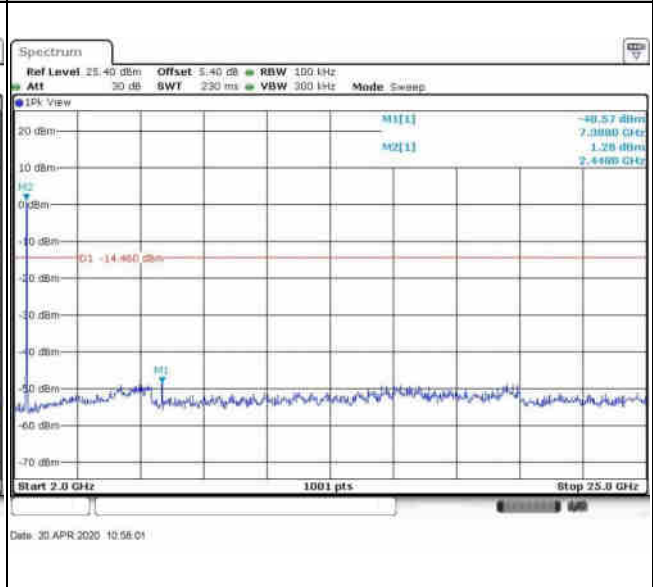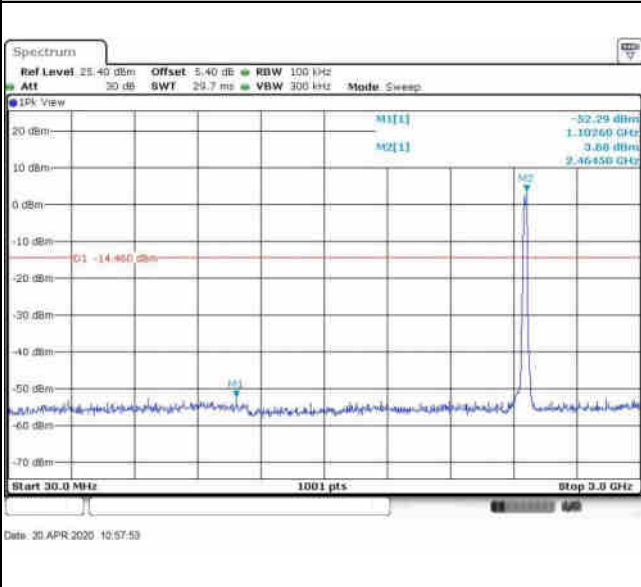




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

100kHz PSD reference Level	Channel Plot
-----------------------------------	---------------------

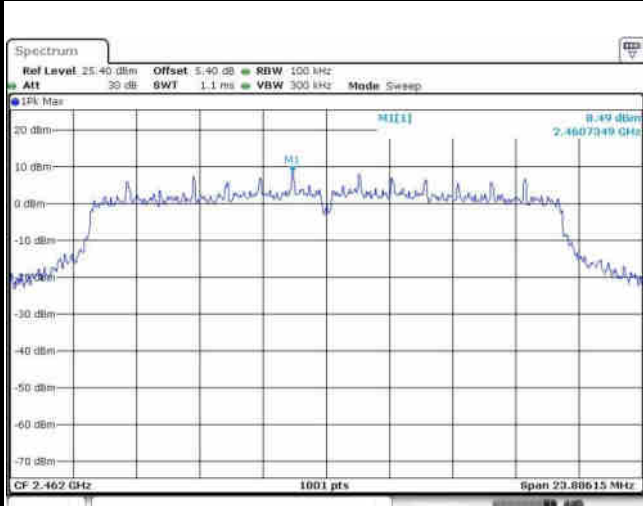


Date: 16 MAR 2020 03:05:40

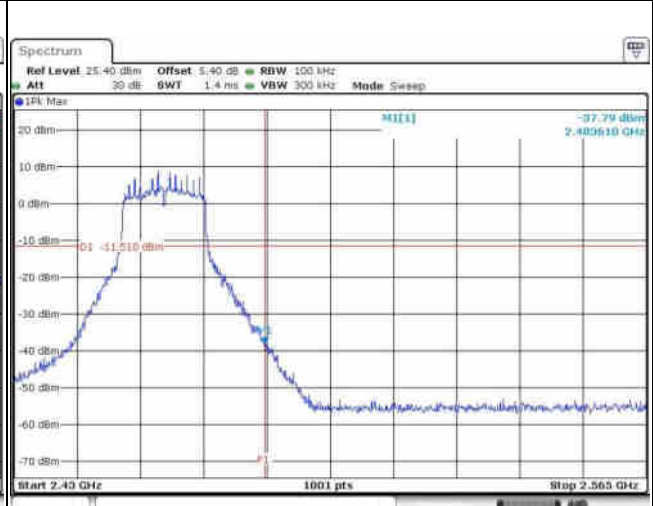


Date: 16 MAR 2020 03:05:58

Spurious Emission 30MHz~3GHz

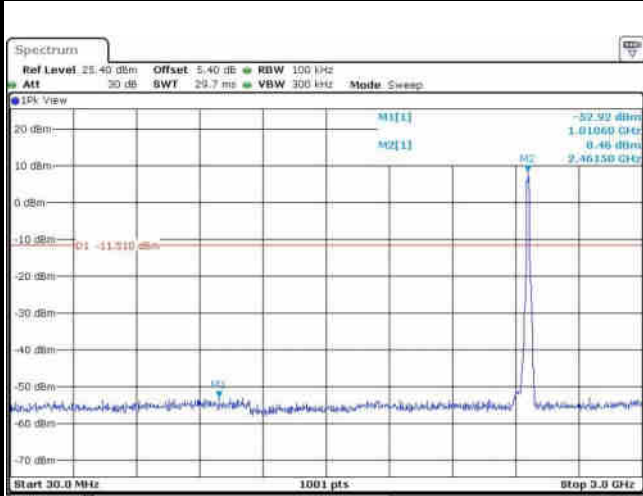

Date: 16 MAR 2020 03:06:08

Spurious Emission 2GHz~25GHz

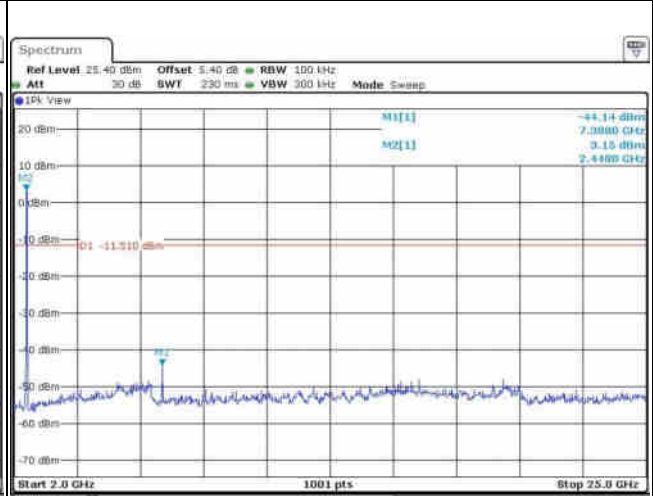

Date: 16 MAR 2020 03:06:15



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

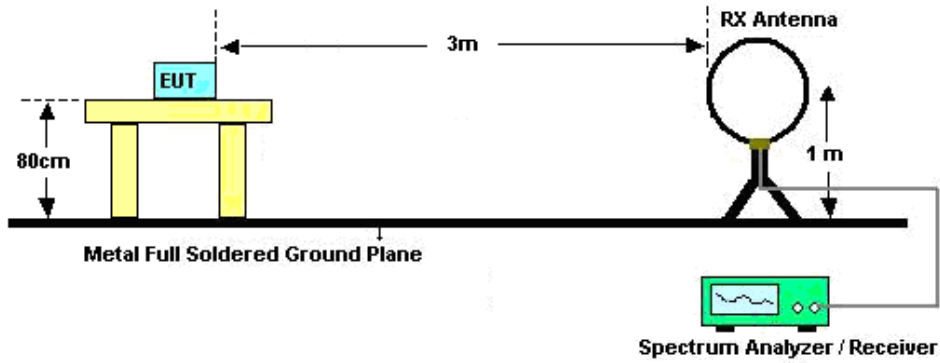

For radiated emissions from 30MHz to 1GHz

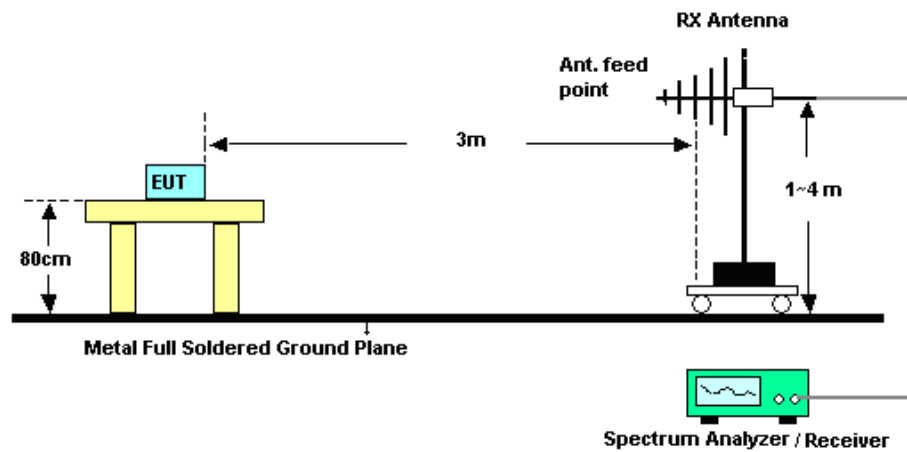

For radiated emissions above 1GHz

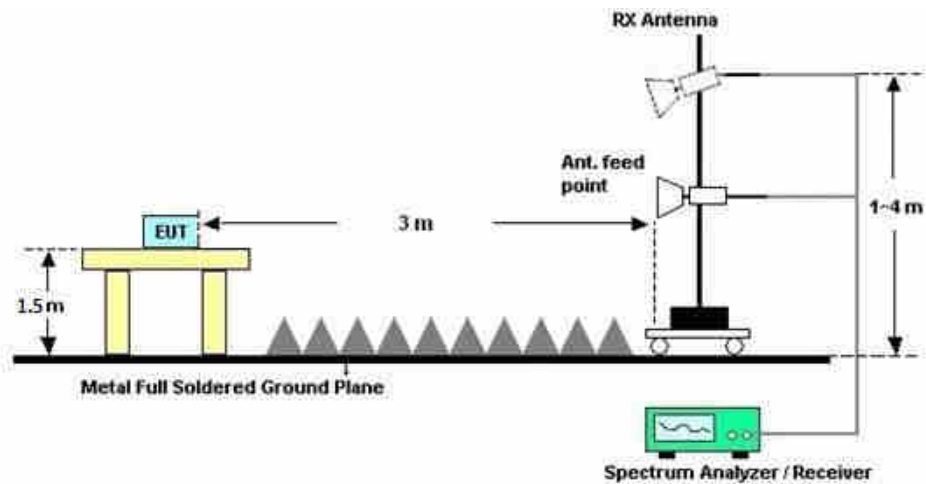



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

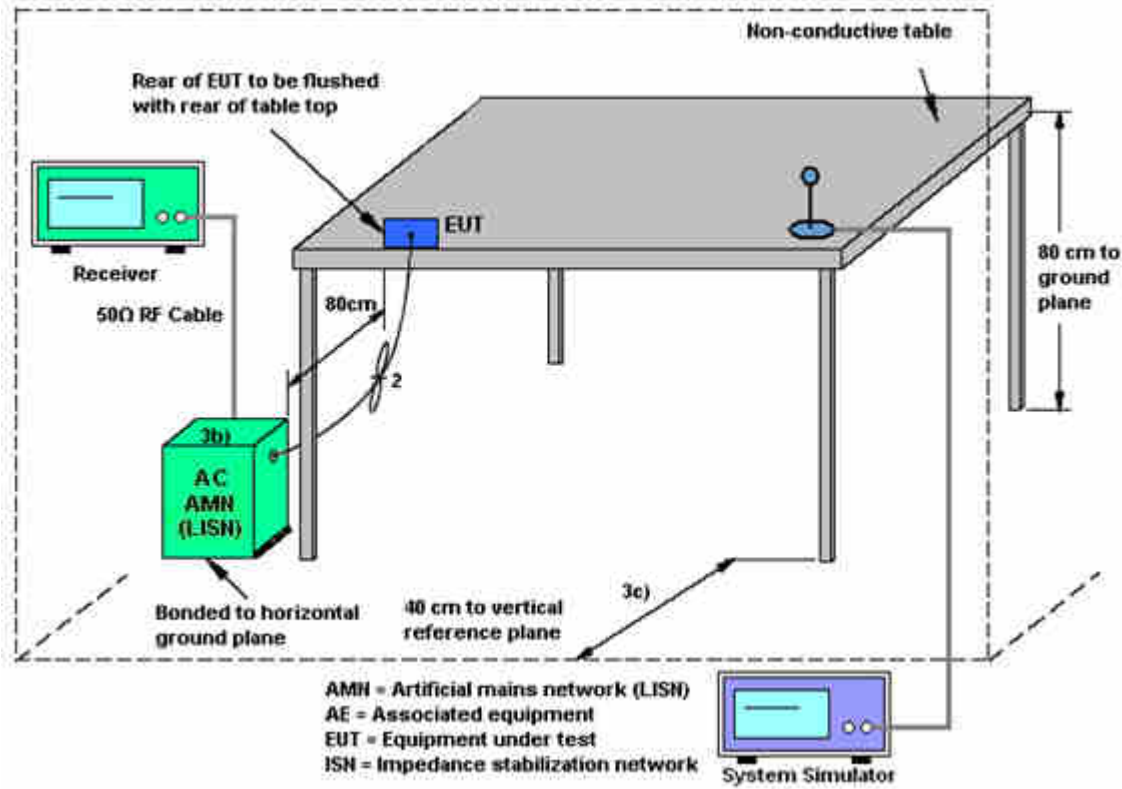

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Mar. 16, 2020~ Apr. 20, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 13, 2020	Mar. 16, 2020~ Apr. 20, 2020	Jan. 12, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 13, 2020	Mar. 16, 2020~ Apr. 20, 2020	Jan. 12, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Jul. 18, 2019	Apr. 17, 2020	Jul. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44GHz	Apr. 15, 2020	Apr. 17, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Apr. 17, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 30, 2019	Apr. 17, 2020	May 29, 2020	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2019	Apr. 17, 2020	Apr. 26, 2020	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Apr. 17, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2019	Apr. 17, 2020	Aug. 05, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Apr. 17, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Aug. 16, 2019	Apr. 17, 2020	Aug. 15, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 13, 2020	Apr. 17, 2020	Apr. 12, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 17, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 17, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 17, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2019	Mar. 18, 2020	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Mar. 18, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Mar. 18, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Mar. 18, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Lex Wu	Temperature:	21~25	°C
Test Date:	2020/3/16~2020/4/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.99	8.07	0.50	Pass
11b	1Mbps	1	6	2437	13.99	8.07	0.50	Pass
11b	1Mbps	1	11	2462	13.89	8.07	0.50	Pass
11g	6Mbps	1	1	2412	17.43	15.50	0.50	Pass
11g	6Mbps	1	2	2417	17.53	15.12	0.50	Pass
11g	6Mbps	1	6	2437	17.68	15.60	0.50	Pass
11g	6Mbps	1	8	2447	17.58	15.45	0.50	Pass
11g	6Mbps	1	9	2452	17.58	15.35	0.50	Pass
11g	6Mbps	1	10	2457	17.43	15.46	0.50	Pass
11g	6Mbps	1	11	2462	17.73	15.48	0.50	Pass
HT20	MCS0	1	1	2412	18.63	15.92	0.50	Pass
HT20	MCS0	1	2	2417	18.63	15.94	0.50	Pass
HT20	MCS0	1	6	2437	18.83	16.78	0.50	Pass
HT20	MCS0	1	8	2447	18.83	15.94	0.50	Pass
HT20	MCS0	1	9	2452	18.73	15.70	0.50	Pass
HT20	MCS0	1	10	2457	18.63	15.96	0.50	Pass
HT20	MCS0	1	11	2462	18.58	15.92	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	20.58	30.00	-0.50	20.08	36.00	Pass
11b	1Mbps	1	6	2437	21.19	30.00	-0.50	20.69	36.00	Pass
11b	1Mbps	1	11	2462	21.39	30.00	-0.50	20.89	36.00	Pass
11g	6Mbps	1	1	2412	21.65	30.00	-0.50	21.15	36.00	Pass
11g	6Mbps	1	2	2417	22.21	30.00	-0.50	21.71	36.00	Pass
11g	6Mbps	1	6	2437	22.56	30.00	-0.50	22.06	36.00	Pass
11g	6Mbps	1	8	2447	22.92	30.00	-0.50	22.42	36.00	Pass
11g	6Mbps	1	9	2452	22.63	30.00	-0.50	22.13	36.00	Pass
11g	6Mbps	1	10	2457	18.71	30.00	-0.50	18.21	36.00	Pass
11g	6Mbps	1	11	2462	18.84	30.00	-0.50	18.34	36.00	Pass
HT20	MCS0	1	1	2412	21.39	30.00	-0.50	20.89	36.00	Pass
HT20	MCS0	1	2	2417	22.08	30.00	-0.50	21.58	36.00	Pass
HT20	MCS0	1	6	2437	22.16	30.00	-0.50	21.66	36.00	Pass
HT20	MCS0	1	8	2447	22.36	30.00	-0.50	21.86	36.00	Pass
HT20	MCS0	1	9	2452	21.97	30.00	-0.50	21.47	36.00	Pass
HT20	MCS0	1	10	2457	20.13	30.00	-0.50	19.63	36.00	Pass
HT20	MCS0	1	11	2462	18.31	30.00	-0.50	17.81	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	18.55
11b	1Mbps	1	6	2437	0.00	19.01
11b	1Mbps	1	11	2462	0.00	19.19
11g	6Mbps	1	1	2412	0.08	17.76
11g	6Mbps	1	2	2417	0.08	18.09
11g	6Mbps	1	6	2437	0.08	18.36
11g	6Mbps	1	8	2447	0.08	18.23
11g	6Mbps	1	9	2452	0.08	18.01
11g	6Mbps	1	10	2457	0.08	14.29
11g	6Mbps	1	11	2462	0.08	14.49
HT20	MCS0	1	1	2412	0.08	17.15
HT20	MCS0	1	2	2417	0.08	17.51
HT20	MCS0	1	6	2437	0.08	17.72
HT20	MCS0	1	8	2447	0.08	17.76
HT20	MCS0	1	9	2452	0.08	17.33
HT20	MCS0	1	10	2457	0.08	15.44
HT20	MCS0	1	11	2462	0.08	14.10


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.92	-0.50	8.00	Pass
11b	1Mbps	1	6	2437	-6.93	-0.50	8.00	Pass
11b	1Mbps	1	11	2462	-7.54	-0.50	8.00	Pass
11g	6Mbps	1	1	2412	-9.26	-0.50	8.00	Pass
11g	6Mbps	1	2	2417	-8.95	-0.50	8.00	Pass
11g	6Mbps	1	6	2437	-9.12	-0.50	8.00	Pass
11g	6Mbps	1	8	2447	-8.07	-0.50	8.00	Pass
11g	6Mbps	1	9	2452	-8.77	-0.50	8.00	Pass
11g	6Mbps	1	10	2457	-12.44	-0.50	8.00	Pass
11g	6Mbps	1	11	2462	-8.90	-0.50	8.00	Pass
HT20	MCS0	1	1	2412	-9.34	-0.50	8.00	Pass
HT20	MCS0	1	6	2417	-8.46	-0.50	8.00	Pass
HT20	MCS0	1	6	2437	-8.96	-0.50	8.00	Pass
HT20	MCS0	1	8	2447	-8.72	-0.50	8.00	Pass
HT20	MCS0	1	9	2452	-9.92	-0.50	8.00	Pass
HT20	MCS0	1	10	2457	-11.26	-0.50	8.00	Pass
HT20	MCS0	1	11	2462	-9.12	-0.50	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

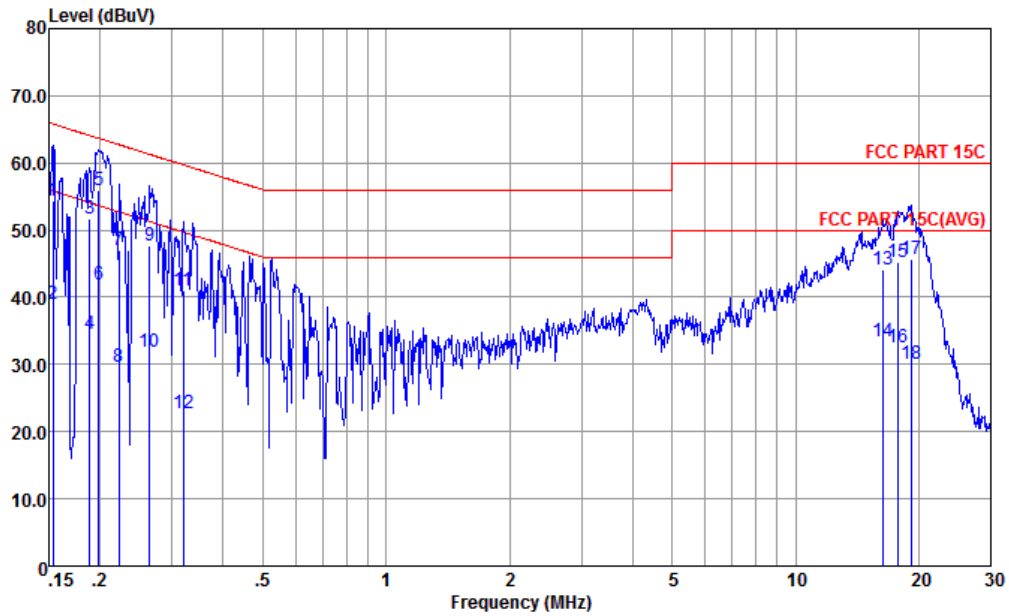


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-191028-060105 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	54.30	-11.52	65.82	43.80	0.03	10.47	QP
2	0.153	39.10	-16.72	55.82	28.60	0.03	10.47	Average
3	0.188	51.63	-12.48	64.11	41.20	0.04	10.39	QP
4	0.188	34.53	-19.58	54.11	24.10	0.04	10.39	Average
5 *	0.199	56.01	-7.66	63.67	45.60	0.04	10.37	QP
6	0.199	41.91	-11.76	53.67	31.50	0.04	10.37	Average
7	0.222	46.99	-15.75	62.74	36.60	0.04	10.35	QP
8	0.222	29.69	-23.05	52.74	19.30	0.04	10.35	Average
9	0.264	47.67	-13.62	61.29	37.30	0.05	10.32	QP
10	0.264	31.97	-19.32	51.29	21.60	0.05	10.32	Average
11	0.320	40.95	-18.76	59.71	30.60	0.05	10.30	QP
12	0.320	22.65	-27.06	49.71	12.30	0.05	10.30	Average
13	16.398	44.09	-15.91	60.00	33.20	0.46	10.43	QP
14	16.398	33.39	-16.61	50.00	22.50	0.46	10.43	Average
15	17.755	45.18	-14.82	60.00	34.20	0.53	10.45	QP
16	17.755	32.58	-17.42	50.00	21.60	0.53	10.45	Average
17	19.224	45.68	-14.32	60.00	34.60	0.60	10.48	QP
18	19.224	29.98	-20.02	50.00	18.90	0.60	10.48	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

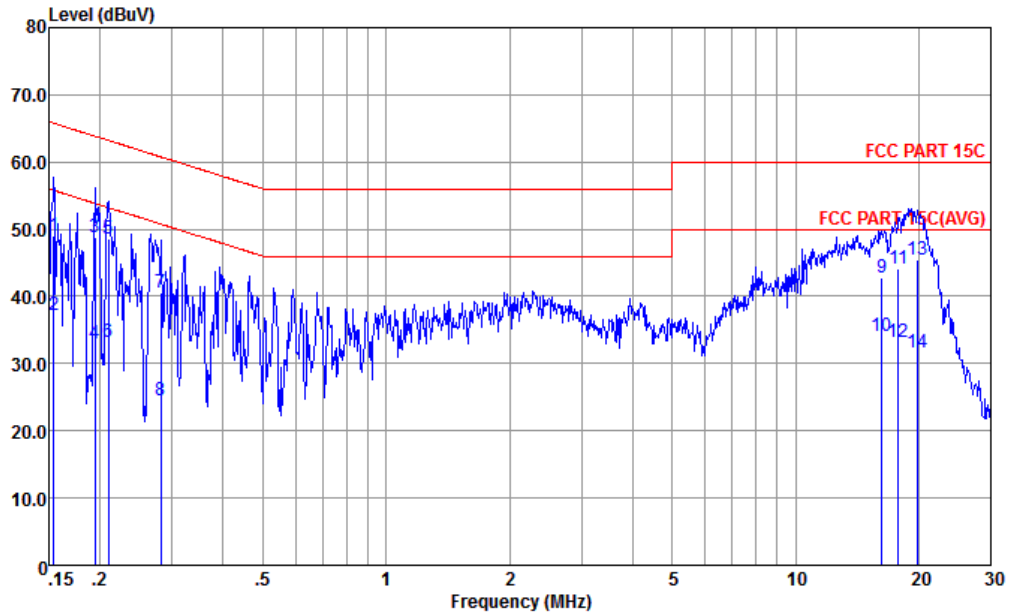

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-191028-060105 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.154	49.05	-16.73	65.78	38.50	0.08	10.47	QP
2	0.154	37.15	-18.63	55.78	26.60	0.08	10.47	Average
3	0.194	48.75	-15.09	63.84	38.30	0.08	10.37	QP
4	0.194	33.05	-20.79	53.84	22.60	0.08	10.37	Average
5	0.209	48.64	-14.59	63.23	38.20	0.08	10.36	QP
6	0.209	33.24	-19.99	53.23	22.80	0.08	10.36	Average
7	0.282	40.60	-20.16	60.76	30.19	0.09	10.32	QP
8	0.282	24.60	-26.16	50.76	14.19	0.09	10.32	Average
9	16.226	42.77	-17.23	60.00	31.91	0.44	10.42	QP
10	16.226	34.17	-15.83	50.00	23.31	0.44	10.42	Average
11	17.849	44.18	-15.82	60.00	33.20	0.53	10.45	QP
12	17.849	33.28	-16.72	50.00	22.30	0.53	10.45	Average
13 *	19.845	45.41	-14.59	60.00	34.30	0.62	10.49	QP
14	19.845	31.71	-18.29	50.00	20.60	0.62	10.49	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.69	56.23	-17.77	74	48.35	32	7.3	31.42	264	46	P	H
		2385.27	46.17	-7.83	54	38.28	32.03	7.28	31.42	264	46	A	H
	*	2412	106.85	-	-	98.79	32.13	7.34	31.41	264	46	P	H
	*	2412	102.62	-	-	94.56	32.13	7.34	31.41	264	46	A	H
		2386.96	57.07	-16.93	74	49.19	32	7.3	31.42	101	103	P	V
		2385.27	46.99	-7.01	54	39.1	32.03	7.28	31.42	101	103	A	V
	*	2412	107.25	-	-	99.19	32.13	7.34	31.41	101	103	P	V
	*	2412	103.83	-	-	95.77	32.13	7.34	31.41	101	103	A	V
802.11b CH 11 2462MHz		2486.08	57.89	-16.11	74	49.53	32.27	7.48	31.39	283	63	P	H
		2486.62	48.94	-5.06	54	40.58	32.27	7.48	31.39	283	63	A	H
	*	2462	109.07	-	-	100.7	32.33	7.44	31.4	283	63	P	H
	*	2460	105.79	-	-	97.42	32.33	7.44	31.4	283	63	A	H
		2483.62	59.5	-14.5	74	51.14	32.27	7.48	31.39	100	131	P	V
		2483.5	50.03	-3.97	54	41.67	32.27	7.48	31.39	100	131	A	V
	*	2462	109.48	-	-	101.11	32.33	7.44	31.4	100	131	P	V
	*	2460	106.21	-	-	97.84	32.33	7.44	31.4	100	131	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	51.44	-22.56	74	68.32	34.2	10.52	61.6	280	114	P	H
		4824	48.86	-5.14	54	65.74	34.2	10.52	61.6	280	114	A	H
		4824	53.38	-20.62	74	70.26	34.2	10.52	61.6	106	70	P	V
		4824	50.8	-3.2	54	67.68	34.2	10.52	61.6	106	70	A	V
802.11b CH 06 2437MHz		4872	46.98	-27.02	74	63.88	34.13	10.58	61.61	300	0	P	H
		7308	42.4	-31.6	74	54.51	36.6	13.62	62.33	300	0	P	H
		4872	46.17	-27.83	74	63.07	34.13	10.58	61.61	300	360	P	V
		7308	42.51	-31.49	74	54.62	36.6	13.62	62.33	300	360	P	V
802.11b CH 11 2462MHz		4926	48.5	-25.5	74	65.39	34.1	10.64	61.63	300	0	P	H
		7386	41.02	-32.98	74	53.31	36.5	13.58	62.37	300	0	P	H
		4926	51.61	-22.39	74	68.5	34.1	10.64	61.63	112	72	P	V
		4926	48.36	-5.64	54	65.25	34.1	10.64	61.63	112	72	A	V
		7386	41.42	-32.58	74	53.71	36.5	13.58	62.37	300	360	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.43	60.45	-13.55	74	52.57	32	7.3	31.42	331	53	P	H
		2389.95	49.08	-4.92	54	41.19	32	7.3	31.41	331	53	A	H
	*	2410	108	-	-	99.94	32.13	7.34	31.41	331	53	P	H
	*	2412	100.23	-	-	92.17	32.13	7.34	31.41	331	53	A	H
		2389.56	61.34	-12.66	74	53.46	32	7.3	31.42	126	100	P	V
		2389.95	50.68	-3.32	54	42.79	32	7.3	31.41	126	100	A	V
	*	2410	109.04	-	-	100.98	32.13	7.34	31.41	126	100	P	V
	*	2412	100.13	-	-	92.07	32.13	7.34	31.41	126	100	A	V
802.11g CH 11 2462MHz		2486.44	58.91	-15.09	74	50.55	32.27	7.48	31.39	126	349	P	H
		2483.5	47.86	-6.14	54	39.5	32.27	7.48	31.39	126	349	A	H
	*	2462	105.87	-	-	97.5	32.33	7.44	31.4	126	349	P	H
	*	2460	98.2	-	-	89.83	32.33	7.44	31.4	126	349	A	H
		2483.92	60.99	-13.01	74	52.63	32.27	7.48	31.39	123	123	P	V
		2483.5	50.68	-3.32	54	42.32	32.27	7.48	31.39	123	123	A	V
	*	2462	108.49	-	-	100.12	32.33	7.44	31.4	123	123	P	V
	*	2460	100.43	-	-	92.06	32.33	7.44	31.4	123	123	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 08 2447MHz		2485.42	59.31	-14.69	74	50.95	32.27	7.48	31.39	109	32	P	H
		2483.5	46.63	-7.37	54	38.27	32.27	7.48	31.39	109	32	A	H
	*	2450	110.29	-	-	101.88	32.4	7.41	31.4	109	32	P	H
	*	2448	101.61	-	-	93.2	32.4	7.41	31.4	109	32	A	H
		2483.92	59.8	-14.2	74	51.44	32.27	7.48	31.39	108	121	P	V
		2483.5	46.71	-7.29	54	38.35	32.27	7.48	31.39	108	121	A	V
	*	2450	111.67	-	-	103.26	32.4	7.41	31.4	108	121	P	V
	*	2450	103.07	-	-	94.66	32.4	7.41	31.4	108	121	A	V
802.11g CH 09 2452MHz		2483.68	59.63	-14.37	74	51.27	32.27	7.48	31.39	288	66	P	H
		2483.5	48.9	-5.1	54	40.54	32.27	7.48	31.39	288	66	A	H
	*	2456	110.49	-	-	102.12	32.33	7.44	31.4	288	66	P	H
	*	2454	102.23	-	-	93.86	32.33	7.44	31.4	288	66	A	H
		2483.92	61.29	-12.71	74	52.93	32.27	7.48	31.39	108	113	P	V
		2483.5	50.27	-3.73	54	41.91	32.27	7.48	31.39	108	113	A	V
	*	2452	111.07	-	-	102.66	32.4	7.41	31.4	108	113	P	V
	*	2452	103.47	-	-	95.06	32.4	7.41	31.4	108	113	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 02 2417MHz		2389.82	59.69	-14.31	74	51.8	32	7.3	31.41	193	38	P	H
		2389.95	47.4	-6.6	54	39.51	32	7.3	31.41	193	38	A	H
	*	2420	108.36	-	-	100.12	32.27	7.37	31.4	193	38	P	H
	*	2416	100	-	-	91.93	32.13	7.34	31.4	193	38	A	H
		2389.17	59.76	-14.24	74	51.88	32	7.3	31.42	150	119	P	V
		2389.95	47.72	-6.28	54	39.83	32	7.3	31.41	150	119	A	V
	*	2416	109.24	-	-	101.17	32.13	7.34	31.4	150	119	P	V
	*	2416	100.22	-	-	92.15	32.13	7.34	31.4	150	119	A	V
802.11g CH 10 2457MHz		2485	58.92	-15.08	74	50.56	32.27	7.48	31.39	127	351	P	H
		2483.5	47.77	-6.23	54	39.41	32.27	7.48	31.39	127	351	A	H
	*	2460	107.89	-	-	99.52	32.33	7.44	31.4	127	351	P	H
	*	2458	98.85	-	-	90.48	32.33	7.44	31.4	127	351	A	H
		2483.68	61.48	-12.52	74	53.12	32.27	7.48	31.39	104	116	P	V
		2483.5	50.08	-3.92	54	41.72	32.27	7.48	31.39	104	116	A	V
	*	2460	108.92	-	-	100.55	32.33	7.44	31.4	104	116	P	V
	*	2456	100.61	-	-	92.24	32.33	7.44	31.4	104	116	A	V

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	46.98	-27.02	74	63.86	34.2	10.52	61.6	300	0	P	H
		4824	47.97	-26.03	74	64.85	34.2	10.52	61.6	300	360	P	V
802.11g CH 06 2437MHz		4872	41.76	-32.24	74	58.66	34.13	10.58	61.61	300	0	P	H
		7308	42.91	-31.09	74	55.02	36.6	13.62	62.33	300	0	P	H
		4872	42.63	-31.37	74	59.53	34.13	10.58	61.61	300	360	P	V
802.11g CH 11 2462MHz		7308	42.66	-31.34	74	54.77	36.6	13.62	62.33	300	360	P	V
		4926	40.96	-33.04	74	57.85	34.1	10.64	61.63	300	0	P	H
		7386	41.87	-32.13	74	54.16	36.5	13.58	62.37	300	0	P	H
		4926	41.2	-32.8	74	58.09	34.1	10.64	61.63	300	360	P	V
802.11g CH 08 2447MHz		7386	41.63	-32.37	74	53.92	36.5	13.58	62.37	300	360	P	V
		4896	40.26	-33.74	74	57.18	34.1	10.6	61.62	300	0	P	H
		7344	41.7	-32.3	74	53.84	36.6	13.61	62.35	300	0	P	H
		4896	40.09	-33.91	74	57.01	34.1	10.6	61.62	300	360	P	V
802.11g CH 09 2452MHz		7344	42.66	-31.34	74	54.8	36.6	13.61	62.35	300	360	P	V
		4902	39.76	-34.24	74	56.66	34.1	10.62	61.62	300	0	P	H
		7356	42.15	-31.85	74	54.31	36.6	13.6	62.36	300	0	P	H
		4902	40.97	-33.03	74	57.87	34.1	10.62	61.62	300	360	P	V
802.11g CH 02 2417MHz		7356	42.15	-31.85	74	54.31	36.6	13.6	62.36	300	360	P	V
		4836	46.55	-27.45	74	63.41	34.2	10.54	61.6	300	0	P	H
802.11g CH 10 2417MHz		4836	47.43	-26.57	74	64.29	34.2	10.54	61.6	300	360	P	V
		4914	40.38	-33.62	74	57.28	34.1	10.62	61.62	300	0	P	H
		7371	42.79	-31.21	74	55.01	36.55	13.59	62.36	300	0	P	H
		4914	40.94	-33.06	74	57.84	34.1	10.62	61.62	300	360	P	V
Remark		7368	41.34	-32.66	74	53.56	36.55	13.59	62.36	300	360	P	V
	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2388.52	62.15	-11.85	74	54.27	32	7.3	31.42	259	58	P	H
		2389.95	49.97	-4.03	54	42.08	32	7.3	31.41	259	58	A	H
	*	2412	106.58	-	-	98.52	32.13	7.34	31.41	259	58	P	H
	*	2412	98.47	-	-	90.41	32.13	7.34	31.41	259	58	A	H
		2388.39	62.13	-11.87	74	54.25	32	7.3	31.42	100	100	P	V
		2389.95	50.16	-3.84	54	42.27	32	7.3	31.41	100	100	A	V
	*	2412	107.56	-	-	99.5	32.13	7.34	31.41	100	100	P	V
	*	2412	99.12	-	-	91.06	32.13	7.34	31.41	100	100	A	V
802.11n HT20 CH 11 2462MHz		2483.5	61.51	-12.49	74	53.15	32.27	7.48	31.39	315	61	P	H
		2483.5	50.03	-3.97	54	41.67	32.27	7.48	31.39	315	61	A	H
	*	2464	106.09	-	-	97.72	32.33	7.44	31.4	315	61	P	H
	*	2460	97.98	-	-	89.61	32.33	7.44	31.4	315	61	A	H
		2483.74	62.22	-11.78	74	53.86	32.27	7.48	31.39	100	118	P	V
		2483.5	50.76	-3.24	54	42.4	32.27	7.48	31.39	100	118	A	V
	*	2462	107.5	-	-	99.13	32.33	7.44	31.4	100	118	P	V
	*	2460	99.23	-	-	90.86	32.33	7.44	31.4	100	118	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 08 2447MHz		2387.48	56.42	-17.58	74	48.54	32	7.3	31.42	110	32	P	H
		2389.95	44.99	-9.01	54	37.1	32	7.3	31.41	110	32	A	H
	*	2450	109.64	-	-	101.23	32.4	7.41	31.4	110	32	P	H
	*	2450	101.21	-	-	92.8	32.4	7.41	31.4	110	32	A	H
		2486.14	61.33	-12.67	74	52.97	32.27	7.48	31.39	110	32	P	H
		2483.5	47.74	-6.26	54	39.38	32.27	7.48	31.39	110	32	A	H
		2382.67	56.13	-17.87	74	48.24	32.03	7.28	31.42	107	123	P	V
		2389.82	44.92	-9.08	54	37.03	32	7.3	31.41	107	123	A	V
	*	2452	110.57	-	-	102.16	32.4	7.41	31.4	107	123	P	V
	*	2450	102.18	-	-	93.77	32.4	7.41	31.4	107	123	A	V
		2483.56	60.21	-13.79	74	51.85	32.27	7.48	31.39	107	123	P	V
		2483.5	47.71	-6.29	54	39.35	32.27	7.48	31.39	107	123	A	V
802.11n HT20 CH 09 2452MHz		2483.86	59.03	-14.97	74	50.67	32.27	7.48	31.39	141	70	P	H
		2483.5	48.14	-5.86	54	39.78	32.27	7.48	31.39	141	70	A	H
	*	2454	109.68	-	-	101.31	32.33	7.44	31.4	141	70	P	H
	*	2454	101.12	-	-	92.75	32.33	7.44	31.4	141	70	A	H
		2485.18	61.4	-12.6	74	53.04	32.27	7.48	31.39	112	125	P	V
		2483.5	50.21	-3.79	54	41.85	32.27	7.48	31.39	112	125	A	V
	*	2454	109.62	-	-	101.25	32.33	7.44	31.4	112	125	P	V
*	2454	101.6	-	-	93.23	32.33	7.44	31.4	112	125	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 02 2417MHz		2388.13	58.83	-15.17	74	50.95	32	7.3	31.42	115	33	P	H
		2389.95	47.6	-6.4	54	39.71	32	7.3	31.41	115	33	A	H
	*	2416	107.37	-	-	99.3	32.13	7.34	31.4	115	33	P	H
	*	2416	99.15	-	-	91.08	32.13	7.34	31.4	115	33	A	H
		2388.78	57.8	-16.2	74	49.92	32	7.3	31.42	127	117	P	V
		2389.95	47.46	-6.54	54	39.57	32	7.3	31.41	127	117	A	V
	*	2416	107.27	-	-	99.2	32.13	7.34	31.4	127	117	P	V
802.11n HT20 CH 10 2457MHz		2483.74	62.24	-11.76	74	53.88	32.27	7.48	31.39	279	51	P	H
		2483.5	50.58	-3.42	54	42.22	32.27	7.48	31.39	279	51	A	H
	*	2458	109.14	-	-	100.77	32.33	7.44	31.4	279	51	P	H
	*	2458	101.33	-	-	92.96	32.33	7.44	31.4	279	51	A	H
		2483.74	62.34	-11.66	74	53.98	32.27	7.48	31.39	100	120	P	V
		2483.5	50.52	-3.48	54	42.16	32.27	7.48	31.39	100	120	A	V
	*	2456	108.13	-	-	99.76	32.33	7.44	31.4	100	120	P	V
*	2458	99.71	-	-	91.34	32.33	7.44	31.4	100	120	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	46.61	-27.39	74	63.49	34.2	10.52	61.6	300	0	P	H
		4824	49.16	-24.84	74	66.04	34.2	10.52	61.6	300	360	P	V
802.11n HT20 CH 06 2437MHz		4872	41.95	-32.05	74	58.85	34.13	10.58	61.61	300	0	P	H
		7308	42.8	-31.2	74	54.91	36.6	13.62	62.33	300	0	P	H
		4872	41.76	-32.24	74	58.66	34.13	10.58	61.61	300	360	P	V
		7308	42.87	-31.13	74	54.98	36.6	13.62	62.33	300	360	P	V
802.11n HT20 CH 11 2462MHz		4926	40.38	-33.62	74	57.27	34.1	10.64	61.63	300	0	P	H
		7386	41.9	-32.1	74	54.19	36.5	13.58	62.37	300	0	P	H
		4926	41.08	-32.92	74	57.97	34.1	10.64	61.63	300	360	P	V
		7386	41.4	-32.6	74	53.69	36.5	13.58	62.37	300	360	P	V
802.11n HT20 CH 08 2447MHz		4896	40.26	-33.74	74	57.18	34.1	10.6	61.62	300	0	P	H
		7428	41.18	-32.82	74	53.56	36.43	13.58	62.39	300	0	P	H
		4896	40.09	-33.91	74	57.01	34.1	10.6	61.62	300	360	P	V
		7428	41.63	-32.37	74	54.01	36.43	13.58	62.39	300	360	P	V
802.11n HT20 CH 09 2452MHz		4902	39.76	-34.24	74	56.66	34.1	10.62	61.62	300	0	P	H
		7356	42.15	-31.85	74	54.31	36.6	13.6	62.36	300	0	P	H
		4902	40.97	-33.03	74	57.87	34.1	10.62	61.62	300	360	P	V
		7356	42.15	-31.85	74	54.31	36.6	13.6	62.36	300	360	P	V
802.11n HT20 CH 02 2417MHz		4836	46.7	-27.3	74	63.56	34.2	10.54	61.6	300	0	P	H
		4836	44.06	-29.94	74	60.92	34.2	10.54	61.6	300	360	P	V
802.11n HT20 CH 10 2457MHz		4914	41.8	-32.2	74	58.7	34.1	10.62	61.62	300	0	P	H
		7371	41.86	-32.14	74	54.08	36.55	13.59	62.36	300	0	P	H
		4914	40.91	-33.09	74	57.81	34.1	10.62	61.62	300	360	P	V
		7368	41.45	-32.55	74	53.67	36.55	13.59	62.36	300	360	P	V



Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		55.22	16.03	-23.97	40	33.49	13.2	1.29	31.95	-	-	P	H
		112.45	18.48	-25.02	43.5	30.99	17.7	1.72	31.93	-	-	P	H
		174.53	24.06	-19.44	43.5	38.44	15.44	2.1	31.92	100	0	P	H
		259.89	17.56	-28.44	46	27.2	19.8	2.54	31.98	-	-	P	H
		404.42	19.81	-26.19	46	27	21.79	3.14	32.12	-	-	P	H
		556.71	22.07	-23.93	46	27.15	24.12	3.15	32.35	-	-	P	H
		46.49	23.4	-16.6	40	38.65	15.5	1.19	31.94	200	360	P	V
		98.87	20.72	-22.78	43.5	34.33	16.69	1.63	31.93	-	-	P	V
		173.56	25.54	-17.96	43.5	39.9	15.47	2.09	31.92	-	-	P	V
		256.98	18.44	-27.56	46	28.44	19.46	2.52	31.98	-	-	P	V
		324.88	20.31	-25.69	46	29.7	19.83	2.82	32.04	-	-	P	V
		457.77	21.15	-24.85	46	27.33	22.74	3.31	32.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:


- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.28	-	-	10Hz
802.11n HT20	98.16	-	-	10Hz

802.11b

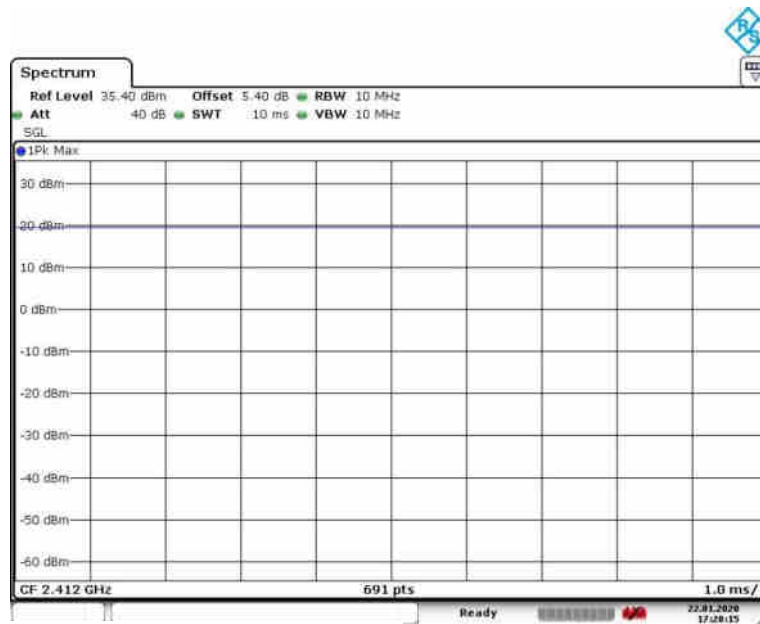



802.11g

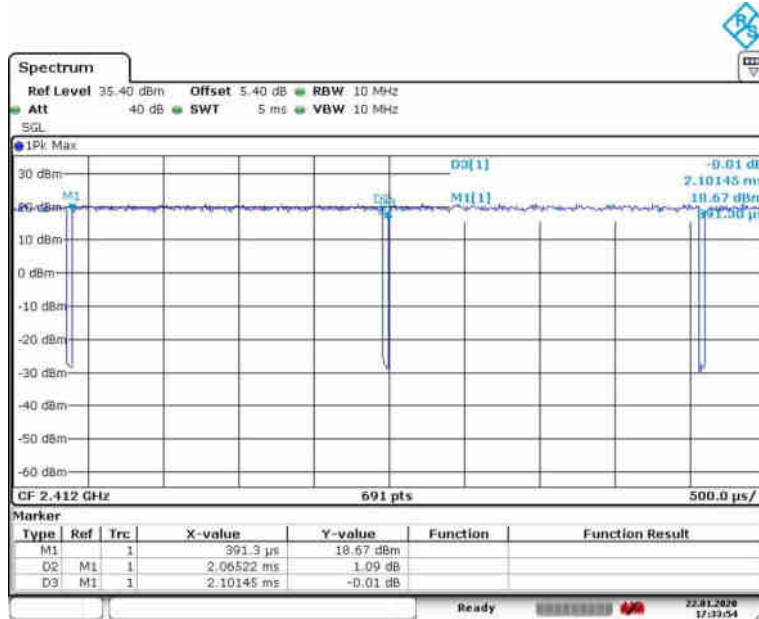

802.11n HT20

