

Appendix D. SAR Test Setup Photos




Right Cheek



Right Tilted



Left Cheek

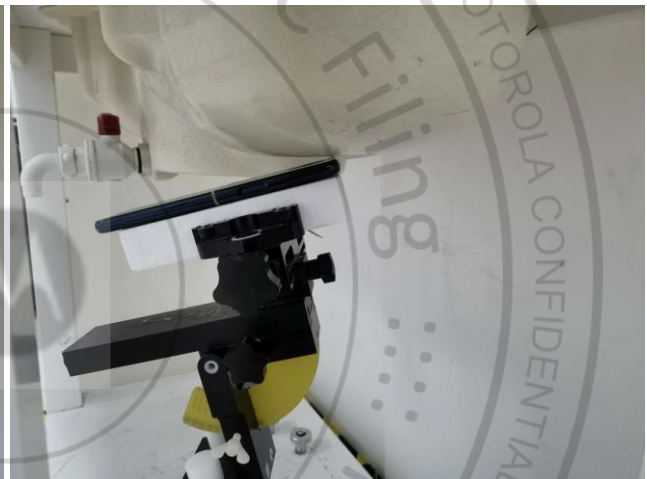

Left Tilted



Front, Test Separation 5 mm



Back, Test Separation 5 mm



Left Side, Test Separation 5 mm




Right Side, Test Separation 5 mm



Top Side, Test Separation 5 mm




Bottom Side, Test Separation 5 mm

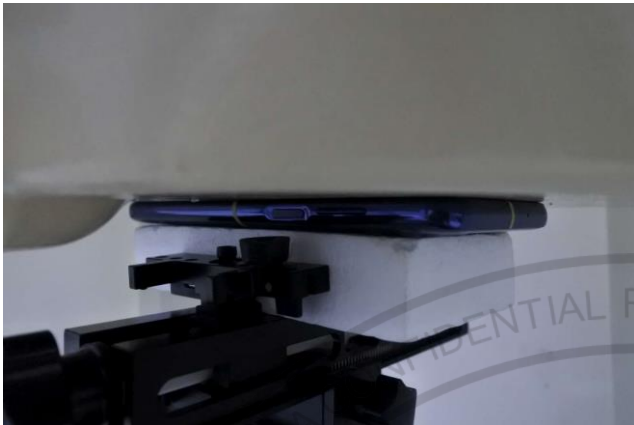

Front, Test Separation 0 mm




Back, Test Separation 0 mm

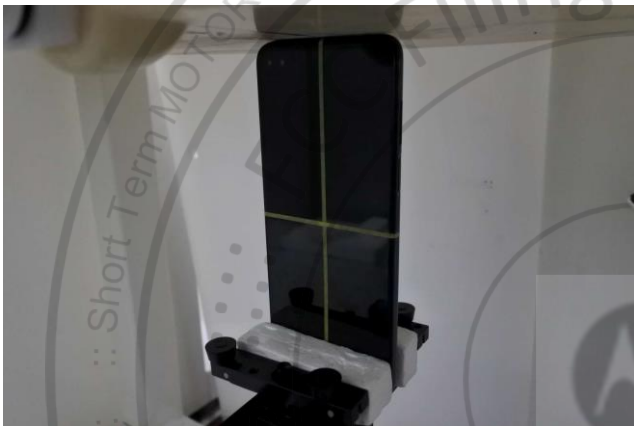

Top Side, Test Separation 0 mm



Bottom Side, Test Separation 0 mm

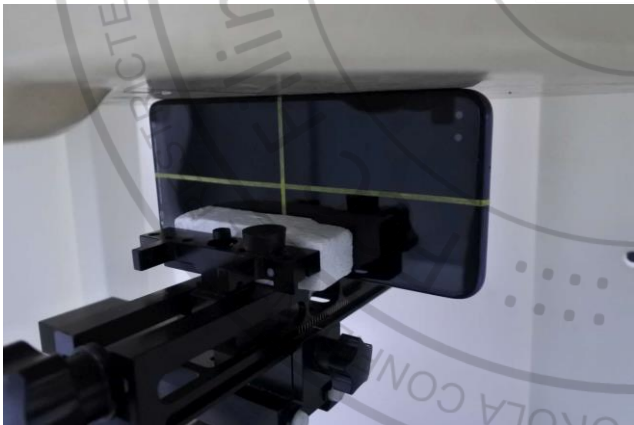

Left Side, Test Separation 0 mm




Right Side, Test Separation 0 mm



Front, Test Separation 19 mm




Back, Test Separation 25 mm

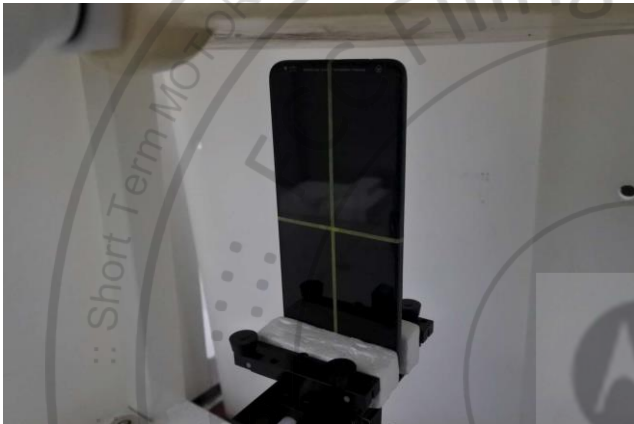

Bottom Side, Test Separation 10 mm




Back, Test Separation 9 mm

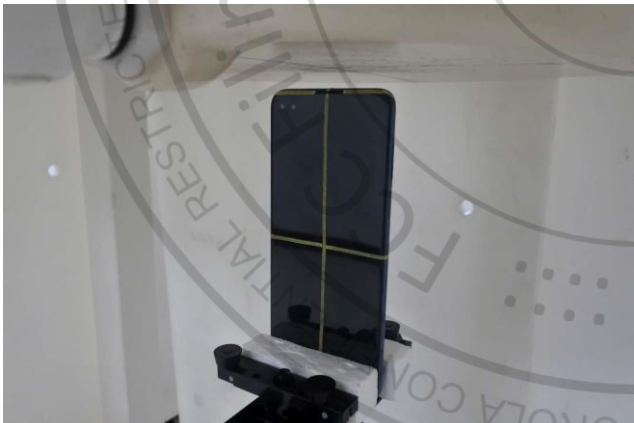

Top Side, Test Separation 10 mm

Antenna Location

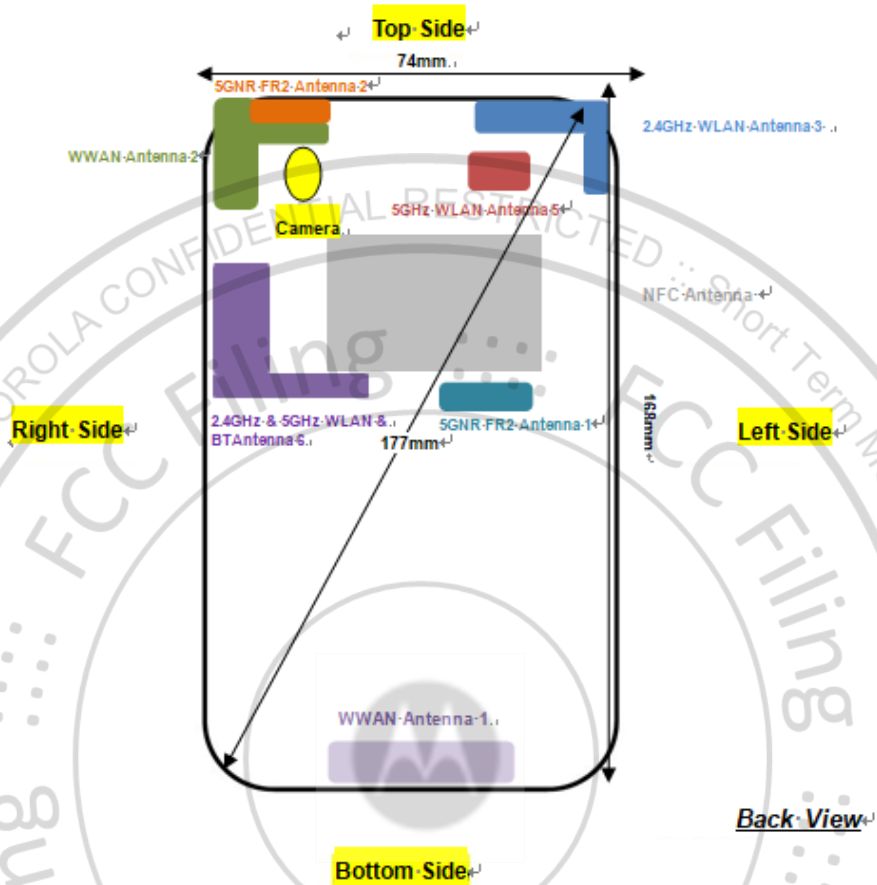

Note:

1. 5G NR FR2 Antenna 1/2 frequency band include 5G NR FR2 n260 / n261.
2. WWAN antenna 1 is located at the bottom edge of the device.
3. WWAN antenna 2 is located at the right side of top edge of the device.
4. 2.4GHz WLAN Antenna 3 is located at the left-top of the device
5. 5GHz WLAN Antenna 5 is located at the left-top of the device
6. 2.4GHz & 5GHz WLAN & BT Antenna 6 is located at the right-top of the device
7. Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
8. WWAN Ant1 and Ant 2 can't transmit simultaneously.