FCC RF Test Report

APPLICANT : Motorola Mobility LLC EQUIPMENT : Mobile Cellular Phone

BRAND NAME : Motorola

MODEL NAME : XT2075-2

FCC ID : IHDT56ZC2

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 27, 2020 and completely tested on Jul. 13, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

JasonJia

Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 1 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAR	Y OF TEST RESULT	4
1	GENE	ERAL DESCRIPTION	5
•	1.1 1.2 1.3 1.4 1.5 1.6 1.7	Applicant	
	1.8 1.9 1.10	Test Software	7
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	8
	2.12.22.32.42.5	Test Mode Connection Diagram of Test System Support Unit used in test configuration and system Measurement Results Explanation Example Frequency List of Low/Middle/High Channels	g
3	TEST	RESULT	11
	3.1 3.2 3.3 3.4 3.5 3.6	Conducted Output Power Measurement	12 13 15
4	LIST	OF MEASURING EQUIPMENT	20
	PEND	ERTAINTY OF EVALUATION	21
ΑP	PEND	IX B. TEST RESULTS OF RADIATED TEST	

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 2 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW051103-02B	Rev. 01	Initial issue of report	Jul. 17, 2020

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 3 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule Description		Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 42.80 dB at 2444.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 4 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2075-2
FCC ID	IHDT56ZC2
	GSM/CDMA/WCDMA/LTE/NFC/5G NR
	WLAN 2.4GHz 802.11b/g/n HT20
EUT cumparts Badies application	WLAN 5GHz 802.11a/n HT20/HT40
EUT supports Radios application	WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
	Bluetooth BR/EDR/LE
	FM Receiver and GNSS
IMEI Code	Conducted: N/A
IMEI Code	Radiation: 353613110012518
HW Version	DVT2
SW Version	QPN30.37
EUT Stage	Identical Prototype

Report No.: FW051103-02B

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	814.7 ~ 823.3 MHz						
Rx Frequency	859.7 ~ 868.3 MHz						
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz						
Maximum Output Power to Antenna	23.21 dBm						
Antenna Gain	-3.0 dBi						
Antenna Type	PIFA Antenna						
Type of Modulation	QPSK / 16QAM / 64QAM						

 Sporton International (Kunshan) Inc.
 Page Number
 : 5 of 21

 TEL: +86-512-57900158
 Report Issued Date
 : Jul. 17, 2020

 FAX: +86-512-57900958
 Report Version
 : Rev. 01

FCC ID : IHDT56ZC2 Report Template No.: BU5-FWLTE Version 2.0

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

	Specification of Accessory								
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-201					
AC Adapter 2 Brand Name		Motorola(Acbel)	Model Name	MC-201					
Battery	Brand Name	Motorola(Amperex)	Model Name	LZ50					
USB Cable 1	Brand Name	Motorola(Luxshare)	Model Name	SC18C24368					
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	SC18C24367					

1.7 Maximum Conducted Power, Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M10G7D	0.2056
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M10W7D	0.1400
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M10W7D	0.1469
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M72G7D	0.2089
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M75W7D	0.1758
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M74W7D	0.1466
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M51G7D	0.2094
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M51W7D	0.1754
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M49W7D	0.1445
Part 90S	LTE Band 26	QPSK	10 MHz	0.0042	8M99G7D	0.2018
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M01W7D	0.1730
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M01W7D	0.1452
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M4G7D	0.2084
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M4W7D	0.1774
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M4W7D	0.1452

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 6 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.8 Testing Site

<FCC>-KS

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.							
	No. 1098, Pengxi North Road, Kunshan Economic Development Zone							
Test Site Location	Jiangsu Province 215300 People's Republic of China							
Test Site Location	TEL: +86-512-57900158							
	FAX: +86-512-57900958							
	Sporton Site No.	FCC Designation No.	FCC Test Firm					
Test Site No.	Sporton Site No.	rec besignation No.	Registration No.					
	03CH04-KS TH01-KS	CN1257	314309					

1.9 Test Software

Item	Site	Manufacture	Name	Version	
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a	

1.10 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 7 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

Test Configuration of Equipment Under Test

Test Mode 2.1

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

			Ва	ndwid	lth (Mi	Hz)		Modulation		RB#			Test Channel			
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
Max. Output Power	26	v	٧	٧	٧	٧	-	v	٧	v	>	v	v	٧	٧	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v	v			v	v	v	v
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	٧	٧	٧	-	v	v	v	٧			v	v	v
Frequency Stability	26				v		-	v					v		v	
Radiated Spurious Emission	26			v	v	-	-	v			v			v	v	v
Note	 The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies 															


falls within part 22 also complies.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2

: 8 of 21 Page Number Report Issued Date: Jul. 17, 2020 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

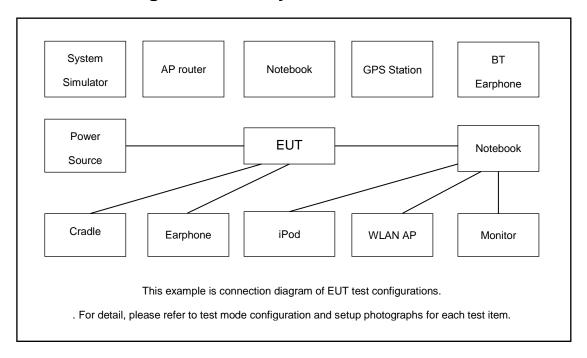

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord	
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

The following shows an offset computation example with RF cable loss 4.60 dB.

Example:

 $Offset(dB) = RF \ cable \ loss(dB).$

= 4.60 (dB)

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 9 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest				
15	Channel	26765	-	-				
15	Frequency	821.5	-	-				
10	Channel	-	26740	-				
10	Frequency	-	819	-				
5	Channel	26715	26740	26765				
5	Frequency	816.5	819	821.5				
3	Channel	26705	26740	26775				
3	Frequency	815.5	819	822.5				
1.4	Channel	26697	26740	26783				
1.4	Frequency	814.7	819	823.3				

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 10 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 11 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

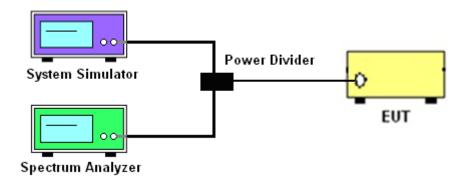

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 12 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

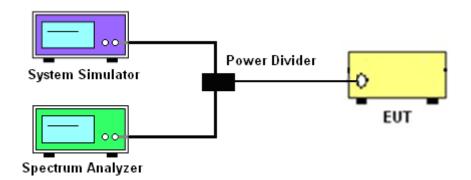

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 14 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

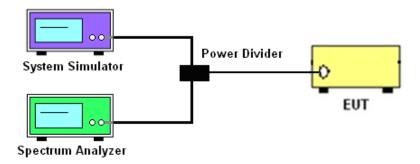

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 15 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 16 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 2.0

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

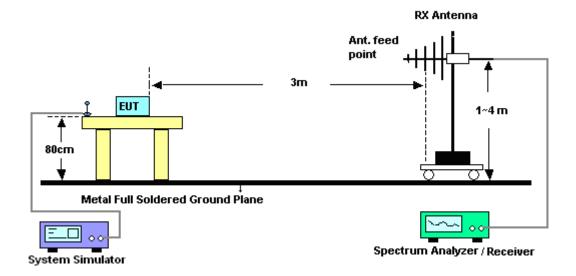

For radiated test above 1GHz

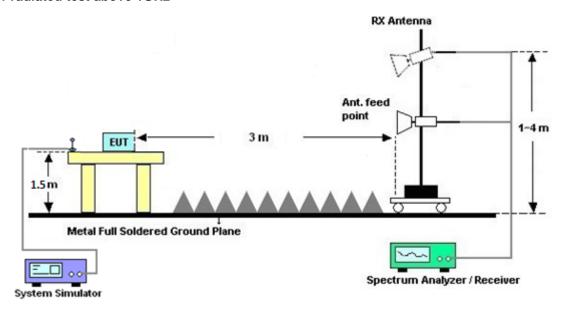

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 17 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

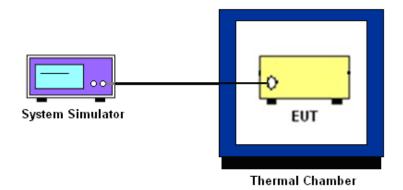

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 19 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Jun. 19, 2020~ Jun. 20, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Nov. 18, 2019	Jun. 19, 2020~ Jun. 20, 2020	Nov. 17, 2020	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Jul. 13, 2020	Apr. 14, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 08, 2020	Jul. 13, 2020	Jun. 07, 2021	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 20, 2020	Jul. 13, 2020	Apr. 19, 2021	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	18GHz~40GHz Nov. 10, 2019	Jul. 13, 2020	Nov. 09, 2020	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Jul. 13, 2020	Aug. 05, 2020	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz Jan. 08, 2020		Jul. 13, 2020	Jan. 07, 2021	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Aug. 16, 2019	Jul. 13, 2020	Aug. 15, 2020	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 15, 2019	Jul. 13, 2020	Oct. 14, 2020	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 13, 2020	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 13, 2020	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 13, 2020	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 20 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

í		
	Measuring Uncertainty for a Level of	3.3dB
	Confidence of 95% (U = 2Uc(y))	3.3ub

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	7 0 A D
Confidence of 95% (U = 2Uc(y))	2.8dB

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : 21 of 21
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
15	1	0		23.19							
15	1	37		23.01							
15	1	74		22.97							
15	36	0	QPSK	22.06							
15	36	20		22.16							
15	36	39		22.07							
15	75	0		22.09							
15	1	0		22.49							
15	1	37		22.35							
15	1	74		22.29							
15	36	0	16-QAM	21.15	-	-					
15	36	20		21.27							
15	36	39		21.18							
15	75	0		21.25							
15	1	0		21.62							
15	1	37		21.42							
15	1	74		21.30							
15	36	0	64-QAM	20.34							
15	36	20		20.47							
15	36	39		20.37							
15	75	0		20.43							

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A1 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0			23.05	
10	1	25			23.01	
10	1	49			22.93	
10	25	0	QPSK		21.98	
10	25	12			22.04	
10	25	25			22.04	
10	50	0			21.93	
10	1	0			22.38	
10	1	25			22.29	
10	1	49			22.27	
10	25	0	16-QAM	-	21.07	-
10	25	12			21.15	
10	25	25			21.15	
10	50	0			21.05	
10	1	0			21.62	
10	1	25			21.61	
10	1	49			21.56	
10	25	0	64-QAM		20.26	
10	25	12			20.38	
10	25	25			20.36	
10	50	0			20.27	

Page Number : A2 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0		23.09	22.93	22.82
5	1	12		<mark>23.21</mark>	22.98	22.81
5	1	24		23.03	22.98	22.74
5	12	0	QPSK	22.22	21.99	21.88
5	12	7		22.28	22.10	21.88
5	12	13		22.23	22.06	21.82
5	25	0		22.05	21.96	21.80
5	1	0		22.39	22.25	22.13
5	1	12		22.44	22.26	22.06
5	1	24		22.37	22.28	22.04
5	12	0	16-QAM	21.32	21.13	20.98
5	12	7		21.40	21.23	21.02
5	12	13		21.34	21.17	20.98
5	25	0		21.32	21.11	20.97
5	1	0		21.53	21.40	21.30
5	1	12		21.60	21.40	21.20
5	1	24		21.51	21.43	21.17
5	12	0	64-QAM	20.53	20.27	20.15
5	12	7		20.57	20.38	20.20
5	12	13		20.49	20.34	20.09
5	25	0		20.54	20.30	20.17

Page Number : A3 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		23.13	22.92	22.76
3	1	8		23.20	22.98	22.79
3	1	14		23.08	22.93	22.71
3	8	0	QPSK	22.20	21.94	21.78
3	8	4		22.24	22.03	21.85
3	8	7		22.21	22.02	21.79
3	15	0		22.23	21.96	21.82
3	1	0		22.41	22.23	22.07
3	1	8		22.45	22.29	22.07
3	1	14		22.39	22.25	22.03
3	8	0	16-QAM	21.40	21.15	20.97
3	8	4		21.43	21.25	21.02
3	8	7		21.36	21.16	20.96
3	15	0		21.35	21.10	20.95
3	1	0		21.60	21.41	21.29
3	1	8		21.66	21.36	21.18
3	1	14		21.65	21.46	21.20
3	8	0	64-QAM	20.57	20.29	20.15
3	8	4		20.59	20.37	20.16
3	8	7		20.57	20.37	20.13
3	15	0		20.53	20.27	20.10

Page Number : A4 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01


	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
1.4	1	0		23.07	22.87	22.82				
1.4	1	3		23.13	22.91	22.68				
1.4	1	5		23.03	22.83	22.92				
1.4	3	0	QPSK	23.06	22.88	22.63				
1.4	3	1		23.12	22.89	22.70				
1.4	3	3		23.07	22.85	22.63				
1.4	6	0		22.17	21.96	21.71				
1.4	1	0		21.37	21.22	21.35				
1.4	1	3		21.46	21.25	21.04				
1.4	1	5		21.38	21.18	21.33				
1.4	3	0	16-QAM	21.17	21.33	21.32				
1.4	3	1		21.21	21.44	21.42				
1.4	3	3		21.14	21.35	21.33				
1.4	6	0		21.21	20.99	20.76				
1.4	1	0		21.65	21.51	21.18				
1.4	1	3		21.67	21.49	21.24				
1.4	1	5		21.66	21.43	21.21				
1.4	3	0	64-QAM	21.49	21.27	21.07				
1.4	3	1		21.51	21.31	21.11				
1.4	3	3		21.48	21.27	21.03				
1.4	6	0		20.45	20.24	20.01				

Page Number : A5 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01


Peak-to-Average Ratio

Mode					
Mod.	QP	SK	160	Limit: 13dB	
RB Size	1RB Full RB		1RB	Full RB	Result
Lowest CH	-	-	-	-	
Middle CH	3.51	5.10	5.39	6.00	PASS
Highest CH	-	-	-	-	
Mode		LTE Band	26 / 10MHz		
Mod.	64C	AM			Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	
Middle CH	6.81	6.46	-	-	PASS
Highest CH	-	-	-	-]

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A6 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

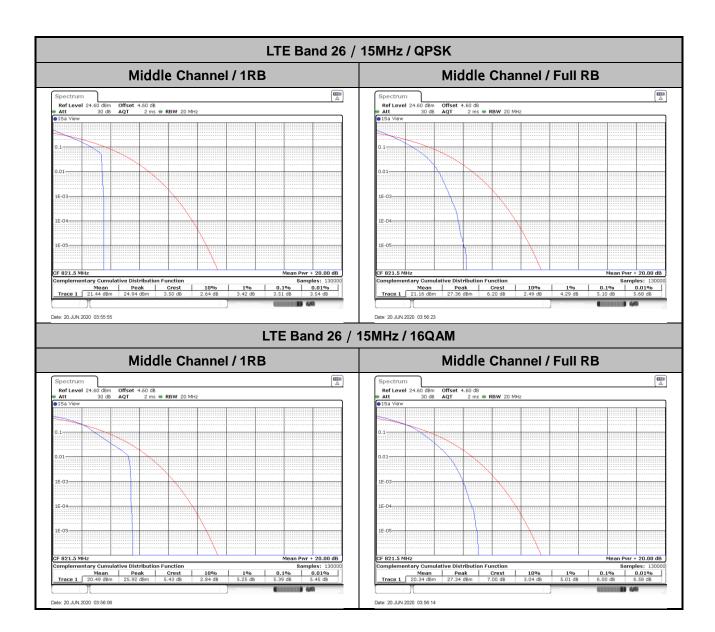

Page Number : A7 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

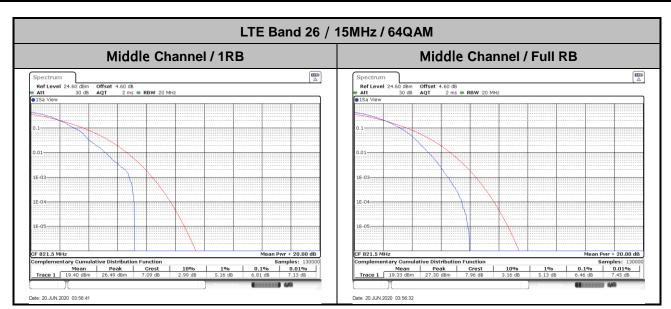


Page Number : A8 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

26dB Bandwidth


Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	ИНz	3M	lHz	5M	5MHz		10MHz		ИHz	20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.22	1.23	2.98	3.00	4.89	4.91	-	-	14.24	14.18	-	-
Middle CH	1.23	1.22	3.01	3.02	4.83	4.81	9.85	9.77	-	-	-	-
Highest CH	1.22	1.21	3.03	3.06	4.86	4.90	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4	ИНz	3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.24	-	3.02	-	4.87	-	-	-	14.33	-	-	-
Middle CH	1.23	-	2.97	-	4.91	-	9.69	-	-	-	-	-
Highest CH	1.21	-	2.98	-	4.97	-	-	-	-	-	-	-

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A9 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

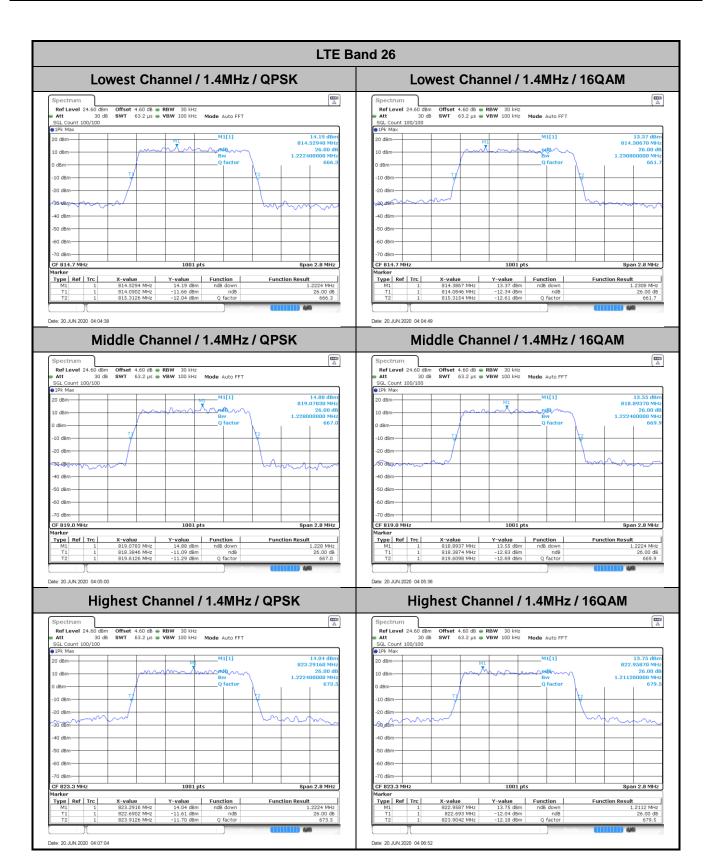


Page Number : A10 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

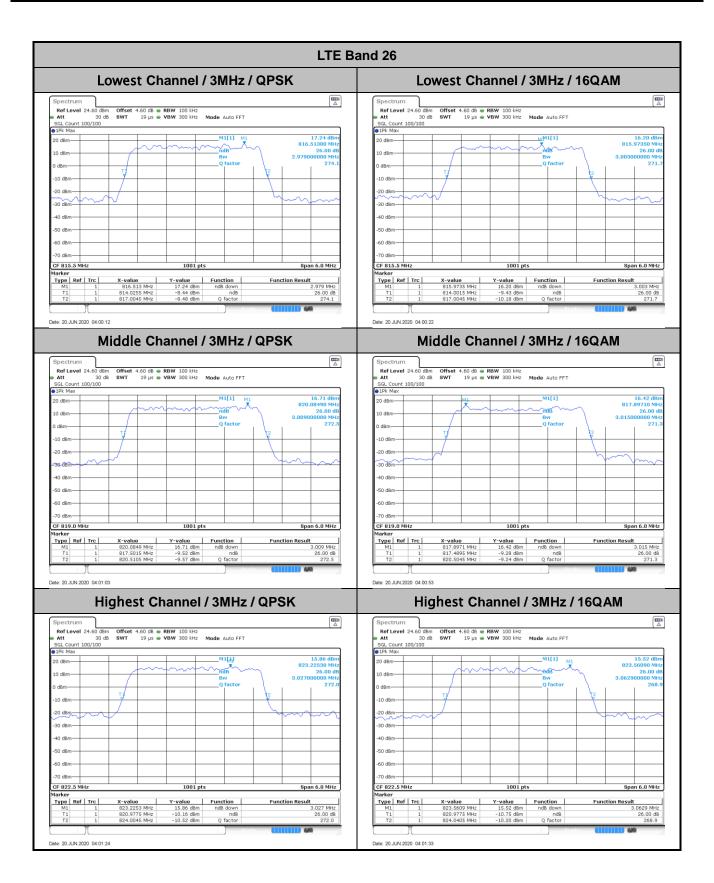


Page Number : A11 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

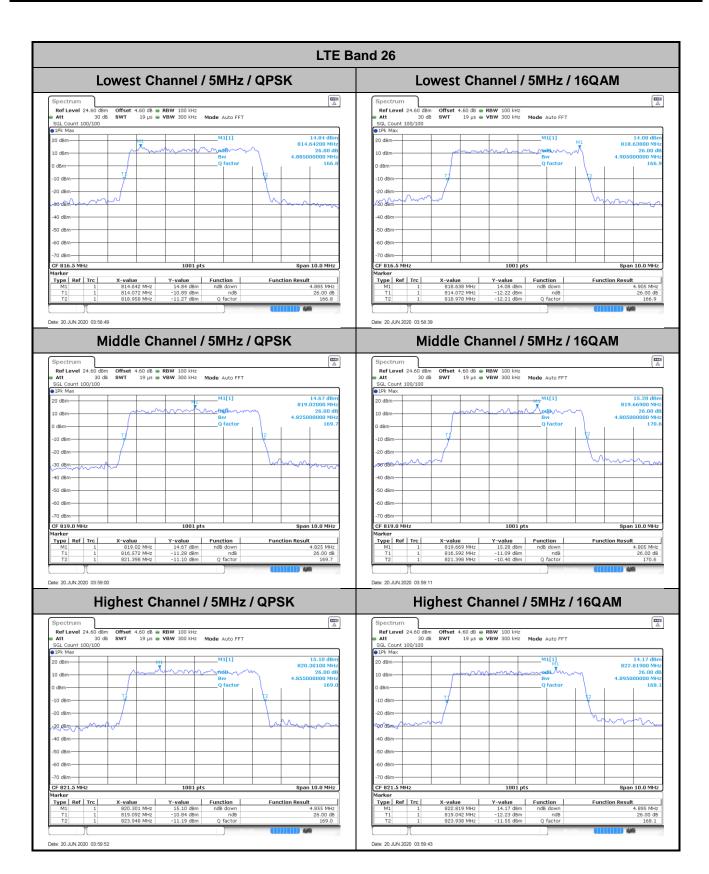


Page Number : A12 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

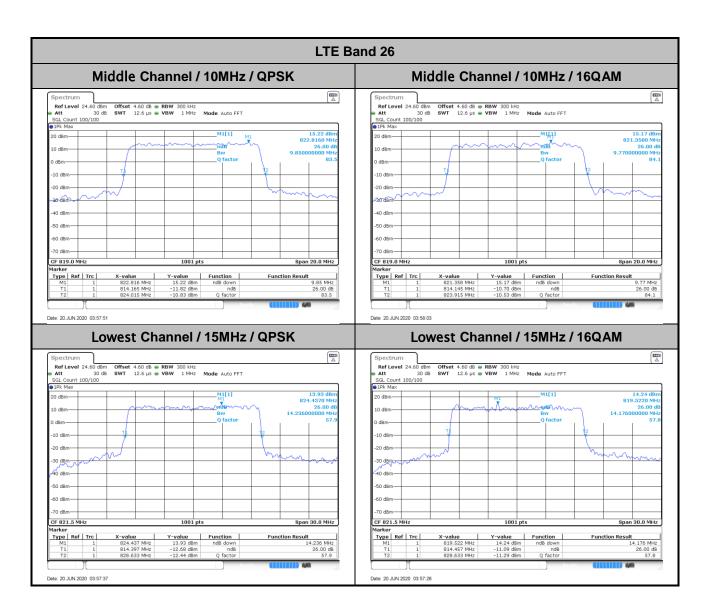

Page Number : A13 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

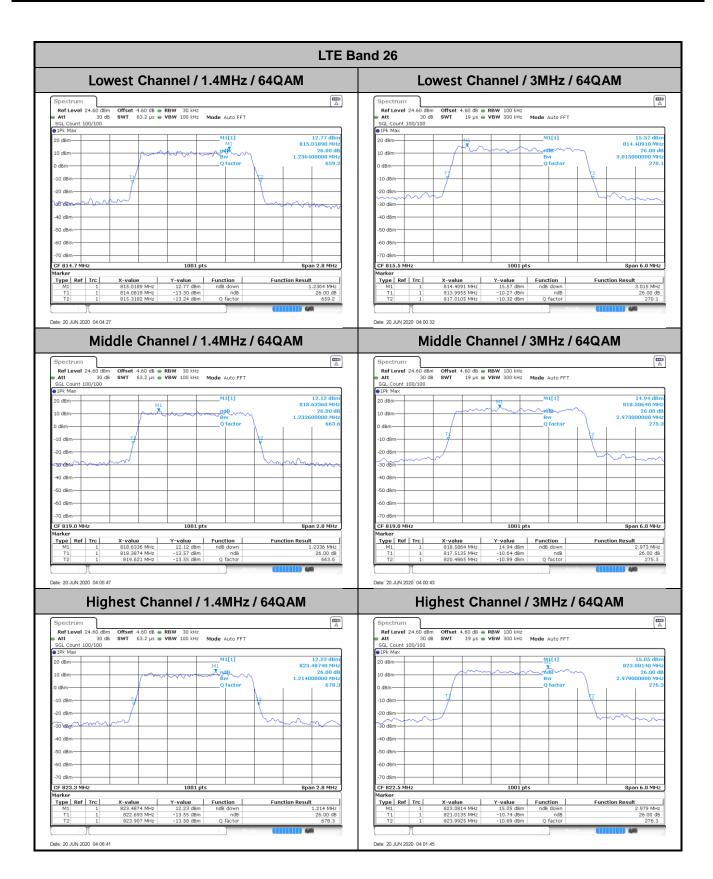


Page Number : A14 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

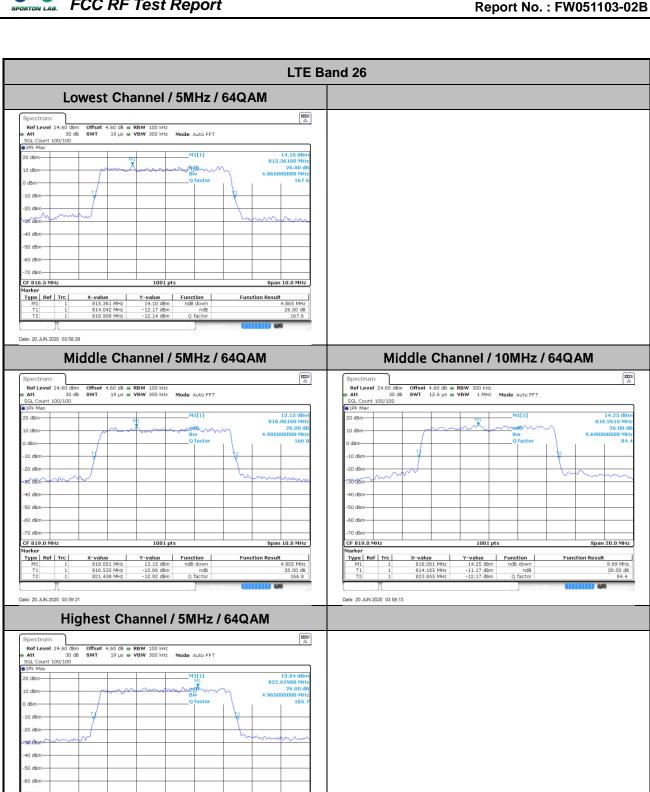

Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A15 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

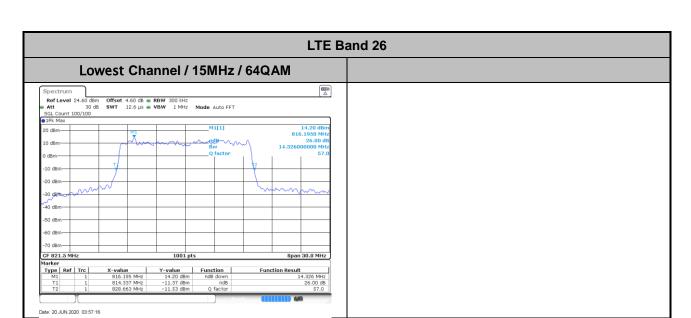

Page Number : A16 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.10	1.09	2.72	2.75	4.51	4.51	-	-	13.37	13.43	-	-
Middle CH	1.10	1.10	2.70	2.72	4.48	4.51	8.99	9.01	-	-	-	-
Highest CH	1.09	1.09	2.72	2.72	4.48	4.49	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.10	-	2.72	-	4.47	-	-	-	13.43	-	-	-
Middle CH	1.09	-	2.72	-	4.49	-	9.01	-	-	-	-	-
Highest CH	1.09	-	2.74	-	4.47	-	-	-	-	-	-	-


Sporton International (Kunshan) Inc.

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2

: A17 of A51 Page Number Report Issued Date : Jul. 17, 2020

Report No. : FW051103-02B

Report Version : Rev. 01

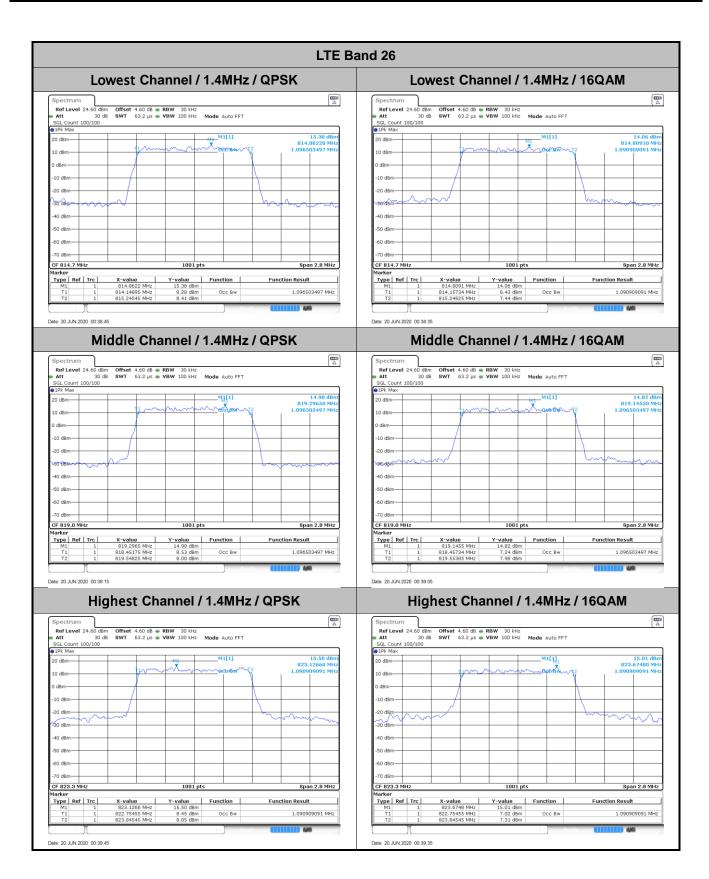

Page Number : A18 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 3MHz / QPSK Lowest Channel / 3MHz / 16QAM Ref Level 24.60 dBm
Att 30 dB
SGL Count 100/100
Pk Max -10 dBm-40 dBm -60 dBm-CF 815.5 MHz Marker 1001 pts Span 6.0 MHz CF 815.5 MHz 1001 pts Span 6.0 MHz Y-value Function

16.78 dBm

9.53 dBm Occ Bw


10.61 dBm Type Ref Trc **Function Result** Type Ref Trc 2.715284715 MHz 2.745254745 MHz Date: 20 JUN 2020 01:01:38 Date: 20 JUN 2020 01:01:28 Middle Channel / 3MHz / QPSK Middle Channel / 3MHz / 16QAM 4.60 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 4.60 dB ● RBW 100 kHz SWT 19 µs ● VBW 300 kHz Mode Auto FFT 15.13 dBn 818.44860 MH 2.721278721 MH 16.59 dBi 819.48550 MF 2.703296703 MF dBm--20 dBn -20 dBm -50 dBm -50 dBm 1001 pts Span 6.0 MHz CF 819.0 MHz 1001 pts CF 819.0 MHz Y-value Y-value Function 16.59 dBm Type | Ref | Trc | Type | Ref | Trc | X-value 818.4486 MHz 817.63936 MHz 820.36064 MHz **Function Result** Function **Function Result** Occ Bw 2.703296703 MHz Occ Bw 2.721278721 MHz Date: 20.JUN.2020 01:02:08 Date: 20.JUN.2020 01:01:58 Highest Channel / 3MHz / 16QAM Highest Channel / 3MHz / QPSK 4.60 dB ● RBW 100 kHz 19 µs ● VBW 300 kHz Mode Auto FFT 4.60 dB **RBW** 100 kHz 19 µs **VBW** 300 kHz **Mode** Auto FFT 17.16 dBr 823.10540 MH 2.715284715 MH 15.61 dBm 823.24930 MH; 2.715284715 MH; -30 dBm-50 dBm Span 6.0 MHz CF 822.5 MHz
 X-value
 Y-value
 Function

 823.2493 MHz
 15.61 dBm


 X-value
 Y-value
 Function

 823.1054 MHz
 17.16 dBm
 Type | Ref | Trc | Type | Ref | Trc | Function Result **Function Result** 9.78 dBm Occ Bw 11.10 dBm 2.715284715 MHz Occ Bw 2.715284715 MHz 821.14535 MHz 823.86064 MHz


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A19 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

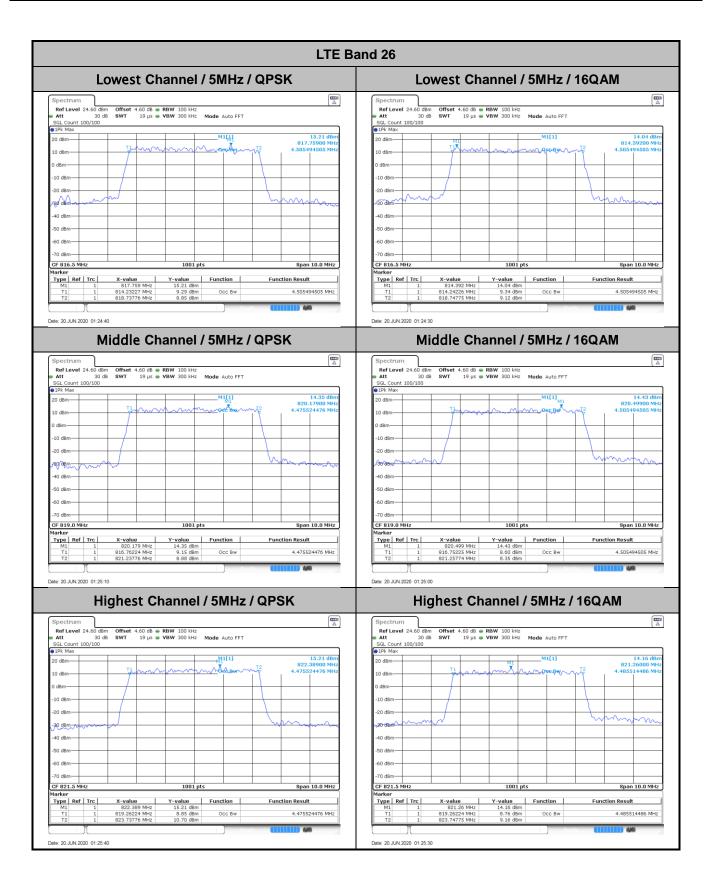

Page Number : A20 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

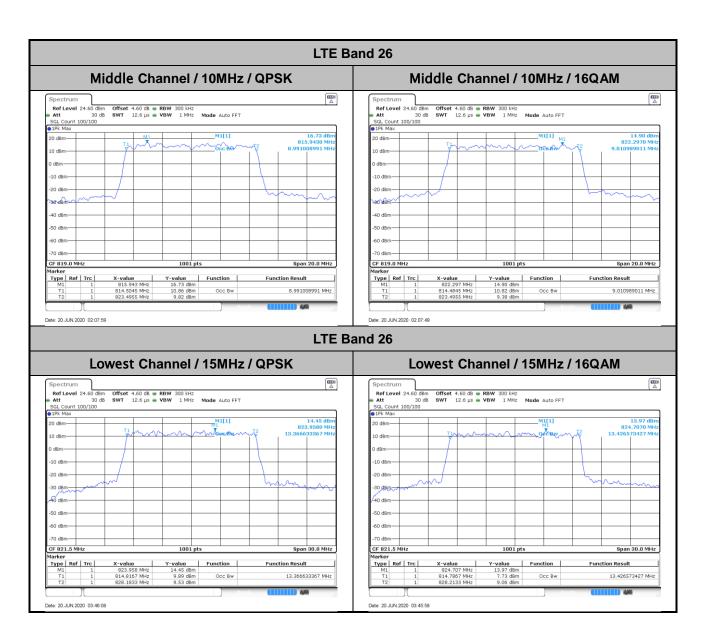


Page Number : A21 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

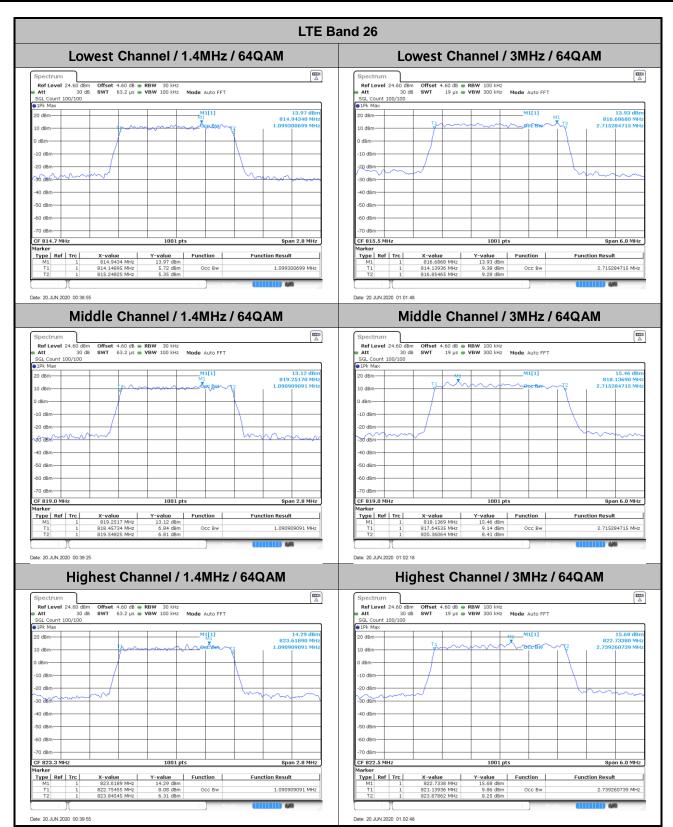


Page Number : A22 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

Report No.: FW051103-02B LTE Band 26 Lowest Channel / 5MHz / 64QAM 1001 pts Y-value Function
14.52 dBm
8.30 dBm Occ Bw
8.63 dBm Type Ref Trc **Function Result** 4.465534466 MHz Date: 20 JUN 2020 01:24:50 Middle Channel / 5MHz / 64QAM Middle Channel / 10MHz / 64QAM 4.60 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 4.60 dB ● RBW 300 kHz SWT 12.6 µs ● VBW 1 MHz Mode Auto FFT CF 819.0 MHz 1001 pts Type | Ref | Trc | Y-value Type | Ref | Trc | **Function Result** Function **Function Result** 4.485514486 MHz Occ Bw 9.010989011 MHz Date: 20.JUN.2020 01:25:20 Date: 20.JUN.2020 02:08:09 Highest Channel / 5MHz / 64QAM 4.60 dB ● RBW 100 kHz 19 µs ● VBW 300 kHz Mode Auto FFT

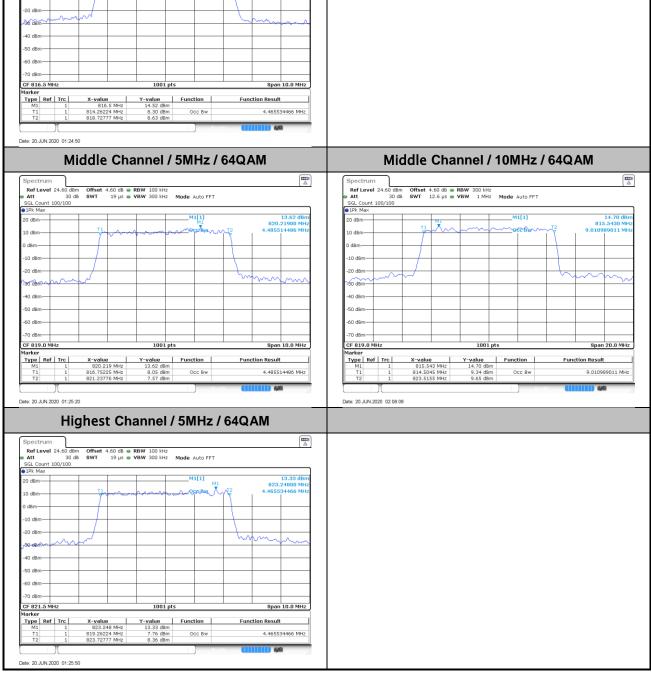

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2

Page Number : A23 of A51 Report Issued Date: Jul. 17, 2020 Report Version : Rev. 01

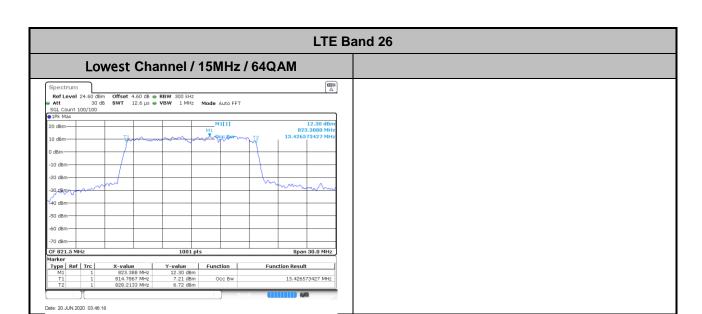

Page Number : A24 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01


Conducted Band Edge

Sporton International (Kunshan) Inc.


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A25 of A51
Report Issued Date : Jul. 17, 2020

Report No. : FW051103-02B


Report Version : Rev. 01

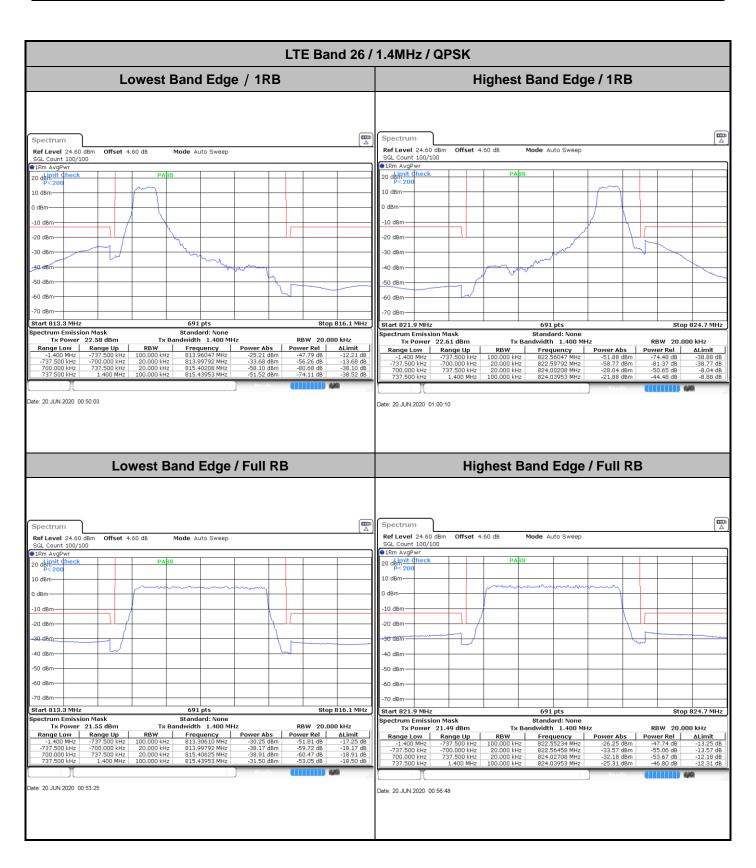


TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A26 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

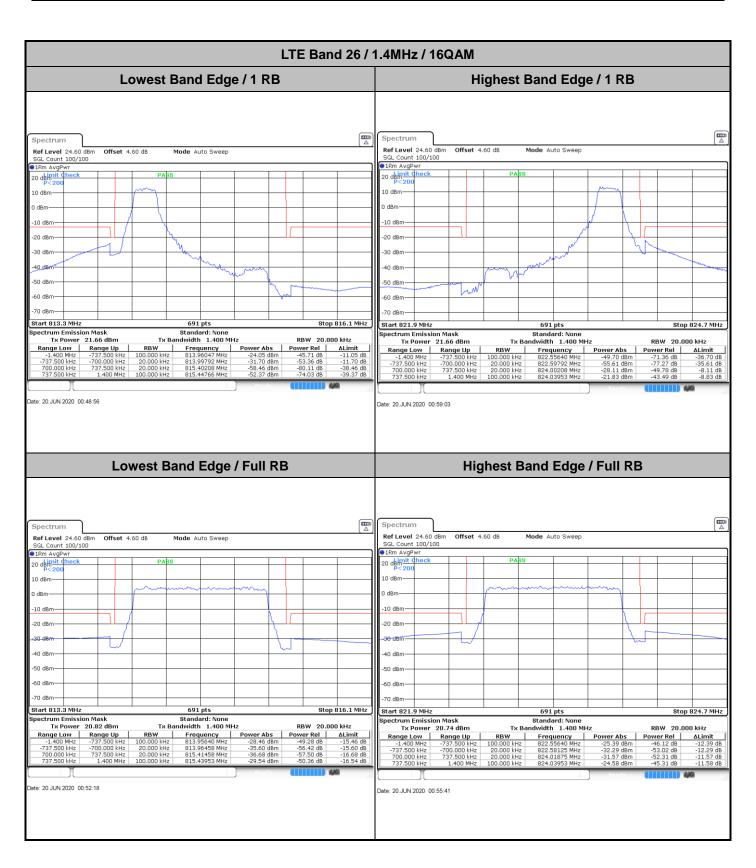

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A27 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

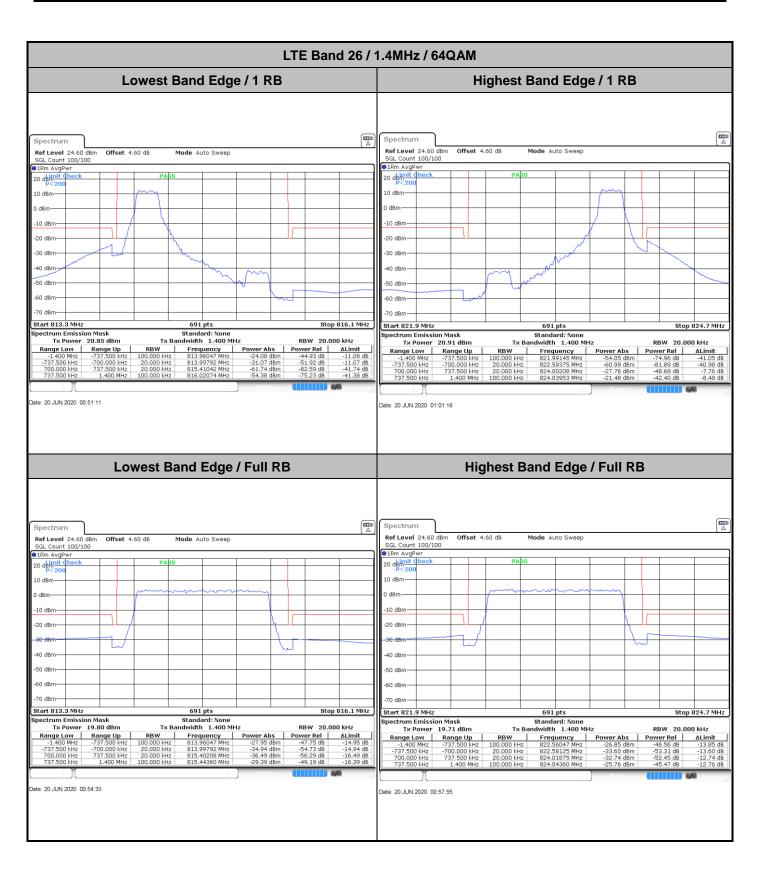

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A28 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01

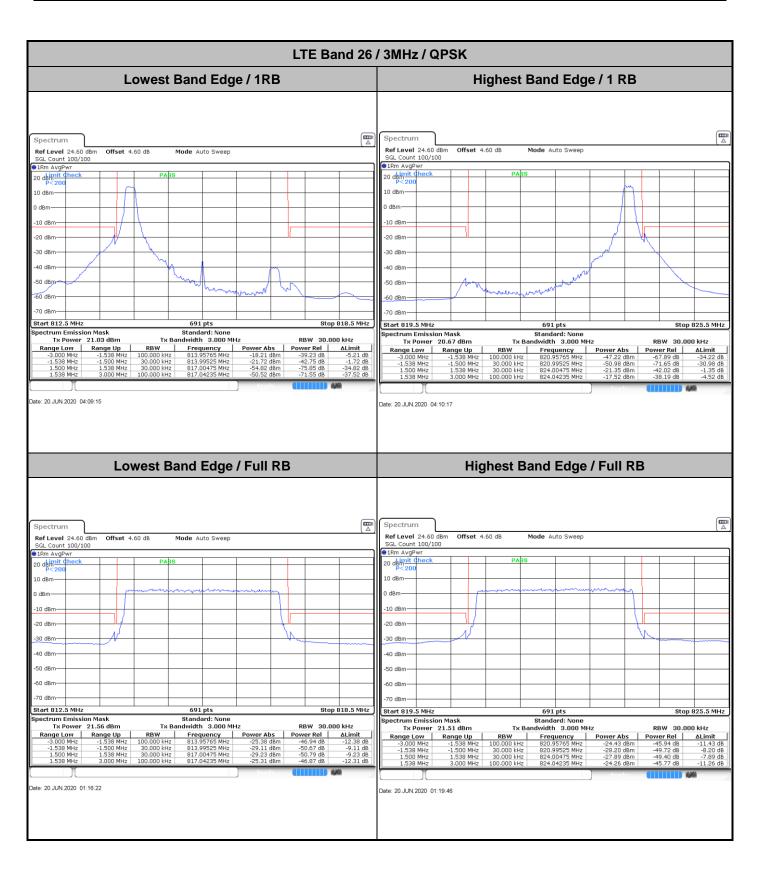

TEL: +86-512-57900158 FAX: +86-512-57900958 FCC ID: IHDT56ZC2 Page Number : A29 of A51
Report Issued Date : Jul. 17, 2020
Report Version : Rev. 01