








Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

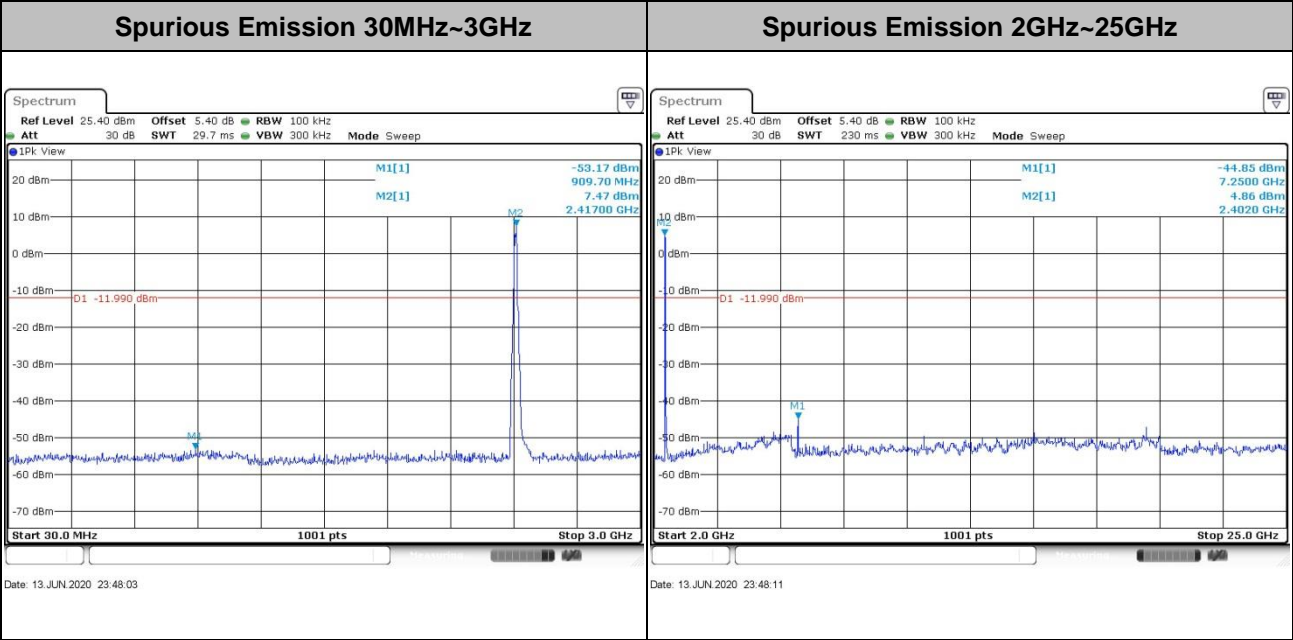


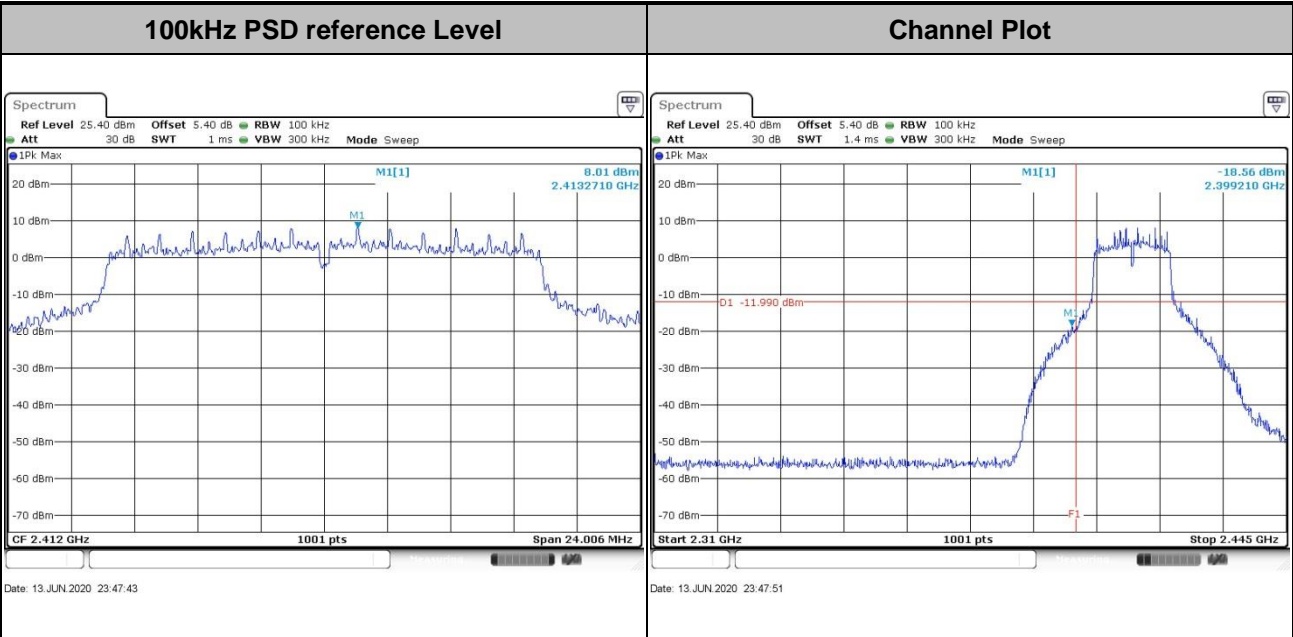


Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

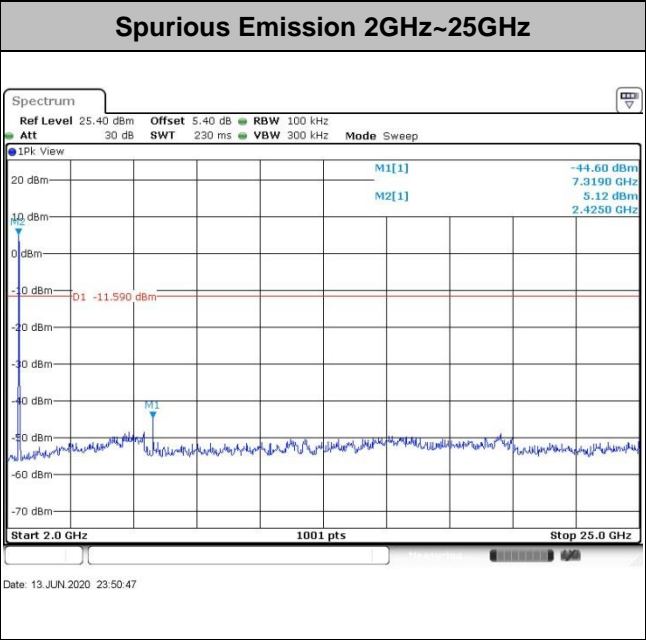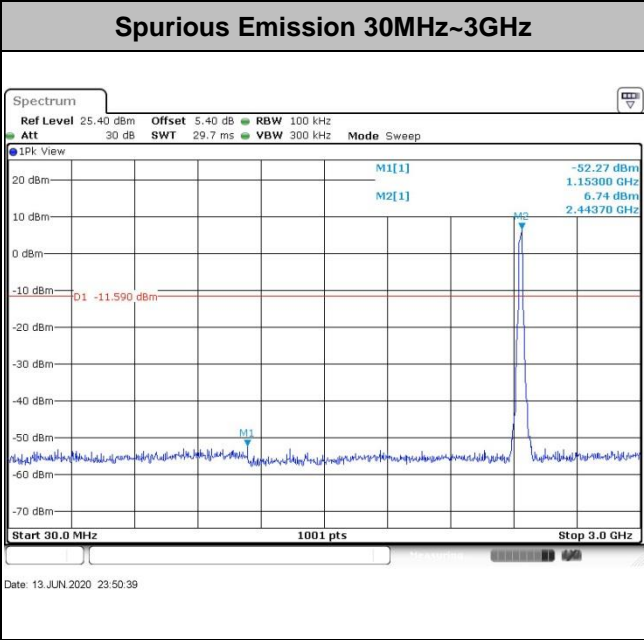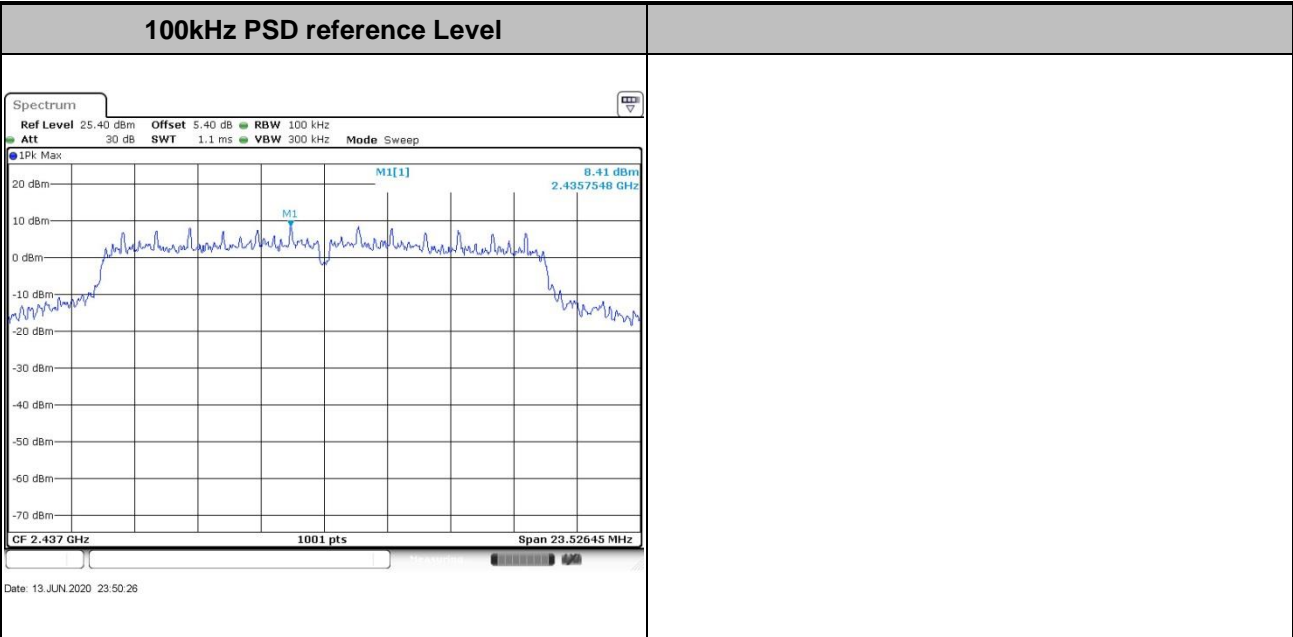





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

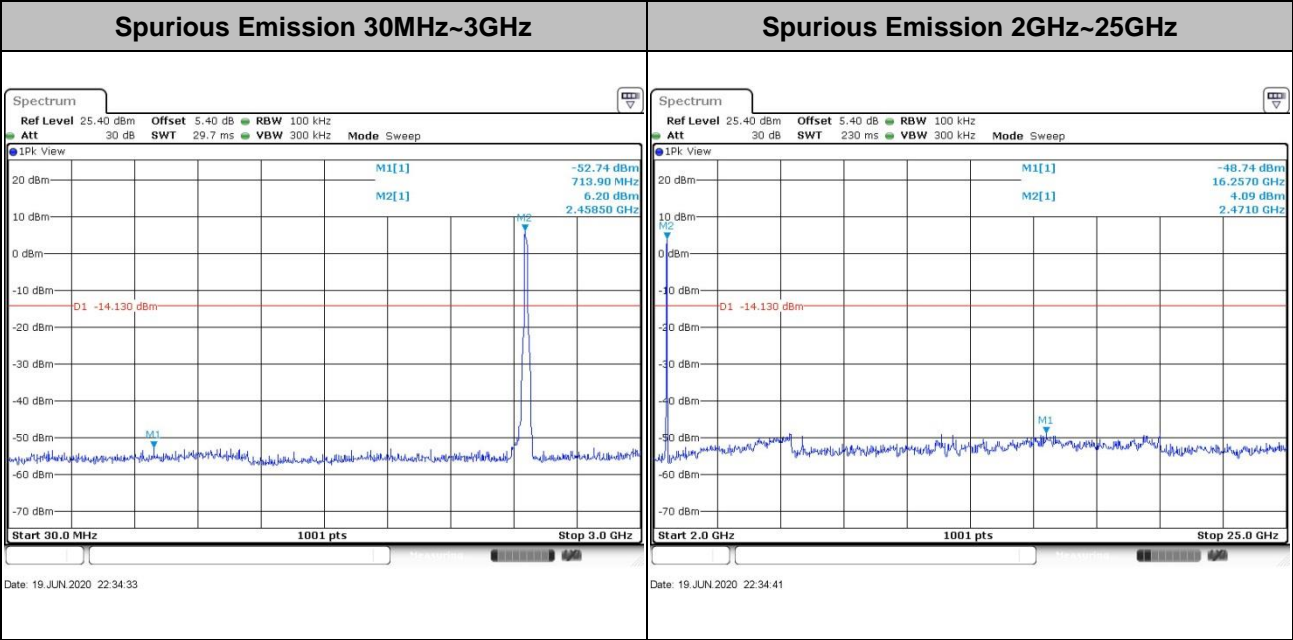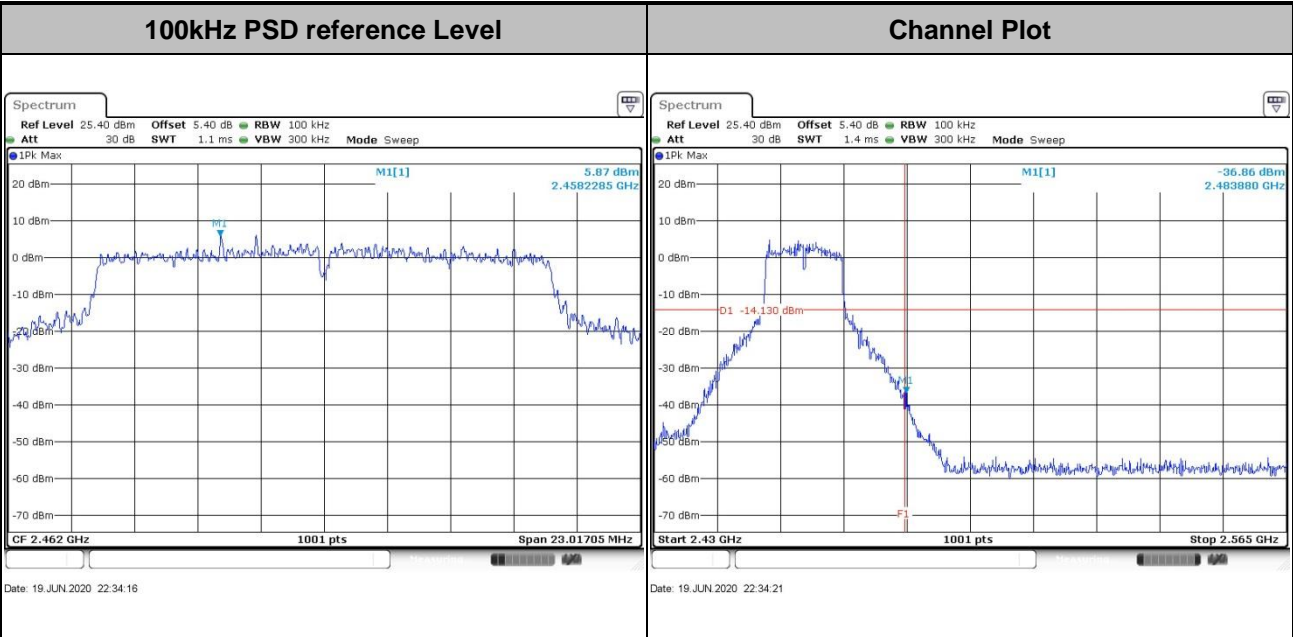




<b>Test Mode :</b> 802.11n HT20	<b>Test Channel :</b> 01
---------------------------------	--------------------------

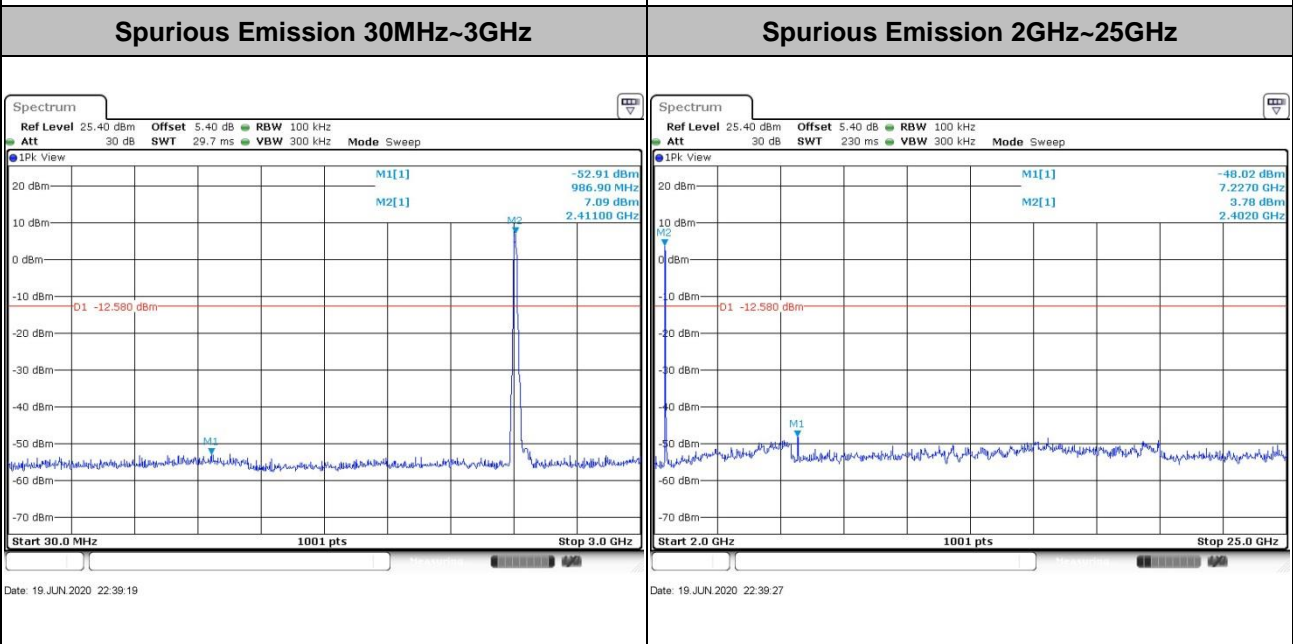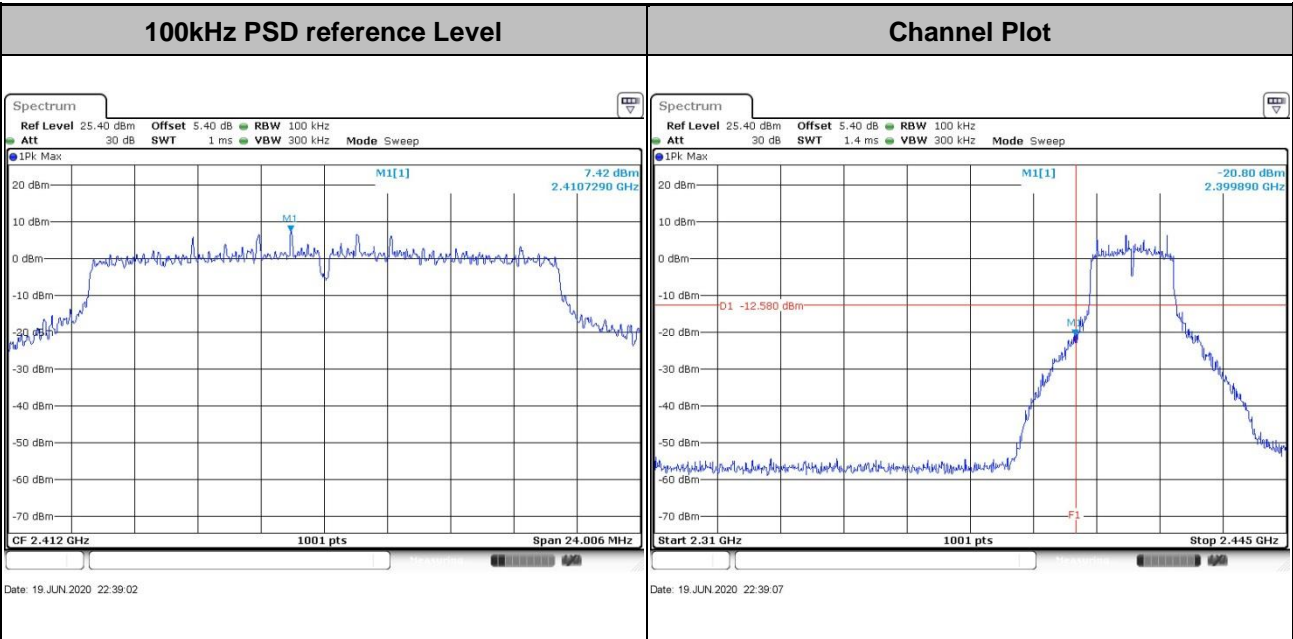




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


**100kHz PSD reference Level**

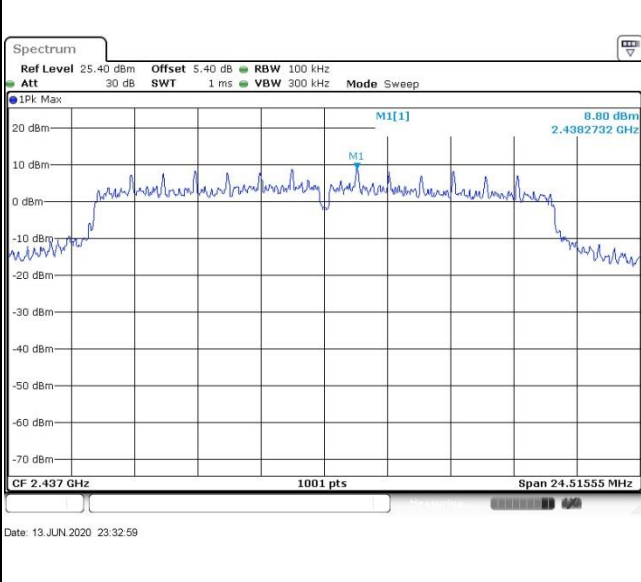

**Spurious Emission 30MHz~3GHz**


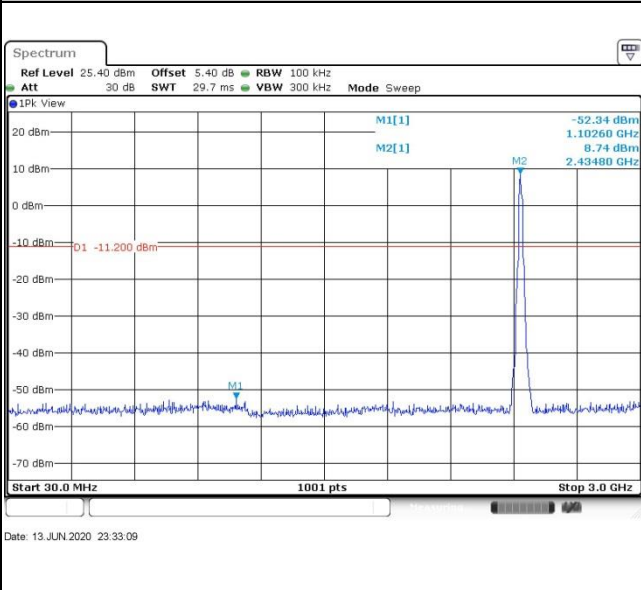


**Spurious Emission 2GHz~25GHz**

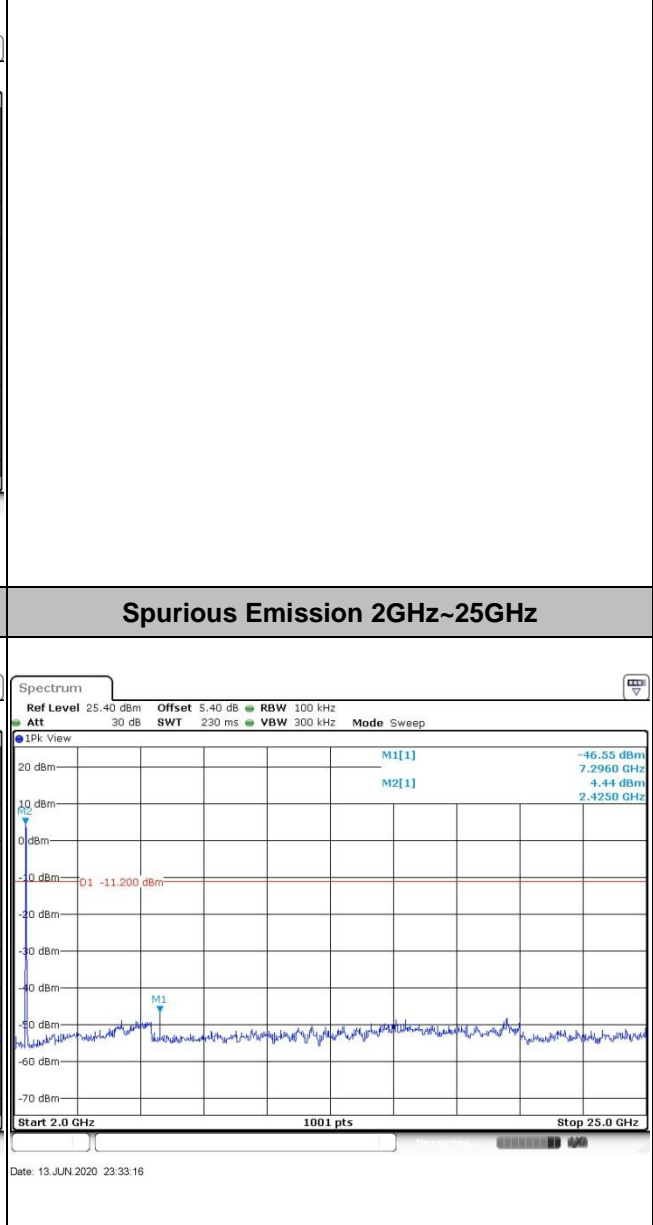



<b>Test Mode :</b> 802.11n HT20	<b>Test Channel :</b> 11
---------------------------------	--------------------------

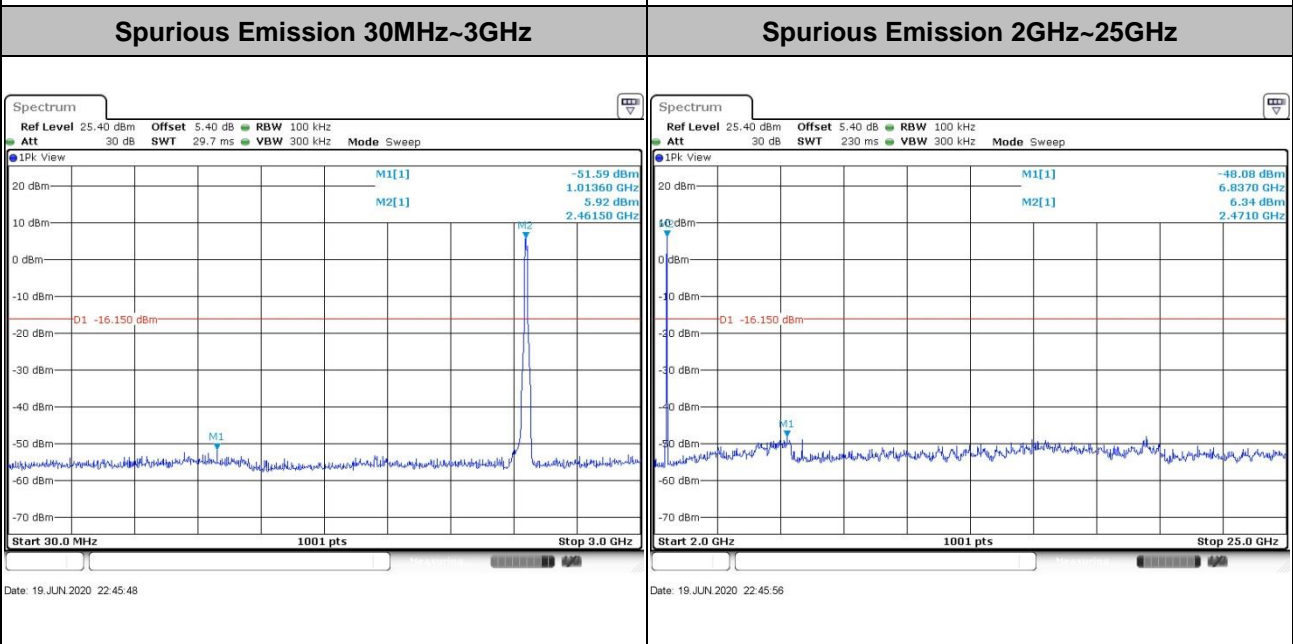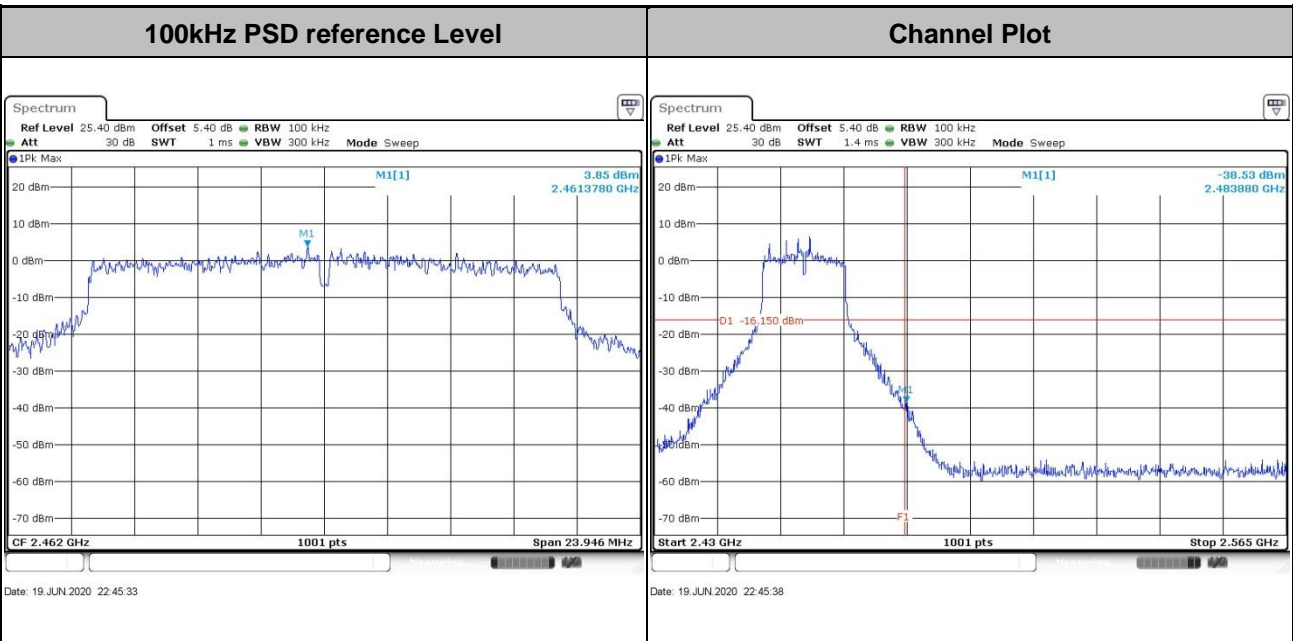



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

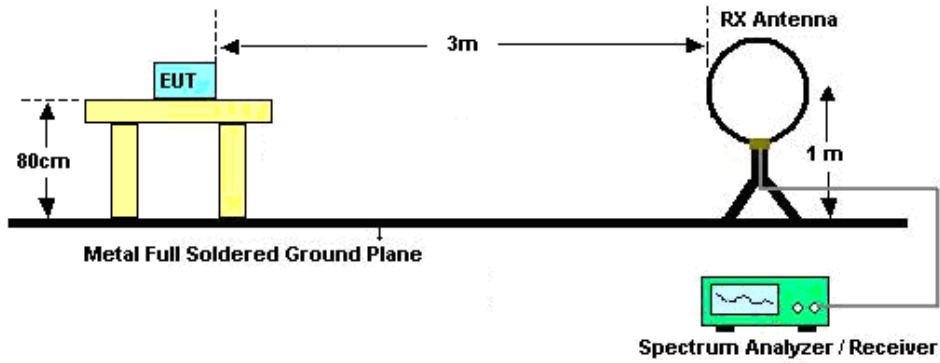

For radiated emissions from 30MHz to 1GHz

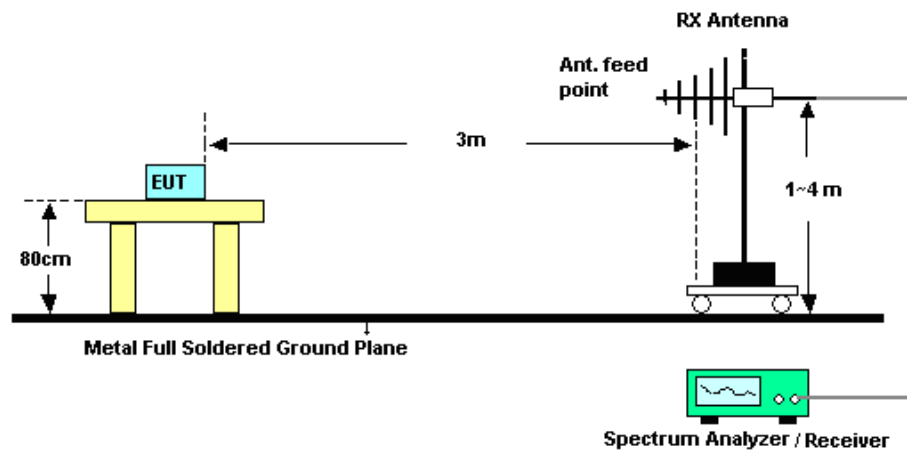

For radiated emissions above 1GHz

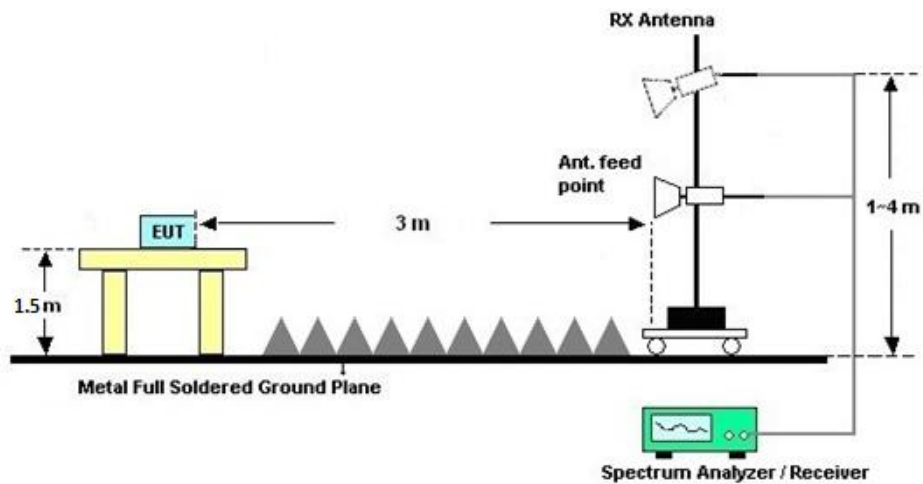



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

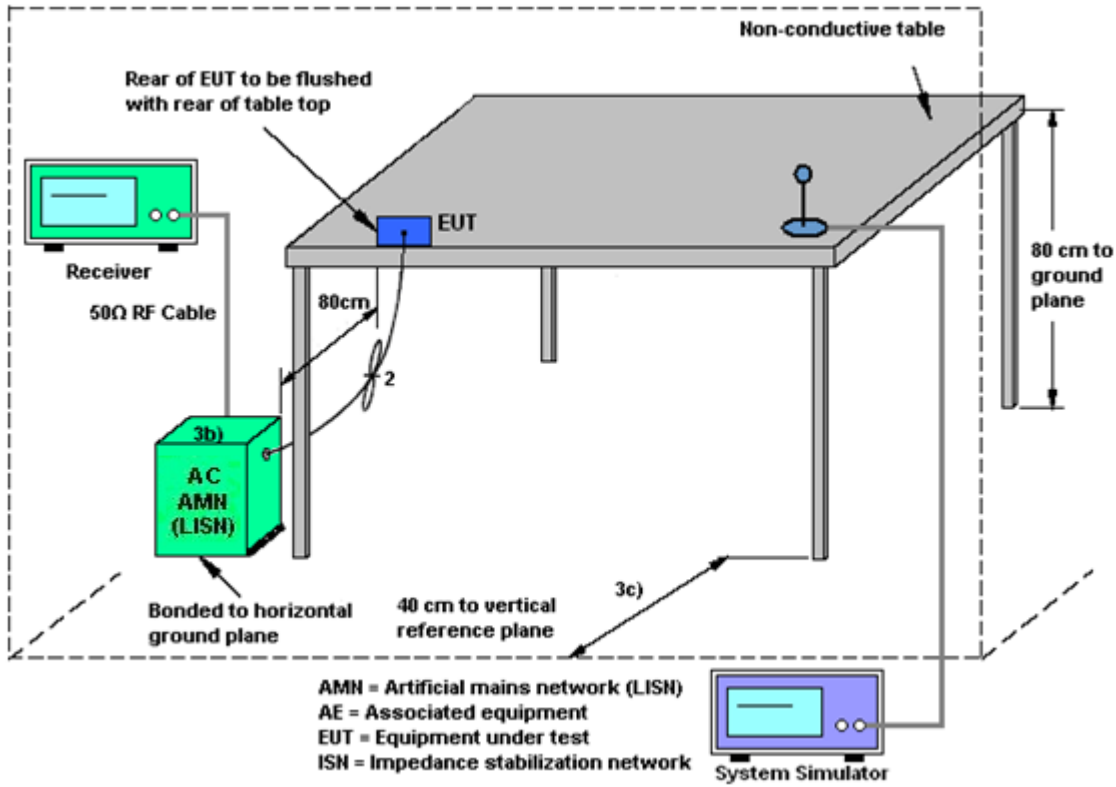

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
2.4GHz	-8.00	-6.00	-6.00	-6.00	0.00	0.00

$$\text{Power Limit Reduction} = DG(\text{Power}) - 6\text{dBi}, (\text{min} = 0)$$

$$\text{PSD Limit Reduction} = DG(\text{PSD}) - 6\text{dBi}, (\text{min} = 0)$$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Jun. 13, 2020~ Jun. 19, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Jun. 13, 2020~ Jun. 19, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Jun. 13, 2020~ Jun. 19, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 18, 2019	Jun. 19, 2020~ Jul. 02, 2020	Jul. 17, 2020	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Jun. 19, 2020~ Jul. 02, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Jun. 19, 2020~ Jul. 02, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 08, 2020	Jun. 19, 2020~ Jul. 02, 2020	Jun. 07, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Jun. 19, 2020~ Jul. 02, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jun. 19, 2020~ Jul. 02, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Jun. 19, 2020~ Jul. 02, 2020	Aug. 05, 2020	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jun. 19, 2020~ Jul. 02, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Aug. 17, 2019	Jun. 19, 2020~ Jul. 02, 2020	Aug. 16, 2020	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Jun. 19, 2020~ Jul. 02, 2020	Oct. 17, 2020	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 19, 2020~ Jul. 02, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 19, 2020~ Jul. 02, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 19, 2020~ Jul. 02, 2020	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Jun. 10, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jun. 10, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jun. 10, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jun. 10, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



## **Appendix A. Conducted Test Results**



Test Engineer:	Lex Wu	Temperature:	30~35	°C
Test Date:	2020/6/13~2020/6/19	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	2	1	2412	13.79	14.39	8.05	8.07	0.50	Pass
11b	1Mbps	2	6	2437	14.19	14.69	9.03	9.05	0.50	Pass
11b	1Mbps	2	11	2462	14.39	14.79	8.07	9.05	0.50	Pass
11g	6Mbps	2	1	2412	17.18	18.03	15.10	16.00	0.50	Pass
11g	6Mbps	2	6	2437	17.73	18.78	15.68	15.68	0.50	Pass
11g	6Mbps	2	11	2462	17.73	17.63	15.70	15.34	0.50	Pass
HT20	MCS0	2	1	2412	18.18	18.78	15.10	16.00	0.50	Pass
HT20	MCS0	2	6	2437	19.03	20.78	16.06	16.34	0.50	Pass
HT20	MCS0	2	11	2462	18.88	18.73	16.92	15.96	0.50	Pass

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	2	1	2412	20.86	21.61	24.26	30.00		-6.00		18.26		36.00	Pass	
11b	1Mbps	2	6	2437	21.08	21.73	24.43	30.00		-6.00		18.43		36.00	Pass	
11b	1Mbps	2	11	2462	21.16	21.59	24.39	30.00		-6.00		18.39		36.00	Pass	
11g	6Mbps	2	1	2412	21.38	22.21	24.83	30.00		-6.00		18.83		36.00	Pass	
11g	6Mbps	2	6	2437	21.08	22.33	24.76	30.00		-6.00		18.76		36.00	Pass	
11g	6Mbps	2	11	2462	20.41	21.33	23.90	30.00		-6.00		17.90		36.00	Pass	
HT20	MCS0	2	1	2412	20.38	21.45	23.96	30.00		-6.00		17.96		36.00	Pass	
HT20	MCS0	2	6	2437	21.55	22.55	25.09	30.00		-6.00		19.09		36.00	Pass	
HT20	MCS0	2	11	2462	19.89	21.22	23.62	30.00		-6.00		17.62		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	2	1	2412	0.00	0.00	18.46	19.66	22.11
11b	1Mbps	2	6	2437	0.00	0.00	18.19	19.86	22.12
11b	1Mbps	2	11	2462	0.00	0.00	18.43	19.68	22.11
11g	6Mbps	2	1	2412	0.08	0.08	16.90	18.58	20.83
11g	6Mbps	2	6	2437	0.08	0.08	16.80	19.00	21.04
11g	6Mbps	2	11	2462	0.08	0.08	15.57	17.37	19.57
HT20	MCS0	2	1	2412	0.08	0.10	15.21	17.25	19.36
HT20	MCS0	2	6	2437	0.08	0.10	16.81	19.27	21.22
HT20	MCS0	2	11	2462	0.08	0.10	14.93	16.73	18.93

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**


2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	2	1	2412	-9.03	-7.96	-4.95	-6.00		8.00		Pass
11b	1Mbps	2	6	2437	-9.59	-7.35	-4.34	-6.00		8.00		Pass
11b	1Mbps	2	11	2462	-9.19	-7.77	-4.76	-6.00		8.00		Pass
11g	6Mbps	2	1	2412	-9.16	-8.01	-5.00	-6.00		8.00		Pass
11g	6Mbps	2	6	2437	-10.00	-6.59	-3.58	-6.00		8.00		Pass
11g	6Mbps	2	11	2462	-12.05	-11.21	-8.20	-6.00		8.00		Pass
HT20	MCS0	2	1	2412	-11.87	-10.41	-7.40	-6.00		8.00		Pass
HT20	MCS0	2	6	2437	-9.53	-7.26	-4.25	-6.00		8.00		Pass
HT20	MCS0	2	11	2462	-12.26	-11.32	-8.31	-6.00		8.00		Pass

Measured power density (dBm) has offset with cable loss.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line

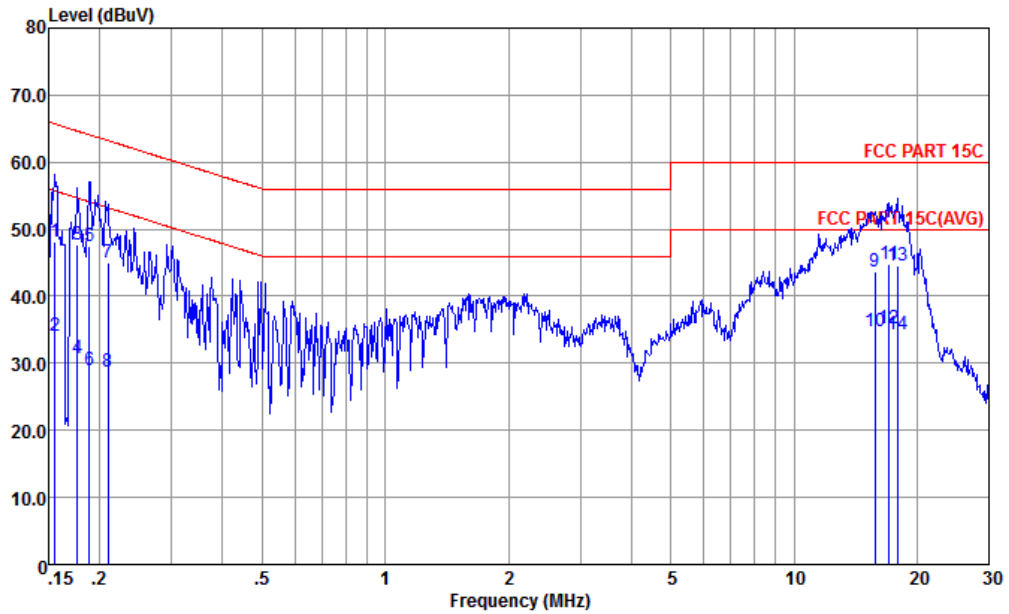


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-191028-CN02 LINE

mode : Mode 1  
 : 353614110011401 #2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	48.04	-17.65	65.69	37.50	0.07	10.47	QP
2	0.166	34.14	-21.55	55.69	23.60	0.07	10.47	Average
3	0.177	47.69	-16.95	64.64	37.20	0.08	10.41	QP
4	0.177	30.79	-23.85	54.64	20.30	0.08	10.41	Average
5	0.188	47.37	-16.74	64.11	36.90	0.08	10.39	QP
6	0.188	28.97	-25.14	54.11	18.50	0.08	10.39	Average
7	0.209	44.95	-18.28	63.23	34.50	0.09	10.36	QP
8	0.209	28.65	-24.58	53.23	18.20	0.09	10.36	Average
9	15.801	43.57	-16.43	60.00	31.50	1.66	10.41	QP
10	15.801	34.67	-15.33	50.00	22.60	1.66	10.41	Average
11	17.109	44.87	-15.13	60.00	32.60	1.83	10.44	QP
12 *	17.109	35.17	-14.83	50.00	22.90	1.83	10.44	Average
13	17.944	44.59	-15.41	60.00	32.20	1.93	10.46	QP
14	17.944	34.29	-15.71	50.00	21.90	1.93	10.46	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

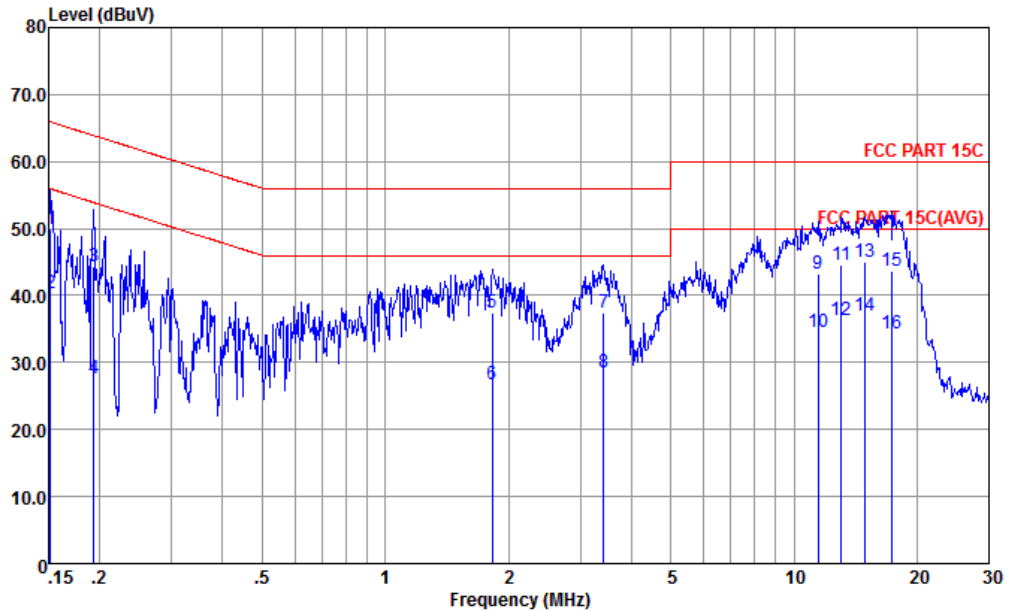

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-191028-CN02 NEUTRAL

mode : Mode 1  
 : 353614110011401 #2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	49.98	-15.93	65.91	39.35	0.15	10.48	QP
2	0.152	40.38	-15.53	55.91	29.75	0.15	10.48	Average
3	0.193	44.28	-19.61	63.89	33.73	0.17	10.38	QP
4	0.193	27.58	-26.31	53.89	17.03	0.17	10.38	Average
5	1.829	37.43	-18.57	56.00	26.71	0.49	10.23	QP
6	1.829	26.83	-19.17	46.00	16.11	0.49	10.23	Average
7	3.417	37.45	-18.55	56.00	26.50	0.70	10.25	QP
8	3.417	28.45	-17.55	46.00	17.50	0.70	10.25	Average
9	11.438	43.26	-16.74	60.00	31.46	1.44	10.36	QP
10	11.438	34.56	-15.44	50.00	22.76	1.44	10.36	Average
11	13.057	44.58	-15.42	60.00	32.53	1.67	10.38	QP
12	13.057	36.28	-13.72	50.00	24.23	1.67	10.38	Average
13	14.907	44.99	-15.01	60.00	32.67	1.93	10.39	QP
14 *	14.907	36.99	-13.01	50.00	24.67	1.93	10.39	Average
15	17.291	43.74	-16.26	60.00	30.95	2.35	10.44	QP
16	17.291	34.34	-15.66	50.00	21.55	2.35	10.44	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b CH 01 2412MHz		2378.51	54.8	-19.2	74	48.25	31.19	7.01	31.65	114	216	P	H
		2389.95	43.51	-10.49	54	36.92	31.2	7.04	31.65	114	216	A	H
	*	2412	106.56	-	-	99.84	31.31	7.06	31.65	114	216	P	H
	*	2410	103.35	-	-	96.63	31.31	7.06	31.65	114	216	A	H
		2353.94	55.33	-18.67	74	48.84	31.18	6.98	31.67	100	70	P	V
		2389.95	43.68	-10.32	54	37.09	31.2	7.04	31.65	100	70	A	V
	*	2414	107.55	-	-	100.83	31.31	7.06	31.65	100	70	P	V
	*	2414	104.33	-	-	97.61	31.31	7.06	31.65	100	70	A	V
802.11b CH 11 2462MHz	*	2462	106.38	-	-	99.19	31.66	7.13	31.6	100	126	P	H
	*	2464	101.87	-	-	94.68	31.66	7.13	31.6	100	126	A	H
		2486.92	56.01	-17.99	74	48.66	31.77	7.16	31.58	100	126	P	H
		2488.66	44.63	-9.37	54	37.14	31.89	7.18	31.58	100	126	A	H
	*	2462	108.06	-	-	100.87	31.66	7.13	31.6	100	120	P	V
	*	2460	104.96	-	-	97.77	31.66	7.13	31.6	100	120	A	V
		2485.3	56.74	-17.26	74	49.39	31.77	7.16	31.58	100	120	P	V
		2487.22	46.18	-7.82	54	38.83	31.77	7.16	31.58	100	120	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	51.39	-22.61	74	67.86	33.72	9.85	60.04	100	117	P	H
		4824	49.28	-4.72	54	65.75	33.72	9.85	60.04	100	117	A	H
		4824	48	-26	74	64.47	33.72	9.85	60.04	260	340	P	V
		4824	44.99	-9.01	54	61.46	33.72	9.85	60.04	260	340	A	V
802.11b CH 06 2437MHz		4872	49.72	-24.28	74	66.03	33.77	9.95	60.03	100	122	P	H
		4872	47.33	-6.67	54	63.64	33.77	9.95	60.03	100	122	A	H
		7308	44.42	-29.58	74	56.47	35.86	12.6	60.51	300	0	P	H
		4872	45.17	-28.83	74	61.48	33.77	9.95	60.03	300	360	P	V
		7308	47.64	-26.36	74	59.69	35.86	12.6	60.51	300	360	P	V
802.11b CH 11 2462MHz		4926	45.2	-28.8	74	61.34	33.82	10.06	60.02	300	0	P	H
		7386	44.29	-29.71	74	56.01	36.01	12.8	60.53	300	0	P	H
		4926	46.34	-27.66	74	62.48	33.82	10.06	60.02	300	360	P	V
		7386	46.62	-27.38	74	58.34	36.01	12.8	60.53	300	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		2389.95	57.95	-16.05	74	51.36	31.2	7.04	31.65	272	131	P	H
		2389.95	47.5	-6.5	54	40.91	31.2	7.04	31.65	272	131	A	H
	*	2412	107.76	-	-	101.04	31.31	7.06	31.65	272	131	P	H
	*	2412	100	-	-	93.28	31.31	7.06	31.65	272	131	A	H
		2389.95	62.2	-11.8	74	55.61	31.2	7.04	31.65	100	57	P	V
		2389.95	50.42	-3.58	54	43.83	31.2	7.04	31.65	100	57	A	V
	*	2414	110.32	-	-	103.6	31.31	7.06	31.65	100	57	P	V
	*	2414	102.5	-	-	95.78	31.31	7.06	31.65	100	57	A	V
802.11g CH 11 2462MHz	*	2460	105.83	-	-	98.64	31.66	7.13	31.6	100	120	P	H
	*	2460	98.09	-	-	90.9	31.66	7.13	31.6	100	120	A	H
		2483.5	58.75	-15.25	74	51.4	31.77	7.16	31.58	100	120	P	H
		2483.5	47.11	-6.89	54	39.76	31.77	7.16	31.58	100	120	A	H
	*	2460	107.47	-	-	100.28	31.66	7.13	31.6	107	69	P	V
	*	2462	99.77	-	-	92.58	31.66	7.13	31.6	107	69	A	V
		2483.8	62.07	-11.93	74	54.72	31.77	7.16	31.58	107	69	P	V
		2483.5	50.09	-3.91	54	42.74	31.77	7.16	31.58	107	69	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	46.39	-27.61	74	62.86	33.72	9.85	60.04	300	0	P	H
		4824	44.51	-29.49	74	60.98	33.72	9.85	60.04	300	360	P	V
802.11g CH 06 2437MHz		4872	42.73	-31.27	74	59.04	33.77	9.95	60.03	300	0	P	H
		7308	44.19	-29.81	74	56.24	35.86	12.6	60.51	300	0	P	H
		4872	41.63	-32.37	74	57.94	33.77	9.95	60.03	300	360	P	V
		7308	46.13	-27.87	74	58.18	35.86	12.6	60.51	300	360	P	V
802.11g CH 11 2462MHz		4926	41.71	-32.29	74	57.85	33.82	10.06	60.02	300	0	P	H
		7386	42.62	-31.38	74	54.34	36.01	12.8	60.53	300	0	P	H
		4926	40.54	-33.46	74	56.68	33.82	10.06	60.02	300	360	P	V
		7386	43.85	-30.15	74	55.57	36.01	12.8	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz	*	2414	105.71	-	-	98.99	31.31	7.06	31.65	100	128	P	H
	*	2414	97.41	-	-	90.69	31.31	7.06	31.65	100	128	A	H
		2389.95	58.13	-15.87	74	51.54	31.2	7.04	31.65	100	128	P	H
		2389.95	48.24	-5.76	54	41.65	31.2	7.04	31.65	100	128	A	H
	*	2410	108.81	-	-	102.09	31.31	7.06	31.65	100	73	P	V
	*	2412	101.1	-	-	94.38	31.31	7.06	31.65	100	73	P	V
		2389.82	61.7	-12.3	74	55.11	31.2	7.04	31.65	100	73	P	V
	2389.95	49.97	-4.03	54	43.38	31.2	7.04	31.65	100	73	A	V	
802.11n HT20 CH 11 2462MHz	*	2462	105.26	-	-	98.07	31.66	7.13	31.6	383	123	P	H
	*	2464	97.05	-	-	89.86	31.66	7.13	31.6	383	123	A	H
		2483.92	58.16	-15.84	74	50.81	31.77	7.16	31.58	383	123	P	H
		2483.5	48.33	-5.67	54	40.98	31.77	7.16	31.58	383	123	A	H
	*	2464	107.13	-	-	99.94	31.66	7.13	31.6	106	63	P	V
	*	2464	98.33	-	-	91.14	31.66	7.13	31.6	106	63	A	V
		2483.74	61.74	-12.26	74	54.39	31.77	7.16	31.58	106	63	P	V
	2483.5	50.73	-3.27	54	43.38	31.77	7.16	31.58	106	63	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	46.69	-27.31	74	63.16	33.72	9.85	60.04	100	360	P	H
		4824	42.42	-31.58	74	58.89	33.72	9.85	60.04	100	360	P	V
802.11n HT20 CH 06 2437MHz		4872	44.65	-29.35	74	60.96	33.77	9.95	60.03	100	360	P	H
		7308	43.09	-30.91	74	55.14	35.86	12.6	60.51	100	360	P	H
		4872	43.35	-30.65	74	59.66	33.77	9.95	60.03	100	360	P	V
		7308	45.59	-28.41	74	57.64	35.86	12.6	60.51	100	360	P	V
802.11n HT20 CH 11 2462MHz		4926	41.07	-32.93	74	57.21	33.82	10.06	60.02	100	360	P	H
		7386	42.1	-31.9	74	53.82	36.01	12.8	60.53	100	360	P	H
		4926	41.24	-32.76	74	57.38	33.82	10.06	60.02	100	360	P	V
		7386	43.4	-30.6	74	55.12	36.01	12.8	60.53	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT20 LF		30	20.19	-19.81	40	26.31	25.1	0.76	31.98	-	-	P	H
		128.94	18.02	-25.48	43.5	30.64	17.6	1.72	31.94	-	-	P	H
		157.07	18.64	-24.86	43.5	32	16.68	1.89	31.93	-	-	P	H
		217.21	30.9	-15.1	46	45.32	15.27	2.23	31.92	100	0	P	H
		304.51	23.62	-22.38	46	33.55	19.45	2.63	32.01	-	-	P	H
		993.21	28.04	-25.96	54	23.3	30.65	4.67	30.58	-	-	P	H
		31.94	22.18	-17.82	40	29.32	24.04	0.79	31.97	-	-	P	V
		45.52	24.97	-15.03	40	39.12	16.85	0.94	31.94	100	0	P	V
		114.39	17.73	-25.77	43.5	30.77	17.27	1.62	31.93	-	-	P	V
		216.24	25.92	-20.08	46	40.36	15.26	2.22	31.92	-	-	P	V
		835.1	26.59	-19.41	46	25.21	28.98	4.29	31.89	-	-	P	V
	947.62	28.11	-17.89	46	23.62	30.93	4.57	31.01	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For co-location:

WIFI+WWAN (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n	*	2484.64	59.15	-14.85	74	51.41	31.77	7.55	31.58	381	122	P	H
HT20	*	2483.5	48.41	-5.59	54	40.67	31.77	7.55	31.58	381	122	A	H
CH 11		2460	104.18	-	-	96.6	31.66	7.52	31.6	381	122	P	H
2462MHz		2462	95.92	-	-	88.34	31.66	7.52	31.6	381	122	A	H
+	*	2485.42	60.41	-13.59	74	52.67	31.77	7.55	31.58	131	10	P	V
LTE B13	*	2483.5	49.13	-4.87	54	41.39	31.77	7.55	31.58	131	10	A	V
BW 5M		2462	107.39	-	-	99.81	31.66	7.52	31.6	131	10	P	V
Middle		2462	99.08	-	-	91.5	31.66	7.52	31.6	131	10	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI+WWAN (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4926	41.81	-32.19	74	57.17	33.82	10.84	60.02	100	360	P	H
HT20													
CH 11		7386	42.8	-31.2	74	54.08	36.01	13.24	60.53	100	360	P	H
2462MHz													
+													
LTE B13		4926	41.4	-32.6	74	56.76	33.82	10.84	60.02	100	360	P	V
BW 5M													
Middle		7386	42.53	-31.47	74	53.81	36.01	13.24	60.53	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**


- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




### Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.28	-	-	10Hz
802.11n HT20	98.16	-	-	10Hz

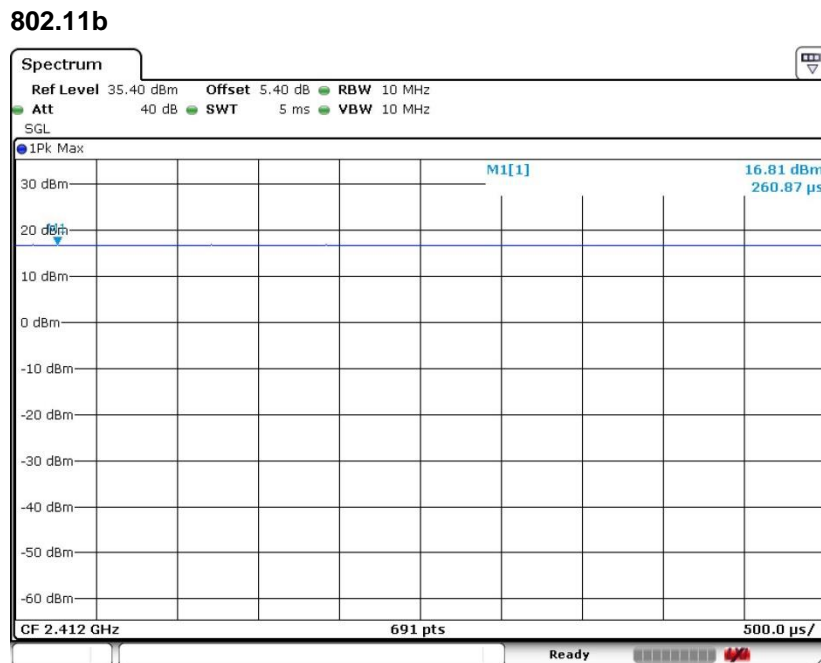



802.11g

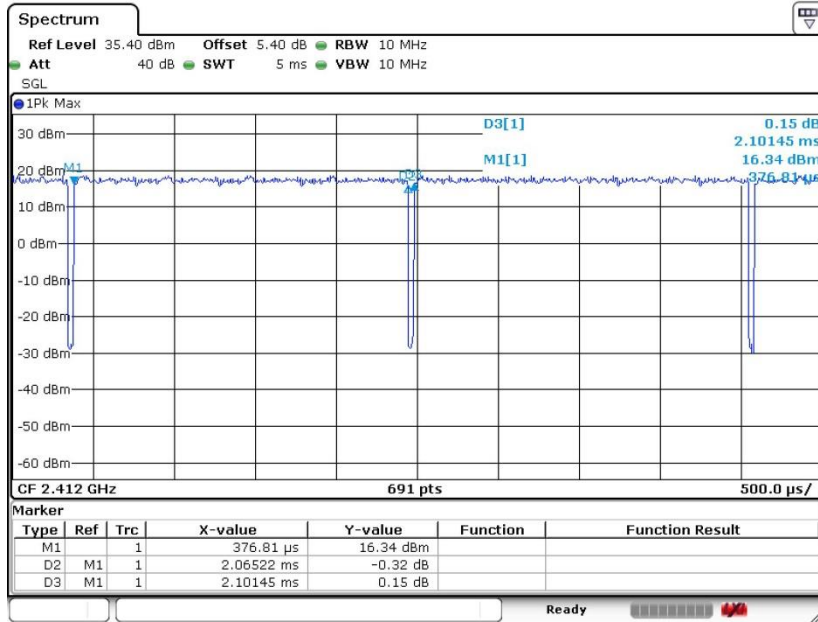

802.11n HT20

