



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2115-1, XT2115-2, XT2115-3, XT2115-4,
 XT2115DL
FCC ID : IHDT56ZG1
STANDARD : 47 CFR Part 2, 90(R)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 13, 2020 and completely tested on Sep. 01, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
 People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3
SUMMARY OF TEST RESULT4
1 GENERAL DESCRIPTION5
1.1 Applicant5
1.2 Manufacturer5
1.3 Feature of Equipment Under Test5
1.4 Maximum ERP Power, Frequency Tolerance, and Emission Designator6
1.5 Testing Site6
1.6 Test Software6
1.7 Applied Standards7
1.8 Specification of Accessory7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST8
2.1 Test Mode8
2.2 Connection Diagram of Test System9
2.3 Support Unit used in test configuration and system9
2.4 Measurement Results Explanation Example10
3 CONDUCTED TEST ITEMS11
3.1 Measuring Instruments11
3.2 Conducted Output Power and ERP12
3.3 Peak-to-Average Ratio13
3.4 Occupied Bandwidth14
3.5 Conducted Band Edge Measurement15
3.6 Emission Mask16
3.7 Conducted Spurious Emission Measurement17
3.8 Frequency Stability Measurement18
4 RADIATED TEST ITEMS19
4.1 Measuring Instruments19
4.2 Test Setup19
4.3 Test Result of Radiated Test19
4.4 Radiated Spurious Emission Measurement20
5 LIST OF MEASURING EQUIPMENT21
6 UNCERTAINTY OF EVALUATION22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG081310D	Rev. 01	Initial issue of report	Sep. 22, 2020



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	PASS	-
	§90.542 (a)(7)	Effective Radiated Power	ERP < 3Watt	PASS	-
3.3	-	Peak-to-Average Ratio	Reporting only	-	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	PASS	-
3.5	§2.1053	Conducted Band Edge Measurement	Refer standard	PASS	-
	§90.543 (e)(2)(3)				
3.6	§2.1051	Emission Mask	Mask B	PASS	-
	§90.210(n)				
3.7	§2.1053	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
	§90.543 (e)(3)				
3.8	§2.1055	Frequency Stability Temperature & Voltage	< ±1.25 ppm	PASS	-
	§90.539 (e)				
4.4	§2.1053	Radiated Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 24.96 dB at 1586.000 MHz
	§90.543 (e)(3)				
	§90.543 (f)				

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2115-1, XT2115-2, XT2115-3, XT2115-4, XT2115DL
FCC ID	IHDT56ZG1
Tx Frequency	LTE Band 14: 790.5 MHz ~ 795.5 MHz
Rx Frequency	LTE Band 14: 760.5 MHz ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	22.70 dBm
Antenna Gain	-4.7 dBi
Type of Modulation	QPSK / 16QAM
IMEI Code	Conducted: 356887110007911 Radiation: 356887110008380
HW Version	DVT2
SW Version	QPC30.Q4-3
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Maximum ERP Power, Frequency Tolerance, and Emission Designator

LTE Band 14		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	790.5~795.5	4M51G7D	-	0.0384	4M50W7D	-	0.0324
10	793	9M01G7D	0.0050	0.0385	9M05W7D	-	0.0323
LTE Band 14		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)		Maximum ERP(W)		
5	790.5~795.5	4M54W7D	-		0.0256		
10	793	9M05W7D	-		0.0253		

1.5 Testing Site

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 90(R)
- ANSI C63.26
- KDB 971168 D01 Power Meas License Digital Systems v03r01
- KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola(Salcomp)	Model Name	MC-101
Battery	Brand Name	Motorola(ATL)	Model Name	KX50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18C24367
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18C24368



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	V	-	-	-	V	V	V	V	V	V	V	V	V
Peak-to-Average Ratio	14	-	-		V	-	-	V	V	V	V		V		V	
26dB and 99% Bandwidth	14	-	-	V		-	-	V	V	V			V	V	V	V
Conducted Band Edge	14	-	-	V		-	-	V	V	V	V		V	V		V
Emission Mask	14	-	-	V		-	-	V	V	V	V		V	V	V	V
Conducted Spurious Emission	14	-	-	V		-	-	V	V	V	V			V	V	V
Frequency Stability	14	-	-		V	-	-	V					V		V	
E.R.P	14	-	-	V		-	-	V	V	V	V			V	V	V
Radiated Spurious Emission	14	-	-	V	V	-	-	V						V	V	V

Note

1. The mark "v" means that this configuration is chosen for testing
2. The mark "-" means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

2.2 Connection Diagram of Test System

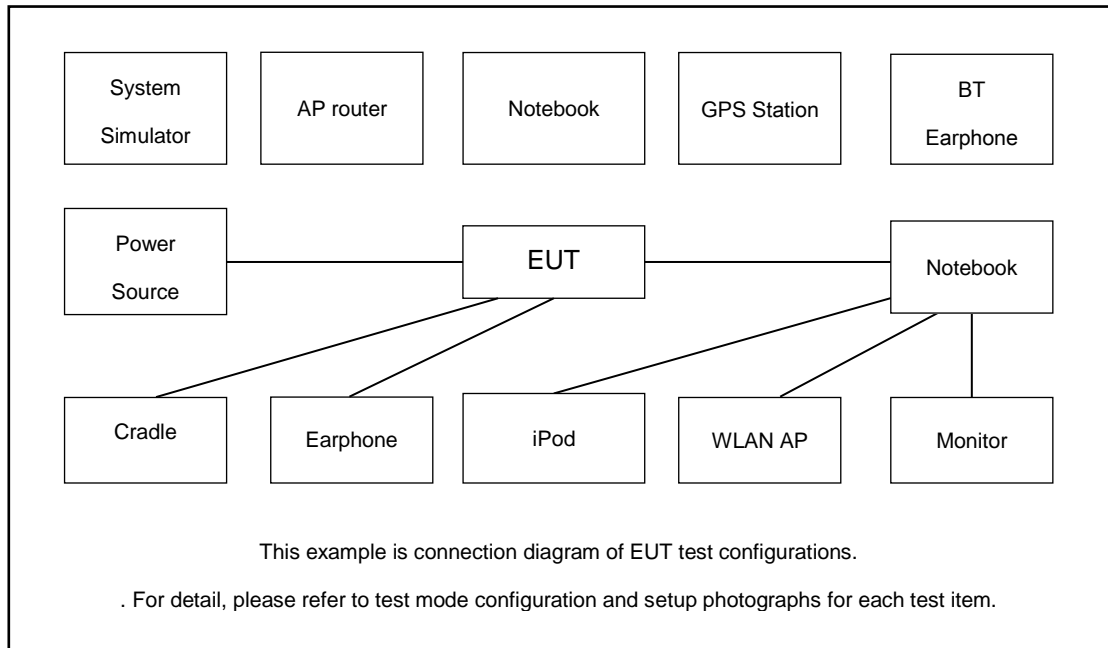

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C/8821	N/A	N/A	Unshielded, 1.8 m
2.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.0 + 10 = 14.0 \text{ (dB)} \end{aligned}$$


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

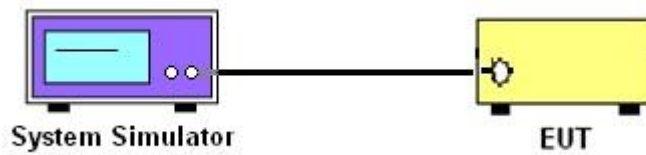

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

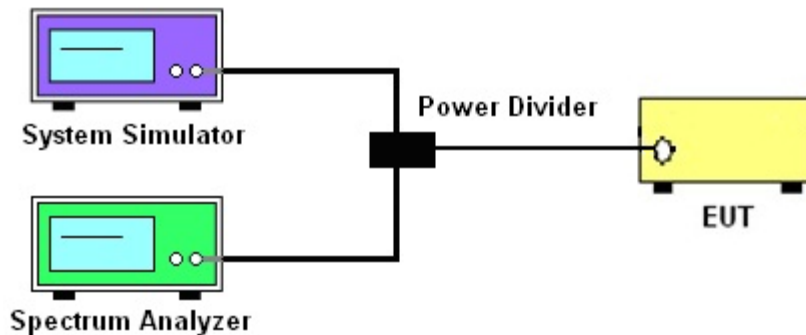

3.1.4 Frequency Stability

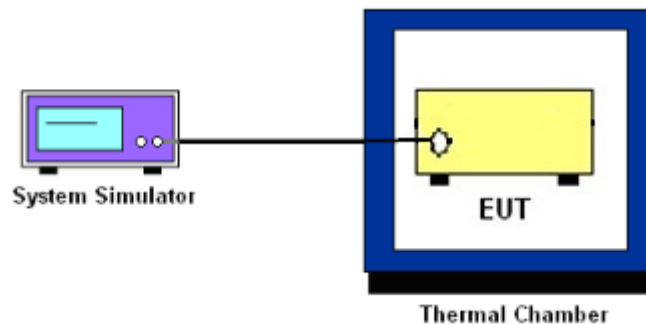

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP

3.2.1 Description of the Conducted Output Power Measurement and ERP

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge Measurement

3.5.1 Description of Conducted Band Edge Measurement

For operations in the 758-768 MHz and the 788-798 MHz bands

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log$ (P) dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log$ (P) dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log$ (P) dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm.}$$

3.6 Emission Mask

3.6.1 Description of Emission Mask

<Emission Mask B>.

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.7 Conducted Spurious Emission Measurement

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and base station via power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's, for under 1GHz RBW = 100kHz, VBW = 300kHz and for above 1GHz RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 1.25 ppm of the center frequency.

3.8.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

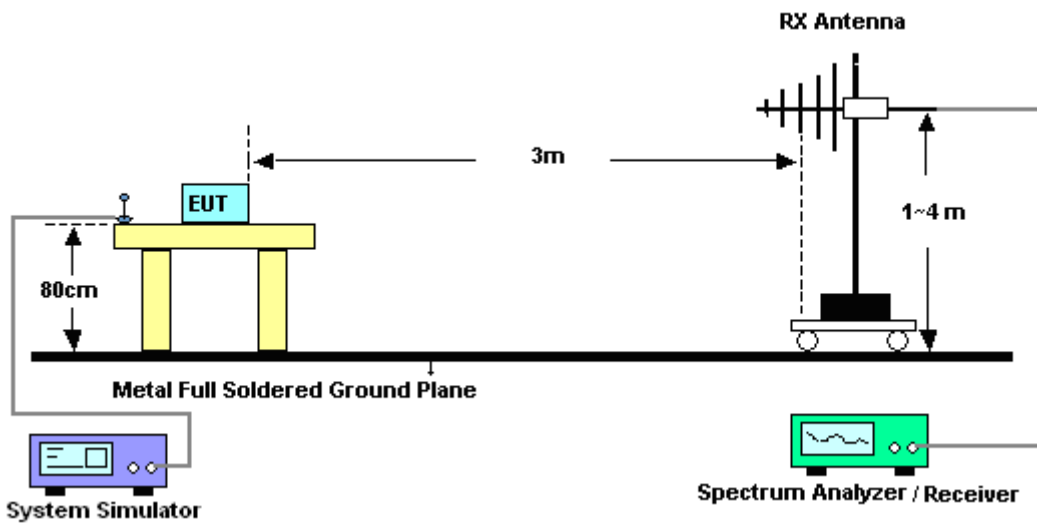

4.2.2 For radiated test above 1GHz

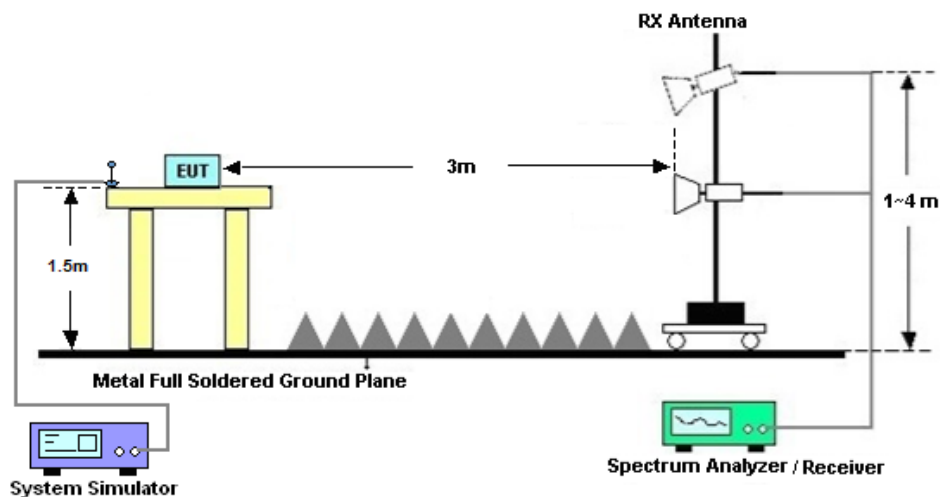

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] (dB)$
= $[30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Aug. 31, 2020~ Sep. 01, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Nov. 18, 2019	Aug. 31, 2020~ Sep. 01, 2020	Nov. 17, 2020	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Aug. 24, 2020	Apr. 14, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jan. 03, 2020	Aug. 24, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 20, 2020	Aug. 24, 2020	Apr. 19, 2021	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Aug. 24, 2020	Nov. 09, 2020	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 03, 2020	Aug. 24, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 08, 2020	Aug. 24, 2020	Jan. 07, 2021	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Jan. 03, 2020	Aug. 24, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct.15, 2019	Aug. 24, 2020	Oct.14, 2020	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 24, 2020	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 24, 2020	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 24, 2020	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23330		
Frequency (MHz)				793		
10	QPSK	1	0		22.64	
10	QPSK	1	25		22.59	
10	QPSK	1	49		22.70	
10	QPSK	25	0		21.70	
10	QPSK	25	12		21.69	
10	QPSK	25	25		21.67	
10	QPSK	50	0		21.69	
10	16QAM	1	0		21.85	
10	16QAM	1	25		21.84	
10	16QAM	1	49		21.94	
10	16QAM	25	0		20.73	
10	16QAM	25	12		20.75	
10	16QAM	25	25		20.72	
10	16QAM	50	0		20.75	
10	64QAM	1	0		20.80	
10	64QAM	1	25		20.85	
10	64QAM	1	49		20.88	
10	64QAM	25	0		19.73	
10	64QAM	25	12		19.75	
10	64QAM	25	25		19.70	
10	64QAM	50	0		19.75	
Channel				23305	23330	23355
Frequency (MHz)				790.5	793	795.5
5	QPSK	1	0	22.66	22.61	22.60
5	QPSK	1	12	22.63	22.62	22.69



5	QPSK	1	24	22.59	22.68	22.67
5	QPSK	12	0	21.68	21.66	21.67
5	QPSK	12	7	21.70	21.70	21.68
5	QPSK	12	13	21.68	21.67	21.75
5	QPSK	25	0	21.72	21.65	21.65
5	16QAM	1	0	21.83	21.80	21.85
5	16QAM	1	12	21.84	21.84	21.95
5	16QAM	1	24	21.86	21.95	21.87
5	16QAM	12	0	20.73	20.70	20.72
5	16QAM	12	7	20.78	20.76	20.73
5	16QAM	12	13	20.74	20.71	20.80
5	16QAM	25	0	20.75	20.71	20.71
5	64QAM	1	0	20.84	20.79	20.80
5	64QAM	1	12	20.82	20.81	20.93
5	64QAM	1	24	20.81	20.89	20.85
5	64QAM	12	0	19.77	19.77	19.74
5	64QAM	12	7	19.82	19.81	19.80
5	64QAM	12	13	19.79	19.75	19.82
5	64QAM	25	0	19.76	19.73	19.71

ERP

LTE Band 14 ($G_T - L_C = -4.7$ dBi) QPSK						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	22.63	22.62	22.69		22.70	
Conducted Power (Watts)	0.1832	0.1828	0.1858		0.1862	
ERP(dBm)	15.78	15.77	15.84		15.85	
ERP(Watts)	0.0378	0.0378	0.0384		0.0385	

LTE Band 14 ($G_T - L_C = -4.7$ dBi) 16QAM						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	21.84	21.84	21.95		21.94	
Conducted Power (Watts)	0.1528	0.1528	0.1567		0.1563	
ERP(dBm)	14.99	14.99	15.10		15.09	
ERP(Watts)	0.0316	0.0316	0.0324		0.0323	




LTE Band 14 (G _T - L _C = -4.7 dBi) 64QAM						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	20.82	20.81	20.93		20.88	
Conducted Power (Watts)	0.1208	0.1205	0.1239		0.1225	
ERP(dBm)	13.97	13.96	14.08		14.03	
ERP(Watts)	0.0249	0.0249	0.0256		0.0253	

Peak-to-Average Ratio

Mode	LTE Band 14 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	2.87	4.29	4.09	5.42	
Highest CH	-	-	-	-	
Mode	LTE Band 14 / 10MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	PASS
Middle CH	5.39	6.06	-	-	
Highest CH	-	-	-	-	


LTE Band 14 / 10MHz / QPSK

Middle Channel/ 1RB

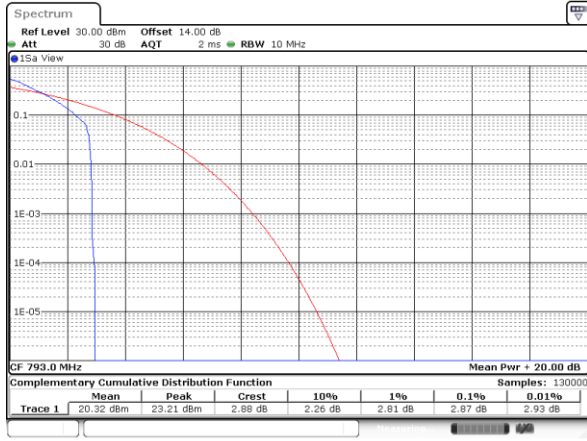

Date: 31.AUG.2020 06:07:14


Middle Channel / Full RB

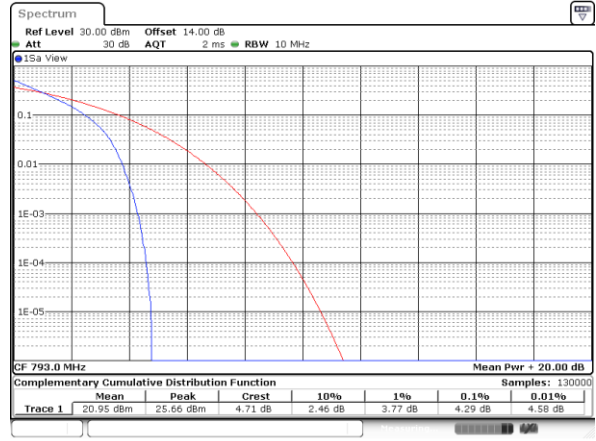

Date: 31.AUG.2020 06:05:52


LTE Band 14 / 10MHz / 16QAM

Middle Channel/ 1RB

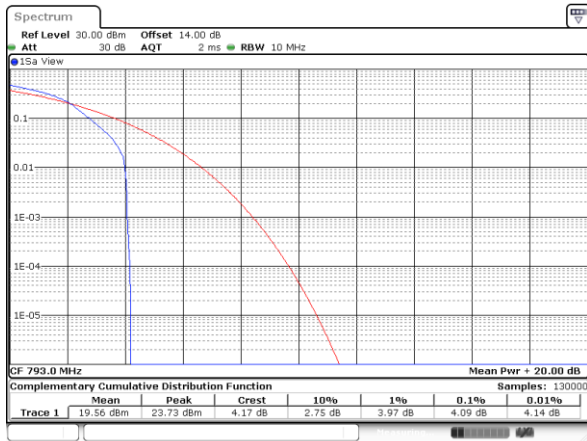

Date: 31.AUG.2020 05:54:24


Middle Channel / Full RB

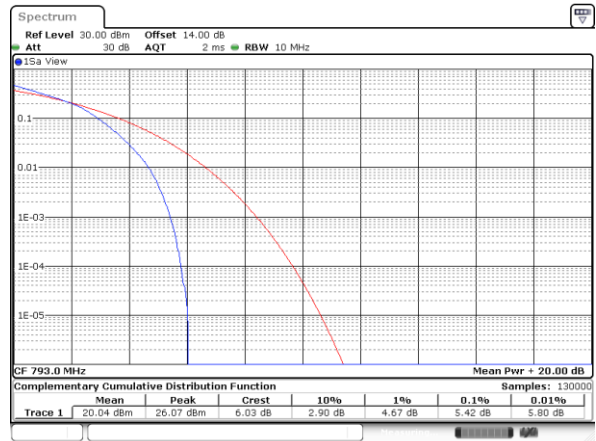

Date: 31.AUG.2020 06:01:08


LTE Band 14 / 10MHz / 64QAM

Middle Channel/ 1RB

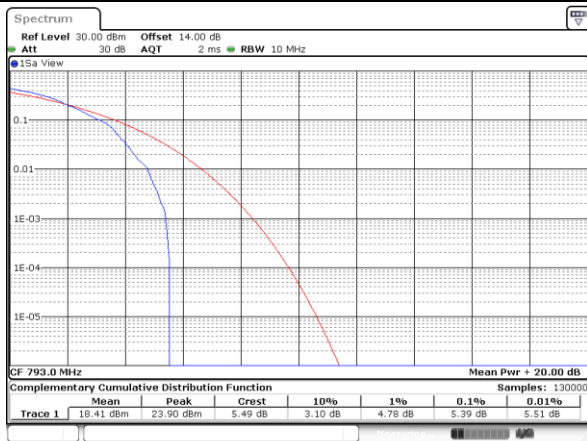

Date: 31.AUG.2020 05:41:20

Middle Channel / Full RB

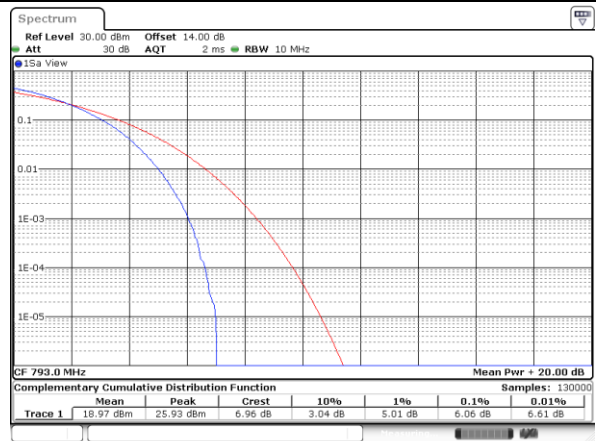

Date: 31.AUG.2020 05:39:57




26dB Bandwidth

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.94	4.93			-	-	-	-
Middle CH	-	-	-	-	4.93	4.96	9.87	9.87	-	-	-	-
Highest CH	-	-	-	-	4.89	4.85			-	-	-	-
Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.84	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.90	-	9.65	-	-	-	-	-
Highest CH	-	-	-	-	4.92	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

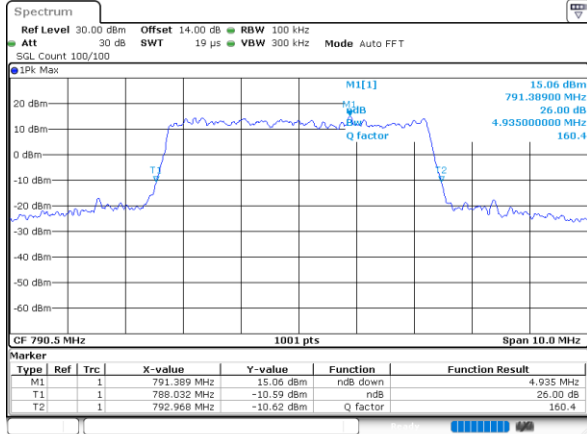


Date: 31.AUG.2020 04:52:36

Lowest Channel / 5MHz / 16QAM

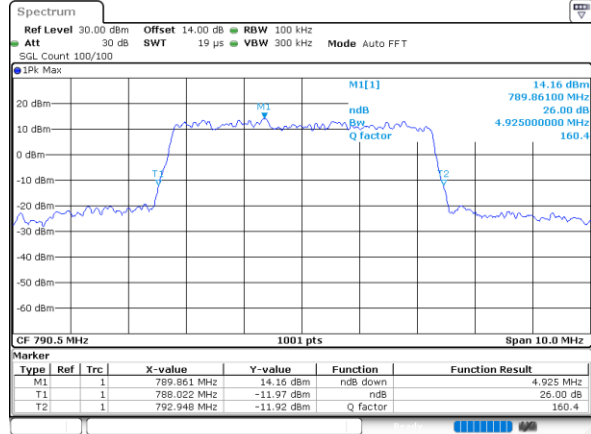


Date: 31.AUG.2020 04:55:15

Middle Channel / 5MHz / QPSK

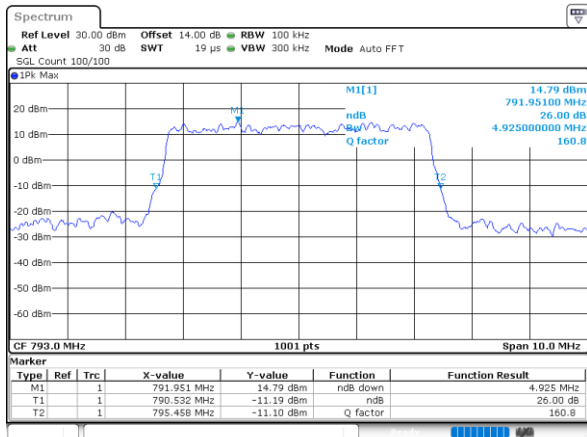


Date: 31.AUG.2020 05:09:27

Middle Channel / 5MHz / 16QAM

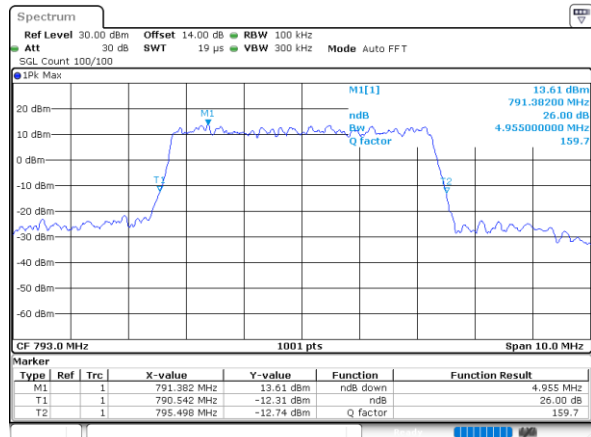


Date: 31.AUG.2020 05:10:55

Highest Channel / 5MHz / QPSK

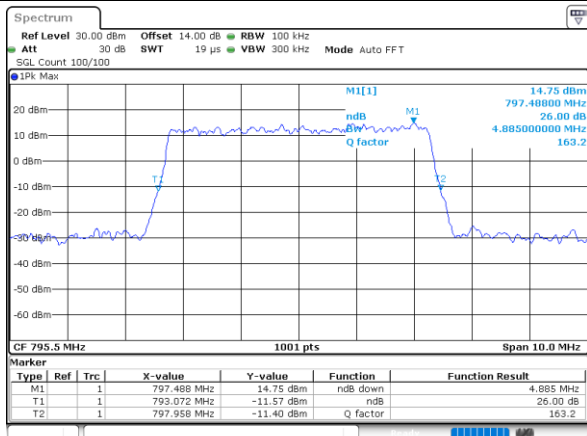

Date: 31.AUG.2020 05:13:09

Highest Channel / 5MHz / 16QAM

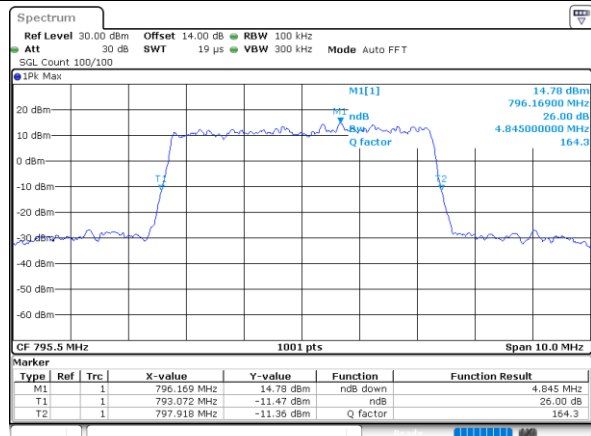


Date: 31.AUG.2020 05:15:24



LTE Band 14


Middle Channel / 10MHz / QPSK

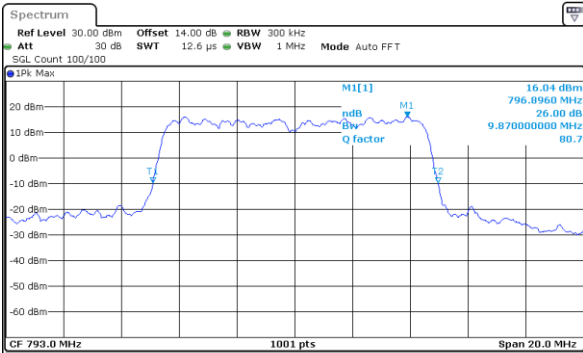

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		796.896 MHz	16.04 dBm	ndB down	9.87 MHz
T1	1		788.085 MHz	-9.59 dBm	ndB	26.00 dB
T2	1		797.935 MHz	-9.85 dBm	Q factor	80.7

Date: 31.AUG.2020 06:01:51

Middle Channel / 10MHz / 16QAM

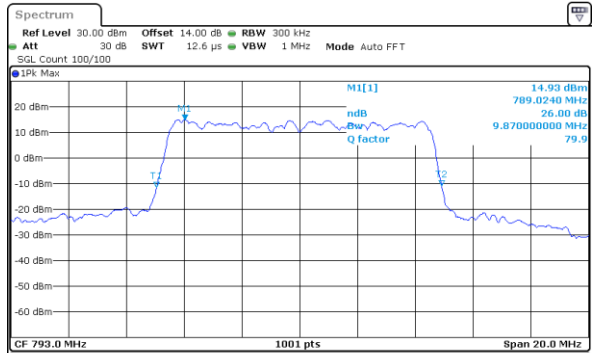


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		789.024 MHz	14.93 dBm	ndB down	9.87 MHz
T1	1		788.045 MHz	-11.40 dBm	ndB	26.00 dB
T2	1		797.915 MHz	-10.92 dBm	Q factor	79.9

Date: 31.AUG.2020 05:59:16




LTE Band 14

Lowest Channel / 5MHz / 64QAM

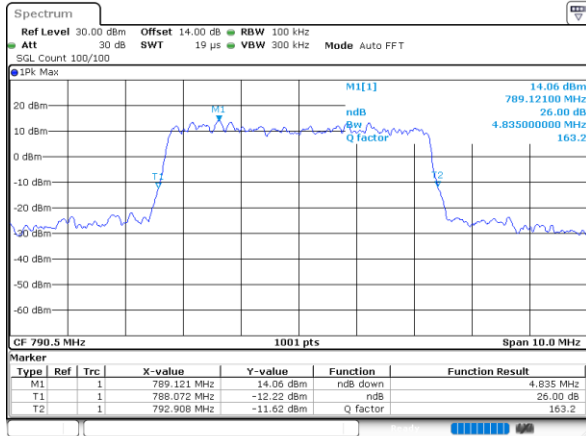


Date: 31.AUG.2020 04:57:50

Middle Channel / 5MHz / 64QAM

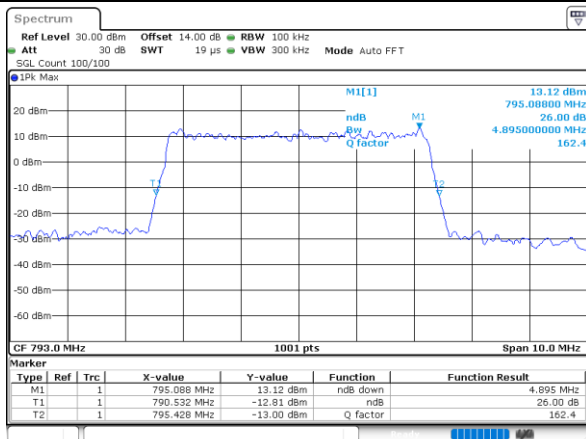


Date: 31.AUG.2020 05:10:13

Middle Channel / 10MHz / 64QAM

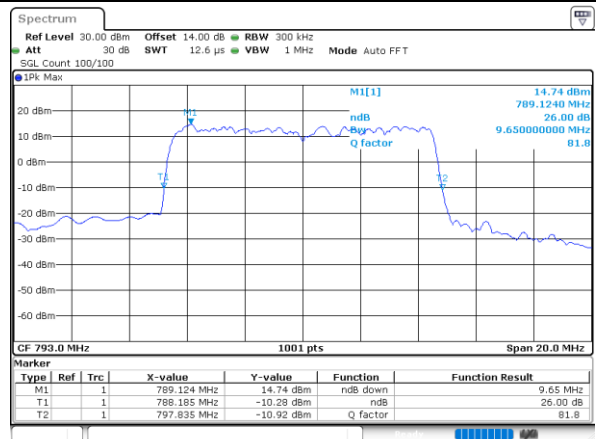

Date: 31.AUG.2020 05:14:09

Highest Channel / 5MHz / 64QAM

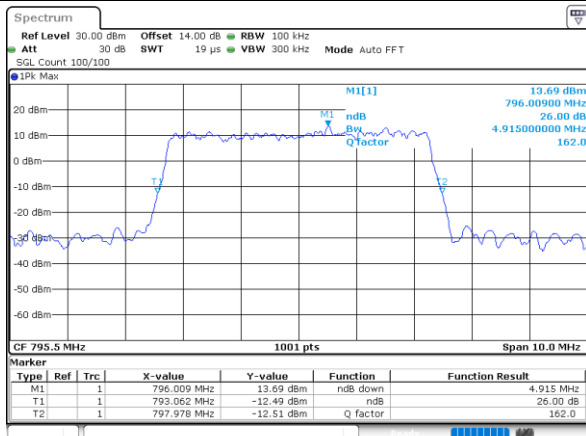

Date: 31.AUG.2020 05:17:44




Occupied Bandwidth

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.51	4.50			-	-	-	-
Middle CH	-	-	-	-	4.50	4.50	9.01	9.05	-	-	-	-
Highest CH	-	-	-	-	4.49	4.49			-	-	-	-
Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.54	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.49	-	9.05	-	-	-	-	-
Highest CH	-	-	-	-	4.51	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

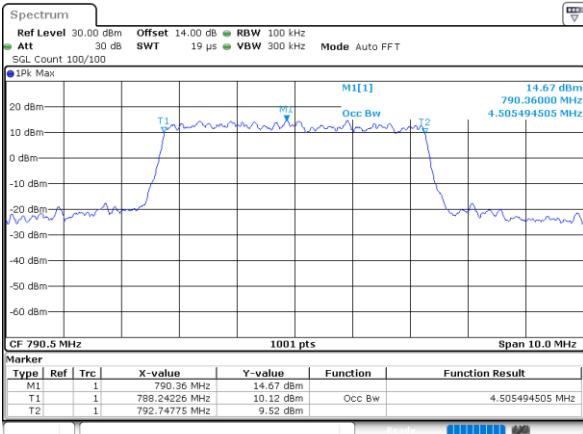


Date: 31.AUG.2020 04:52:24

Lowest Channel / 5MHz / 16QAM

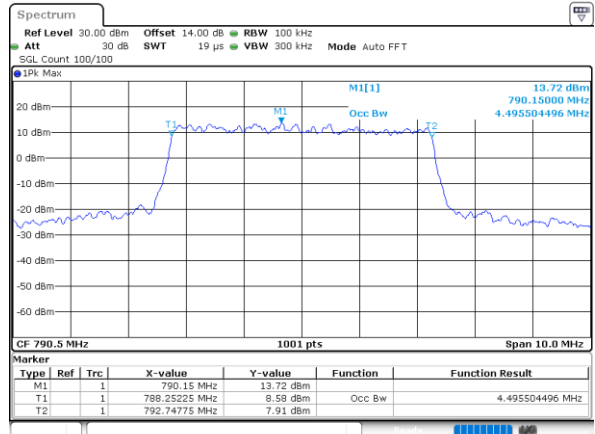


Date: 31.AUG.2020 04:55:10

Middle Channel / 5MHz / QPSK

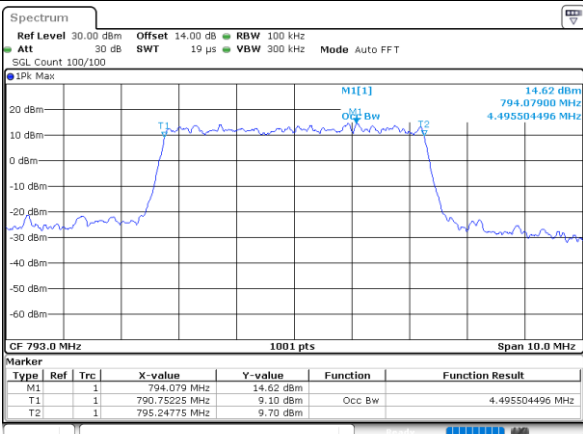


Date: 31.AUG.2020 05:09:01

Middle Channel / 5MHz / 16QAM

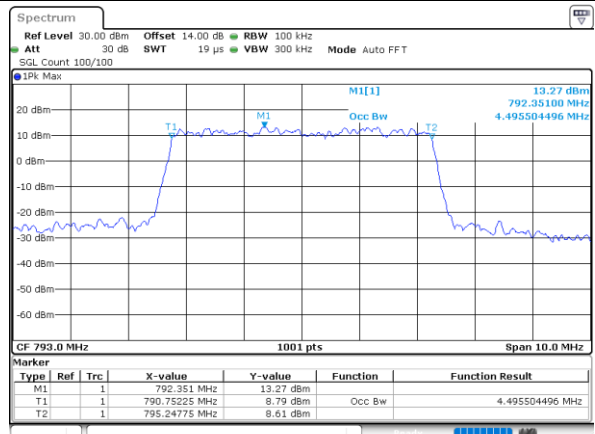


Date: 31.AUG.2020 05:10:49

Highest Channel / 5MHz / QPSK

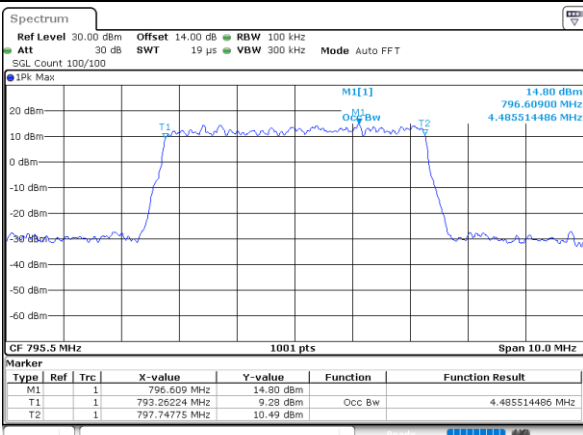

Date: 31.AUG.2020 05:13:03

Highest Channel / 5MHz / 16QAM

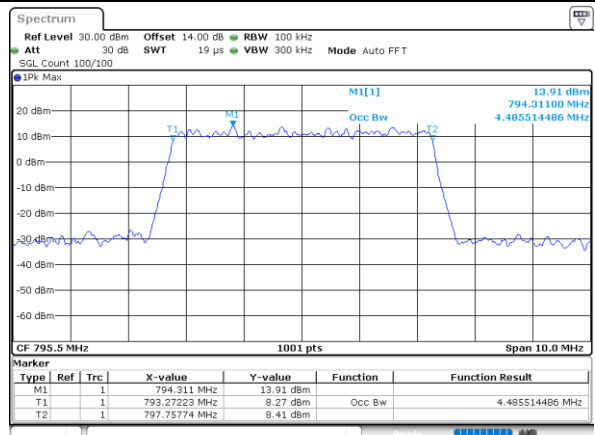


Date: 31.AUG.2020 05:15:18



LTE Band 14


Middle Channel / 10MHz / QPSK

Middle Channel / 10MHz / 16QAM

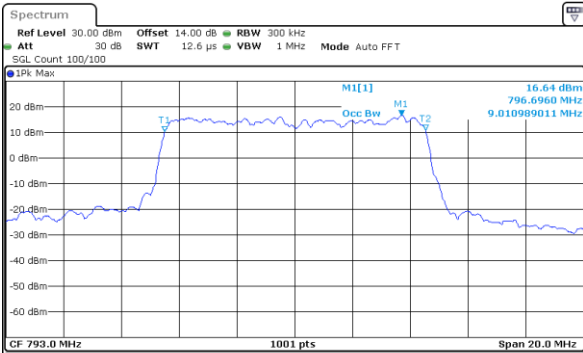

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		796.696 MHz	16.64 dBm		
T1	1		788.5045 MHz	10.23 dBm	Occ Bw	9.010989011 MHz
T2	1		797.5155 MHz	10.87 dBm		

Date: 31.AUG.2020 06:01:44

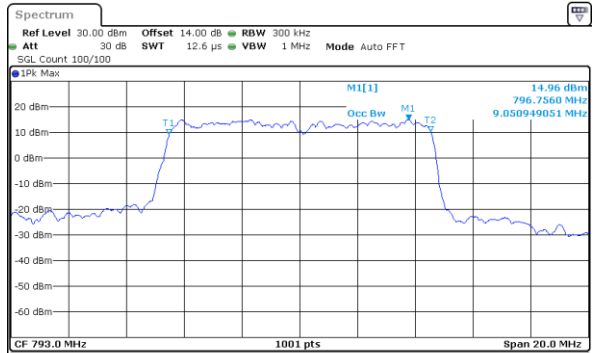


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		796.756 MHz	14.96 dBm		
T1	1		788.4845 MHz	9.28 dBm	Occ Bw	9.050949051 MHz
T2	1		797.5355 MHz	10.17 dBm		

Date: 31.AUG.2020 05:59:08


LTE Band 14

Lowest Channel / 5MHz / 64QAM

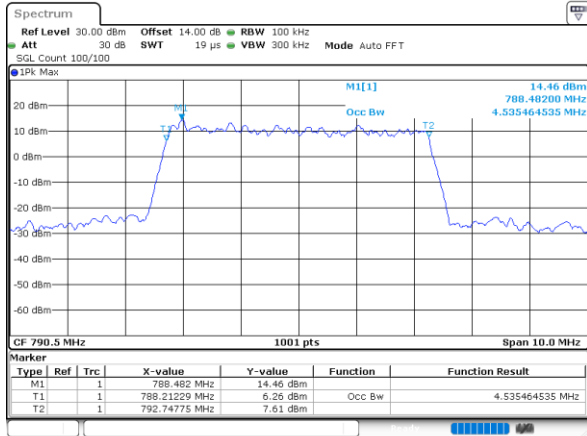


Date: 31.AUG.2020 04:57:43

Middle Channel / 5MHz / 64QAM

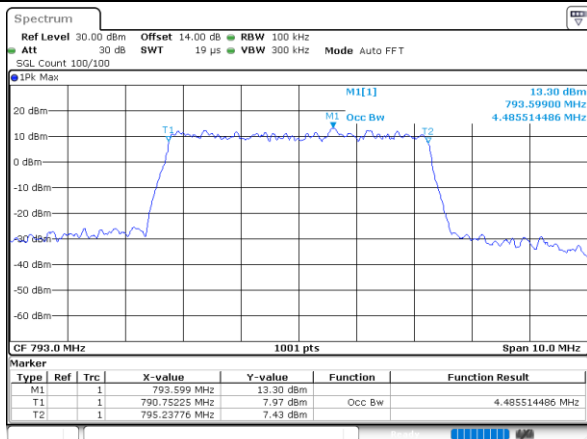


Date: 31.AUG.2020 05:10:08

Middle Channel / 10MHz / 64QAM

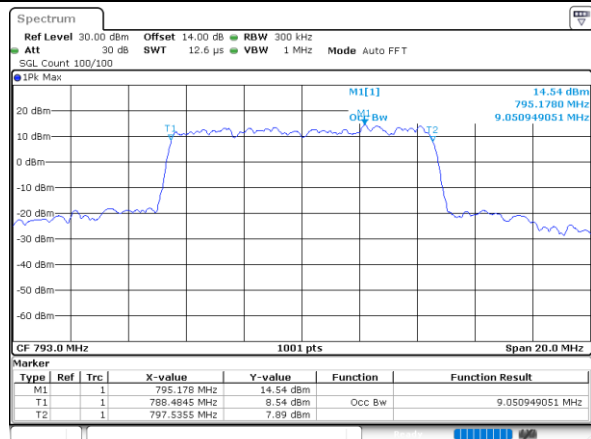

Date: 31.AUG.2020 05:13:103

Highest Channel / 5MHz / 64QAM

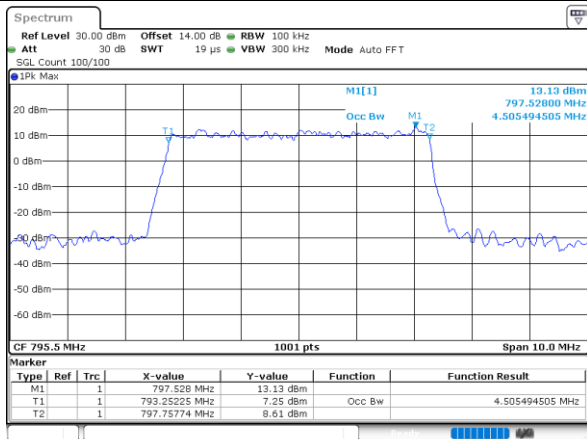

Date: 31.AUG.2020 05:17:36





Conducted Band Edge

LTE Band 14 / 5MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

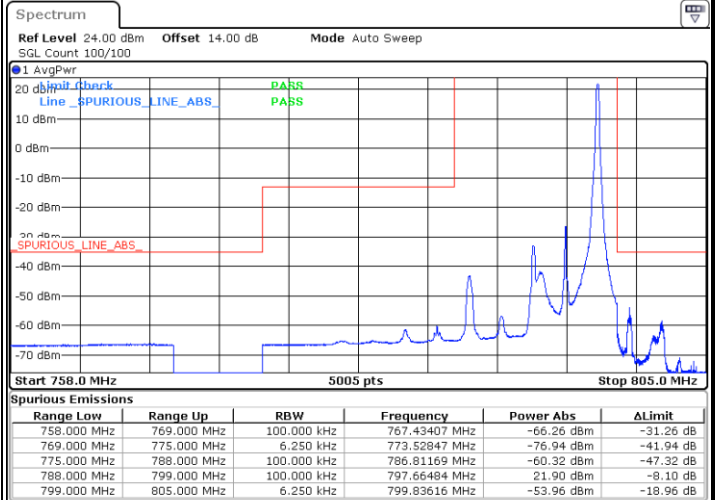
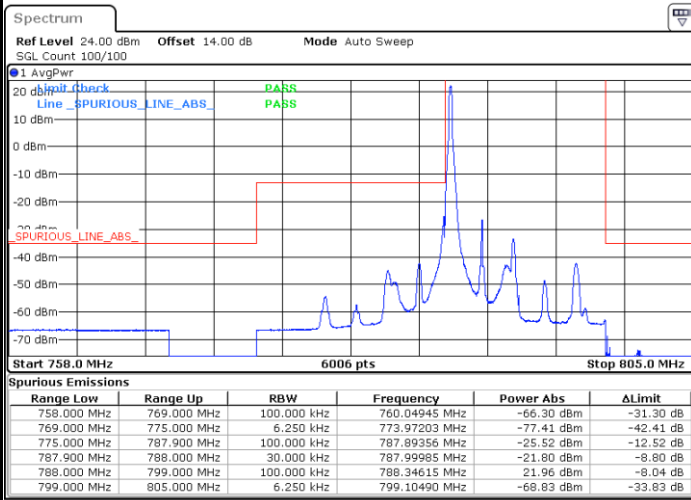


Date: 31.AUG.2020 05:08:14

Date: 31.AUG.2020 05:25:03

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

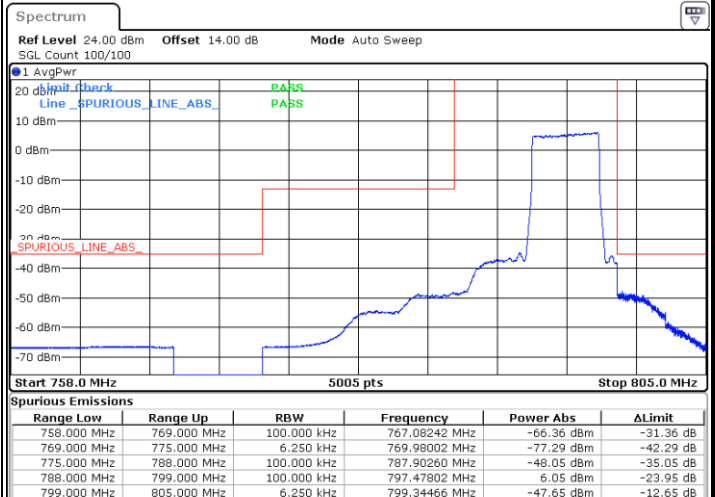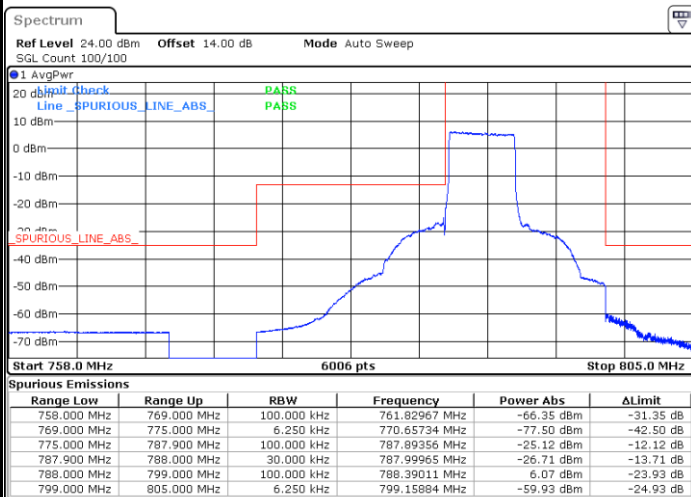


Date: 31.AUG.2020 04:54:33

Date: 31.AUG.2020 05:15:08




LTE Band 14 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

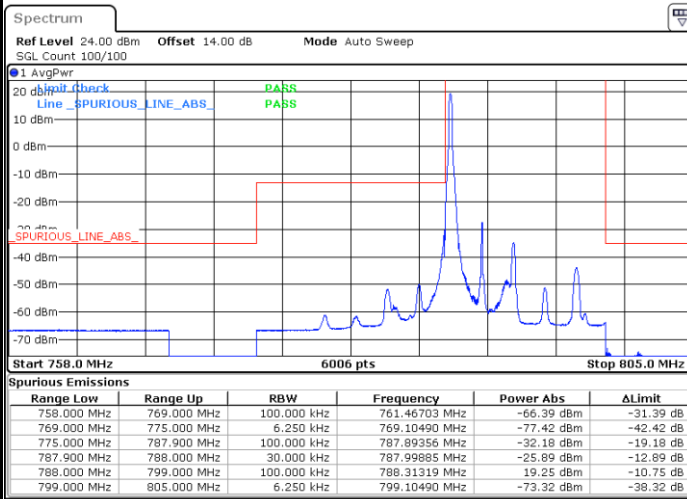


Date: 31.AUG.2020 05:06:01

Highest Band Edge / 1 RB

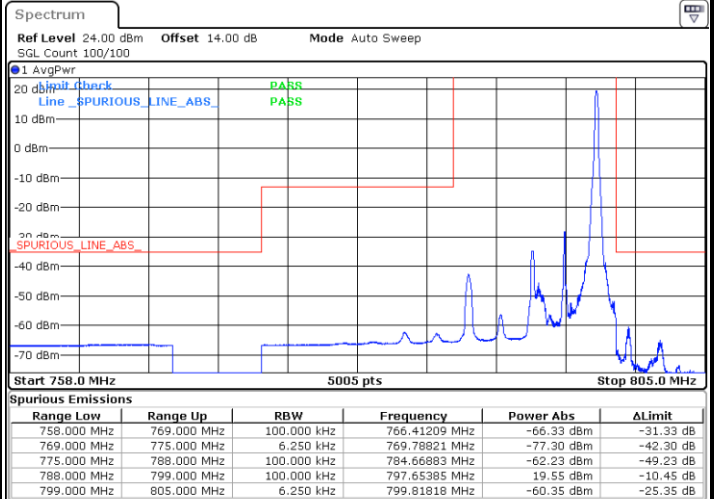


Date: 31.AUG.2020 05:27:30

Lowest Band Edge / Full RB

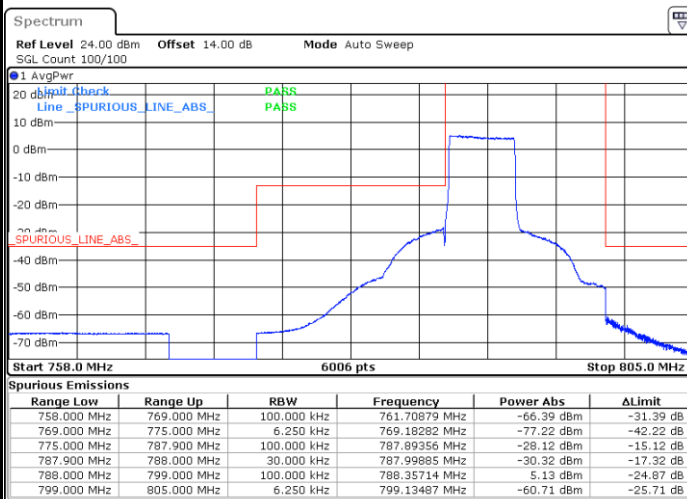

Date: 31.AUG.2020 04:57:29

Highest Band Edge / Full RB

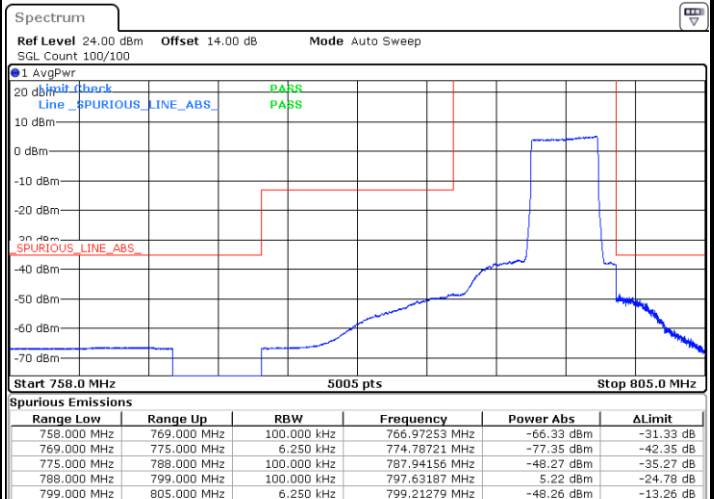


Date: 31.AUG.2020 05:17:23




LTE Band 14 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

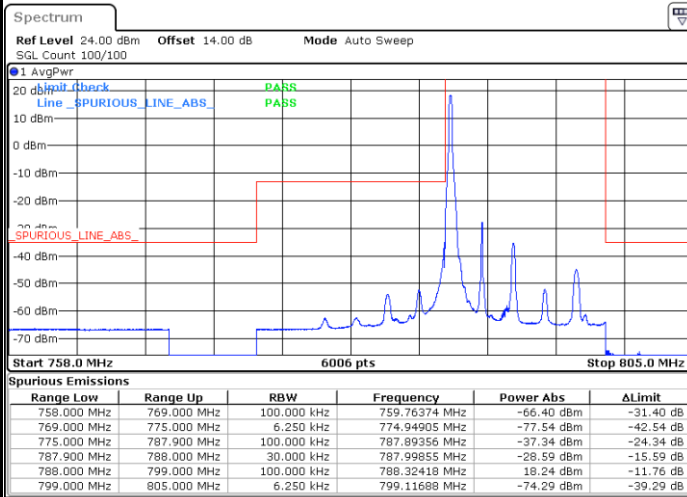


Date: 31.AUG.2020 05:02:17

Highest Band Edge / 1 RB

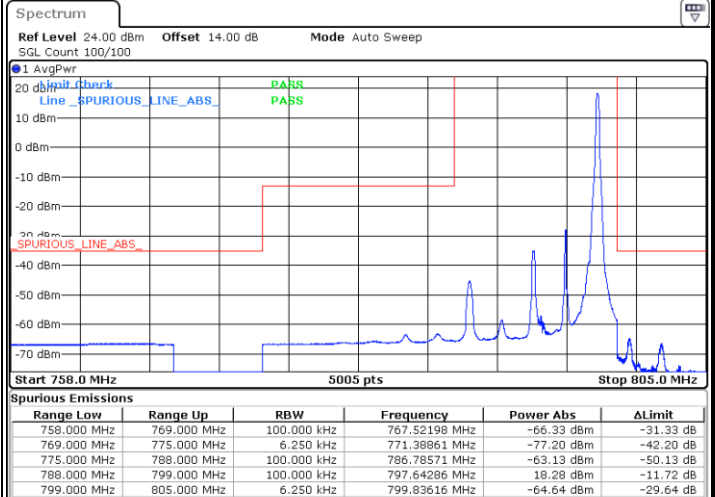


Date: 31.AUG.2020 05:29:54

Lowest Band Edge / Full RB

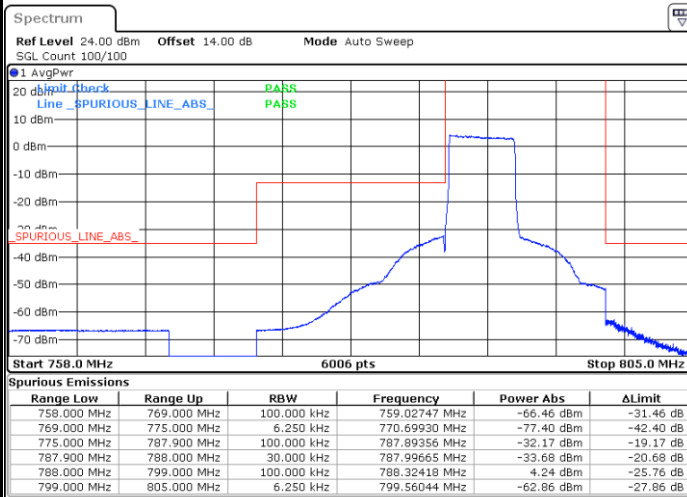

Date: 31.AUG.2020 05:00:06

Highest Band Edge / Full RB

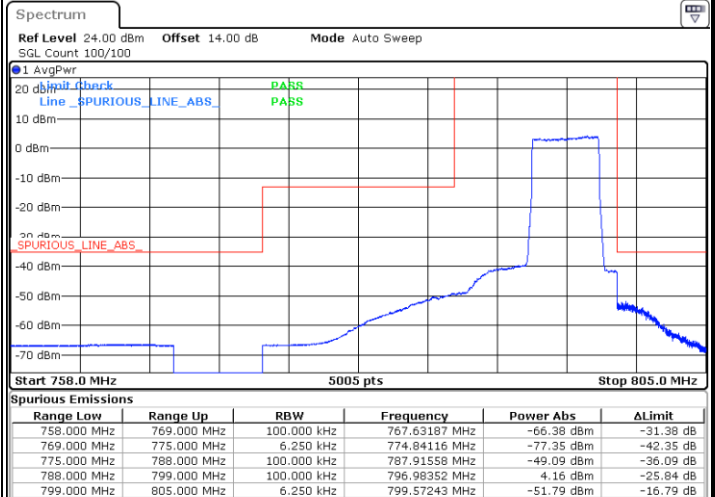



Date: 31.AUG.2020 05:19:13



LTE Band 14 / 10MHz / QPSK

Lowest Band Edge / 1 RB


Highest Band Edge / 1 RB

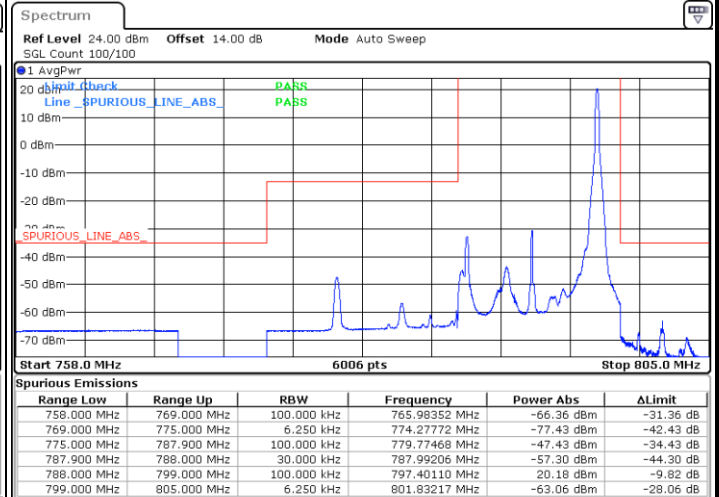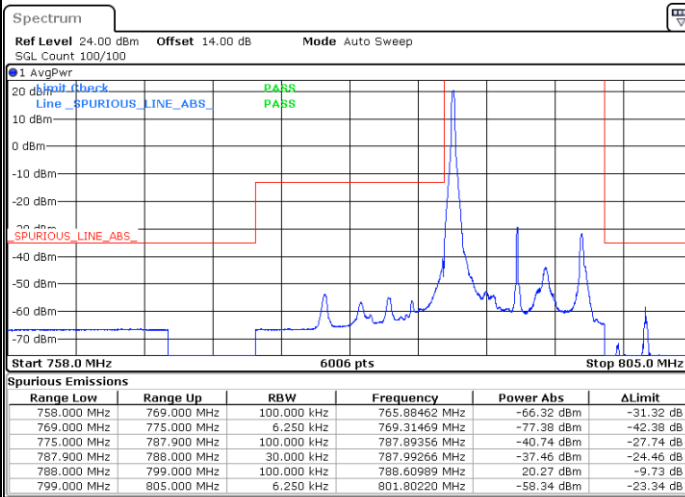

Date: 31.AUG.2020 06:12:03

Date: 31.AUG.2020 06:14:45

Band Edge / Full RB

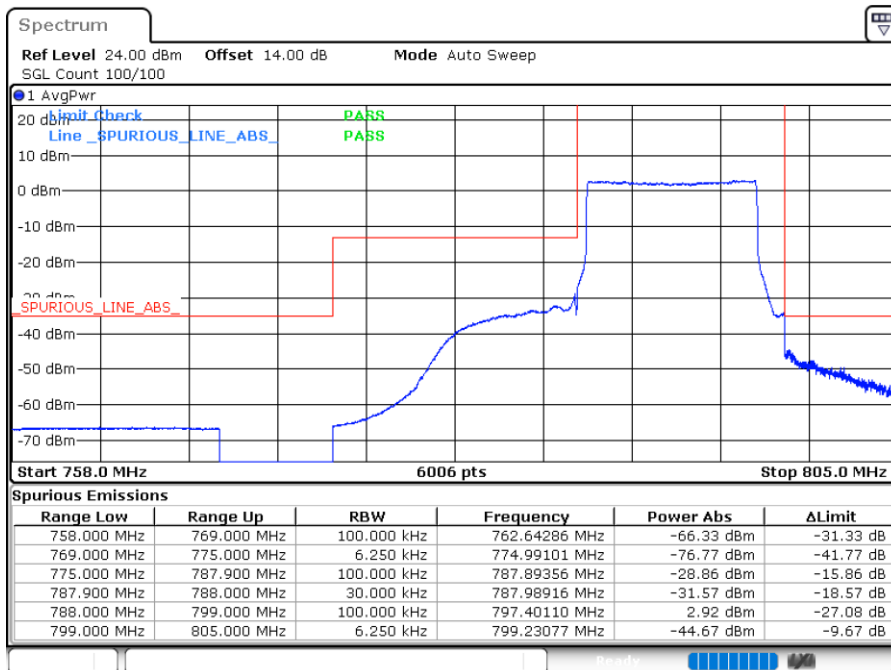


Date: 31.AUG.2020 06:03:43




LTE Band 14 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

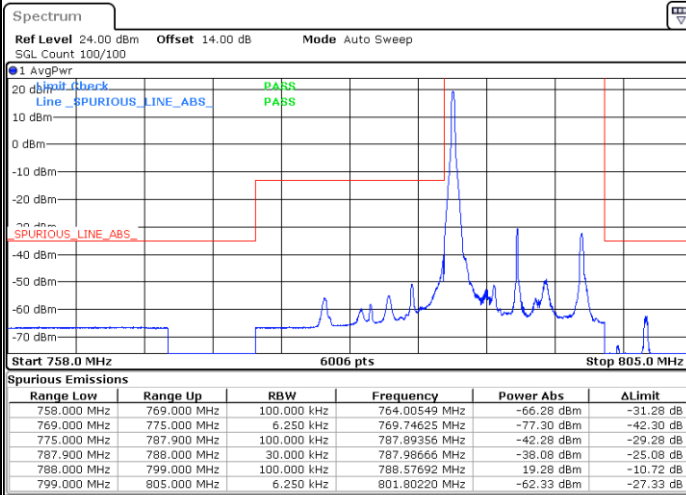


Date: 31.AUG.2020 05:58:03

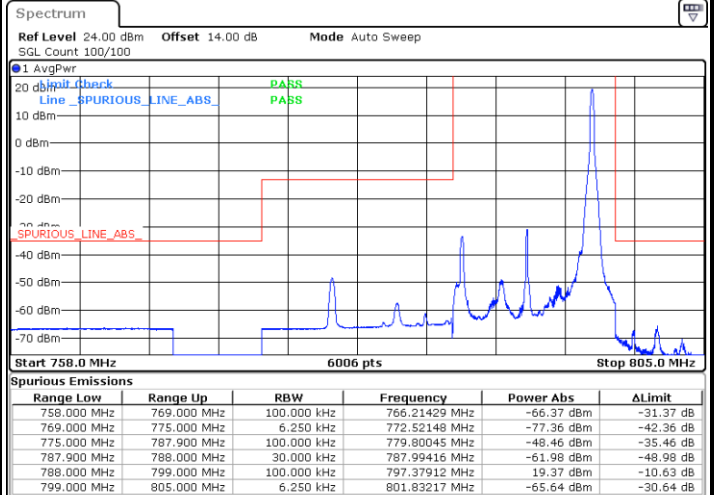

Date: 31.AUG.2020 05:53:58

Band Edge / Full RB

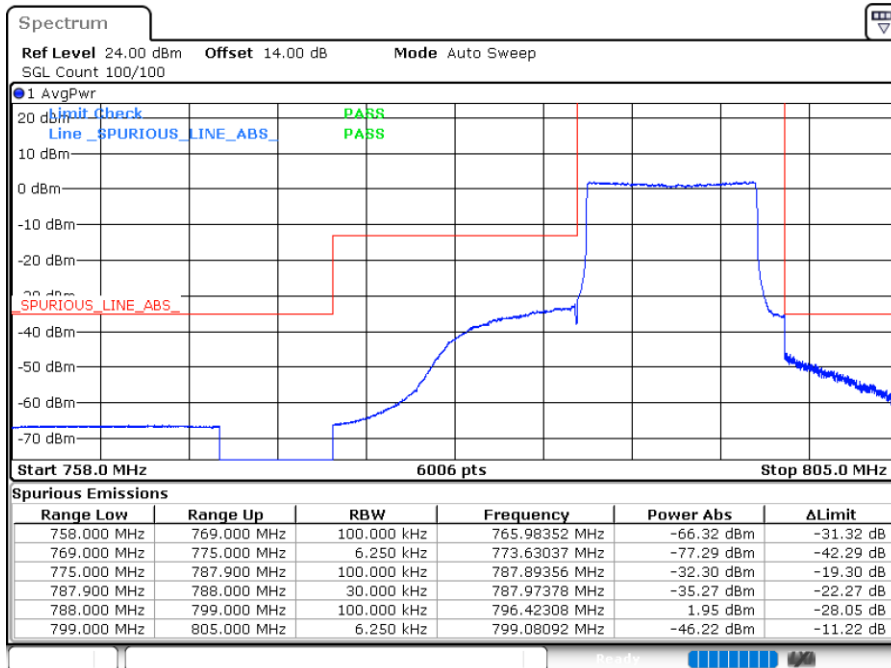



Date: 31.AUG.2020 06:00:56



LTE Band 14 / 10MHz / 64QAM

Lowest Band Edge / 1 RB


Highest Band Edge / 1 RB

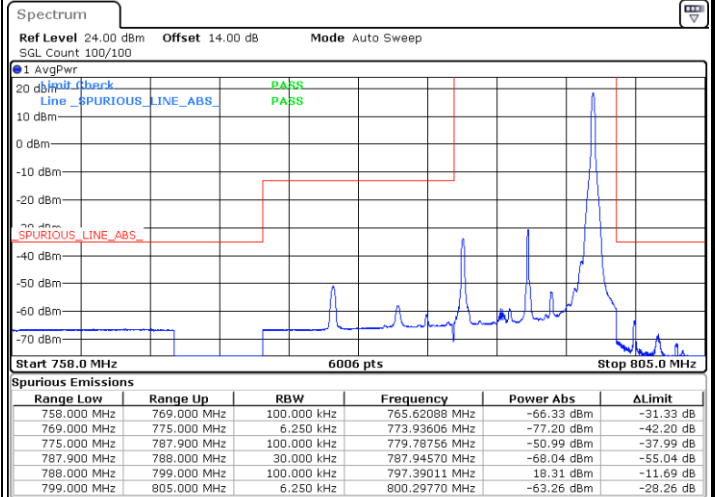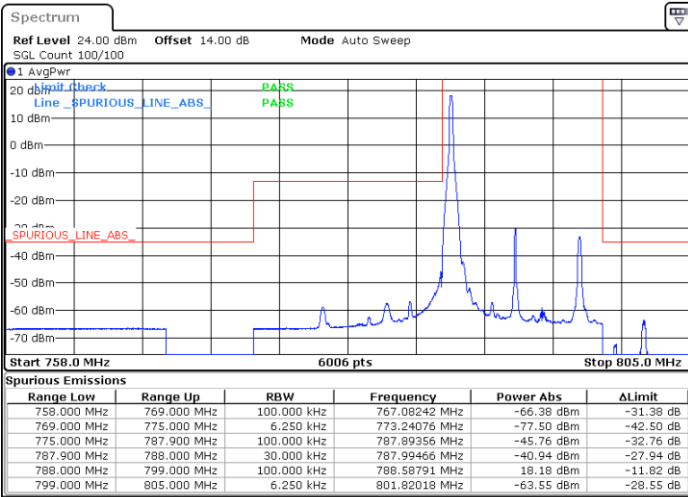

Date: 31.AUG.2020 05:43:43

Date: 31.AUG.2020 05:47:24


Band Edge / Full RB

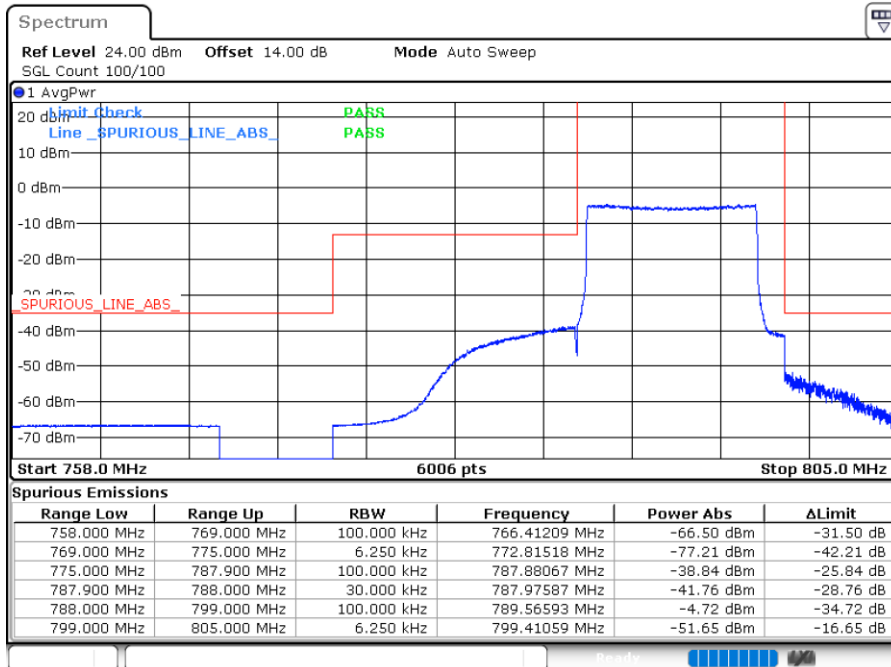

Date: 31.AUG.2020 05:46:11




Conducted Spurious Emission

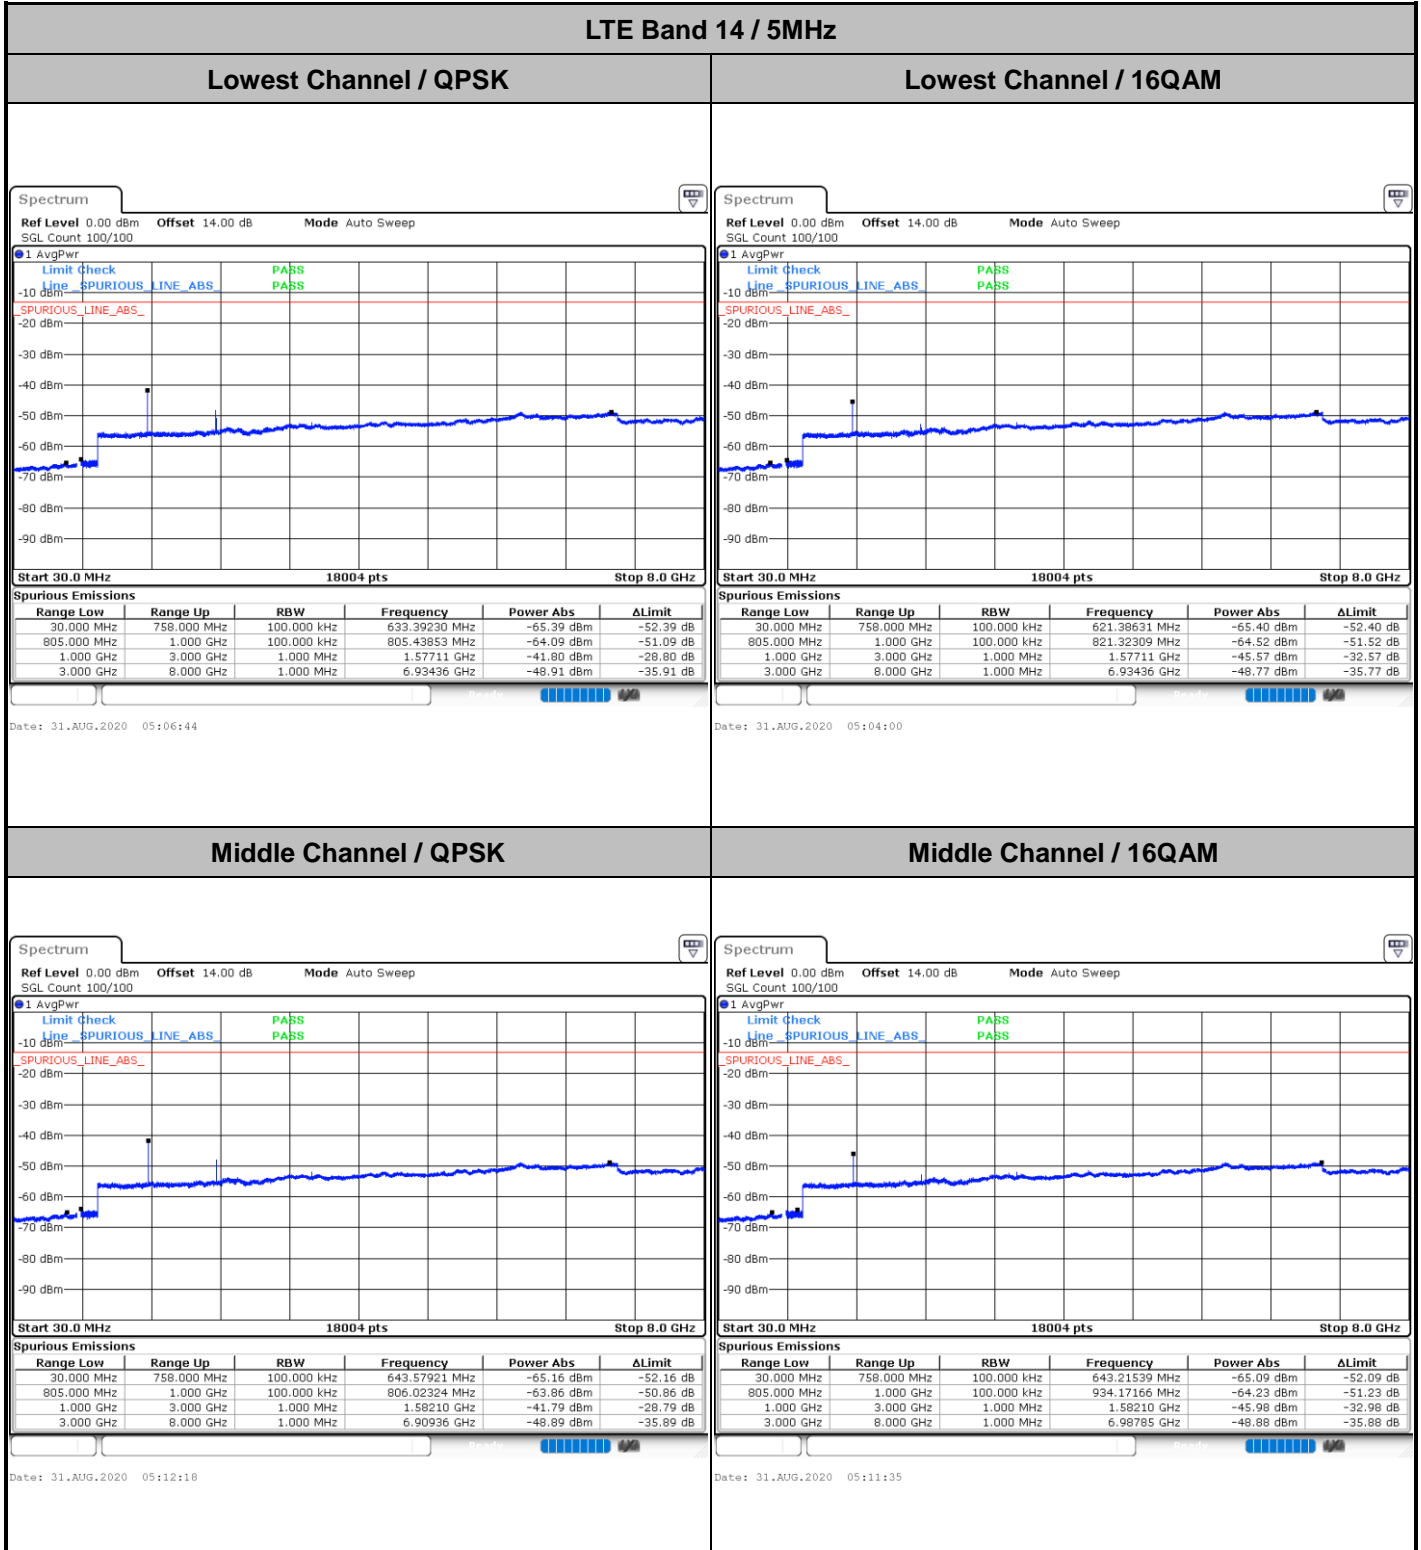




LTE Band 14 / 5MHz

Highest Channel / QPSK

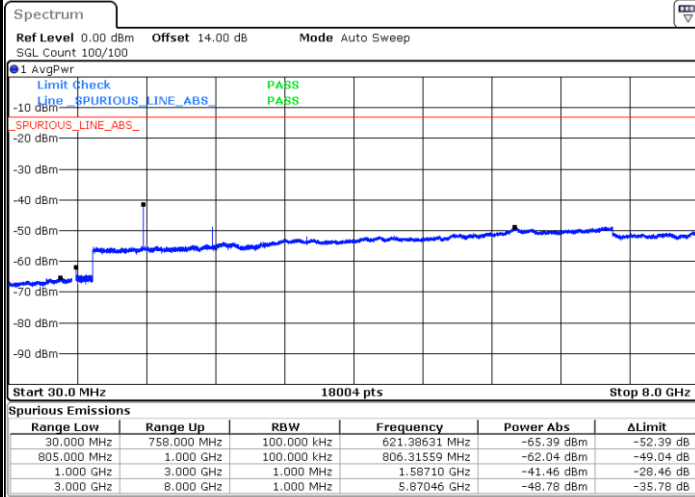

Date: 31.AUG.2020 05:22:57


Highest Channel / 16QAM

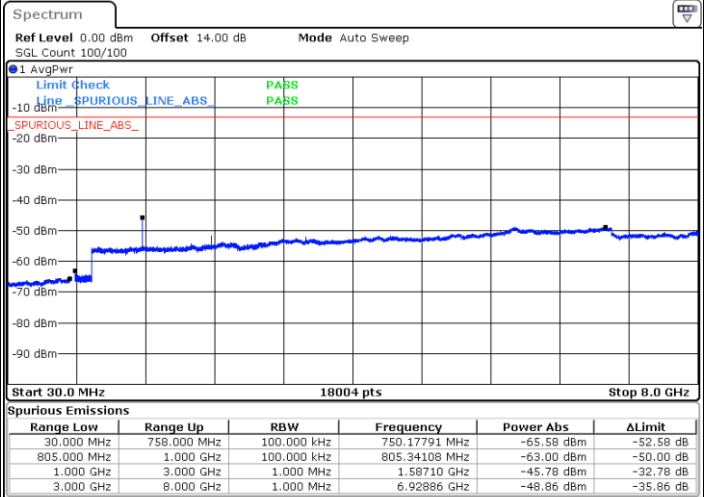

Date: 31.AUG.2020 05:22:13


LTE Band 14 / 10MHz

Middle Channel / QPSK

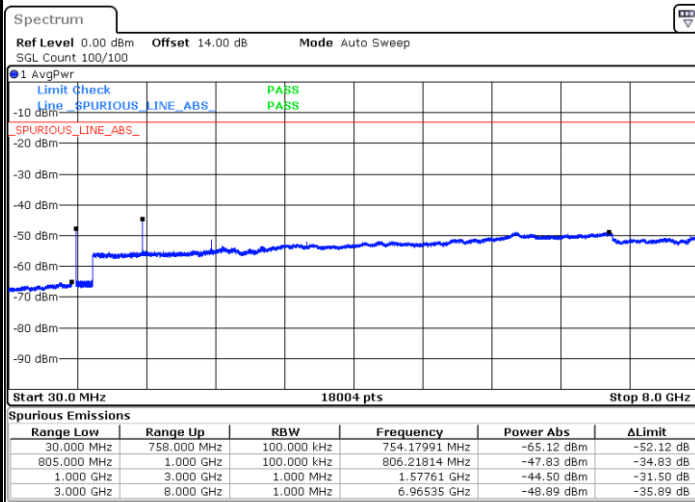

Date: 31.AUG.2020 06:07:07

Middle Channel / 16QAM

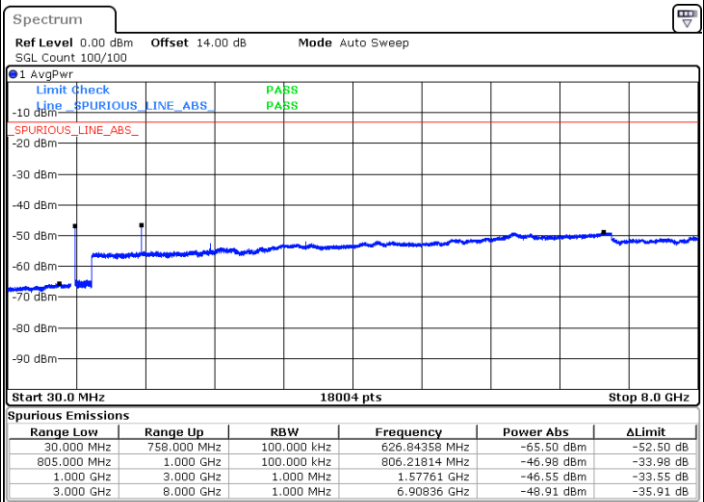


Date: 31.AUG.2020 05:54:53




LTE Band 14 / 5MHz

Lowest Channel / 64QAM

Middle Channel / 64QAM

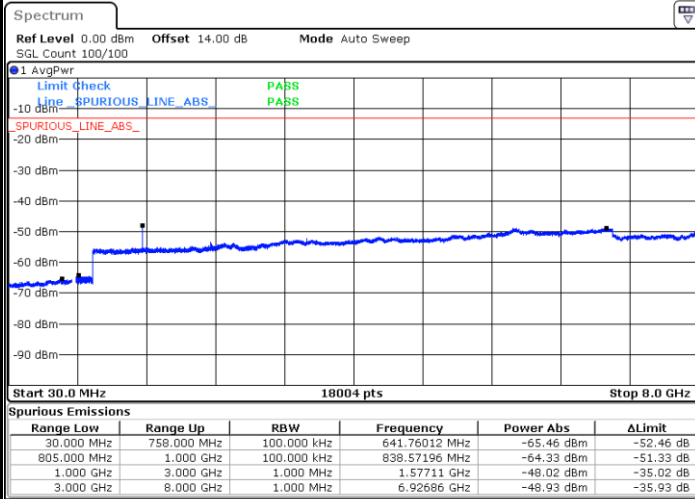


Date: 31.AUG.2020 05:03:01

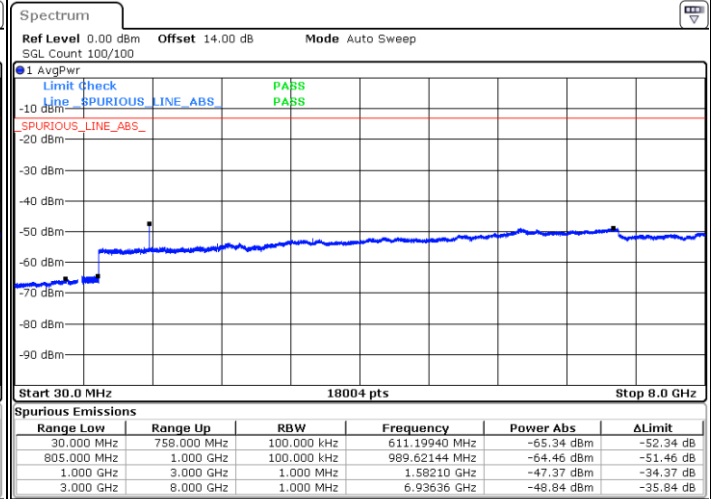

Date: 31.AUG.2020 05:10:56

Highest Channel / 64QAM

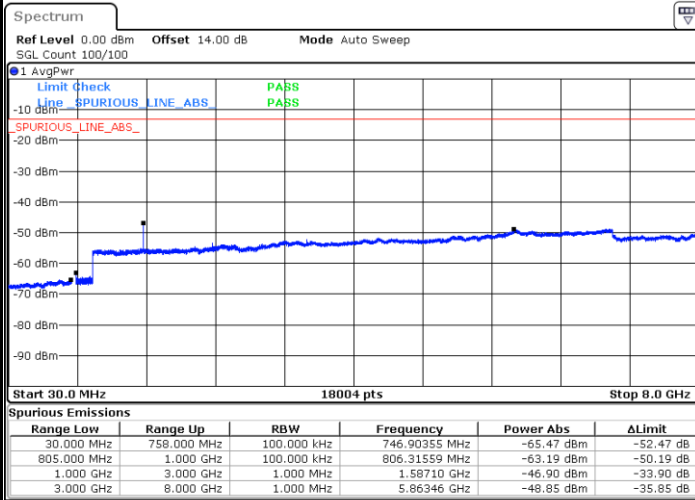


Date: 31.AUG.2020 05:21:04



LTE Band 14 / 10MHz


Middle Channel / 64QAM

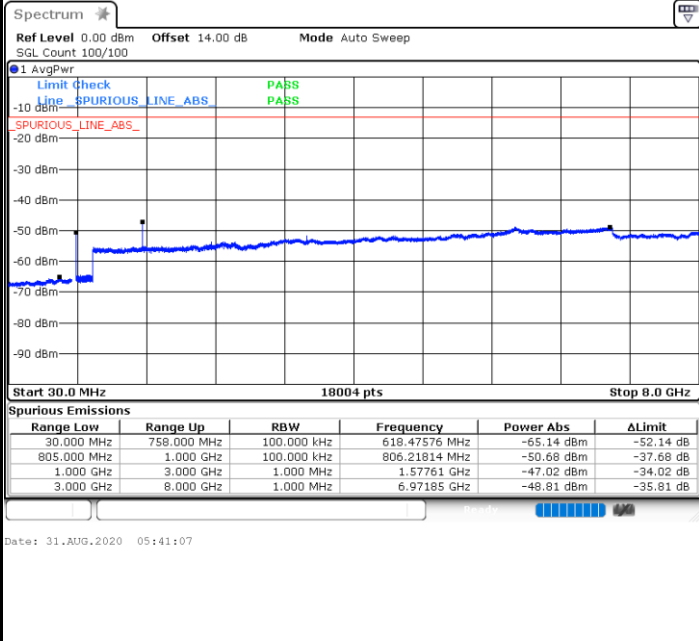


Mask

LTE Band 14 / 5MHz / QPSK

Lowest Channel / 1RB

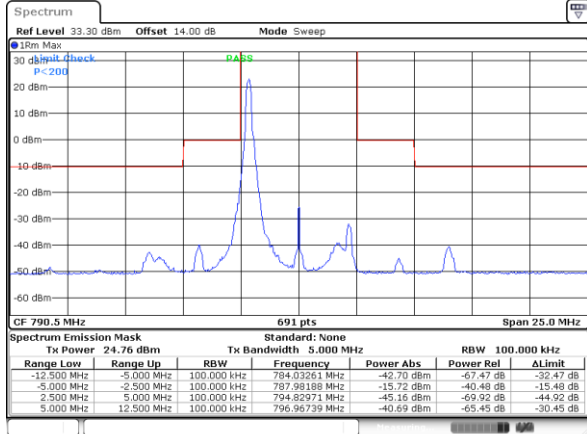


Date: 1.SEP.2020 06:10:59

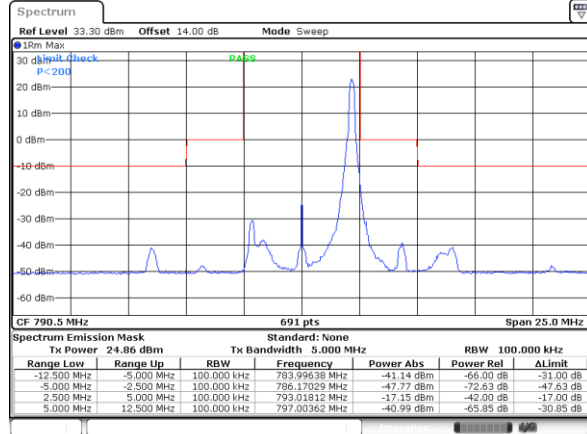

Date: 1.SEP.2020 06:01:44

Lowest Channel / Full RB

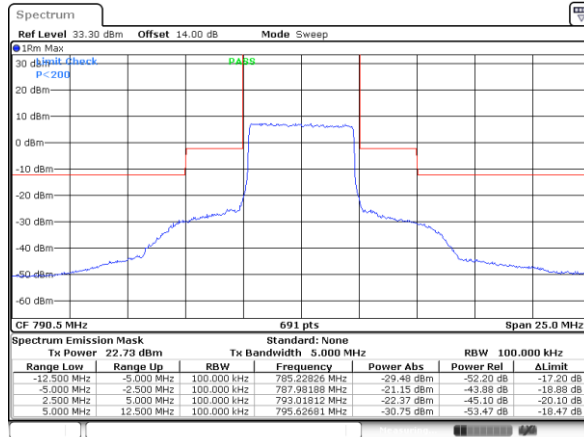


Date: 1.SEP.2020 05:58:01




LTE Band 14 / 5MHz / 16QAM

Lowest Channel / 1RB

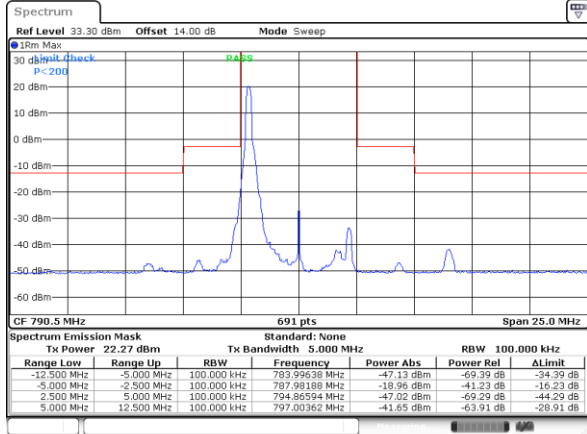


Date: 1,SEP,2020 06:10:25

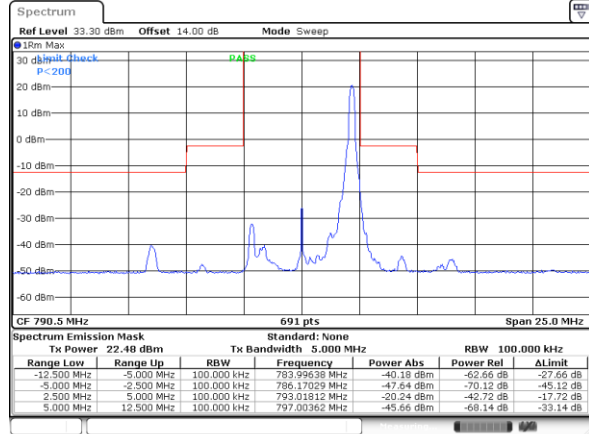

Date: 1,SEP,2020 06:10:26

Lowest Channel / Full RB

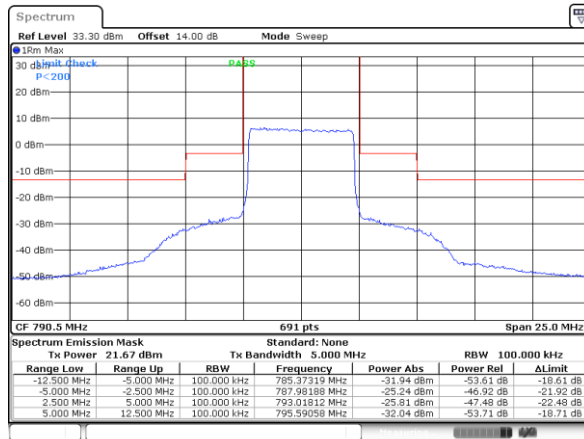


Date: 1,SEP,2020 05:58:36




LTE Band 14 / 5MHz / 64QAM

Lowest Channel / 1RB

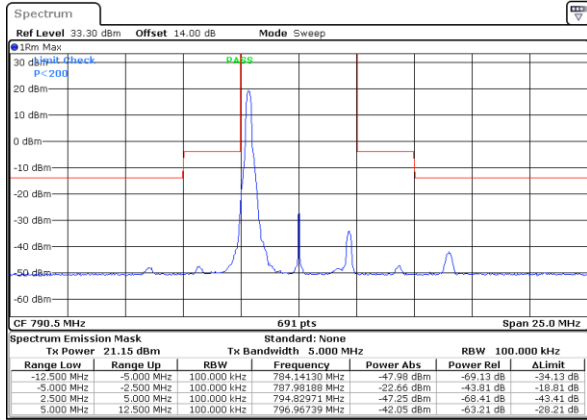


Date: 1.SEP.2020 05:15:51

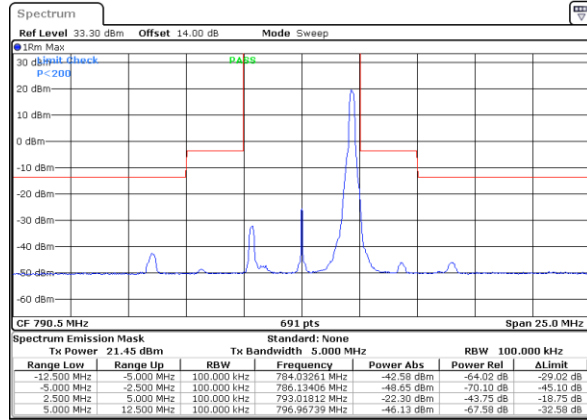

Date: 1.SEP.2020 06:06:39

Lowest Channel / Full RB

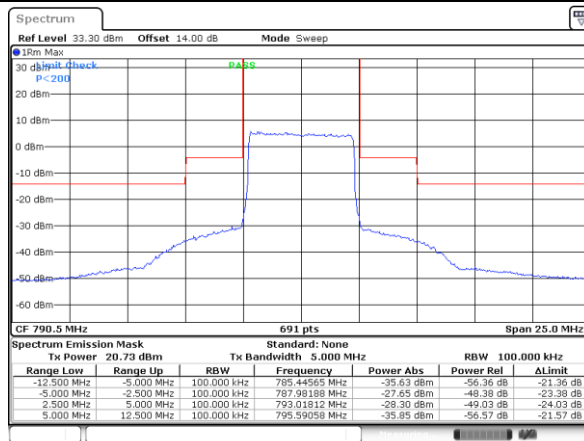


Date: 1.SEP.2020 05:59:10




LTE Band 14 / 5MHz / QPSK

Middle Channel / 1RB

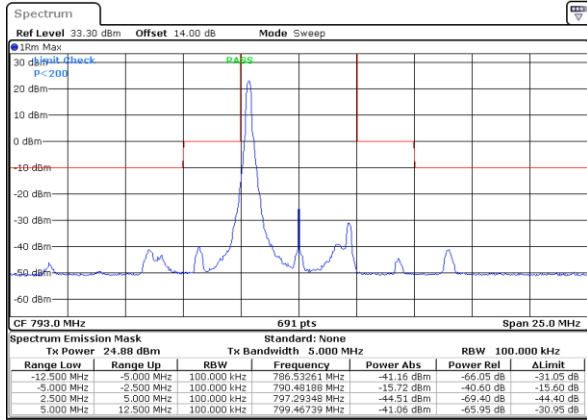


Date: 1.SEP.2020 06:19:02

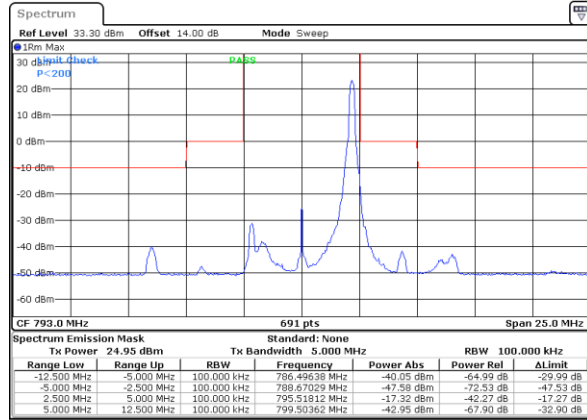

Date: 1.SEP.2020 06:18:19


Middle Channel / Full RB

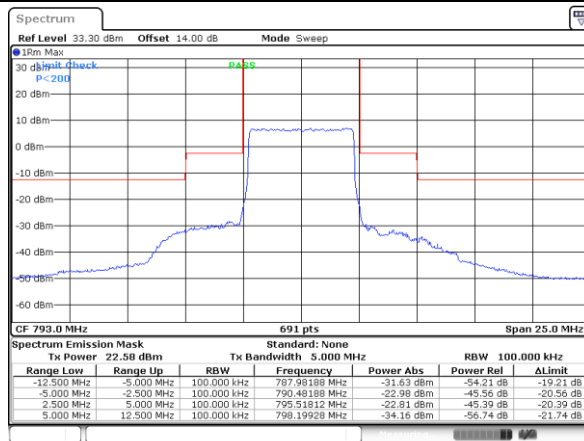


Date: 1.SEP.2020 06:24:25

LTE Band 14 / 5MHz / 16QAM

Middle Channel / 1RB

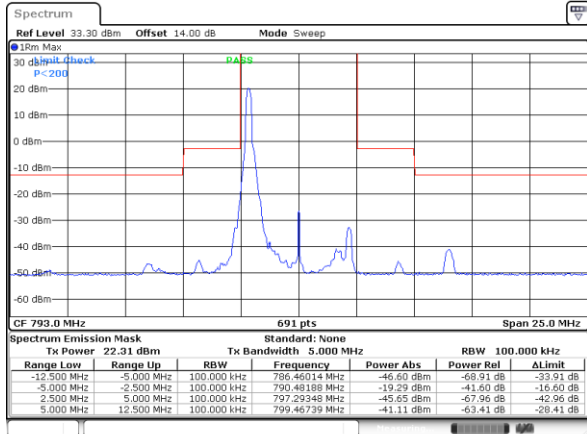


Date: 1,SEP,2020 06:19:47

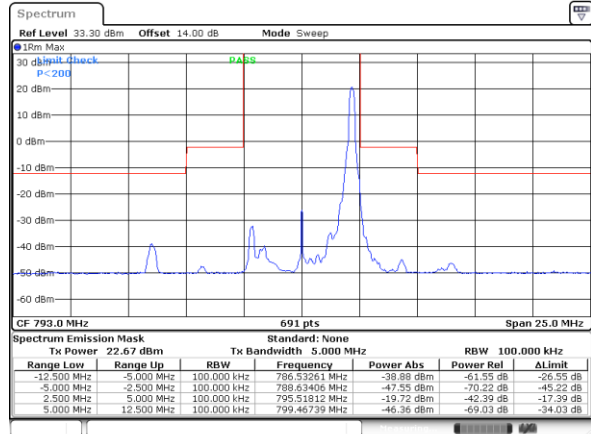

Date: 1,SEP,2020 06:17:45

Middle Channel / Full RB

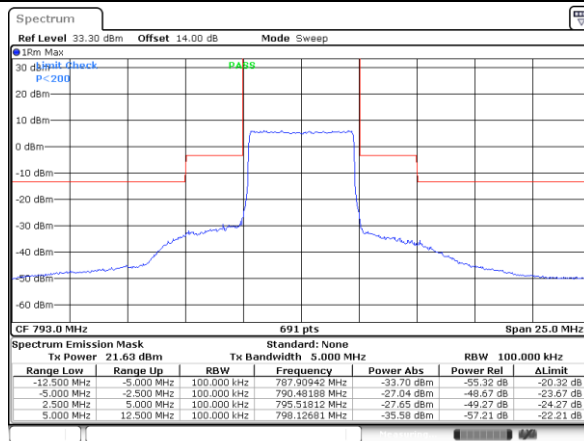


Date: 1,SEP,2020 06:23:51




LTE Band 14 / 5MHz / 64QAM

Middle Channel / 1RB

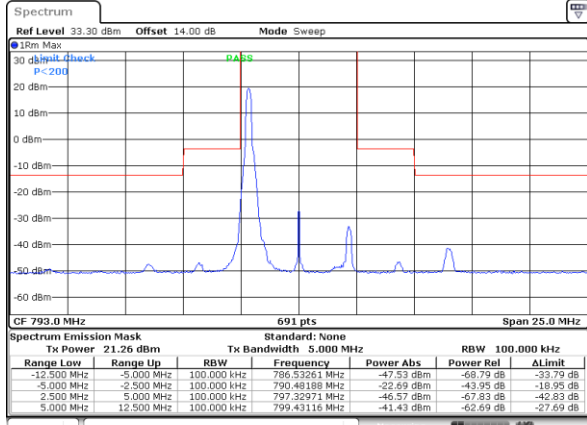


Date: 1.SEP.2020 06:12:02

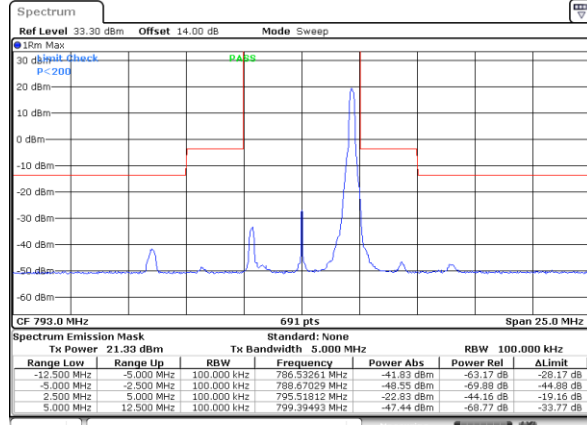

Date: 1.SEP.2020 06:07:39

Middle Channel / Full RB

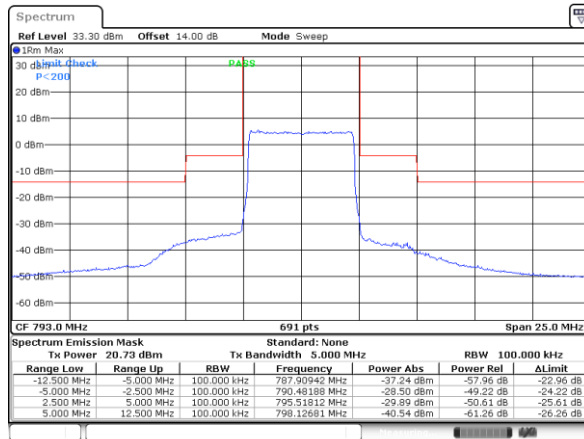


Date: 1.SEP.2020 06:22:19




LTE Band 14 / 5MHz / QPSK

Highest Channel / 1RB

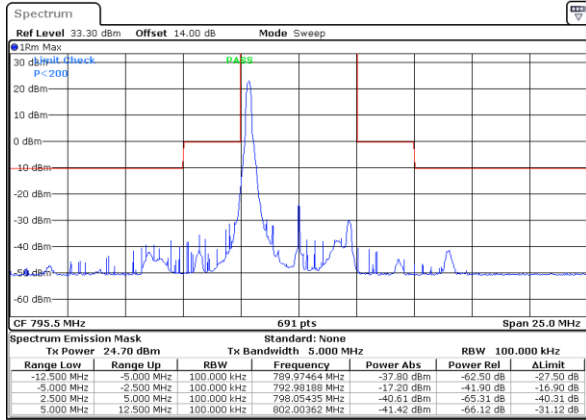


Date: 1.SEP.2020 06:13:24

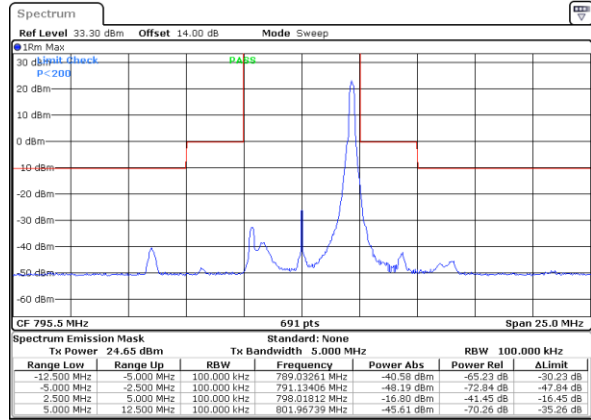

Date: 1.SEP.2020 06:13:24


Highest Channel / Full RB

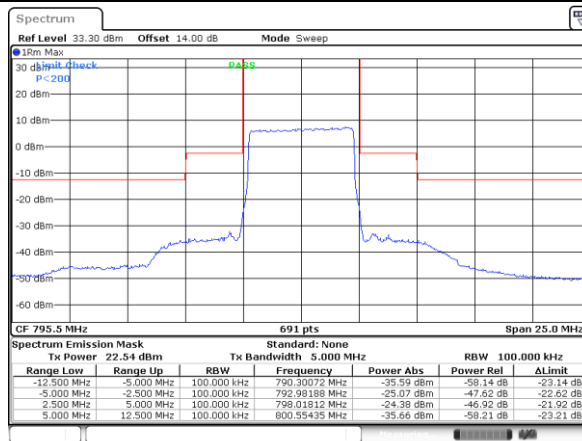


Date: 1.SEP.2020 06:25:22

LTE Band 14 / 5MHz / 16QAM

Highest Channel / 1RB

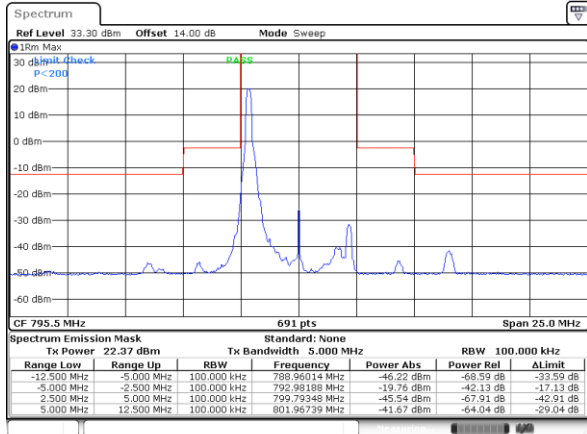


Date: 1.SEP.2020 06:13:05

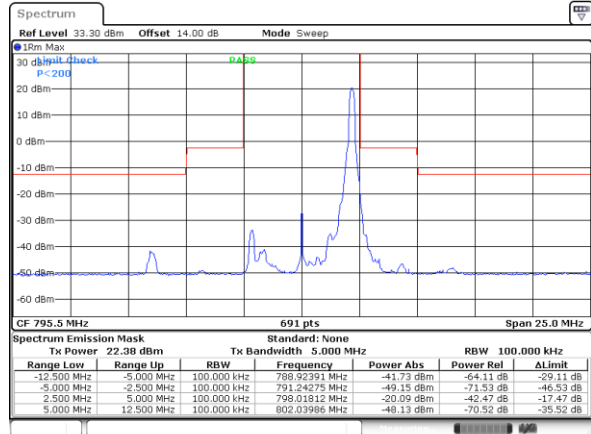

Date: 1.SEP.2020 06:13:34

Highest Channel / Full RB

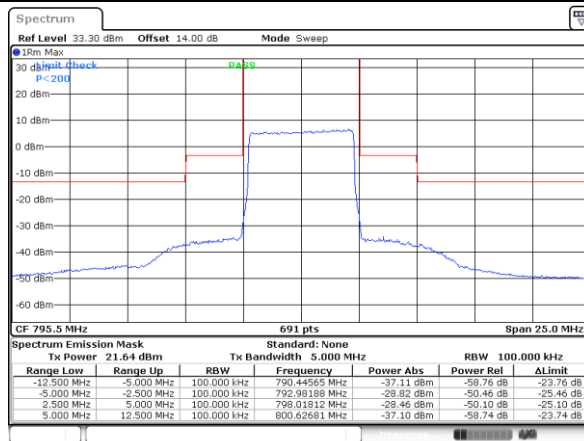


Date: 1.SEP.2020 06:27:31




LTE Band 14 / 5MHz / 64QAM

Highest Channel / 1RB

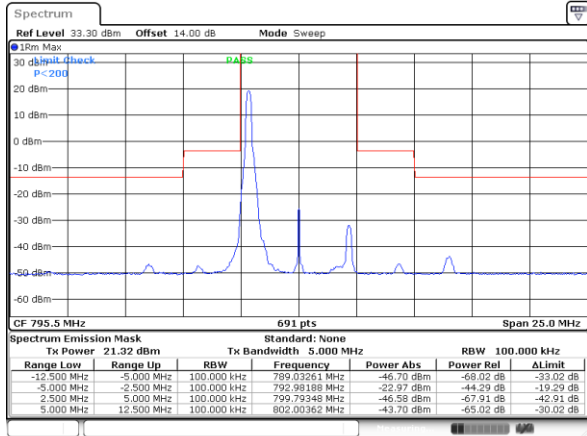


Date: 1.SEP.2020 06:13:51

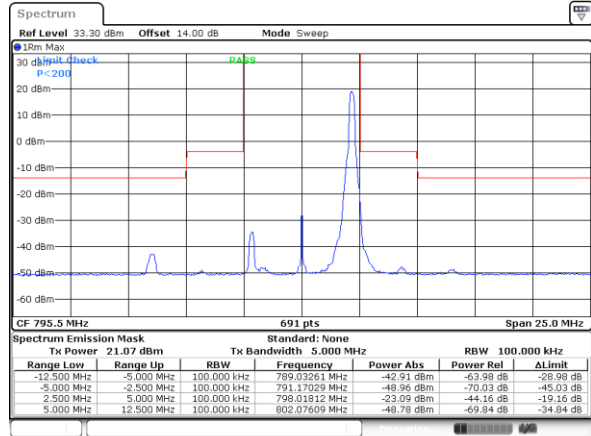

Date: 1.SEP.2020 06:13:21

Highest Channel / Full RB

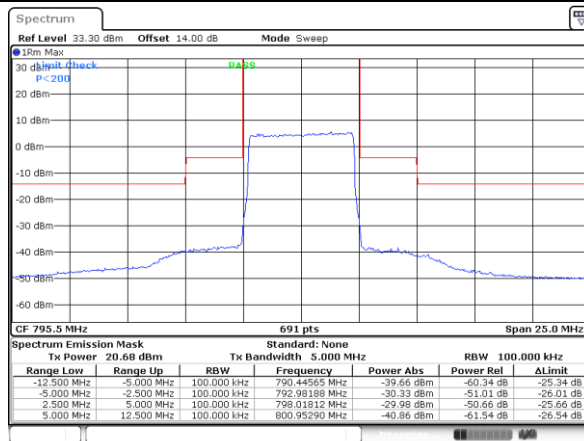


Date: 1.SEP.2020 06:28:49




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

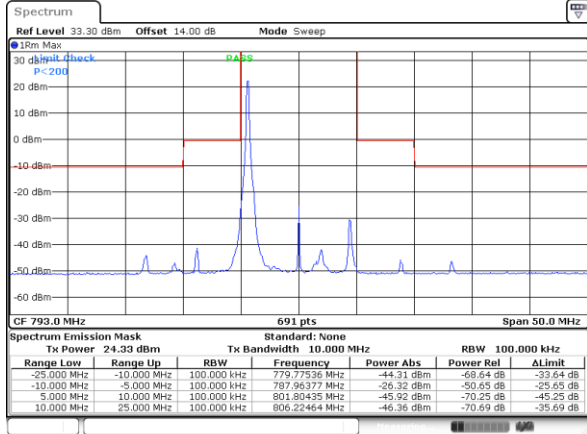


Date: 1.SEP.2020 06:14:06

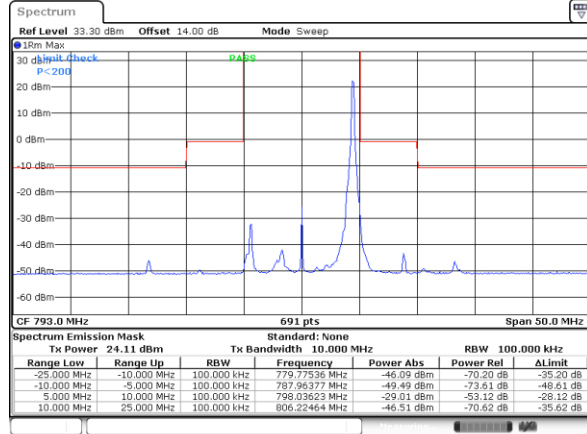

Date: 1.SEP.2020 06:14:16

Middle Channel / Full RB

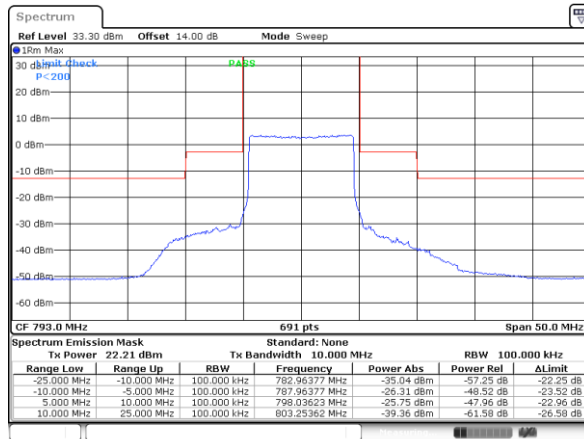


Date: 1.SEP.2020 06:14:01




LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

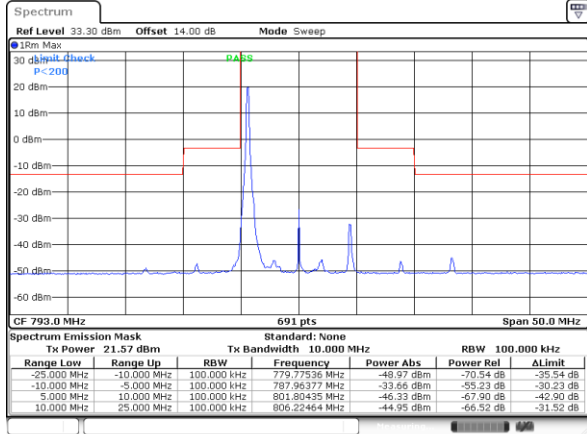


Date: 1,SEP,2020 06:14:06

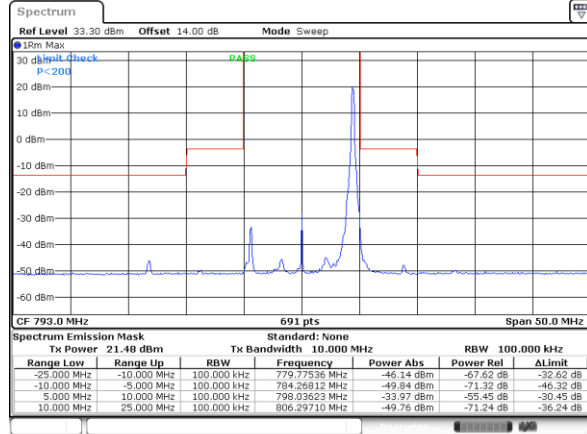

Date: 1,SEP,2020 06:14:54

Middle Channel / Full RB

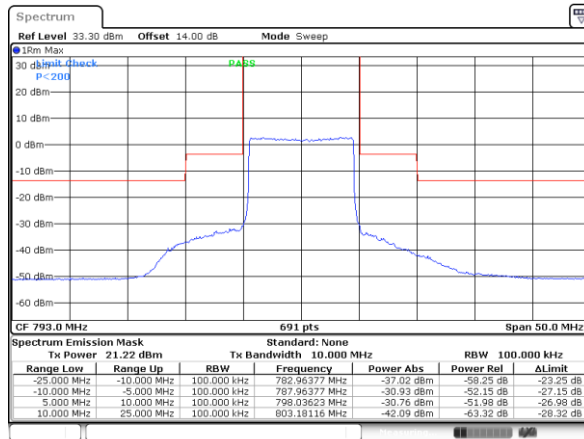


Date: 1,SEP,2020 06:14:02




LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

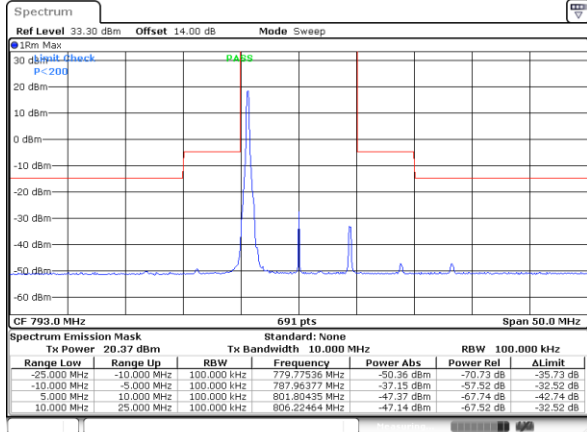


Date: 1.SEP.2020 06:45:14

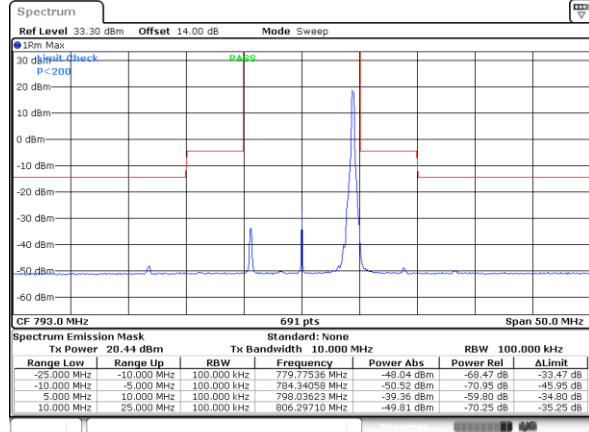

Date: 1.SEP.2020 06:50:40

Middle Channel / Full RB

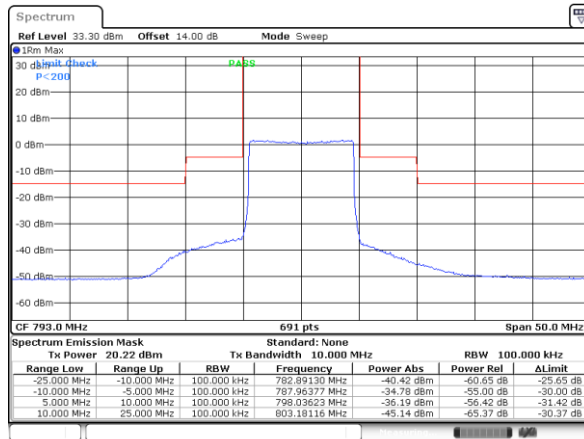

Date: 1.SEP.2020 06:44:22

Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0018	PASS
40	Normal Voltage	0.0038	
30	Normal Voltage	0.0043	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0004	
0	Normal Voltage	0.0049	
-10	Normal Voltage	0.0037	
-20	Normal Voltage	0.0045	
-30	Normal Voltage	0.0050	
20	Maximum Voltage	0.0033	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0013	

Note:

1. Normal Voltage =3.8 V. ; Battery End Point (BEP) =3.6 V. ; Maximum Voltage =4.2 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

Field Strength of Spurious Radiated

LTE Band 14 / 5MHz / QPSK								
Bandwidth	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-68.07	-42.15	-25.92	-70.70	1.09	5.87	H
	2364	-65.96	-13	-52.96	-68.36	1.37	5.92	H
	3153	-63.75	-13	-50.75	-67.64	1.64	7.68	H
	1576	-68.00	-42.15	-25.85	-70.63	1.09	5.87	V
	2364	-65.87	-13	-52.87	-68.27	1.37	5.92	V
	3153	-63.36	-13	-50.36	-67.25	1.64	7.68	V
Middle	1580	-68.07	-42.15	-25.92	-70.70	1.09	5.87	H
	2372	-66.12	-13	-53.12	-68.52	1.37	5.92	H
	3162	-63.50	-13	-50.50	-67.39	1.64	7.68	H
	1580	-67.87	-42.15	-25.72	-70.50	1.09	5.87	V
	2372	-65.80	-13	-52.80	-68.20	1.37	5.92	V
	3162	-63.93	-13	-50.93	-67.82	1.64	7.68	V
Highest	1586	-68.19	-42.15	-26.04	-70.82	1.09	5.87	H
	2380	-66.05	-13	-53.05	-68.45	1.37	5.92	H
	3174	-63.93	-13	-50.93	-67.82	1.64	7.68	H
	1586	-67.11	-42.15	-24.96	-69.74	1.09	5.87	V
	2380	-65.50	-13	-52.50	-67.90	1.37	5.92	V
	3174	-63.72	-13	-50.72	-67.61	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			

LTE Band 14 / 10MHz / QPSK								
Bandwidth	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-68.15	-42.15	-26.00	-70.78	1.09	5.87	H
	2364	-66.13	-13	-53.13	-68.53	1.37	5.92	H
	3156	-63.85	-13	-50.85	-67.74	1.64	7.68	H
	1576	-68.06	-42.15	-25.91	-70.69	1.09	5.87	V
	2364	-65.68	-13	-52.68	-68.08	1.37	5.92	V
	3156	-64.01	-13	-51.01	-67.90	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			