FCC RF Test Report

APPLICANT : Motorola Mobility LLC EQUIPMENT : Mobile Cellular Phone

BRAND NAME : Motorola

MODEL NAME : XT2143-1

FCC ID : IHDT56ZP3

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

TEST DATE(S) : May 20, 2021 ~ May 25, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Frie Shih

Dorque Cher

Approved by: Eric Shih / Manager

Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 1 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Cert #5145.01

Report No. : FW151701

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAI	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	
	1.6	Maximum Conducted Power and Emission Designator	6
	1.7	Testing Site	6
	1.8	Test Software	
	1.9	Applied Standards	
	1.10	Specification of Accessory	8
2	TES	Γ CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	TES	T RESULT	12
	3.1	Conducted Output Power Measurement	12
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13
	3.3	Emissions Mask Measurement	14
	3.4	Emissions Mask – Out Of Band Emissions Measurement	
	3.5	Field Strength of Spurious Radiation Measurement	
	3.6	Frequency Stability Measurement	20
4	LIST	OF MEASURING EQUIPMENT	22
5	UNC	ERTAINTY OF EVALUATION	23
ΑP	PEND	DIX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
ΑP	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 2 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE		
FW151701	Rev. 01	Initial issue of report	Jun. 29, 2021		

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 3 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule Description		Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 40.52 dB at 2443.500 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 4 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Mobile Cellular Phone

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

	Product Feature					
Equipment	Mobile Cellular Phone					
Brand Name	Motorola					
Model Name	XT2143-1					
FCC ID	IHDT56ZP3					
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n/ac/ax HT20/VHT20/HE20 WLAN 5GHz 802.11 a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11 a/n HT20/HT40 WLAN 6GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 6GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC and GNSS					
IMEI Code	Conducted: 353121920026553/353121920026561 Radiation: 353121920024673/353121920024681					
HW Version	DVT2					
SW Version	RRG31.35					
EUT Stage	Identical Prototype					

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard						
Tx Frequency	814 ~ 824 MHz					
Rx Frequency	859 ~ 869 MHz					
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz					
Maximum Output Power to Antenna	22.43 dBm					
Antenna Gain	-4.81 dBi					
Type of Modulation	QPSK / 16QAM / 64QAM					

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 5 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power and Emission Designator

Ľ	TE Band 26	QP	SK	16QAM/64QAM			
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)		
1.4	814.7 ~ 823.3	0.1750	1M09G7D	0.1514	1M10W7D		
3	815.5 ~ 822.5	0.1722	2M71G7D	0.1545	2M73W7D		
5	816.5 ~ 821.5	0.1750	4M50G7D	0.1535	4M51W7D		
10	819.0	0.1683 9M0		0.1422	9M03W7D		
15	821.5	0.1730	13M4G7D	0.1489	13M4W7D		

1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.									
Test Site Location	Shenzhen, 518055 Peop TEL: +86-755-86379589	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595								
	Sporton Site No.	FCC Designation No.	FCC Test Firm							
Test Site No.	Sporton Site No.	rec besignation No.	Registration No.							
	TH01-SZ	CN1256	421272							

Test Firm	Sporton International (Sh	Sporton International (Shenzhen) Inc.							
Test Site Location		et, Baoan District, Shenzhe	eng 4th Road, Fenghuang en City Guangdong Province						
Tool Cita No.	Sporton Site No.	FCC Designation No.	FCC Test Firm						
Test Site No.	03CH02-SZ	CN1256	Registration No. 421272						

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 6 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

1.8 Test Software

Item	Site	Manufacturer	Name	Version	
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a	

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 7 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.10 Specification of Accessory

Specification of Accessory								
AC Adapter 1(US)	Brand Name	Motorola(Salom)	Model Name	MC-301				
AC Adapter 1(EU)	Brand Name	Motorola(Salom)	Model Name	MC-302				
AC Adapter 1(UK)	Brand Name	Motorola(Salom)	Model Name	MC-303				
AC Adapter 1(Brazil)	Brand Name	Motorola(Salom)	Model Name	MC-307				
AC Adapter 1(AU)	Brand Name	Motorola(Salom)	Model Name	MC-305				
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-301				
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-302				
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-303				
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-305				
AC Adapter 2(IN)	Brand Name	Motorola(Acbel)	Model Name	MC-304				
AC Adapter 3(Brazil)	Brand Name	Motorola(Flex)	Model Name	MC-307				
Battery	Brand Name	Motorola(ATL)	Model Name	MB40				
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	MH191(SH38C81577)				
Earphone 2	Brand Name	Motorola(LCHSE)	Model Name	MH191(SH38C81576)				
Earphone 3 (Brazil only)	Brand Name	Motorola(Lyand)	Model Name	MH181(SH38C37773)				
Earphone 4 (Brazil only)	Brand Name	Motorola(Cosonic)	Model Name	MH181(SH38C44959)				
USB Cable 1	Brand Name	Motorola(Luxshare)	Model Name	SC18D13217				
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	SC18D13215				
USB Cable 3	Brand Name	Motorola(Cabletech)	Model Name	SC18D13216				
Type C to audio cable	Brand Name	Motorola(Luxshare)	Model Name	SC18C27844				

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 8 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

		Bandwidth (MHz)						Modulation			RB#			Test Channel		
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Hal f	Full	L	М	н
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	٧	v	v	v	•	v	v	v			v	٧	٧	v
Emission masks In-band emissions	26	v	٧	v	v	v	•	٧	v	v	v		v	٧		v
Emission masks - Out of band emissions	26	v	٧	v	v	v		>	V	v	v			٧	٧	v
Frequency Stability	26				v	v	-	v					v		v	
Radiated Spurious Emission	26 Worst mode							v								
Note	 The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 															

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 9 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

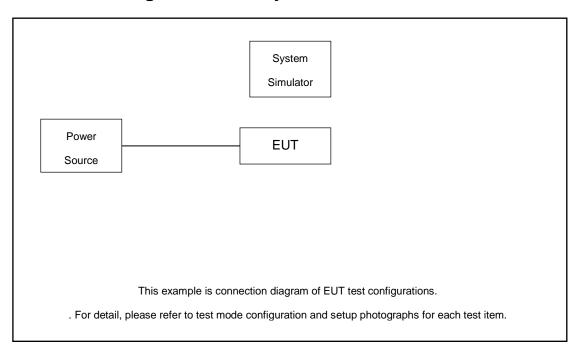

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord		
1.	System Simulator	Anritsu	MT8820C	Fcc DoC	N/A	Shielded, 1.5m		

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

= 4.0 + 10 = 14.0 (dB)

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 10 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest						
45	Channel	26765	-	-						
15	Frequency	821.5	-	-						
10	Channel	-	26740	-						
	Frequency	-	819	-						
5	Channel	26715	26740	26765						
	Frequency	816.5	819	821.5						
2	Channel	26705	26740	26775						
3	Frequency	815.5	819	822.5						
	Channel	26697	26740	26783						
1.4	Frequency	814.7	819	823.3						

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 11 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 12 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

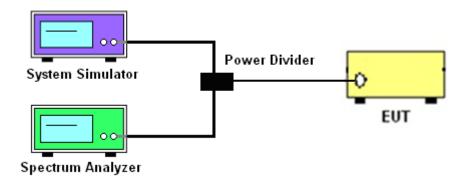

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 13 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 14 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

3.3.4 Test Setup

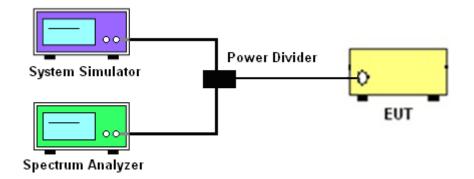

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 15 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No.: FW151701

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

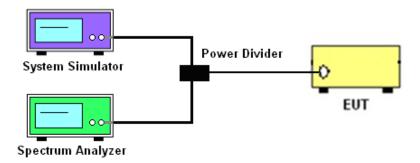

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 16 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 17 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01


Report No. : FW151701

3.5.4 Test Setup

For radiated test from 30MHz

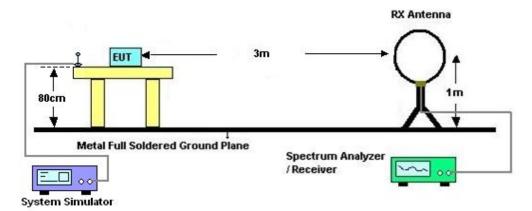


For radiated test from 30MHz to 1GHz

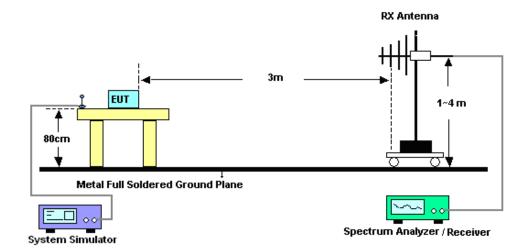

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 18 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

For radiated test above 1GHz

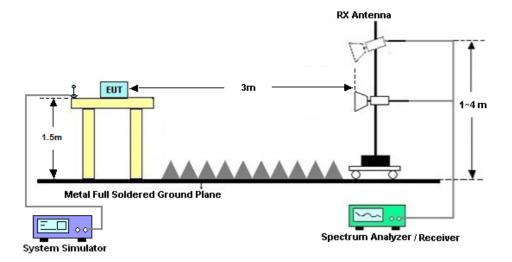

3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 19 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No. : FW151701

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

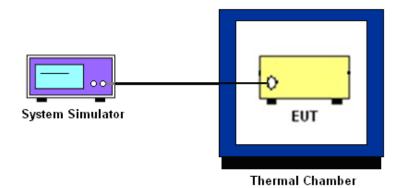

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 21 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report No.: FW151701

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	May 20, 2021~ May 25, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 15, 2020	May 20, 2021~ May 25, 2021	Oct. 14, 2021	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.0 077	0.4GHz~26.5G Hz	Dec. 26, 2020	May 20, 2021~ May 25, 2021	Dec. 25, 2021	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangrou p	LP-150U	H201408180 3	-40~+150°C	Jul. 22, 2020	May 20, 2021~ May 25, 2021	Jul. 21, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz	Jul. 21, 2020	May 25, 2021	Jul. 20, 2021	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	May 25, 2021	Jun. 21, 2022	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 15, 2020	May 25, 2021	Jul. 14, 2021	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2020	May 25, 2021	Jul. 24, 2021	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 21. 2020	May 25, 2021	Jul. 20, 2021	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 23, 2021	May 25, 2021	Apr. 22, 2022	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 16, 2020	May 25, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY5327010 5	0.5GHz~26.5Gh z	Oct. 16, 2020	May 25, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	6160100024 70	N/A	NCR	May 25, 2021	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	May 25, 2021	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	May 25, 2021	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 22 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of	2.47dB
Confidence of 95% (U = 2Uc(y))	2.4706

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.31dB
Confidence of 95% (U = 2Uc(y))	3.3 lub

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

_		-
Ī	Measuring Uncertainty for a Level of	3.72dB
ı	Confidence of 95% (U = 2Uc(v))	3.72UB

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : 23 of 21
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
	Cha	nnel	1	26765	On: 7 1 10q.	On. / Freq.
	Frequenc	cy (MHz)		821.5		
15	QPSK	1	0	22.38		
15	QPSK	1	37	22.36		
15	QPSK	1	74	22.25		
15	QPSK	36	0	21.46		
15	QPSK	36	20	21.42		
15	QPSK	36	39	21.40		
15	QPSK	75	0	21.50		
15	16QAM	1	0	21.73		
15	16QAM	1	37	21.64		
15	16QAM	1	74	21.65		
15	16QAM	36	0	20.48		
15	16QAM	36	20	20.51		
15	16QAM	36	39	20.50		
15	16QAM	75	0	20.54		
15	64QAM	1	0	20.55		
15	64QAM	1	37	20.58		
15	64QAM	1	74	20.53		
15	64QAM	36	0	19.51		
15	64QAM	36	20	19.53		
15	64QAM	36	39	19.54		
15	64QAM	75	0	19.54		
	Cha	nnel			26740	
	Frequenc	cy (MHz)			819	
10	QPSK	1	0		22.16	
10	QPSK	1	25		22.26	
10	QPSK	1	49		22.24	
10	QPSK	25	0		21.32	
10	QPSK	25	12		21.38	
10	QPSK	25	25		21.37	
10	QPSK	50	0		21.41	
10	16QAM	1	0		21.24	
10	16QAM	1	25		21.46	
10	16QAM	1	49		21.53	
10	16QAM	25	0		20.18	
10	16QAM	25	12		20.36	

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A1 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01



FCC RF Test Report

					T	
10	16QAM	25	25		20.26	
10	16QAM	50	0		20.38	
10	64QAM	1	0		20.42	
10	64QAM	1	25		20.45	
10	64QAM	1	49		20.31	
10	64QAM	25	0		19.30	
10	64QAM	25	12		19.45	
10	64QAM	25	25		19.41	
10	64QAM	50	0		19.39	
	Cha	innel	26715	26740	26765	
	Frequen	cy (MHz)	816.5	819	821.5	
5	QPSK	1	0	22.24	22.13	22.38
5	QPSK	1	12	22.21	22.16	22.43
5	QPSK	1	24	22.21	22.26	22.13
5	QPSK	12	0	21.31	21.23	21.35
5	QPSK	12	7	21.29	21.40	21.40
5	QPSK	12	13	21.32	21.37	21.44
5	QPSK	25	0	21.41	21.40	21.33
5	16QAM	1	0	21.57	21.36	21.62
5	16QAM	1	12	21.08	21.36	21.29
5	16QAM	1	24	21.39	21.45	21.86
5	16QAM	12	0	20.29	20.41	20.42
5	16QAM	12	7	20.37	20.42	20.33
5	16QAM	12	13	20.44	20.29	20.38
5	16QAM	25	0	20.44	20.30	20.33
5	64QAM	1	0	20.67	20.47	20.56
5	64QAM	1	12	20.53	20.45	20.38
5	64QAM	1	24	20.50	20.31	20.48
5	64QAM	12	0	19.21	19.33	19.50
5	64QAM	12	7	19.44	19.39	19.47
5	64QAM	12	13	19.39	19.35	19.36
5	64QAM	25	0	19.44	19.41	19.48
	Cha	innel		26705	26740	26775
	Frequen	cy (MHz)		815.5	819	822.5
3	QPSK	1	0	22.24	22.25	22.27
3	QPSK	1	8	22.29	22.14	22.36
3	QPSK	1	14	22.26	22.03	22.33
3	QPSK	8	0	21.31	21.31	21.40
3	QPSK	8	4	21.39	21.32	21.31
3	QPSK	8	7	21.38	21.35	21.36
3	QPSK	15	0	21.40	21.31	21.28
3	16QAM	1	0	21.41	21.35	21.74
3	16QAM	1	8	21.31	21.82	21.61
3	16QAM	1	14	21.39	21.89	21.69
3	16QAM	8	0	20.54	20.08	20.36

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A2 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01



FCC RF Test Report

3	16QAM	8	4	20.54	20.40	20.38
3	16QAM	8	7	20.47	20.30	20.30
3	16QAM	15	0	20.28	20.35	20.43
3	64QAM	1	0	20.58	20.39	20.60
3	64QAM	1	8	20.86	20.35	20.74
3	64QAM	1	14	20.48	20.25	20.62
3	64QAM	8	0	19.47	19.29	19.48
3	64QAM	8	4	19.20	19.44	19.42
3	64QAM	8	7	19.39	19.42	19.32
3	64QAM	15	0	19.39	19.29	19.39
	Cha	innel		26697	26740	26783
	Frequen	cy (MHz)	814.7	819	823.3	
1.4	QPSK	1	0	22.38	22.19	22.16
1.4	QPSK	1	3	22.38	22.28	22.22
1.4	QPSK	1	5	22.36	22.21	22.11
1.4	QPSK	3	0	22.41	22.13	22.25
1.4	QPSK	3	1	22.29	22.23	22.24
1.4	QPSK	3	3	22.43	22.30	22.20
1.4	QPSK	6	0	21.48	21.20	21.13
1.4	16QAM	1	0	21.79	21.60	21.80
1.4	16QAM	1	3	21.67	21.38	21.74
1.4	16QAM	1	5	21.62	21.72	21.75
1.4	16QAM	3	0	21.43	21.16	21.61
1.4	16QAM	3	1	21.65	21.45	21.42
1.4	16QAM	3	3	21.67	21.36	21.17
1.4	16QAM	6	0	20.51	20.34	20.14
1.4	64QAM	1	0	20.66	20.44	20.23
1.4	64QAM	1	3	20.68	20.12	20.15
1.4	64QAM	1	5	20.62	20.50	20.67
1.4	64QAM	3	0	20.54	20.27	20.40
1.4	64QAM	3	1	20.84	20.30	20.28
1.4	64QAM	3	3	20.88	20.38	20.53
1.4	64QAM	6	0	19.13	19.23	19.15

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A3 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

LTE Band 26_Part 90S

Peak-to-Average Ratio

Mode		LTE Band 26 / 10MHz								
Mod.	QP	SK	160	Limit: 13dB						
RB Size	1RB Full RB		1RB	Full RB	Result					
Lowest CH			-	-						
Middle CH	3.54	4.87	4.32	5.59	PASS					
Highest CH	-	-	-	-						
Mode		LTE Band	26 / 10MHz							
Mod.	64C	AM			Limit: 13dB					
RB Size	1RB	Full RB			Result					
Lowest CH										
Middle CH	6.17	6.38	-	-	PASS					
Highest CH	-	-	-	-						

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A4 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

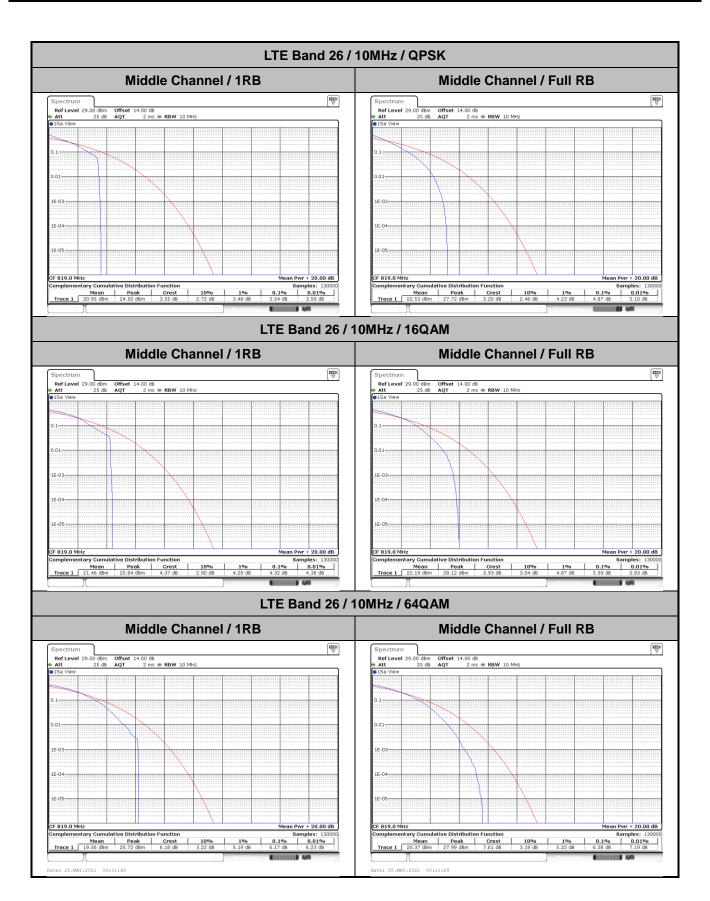

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A5 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

26dB Bandwidth


Mode		LTE Band 26 : 26dB BW(MHz)									
BW	1.4	ИНz	3M	lHz	5M	lHz	101	ЛHz	2 15MHz		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.22	1.23	3.00	3.02	4.91	4.87	-	-	14.42	14.45	
Middle CH	1.24	1.22	3.02	3.00	4.90	4.89	9.81	9.79	-	-	
Highest CH	1.23	1.23	2.97	2.99	4.89	4.90	-	-	-	-	
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)			
BW	1.4	ИНz	3M	lHz	5M	5MHz 10MHz			15MHz		
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		
Lowest CH	1.21	-	3.05	-	4.82	-	-	-	14.30	-	
Middle CH	1.24	-	3.04	-	4.82	-	9.87	-	-	-	
Highest CH	1.24	-	3.03	-	4.95	-	-	-	-	-	

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A6 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

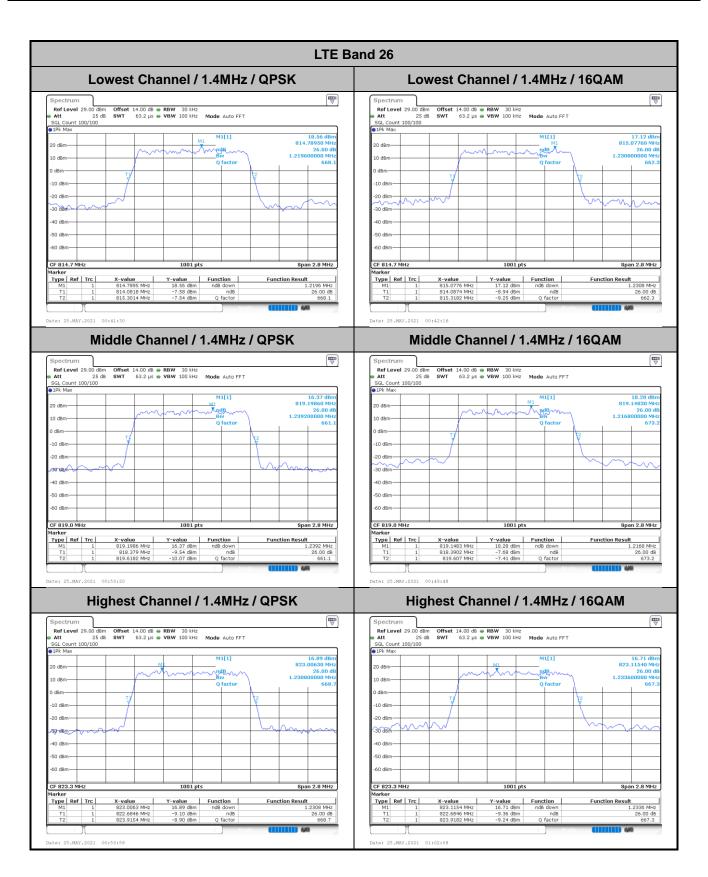


Page Number : A7 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

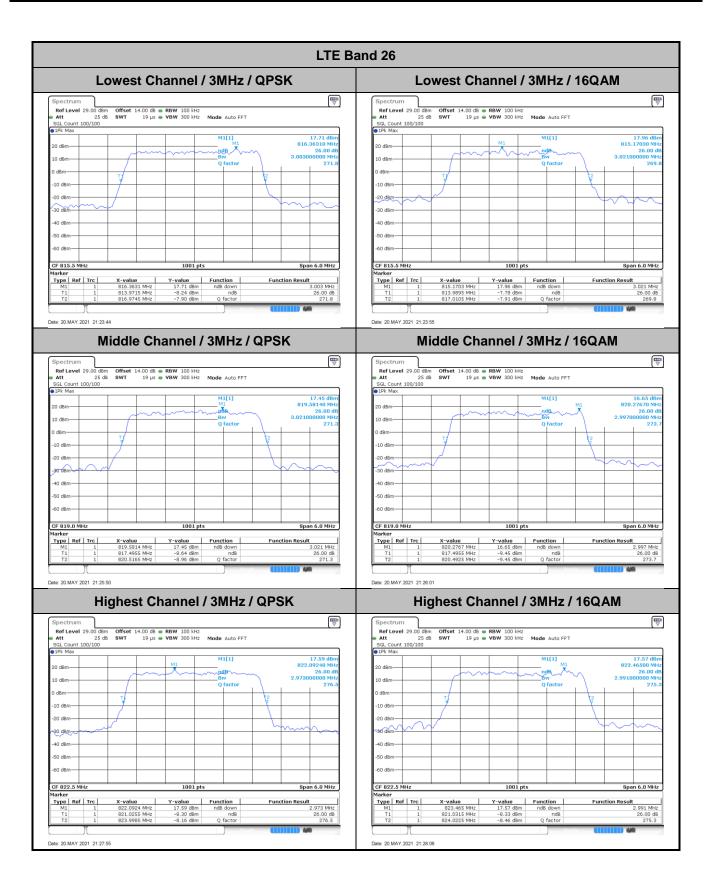

Page Number : A8 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

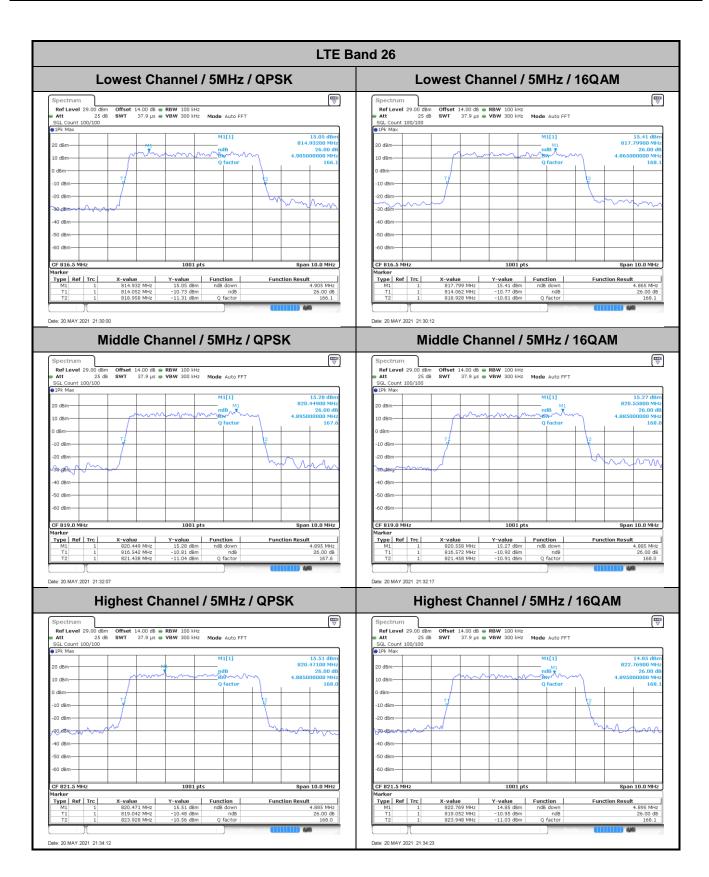


Page Number : A9 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

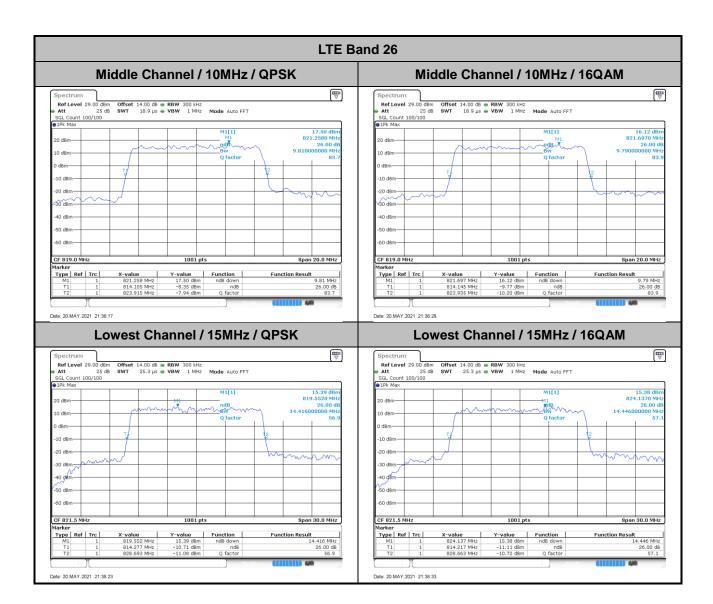


Page Number : A10 of A47
Report Issued Date : Jun. 29, 2021

Report No. : FW151701

Report Version : Rev. 01

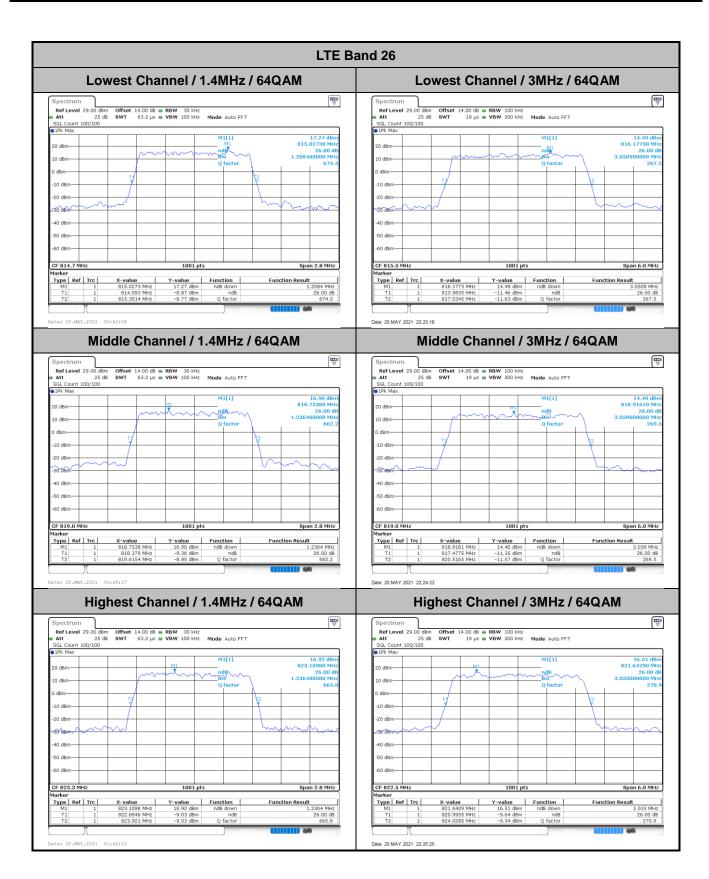


Page Number : A11 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

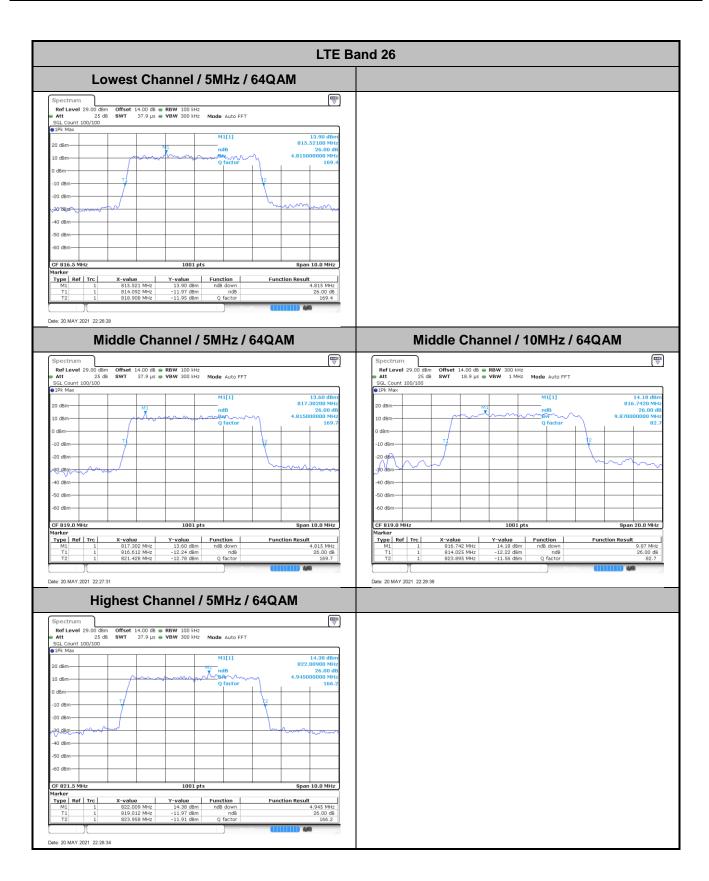

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A12 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

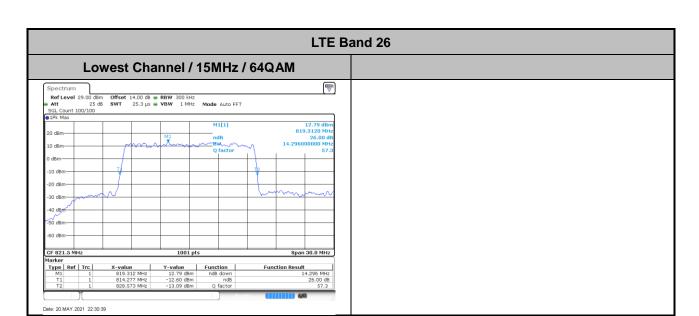

Page Number : A13 of A47
Report Issued Date : Jun. 29, 2021

Report No. : FW151701

Report Version : Rev. 01

Occupied Bandwidth


Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Lowest CH	1.09	1.09	2.70	2.72	4.50	4.51	-	-	13.43	13.43		
Middle CH	1.09	1.10	2.71	2.73	4.50	4.50	9.07	8.99	-	-		
Highest CH	1.09	1.09	2.70	2.72	4.50	4.51	-	-	-	-		
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz			
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM			
Lowest CH	1.09	-	2.70	-	4.50	-	-	-	13.43	-		
Middle CH	1.09	-	2.73	-	4.50	-	9.03	-	-	-		
Highest CH	1.09	-	2.73	-	4.48	-	-	-	-	-		

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A14 of A47
Report Issued Date : Jun. 29, 2021

Report No. : FW151701


Report Version : Rev. 01

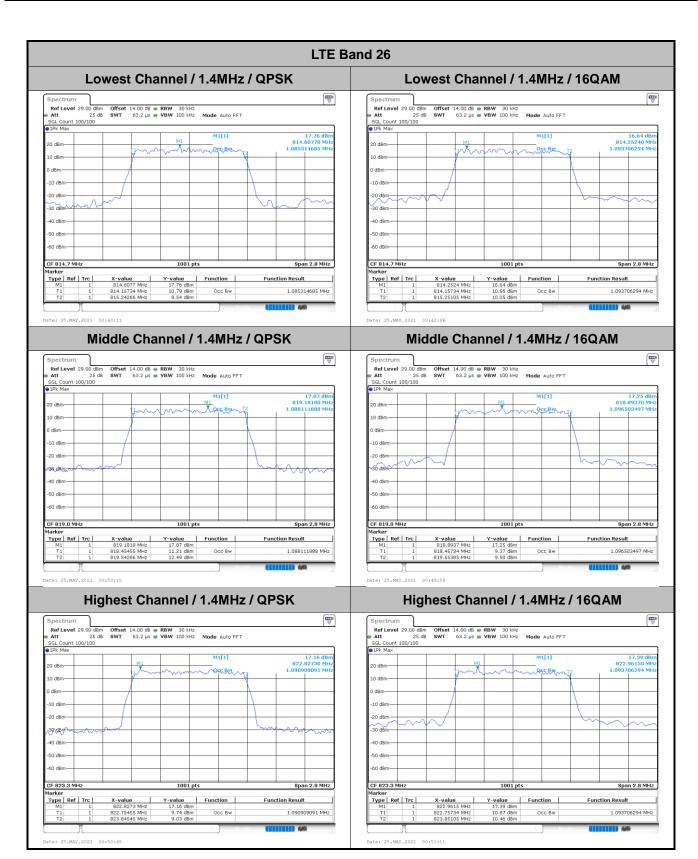


Page Number : A15 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

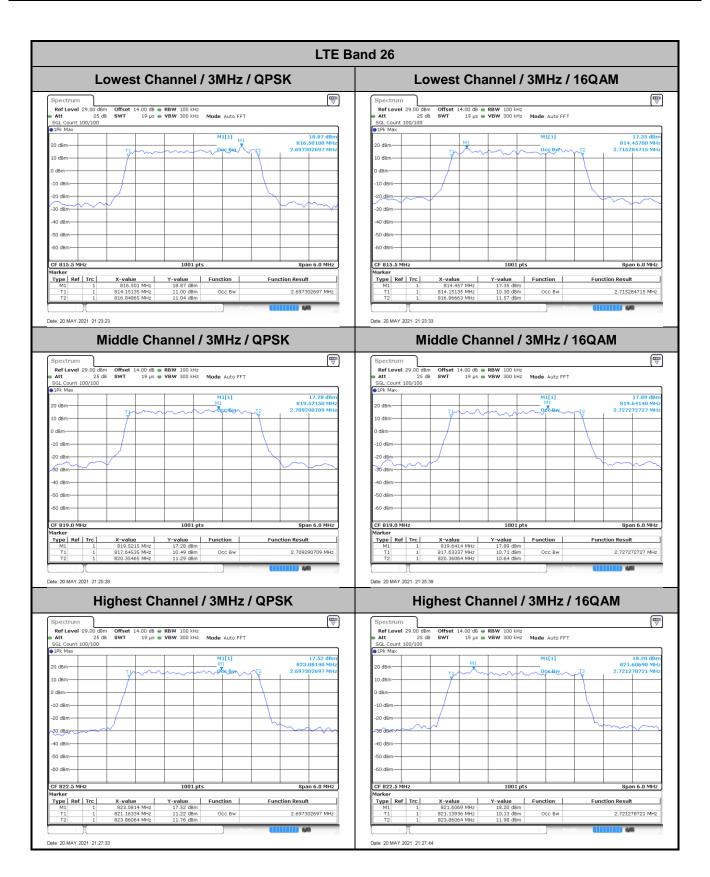


Page Number : A16 of A47 Report Issued Date : Jun. 29, 2021 Report Version : Rev. 01

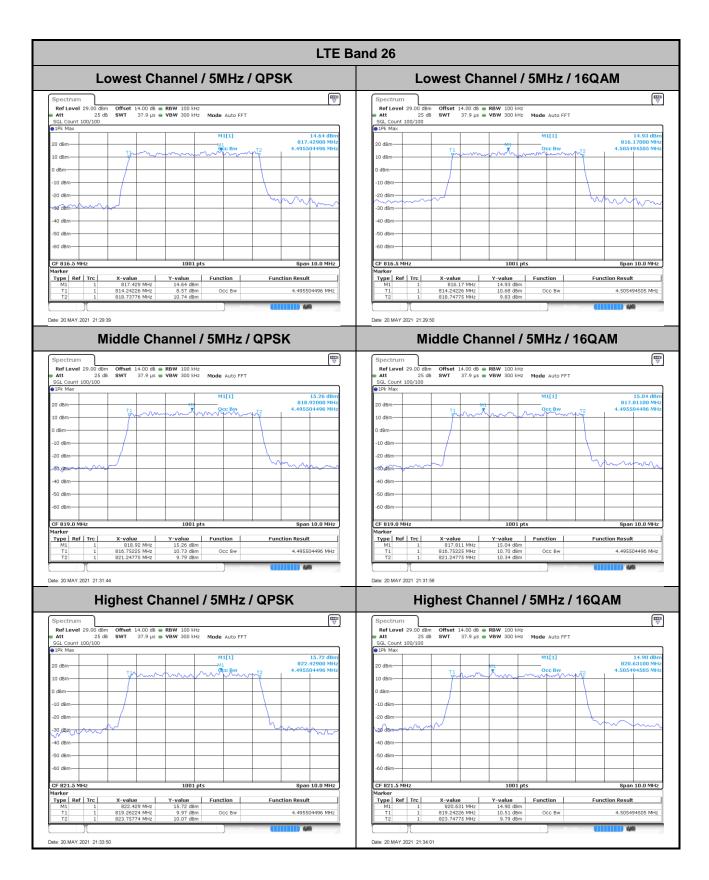


Page Number : A17 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

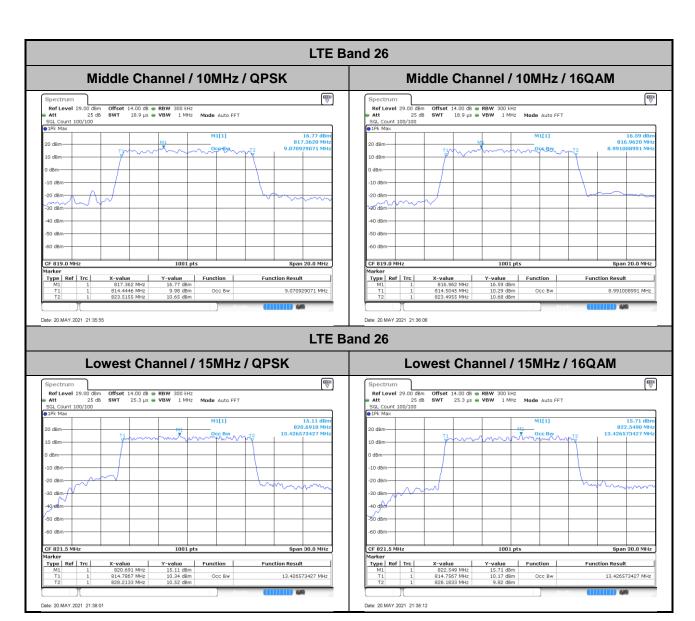


Page Number : A18 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

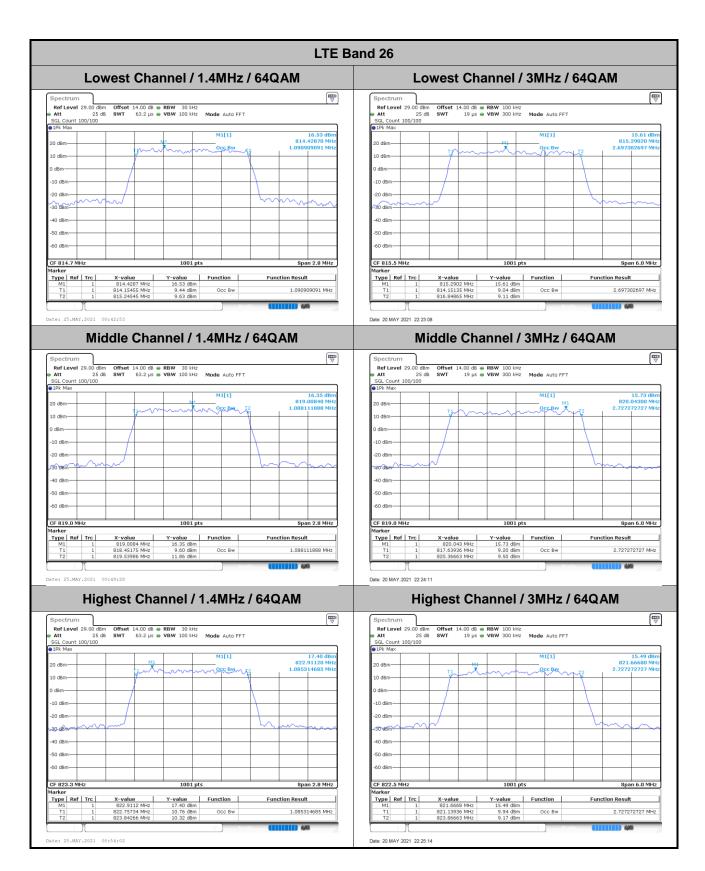

Page Number : A19 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

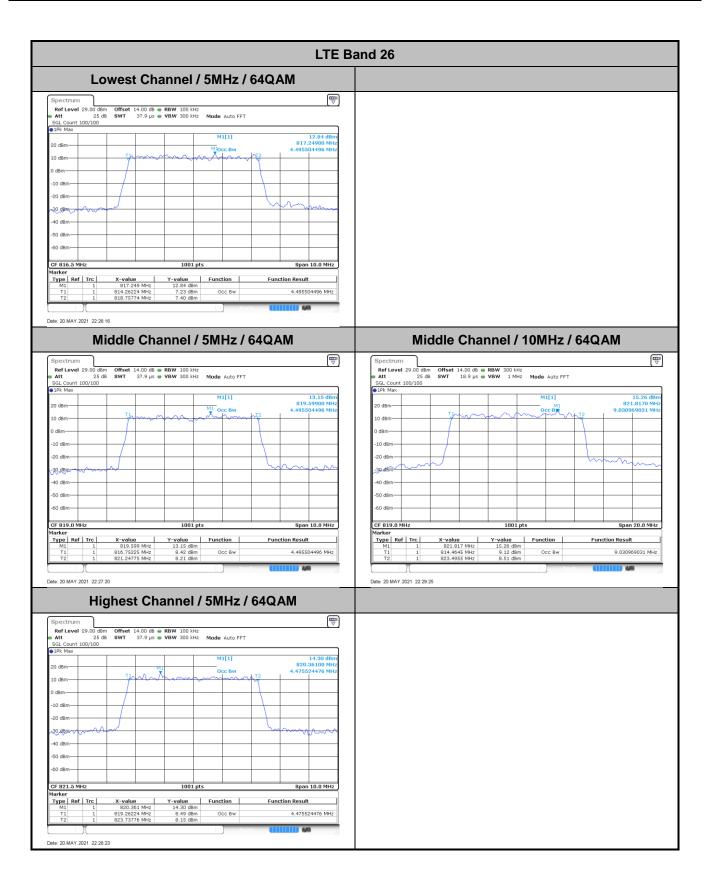

Page Number : A20 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

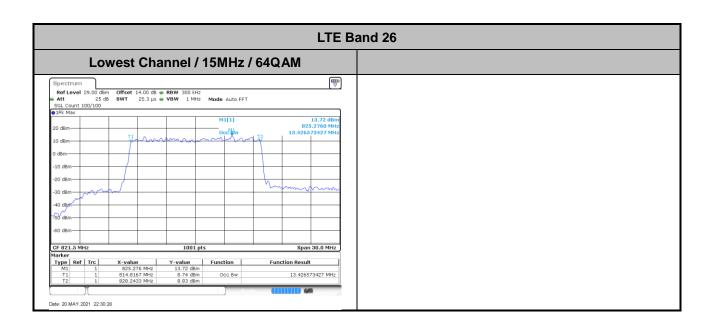


Page Number : A21 of A47
Report Issued Date : Jun. 29, 2021

Report No. : FW151701


Report Version : Rev. 01

Conducted Band Edge

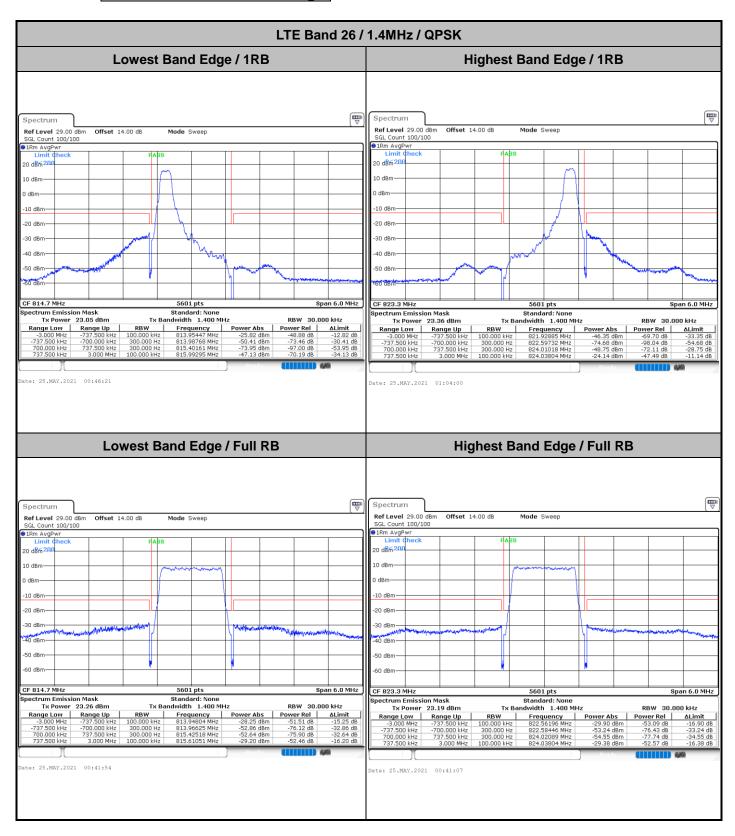


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A22 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

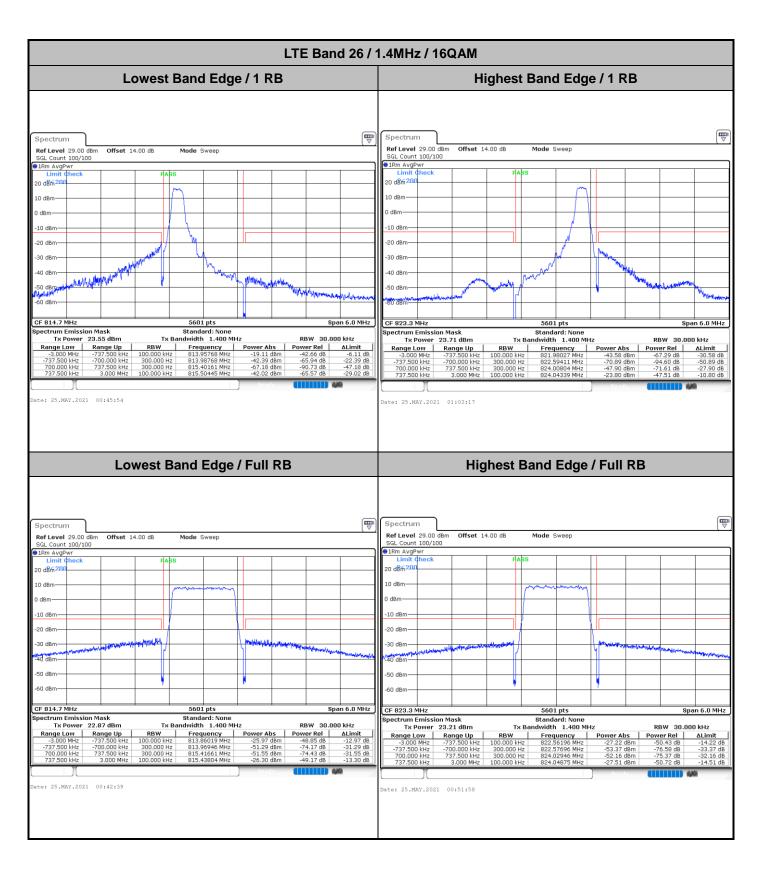


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A23 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

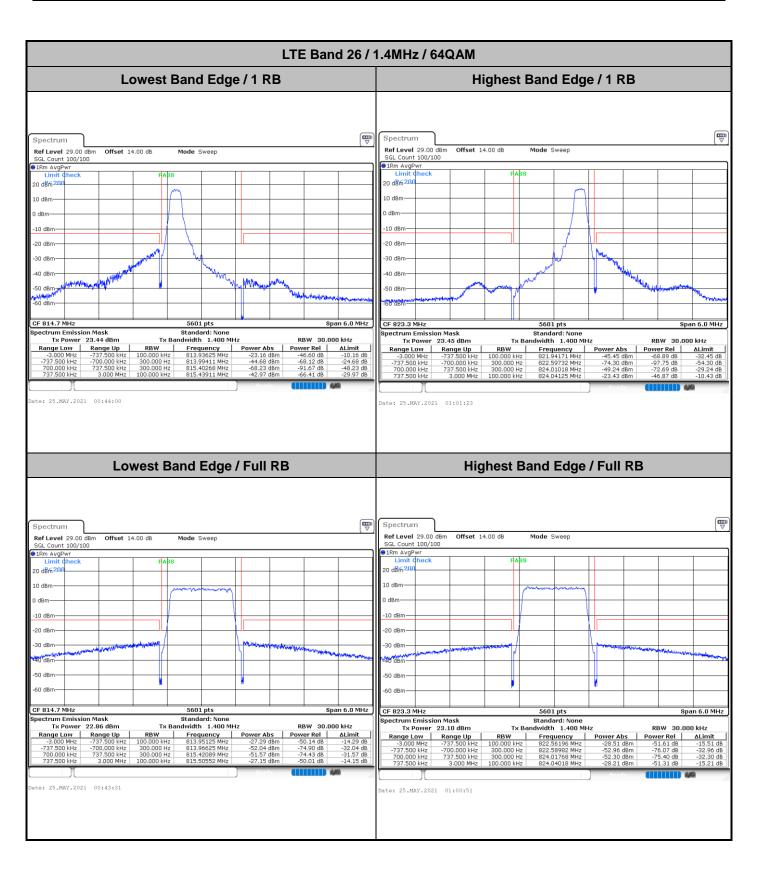

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A24 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01

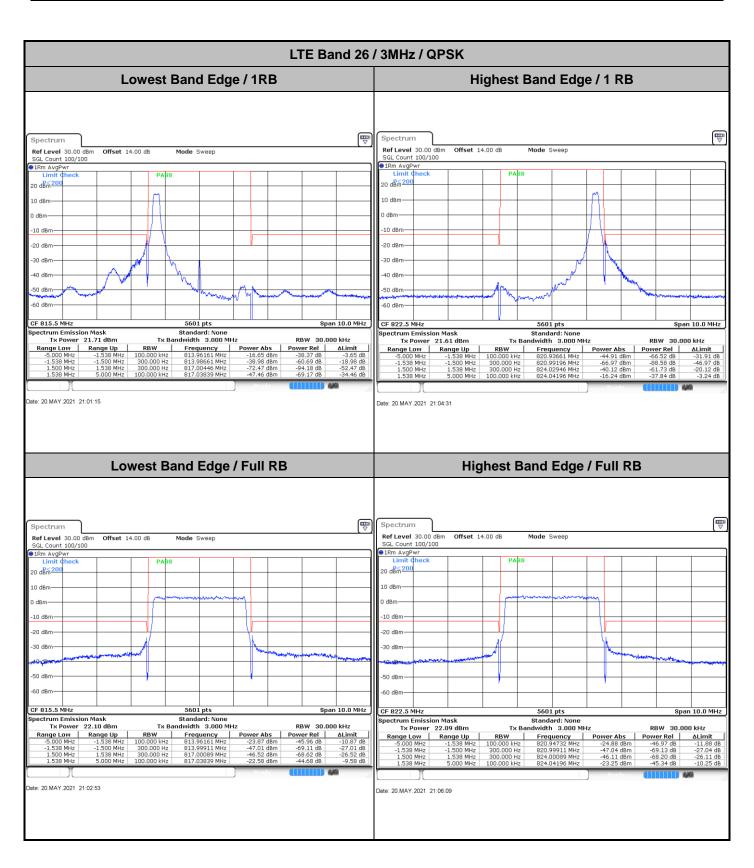

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZP3 Page Number : A25 of A47
Report Issued Date : Jun. 29, 2021
Report Version : Rev. 01