FCC RF Test Report

APPLICANT : Motorola Mobility LLC EQUIPMENT : Mobile Cellular Phone

BRAND NAME : Motorola

MODEL NAME : XT2128-2

FCC ID : IHDT56ZQ3

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Feb. 02, 2021 and completely tested on Feb. 14, 2021. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Frie Shih

Dogue Cher

Approved by: Eric Shih / Manager

Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 1 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report No.: FW120201

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAF	RY OF TEST RESULT	4
1	GENI	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	
	1.6	Maximum Conducted Power, Frequency Tolerance and Emission Designator	6
	1.7	Testing Site	
	1.8	Test Software	
	1.9	Applied Standards	
	1.10	Specification of Accessory	8
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	TEST	RESULT	12
	3.1	Conducted Output Power Measurement	12
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	
	3.4	Emissions Mask – Out Of Band Emissions Measurement	16
	3.5	Field Strength of Spurious Radiation Measurement	17
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT	21
5	UNC	ERTAINTY OF EVALUATION	22
ΑP	PEND	IX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	IX B. TEST RESULTS OF RADIATED TEST	

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 2 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW120201	Rev. 01	Initial issue of report	Mar. 04, 2021

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 3 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 Emission masks – < 43+10log		< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 46.49 dB at 2450.250 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 4 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago, IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago, IL 60654 USA

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2128-2
FCC ID	IHDT56ZQ3
	GSM/WCDMA/LTE/NFC
	WLAN 2.4GHz 802.11b/g/n HT20
EUT supports Radios application	WLAN 5GHz 802.11a/n HT20/HT40
EOT Supports Radios application	WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
	Bluetooth BR/EDR/LE
	FM Receiver, and GNSS
IMELCONO	Conducted: 354244970713794 354244970713802
IMEI Code	Radiation: 354244970700270/354244970700288
HW Version	DVT2
SW Version	RTA31.09
EUT Stage	Production Unit

Report No. : FW120201

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard						
Tx Frequency	814 ~ 824 MHz					
Rx Frequency	859 ~ 869 MHz					
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz					
Maximum Output Power to Antenna	23.81 dBm					
Antenna Gain	-2.7 dBi					
Type of Modulation	QPSK / 16QAM / 64QAM					

 Sporton International (Shenzhen) Inc.
 Page Number
 : 5 of 21

 TEL: 86-755-8637-9589
 Report Issued Date
 : Mar. 04, 2021

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID : IHDT56ZQ3 Report Template No.: BU5-FWLTE Version 2.0

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power, Frequency Tolerance and Emission Designator

Ľ	TE Band 26		QPSK		16QAM				
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)			Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power (W)		
1.4	814.7 ~ 823.3	1M10G7D	-	0.2404	1M11W7D	1	0.1928		
3	815.5 ~ 822.5	2M73G7D	-	0.1950	2M76W7D	-	0.1832		
5	816.5 ~ 821.5	4M49G7D -		0.1950	4M51W7D	-	0.1816		
10	819.0	9M11G7D	0.0047	0.1977	9M03W7D	-	0.1811		
15	821.5	13M5G7D	0.0031	0.1991	13M4W7D	-	0.1837		
Ľ	TE Band 26			64Q	AM	АМ			
BW (MHz)	Frequency Range (MHz)		Designator OBW)		Tolerance om)	Maximum Conducted power (W)			
1.4	814.7 ~ 823.3	1M10)W7D		-		563		
3	815.5 ~ 822.5	2M73	BW7D		-	0.1422			
5	816.5 ~ 821.5	4M50W7D			-	0.1	429		
10	819.0	9M03	BW7D		-	0.1452			
15	821.5	13M4	₩7D		-	0.1455			

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 6 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.								
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595								
	Sporton Site No.	Sporton Site No. FCC Designation No.							
Test Site No.	Sporton Site No.	rec Designation No.	Registration No.						
	TH01-SZ	CN1256	421272						

Test Firm	Sporton International (Sh	Sporton International (Shenzhen) Inc.							
Test Site Location									
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.						
	03CH02-SZ	CN1256	421272						

1.8 Test Software

Item	Site	Manufacturer	Name	Version	
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a	

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 7 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

 All test items were verified and recorded according to the standards and without any deviation during the test.

This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.10 Specification of Accessory

	Specification of Accessory								
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101					
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102					
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103					
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105					
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101					
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102					
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103					
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105					
AC Adapter 3(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101					
AC Adapter 3(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102					
Battery	Brand Name	Motorola (Sunwoda)	Model Name	JK50					
Earphone 1	Brand Name	Motorola (Juwei)	Model Name	JWEP1123-T03					
Earphone 2	Brand Name	Motorola (Juwei)	Model Name	JWEP1182-T03H					
Earphone 3	Brand Name	Motorola (New Leader)	Model Name	NLD-EM313A-11SF					
Earphone 4	Brand Name	Motorola (LIANYUN)	Model Name	SH38C81577					
Earphone 5	Brand Name	Motorola (Lianchuang)	Model Name	SH38C81576					
USB Cable 1	Brand Name	Motorola (Chuangyitong)	Model Name	88806-025					
USB Cable 2	Brand Name	Motorola (Yihuaxing)	Model Name	T365-011B					
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955					

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 8 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Test Configuration of Equipment Under Test 2

Test Mode 2.1

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

		Bandwidth (MHz)					Modulation			RB#			Test Channel			
Test Items	Band	1.4	3	5	10	15	20	QPS K	16 QAM	64 QAM	1	Hal f	Full	L	М	Н
Max. Output Power	26	v	v	v	v	٧	•	٧	٧	v	v	v	v	٧	٧	٧
26dB and 99% Bandwidth	26	v	v	v	v	٧	•	v	٧	v			v	٧	٧	v
Emission masks In-band emissions	26	v	v	v	v	>	•	٧	٧	v	v		v	٧		>
Emission masks - Out of band emissions	26	v	v	v	v	٧		v	v	v	v			٧	٧	V
Frequency Stability	26				v	v	-	v					v		v	
Radiated Spurious Emission	26	v	v	v	v	v	-	v			v				v	
1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. EF over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.						≣RP										


spectrum which falls within part 22 also complies.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3

: 9 of 21 Page Number Report Issued Date: Mar. 04, 2021 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

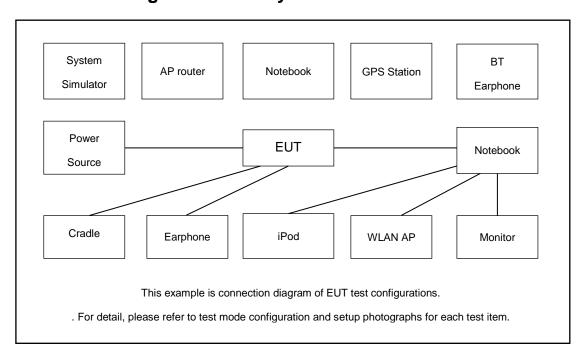

2.3 Support Unit used in test configuration and system

Item		Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord	
	1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

$$= 4.0 + 10 = 14.0 (dB)$$

Report No. : FW120201

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest						
45	Channel	26765	-	-						
15	Frequency	821.5	-	-						
10	Channel	-	26740	-						
	Frequency	-	819	-						
5	Channel	26715	26740	26765						
5	Frequency	816.5	819	821.5						
2	Channel	26705	26740	26775						
3	Frequency	815.5	819	822.5						
1 1	Channel	26697	26740	26783						
1.4	Frequency	814.7	819	823.3						

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 11 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 12 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

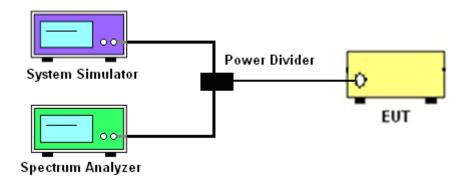

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 13 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 14 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3.4 Test Setup

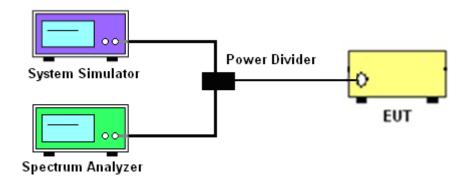

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 15 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

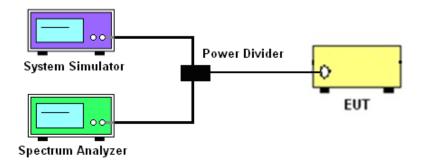

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 16 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report No.: FW120201

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 17 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01


Report No.: FW120201

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

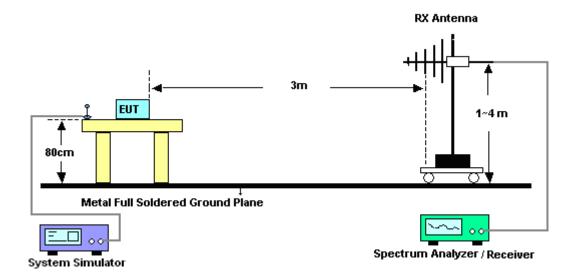

For radiated test above 1GHz

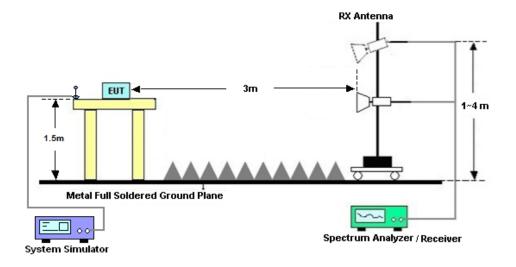

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 18 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report No. : FW120201

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.


3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 19 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.6.5 Test Setup

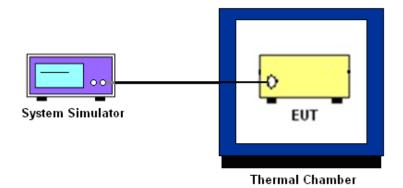

3.6.6 **Test Result of Temperature Variation**

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3

Page Number : 20 of 21 Report Issued Date: Mar. 04, 2021 Report Version : Rev. 01

Report No.: FW120201

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 17, 2020	Feb. 06, 2021	Apr. 16, 2021	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangrou p	LP-150U	H201408180 3	-40~+150°C	Jul. 22, 2020	Feb. 06, 2021	Jul. 21, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz	Apr. 17, 2020	Feb. 14, 2021	Apr. 16, 2021	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 15, 2020	Feb. 14, 2021	Jul. 14, 2021	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2020	Feb. 14, 2021	Jul. 24, 2021	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 16, 2020	Feb. 14, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY5327010 5	0.5GHz~26.5Gh z	Oct. 16, 2020	Feb. 14, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	6160100024 70	N/A	NCR	Feb. 14, 2021	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Feb. 14, 2021	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Feb. 14, 2021	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 21 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

	7
Measuring Uncertainty for a Level of	2.47dB
Confidence of 95% (U = 2Uc(y))	2.47QB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

- 1		
	Measuring Uncertainty for a Level of	3.31dB
	Confidence of 95% (U = 2Uc(y))	3.31UD

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : 22 of 21
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
	Cha	nnel	26765	26865	26965	
		cy (MHz)	821.5	831.5	841.5	
15	QPSK	1	0	22.99	22.91	22.93
15	QPSK	1	37	22.91	22.95	22.90
15	QPSK	1	74	22.97	22.93	22.87
15	QPSK	36	0	22.65	22.49	22.52
15 15	QPSK	36	20	22.67	22.49	22.65
15	QPSK	36	39	22.61	22.57	22.53
15			0			
	QPSK	75		22.56	22.63	22.59
15	16QAM	1	0	22.64	22.60	22.53
15	16QAM	1	37	22.47	22.50	22.56
15	16QAM	1	74	22.55	22.55	22.50
15	16QAM	36	0	21.86	21.90	21.58
15	16QAM	36	20	22.00	21.98	21.51
15	16QAM	36	39	22.00	21.99	21.97
15	16QAM	75	0	21.79	21.85	21.74
15	64QAM	1	0	21.63	21.52	21.59
15	64QAM	1	37	21.45	21.58	21.07
15	64QAM	1	74	21.51	21.10	21.51
15	64QAM	36	0	19.08	19.05	19.45
15	64QAM	36	20	19.17	19.12	19.07
15	64QAM	36	39	19.25	19.26	19.05
15	64QAM	75	0	19.17	19.11	19.13
	Cha	nnel		26740	26865	26990
	Frequen	cy (MHz)		819	831.5	844
10	QPSK	1	0	22.92	22.79	22.90

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A1 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01



FCC RF Test Report No.: FW120201

10	QPSK	1	25	22.90	22.78	22.74	
10	QPSK	1	49	22.96	22.81	22.80	
10	QPSK	25	0	22.53	22.49	22.52	
10	QPSK	25	12	22.48	22.52	22.53	
10	QPSK	25	25	22.41	22.32	22.45	
10	QPSK	50	0	22.44	22.58	22.54	
10	16QAM	1	0	22.58	22.57	22.35	
10	16QAM	1	25	22.29	22.33	22.53	
10	16QAM	1	49	22.55	22.48	22.37	
10	16QAM	25	0	21.74	21.82	21.56	
10	16QAM	25	12	21.92	21.98	21.49	
10	16QAM	25	25	21.95	21.91	21.95	
10	16QAM	50	0	21.66	21.77	21.62	
10	64QAM	1	0	21.62	21.45	21.57	
10	64QAM	1	25	21.43	21.44	20.97	
10	64QAM	1	49	21.50	20.96	21.50	
10	64QAM	25	0	19.21	19.21	19.58	
10	64QAM	25	12	19.25	19.23	19.16	
10	64QAM	25	25	19.35	19.40	19.19	
10	64QAM	50	0	19.28	19.31	19.14	
	Cha	nnel		26715	26865	27015	
	Frequen	cy (MHz)		816.5	831.5	846.5	
5	QPSK	1	0	22.86	22.74	22.89	
5	QPSK	1	12	22.83	22.85	22.87	
5	QPSK	1	24	22.86	22.90	22.83	
5	QPSK	12	0	22.63	22.44	22.40	
5	QPSK	12	7	22.66	22.39	22.52	
5	QPSK	12	13	22.47	22.32	22.42	
5	QPSK	25	0	22.38	22.63	22.48	
5	16QAM	1	0	22.59	22.45	22.34	
5	16QAM	1	12	22.36	22.41	22.49	
5	16QAM	1	24	22.54	22.39	22.33	
5	16QAM	12	0	21.68	21.90	21.51	
5	16QAM	12	7	21.81	21.97	21.49	

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A2 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01



FCC RF Test Report No.: FW120201

5	16QAM	12	13	21.81	21.89	21.82
5	16QAM	25	0	21.72	21.79	21.68
5	64QAM	1	0	21.55	21.32	21.48
5	64QAM	1	12	21.41	21.45	20.91
5	64QAM	1	24	21.51	20.90	21.41
5	64QAM	12	0	19.14	19.14	19.53
5	64QAM	12	7	19.25	19.29	19.25
5	64QAM	12	13	19.44	19.43	19.09
5	64QAM	25	0	19.34	19.30	19.24
	Cha	innel		26705	26865	27025
	Frequen	cy (MHz)		815.5	831.5	847.5
3	QPSK	1	0	22.83	22.80	22.76
3	QPSK	1	8	22.87	22.84	22.90
3	QPSK	1	14	22.89	22.85	22.76
3	QPSK	8	0	22.45	22.39	22.50
3	QPSK	8	4	22.55	22.44	22.62
3	QPSK	8	7	22.59	22.31	22.38
3	QPSK	15	0	22.38	22.60	22.57
3	16QAM	1	0	22.63	22.41	22.40
3	16QAM	1	8	22.42	22.31	22.45
3	16QAM	1	14	22.45	22.44	22.47
3	16QAM	8	0	21.79	21.89	21.42
3	16QAM	8	4	21.95	21.81	21.35
3	16QAM	8	7	21.80	21.99	21.86
3	16QAM	15	0	21.73	21.75	21.56
3	64QAM	1	0	21.50	21.51	21.47
3	64QAM	1	8	21.39	21.53	20.89
3	64QAM	1	14	21.33	21.06	21.38
3	64QAM	8	0	19.09	19.24	19.61
3	64QAM	8	4	19.20	19.18	19.22
3	64QAM	8	7	19.31	19.44	19.07
3	64QAM	15	0	19.34	19.24	19.20
	Cha	innel		26697	26865	27033
	Frequen	cy (MHz)		814.7	831.5	848.3

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A3 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01



FCC RF Test Report

1.4	QPSK	1	0	23.14	23.05	22.93	
1.4	QPSK	1	3	23.09	23.00	22.89	
1.4	QPSK	1	5	23.12	22.83	22.90	
1.4	QPSK	3	0	23.81	23.69	23.67	
1.4	QPSK	3	1	23.70	23.66	23.60	
1.4	QPSK	3	3	23.68	23.63	23.61	
1.4	QPSK	6	0	22.63	22.48	22.47	
1.4	16QAM	1	0	22.53	22.41	22.36	
1.4	16QAM	1	3	22.64	22.46	22.36	
1.4	16QAM	1	5	22.02	22.42	22.31	
1.4	16QAM	3	0	22.97	22.82	22.85	
1.4	16QAM	3	1	22.94	22.90	22.58	
1.4	16QAM	3	3	22.85	22.86	22.65	
1.4	16QAM	6	0	21.78	21.61	21.86	
1.4	64QAM	1	0	21.88	21.53	21.88	
1.4	64QAM	1	3	21.83	21.55	21.94	
1.4	64QAM	1	5	21.85	21.55	21.87	
1.4	64QAM	3	0	21.72	21.79	21.68	
1.4	64QAM	3	1	21.93	21.80	21.91	
1.4	64QAM	3	3	21.81	21.77	21.85	
1.4	64QAM	6	0	19.01	19.16	19.04	

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A4 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

LTE Band 26_Part 90S

Peak-to-Average Ratio

Mode					
	0.5		26 / 10MHz		11 1/ 40 15
Mod.	QP	SK	160	MAG	Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	1	-	
Middle CH	4.87	5.25	5.33	6.06	PASS
Highest CH	-	-	-	-	
Mode		LTE Band	26 / 10MHz		
Mod.	64C	MA		Limit: 13dB	
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	
Middle CH	5.91	6.35	-	-	PASS

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A5 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

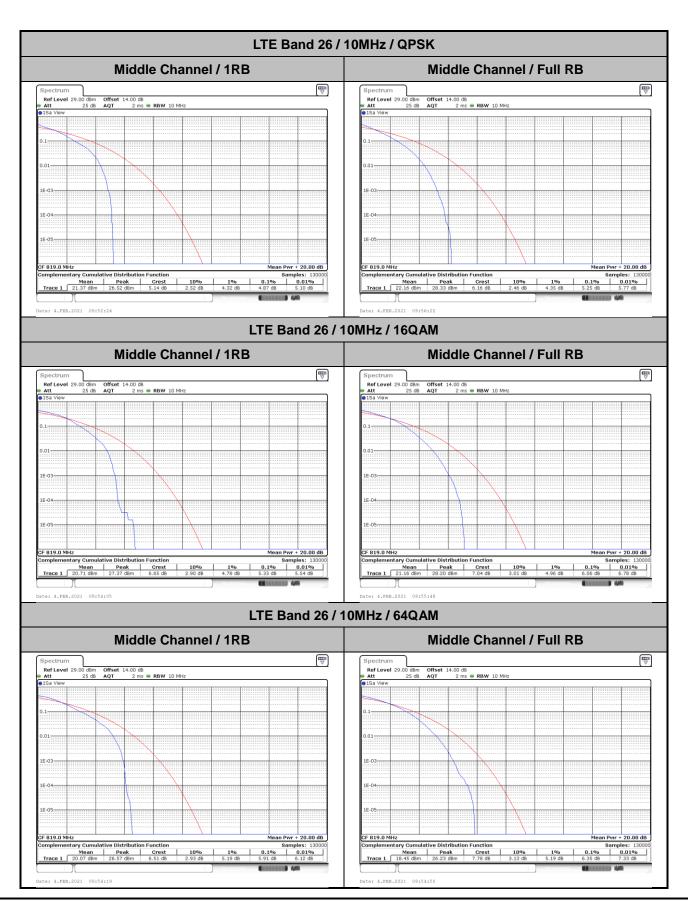

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A6 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	ИНz	3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.24	1.23	3.11	3.06	4.91	4.91	-	-	14.69	14.18	-	-
Middle CH	1.24	1.24	3.12	3.04	4.94	4.85	9.85	9.85	-	-	-	-
Highest CH	1.25	1.24	3.06	3.05	4.90	4.99	-	-	-	-	-	-
Mode					LTE Ba	and 26 : :	26dB BV	V(MHz)				
BW	1.41	ИНz	3M	lHz	5N	5MHz 10MHz		15MHz		20MHz		
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.25	-	3.07	-	4.95	-	-	-	14.63	-	-	-
Middle CH	1.21	-	3.06	-	4.96	-	10.03	-	-	-	-	-
Highest CH	1.24	-	3.07	-	4.95	-	-	-	-	-	-	-


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3


: A7 of A48 Page Number Report Issued Date: Mar. 04, 2021

Report No. : FW120201


Report Version : Rev. 01

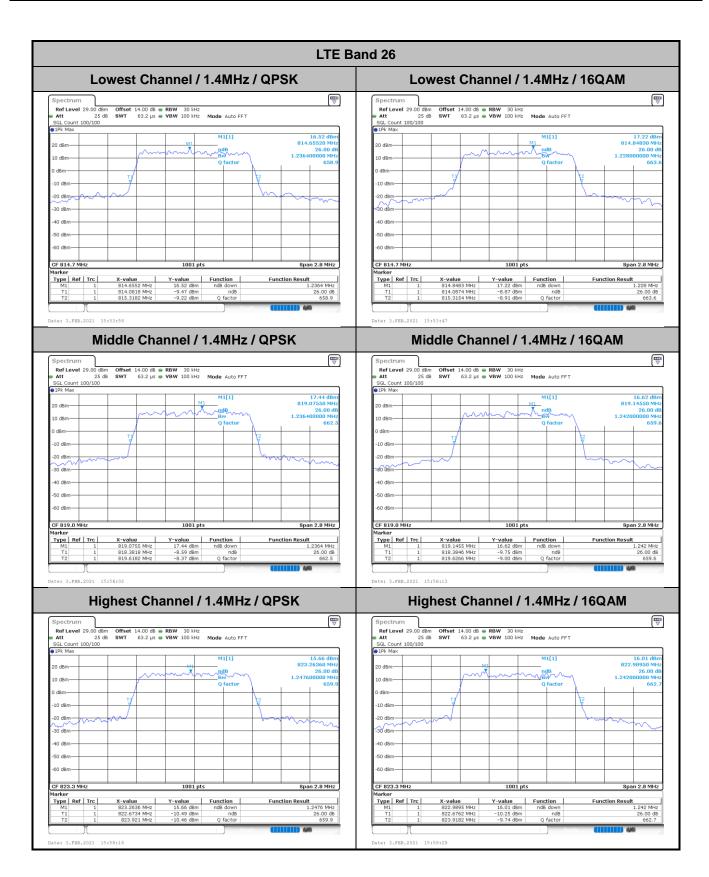


Page Number : A8 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

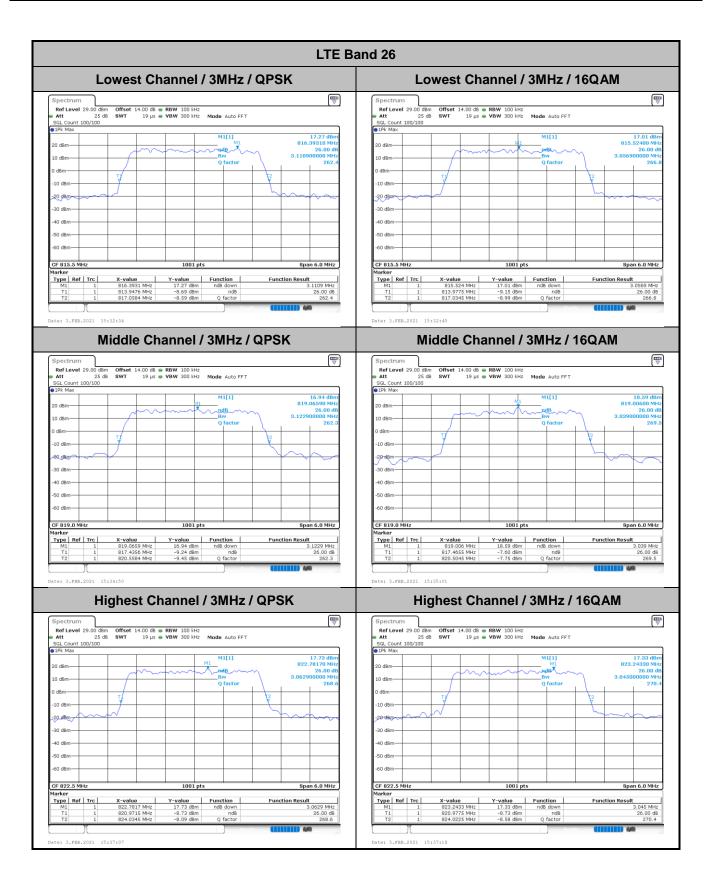


Page Number : A9 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

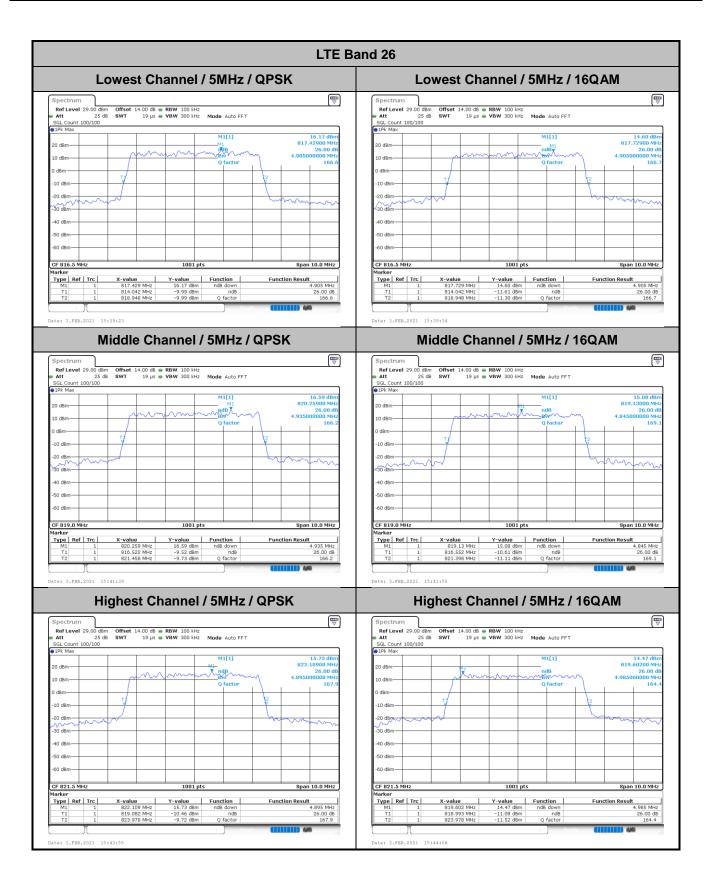


Page Number : A10 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

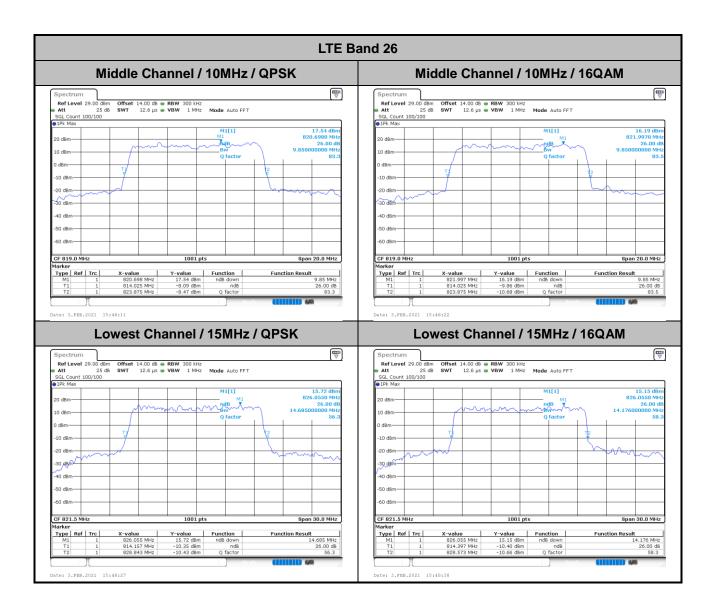


Page Number : A11 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

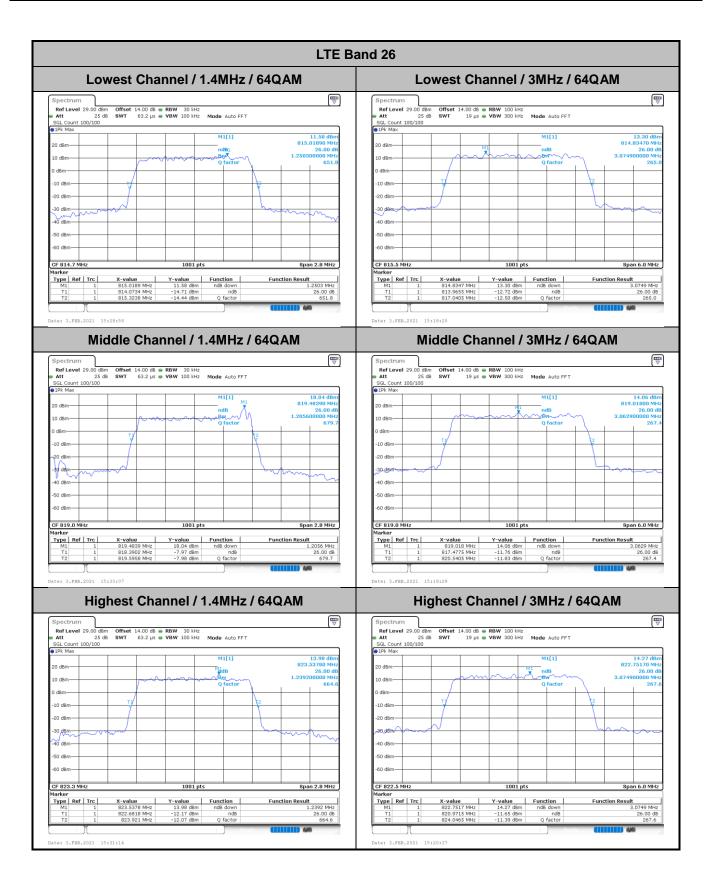

Page Number : A12 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

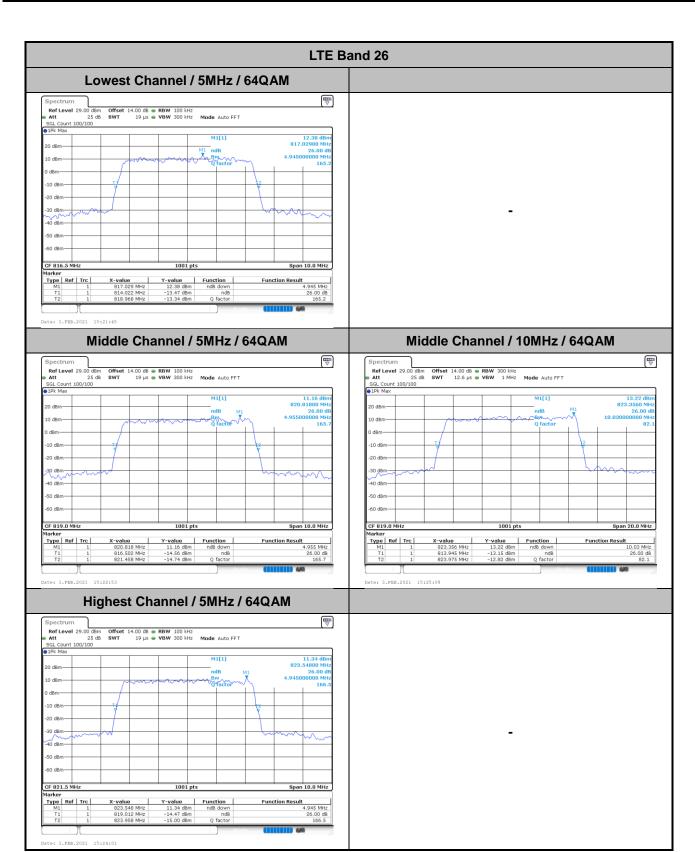

Page Number : A13 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

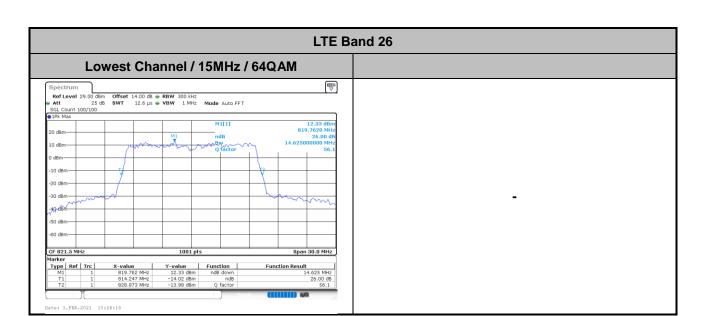

Page Number : A14 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.73	2.71	4.49	4.51	-	-	13.49	13.40	-	-
Middle CH	1.09	1.09	2.70	2.71	4.49	4.48	9.11	9.03	-	-	-	-
Highest CH	1.10	1.11	2.73	2.76	4.49	4.50	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.10	-	2.72	-	4.50	-	-	-	13.43	-	-	-
Middle CH	1.09	-	2.73	-	4.50	-	9.03	-	-	-	-	-
Highest CH	1.09	-	2.73	-	4.49	-	-	-	-	-	-	-


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3


: A15 of A48 Page Number Report Issued Date: Mar. 04, 2021

Report No. : FW120201


Report Version : Rev. 01

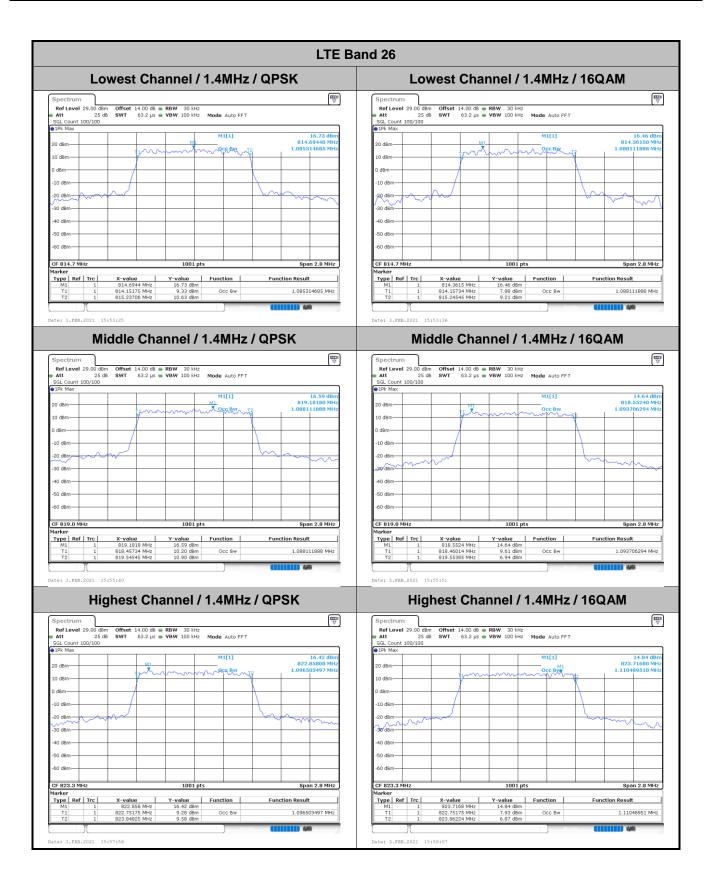


Page Number : A16 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

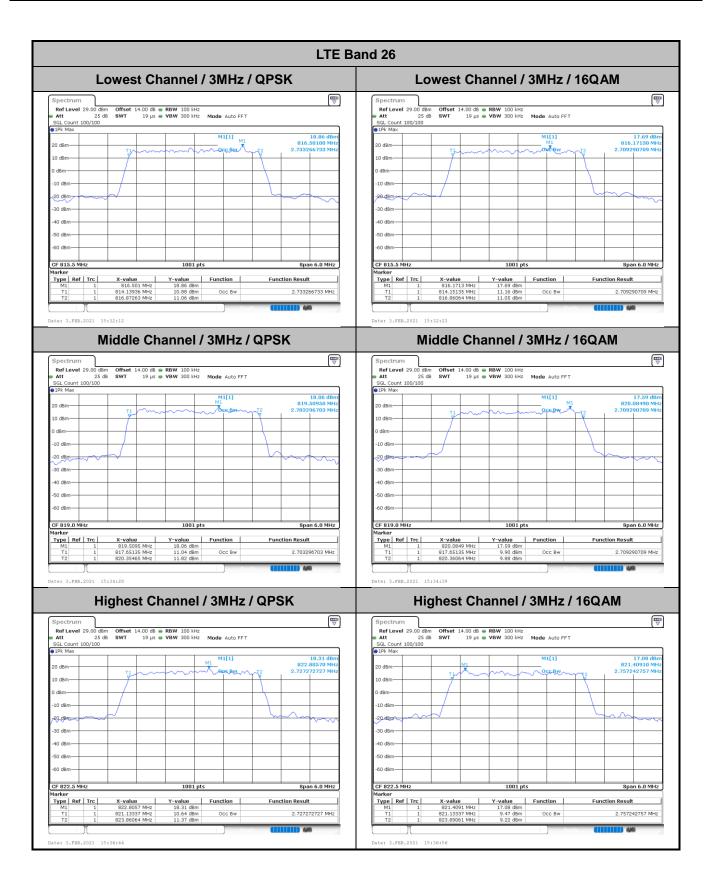


Page Number : A17 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

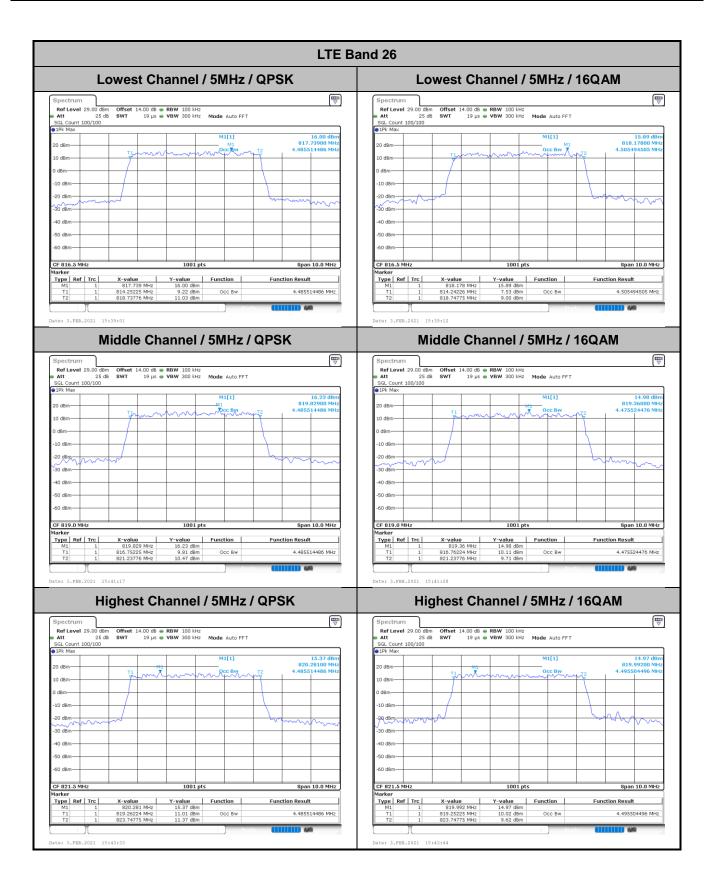


Page Number : A18 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

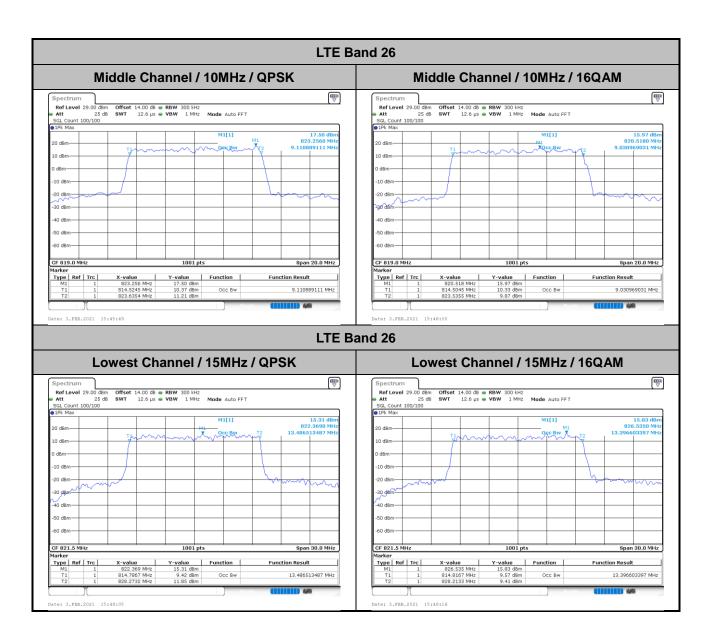


Page Number : A19 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

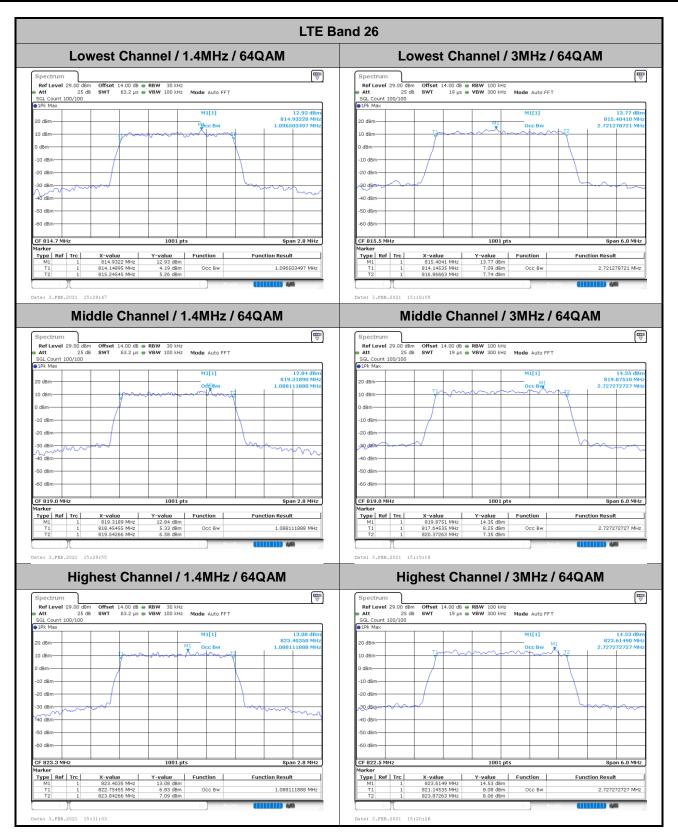

Page Number : A20 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

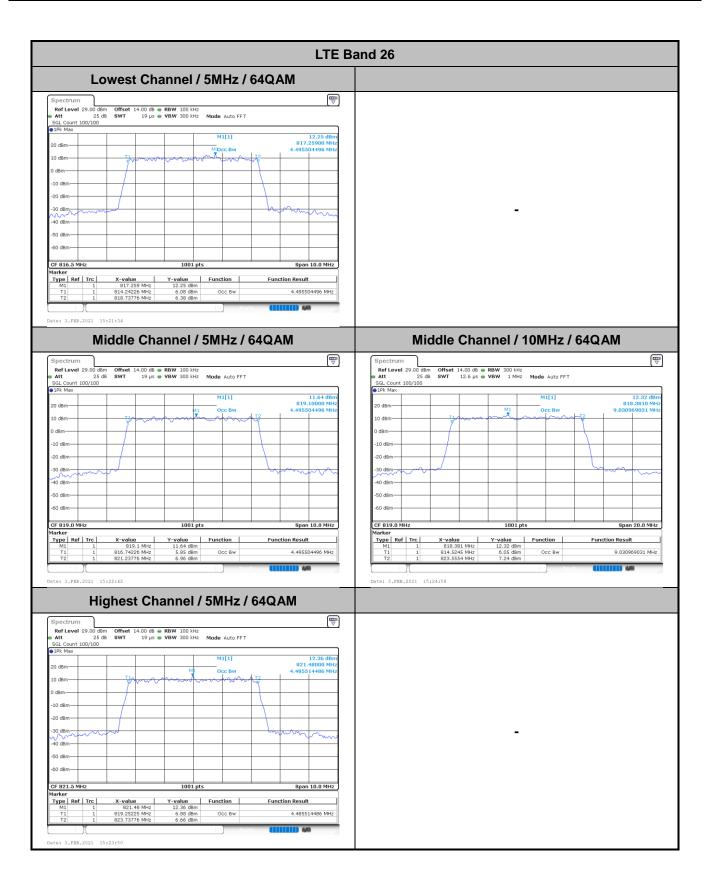


Page Number : A21 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

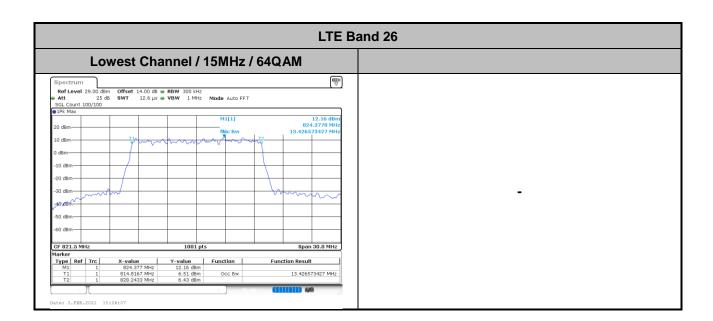


Page Number : A22 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

Conducted Band Edge

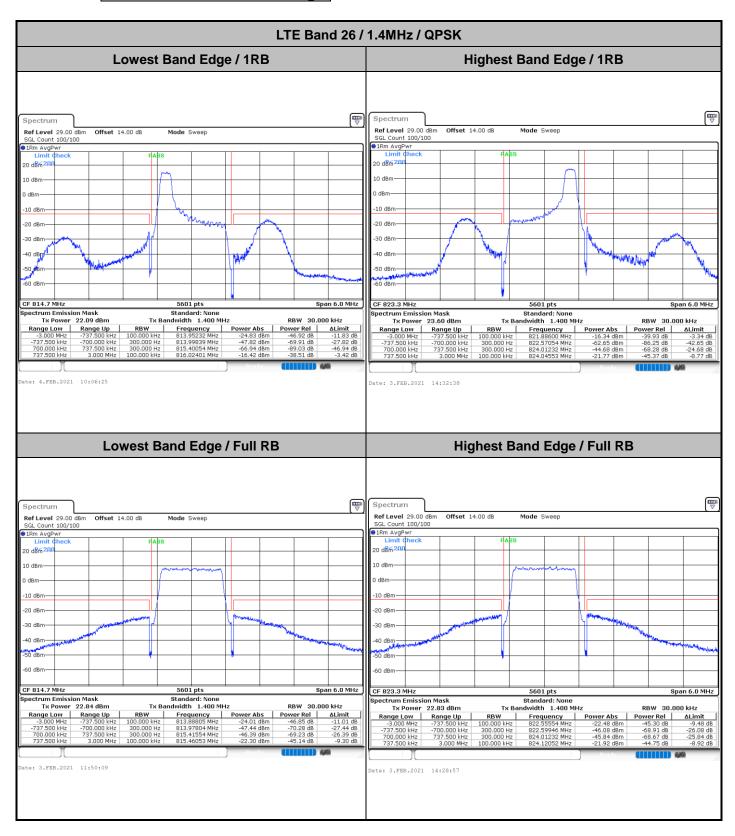


Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A23 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

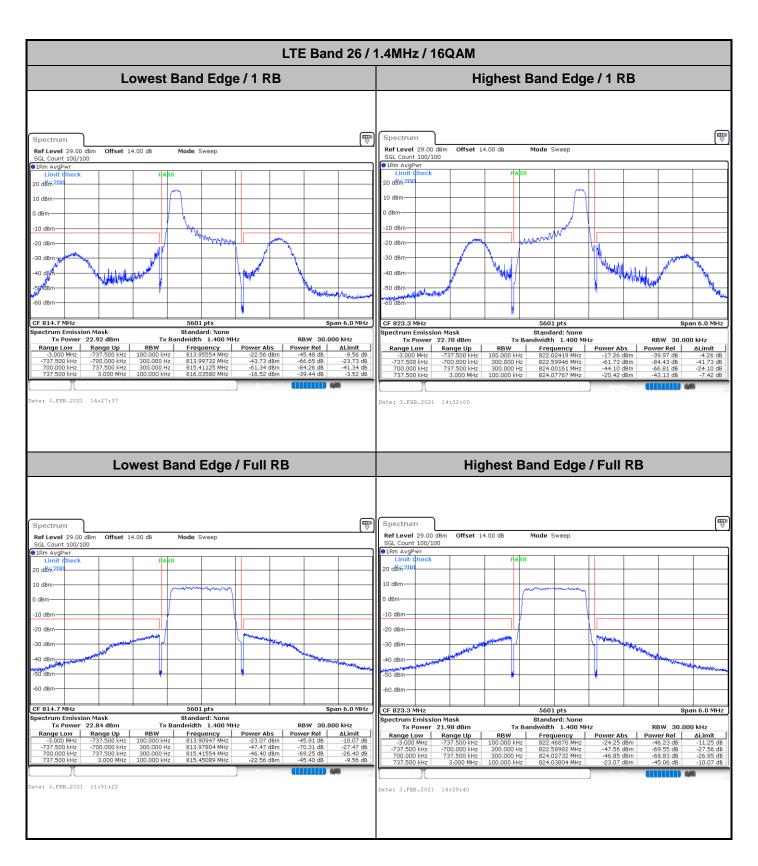


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A24 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

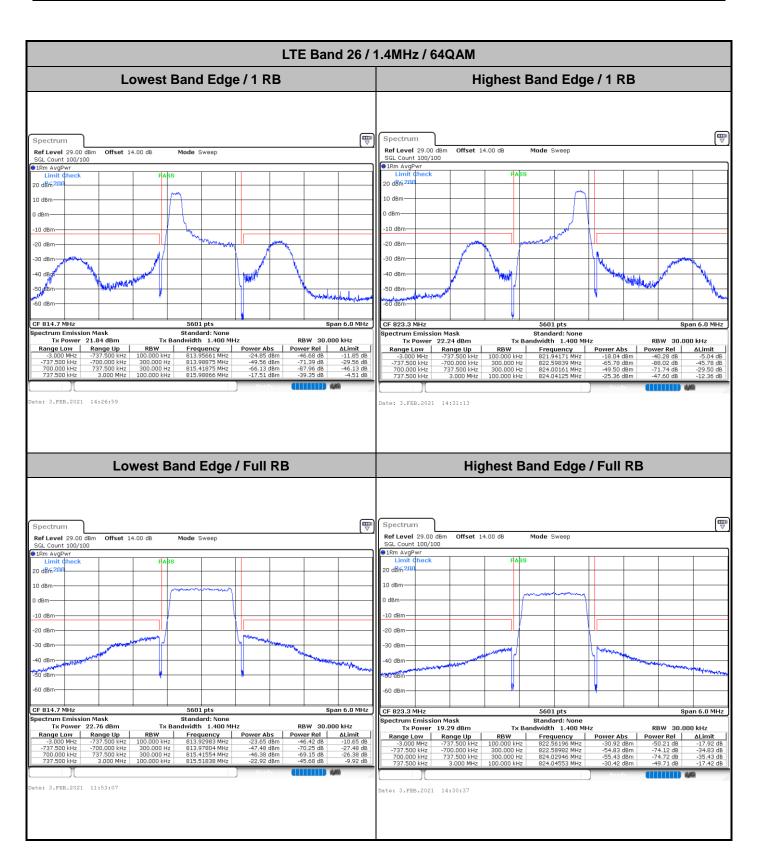

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A25 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

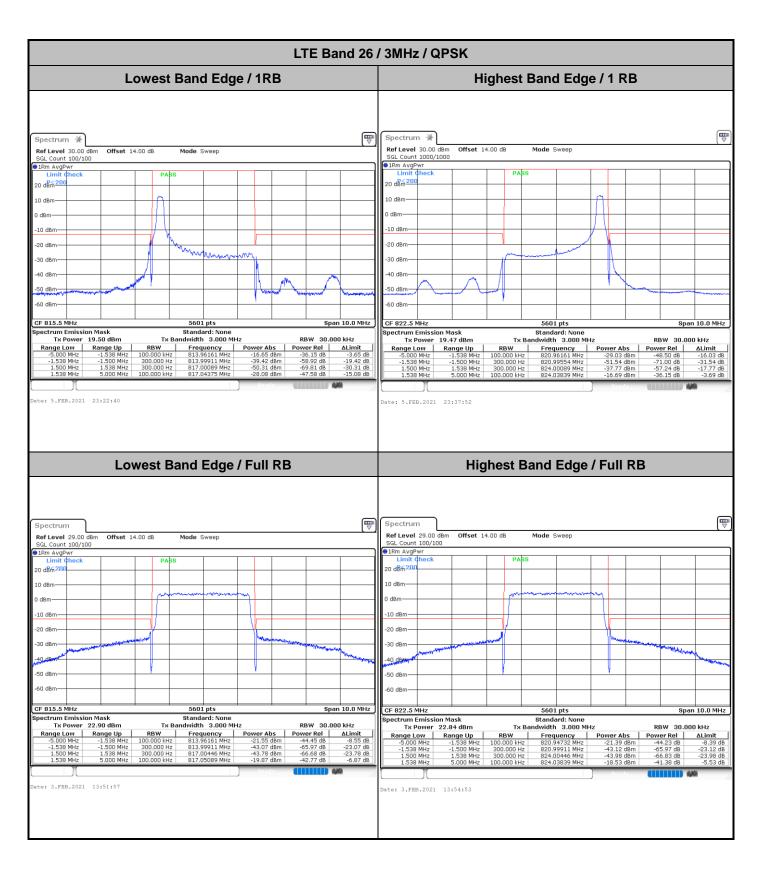

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A26 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01

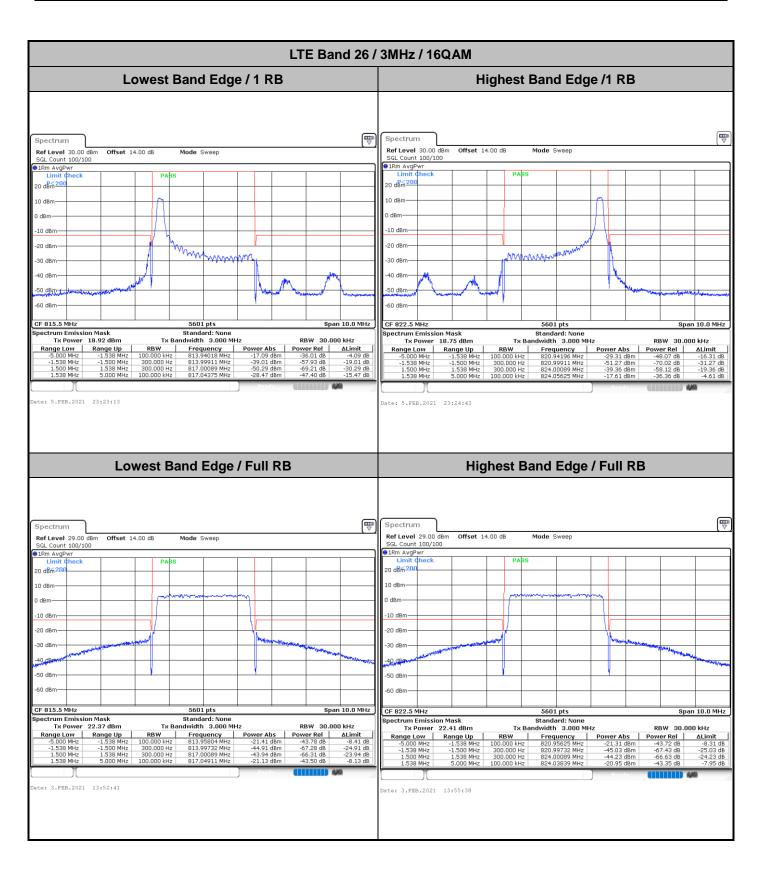

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56ZQ3 Page Number : A27 of A48
Report Issued Date : Mar. 04, 2021
Report Version : Rev. 01