



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2147-1
FCC ID : IHDT56ZS5
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 08, 2021 and completely tested on Feb. 19, 2021. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 6
1.5 Specification of Accessory ... 7
1.6 Modification of EUT ... 7
1.7 Re-use of Measured Data ... 8
1.8 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ... 9
1.9 Testing Location ... 10
1.10 Test Software ... 10
1.11 Applicable Standards ... 10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 11
2.1 Test Mode ... 11
2.2 Connection Diagram of Test System ... 13
2.3 Support Unit used in test configuration and system ... 13
2.4 Measurement Results Explanation Example ... 13
2.5 Frequency List of Low/Middle/High Channels ... 14
3 CONDUCTED TEST ITEMS ... 17
3.1 Measuring Instruments ... 17
3.2 Test Setup ... 17
3.3 Test Result of Conducted Test ... 17
3.4 Conducted Output Power and ERP/EIRP ... 18
3.5 Peak-to-Average Ratio ... 19
3.6 Occupied Bandwidth ... 20
3.7 Conducted Band Edge ... 21
3.8 Conducted Spurious Emission ... 23
3.9 Frequency Stability ... 24
4 RADIATED TEST ITEMS ... 25
4.1 Measuring Instruments ... 25
4.2 Test Setup ... 25
4.3 Test Result of Radiated Test ... 25
4.4 Radiated Spurious Emission ... 26
5 LIST OF MEASURING EQUIPMENT ... 27
6 UNCERTAINTY OF EVALUATION ... 28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS
APPENDIX D. REFERENCE REPORT



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG0N2517-02B	Rev. 01	Initial issue of report	Feb. 19, 2021



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (Band 5) (Band 26)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7) (Band 38) (Band 41)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38) (Band 41)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7) (Band 38) (Band 41)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 15.38 dB at 12924.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7) (Band 38) (Band 41)	< 55+10log ₁₀ (P[Watts])		

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2147-1
FCC ID	IHDT56ZS5
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/FM Receiver
IMEI Code	Conducted/Radiation: N/A
HW Version	DVT2
SW Version	RRI31.Q1-10
EUT Stage	Identical Prototype

Note: There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1 is dual SIM slot and sample 2 is single SIM slot. According to the difference, we evaluate the sample 1 to perform full test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 26 : 824 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2535 MHz ~ 2655 MHz
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 26 : 869 MHz ~ 894 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2535 MHz ~ 2655 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 22.95 dBm LTE Band 4 : 23.15 dBm LTE Band 5 : 23.05 dBm LTE Band 26 : 23.07 dBm LTE Band 38 : 23.20 dBm LTE Band 41 : 23.21 dBm
Antenna Gain	LTE Band 2 : -2.5 dBi LTE Band 4 : -2.2 dBi LTE Band 5 : -2.1 dBi LTE Band 26 : -2.1 dBi LTE Band 38 : -2.2 dBi LTE Band 41 : -2.2 dBi
Type of Modulation	QPSK / 16QAM / 64QAM



1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 2(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 2(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-204
AC Adapter 2(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-207
AC Adapter 1(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
Battery	Brand Name	Motorola (ATL)	Model Name	MC50
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18C24367
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18C24368
USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SC18C49697

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Re-use of Measured Data

1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2147-1, FCC ID: IHDT56ZS5) is electrically identical to the reference device (Model: XT2135-1, FCC ID: IHDT56ZS3) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01.

1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG0N2517-01B for the reference device Model: XT2135-1, FCC ID: IHDT56ZS3).

1.7.3 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test	Report Title/Section
PCE	IHDT56ZS3	FG0N2517-01B	All sections applicable for LTE Band 7

1.7.4 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for the following test items, the test result were consistent with FCC ID: IHDT56ZS3.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

Test Item	Mode	IHDT56ZS3 Worst Result	IHDT56ZS5 Worst Result	Difference (dB)
Radiated Spurious Emission (dBuV/m)	LTE Band 7	-43.02	-40.06	2.96



1.8 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
20	1860.0 ~ 1900.0	18M4G7D	0.0034	0.1109	18M1W7D	-	0.0929
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
20	1720.0 ~ 1745.0	18M3G7D	0.0026	0.1245	18M1W7D	-	0.1062
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
10	829 ~ 844	9M05G7D	0.0025	0.0759	8M99W7D	-	0.0664
LTE Band 26		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
15	831.5 ~ 841.5	13M4G7D	0.0025	0.0762	13M4W7D	-	0.0665
CH26765	821.5	13M5G7D	-	0.0676	13M5W7D	-	0.0578
LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
20	2580.0 ~ 2610.0	18M4G7D	0.0049	0.1259	18M4W7D	-	0.1148
LTE Band 41		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
20	2545.0 ~ 2645.0	18M4G7D	0.0049	0.1262	18M4W7D	-	0.1159

Note:

1. LTE Band 26 overlaps the entire frequency range of LTE Band 5. Therefore, the test results provided in this report covers Band 26 as well as Band 5.
2. LTE Band 41 overlaps the entire frequency range of LTE Band 38. Therefore, the test results provided in this report covers Band 41 as well as Band 38.
3. Based on engineering evaluation, only the maximum bandwidth and the worst modulation test results are shown in the report.



1.9 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-KS TH01-KS	CN1257	314309

1.10 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a

1.11 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Ave rage Ratio	2						v	v	v	v			v		v	
	4						v	v	v	v			v		v	
	26					v	-	v	v	v			v		v	
	41	-	-				v	v	v	v			v		v	
26dB and 99% Bandwidth	2						v	v	v				v		v	
	4						v	v	v				v		v	
	26				v	v	-	v	v				v		v	
	41	-	-				v	v	v				v		v	
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v		v	v		v
	4	v	v	v	v	v	v	v	v	v	v		v	v		v
	26	v	v	v	v	v	-	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	2	v	v	v	v	v	v	v			v			v	v	v
	4	v	v	v	v	v	v	v			v			v	v	v
	26	v	v	v	v	v	-	v			v			v	v	v
	41	-	-	v	v	v	v	v			v			v	v	v



Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Frequency Stability	2						v	v			v				v	
	4						v	v			v				v	
	26					v	-	v			v				v	
	41	-	-				v	v			v				v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	26	v	v	v	v	v	-	v	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	2	Worst Case												v		
	4	Worst Case												v		
	26	Worst Case												v		
	41	Worst Case												v		
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. LTE Band 26 overlaps the entire frequency range of LTE Band 5. Therefore, the test results provided in this report covers Band 26 as well as Band 5. LTE Band 41 overlaps the entire frequency range of LTE Band 38. Therefore, the test results provided in this report covers Band 41 as well as Band 38. 															

2.2 Connection Diagram of Test System

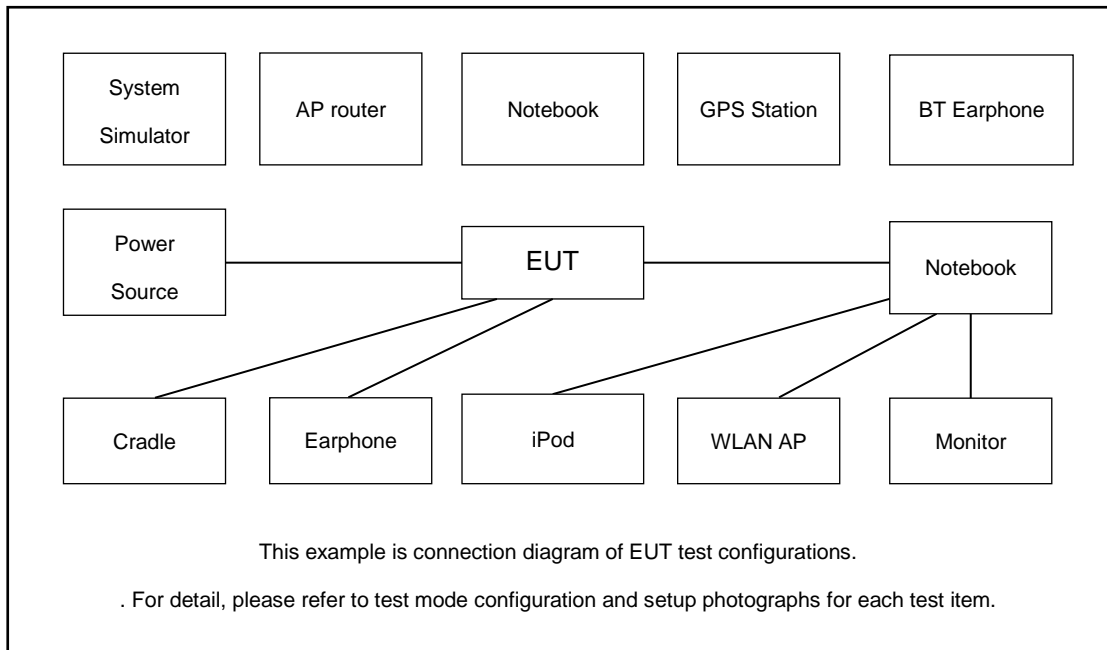

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$Offset = RF\ cable\ loss.$

Following shows an offset computation example with cable loss 5.4 dB.

Example :

$$Offset(dB) = RF\ cable\ loss(dB).$$

$$= 5.4\ (dB)$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5



LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40140	40640	41140
	Frequency	2545	2595	2645
15	Channel	40115	40640	41165
	Frequency	2542.5	2595	2647.5
10	Channel	40090	40640	41190
	Frequency	2540	2595	2650
5	Channel	40065	40640	41215
	Frequency	2537.5	2595	2652.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

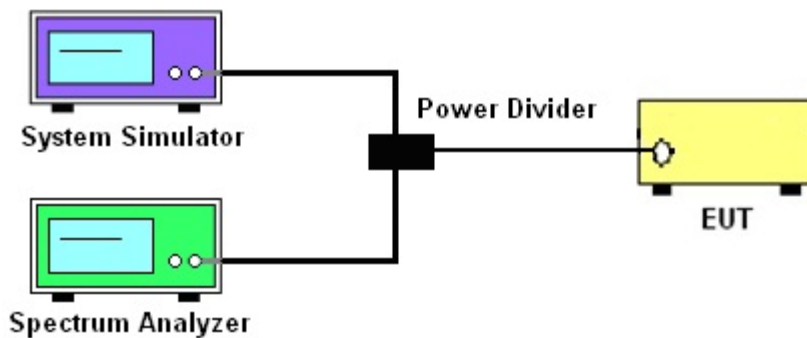

3.2.3 Frequency Stability

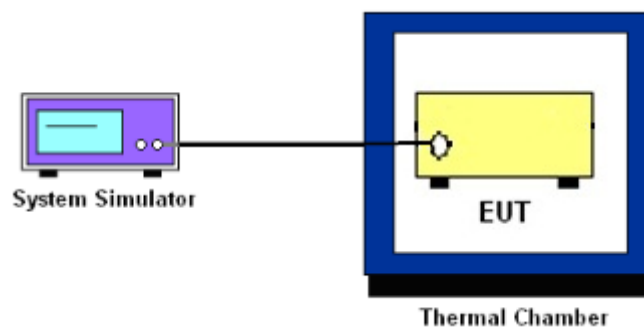

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5 and Band 26.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7 and Band 38 and Band 41.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For LTE Band 7, 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7,38,41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For Band 7, 38, 41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

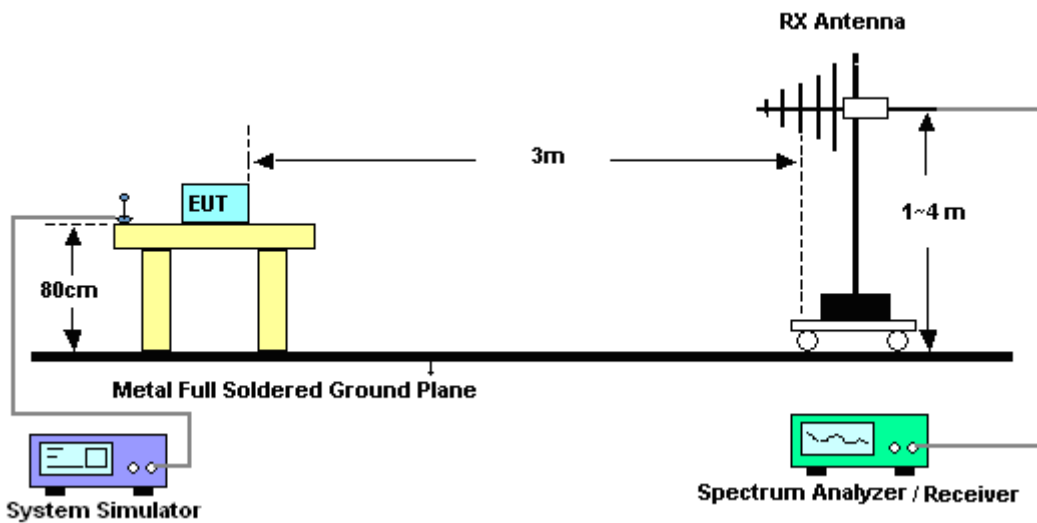

4.2.2 For radiated test above 1GHz

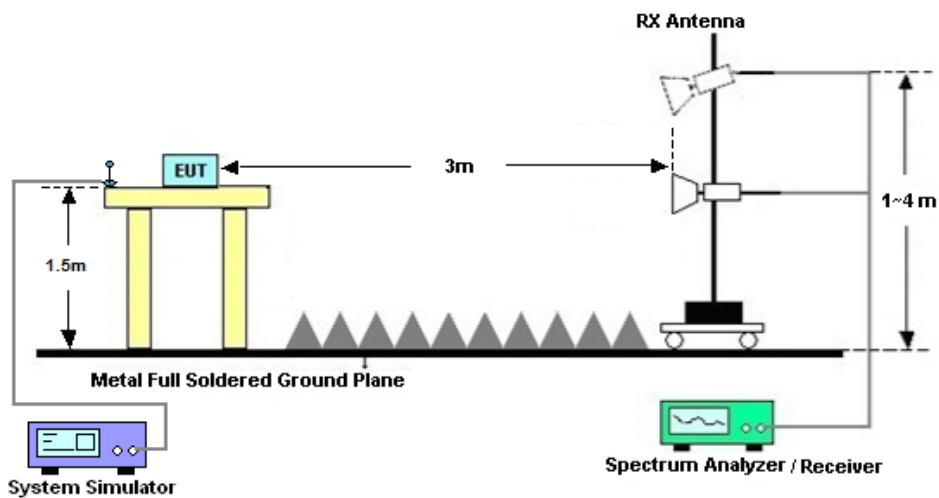

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$

13. For Band 7, 38, 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Dec. 19, 2020~ Feb. 19, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Temperature & humidity	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 03, 2020	Dec. 19, 2020~ Feb. 19, 2021	Jul. 02, 2021	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 17, 2020	Jan. 28, 2021	Oct. 16, 2021	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 26, 2021	Jan. 28, 2021	Jan. 25, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 01, 2020	Jan. 28, 2021	Oct. 31, 2021	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	100MHz-18GHz	Jan. 06, 2021	Jan. 28, 2021	Jan. 05, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 06, 2020	Jan. 28, 2021	Nov. 05, 2021	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 06, 2021	Jan. 28, 2021	Jan. 05, 2022	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Jan. 28, 2021	Oct. 16, 2021	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 06, 2021	Jan. 28, 2021	Jan. 05, 2022	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 28, 2021	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 28, 2021	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 28, 2021	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.1dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

LTE Band 2:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP		
							L	M	H
Channel				18700	18900	19100	EIRP		
Frequency (MHz)				1860	1880	1900	L	M	H
20	QPSK	1	0	22.50	22.63	22.95	0.1000	0.1030	0.1109
20	QPSK	1	49	22.48	22.70	22.84	0.0995	0.1047	0.1081
20	QPSK	1	99	22.47	22.65	22.88	0.0993	0.1035	0.1091
20	QPSK	50	0	21.48	21.73	21.95	0.0791	0.0838	0.0881
20	QPSK	50	24	21.50	21.73	21.93	0.0794	0.0838	0.0877
20	QPSK	50	50	21.53	21.72	21.87	0.0800	0.0836	0.0865
20	QPSK	100	0	21.60	21.69	21.92	0.0813	0.0830	0.0875
20	16QAM	1	0	21.78	21.88	22.18	0.0847	0.0867	0.0929
20	64QAM	1	0	20.69	20.88	21.03	0.0659	0.0689	0.0713
Channel				18675	18900	19125	EIRP		
Frequency (MHz)				1857.5	1880	1902.5	L	M	H
15	QPSK	1	0	22.44	22.56	22.88	0.0986	0.1014	0.1091
15	16QAM	1	0	21.69	21.84	22.15	0.0830	0.0859	0.0923
Channel				18650	18900	19150	EIRP		
Frequency (MHz)				1855	1880	1905	L	M	H
10	QPSK	1	0	22.48	22.55	22.94	0.0995	0.1012	0.1107
10	16QAM	1	0	21.82	21.93	22.17	0.0855	0.0877	0.0927
Channel				18625	18900	19175	EIRP		
Frequency (MHz)				1852.5	1880	1907.5	L	M	H
5	QPSK	1	0	22.51	22.55	22.93	0.1002	0.1012	0.1104
5	16QAM	1	0	21.78	21.71	22.09	0.0847	0.0834	0.0910
Channel				18615	18900	19185	EIRP		
Frequency (MHz)				1851.5	1880	1908.5	L	M	H
3	QPSK	1	0	22.57	22.53	22.86	0.1016	0.1007	0.1086
3	16QAM	1	0	21.74	21.81	22.14	0.0839	0.0853	0.0920
Channel				18607	18900	19193	EIRP		
Frequency (MHz)				1850.7	1880	1909.3	L	M	H
1.4	QPSK	1	0	22.62	22.44	22.88	0.1028	0.0986	0.1091
1.4	16QAM	1	0	21.78	21.84	22.03	0.0847	0.0859	0.0897



LTE Band 4:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP		
Channel				20050	20175	20300			
Frequency (MHz)				1720	1732.5	1745	L	M	H
20	QPSK	1	0	22.86	23.15	22.93	0.1164	0.1245	0.1183
20	QPSK	1	49	22.91	23.00	23.05	0.1178	0.1202	0.1216
20	QPSK	1	99	22.76	22.95	23.03	0.1138	0.1189	0.1211
20	QPSK	50	0	22.07	22.16	22.09	0.0971	0.0991	0.0975
20	QPSK	50	24	21.97	22.11	22.09	0.0948	0.0979	0.0975
20	QPSK	50	50	22.07	22.09	22.15	0.0971	0.0975	0.0989
20	QPSK	100	0	22.00	22.13	22.06	0.0955	0.0984	0.0968
20	16QAM	1	0	22.18	22.10	22.46	0.0995	0.0977	0.1062
20	64QAM	1	0	21.09	21.19	21.31	0.0774	0.0793	0.0815
Channel				20025	20175	20325	EIRP		
Frequency (MHz)				1717.5	1732.5	1747.5	L	M	H
15	QPSK	1	0	22.92	23.06	23.09	0.1180	0.1219	0.1227
15	16QAM	1	0	22.12	22.44	22.14	0.0982	0.1057	0.0986
Channel				20000	20175	20350	EIRP		
Frequency (MHz)				1715	1732.5	1750	L	M	H
10	QPSK	1	0	22.80	23.07	23.14	0.1148	0.1222	0.1242
10	16QAM	1	0	22.05	22.42	22.42	0.0966	0.1052	0.1052
Channel				19975	20175	20375	EIRP		
Frequency (MHz)				1712.5	1732.5	1752.5	L	M	H
5	QPSK	1	0	22.63	23.02	23.10	0.1104	0.1208	0.1230
5	16QAM	1	0	22.23	22.29	22.42	0.1007	0.1021	0.1052
Channel				19965	20175	20385	EIRP		
Frequency (MHz)				1711.5	1732.5	1753.5	L	M	H
3	QPSK	1	0	22.91	23.06	23.07	0.1178	0.1219	0.1222
3	16QAM	1	0	22.08	22.28	22.38	0.0973	0.1019	0.1042
Channel				19950	20175	20393	EIRP		
Frequency (MHz)				1710	1732.5	1754.3	L	M	H
1.4	QPSK	1	0	22.86	23.03	23.04	0.1164	0.1211	0.1213
1.4	16QAM	1	0	22.19	22.21	22.45	0.0998	0.1002	0.1059



LTE Band 5:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP		
							L	M	H
Channel				20450	20525	20600	ERP		
Frequency (MHz)				829	836.5	844	L	M	H
10	QPSK	1	0	22.75	22.75	23.05	0.0708	0.0708	0.0759
10	QPSK	1	25	22.67	22.70	22.95	0.0695	0.0700	0.0741
10	QPSK	1	49	22.68	22.66	22.87	0.0697	0.0693	0.0728
10	QPSK	25	0	21.75	21.73	21.96	0.0562	0.0560	0.0590
10	QPSK	25	12	21.80	21.74	21.95	0.0569	0.0561	0.0589
10	QPSK	25	25	21.80	21.73	21.92	0.0569	0.0560	0.0585
10	QPSK	50	0	21.81	21.72	21.92	0.0570	0.0558	0.0585
10	16QAM	1	0	21.89	22.07	22.47	0.0581	0.0605	0.0664
10	64QAM	1	0	20.89	20.92	21.27	0.0461	0.0465	0.0504
Channel				20425	20525	20625	ERP		
Frequency (MHz)				826.5	836.5	846.5	L	M	H
5	QPSK	1	0	22.67	22.73	23.04	0.0695	0.0705	0.0757
5	16QAM	1	0	22.06	22.05	22.46	0.0604	0.0603	0.0662
Channel				20415	20525	20635	ERP		
Frequency (MHz)				825.5	836.5	847.5	L	M	H
3	QPSK	1	0	22.71	22.65	23.03	0.0701	0.0692	0.0755
3	16QAM	1	0	21.99	21.98	22.44	0.0594	0.0593	0.0659
Channel				20407	20525	20643	ERP		
Frequency (MHz)				824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	22.70	22.64	22.99	0.0700	0.0690	0.0748
1.4	16QAM	1	0	21.92	21.95	22.28	0.0585	0.0589	0.0635



LTE Band 26:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP		
								L	M	H
Channel				26765	26865	26915	26965	ERP		
Frequency (MHz)				821.5	831.5	836.5	841.5	L	M	H
15	QPSK	1	0	22.55	22.65	22.67	23.07	0.0676	0.0692	0.0695
15	QPSK	1	37	22.45	22.51	22.66	22.69	0.0661	0.0670	0.0693
15	QPSK	1	74	22.46	22.55	22.56	22.67	0.0662	0.0676	0.0678
15	QPSK	36	0	21.45	21.52	21.69	21.83	0.0525	0.0533	0.0555
15	QPSK	36	20	21.58	21.64	21.71	21.80	0.0541	0.0548	0.0557
15	QPSK	36	39	21.50	21.50	21.63	21.73	0.0531	0.0531	0.0547
15	QPSK	75	0	21.45	21.55	21.65	21.69	0.0525	0.0537	0.0550
15	16QAM	1	0	21.87	21.99	21.98	22.48	0.0578	0.0594	0.0593
15	64QAM	1	0	21.11	21.21	20.87	21.18	0.0485	0.0497	0.0459
Channel				-	26840	26915	26990	ERP		
Frequency (MHz)				-	829	836.5	844	L	M	H
10	QPSK	1	0	-	22.50	22.55	22.87	0.0668	0.0676	0.0728
10	16QAM	1	0	-	21.83	21.80	21.98	0.0573	0.0569	0.0593
Channel				-	26815	26915	27015	ERP		
Frequency (MHz)				-	826.5	836.5	846.5	L	M	H
5	QPSK	1	0	-	22.47	22.55	22.90	0.0664	0.0676	0.0733
5	16QAM	1	0	-	21.89	21.88	22.05	0.0581	0.0579	0.0603
Channel				-	26815	26915	27025	ERP		
Frequency (MHz)				-	825.5	836.5	847.5	L	M	H
3	QPSK	1	0	-	22.65	22.57	22.89	0.0692	0.0679	0.0731
3	16QAM	1	0	-	21.96	21.94	22.03	0.0590	0.0587	0.0600
Channel				-	26797	26915	27033	ERP		
Frequency (MHz)				-	824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	-	22.21	22.30	22.49	0.0625	0.0638	0.0667
1.4	16QAM	1	0	-	21.32	21.31	21.51	0.0509	0.0508	0.0532



LTE Band 38:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP		
							L	M	H
Channel				37850	38000	38150	EIRP		
Frequency (MHz)				2580	2595	2610	L	M	H
20	QPSK	1	0	23.03	22.95	23.20	0.1211	0.1189	0.1259
20	QPSK	1	49	22.94	22.98	23.19	0.1186	0.1197	0.1256
20	QPSK	1	99	22.90	22.90	23.10	0.1175	0.1175	0.1230
20	QPSK	50	0	22.02	22.02	22.12	0.0959	0.0959	0.0982
20	QPSK	50	24	22.00	22.04	22.10	0.0955	0.0964	0.0977
20	QPSK	50	50	21.98	21.95	22.11	0.0951	0.0944	0.0979
20	QPSK	100	0	22.03	21.97	22.04	0.0962	0.0948	0.0964
20	16QAM	1	0	22.64	22.57	22.80	0.1107	0.1089	0.1148
20	64QAM	1	0	21.03	21.05	21.44	0.0764	0.0767	0.0839
Channel				37825	38000	38175	EIRP		
Frequency (MHz)				2577.5	2595	2612.5	L	M	H
15	QPSK	1	0	22.93	22.92	23.15	0.1183	0.1180	0.1245
15	16QAM	1	0	22.58	22.55	22.78	0.1091	0.1084	0.1143
Channel				37800	38000	38200	EIRP		
Frequency (MHz)				2575	2595	2615	L	M	H
10	QPSK	1	0	23.04	22.98	23.13	0.1213	0.1197	0.1239
10	16QAM	1	0	22.37	22.64	22.79	0.1040	0.1107	0.1146
Channel				37775	38000	38225	EIRP		
Frequency (MHz)				2572.5	2595	2617.5	L	M	H
5	QPSK	1	0	22.85	22.92	23.19	0.1161	0.1180	0.1256
5	16QAM	1	0	22.52	22.54	22.79	0.1076	0.1081	0.1146



LTE Band 41:




BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power High Ch. / Freq.	EIRP		
Channel				40140	40640	41140	EIRP		
Frequency (MHz)				2545	2595	2645	L	M	H
20	QPSK	1	0	23.15	23.01	23.21	0.1245	0.1205	0.1262
20	QPSK	1	49	23.11	23.08	22.97	0.1233	0.1225	0.1194
20	QPSK	1	99	23.07	22.93	22.98	0.1222	0.1183	0.1197
20	QPSK	50	0	22.25	22.14	22.26	0.1012	0.0986	0.1014
20	QPSK	50	24	22.16	22.03	22.10	0.0991	0.0962	0.0977
20	QPSK	50	50	22.11	22.13	22.14	0.0979	0.0984	0.0986
20	QPSK	100	0	22.11	22.12	22.13	0.0979	0.0982	0.0984
20	16QAM	1	0	22.84	22.77	22.63	0.1159	0.1140	0.1104
20	64QAM	1	0	20.39	20.34	20.28	0.0659	0.0652	0.0643
Channel				40115	40640	41165	EIRP		
Frequency (MHz)				2542.5	2595	2647.5	L	M	H
15	QPSK	1	0	23.17	23.16	23.10	0.1250	0.1247	0.1230
15	16QAM	1	0	22.84	22.72	22.71	0.1159	0.1127	0.1125
Channel				40090	40640	41190	EIRP		
Frequency (MHz)				2540	2595	2650	L	M	H
10	QPSK	1	0	23.17	23.18	23.05	0.1250	0.1253	0.1216
10	16QAM	1	0	22.79	22.65	22.66	0.1146	0.1109	0.1112
Channel				40065	40640	41215	EIRP		
Frequency (MHz)				2537.5	2595	2652.5	L	M	H
5	QPSK	1	0	23.12	23.10	23.07	0.1236	0.1230	0.1222
5	16QAM	1	0	22.76	22.72	22.67	0.1138	0.1127	0.1114



LTE Band 2

Peak-to-Average Ratio


Mode	LTE Band 2 / 20MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.41	5.77	5.74	PASS

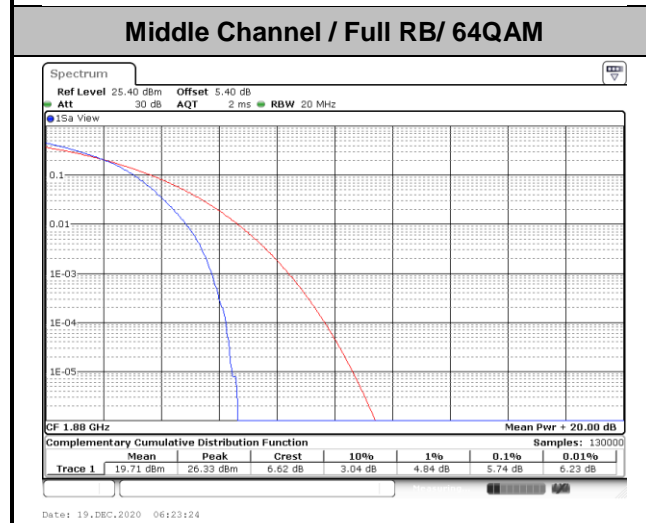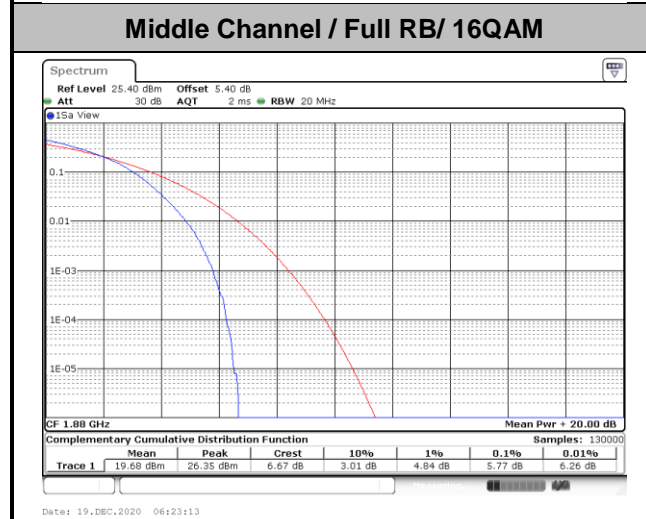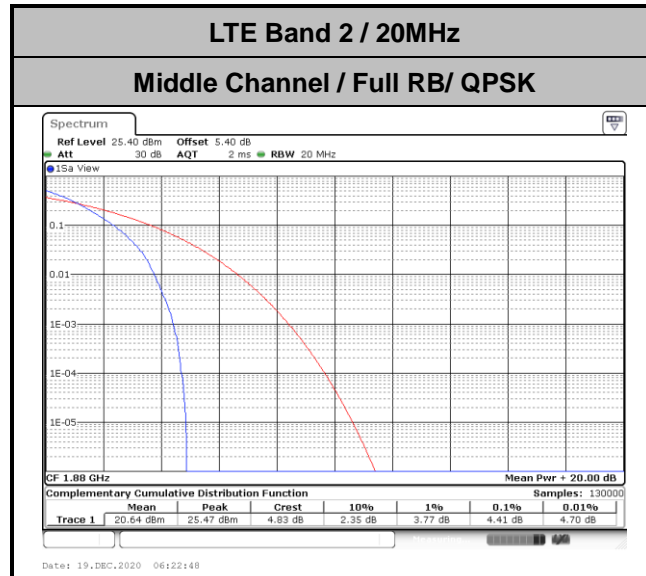



26dB Bandwidth


Mode	LTE Band 2 : 26dB BW(MHz)	
BW	20MHz	
Mod.	QPSK	16QAM
Middle CH	20.3	20.22

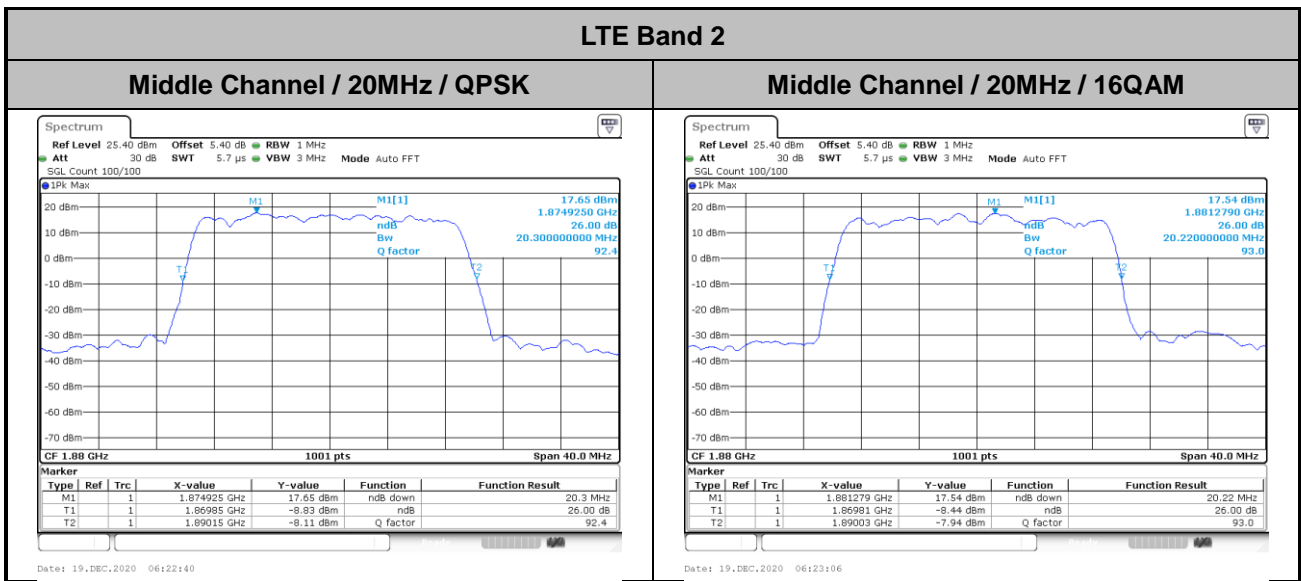




Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)	
BW	20MHz	
Mod.	QPSK	16QAM
Middle CH	18.42	18.14

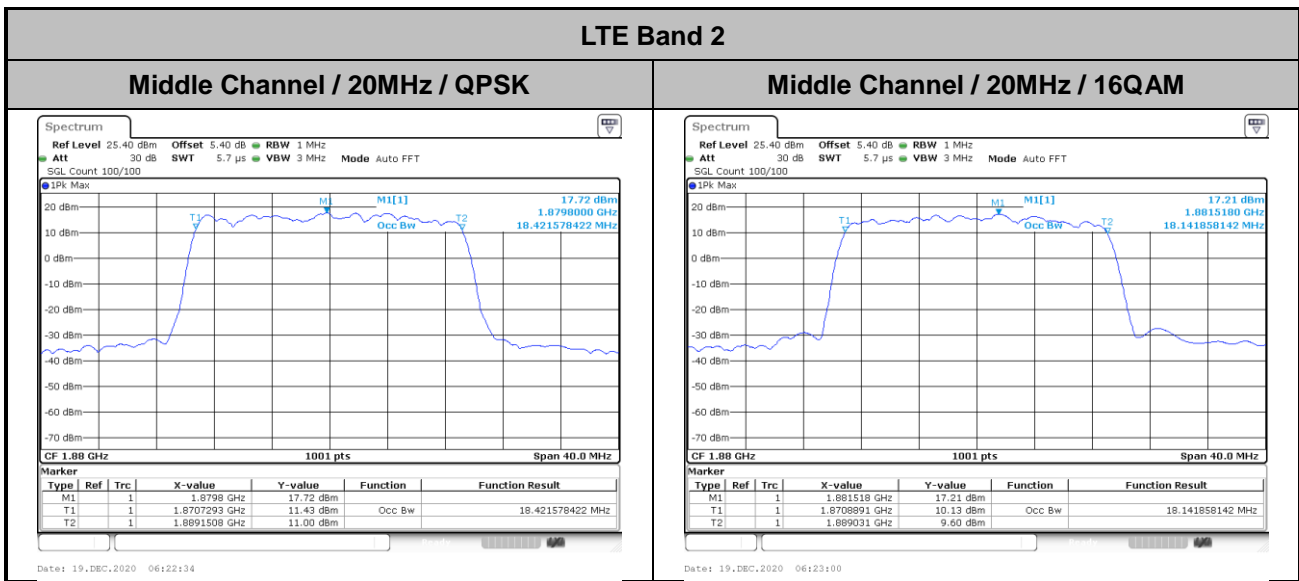




Conducted Band Edge

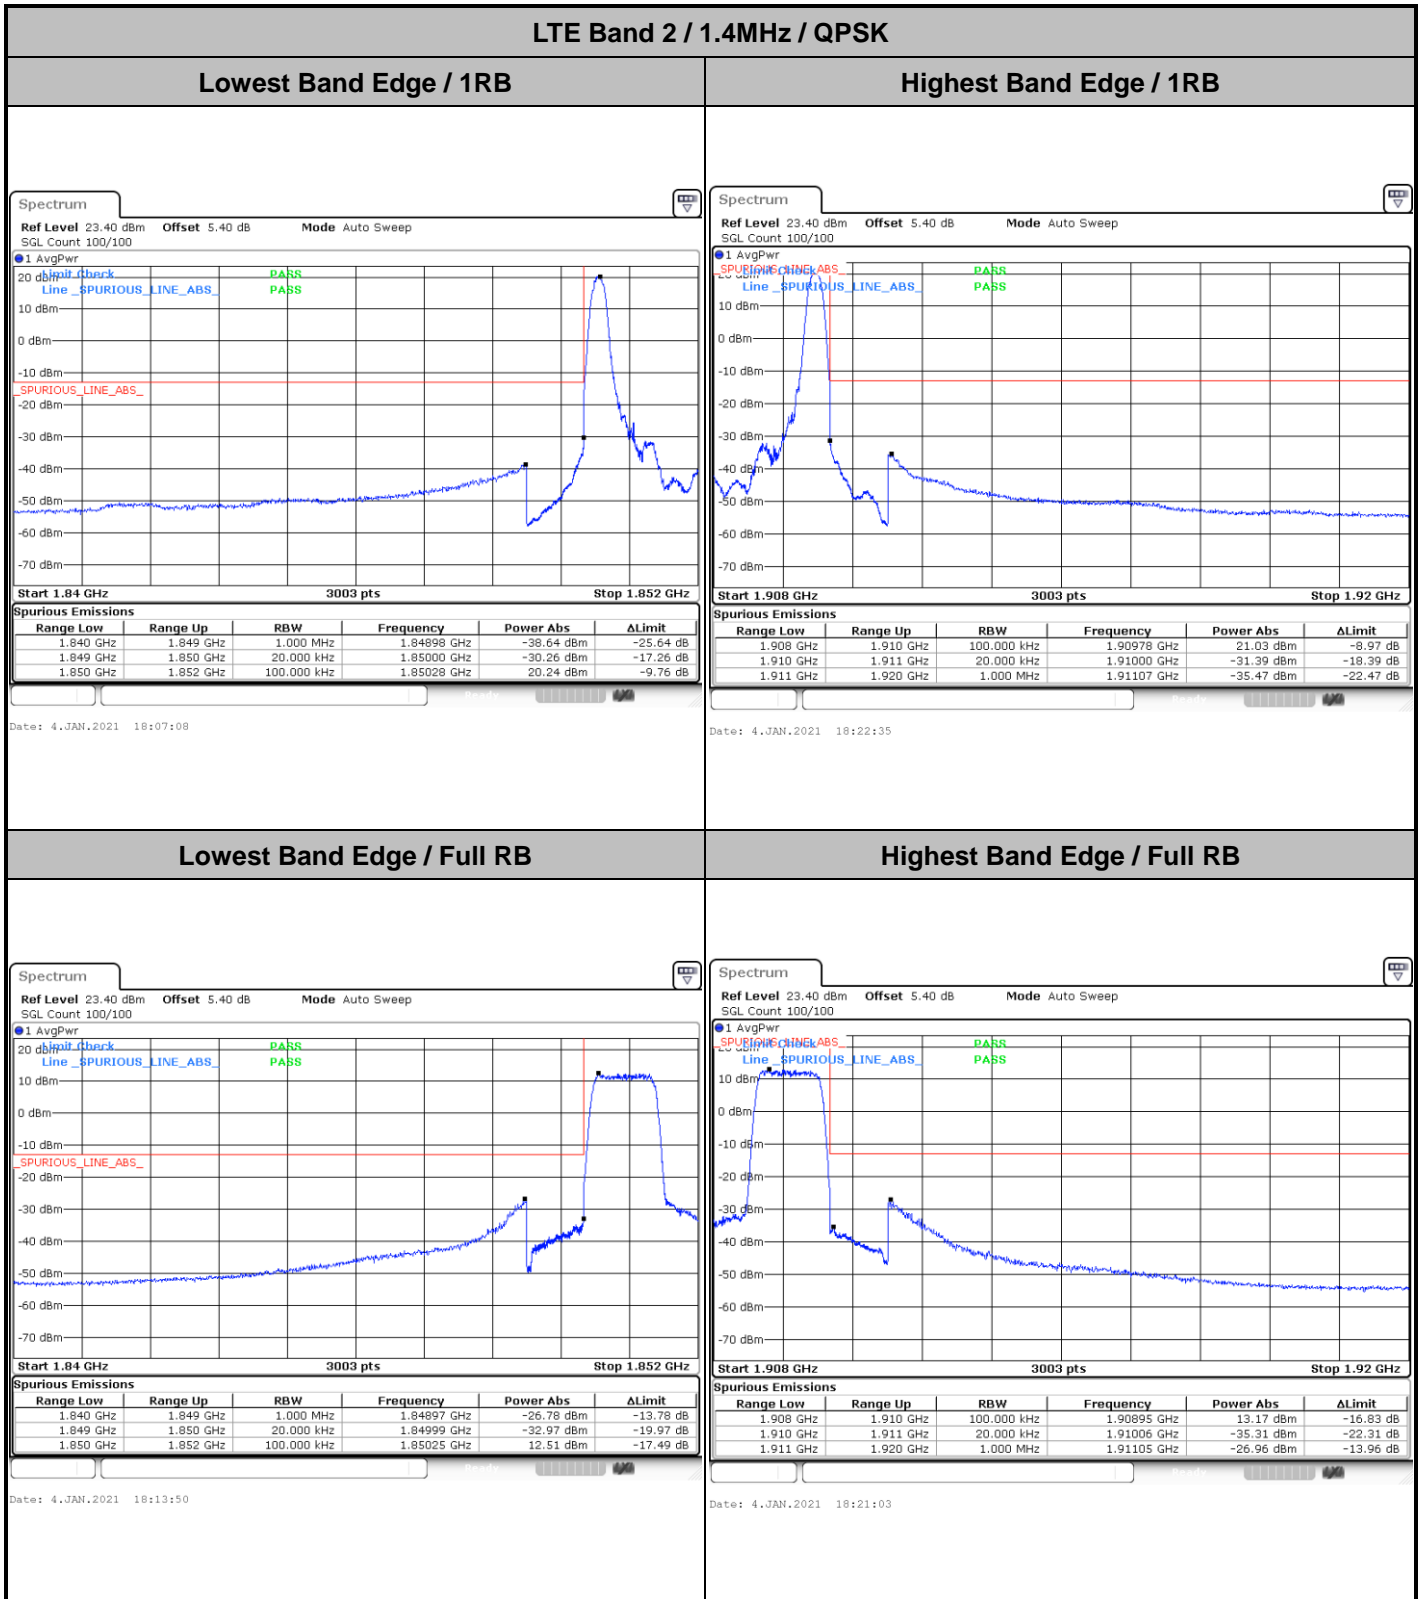




LTE Band 2 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

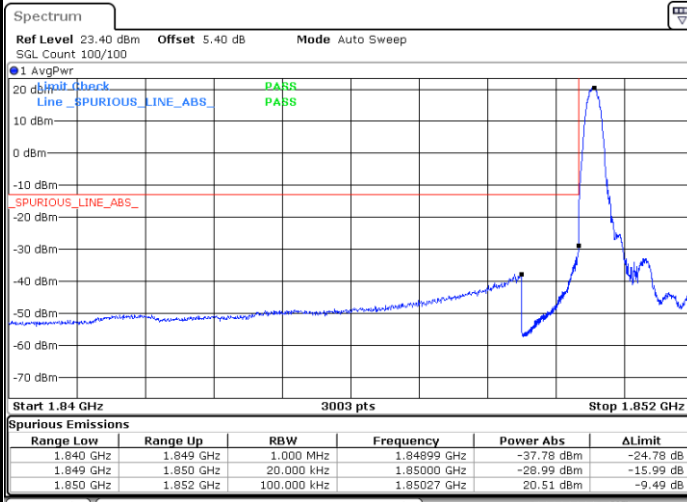


Date: 4.JAN.2021 18:09:05

Highest Band Edge / 1 RB

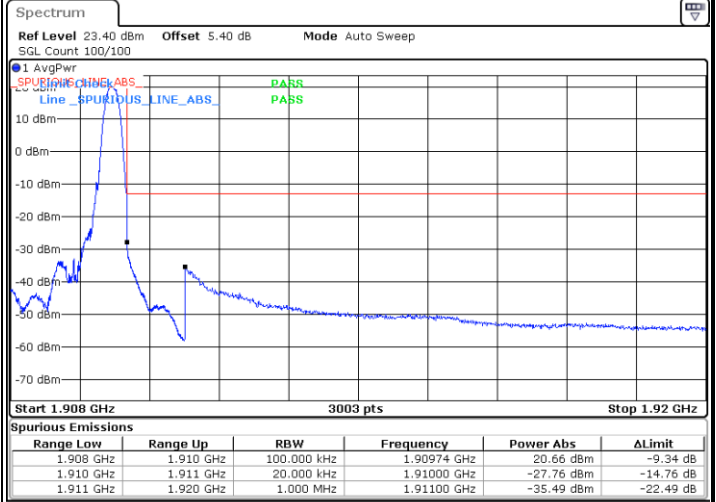


Date: 4.JAN.2021 18:23:58

Lowest Band Edge / Full RB

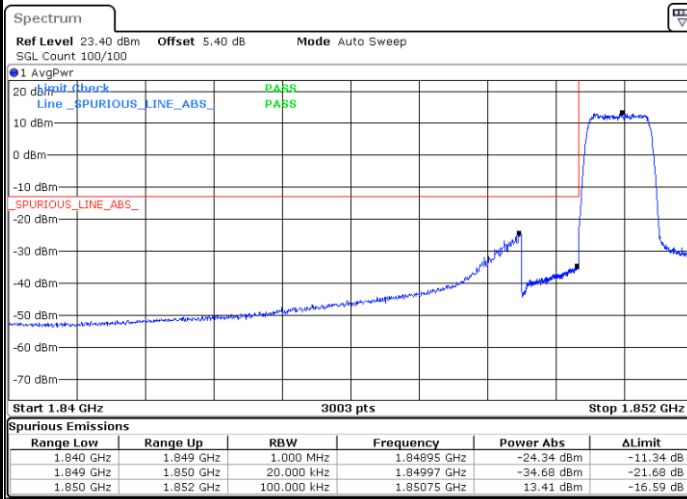

Date: 4.JAN.2021 18:15:28

Highest Band Edge / Full RB

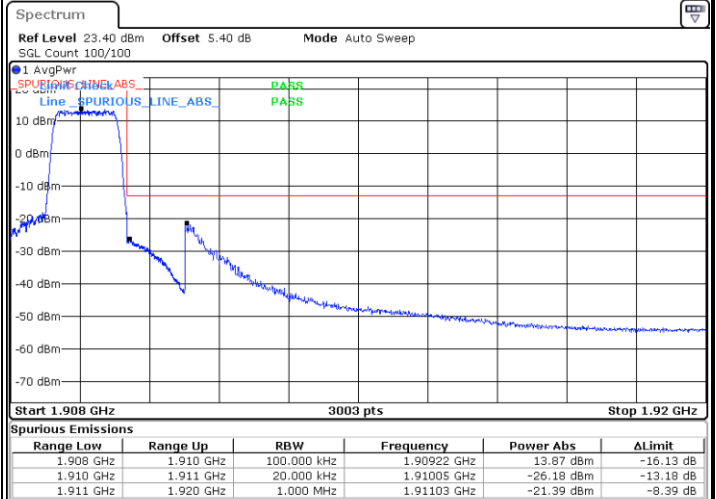


Date: 4.JAN.2021 18:19:50




LTE Band 2 / 1.4MHz / 64QAM

Lowest Band Edge / 1 RB

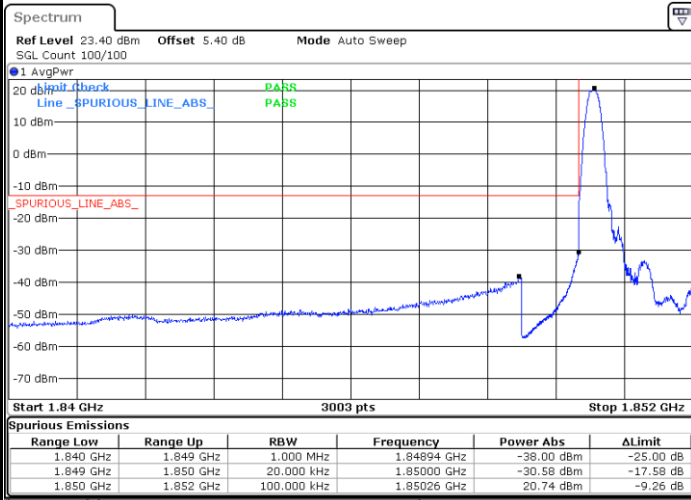


Date: 4.JAN.2021 18:10:25

Highest Band Edge / 1 RB

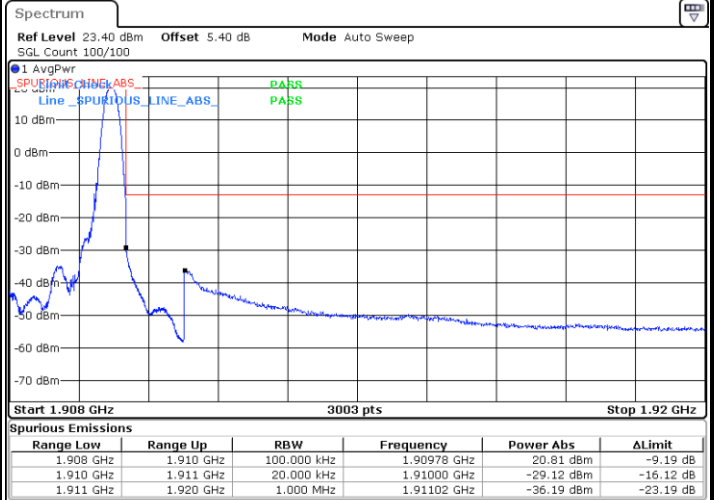


Date: 4.JAN.2021 18:25:11

Lowest Band Edge / Full RB

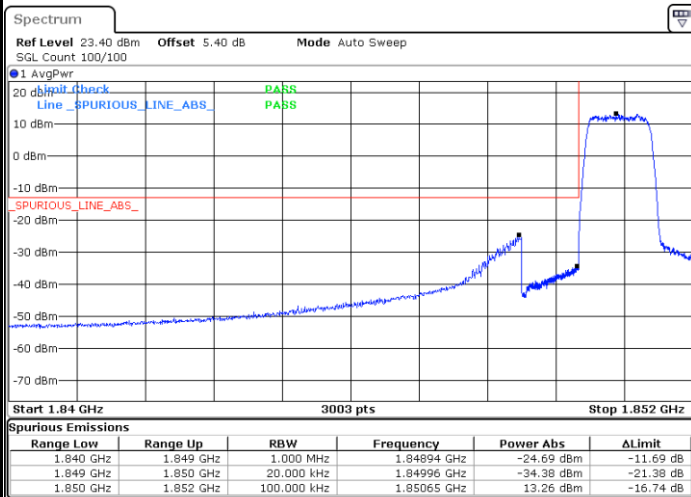

Date: 4.JAN.2021 18:16:41

Highest Band Edge / Full RB

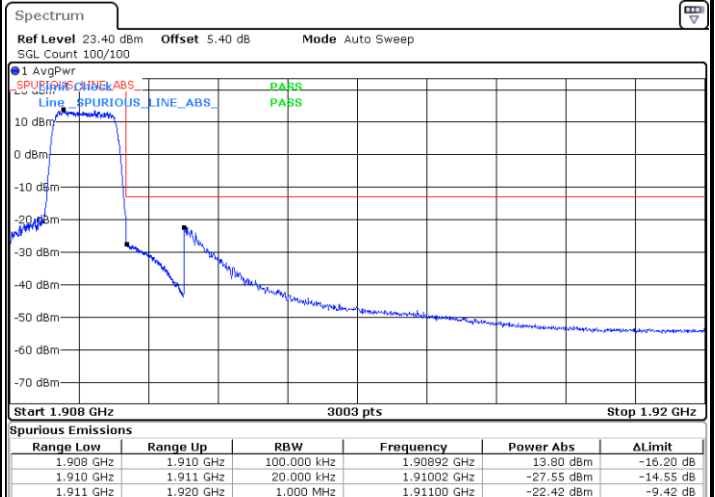


Date: 4.JAN.2021 18:18:23




LTE Band 2 / 3MHz / QPSK

Lowest Band Edge / 1RB

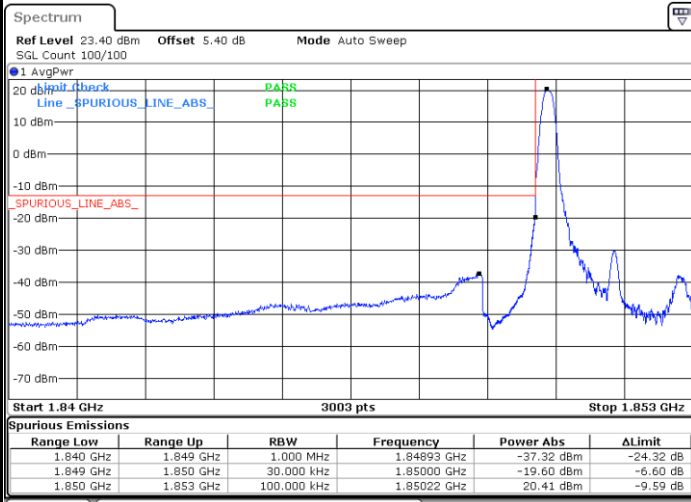


Date: 4.JAN.2021 18:44:48

Highest Band Edge / 1 RB

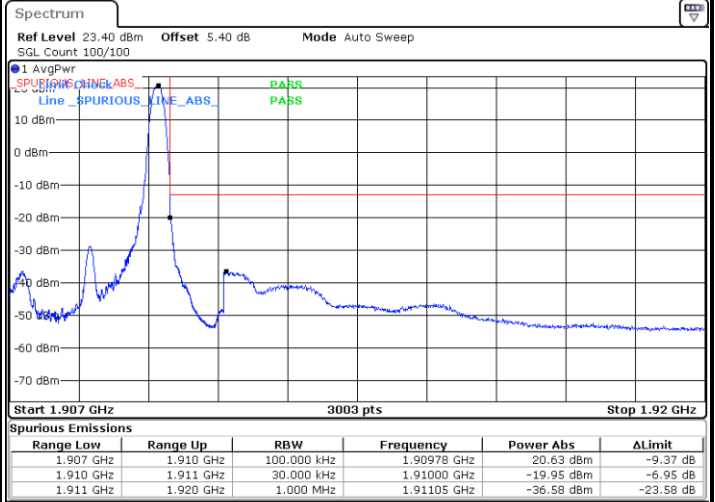


Date: 4.JAN.2021 18:31:50

Lowest Band Edge / Full RB

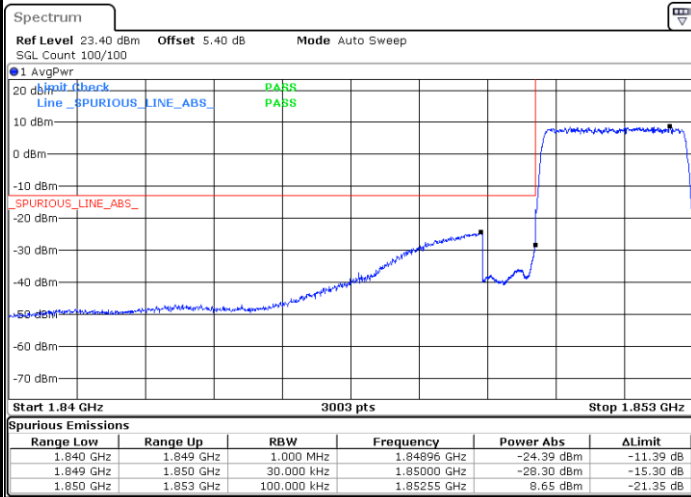

Date: 4.JAN.2021 18:38:39

Highest Band Edge / Full RB

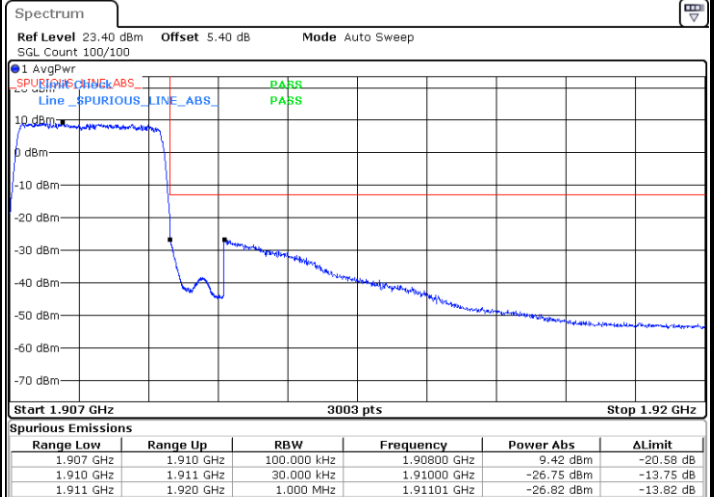


Date: 4.JAN.2021 18:32:52




LTE Band 2 / 3MHz / 16QAM

Lowest Band Edge / 1 RB

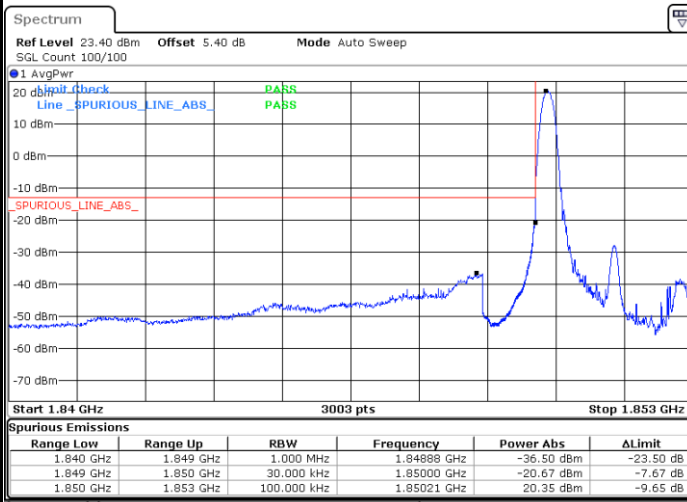


Date: 4.JAN.2021 18:44:05

Highest Band Edge / 1 RB

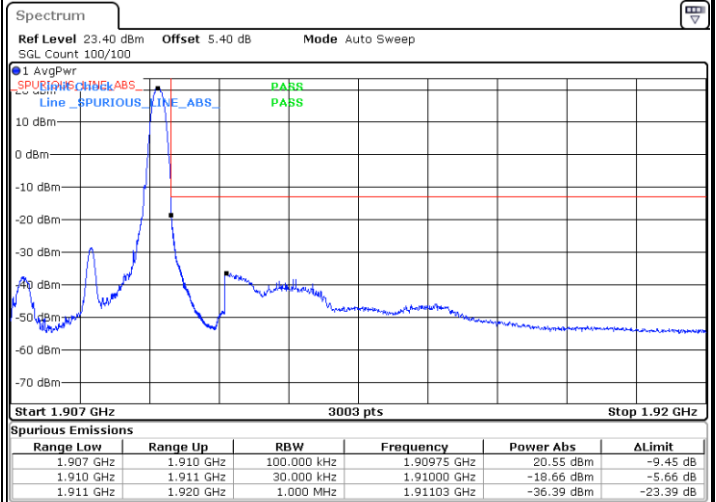


Date: 4.JAN.2021 18:30:55

Lowest Band Edge / Full RB

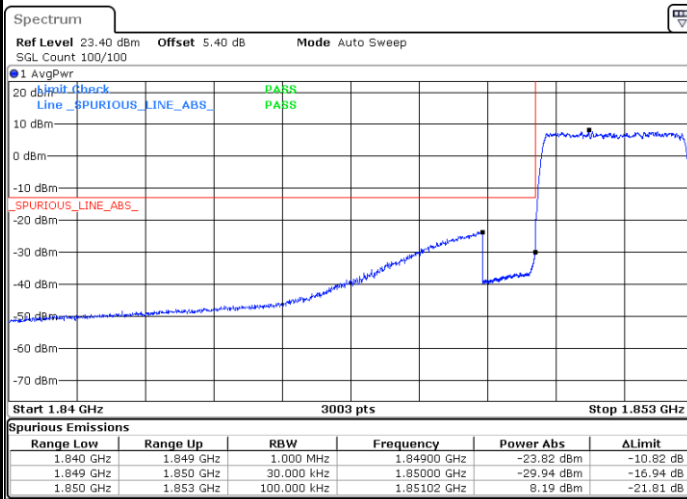

Date: 4.JAN.2021 18:37:56

Highest Band Edge / Full RB

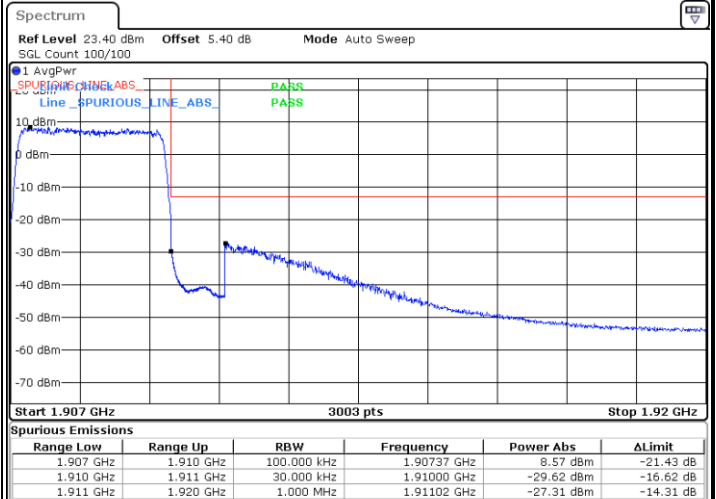


Date: 4.JAN.2021 18:33:36




LTE Band 2 / 3MHz / 64QAM

Lowest Band Edge / 1 RB

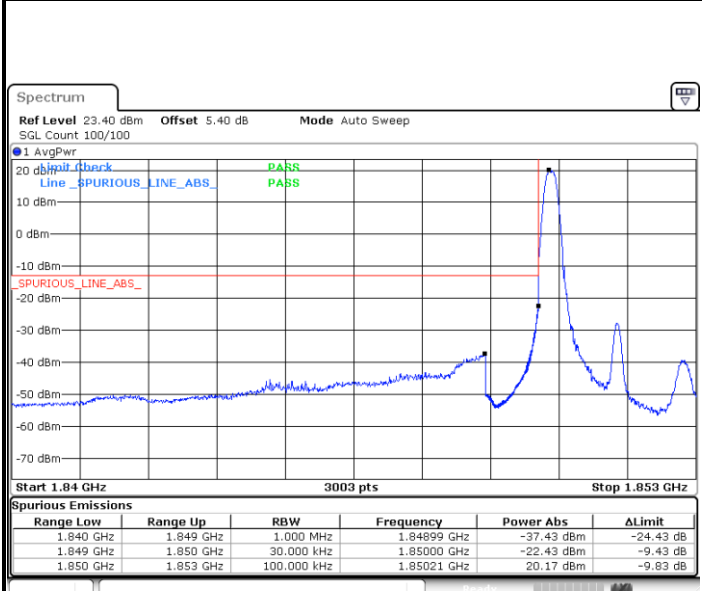


Date: 4.JAN.2021 18:43:13

Highest Band Edge / 1 RB

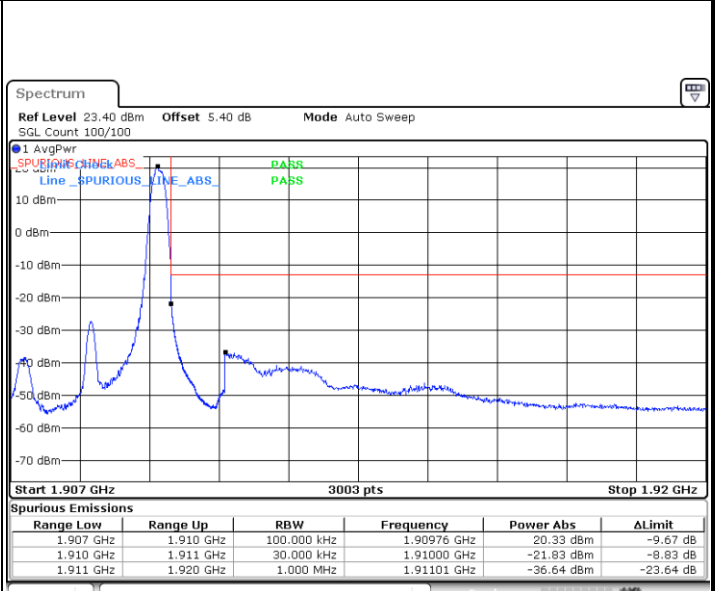


Date: 4.JAN.2021 18:29:46

Lowest Band Edge / Full RB

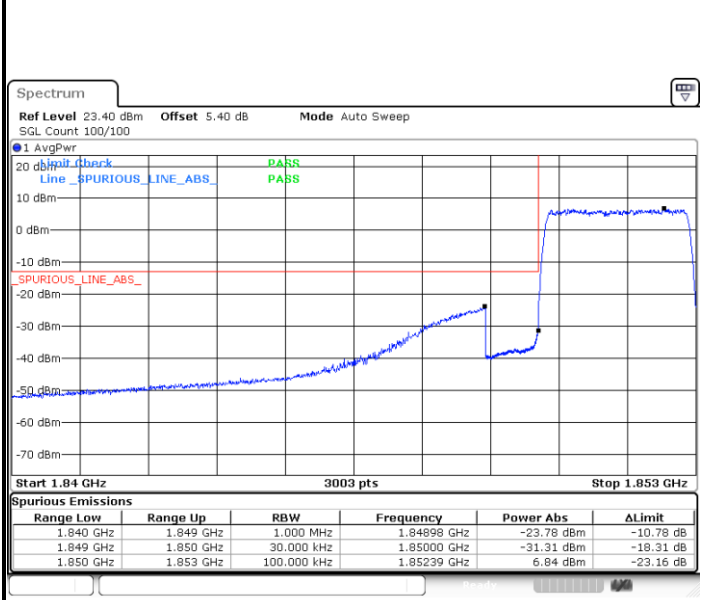

Date: 4.JAN.2021 18:37:05

Highest Band Edge / Full RB

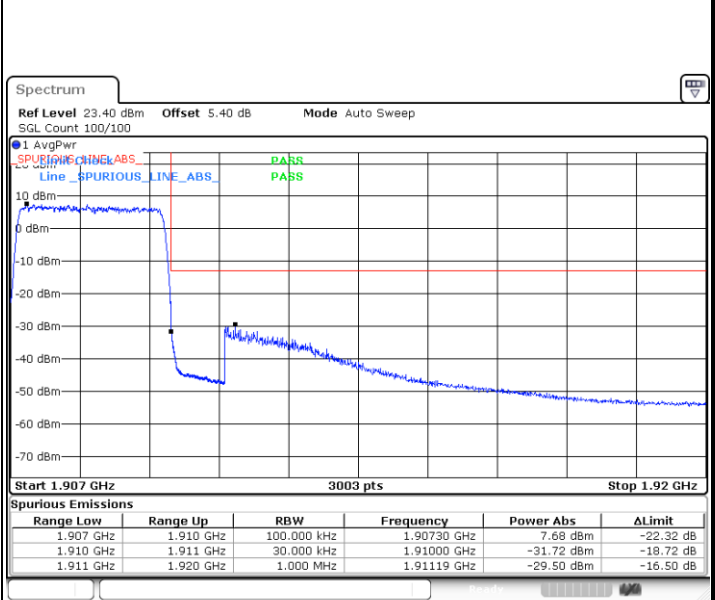


Date: 4.JAN.2021 18:34:48




LTE Band 2 / 5MHz / QPSK

Lowest Band Edge / 1 RB

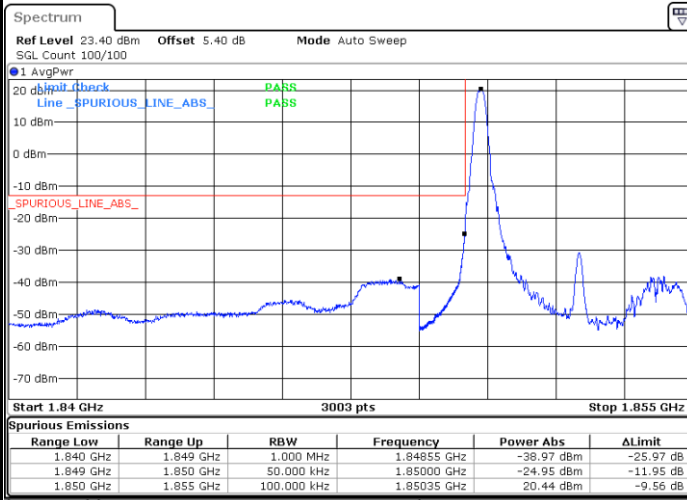


Date: 4.JAN.2021 18:49:09

Highest Band Edge / 1 RB

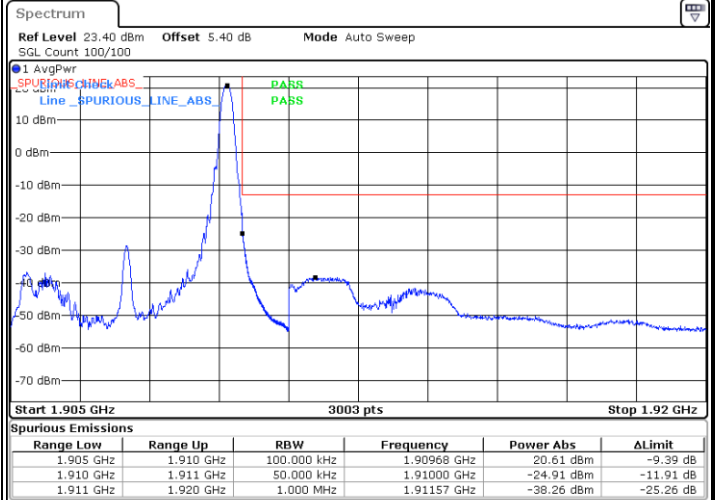

Date: 4.JAN.2021 18:57:31

Lowest Band Edge / Full RB

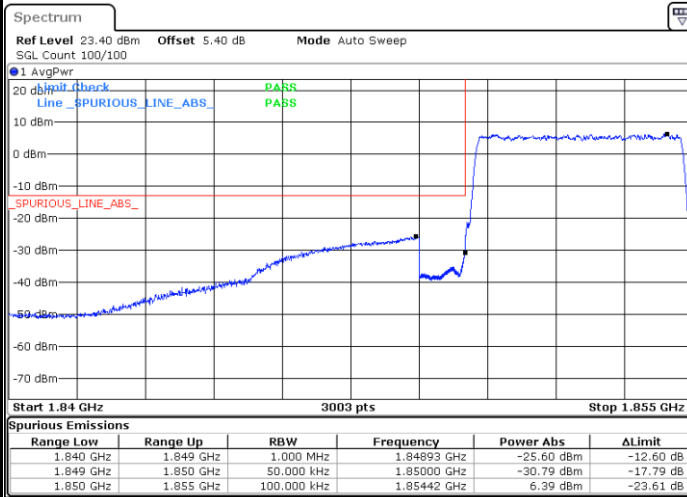

Date: 4.JAN.2021 18:53:53

Highest Band Edge / Full RB




Date: 4.JAN.2021 18:54:44




LTE Band 2 / 5MHz / 16QAM

Lowest Band Edge / 1RB

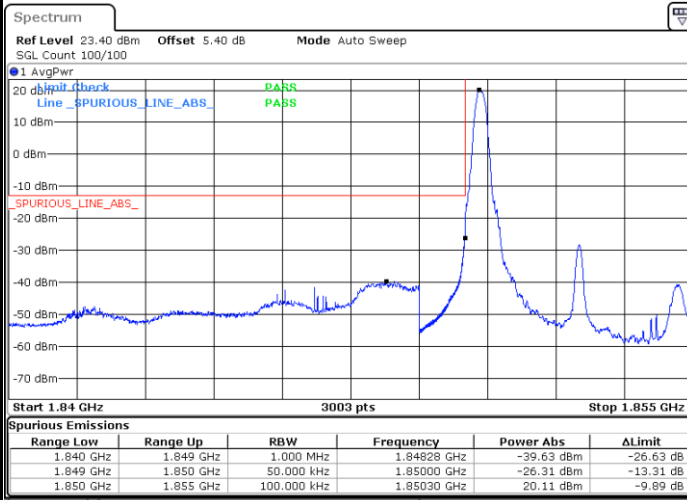


Date: 4.JAN.2021 18:50:10

Highest Band Edge / 1 RB

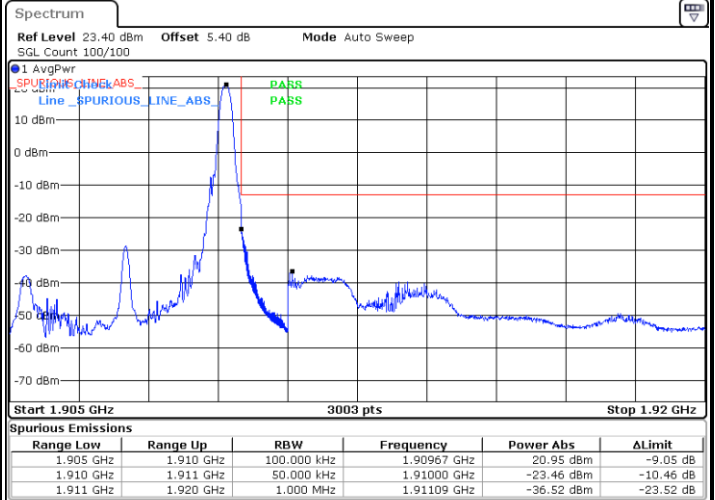


Date: 4.JAN.2021 18:57:03

Lowest Band Edge / Full RB

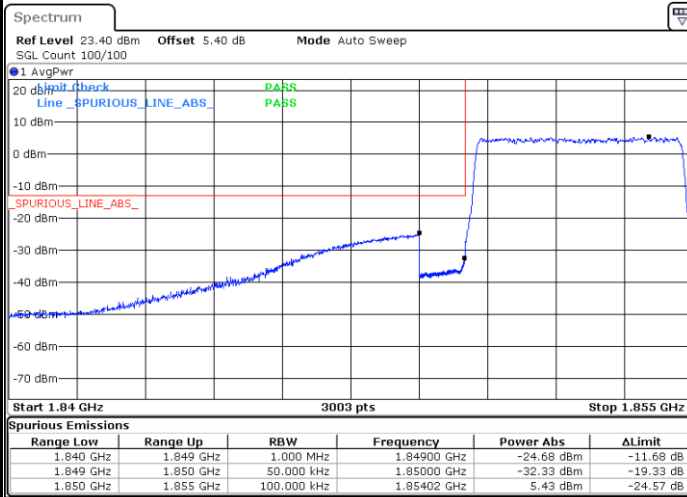

Date: 4.JAN.2021 18:53:21

Highest Band Edge / Full RB

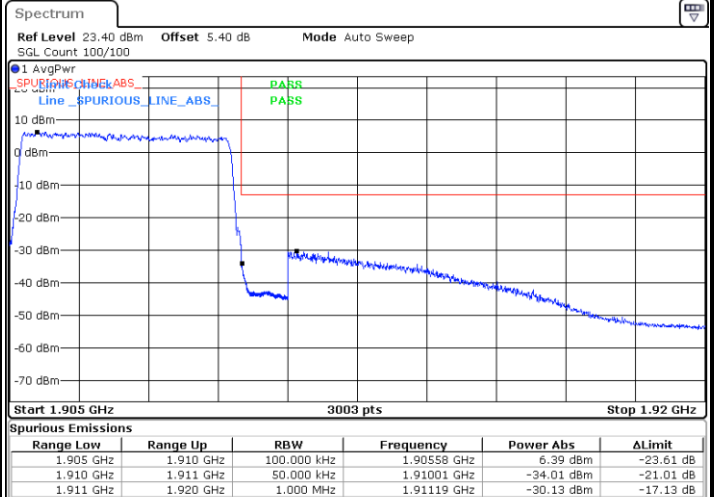


Date: 4.JAN.2021 18:55:12




LTE Band 2 / 5MHz / 64QAM

Lowest Band Edge / 1RB

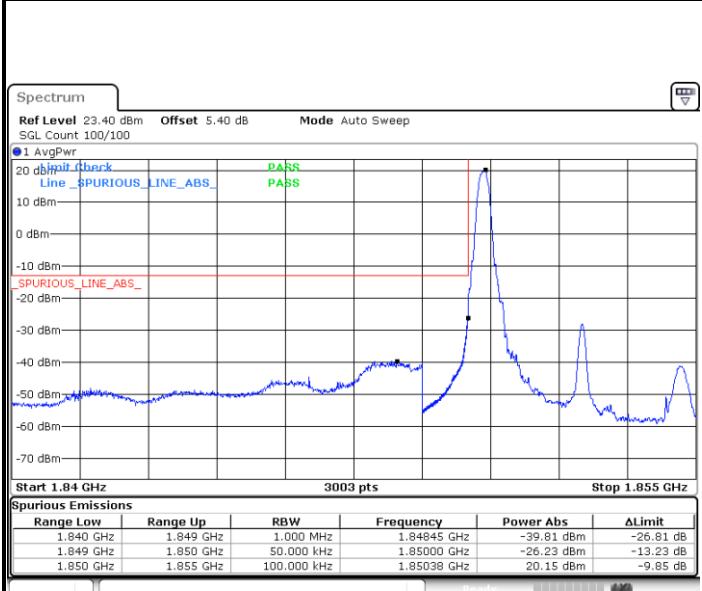


Date: 4.JAN.2021 18:51:43

Highest Band Edge / 1 RB

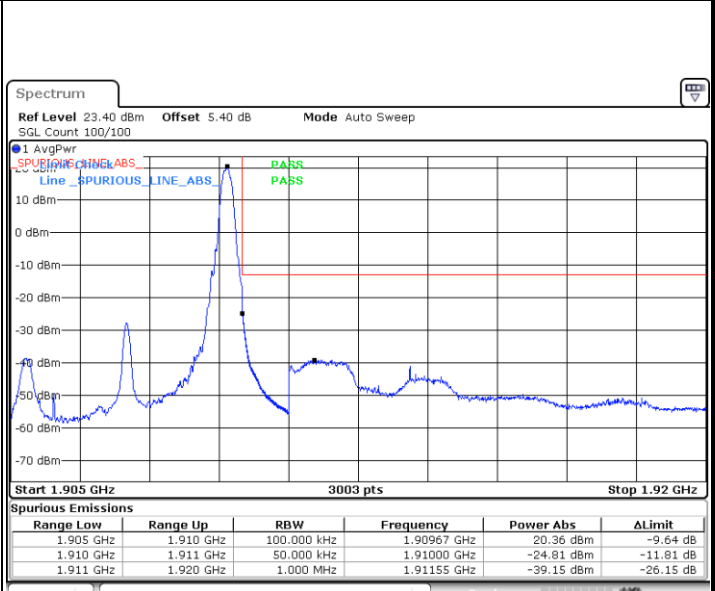


Date: 4.JAN.2021 18:56:30

Lowest Band Edge / Full RB

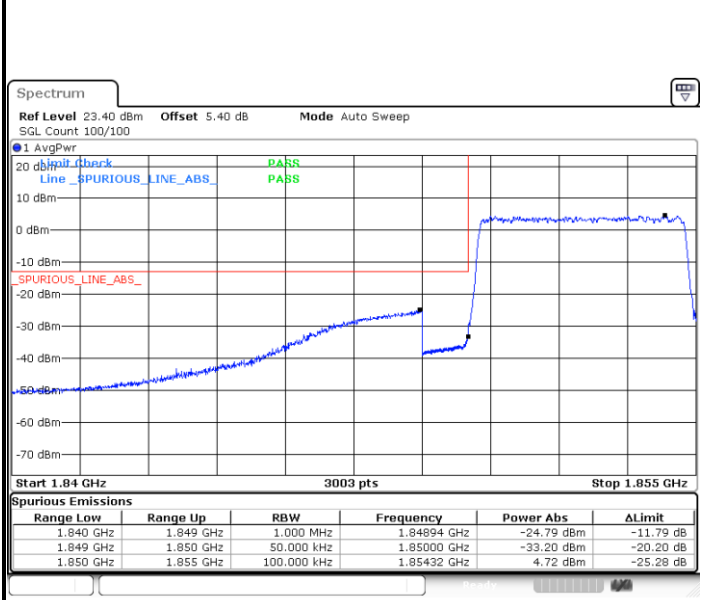

Date: 4.JAN.2021 18:52:37

Highest Band Edge / Full RB

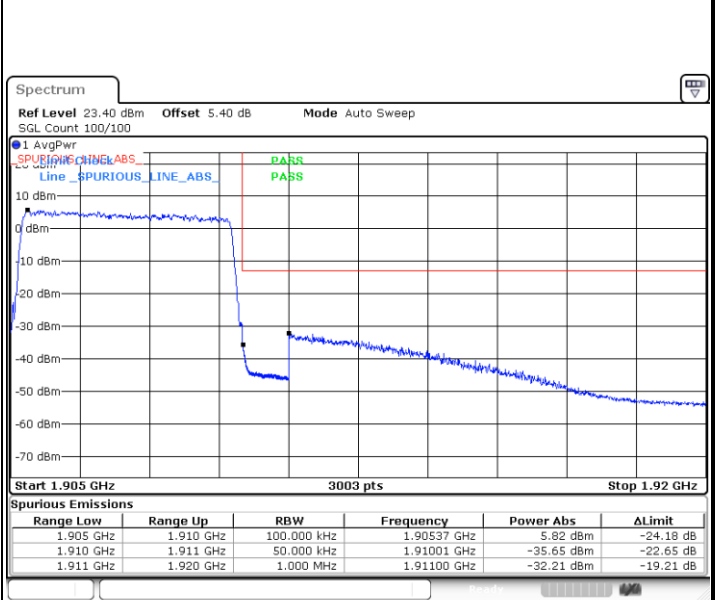


Date: 4.JAN.2021 18:55:47




LTE Band 2 / 10MHz / QPSK

Lowest Band Edge / 1 RB

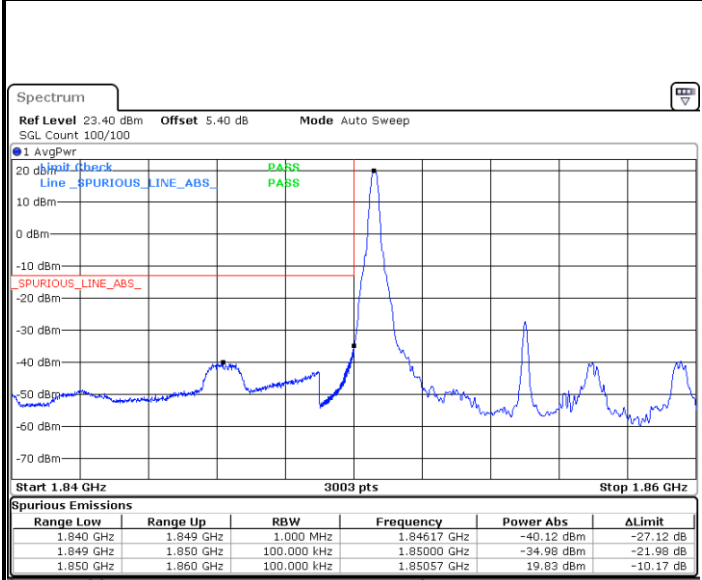


Date: 4.JAN.2021 19:06:21

Highest Band Edge / 1 RB

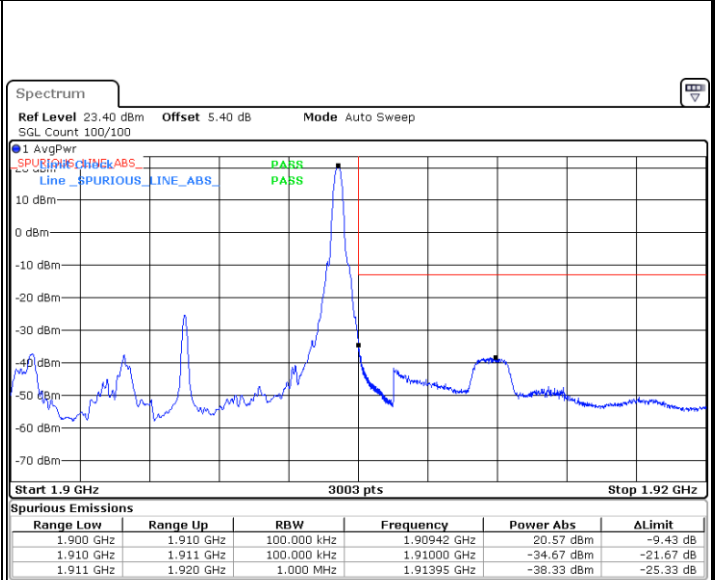


Date: 4.JAN.2021 19:00:29

Lowest Band Edge / Full RB

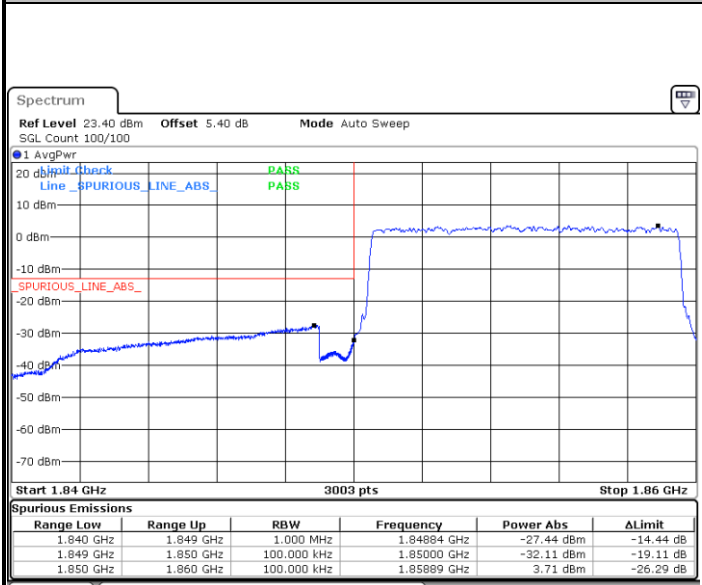

Date: 4.JAN.2021 19:04:21

Highest Band Edge / Full RB

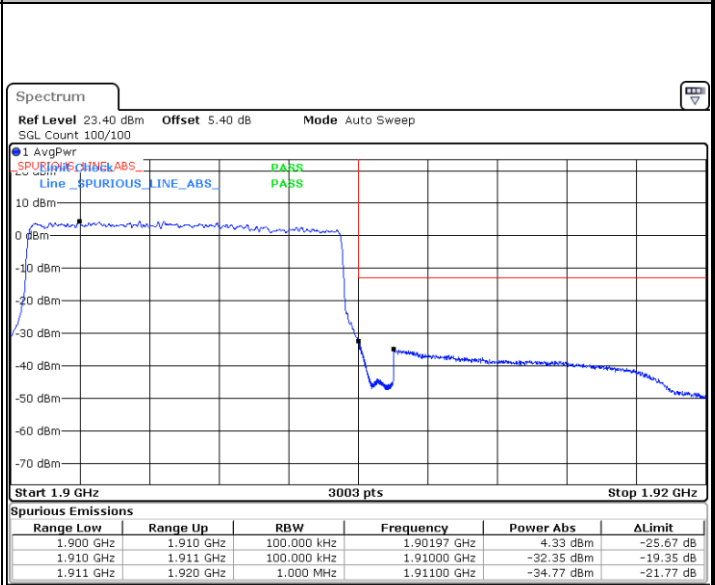


Date: 4.JAN.2021 19:02:54




LTE Band 2 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

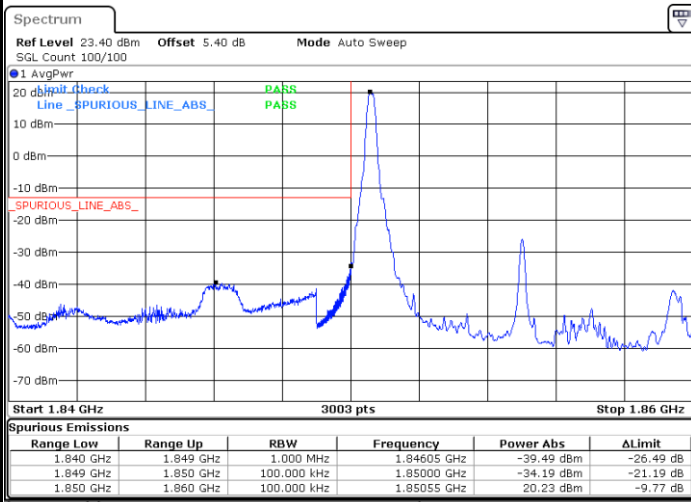


Date: 4.JAN.2021 19:05:55

Highest Band Edge / 1 RB

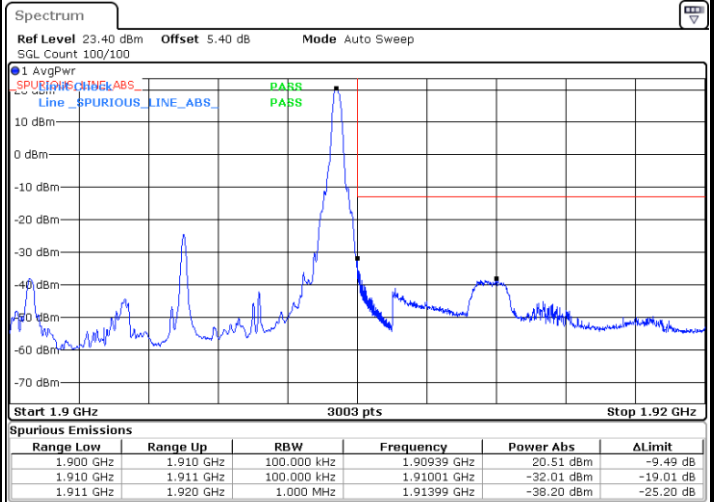


Date: 4.JAN.2021 19:00:50

Lowest Band Edge / Full RB

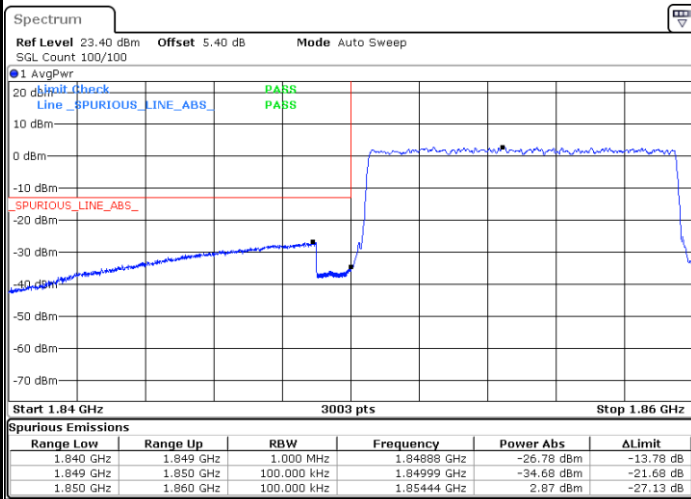

Date: 4.JAN.2021 19:04:01

Highest Band Edge / Full RB

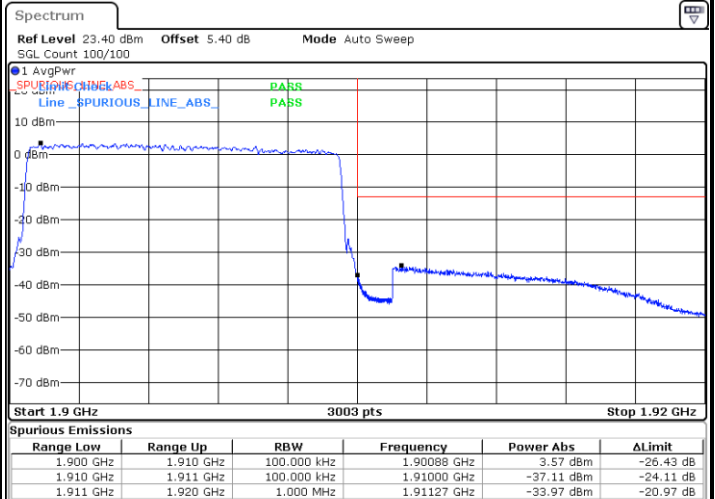


Date: 4.JAN.2021 19:02:29




LTE Band 2 / 10MHz / 64QAM

Lowest Band Edge / 1 RB

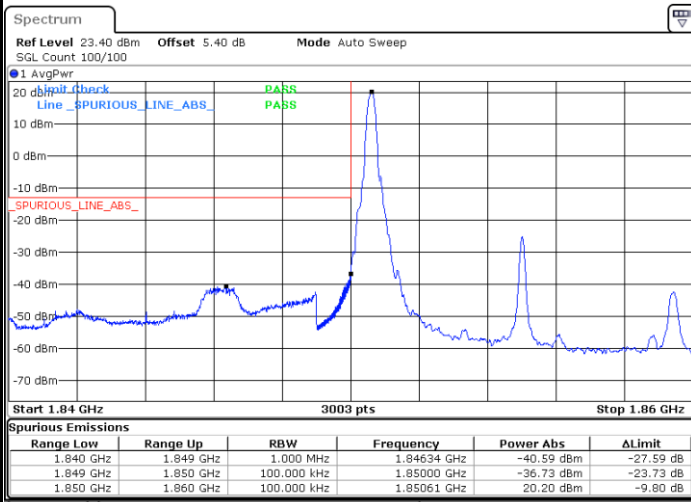


Date: 4.JAN.2021 19:05:34

Highest Band Edge / 1 RB

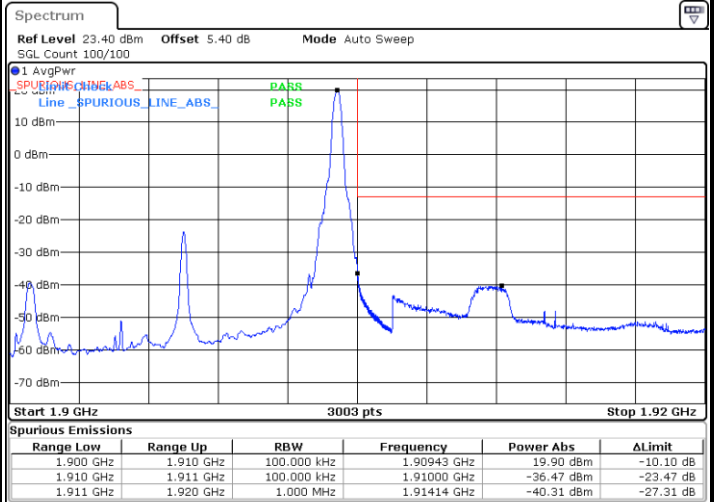


Date: 4.JAN.2021 19:01:15

Lowest Band Edge / Full RB

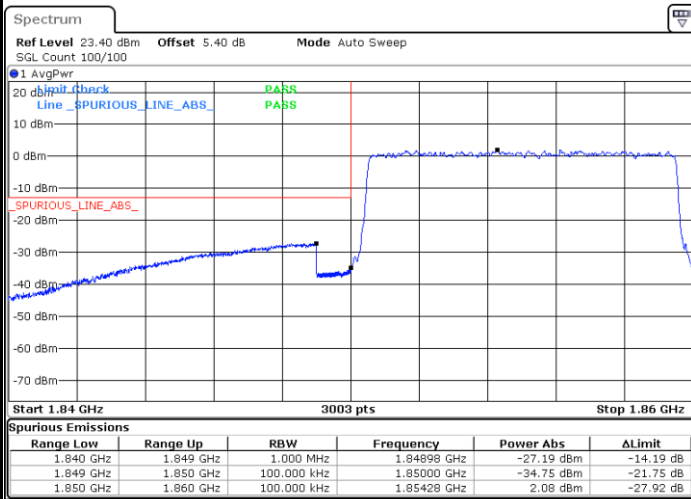

Date: 4.JAN.2021 19:05:03

Highest Band Edge / Full RB

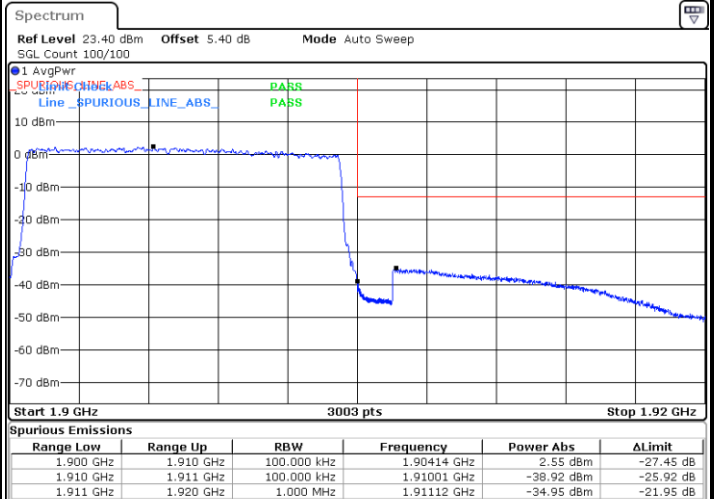


Date: 4.JAN.2021 19:02:09




LTE Band 2 / 15MHz / QPSK

Lowest Band Edge / 1 RB

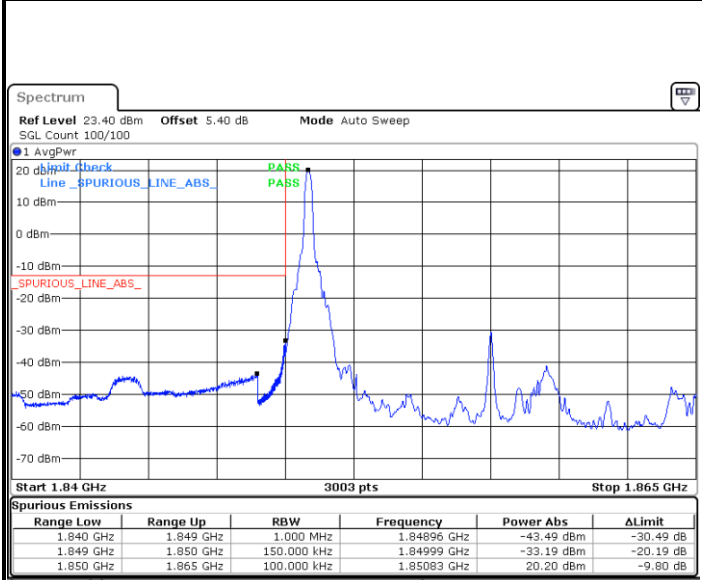


Date: 4.JAN.2021 19:10:23

Highest Band Edge / 1 RB

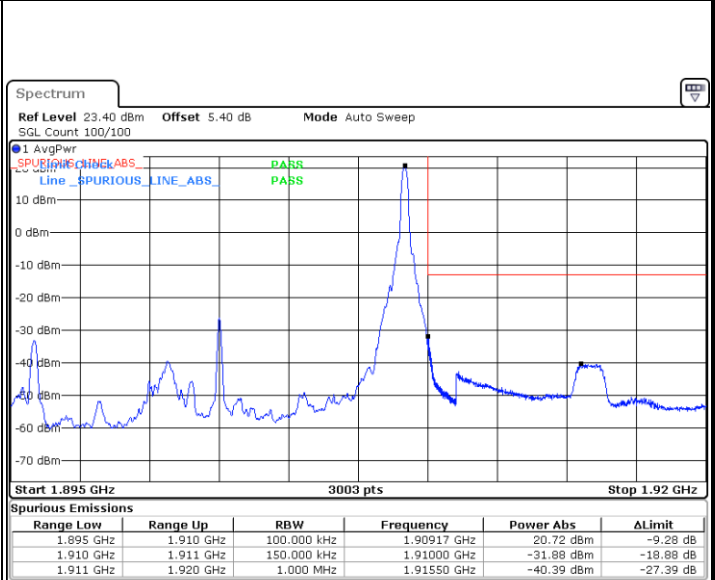


Date: 4.JAN.2021 19:15:25

Lowest Band Edge / Full RB

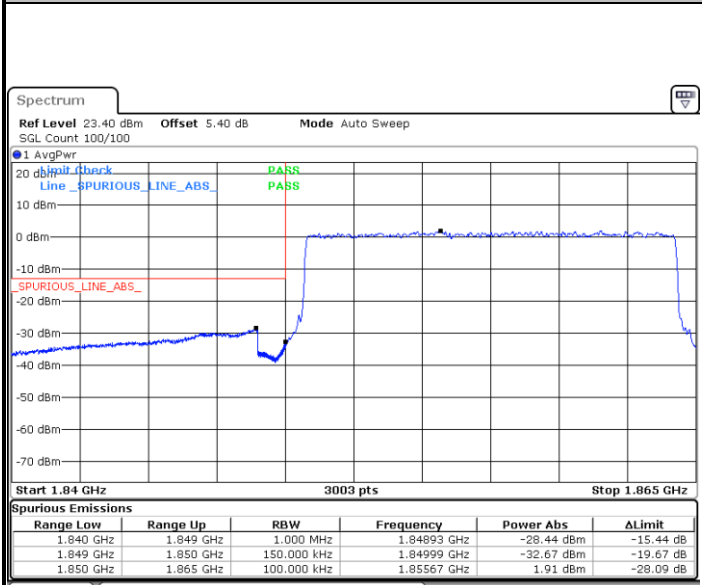

Date: 4.JAN.2021 19:12:28

Highest Band Edge / Full RB

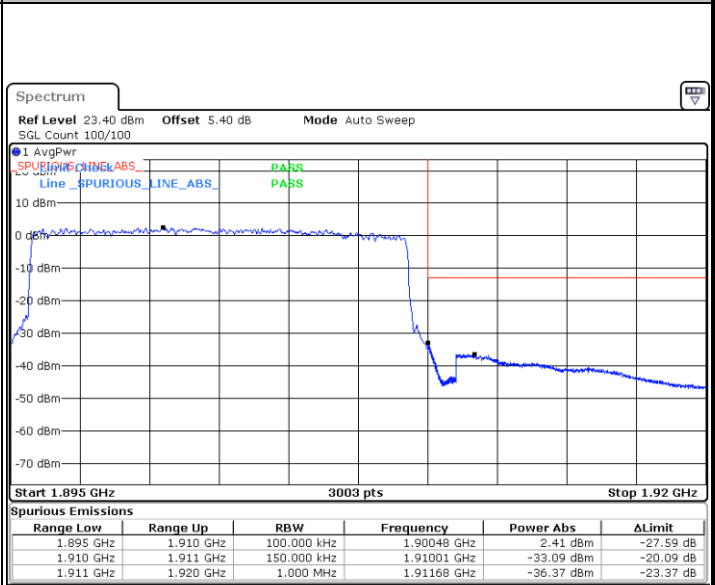


Date: 4.JAN.2021 19:13:28




LTE Band 2 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

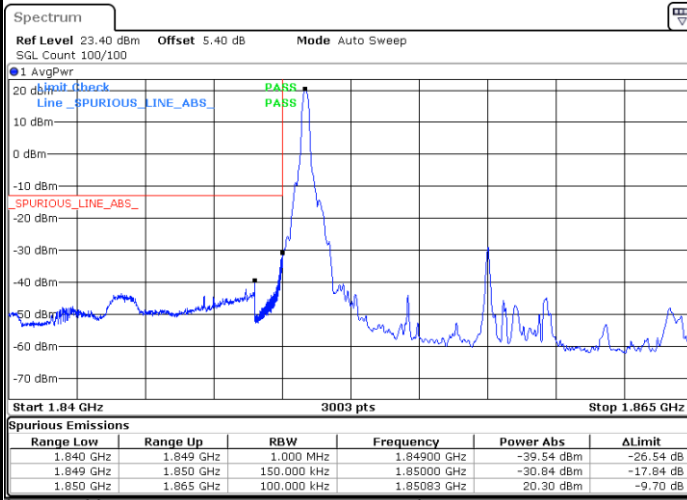


Date: 4.JAN.2021 19:10:42

Highest Band Edge / 1 RB

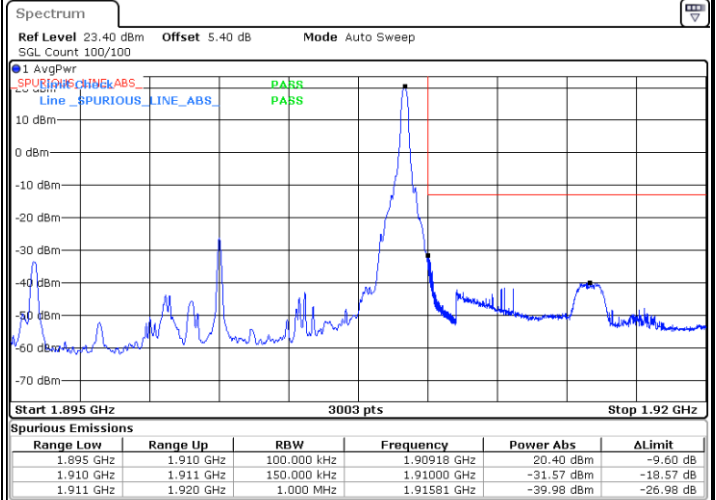


Date: 4.JAN.2021 19:15:07

Lowest Band Edge / Full RB

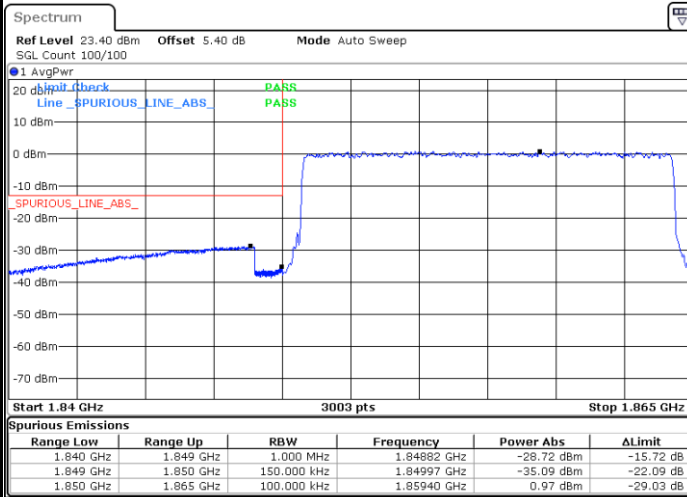

Date: 4.JAN.2021 19:12:07

Highest Band Edge / Full RB

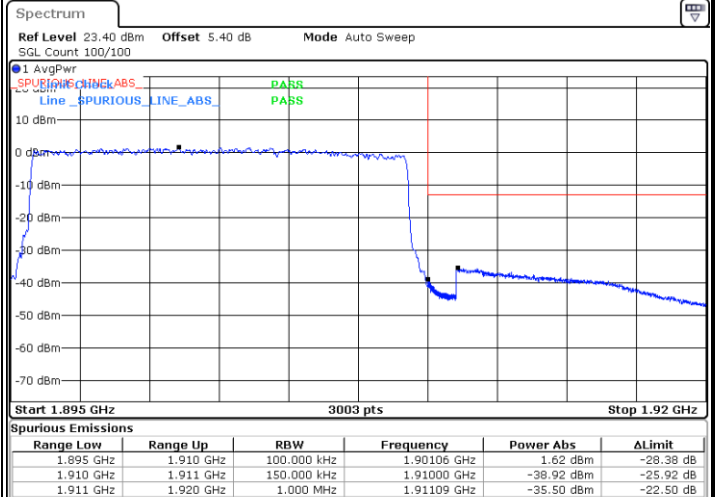


Date: 4.JAN.2021 19:13:47




LTE Band 2 / 15MHz / 64QAM

Lowest Band Edge / 1 RB

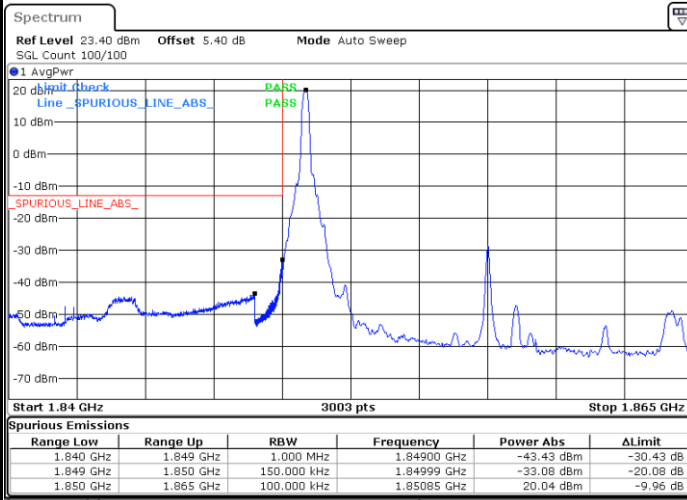


Date: 4.JAN.2021 19:11:07

Highest Band Edge / 1 RB

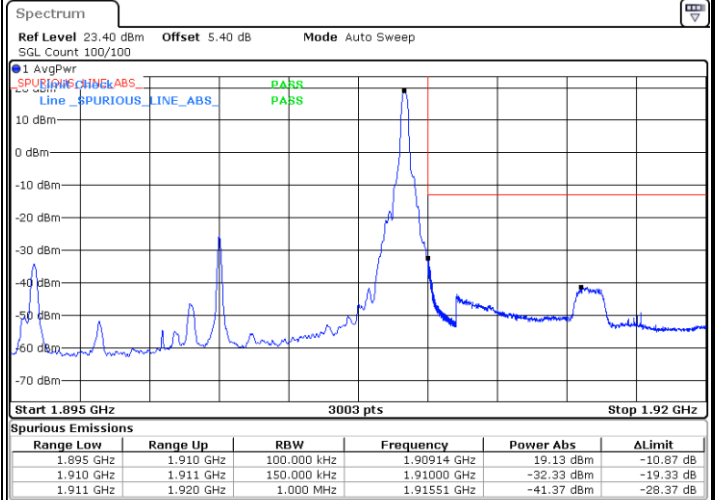


Date: 4.JAN.2021 19:14:45

Lowest Band Edge / Full RB

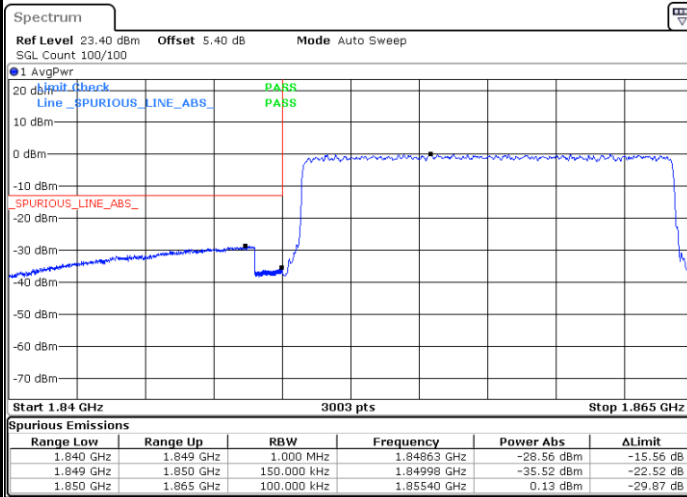

Date: 4.JAN.2021 19:11:37

Highest Band Edge / Full RB

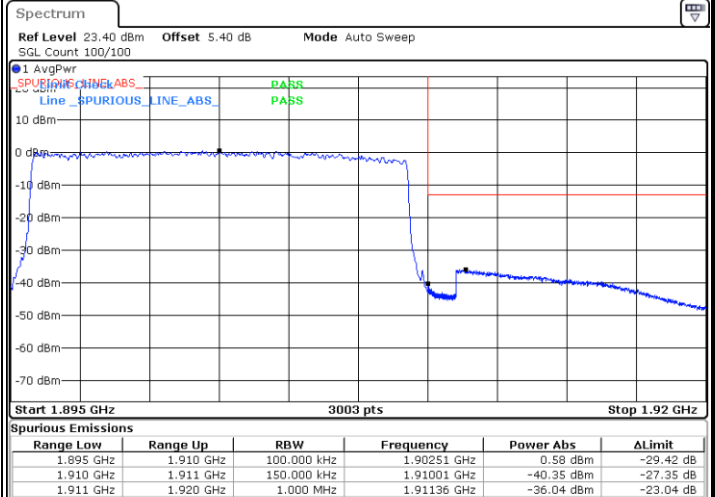


Date: 4.JAN.2021 19:14:14




LTE Band 2 / 20MHz / QPSK

Lowest Band Edge / 1 RB

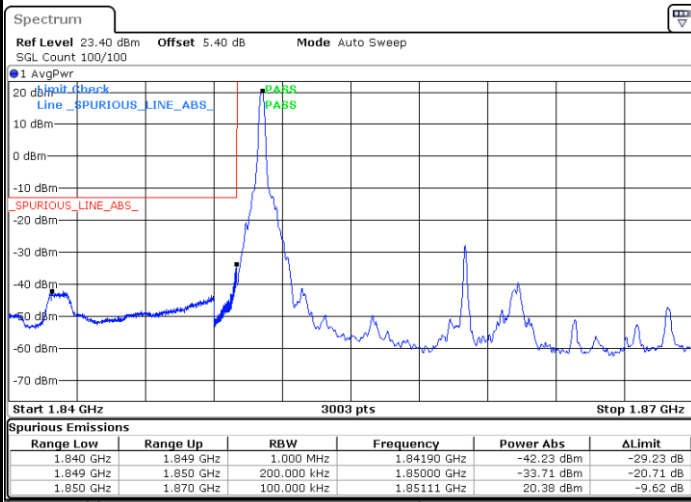


Date: 4.JAN.2021 19:23:31

Highest Band Edge / 1 RB

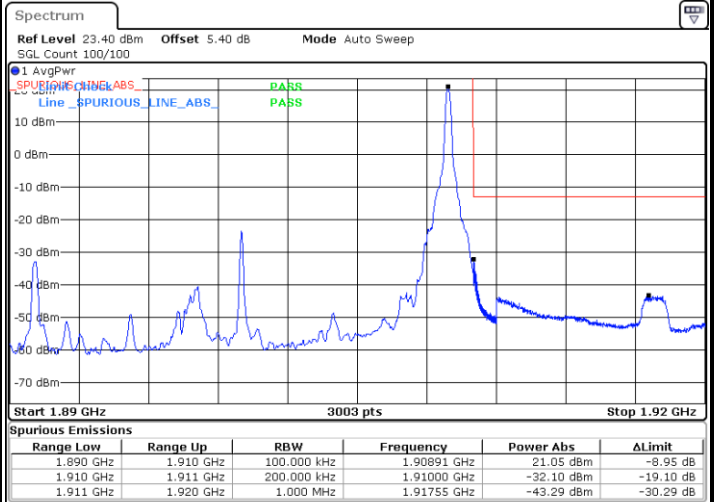


Date: 4.JAN.2021 19:17:15

Lowest Band Edge / Full RB

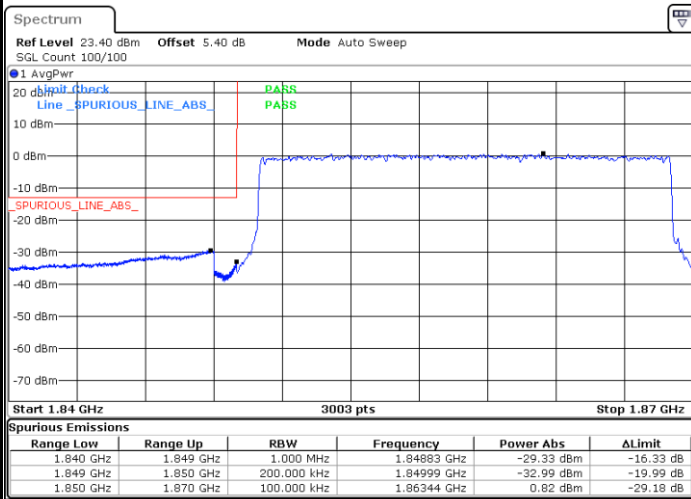

Date: 4.JAN.2021 19:20:04

Highest Band Edge / Full RB

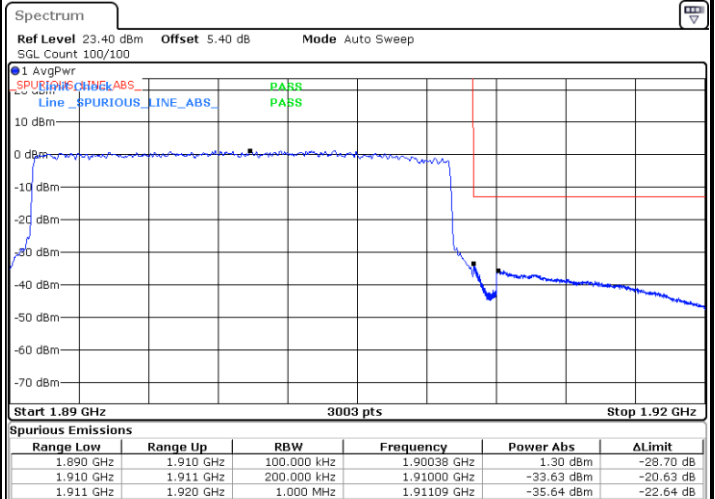


Date: 4.JAN.2021 19:19:26




LTE Band 2 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

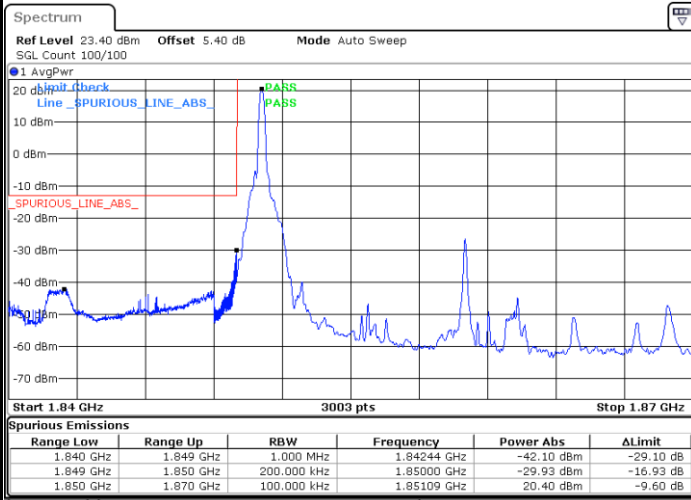


Date: 4.JAN.2021 19:23:11

Highest Band Edge / 1 RB

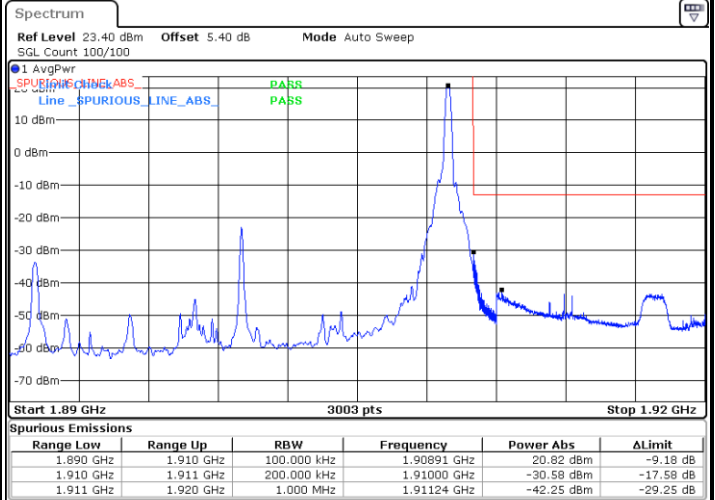


Date: 4.JAN.2021 19:17:46

Lowest Band Edge / Full RB

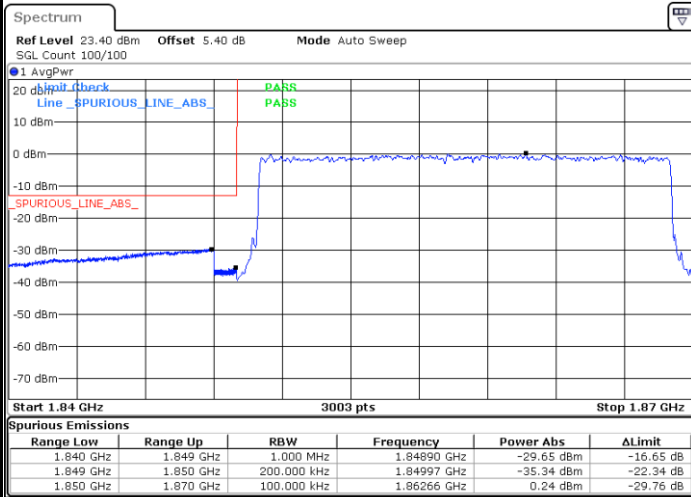

Date: 4.JAN.2021 19:20:23

Highest Band Edge / Full RB

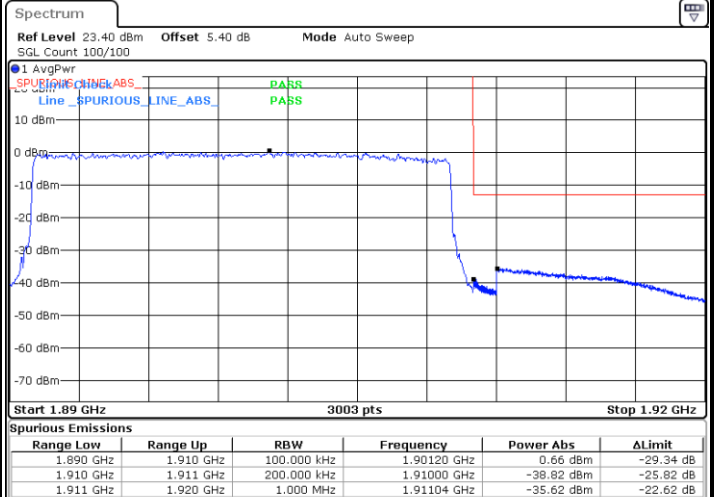


Date: 4.JAN.2021 19:19:07




LTE Band 2 / 20MHz / 64QAM

Lowest Band Edge / 1 RB

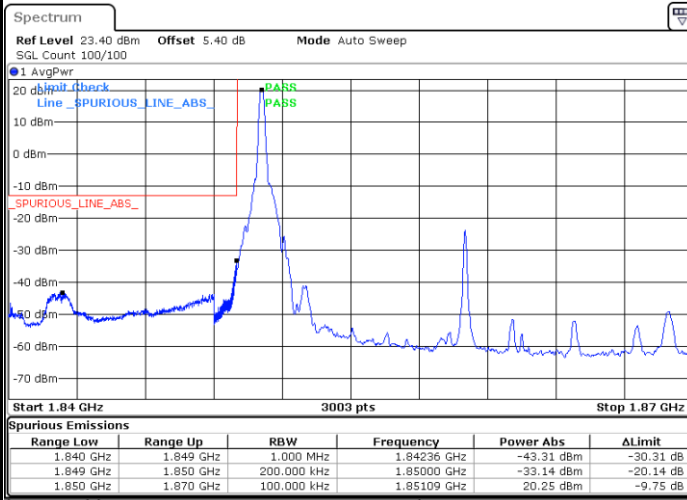


Date: 4.JAN.2021 19:22:43

Highest Band Edge / 1 RB

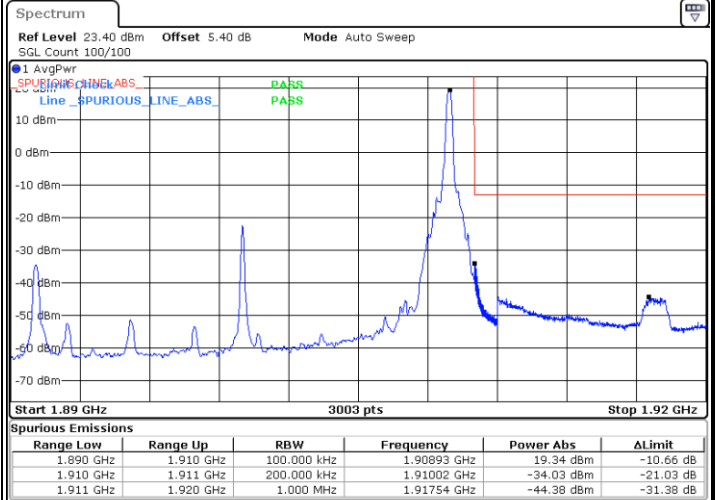


Date: 4.JAN.2021 19:18:15

Lowest Band Edge / Full RB

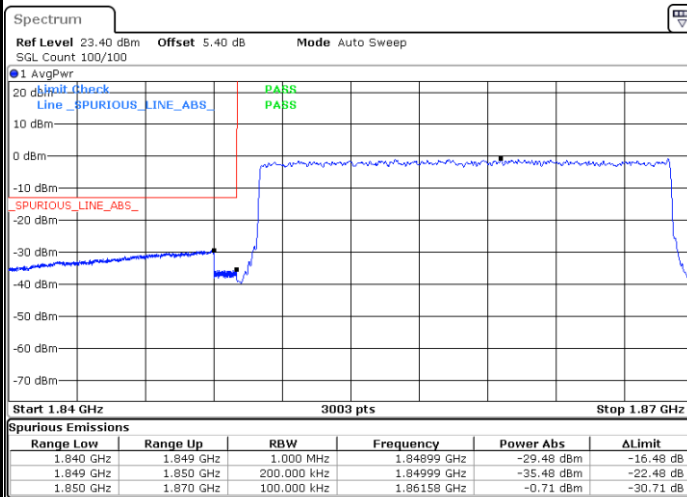

Date: 4.JAN.2021 19:21:03


Highest Band Edge / Full RB

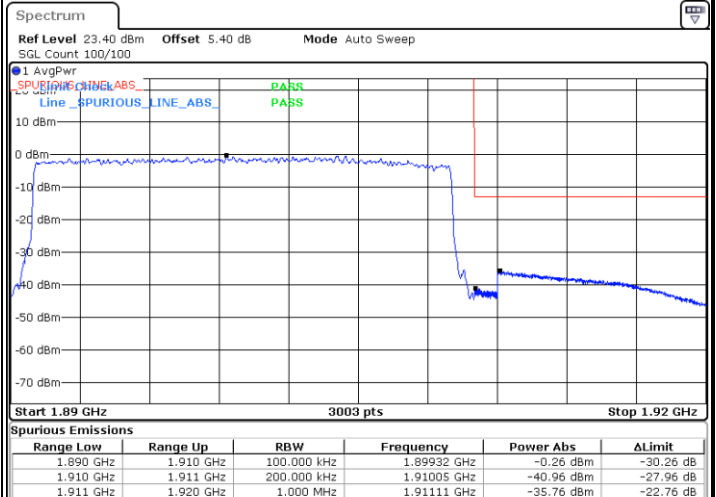

Date: 4.JAN.2021 19:18:44



Conducted Spurious Emission


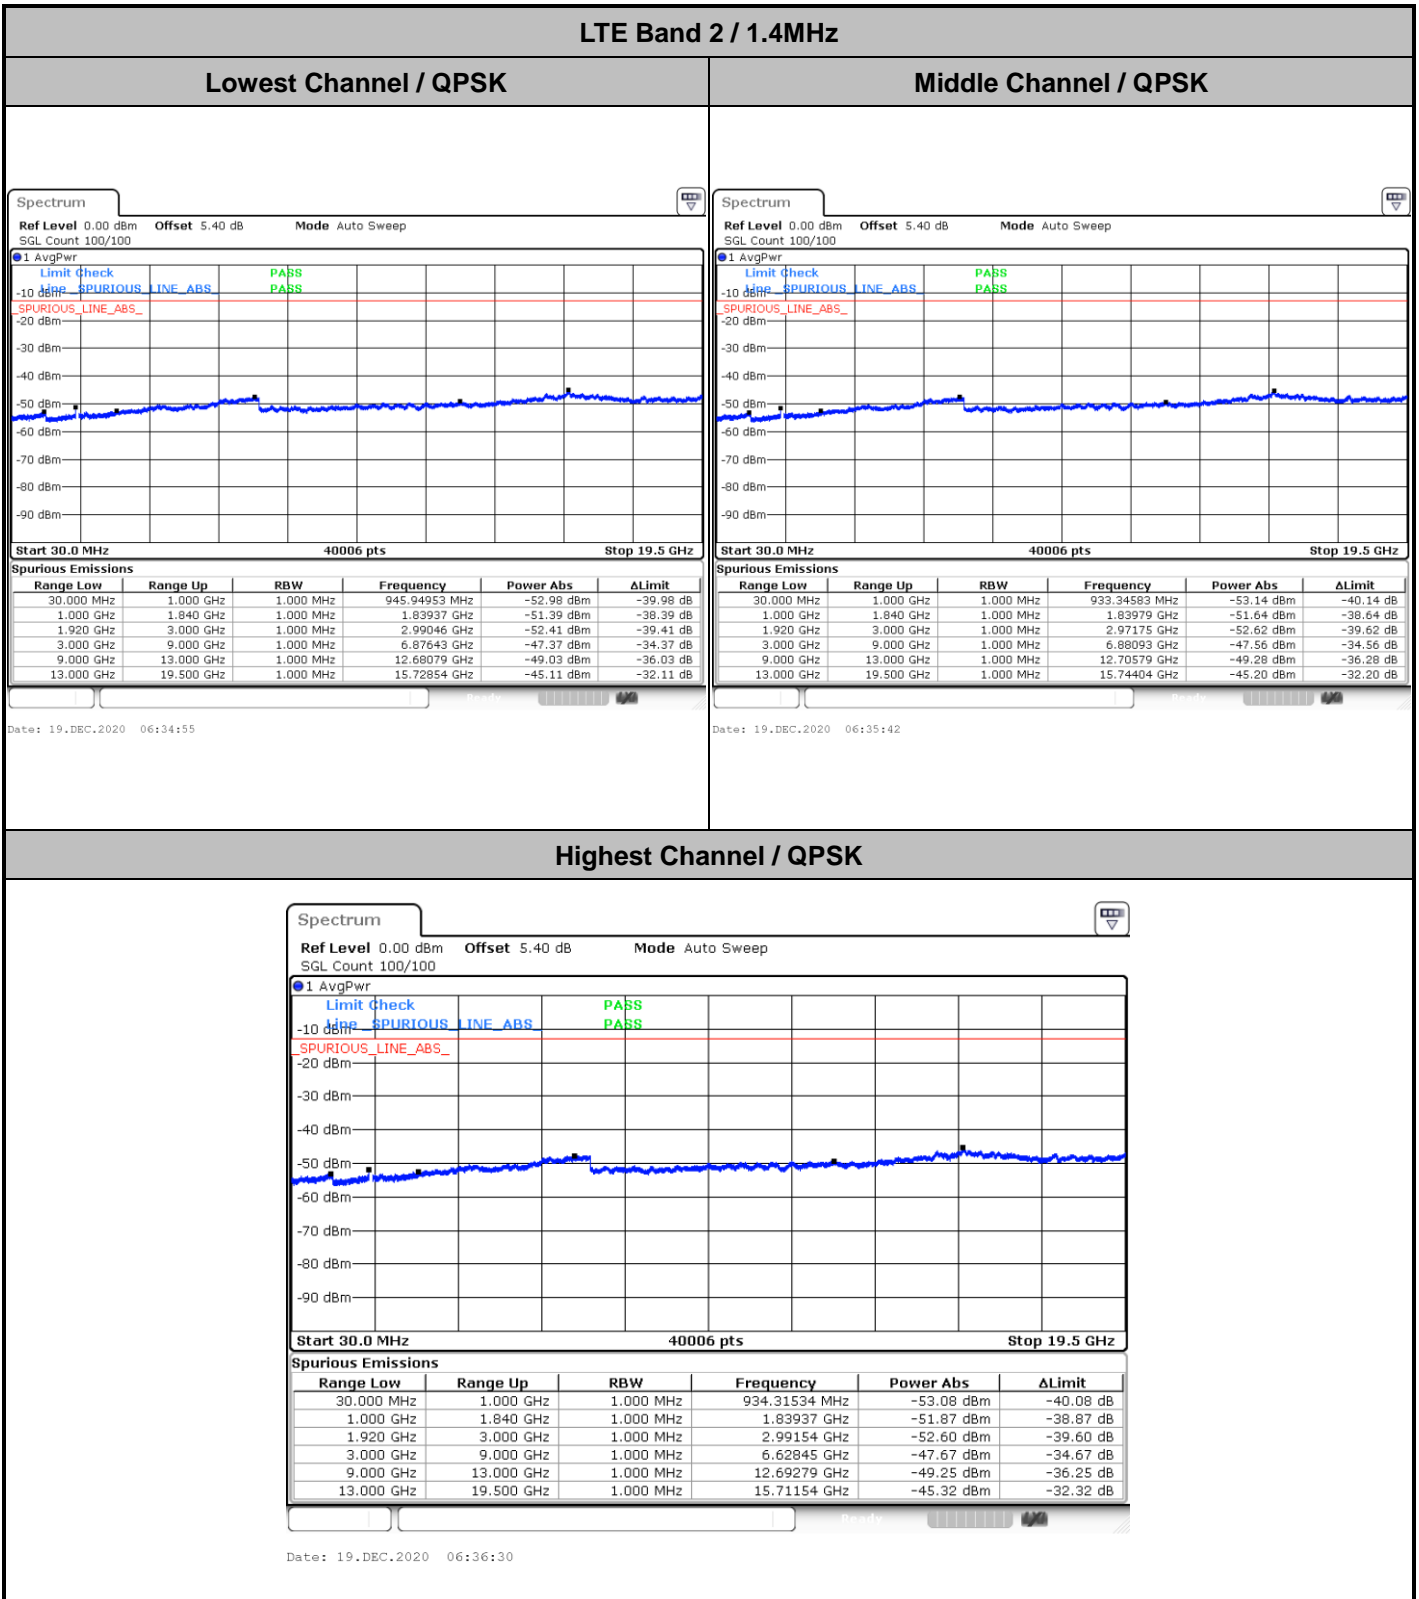




LTE Band 2 / 3MHz

Lowest Channel / QPSK


Middle Channel / QPSK

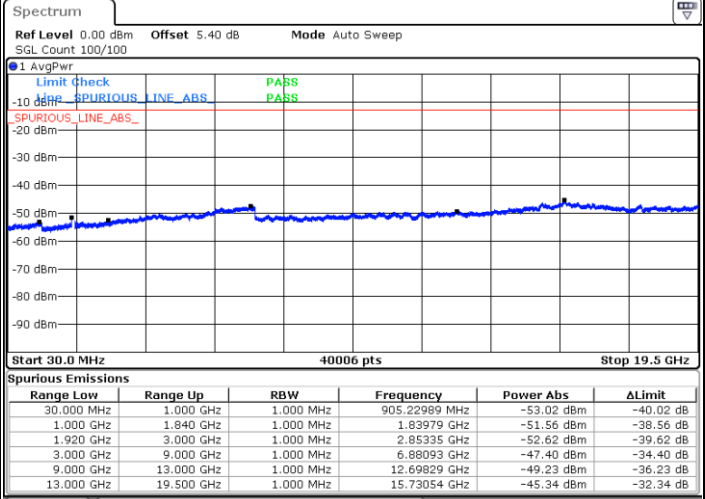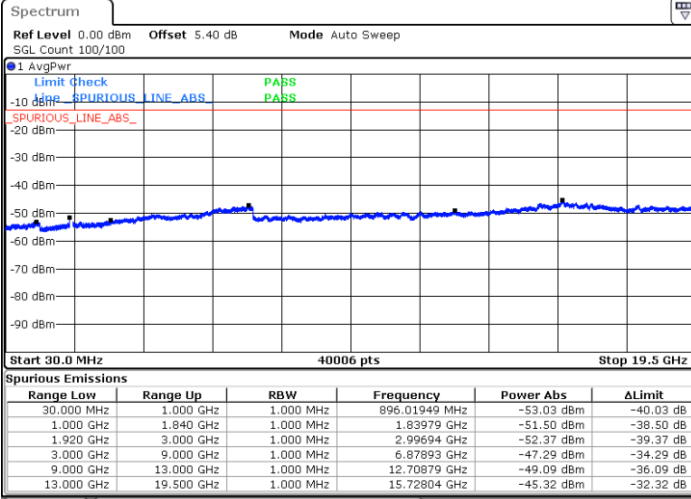

Date: 19.DEC.2020 06:32:55

Date: 19.DEC.2020 06:33:34

Highest Channel / QPSK

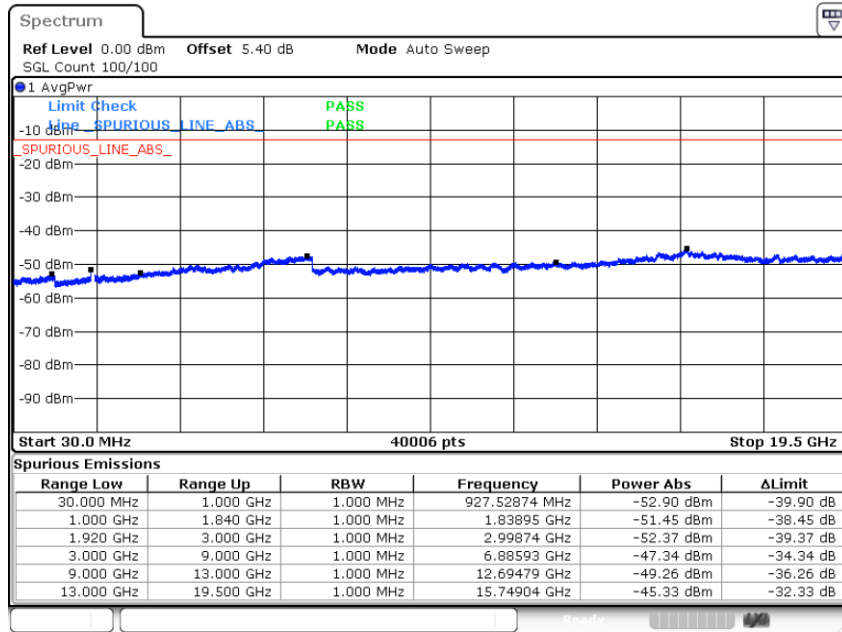


Date: 19.DEC.2020 06:34:14




LTE Band 2 / 5MHz


Lowest Channel / QPSK

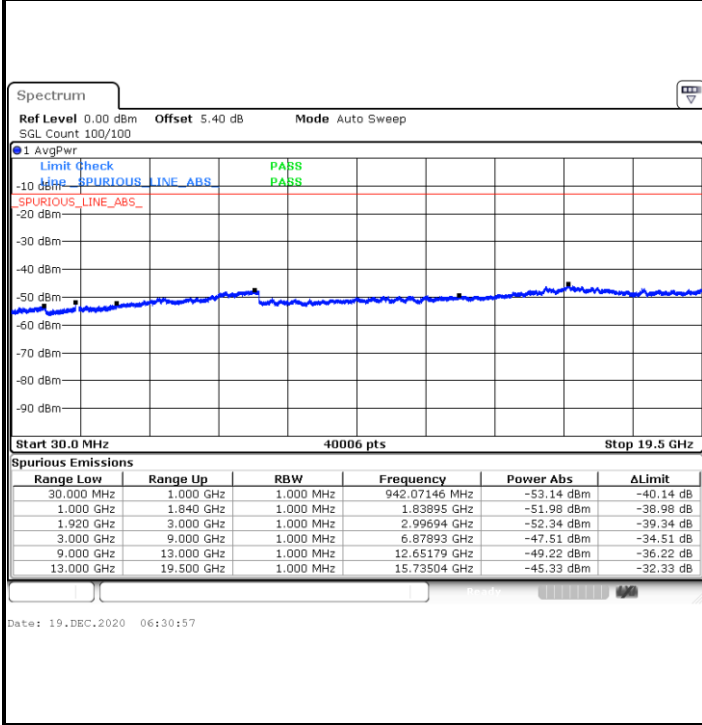

Middle Channel / QPSK

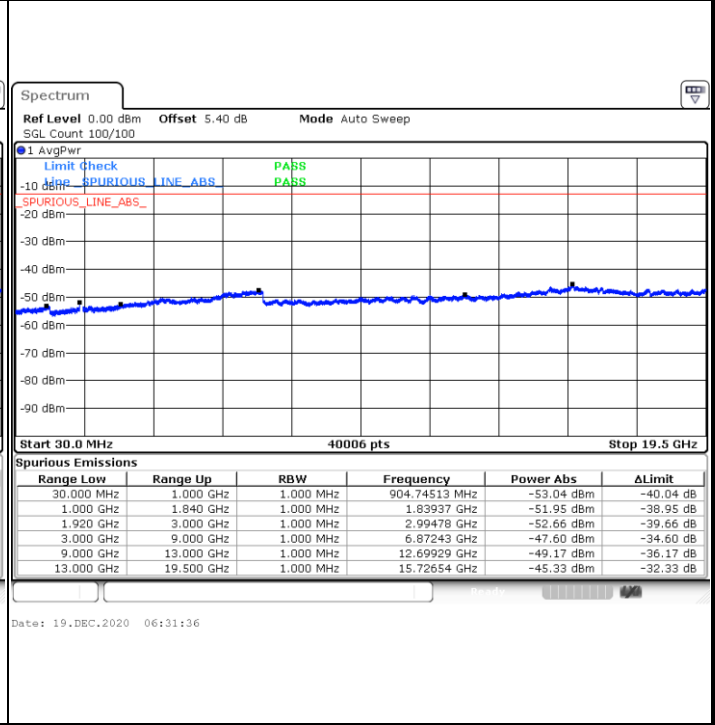


Highest Channel / QPSK

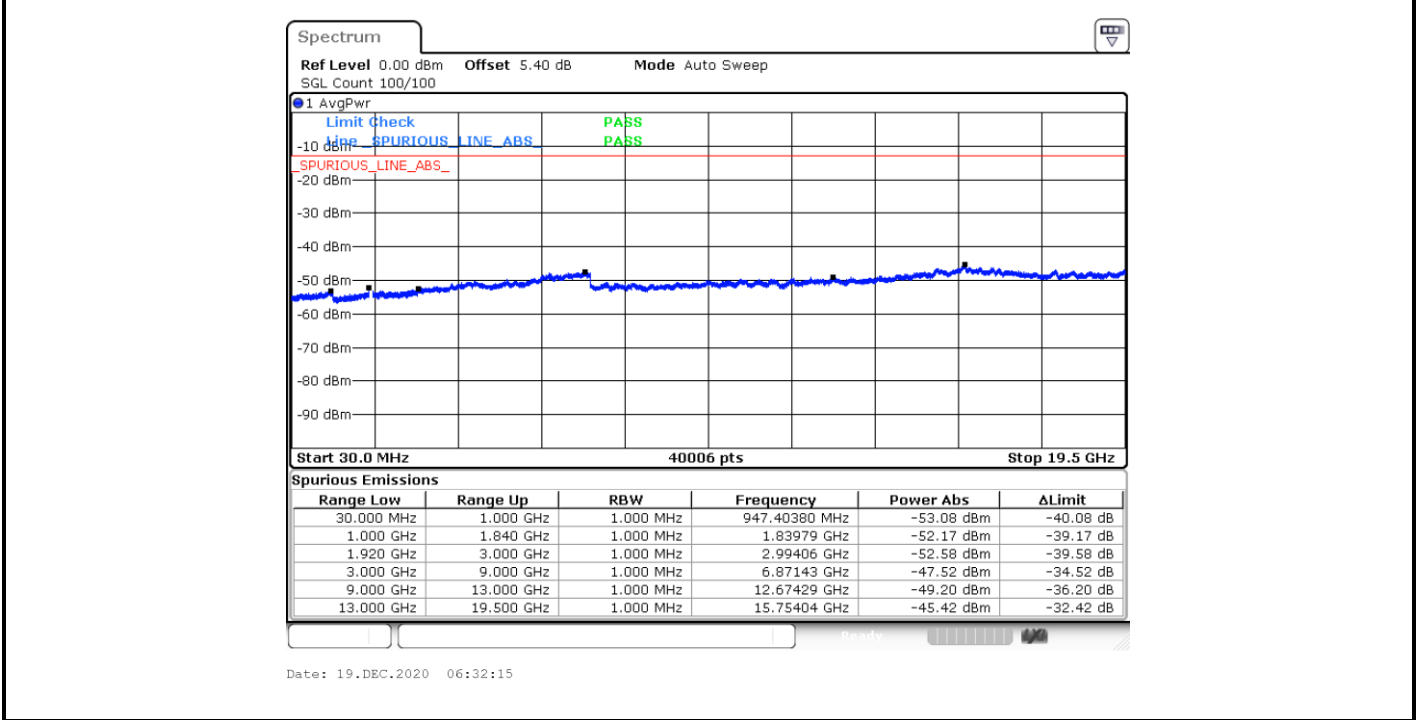




LTE Band 2 / 10MHz

Lowest Channel / QPSK

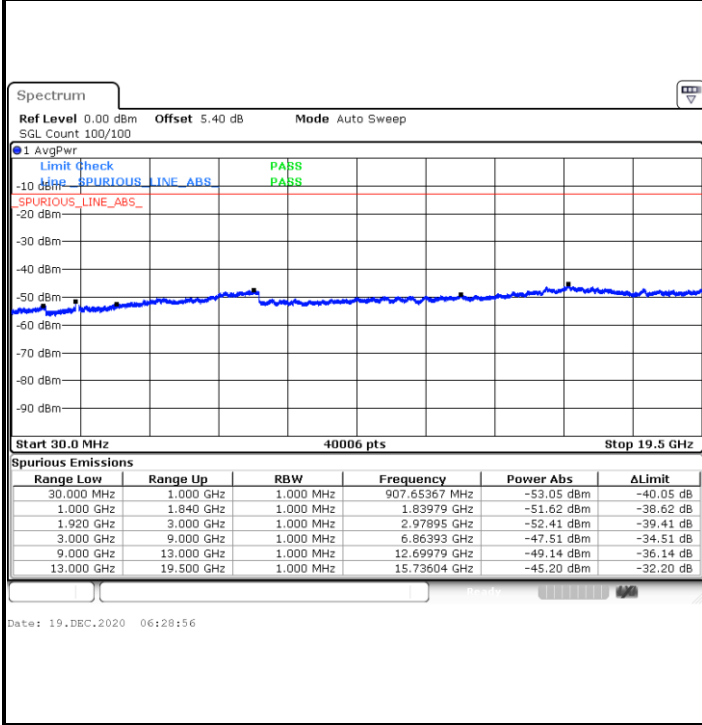

Middle Channel / QPSK

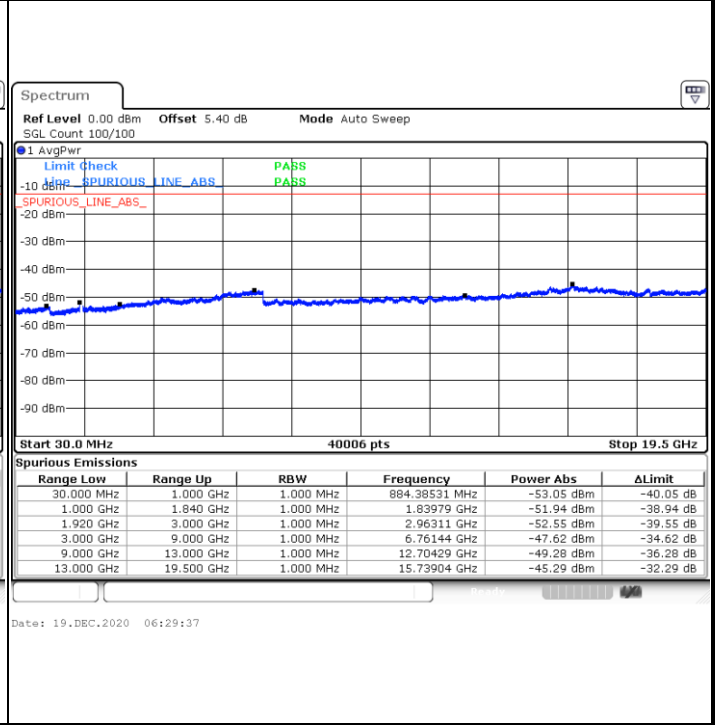

Highest Channel / QPSK

