



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2137-1  
**FCC ID** : IHDT56ZT1  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Jan. 21, 2021 and testing was completed on Feb. 09, 2021. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 7

    1.7 Test Software ..... 7

    1.8 Applicable Standards ..... 7

    1.9 Specification of Accessory ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 11

    2.3 Connection Diagram of Test System ..... 13

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 14

    2.6 Measurement Results Explanation Example ..... 14

**3 TEST RESULT ..... 15**

    3.1 26dB & 99% Occupied Bandwidth Measurement ..... 15

    3.2 Maximum Conducted Output Power Measurement ..... 17

    3.3 Power Spectral Density Measurement ..... 19

    3.4 Unwanted Emissions Measurement ..... 22

    3.5 AC Conducted Emission Measurement ..... 27

    3.6 Automatically Discontinue Transmission ..... 29

    3.7 Antenna Requirements ..... 30

**4 LIST OF MEASURING EQUIPMENT ..... 31**

**5 UNCERTAINTY OF EVALUATION ..... 33**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR112101E	Rev. 01	Initial issue of report	Feb. 26, 2021



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.09 dB at 5350.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.54 dB at 0.167 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2137-1
FCC ID	IHDT56ZT1
EUT supports Radios application	GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR / LE FM Receiver / GNSS
IMEI Code	Conducted: 352355710026099/352355710026107 Conduction: 352355710027196/352355710027204 Radiation: 352355710024557/352355710024565
HW Version	DVT2
SW Version	RRF31.Q1-37
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 18.26 dBm / 0.0670 W 802.11n HT20 : 18.07 dBm / 0.0641 W 802.11n HT40 : 17.43 dBm / 0.0553 W 802.11ac VHT20 : 16.08 dBm / 0.0406 W 802.11ac VHT40 : 16.49 dBm / 0.0446 W 802.11ac VHT80 : 14.70 dBm / 0.0295 W <5260 MHz ~ 5320 MHz>



	802.11a : 19.03 dBm / 0.0800 W 802.11n HT20 : 18.78 dBm / 0.0755 W 802.11n HT40 : 17.53 dBm / 0.0566 W 802.11ac VHT20 : 17.38 dBm / 0.0547 W 802.11ac VHT40 : 17.37 dBm / 0.0546 W 802.11ac VHT80 : 11.79 dBm / 0.0151 W <b>&lt;5500 MHz ~ 5720 MHz &gt;</b> 802.11a : 18.65 dBm / 0.0733 W 802.11n HT20 : 18.51 dBm / 0.0710 W 802.11n HT40 : 17.78 dBm / 0.0600 W 802.11ac VHT20 : 16.84 dBm / 0.0483 W 802.11ac VHT40 : 16.89 dBm / 0.0489 W 802.11ac VHT80 : 16.98 dBm / 0.0499 W
99% Occupied Bandwidth	<b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 17.53 MHz 802.11n HT20 : 18.68 MHz 802.11n HT40 : 36.46 MHz 802.11ac VHT80 : 75.76 MHz <b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 17.58 MHz 802.11n HT20 : 18.73 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.76 MHz <b>&lt;5500 MHz ~ 5720 MHz &gt;</b> 802.11a : 17.78 MHz 802.11n HT20 : 18.73 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.76 MHz
Antenna Type / Gain	<b>&lt;5150 MHz ~ 5250 MHz&gt;</b> PIFA Antenna with gain -6.00 dBi <b>&lt;5250 MHz ~ 5350 MHz&gt;</b> PIFA Antenna with gain -6.00 dBi <b>&lt;5470 MHz ~ 5725 MHz&gt;</b> PIFA Antenna with gain -7.00 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH05-KS 03CH06-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	03CH06-KS	AUDIX	E3	6.2009-8-24al
3.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
AC Adapter 2(Chile)	Brand Name	Motorola (Salcomp)	Model Name	MC-109
AC Adapter 3(US)	Brand Name	Motorola (AOHAI)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola (AOHAI)	Model Name	MC-102
Battery 1	Brand Name	Motorola (Sunwoda)	Model Name	JK50
Battery 2	Brand Name	Motorola (ATL)	Model Name	JK50
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	MH191(SH38C81577)
Earphone 2	Brand Name	Motorola (LCHSE)	Model Name	MH191(SH38C81576)
USB Cable 1	Brand Name	Motorola (Sai bao)	Model Name	SC18C24367
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name	SC18C24368
USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SC18C49697





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 <sup>#</sup>	5690	144	5720
	142*	5710		

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Co-location
WIFI B2 802.11ac VHT80 + Part27F B13
BLE + WIFI B2 802.11ac VHT80

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 1(Charging from Adapter 1) + Earphone 1
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter 1, Battery 1, Earphone 1, USB Cable 1 and Sample 1.	




Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-
Straddle		-	-	138

### 2.3 Connection Diagram of Test System

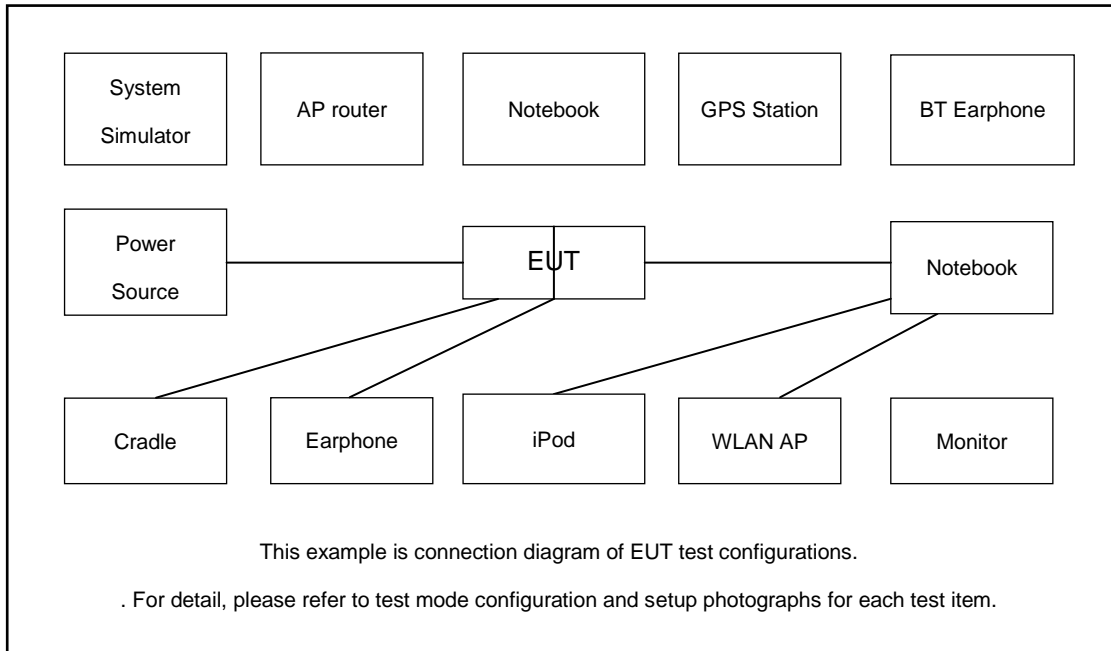

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.2 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

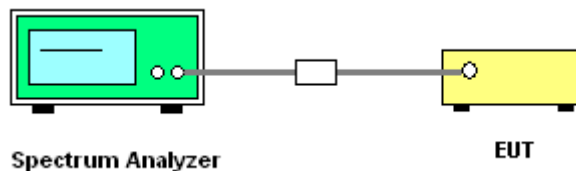

##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

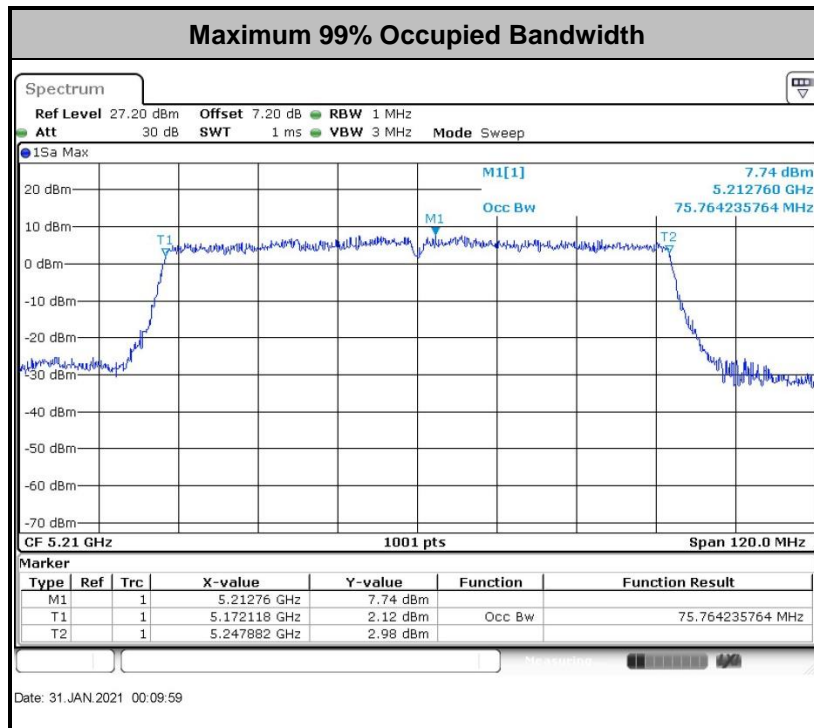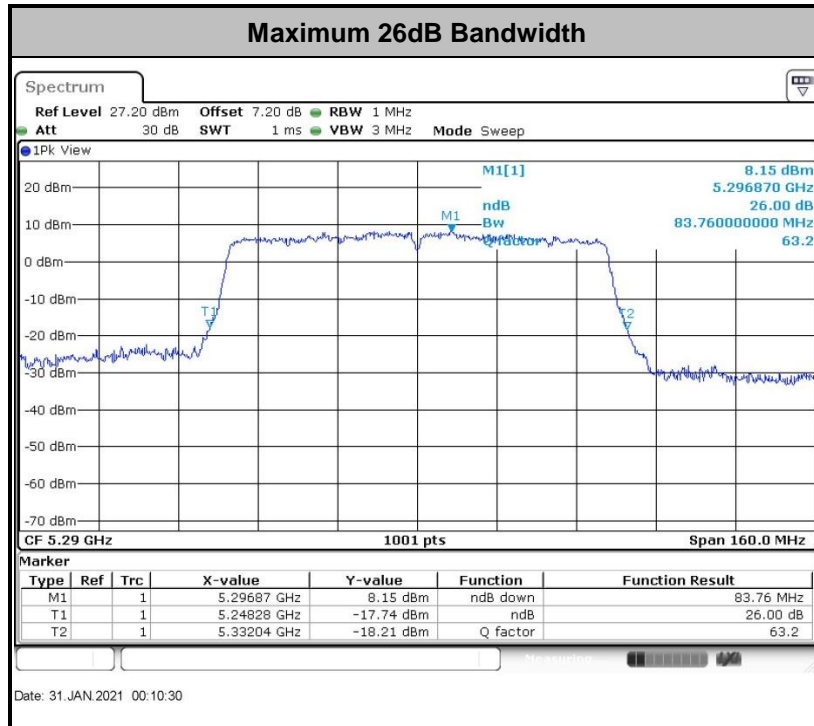

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.





## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 + 10 \log B$ , dBm, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

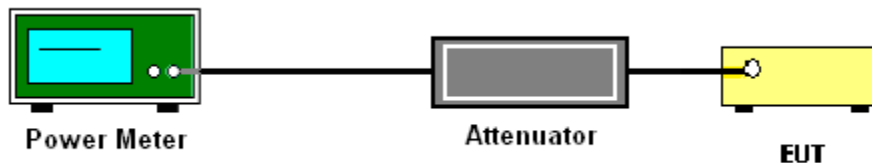

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

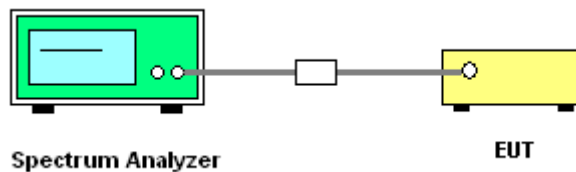

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

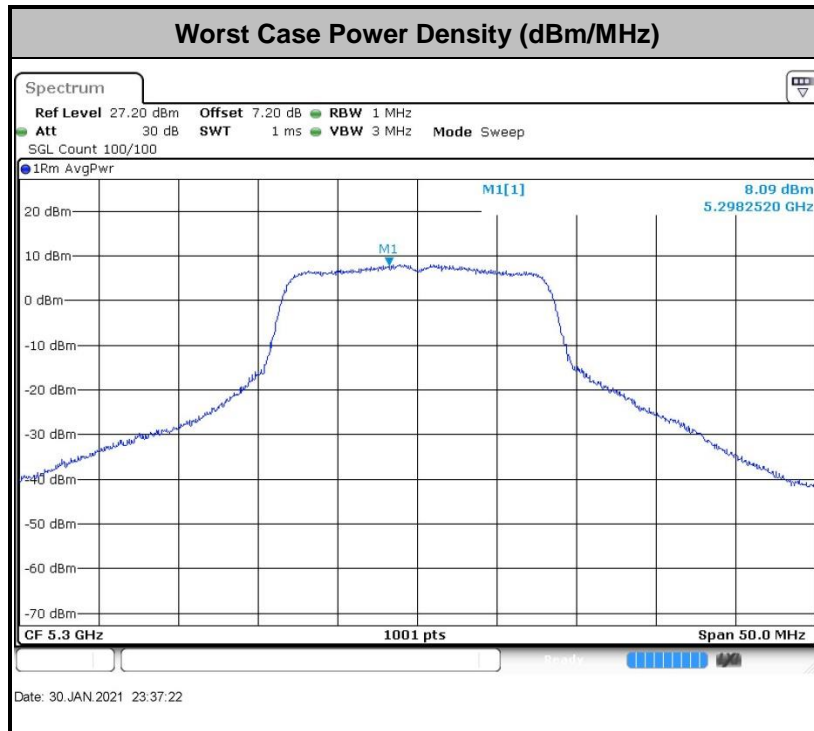

**Note:** Average Power Density (dB) = Measured value+ Duty Factor



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{Meas}$  is the field strength of the emission at the measurement distance, in dBμV/m

$d_{Meas}$  is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


### 3.4.4 Test Setup




For radiated emissions below 30MHz

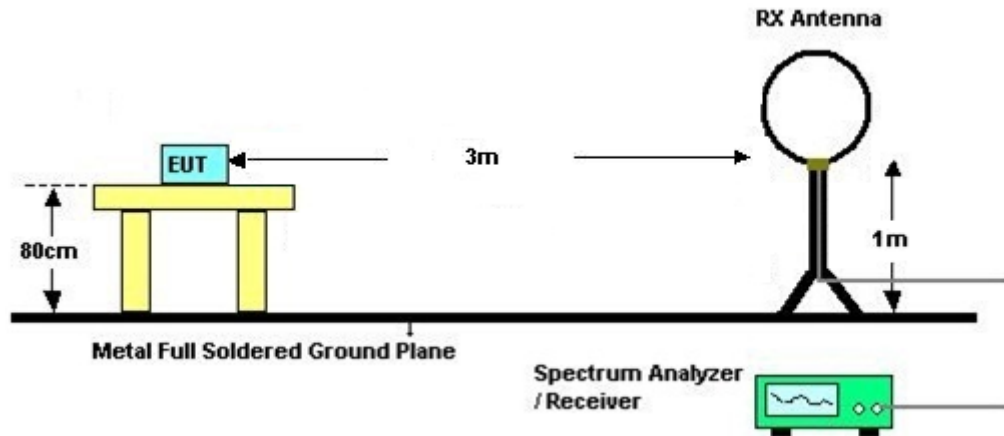

For radiated emissions from 30MHz to 1GHz

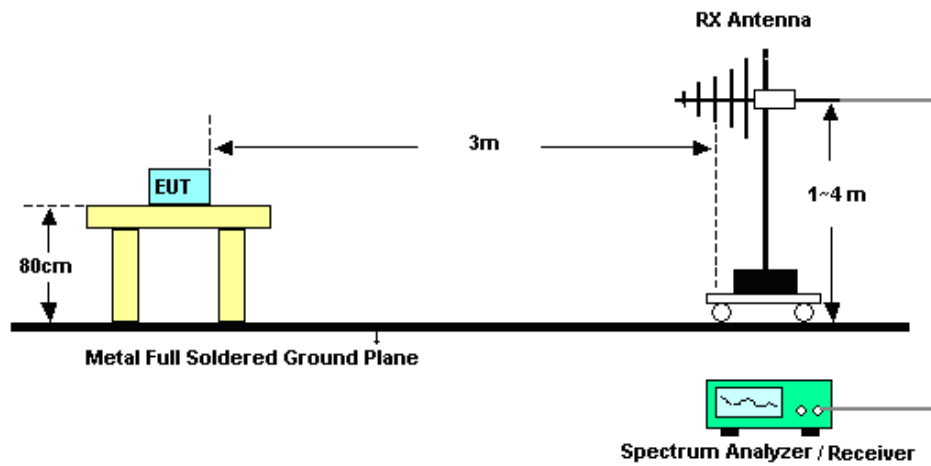

For radiated emissions above 1GHz

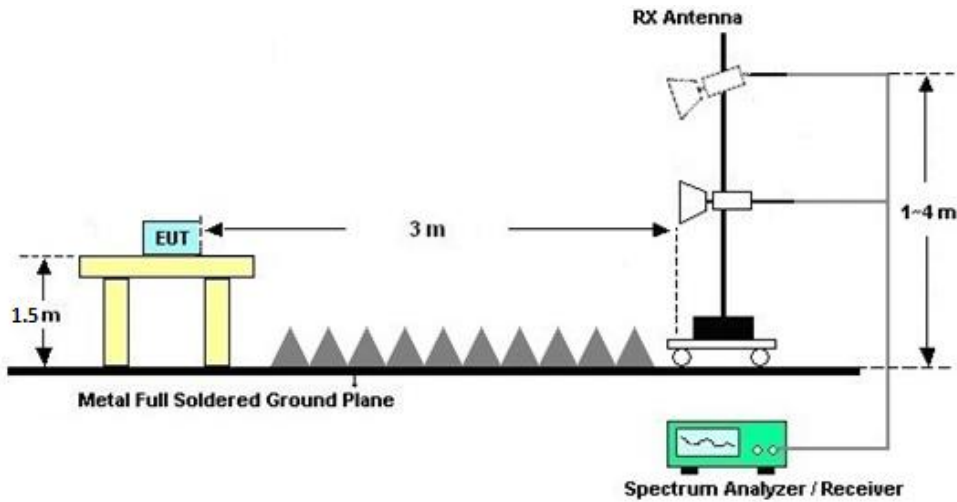

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.4.7 Duty Cycle

Please refer to Appendix D.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

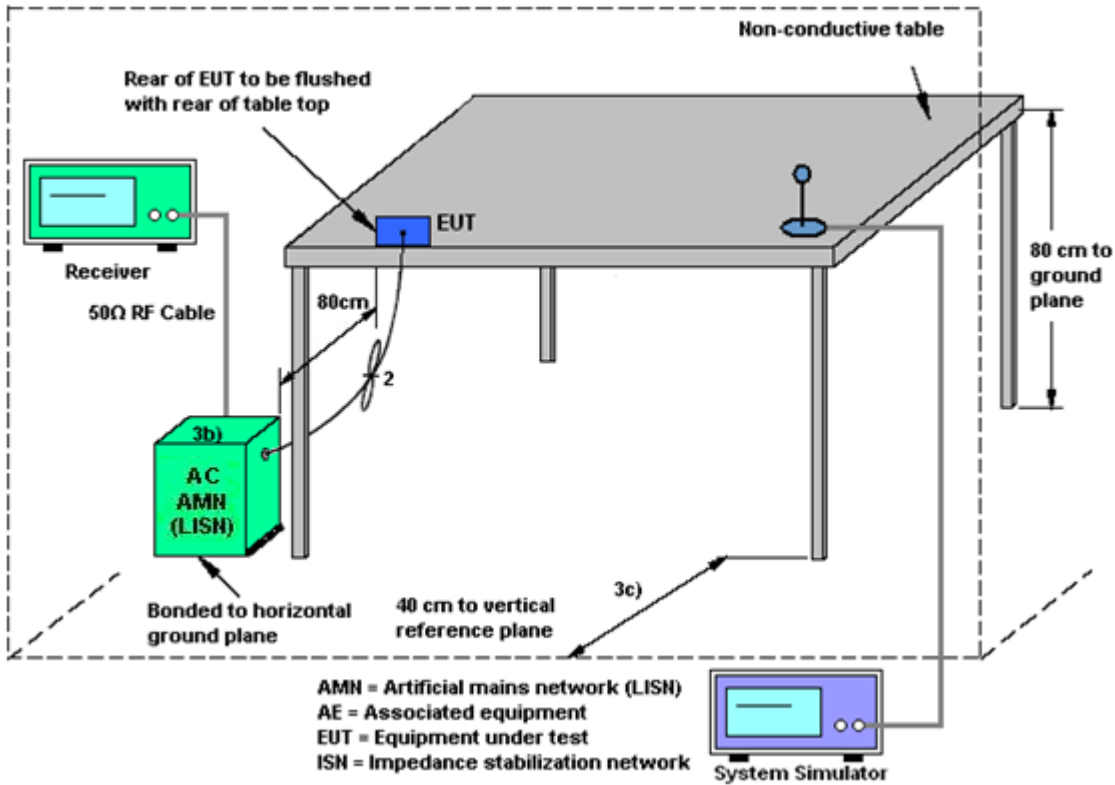

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Jan. 30, 2021~ Jan. 31, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	1339163	300MHz~40GHz	Nov. 18, 2020	Jan. 30, 2021~ Jan. 31, 2021	Nov. 19, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1435004	50MHz Bandwidth	Oct. 27, 2020	Jan. 30, 2021~ Jan. 31, 2021	Oct. 26, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Feb. 09, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr.15, 2020	Feb. 09, 2021	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Feb. 09, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2020	Feb. 09, 2021	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Feb. 09, 2021	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Feb. 09, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 14, 2020	Feb. 09, 2021	Apr. 13, 2021	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Feb. 09, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz~18Ghz	Oct. 17, 2020	Feb. 09, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Feb. 09, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 09, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 09, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 09, 2021	NCR	Radiation (03CH05-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Feb. 09, 2021	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 14, 2020	Feb. 09, 2021	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Feb. 09, 2021	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Feb. 09, 2021	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Feb. 09, 2021	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Feb. 09, 2021	Nov. 09, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Feb. 09, 2021	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 06, 2021	Feb. 09, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz~18Ghz	Jan. 06, 2021	Feb. 09, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Feb. 09, 2021	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 09, 2021	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 09, 2021	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 09, 2021	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Jan. 28, 2021	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jan. 28, 2021	Oct. 16, 2021	Conduction (CO01-KS)



AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 27, 2020	Jan. 28, 2021	Oct. 26, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jan. 28, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required





## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### 03CH05-KS and 03CH06-KS

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	HeYong	Temperature:	21~25	°C
Test Date:	2021/1/30~2021/1/31	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band I										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.48	23.18	-	22.43		
11a	6Mbps	1	44	5220	17.48	24.33	-	22.43		
11a	6Mbps	1	48	5240	17.53	24.38	-	22.44		
HT20	MCS0	1	36	5180	18.58	24.33	-	22.69		
HT20	MCS0	1	44	5220	18.68	24.93	-	22.71		
HT20	MCS0	1	48	5240	18.63	25.23	-	22.70		
HT40	MCS0	1	38	5190	36.46	41.81	-	23.01		
HT40	MCS0	1	46	5230	36.46	41.27	-	23.01		
VHT80	MCS0	1	42	5210	75.76	83.12	-	23.01		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band I										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.08	18.26	24.00	-6.00		Pass
11a	6Mbps	1	44	5220	0.08	18.24	24.00	-6.00		Pass
11a	6Mbps	1	48	5240	0.08	18.15	24.00	-6.00		Pass
HT20	MCS0	1	36	5180	0.08	17.98	24.00	-6.00		Pass
HT20	MCS0	1	44	5220	0.08	18.07	24.00	-6.00		Pass
HT20	MCS0	1	48	5240	0.08	17.95	24.00	-6.00		Pass
HT40	MCS0	1	38	5190	0.16	15.59	24.00	-6.00		Pass
HT40	MCS0	1	46	5230	0.16	17.43	24.00	-6.00		Pass
VHT20	MCS0	1	36	5180	0.10	16.04	24.00	-6.00		Pass
VHT20	MCS0	1	44	5220	0.10	16.05	24.00	-6.00		Pass
VHT20	MCS0	1	48	5240	0.10	16.08	24.00	-6.00		Pass
VHT40	MCS0	1	38	5190	0.16	16.49	24.00	-6.00		Pass
VHT40	MCS0	1	46	5230	0.16	16.38	24.00	-6.00		Pass
VHT80	MCS0	1	42	5210	0.36	14.70	24.00	-6.00		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.08	7.69	11.00	-6.00		Pass
11a	6Mbps	1	44	5220	0.08	7.72	11.00	-6.00		Pass
11a	6Mbps	1	48	5240	0.08	7.64	11.00	-6.00		Pass
HT20	MCS0	1	36	5180	0.08	7.50	11.00	-6.00		Pass
HT20	MCS0	1	44	5220	0.08	7.58	11.00	-6.00		Pass
HT20	MCS0	1	48	5240	0.08	7.24	11.00	-6.00		Pass
HT40	MCS0	1	38	5190	0.16	1.80	11.00	-6.00		Pass
HT40	MCS0	1	46	5230	0.16	3.79	11.00	-6.00		Pass
VHT80	MCS0	1	42	5210	0.36	-1.49	11.00	-6.00		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band II											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note	
11a	6M bps	1	52	5260	17.48	23.78	23.43	29.43	23.98		
11a	6M bps	1	60	5300	17.58	24.58	23.45	29.45	23.98		
11a	6M bps	1	64	5320	17.53	24.28	23.44	29.44	23.98		
HT20	MCS 0	1	52	5260	18.63	25.08	23.70	29.70	23.98		
HT20	MCS 0	1	60	5300	18.68	25.33	23.71	29.71	23.98		
HT20	MCS 0	1	64	5320	18.73	25.18	23.73	29.73	23.98		
HT40	MCS 0	1	54	5270	36.56	41.45	23.98	30.00	23.98		
HT40	MCS 0	1	62	5310	36.36	41.54	23.98	30.00	23.98		
VHT80	MCS 0	1	58	5290	75.76	83.76	23.98	30.00	23.98		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.08	18.34	23.98	-6.00	26.99	Pass
11a	6M bps	1	60	5300	0.08	19.03	23.98	-6.00	26.99	Pass
11a	6M bps	1	64	5320	0.08	17.68	23.98	-6.00	26.99	Pass
HT20	MCS 0	1	52	5260	0.08	18.14	23.98	-6.00	26.99	Pass
HT20	MCS 0	1	60	5300	0.08	18.78	23.98	-6.00	26.99	Pass
HT20	MCS 0	1	64	5320	0.08	17.67	23.98	-6.00	26.99	Pass
HT40	MCS 0	1	54	5270	0.16	17.53	23.98	-6.00	26.99	Pass
HT40	MCS 0	1	62	5310	0.16	15.21	23.98	-6.00	26.99	Pass
VHT20	MCS 0	1	52	5260	0.10	16.29	23.98	-6.00	26.99	Pass
VHT20	MCS 0	1	60	5300	0.10	16.95	23.98	-6.00	26.99	Pass
VHT20	MCS 0	1	64	5320	0.10	17.38	23.98	-6.00	26.99	Pass
VHT40	MCS 0	1	54	5270	0.16	16.63	23.98	-6.00	26.99	Pass
VHT40	MCS 0	1	62	5310	0.16	17.37	23.98	-6.00	26.99	Pass
VHT80	MCS 0	1	58	5290	0.36	11.79	23.98	-6.00	26.99	Pass



**TEST RESULTS DATA**  
**Power Spectral Density**

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.08	7.72	11.00	-6.00		Pass
11a	6M bps	1	60	5300	0.08	8.17	11.00	-6.00		Pass
11a	6M bps	1	64	5320	0.08	7.80	11.00	-6.00		Pass
HT20	MCS 0	1	52	5260	0.08	7.31	11.00	-6.00		Pass
HT20	MCS 0	1	60	5300	0.08	8.11	11.00	-6.00		Pass
HT20	MCS 0	1	64	5320	0.08	7.24	11.00	-6.00		Pass
HT40	MCS 0	1	54	5270	0.16	3.63	11.00	-6.00		Pass
HT40	MCS 0	1	62	5310	0.16	1.40	11.00	-6.00		Pass
VHT80	MCS 0	1	58	5290	0.36	-4.13	11.00	-6.00		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.48	24.48	23.43	29.43	23.98	
11a	6M bps	1	116	5580	17.48	23.88	23.43	29.43	23.98	
11a	6M bps	1	140	5700	17.78	26.02	23.50	29.50	23.98	
11a	6Mbps	1	144	5720	17.53	24.73	23.44	29.44	23.98	
HT20	MCS 0	1	100	5500	18.73	24.68	23.73	29.73	23.98	
HT20	MCS 0	1	116	5580	18.68	24.68	23.71	29.71	23.98	
HT20	MCS 0	1	140	5700	18.68	25.82	23.71	29.71	23.98	
HT20	MCS0	1	144	5720	18.68	24.58	23.71	29.71	23.98	
HT40	MCS 0	1	102	5510	36.56	41.72	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.56	41.63	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.56	41.54	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	36.36	41.81	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.64	83.44	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.76	83.68	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	75.64	83.44	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.08	17.95	23.98	-7.00	26.99	Pass
11a	6M bps	1	116	5580	0.08	18.65	23.98	-7.00	26.99	Pass
11a	6M bps	1	140	5700	0.08	17.60	23.98	-7.00	26.99	Pass
11a	6Mbps	1	144	5720	0.08	18.25	23.98	-7.00	26.99	Pass
HT20	MCS 0	1	100	5500	0.08	17.77	23.98	-7.00	26.99	Pass
HT20	MCS 0	1	116	5580	0.08	18.51	23.98	-7.00	26.99	Pass
HT20	MCS 0	1	140	5700	0.08	16.56	23.98	-7.00	26.99	Pass
HT20	MCS0	1	144	5720	0.08	18.09	23.98	-7.00	26.99	Pass
HT40	MCS 0	1	102	5510	0.16	15.75	23.98	-7.00	26.99	Pass
HT40	MCS 0	1	110	5550	0.16	17.42	23.98	-7.00	26.99	Pass
HT40	MCS 0	1	134	5670	0.16	17.78	23.98	-7.00	26.99	Pass
HT40	MCS0	1	142	5710	0.16	17.72	23.98	-7.00	26.99	Pass
VHT20	MCS 0	1	100	5500	0.10	15.98	23.98	-7.00	26.99	Pass
VHT20	MCS 0	1	116	5580	0.10	16.58	23.98	-7.00	26.99	Pass
VHT20	MCS 0	1	140	5700	0.10	16.84	23.98	-7.00	26.99	Pass
VHT20	MCS0	1	144	5720	0.10	16.16	23.98	-7.00	26.99	Pass
VHT40	MCS 0	1	102	5510	0.16	16.41	23.98	-7.00	26.99	Pass
VHT40	MCS 0	1	110	5550	0.16	16.63	23.98	-7.00	26.99	Pass
VHT40	MCS 0	1	134	5670	0.16	16.89	23.98	-7.00	26.99	Pass
VHT40	MCS0	1	142	5710	0.16	16.82	23.98	-7.00	26.99	Pass
VHT80	MCS 0	1	106	5530	0.36	12.97	23.98	-7.00	26.99	Pass
VHT80	MCS 0	1	122	5610	0.36	16.98	23.98	-7.00	26.99	Pass
VHT80	MCS0	1	138	5690	0.36	16.53	23.98	-7.00	26.99	Pass


**TEST RESULTS DATA**  
**Power Spectral Density**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.08	7.51	11.00	-7.00		Pass
11a	6M bps	1	116	5580	0.08	7.99	11.00	-7.00		Pass
11a	6M bps	1	140	5700	0.08	6.61	11.00	-7.00		Pass
11a	6Mbps	1	144	5720	0.08	7.34	11.00	-7.00		Pass
HT20	MCS 0	1	100	5500	0.08	6.96	11.00	-7.00		Pass
HT20	MCS 0	1	116	5580	0.08	7.65	11.00	-7.00		Pass
HT20	MCS 0	1	140	5700	0.08	5.72	11.00	-7.00		Pass
HT20	MCS0	1	144	5720	0.08	6.79	11.00	-7.00		Pass
HT40	MCS 0	1	102	5510	0.16	2.35	11.00	-7.00		Pass
HT40	MCS 0	1	110	5550	0.16	3.26	11.00	-7.00		Pass
HT40	MCS 0	1	134	5670	0.16	3.39	11.00	-7.00		Pass
HT40	MCS0	1	142	5710	0.16	3.52	11.00	-7.00		Pass
VHT80	MCS 0	1	106	5530	0.36	-3.04	11.00	-7.00		Pass
VHT80	MCS 0	1	122	5610	0.36	0.15	11.00	-7.00		Pass
VHT80	MCS0	1	138	5690	0.36	-0.31	11.00	-7.00		Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

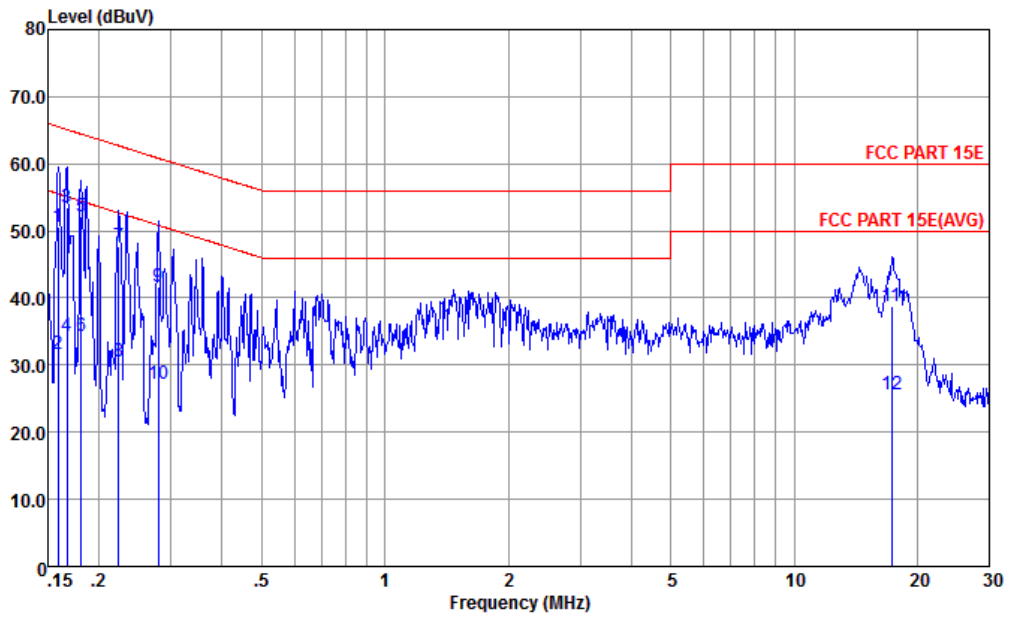


Site : CO01-KS  
 Condition : FCC PART 15E TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.159	50.69	-14.83	65.52	30.59	9.64	10.46	QP
2	0.159	31.69	-23.83	55.52	11.59	9.64	10.46	Average
3 *	0.167	53.58	-11.54	65.12	33.50	9.64	10.44	QP
4	0.167	34.38	-20.74	55.12	14.30	9.64	10.44	Average
5	0.181	52.25	-12.21	64.46	32.21	9.64	10.40	QP
6	0.181	34.25	-20.21	54.46	14.21	9.64	10.40	Average
7	0.223	47.79	-14.91	62.70	27.80	9.64	10.35	QP
8	0.223	30.49	-22.21	52.70	10.50	9.64	10.35	Average
9	0.279	41.76	-19.09	60.85	21.80	9.64	10.32	QP
10	0.279	27.16	-23.69	50.85	7.20	9.64	10.32	Average
11	17.291	38.67	-21.33	60.00	17.20	11.03	10.44	QP
12	17.291	25.67	-24.33	50.00	4.20	11.03	10.44	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

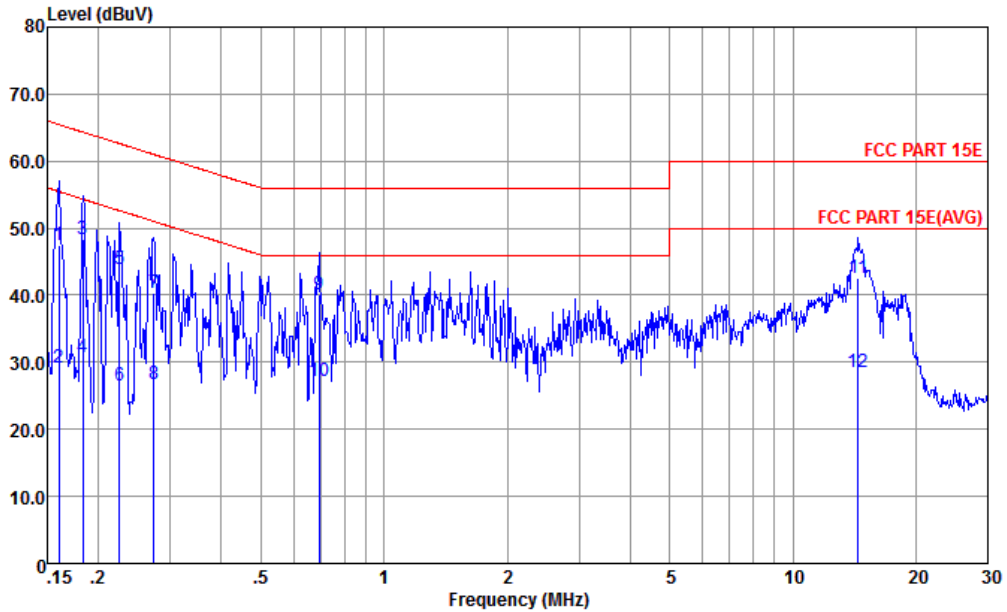

Site : CO01-KS  
 Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.160	47.47	-18.00	65.47	27.20	9.82	10.45	QP
2	0.160	29.17	-26.30	55.47	8.90	9.82	10.45	Average
3	0.183	48.46	-15.87	64.33	28.19	9.87	10.40	QP
4	0.183	30.86	-23.47	54.33	10.59	9.87	10.40	Average
5	0.226	43.81	-18.80	62.61	23.60	9.86	10.35	QP
6	0.226	26.51	-26.10	52.61	6.30	9.86	10.35	Average
7	0.273	40.33	-20.70	61.03	20.20	9.81	10.32	QP
8	0.273	26.73	-24.30	51.03	6.60	9.81	10.32	Average
9 *	0.694	40.16	-15.84	56.00	20.20	9.72	10.24	QP
10	0.694	27.26	-18.74	46.00	7.30	9.72	10.24	Average
11	14.440	42.49	-17.51	60.00	21.10	11.00	10.39	QP
12	14.440	28.59	-21.41	50.00	7.20	11.00	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

**Band 1 - 5150~5250MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.76	59.64	-14.36	74	46.41	34.93	11.02	32.72	101	117	P	H
		5150	48.68	-5.32	54	35.45	34.93	11.02	32.72	101	117	A	H
	*	5182	107.46	-	-	94.18	34.96	11.03	32.71	101	117	P	H
		5182	99.79	-	-	86.51	34.96	11.03	32.71	101	117	A	H
		5142.08	56.63	-17.37	74	43.4	34.93	11.02	32.72	328	99	P	V
		5150	45.43	-8.57	54	32.2	34.93	11.02	32.72	328	99	A	V
	*	5182	103.85	-	-	90.57	34.96	11.03	32.71	328	99	P	V
		5182	96.13	-	-	82.85	34.96	11.03	32.71	328	99	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36		10358.36	44.24	-24.06	68.3	53.05	37.76	16.04	62.61	300	0	P	H
5180MHz		10358.36	43.3	-25	68.3	52.11	37.76	16.04	62.61	100	360	P	V
802.11a CH 44		10440	44.51	-23.79	68.3	53.24	37.82	16.11	62.66	300	0	P	H
5220MHz		10440	44.92	-23.38	68.3	53.65	37.82	16.11	62.66	100	360	P	V
802.11a CH 48		10478.47	44.14	-24.16	68.3	52.82	37.86	16.15	62.69	300	0	P	H
5240MHz		10478.47	43.69	-24.61	68.3	52.37	37.86	16.15	62.69	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 CH 36 5180MHz and a Remark section.



**Band 1 5150~5250MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10358.36	43.67	-24.63	68.3	52.48	37.76	16.04	62.61	100	360	P	H
		10358.36	42.56	-25.74	68.3	51.37	37.76	16.04	62.61	100	360	P	V
802.11n HT20 CH 44 5220MHz		10438.44	43.8	-24.5	68.3	52.53	37.82	16.11	62.66	100	360	P	H
		10438.44	43.91	-24.39	68.3	52.64	37.82	16.11	62.66	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	43.8	-24.5	68.3	52.48	37.86	16.15	62.69	100	360	P	H
		10480	43.91	-24.39	68.3	52.59	37.86	16.15	62.69	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 1 5150~5250MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11n HT40 CH 38 5190MHz</b>		5149.76	58.77	-15.23	74	45.54	34.93	11.02	32.72	100	116	P	H
		5149.6	50.28	-3.72	54	37.05	34.93	11.02	32.72	100	116	A	H
	*	5194	102.37	-	-	89.06	34.98	11.03	32.7	100	116	P	H
		5194	94.05	-	-	80.74	34.98	11.03	32.7	100	116	A	H
		5380.92	53.56	-20.44	74	39.78	35.16	11.25	32.63	100	116	P	H
		5377.32	44.96	-9.04	54	31.22	35.14	11.23	32.63	100	116	A	H
		5149.12	56.79	-17.21	74	43.56	34.93	11.02	32.72	304	100	P	V
		5150	48.38	-5.62	54	35.15	34.93	11.02	32.72	304	100	A	V
	*	5194	100.01	-	-	86.7	34.98	11.03	32.7	304	100	P	V
		5194	91.94	-	-	78.63	34.98	11.03	32.7	304	100	A	V
		5360.04	55.03	-18.97	74	41.34	35.12	11.21	32.64	304	100	P	V
		5382	44.74	-9.26	54	30.96	35.16	11.25	32.63	304	100	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 38 5190MHz and 802.11n HT40 CH 46 5230MHz.



**Band 1 5150~5250MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
<b>802.11ac VHT80 CH 42 5210MHz</b>		5140.96	59.74	-14.26	74	46.52	34.93	11.02	32.73	104	224	P	H
		5149.44	49.94	-4.06	54	36.71	34.93	11.02	32.72	104	224	A	H
	*	5230	99.94	-	-	86.55	35.01	11.07	32.69	104	224	P	H
		5230	92.49	-	-	79.1	35.01	11.07	32.69	104	224	A	H
		5369.76	54.76	-19.24	74	41.03	35.14	11.23	32.64	104	224	P	H
		5353.02	45.68	-8.32	54	31.99	35.12	11.21	32.64	104	224	A	H
		5149.92	56.42	-17.58	74	43.19	34.93	11.02	32.72	322	100	P	V
		5149.98	48.15	-5.85	54	34.92	34.93	11.02	32.72	322	100	A	V
	*	5230	96.81	-	-	83.42	35.01	11.07	32.69	322	100	P	V
		5230	89.6	-	-	76.21	35.01	11.07	32.69	322	100	A	V
		5393.7	54.15	-19.85	74	40.37	35.16	11.25	32.63	322	100	P	V
		5369.04	45.73	-8.27	54	32	35.14	11.23	32.64	322	100	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10418.42	43.37	-24.93	68.3	52.12	37.81	16.09	62.65	100	360	P	H
CH 42 5210MHz		10418.42	44.62	-23.68	68.3	53.37	37.81	16.09	62.65	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz
WIFI 802.11a (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11a CH 64 5320MHz and a Remark section.



**Band 2 5250~5350MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52		10518.52	44.66	-23.64	68.3	53.32	37.88	16.18	62.72	300	0	P	H
5260MHz		10520	44.63	-23.67	68.3	53.29	37.88	16.18	62.72	100	360	P	V
802.11a CH 60		10600	44.31	-29.69	74	52.89	37.94	16.25	62.77	300	0	P	H
5300MHz		10600	45.7	-28.3	74	54.28	37.94	16.25	62.77	100	360	P	V
802.11a CH 64		10638.63	43.92	-30.08	74	52.46	37.97	16.28	62.79	100	360	P	H
5320MHz		10638.63	43	-31	74	51.54	37.97	16.28	62.79	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Band 2 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 64 5320MHz and a Remark section.



**Band 2 5250~5350MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10520	43.8	-24.5	68.3	52.46	37.88	16.18	62.72	100	360	P	H
CH 52		10520	43.91	-24.39	68.3	52.57	37.88	16.18	62.72	100	360	P	V
5260MHz													
802.11n HT20		10600	43.8	-30.2	74	52.38	37.94	16.25	62.77	100	360	P	H
CH 60		10600	43.91	-30.09	74	52.49	37.94	16.25	62.77	100	360	P	V
5300MHz													
802.11n HT20		10638.63	45.23	-28.77	74	53.77	37.97	16.28	62.79	100	360	P	H
CH 64		10638.63	43.36	-30.64	74	51.9	37.97	16.28	62.79	100	360	P	V
5320MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT40 CH 62 5310MHz and a Remark section.



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 10538.54 MHz and 10618.62 MHz.



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ac VHT80 CH 58 5290MHz and a Remark section.



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10578.58	43.34	-24.96	68.3	51.94	37.92	16.23	62.75	100	360	P	H
CH 58 5290MHz		10578.58	43.81	-24.49	68.3	52.41	37.92	16.23	62.75	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 100 5500MHz		5442.8	57.12	-16.88	74	43.18	35.21	11.34	32.61	102	231	P	H
		5469.68	58.88	-9.42	68.3	44.84	35.24	11.4	32.6	102	231	P	H
		5460	47.27	-6.73	54	33.28	35.22	11.37	32.6	102	231	A	H
	*	5500	109.33	-	-	95.17	35.27	11.47	32.58	102	231	P	H
		5500	101.78	-	-	87.62	35.27	11.47	32.58	102	231	A	H
		5353.04	55.08	-18.92	74	41.39	35.12	11.21	32.64	100	119	P	V
		5465.04	55.47	-12.83	68.3	41.43	35.24	11.4	32.6	100	119	P	V
		5459.76	45.6	-8.4	54	31.61	35.22	11.37	32.6	100	119	A	V
	*	5500	104.81	-	-	90.65	35.27	11.47	32.58	100	119	P	V
		5500	96.92	-	-	82.76	35.27	11.47	32.58	100	119	A	V
802.11a CH 140 5700MHz		5727.16	64.76	-3.54	68.3	50.21	35.32	11.95	32.72	100	227	P	H
	*	5698	110.26	-	-	95.75	35.35	11.86	32.7	100	227	P	H
		5698	102.7	-	-	88.19	35.35	11.86	32.7	100	227	A	H
		5732.68	59.75	-8.55	68.3	45.21	35.32	11.95	32.73	100	110	P	V
	*	5704	105.15	-	-	90.6	35.34	11.91	32.7	100	110	P	V
		5704	98.19	-	-	83.64	35.34	11.91	32.7	100	110	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include channels 100, 116, and 140 at various frequencies.





**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5457.52	57.08	-16.92	74	43.09	35.22	11.37	32.6	102	232	P	H
		5467.28	59.37	-8.93	68.3	45.33	35.24	11.4	32.6	102	232	P	H
		5459.76	46.78	-7.22	54	32.79	35.22	11.37	32.6	102	232	A	H
	*	5500	109	-	-	94.84	35.27	11.47	32.58	102	232	P	H
		5500	101.23	-	-	87.07	35.27	11.47	32.58	102	232	A	H
		5444.4	54.95	-19.05	74	41.01	35.21	11.34	32.61	279	108	P	V
		5469.84	55.8	-12.5	68.3	41.76	35.24	11.4	32.6	279	108	P	V
		5460	45.33	-8.67	54	31.34	35.22	11.37	32.6	279	108	A	V
	*	5500	105.31	-	-	91.15	35.27	11.47	32.58	279	108	P	V
	5500	97.62	-	-	83.46	35.27	11.47	32.58	279	108	A	V	
802.11n HT20 CH 140 5700MHz		5729.96	64.32	-3.98	68.3	49.78	35.32	11.95	32.73	100	227	P	H
	*	5698	108.29	-	-	93.78	35.35	11.86	32.7	100	227	P	H
		5698	100.95	-	-	86.44	35.35	11.86	32.7	100	227	A	H
		5726.6	56.46	-11.84	68.3	41.91	35.32	11.95	32.72	100	110	P	V
	*	5698	102.84	-	-	88.33	35.35	11.86	32.7	100	110	P	V
	5698	95.63	-	-	81.12	35.35	11.86	32.7	100	110	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100		10999	42.28	-31.72	74	50.46	38.23	16.59	63	100	360	P	H
5500MHz		10999	41.78	-32.22	74	49.96	38.23	16.59	63	100	360	P	V
802.11n HT20 CH 116		11159.16	42.82	-31.18	74	50.44	38.35	16.79	62.76	100	360	P	H
5580MHz		11159.16	44.48	-29.52	74	52.1	38.35	16.79	62.76	100	360	P	V
802.11n HT20 CH 140		11399.39	45.19	-28.81	74	52.03	38.53	17.06	62.43	100	360	P	H
5700MHz		11399.39	44.52	-29.48	74	51.36	38.53	17.06	62.43	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 102 5510MHz		5459.92	57.55	-16.45	74	43.56	35.22	11.37	32.6	100	231	P	H
		5469.36	61.42	-6.88	68.3	47.38	35.24	11.4	32.6	100	231	P	H
		5460	50.17	-3.83	54	36.18	35.22	11.37	32.6	100	231	A	H
	*	5512	104.43	-	-	90.27	35.27	11.47	32.58	100	231	P	H
		5512	96.45	-	-	82.29	35.27	11.47	32.58	100	231	A	H
		5763.56	55.87	-12.43	68.3	41.3	35.29	12.03	32.75	100	231	P	H
		5458.48	55.18	-18.82	74	41.19	35.22	11.37	32.6	278	108	P	V
		5468.56	57.99	-10.31	68.3	43.95	35.24	11.4	32.6	278	108	P	V
		5460	46.85	-7.15	54	32.86	35.22	11.37	32.6	278	108	A	V
	*	5506	100.25	-	-	86.09	35.27	11.47	32.58	278	108	P	V
		5506	92.16	-	-	78	35.27	11.47	32.58	278	108	A	V
		5748.44	54.82	-13.48	68.3	40.25	35.31	11.99	32.73	278	108	P	V
802.11n HT40 CH 134 5670MHz		5373.04	55.03	-18.97	74	41.3	35.14	11.23	32.64	100	225	P	H
		5466.32	53.63	-14.67	68.3	39.59	35.24	11.4	32.6	100	225	P	H
		5456.4	45.38	-8.62	54	31.39	35.22	11.37	32.6	100	225	A	H
	*	5674	106.22	-	-	91.72	35.37	11.82	32.69	100	225	P	H
		5674	98.68	-	-	84.18	35.37	11.82	32.69	100	225	A	H
		5728.04	62.42	-5.88	68.3	47.87	35.32	11.95	32.72	100	225	P	H
		5455.92	54.48	-19.52	74	40.49	35.22	11.37	32.6	100	119	P	V
		5461.04	53.61	-14.69	68.3	39.62	35.22	11.37	32.6	100	119	P	V
		5459.44	45.28	-8.72	54	31.29	35.22	11.37	32.6	100	119	A	V
	*	5674	100.7	-	-	86.2	35.37	11.82	32.69	100	119	P	V
	5674	93.62	-	-	79.12	35.37	11.82	32.69	100	119	A	V	
	5745.88	57.04	-11.26	68.3	42.47	35.31	11.99	32.73	100	119	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11019.02	42.19	-31.81	74	50.32	38.24	16.61	62.98	100	360	P	H
CH 102		11019.02	42.93	-31.07	74	51.06	38.24	16.61	62.98	100	360	P	V
5510MHz													
802.11n HT40		11339.33	44.36	-29.64	74	51.43	38.48	16.98	62.53	100	360	P	H
CH 134		11339.33	44.69	-29.31	74	51.76	38.48	16.98	62.53	100	360	P	V
5670MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 106 5530MHz		5450.64	58.34	-15.66	74	44.35	35.22	11.37	32.6	100	233	P	H
		5467.92	57.77	-10.53	68.3	43.73	35.24	11.4	32.6	100	233	P	H
		5458.32	50.5	-3.5	54	36.51	35.22	11.37	32.6	100	233	A	H
	*	5530	99.18	-	-	84.99	35.29	11.5	32.6	100	233	P	H
		5530	91.5	-	-	77.31	35.29	11.5	32.6	100	233	A	H
		5755.8	55.29	-13.01	68.3	40.72	35.29	12.03	32.75	100	233	P	H
		5458.8	55	-19	74	41.01	35.22	11.37	32.6	325	97	P	V
		5467.76	55.11	-13.19	68.3	41.07	35.24	11.4	32.6	325	97	P	V
		5458	47.36	-6.64	54	33.37	35.22	11.37	32.6	325	97	A	V
	*	5512	94.51	-	-	80.35	35.27	11.47	32.58	325	97	P	V
		5512	86.97	-	-	72.81	35.27	11.47	32.58	325	97	A	V
		5734.12	55.28	-13.02	68.3	40.74	35.32	11.95	32.73	325	97	P	V
802.11ac VHT80 CH 122 5610MHz		5432.24	54.74	-19.26	74	40.8	35.21	11.34	32.61	100	226	P	H
		5460.56	54.38	-13.92	68.3	40.39	35.22	11.37	32.6	100	226	P	H
		5456.88	46.36	-7.64	54	32.37	35.22	11.37	32.6	100	226	A	H
	*	5602	102.58	-	-	88.19	35.37	11.66	32.64	100	226	P	H
		5602	95.03	-	-	80.64	35.37	11.66	32.64	100	226	A	H
		5726.04	57.09	-11.21	68.3	42.54	35.32	11.95	32.72	100	226	P	H
		5435.92	55.08	-18.92	74	41.14	35.21	11.34	32.61	301	105	P	V
		5464.08	53.66	-14.64	68.3	39.62	35.24	11.4	32.6	301	105	P	V
		5457.68	46.14	-7.86	54	32.15	35.22	11.37	32.6	301	105	A	V
	*	5602	98.33	-	-	83.94	35.37	11.66	32.64	301	105	P	V
	5602	90.62	-	-	76.23	35.37	11.66	32.64	301	105	A	V	
	5727.96	56.42	-11.88	68.3	41.87	35.32	11.95	32.72	301	105	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ac VHT80 CH 106 5530MHz and CH 122 5610MHz, plus a Remark section.



**Band 3 - Straddle Channel**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
<b>802.11a</b> <b>CH 144</b> <b>5720MHz</b>		5722	110.7	-	-	94.6	35.08	11.84	30.82	400	0	P	H
		5722	103.14	-	-	87.04	35.08	11.84	30.82	400	0	A	H
		5722	103.98	-	-	87.88	35.08	11.84	30.82	100	0	P	V
		5722	96.12	-	-	80.02	35.08	11.84	30.82	100	0	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). It contains two data rows for 802.11a CH 144 at 5720MHz and a Remark section with two points.





Band 3 - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11n HT20, CH 144, and 5720MHz, plus a Remark section.



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 144 and a Remark section.



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11n HT40, CH 142, and 5710MHz.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). It contains two rows of test data and a Remark section.



Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11ac VHT80, CH 138, and 5690MHz.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ac VHT80 and CH 138 5690MHz, and a Remark section.



**Emission below 1GHz**  
**5GHz WIFI 802.11ac VHT80 (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
<b>5GHz</b> <b>802.11ac</b> <b>VHT80</b> <b>LF</b>		30.97	19.82	-20.18	40	27.27	24.57	1.26	33.28			P	H
		52.31	17.41	-22.59	40	35.04	13.9	1.63	33.16			P	H
		152.22	21.06	-22.44	43.5	34.5	16.98	2.78	33.2			P	H
		270.56	26.12	-19.88	46	35.88	19.67	3.71	33.14			P	H
		461.65	21.57	-24.43	46	26.3	23.31	4.84	32.88			P	H
		866.14	28.1	-17.9	46	24.43	29.23	6.61	32.17	100	0	P	H
		30	23.51	-16.49	40	30.47	25.1	1.24	33.3			P	V
		53.28	24.09	-15.91	40	41.93	13.65	1.65	33.14	100	0	P	V
		96.93	19.94	-23.56	43.5	35.05	15.71	2.22	33.04			P	V
		267.65	20.01	-25.99	46	29.58	19.87	3.69	33.13			P	V
		727.43	26.23	-19.77	46	25.1	27.52	6.06	32.45			P	V
	933.07	28.57	-17.43	46	23.37	30.37	6.86	32.03			P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location

Band 2 - 5250~5350MHz

WIFI 802.11ac VHT80&Part27F B13 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
11ac VHT80 CH58 &Part27F B13		5102.4	56.76	-17.24	74	43.61	34.88	11.01	32.74	111	119	P	H
		5120.96	46.01	-7.99	54	32.83	34.9	11.01	32.73	111	119	A	H
	*	5296	97.5	-	-	83.94	35.08	11.15	32.67	111	119	P	H
		5296	89.34	-	-	75.78	35.08	11.15	32.67	111	119	A	H
		5358.4	56.87	-17.13	74	43.18	35.12	11.21	32.64	111	119	P	H
		5350.3	48.79	-5.21	54	35.11	35.12	11.21	32.65	111	119	A	H
		5135.84	54.44	-19.56	74	41.24	34.91	11.02	32.73	103	133	P	V
		5108.64	45.8	-8.2	54	32.63	34.9	11.01	32.74	103	133	A	V
	*	5296	92.09	-	-	78.53	35.08	11.15	32.67	103	133	P	V
		5296	84.69	-	-	71.13	35.08	11.15	32.67	103	133	A	V
		5384.4	56.41	-17.59	74	42.63	35.16	11.25	32.63	103	133	P	V
		5354.1	46.95	-7.05	54	33.26	35.12	11.21	32.64	103	133	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Band 2 5250~5350MHz

WIFI 802.11ac VHT80&Part27F B13 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
11ac VHT80		10580	44.23	-24.07	68.3	52.82	37.93	16.24	62.76	300	0	P	H
CH58 &Part27F B13		10580	45.83	-22.47	68.3	54.42	37.93	16.24	62.76	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.BLE&11ac VHT80 CH58 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.BLE CH 39 2480MHz		2483.68	58.68	-15.32	74	51.7	32.86	7.55	33.43	108	120	P	H
		2483.5	50.81	-3.19	54	43.83	32.86	7.55	33.43	108	120	A	H
		2480	102.71	-	-	95.73	32.86	7.55	33.43	108	120	P	H
		2480	101.17	-	-	94.19	32.86	7.55	33.43	108	120	A	H
		2483.8	55.86	-18.14	74	48.88	32.86	7.55	33.43	380	53	P	V
		2483.5	48.54	-5.46	54	41.56	32.86	7.55	33.43	380	53	A	V
		2480	99.14	-	-	92.16	32.86	7.55	33.43	380	53	P	V
		2480	97.68	-	-	90.7	32.86	7.55	33.43	380	53	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.BLE&11ac VHT80 CH58 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802. 11ac VHT80 CH58		5104.48	56.12	-17.88	74	42.97	34.88	11.01	32.74	100	233	P	H
		5108.96	46.07	-7.93	54	32.9	34.9	11.01	32.74	100	233	A	H
		5290	97.48	-	-	83.96	35.06	11.13	32.67	100	233	P	H
		5290	89.87	-	-	76.35	35.06	11.13	32.67	100	233	A	H
		5351.7	63.14	-10.86	74	49.46	35.12	11.21	32.65	100	233	P	H
		5350.3	50.41	-3.59	54	36.73	35.12	11.21	32.65	100	233	A	H
		5122.88	54.33	-19.67	74	41.13	34.91	11.02	32.73	286	85	P	V
		5112.16	46.02	-7.98	54	32.85	34.9	11.01	32.74	286	85	A	V
		5290	92.08	-	-	78.56	35.06	11.13	32.67	286	85	P	V
		5290	84.56	-	-	71.04	35.06	11.13	32.67	286	85	A	V
		5361.3	54.94	-19.06	74	41.21	35.14	11.23	32.64	286	85	P	V
		5350.3	46.22	-7.78	54	32.54	35.12	11.21	32.65	286	85	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.BLE(Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.BLE CH 39 2480MHz and a Remark section.



Band 2 5250~5350MHz

WIFI 802.BLE&11ac VHT80 CH58 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
11ac VHT80 CH58		10578.58	43.88	-24.42	68.3	52.48	37.92	16.23	62.75	100	360	P	H
		10578.58	43.81	-24.49	68.3	52.41	37.92	16.23	62.75	100	360	P	V



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**


1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	-	-	10Hz
802.11n HT20	98.15	-	-	10Hz
802.11n HT40	96.32	0.949	1.053	1.1KHz
802.11ac VHT80	92.15	0.459	2.177	2.2KHz

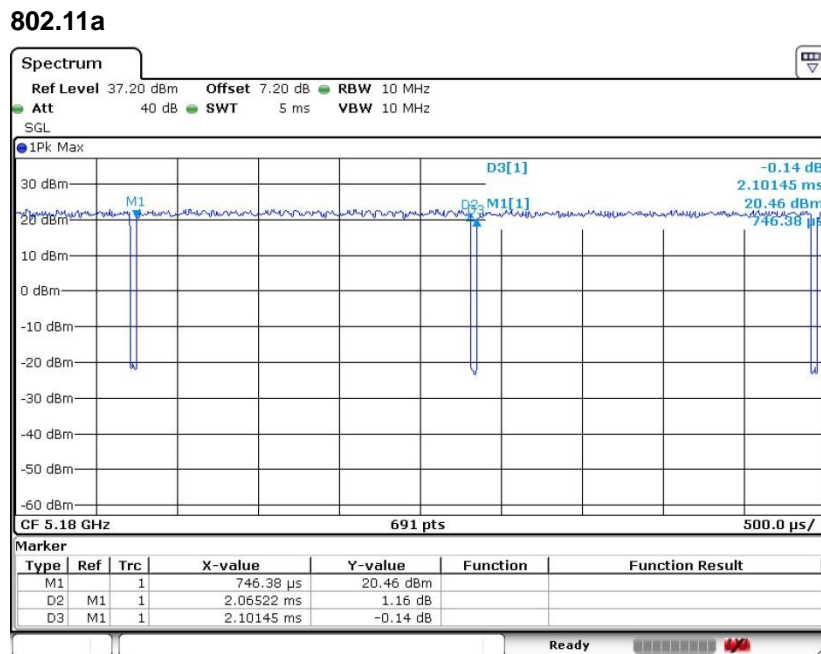






802.11n HT20

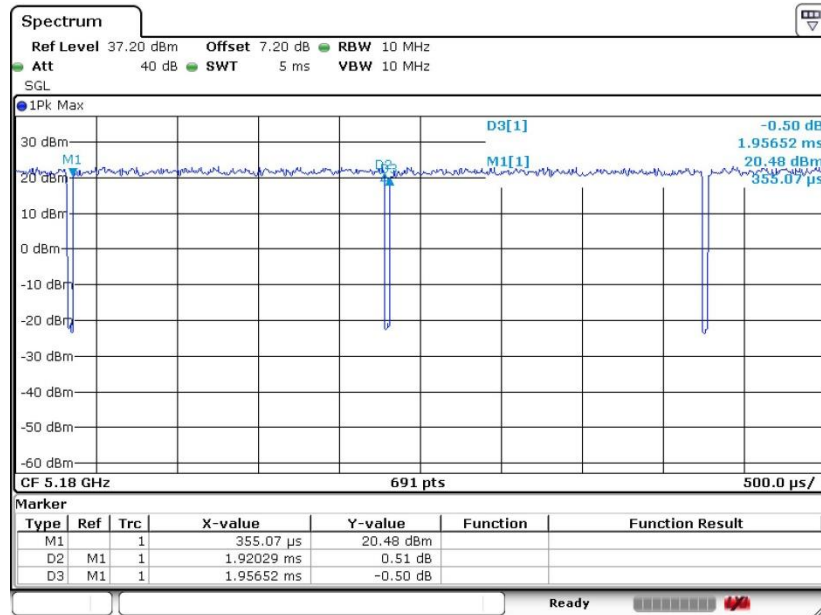

802.11n HT40

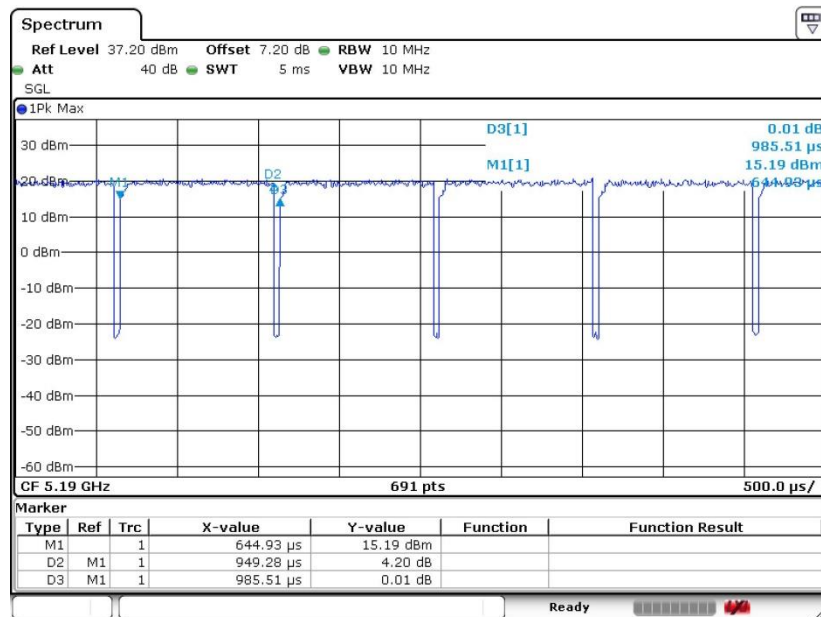



802.11ac VHT80

