



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2149-1  
**FCC ID** : IHDT56ZW1  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Apr. 22, 2021 ~ May. 11, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*Alex Wang*

Approved by: Alex Wang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Test Software ..... 7

    1.8 Applicable Standards ..... 7

    1.9 Specification of Accessory ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 12

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

    3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 16

    3.3 Power Spectral Density Measurement ..... 18

    3.4 Unwanted Emissions Measurement ..... 21

    3.5 AC Conducted Emission Measurement ..... 26

    3.6 Automatically Discontinue Transmission ..... 28

    3.7 Antenna Requirements ..... 29

**4 LIST OF MEASURING EQUIPMENT ..... 30**

**5 UNCERTAINTY OF EVALUATION ..... 31**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR141508E	Rev. 01	Initial issue of report	May. 21, 2021



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.03 dB at 5149.980 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.67 dB at 7.687 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	15.203	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2149-1
FCC ID	IHDT56ZW1
EUT supports Radios application	GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted: N/A Conduction: 358869830031858 Radiation: 358869830031650
HW Version	DVT2
SW Version	RRS31.Q2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
<b>Maximum Output Power to Antenna</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>                      802.11a : 18.23 dBm / 0.0665 W                      802.11n HT20 : 18.14 dBm / 0.0652 W                      802.11ac VHT40 : 15.96 dBm / 0.0394 W                      802.11ac VHT80 : 12.59 dBm / 0.0182 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>                      802.11a : 18.17 dBm / 0.0656 W                      802.11n HT20 : 18.09 dBm / 0.0644 W                      802.11ac VHT40 : 16.01 dBm / 0.0399 W                      802.11ac VHT80 : 12.21 dBm / 0.0166 W</p> <p><b>&lt;5500 MHz ~ 5700 MHz &gt;</b>                      802.11a : 18.08 dBm / 0.0643 W                      802.11n HT20 : 18.18 dBm / 0.0658 W                      802.11ac VHT40 : 16.05 dBm / 0.0403 W                      802.11ac VHT80 : 12.41 dBm / 0.0174 W</p>
<b>99% Occupied Bandwidth</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>                      802.11a : 18.18 MHz                      802.11n HT20 : 19.53 MHz                      802.11ac VHT40 : 36.36 MHz                      802.11ac VHT80 : 75.40 MHz</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>                      802.11a : 18.28 MHz                      802.11n HT20 : 19.48 MHz                      802.11ac VHT40 : 36.46 MHz                      802.11ac VHT80 : 75.40 MHz</p> <p><b>&lt;5500 MHz ~ 5700 MHz &gt;</b>                      802.11a : 18.63 MHz                      802.11n HT20 : 20.18 MHz                      802.11ac VHT40 : 36.66 MHz                      802.11ac VHT80 : 75.52 MHz</p>
<b>Antenna Type / Gain</b>	<p><b>&lt;5180 MHz ~ 5240 MHz &gt;</b>                      IFA Antenna with gain -3.90 dBi</p> <p><b>&lt;5260 MHz ~ 5320 MHz &gt;</b>                      IFA Antenna with gain -2.90 dBi</p> <p><b>&lt;5500 MHz ~ 5700 MHz &gt;</b>                      IFA Antenna with gain -2.80 dBi</p>
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

**Note:**

1. WLAN operation in 5600 MHz ~ 5650 MHz is notched.
2. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20 and 802.11ac VHT40 by referring to the higher output power.



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



### 1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola (Salom)	Model Name	MC-101
AC Adapter 2(AU)	Brand Name	Motorola (Salom)	Model Name	MC-105
AC Adapter 3(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 3(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 4(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 4(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-202
AC Adapter 4(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-203
AC Adapter 4(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-207
AC Adapter 5(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 5(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-202
AC Adapter 5(UK)	Brand Name	Motorola (Acbel)	Model Name	MC-203
AC Adapter 5(KR)	Brand Name	Motorola (Acbel)	Model Name	MC-210
AC Adapter 5(Chile)	Brand Name	Motorola (Acbel)	Model Name	MC-209
AC Adapter 6(BR Local build)	Brand Name	Motorola(Flex)	Model Name	MC-207
AC Adapter 7(BR Local build)	Brand Name	Motorola(Salcomp)	Model Name	MC-207
Battery 1	Brand Name	Motorola (ATL)	Model Name	MS50
Battery 2	Brand Name	Motorola (Jiade)	Model Name	MS50
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	MH191(SH38C81577)
Earphone 2	Brand Name	Motorola(LCHSE)	Model Name	MH191(SH38C81576)
Earphone 3	Brand Name	Motorola (New Leader)	Model Name	MH202(S928D09678 )
USB Cable 1	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
USB Cable 2	Brand Name	Motorola (BRL)	Model Name	S928D13694
USB Cable 3	Brand Name	Motorola (Hexin)	Model Name	S928D13695





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5720 MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + Earphone 3 + USB Cable 3(Charging from Adapter 27)
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter 2, Battery 2, Earphone 2 and USB Cable 2.	



Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500-5720MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500-5720MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500-5720MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134


Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500-5720MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-

## 2.3 Connection Diagram of Test System

For Radiated Emission

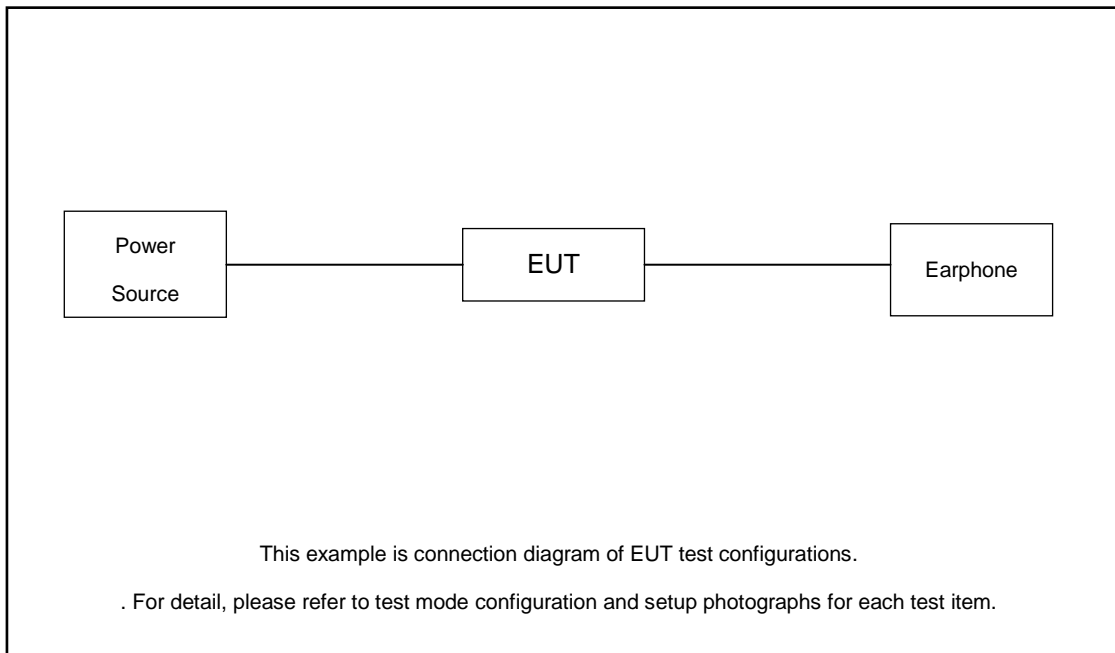

For Conducted Emission

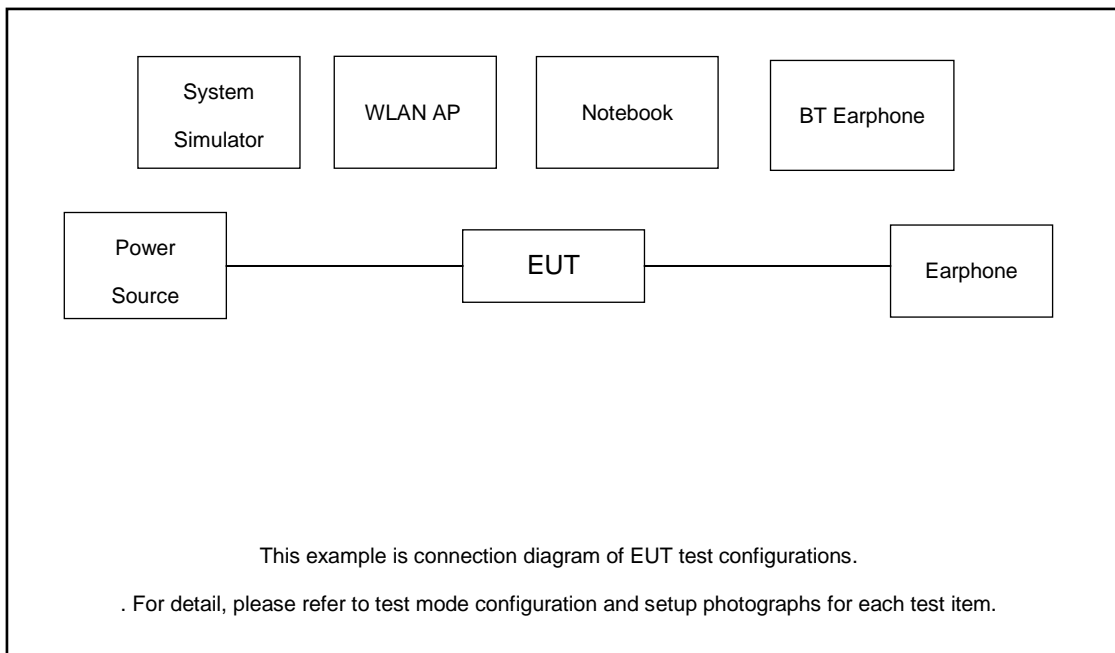



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	SD Card	Kingston	8GB	N/A	N/A	N/A

### 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.2 dB

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
&= 7.2 \text{ (dB)}
\end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.



##### 3.1.4 Test Setup

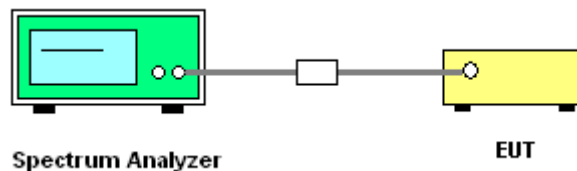



### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

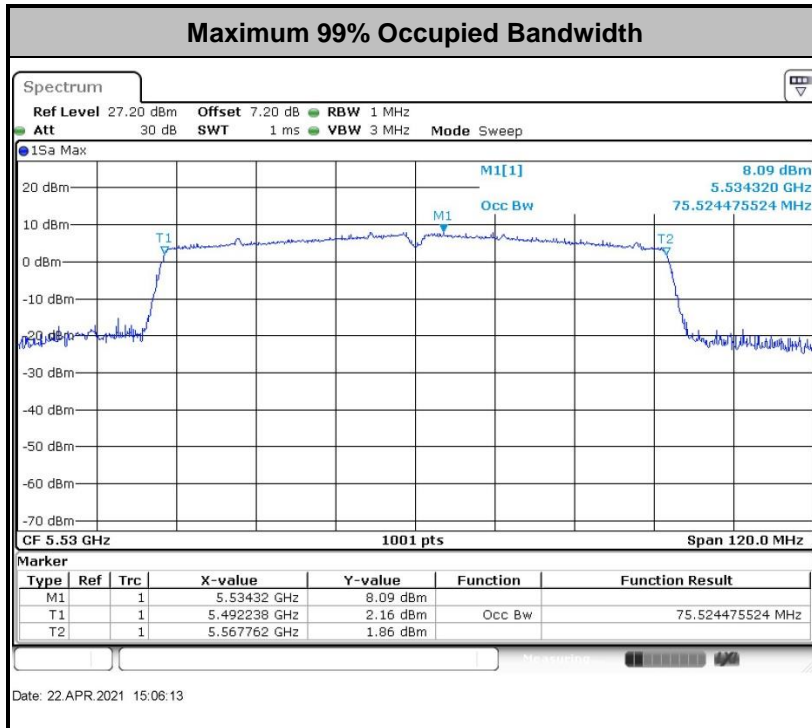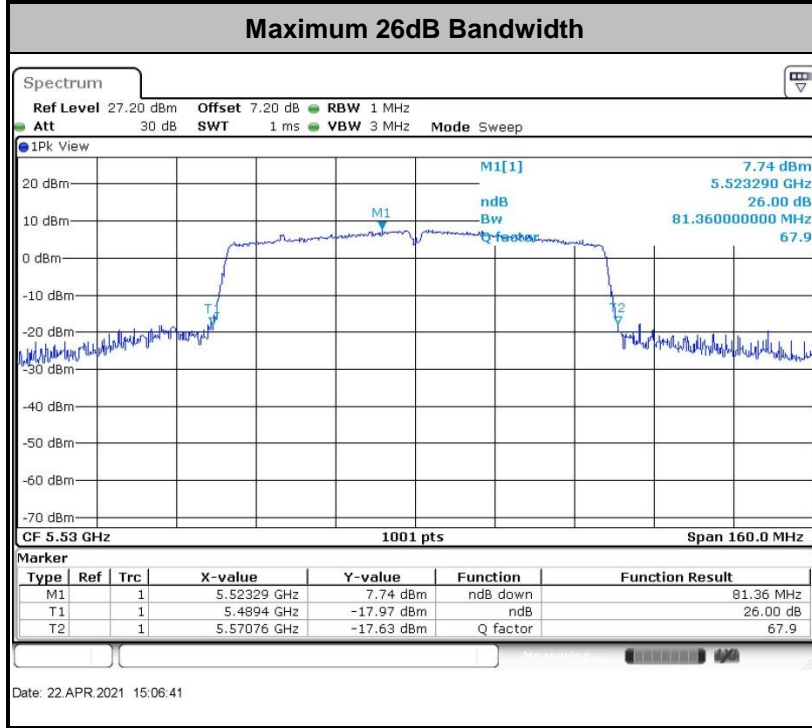

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm  $10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

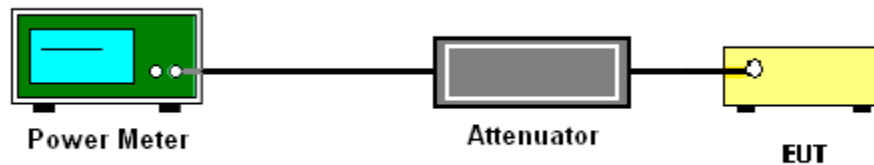

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


### 3.3.4 Test Setup

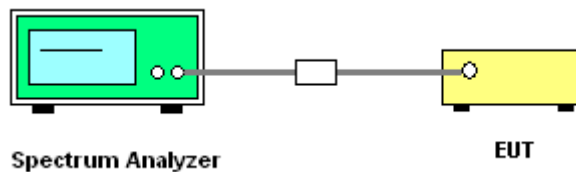



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

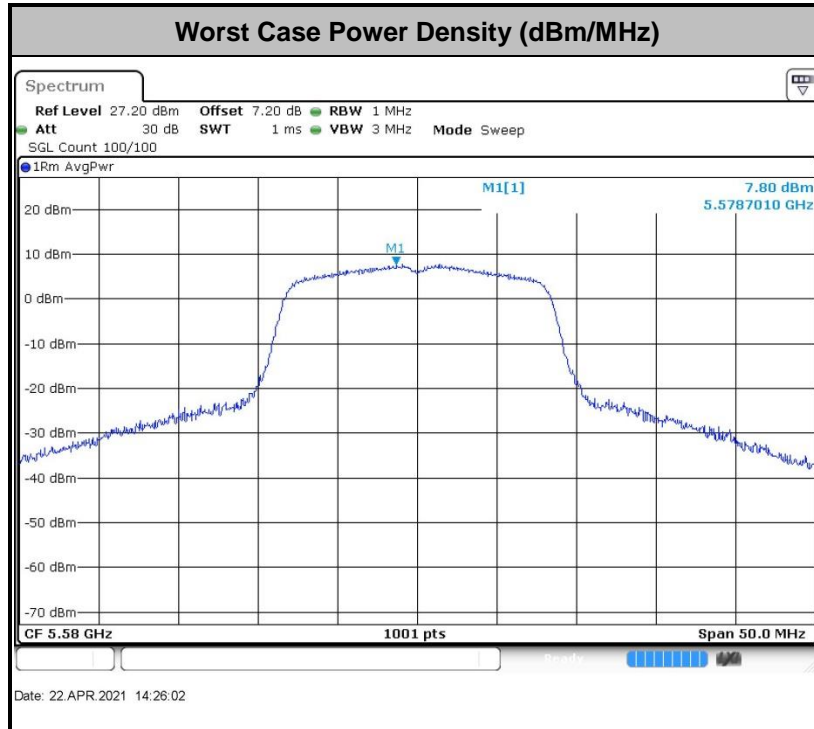



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{Meas}$  is the field strength of the emission at the measurement distance, in dBµV/m

$d_{Meas}$  is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup

For radiated emissions below 30MHz

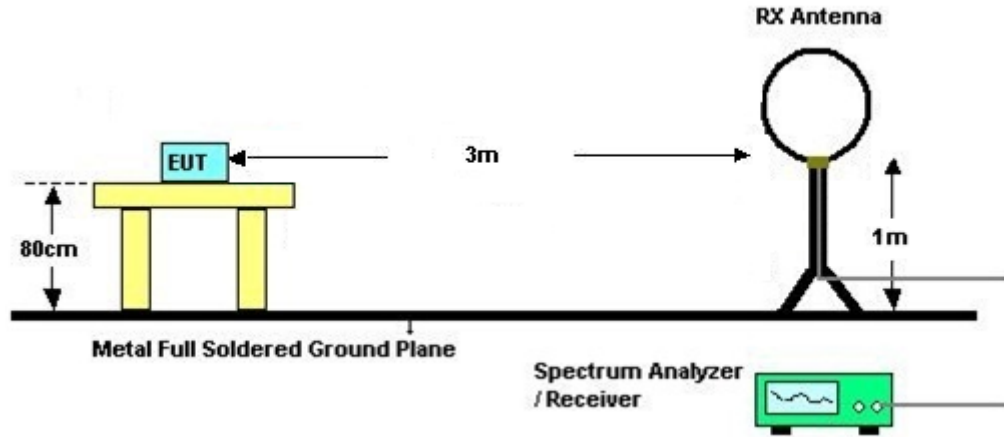


For radiated emissions from 30MHz to 1GHz

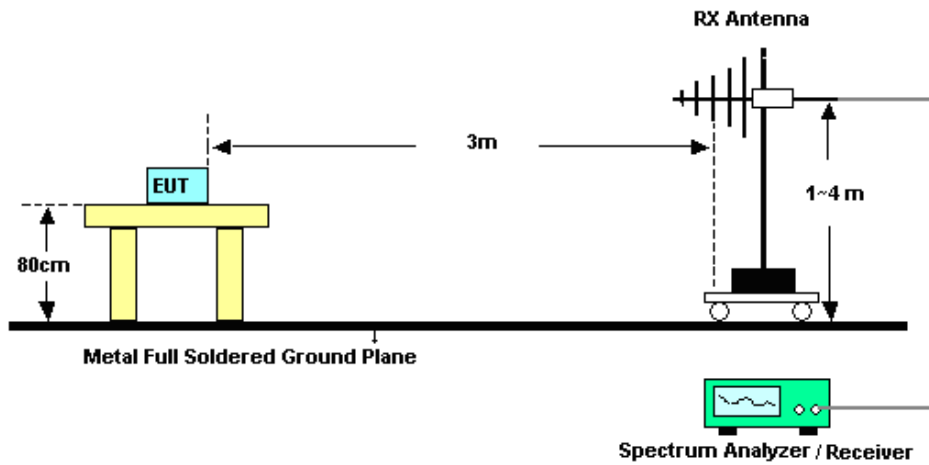



For radiated emissions above 1GHz

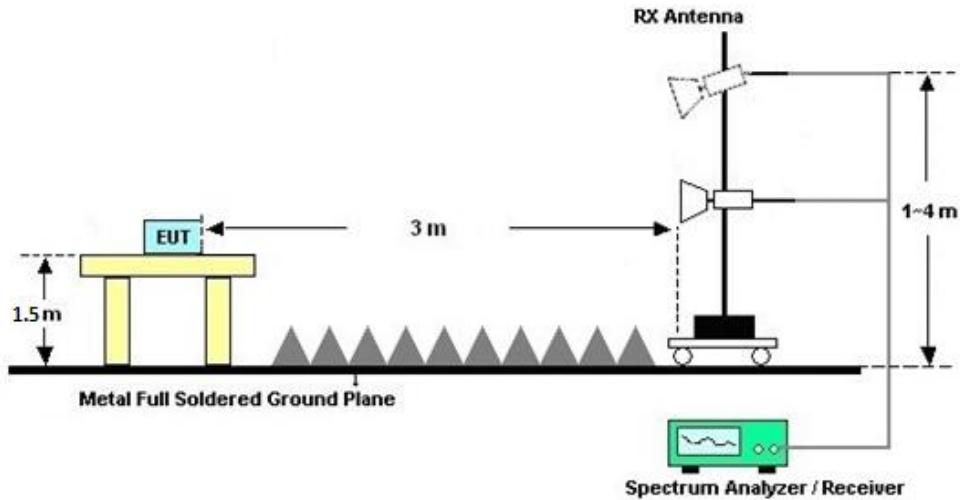

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.4.7 Duty Cycle

Please refer to Appendix D.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

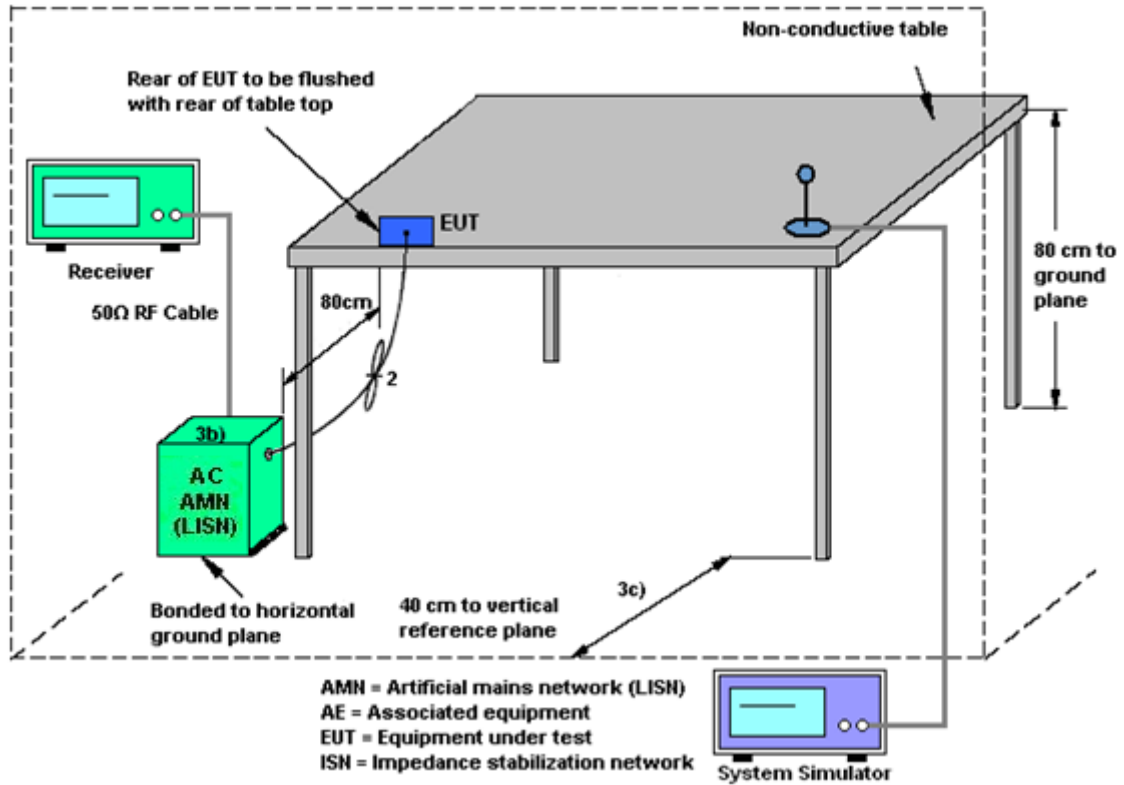

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Apr. 22, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Apr. 22, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Apr. 22, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	May. 10, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr.13, 2021	May. 10, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	May. 10, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May. 30, 2020	May. 10, 2021	May. 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	May. 10, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	May. 10, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 12, 2021	May. 10, 2021	Apr. 11, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	May. 10, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 17, 2020	May. 10, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	May. 10, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May. 10, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May. 10, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May. 10, 2021	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	May. 11, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	May. 11, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	May. 11, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	May. 11, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



## **Appendix A. Conducted Test Results**



Test Engineer:	Lex Wu	Temperature:	21~25	°C
Test Date:	2021/4/22	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band I										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.18	23.88	-	22.60		
11a	6Mbps	1	44	5220	18.13	25.97	-	22.58		
11a	6Mbps	1	48	5240	18.18	25.13	-	22.60		
HT20	MCS0	1	36	5180	19.13	24.13	-	22.82		
HT20	MCS0	1	44	5220	19.23	27.17	-	22.84		
HT20	MCS0	1	48	5240	19.53	28.82	-	22.91		
VHT40	MCS0	1	38	5190	36.36	41.45	-	23.01		
VHT40	MCS0	1	46	5230	36.26	41.54	-	23.01		
VHT80	MCS0	1	42	5210	75.40	81.04	-	23.01		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band I										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.11	15.83	24.00	-3.90		Pass
11a	6Mbps	1	44	5220	0.11	18.02	24.00	-3.90		Pass
11a	6Mbps	1	48	5240	0.11	18.23	24.00	-3.90		Pass
HT20	MCS0	1	36	5180	0.12	15.81	24.00	-3.90		Pass
HT20	MCS0	1	44	5220	0.12	18.14	24.00	-3.90		Pass
HT20	MCS0	1	48	5240	0.12	18.05	24.00	-3.90		Pass
HT40	MCS0	1	38	5190	0.12	13.30	24.00	-3.90		Pass
HT40	MCS0	1	46	5230	0.12	15.84	24.00	-3.90		Pass
VHT20	MCS0	1	36	5180	0.14	15.96	24.00	-3.90		Pass
VHT20	MCS0	1	44	5220	0.14	16.03	24.00	-3.90		Pass
VHT20	MCS0	1	48	5240	0.14	16.05	24.00	-3.90		Pass
VHT40	MCS0	1	38	5190	0.12	13.33	24.00	-3.90		Pass
VHT40	MCS0	1	46	5230	0.12	15.96	24.00	-3.90		Pass
VHT80	MCS0	1	42	5210	0.24	12.59	24.00	-3.90		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.11	5.91	11.00	-3.90		Pass
11a	6Mbps	1	44	5220	0.11	7.78	11.00	-3.90		Pass
11a	6Mbps	1	48	5240	0.11	7.89	11.00	-3.90		Pass
HT20	MCS0	1	36	5180	0.12	5.70	11.00	-3.90		Pass
HT20	MCS0	1	44	5220	0.12	7.49	11.00	-3.90		Pass
HT20	MCS0	1	48	5240	0.12	7.64	11.00	-3.90		Pass
VHT40	MCS0	1	38	5190	0.12	0.16	11.00	-3.90		Pass
VHT40	MCS0	1	46	5230	0.12	2.54	11.00	-3.90		Pass
VHT80	MCS0	1	42	5210	0.24	-3.49	11.00	-3.90		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band II											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note	
11a	6M bps	1	52	5260	18.28	25.08	23.62	29.62	23.98		
11a	6M bps	1	60	5300	18.28	24.53	23.62	29.62	23.98		
11a	6M bps	1	64	5320	18.23	24.23	23.61	29.61	23.98		
HT20	MCS 0	1	52	5260	19.38	26.72	23.87	29.87	23.98		
HT20	MCS 0	1	60	5300	19.48	28.37	23.90	29.90	23.98		
HT20	MCS 0	1	64	5320	19.43	29.77	23.88	29.88	23.98		
VHT40	MCS 0	1	54	5270	36.36	41.54	23.98	30.00	23.98		
VHT40	MCS 0	1	62	5310	36.46	41.45	23.98	30.00	23.98		
VHT80	MCS 0	1	58	5290	75.40	81.04	23.98	30.00	23.98		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.11	18.17	23.98	-2.90	26.99	Pass
11a	6M bps	1	60	5300	0.11	18.10	23.98	-2.90	26.99	Pass
11a	6M bps	1	64	5320	0.11	16.11	23.98	-2.90	26.99	Pass
HT20	MCS 0	1	52	5260	0.12	18.09	23.98	-2.90	26.99	Pass
HT20	MCS 0	1	60	5300	0.12	18.03	23.98	-2.90	26.99	Pass
HT20	MCS 0	1	64	5320	0.12	15.07	23.98	-2.90	26.99	Pass
HT40	MCS 0	1	54	5270	0.12	15.87	23.98	-2.90	26.99	Pass
HT40	MCS 0	1	62	5310	0.12	13.86	23.98	-2.90	26.99	Pass
VHT20	MCS 0	1	52	5260	0.14	16.17	23.98	-2.90	26.99	Pass
VHT20	MCS 0	1	60	5300	0.14	16.02	23.98	-2.90	26.99	Pass
VHT20	MCS 0	1	64	5320	0.14	14.99	23.98	-2.90	26.99	Pass
VHT40	MCS 0	1	54	5270	0.12	16.01	23.98	-2.90	26.99	Pass
VHT40	MCS 0	1	62	5310	0.12	14.06	23.98	-2.90	26.99	Pass
VHT80	MCS 0	1	58	5290	0.24	12.21	23.98	-2.90	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.11	7.71	11.00	-2.90		Pass
11a	6M bps	1	60	5300	0.11	7.87	11.00	-2.90		Pass
11a	6M bps	1	64	5320	0.11	5.44	11.00	-2.90		Pass
HT20	MCS 0	1	52	5260	0.12	7.32	11.00	-2.90		Pass
HT20	MCS 0	1	60	5300	0.12	7.31	11.00	-2.90		Pass
HT20	MCS 0	1	64	5320	0.12	4.88	11.00	-2.90		Pass
VHT40	MCS 0	1	54	5270	0.12	2.47	11.00	-2.90		Pass
VHT40	MCS 0	1	62	5310	0.12	1.60	11.00	-2.90		Pass
VHT80	MCS 0	1	58	5290	0.24	-3.86	11.00	-2.90		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band III											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note	
11a	6M bps	1	100	5500	18.23	27.72	23.61	29.61	23.98		
11a	6M bps	1	116	5580	18.63	25.62	23.70	29.70	23.98		
11a	6M bps	1	140	5700	18.43	26.57	23.66	29.66	23.98		
HT20	MCS 0	1	100	5500	19.93	30.97	23.98	30.00	23.98		
HT20	MCS 0	1	116	5580	19.43	30.37	23.88	29.88	23.98		
HT20	MCS 0	1	140	5700	20.18	29.32	23.98	30.00	23.98		
VHT40	MCS 0	1	102	5510	36.66	41.72	23.98	30.00	23.98		
VHT40	MCS 0	1	110	5550	36.46	41.45	23.98	30.00	23.98		
VHT40	MCS 0	1	134	5670	36.56	41.81	23.98	30.00	23.98		
VHT80	MCS 0	1	106	5530	75.52	81.36	23.98	30.00	23.98		



**TEST RESULTS DATA**  
**Average Power Table**

FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.11	15.70	23.98	-2.80	26.99	Pass
11a	6M bps	1	116	5580	0.11	18.08	23.98	-2.80	26.99	Pass
11a	6M bps	1	140	5700	0.11	15.59	23.98	-2.80	26.99	Pass
HT20	MCS 0	1	100	5500	0.12	15.69	23.98	-2.80	26.99	Pass
HT20	MCS 0	1	116	5580	0.12	18.18	23.98	-2.80	26.99	Pass
HT20	MCS 0	1	140	5700	0.12	14.00	23.98	-2.80	26.99	Pass
HT40	MCS 0	1	102	5510	0.12	13.74	23.98	-2.80	26.99	Pass
HT40	MCS 0	1	110	5550	0.12	15.83	23.98	-2.80	26.99	Pass
HT40	MCS 0	1	134	5670	0.12	15.87	23.98	-2.80	26.99	Pass
VHT20	MCS 0	1	100	5500	0.14	15.54	23.98	-2.80	26.99	Pass
VHT20	MCS 0	1	116	5580	0.14	16.15	23.98	-2.80	26.99	Pass
VHT20	MCS 0	1	140	5700	0.14	13.54	23.98	-2.80	26.99	Pass
VHT40	MCS 0	1	102	5510	0.12	13.99	23.98	-2.80	26.99	Pass
VHT40	MCS 0	1	110	5550	0.12	16.05	23.98	-2.80	26.99	Pass
VHT40	MCS 0	1	134	5670	0.12	15.94	23.98	-2.80	26.99	Pass
VHT80	MCS 0	1	106	5530	0.24	12.41	23.98	-2.80	26.99	Pass


**TEST RESULTS DATA**  
**Power Spectral Density**

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.11	5.24	11.00	-2.80		Pass
11a	6M bps	1	116	5580	0.11	7.91	11.00	-2.80		Pass
11a	6M bps	1	140	5700	0.11	5.46	11.00	-2.80		Pass
HT20	MCS 0	1	100	5500	0.12	5.52	11.00	-2.80		Pass
HT20	MCS 0	1	116	5580	0.12	7.45	11.00	-2.80		Pass
HT20	MCS 0	1	140	5700	0.12	3.82	11.00	-2.80		Pass
VHT40	MCS 0	1	102	5510	0.12	1.20	11.00	-2.80		Pass
VHT40	MCS 0	1	110	5550	0.12	3.05	11.00	-2.80		Pass
VHT40	MCS 0	1	134	5670	0.12	2.70	11.00	-2.80		Pass
VHT80	MCS 0	1	106	5530	0.24	-4.30	11.00	-2.80		Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

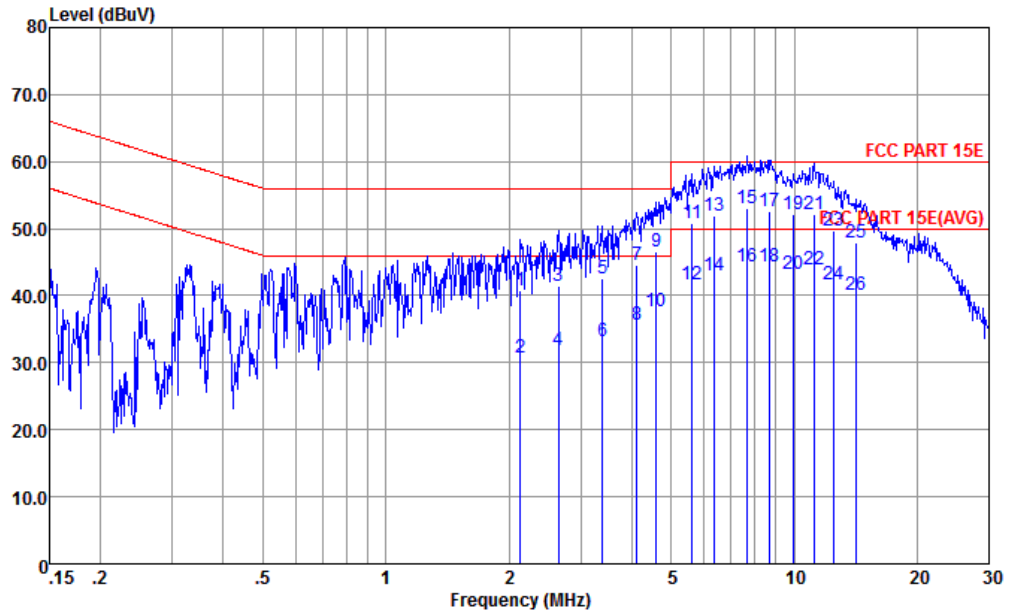


Site : CO01-KS  
Condition : FCC PART 15E TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	2.133	40.79	-15.21	56.00	20.60	9.96	10.23	QP
2	2.133	30.79	-15.21	46.00	10.60	9.96	10.23	Average
3	2.650	41.46	-14.54	56.00	21.20	10.02	10.24	QP
4	2.650	31.86	-14.14	46.00	11.60	10.02	10.24	Average
5	3.399	42.55	-13.45	56.00	22.19	10.11	10.25	QP
6	3.399	33.25	-12.75	46.00	12.89	10.11	10.25	Average
7	4.114	44.63	-11.37	56.00	24.21	10.17	10.25	QP
8	4.114	35.63	-10.37	46.00	15.21	10.17	10.25	Average
9	4.598	46.68	-9.32	56.00	26.21	10.21	10.26	QP
10	4.598	37.68	-8.32	46.00	17.21	10.21	10.26	Average
11	5.623	50.78	-9.22	60.00	30.21	10.29	10.28	QP
12	5.623	41.78	-8.22	50.00	21.21	10.29	10.28	Average
13	6.386	51.94	-8.06	60.00	31.30	10.35	10.29	QP
14	6.386	42.94	-7.06	50.00	22.30	10.35	10.29	Average
15	7.687	52.93	-7.07	60.00	32.20	10.42	10.31	QP
16 *	7.687	44.33	-5.67	50.00	23.60	10.42	10.31	Average
17	8.683	52.58	-7.42	60.00	31.80	10.45	10.33	QP
18	8.683	44.28	-5.72	50.00	23.50	10.45	10.33	Average
19	9.913	52.04	-7.96	60.00	31.21	10.49	10.34	QP
20	9.913	43.14	-6.86	50.00	22.31	10.49	10.34	Average
21	11.198	52.17	-7.83	60.00	31.20	10.61	10.36	QP
22	11.198	43.87	-6.13	50.00	22.90	10.61	10.36	Average
23	12.516	49.69	-10.31	60.00	28.60	10.72	10.37	QP
24	12.516	41.69	-8.31	50.00	20.60	10.72	10.37	Average
25	14.138	47.82	-12.18	60.00	26.59	10.84	10.39	QP
26	14.138	40.02	-9.98	50.00	18.79	10.84	10.39	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

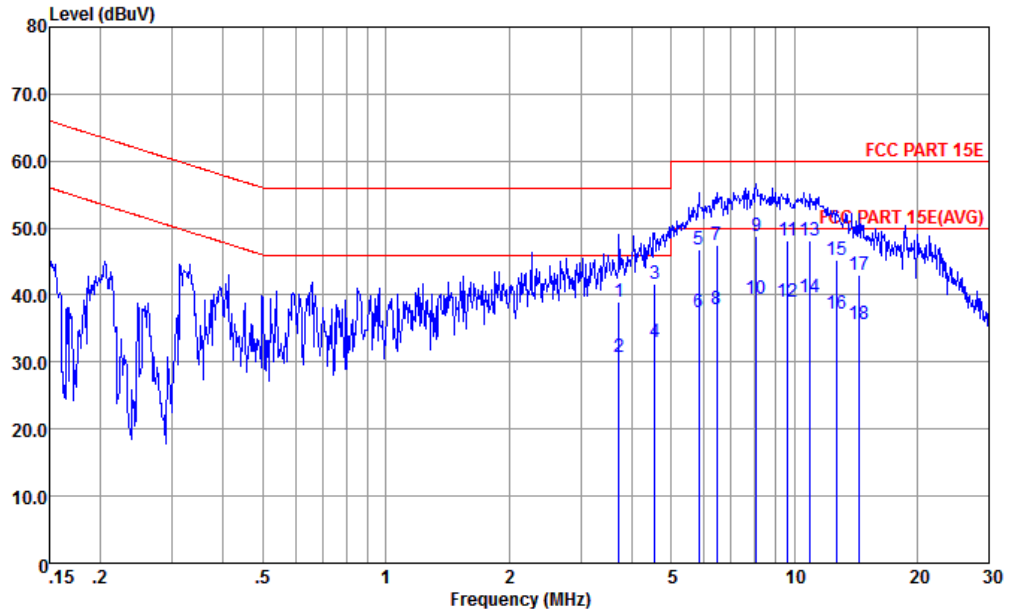

Site : CO01-KS  
 Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	3.720	39.00	-17.00	56.00	18.60	10.15	10.25	QP
2	3.720	30.70	-15.30	46.00	10.30	10.15	10.25	Average
3	4.549	41.78	-14.22	56.00	21.30	10.22	10.26	QP
4	4.549	32.98	-13.02	46.00	12.50	10.22	10.26	Average
5	5.836	46.81	-13.19	60.00	26.20	10.33	10.28	QP
6	5.836	37.41	-12.59	50.00	16.80	10.33	10.28	Average
7	6.454	47.47	-12.53	60.00	26.80	10.38	10.29	QP
8	6.454	37.97	-12.03	50.00	17.30	10.38	10.29	Average
9	8.062	48.89	-11.11	60.00	28.10	10.47	10.32	QP
10	8.062	39.39	-10.61	50.00	18.60	10.47	10.32	Average
11	9.654	48.07	-11.93	60.00	27.19	10.54	10.34	QP
12	9.654	39.07	-10.93	50.00	18.19	10.54	10.34	Average
13	10.963	48.21	-11.79	60.00	27.20	10.66	10.35	QP
14 *	10.963	39.61	-10.39	50.00	18.60	10.66	10.35	Average
15	12.716	45.32	-14.68	60.00	24.11	10.84	10.37	QP
16	12.716	37.12	-12.88	50.00	15.91	10.84	10.37	Average
17	14.364	42.98	-17.02	60.00	21.60	10.99	10.39	QP
18	14.364	35.58	-14.42	50.00	14.20	10.99	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

### UNII 1 - 5150~5250MHz

### WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 36 5180MHz		5149.28	60.79	-13.21	74	45.58	34.62	11.2	30.61	111	240	P	H
	!	5149.92	50.49	-3.51	54	35.28	34.62	11.2	30.61	111	240	A	H
	*	5176	106.81	-	-	91.52	34.67	11.24	30.62	111	240	P	H
		5176	99.85	-	-	84.56	34.67	11.24	30.62	111	240	A	H
		5146.72	59.27	-14.73	74	44.06	34.62	11.2	30.61	100	87	P	V
	!	5149.12	48.6	-5.4	54	33.39	34.62	11.2	30.61	100	87	A	V
	*	5182	102.59	-	-	87.3	34.67	11.24	30.62	100	87	P	V
		5182	94.32	-	-	79.03	34.67	11.24	30.62	100	87	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 1 5150~5250MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 36 5180MHz		10358.36	44.2	-24.1	68.3	51.06	37.58	16.24	60.68	300	0	P	H
		14370	52.27	-16.03	68.3	53.67	39.38	19.26	60.04	100	0	P	H
		10358.36	43.42	-24.88	68.3	50.28	37.58	16.24	60.68	300	0	P	V
		14370	57.04	-11.26	68.3	58.44	39.38	19.26	60.04	100	0	P	V
802.11a CH 44 5220MHz		10438.44	44.09	-24.21	68.3	50.8	37.65	16.3	60.66	300	0	P	H
		10438.44	44.21	-24.09	68.3	50.92	37.65	16.3	60.66	300	0	P	V
		14370	56.98	-11.32	68.3	58.38	39.38	19.26	60.04	100	0	P	V
802.11a CH 48 5240MHz		10478.47	43.66	-24.64	68.3	50.28	37.69	16.34	60.65	300	0	P	H
		14370	55.84	-12.46	68.3	57.24	39.38	19.26	60.04	100	0	P	V
		10478.47	44.47	-23.83	68.3	51.09	37.69	16.34	60.65	300	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 1 5150~5250MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5149.76	66.48	-7.52	74	51.27	34.62	11.2	30.61	100	244	P	H
	!	5149.98	50.97	-3.03	54	35.76	34.62	11.2	30.61	100	244	A	H
	*	5182	106.06	-	-	90.77	34.67	11.24	30.62	100	244	P	H
		5182	98.33	-	-	83.04	34.67	11.24	30.62	100	244	A	H
	!	5149.98	62.86	-11.14	74	47.65	34.62	11.2	30.61	101	85	P	V
	!	5149.44	48.86	-5.14	54	33.65	34.62	11.2	30.61	101	85	A	V
	*	5176	102.06	-	-	86.77	34.67	11.24	30.62	101	85	P	V
		5176	94.32	-	-	79.03	34.67	11.24	30.62	101	85	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 1 5150~5250MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	43.28	-25.02	68.3	50.12	37.59	16.25	60.68	300	0	P	H
		10360	42.84	-25.46	68.3	49.68	37.59	16.25	60.68	300	0	P	V
		14359	54.65	-13.65	68.3	56.05	39.38	19.26	60.04	100	0	P	V
802.11n HT20 CH 44 5220MHz		10440	43.27	-25.03	68.3	49.98	37.65	16.3	60.66	300	0	P	H
		10440	44.25	-24.05	68.3	50.96	37.65	16.3	60.66	300	0	P	V
		14359	51.9	-16.4	68.3	53.3	39.38	19.26	60.04	100	0	P	V
802.11n HT20 CH 48 5240MHz		10480	43.78	-24.52	68.3	50.4	37.69	16.34	60.65	300	0	P	H
		14359	51.98	-16.32	68.3	53.38	39.38	19.26	60.04	100	0	P	H
		10480	43.4	-24.9	68.3	50.02	37.69	16.34	60.65	300	0	P	V
		14359	57.32	-10.98	68.3	58.72	39.38	19.26	60.04	100	0	P	V
		15720	50.36	-23.64	74	49.48	40.5	20.13	59.75	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**UNII 1 5150~5250MHz**  
**WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 38 5190MHz		5149.92	61.15	-12.85	74	45.94	34.62	11.2	30.61	100	244	P	H
	!	5149.92	50.09	-3.91	54	34.88	34.62	11.2	30.61	100	244	A	H
	*	5188	100.23	-	-	84.94	34.67	11.24	30.62	100	244	P	H
		5188	93.76	-	-	78.47	34.67	11.24	30.62	100	244	A	H
		5378.76	56.34	-17.66	74	40.86	34.7	11.47	30.69	100	244	P	H
		5395.5	46.5	-7.5	54	31	34.7	11.49	30.69	100	244	A	H
		5149.98	60.56	-13.44	74	45.35	34.62	11.2	30.61	103	73	P	V
	!	5148.64	48.62	-5.38	54	33.41	34.62	11.2	30.61	103	73	A	V
	*	5188	96.91	-	-	81.62	34.67	11.24	30.62	103	73	P	V
		5188	89.49	-	-	74.2	34.67	11.24	30.62	103	73	A	V
	5395.86	55.79	-18.21	74	40.29	34.7	11.49	30.69	103	73	P	V	
	5384.88	46.48	-7.52	54	31	34.7	11.47	30.69	103	73	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 1 5150~5250MHz**  
**WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10380	42.84	-25.46	68.3	49.64	37.61	16.26	60.67	100	360	P	H
VHT40		14359	51.27	-17.03	68.3	52.67	39.38	19.26	60.04	100	0	P	H
CH 38		10380	42.9	-25.4	68.3	49.7	37.61	16.26	60.67	100	360	P	V
5190MHz		14359	55.86	-12.44	68.3	57.26	39.38	19.26	60.04	100	0	P	V
802.11ac		10460	44.11	-24.19	68.3	50.8	37.66	16.31	60.66	100	360	P	H
VHT40		14359	50.4	-17.9	68.3	51.8	39.38	19.26	60.04	100	0	P	H
CH 46		10460	43.38	-24.92	68.3	50.07	37.66	16.31	60.66	100	360	P	V
5230MHz		14359	57.85	-10.45	68.3	59.25	39.38	19.26	60.04	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 1 5150~5250MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 42 5210MHz		5146.88	64.36	-9.64	74	49.15	34.62	11.2	30.61	100	246	P	H
	!	5149.76	50.37	-3.63	54	35.16	34.62	11.2	30.61	100	246	A	H
	*	5212	97.21	-	-	81.86	34.7	11.28	30.63	100	246	P	H
		5212	89.89	-	-	74.54	34.7	11.28	30.63	100	246	A	H
		5393.52	56.52	-17.48	74	41.04	34.7	11.47	30.69	100	246	P	H
		5392.44	46.74	-7.26	54	31.26	34.7	11.47	30.69	100	246	A	H
		5143.36	57.85	-16.15	74	42.64	34.62	11.2	30.61	356	85	P	V
		5149.12	47.76	-6.24	54	32.55	34.62	11.2	30.61	356	85	A	V
	*	5212	93.83	-	-	78.48	34.7	11.28	30.63	356	85	P	V
		5212	86.22	-	-	70.87	34.7	11.28	30.63	356	85	A	V
	5351.04	55.94	-18.06	74	40.49	34.7	11.43	30.68	356	85	P	V	
	5394.42	46.64	-7.36	54	31.16	34.7	11.47	30.69	356	85	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ac VHT80 and CH 42 5210MHz, and a Remark section.



UNII 2A - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 64 5320MHz		5352	65.14	-8.86	74	49.69	34.7	11.43	30.68	100	242	P	H
	!	5350	50.28	-3.72	54	34.83	34.7	11.43	30.68	100	242	A	H
	*	5320	108.08	-	-	92.66	34.7	11.39	30.67	100	242	P	H
		5320	100.58	-	-	85.16	34.7	11.39	30.67	100	242	A	H
		5354.2	59.24	-14.76	74	43.79	34.7	11.43	30.68	380	73	P	V
		5351.9	47.37	-6.63	54	31.92	34.7	11.43	30.68	380	73	A	V
	*	5320	102.42	-	-	87	34.7	11.39	30.67	380	73	P	V
		5320	95.32	-	-	79.9	34.7	11.39	30.67	380	73	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2A 5250~5350MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 52 5260MHz		10518.52	43.02	-25.28	68.3	49.6	37.71	16.36	60.65	300	0	P	H
		14346	50.18	-18.12	68.3	51.62	39.35	19.25	60.04	100	0	P	H
		15774	49.13	-24.87	74	48.1	40.6	20.16	59.73	100	0	P	H
		10518.52	44.09	-24.21	68.3	50.67	37.71	16.36	60.65	300	0	P	V
		14346	60.47	-7.83	68.3	61.91	39.35	19.25	60.04	100	0	P	V
		15774	53.74	-20.26	74	52.71	40.6	20.16	59.73	100	229	P	V
		15774	43.8	-10.2	54	42.77	40.6	20.16	59.73	100	229	A	V
802.11a CH 60 5300MHz		10600.1	43.84	-30.16	74	50.3	37.74	16.43	60.63	300	0	P	H
		14346	48.73	-19.57	68.3	50.17	39.35	19.25	60.04	100	0	P	H
		15906	53.56	-20.44	74	52.15	40.84	20.25	59.68	154	317	P	H
		15906	42.44	-11.56	54	41.03	40.84	20.25	59.68	154	317	A	H
		10600.01	42.93	-31.07	74	49.39	37.74	16.43	60.63	300	0	P	V
		14346	58.06	-10.24	68.3	59.5	39.35	19.25	60.04	100	0	P	V
		15900	53.73	-20.27	74	52.37	40.81	20.24	59.69	100	252	P	V
		15900	44.89	-9.11	54	43.53	40.81	20.24	59.69	100	252	A	V
802.11a CH 64 5320MHz		10638.63	43.43	-30.57	74	49.84	37.76	16.45	60.62	300	0	P	H
		14352	50.48	-17.82	68.3	51.92	39.35	19.25	60.04	100	0	P	H
		15960	49.89	-24.11	74	48.32	40.94	20.29	59.66	100	0	P	H
		10638.63	43.69	-30.31	74	50.1	37.76	16.45	60.62	300	0	P	V
		14352	49.1	-19.2	68.3	50.54	39.35	19.25	60.04	100	0	P	V
		15960	50.43	-23.57	74	48.86	40.94	20.29	59.66	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 2A 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 CH 64 5320MHz and a Remark section.



**UNII 2A 5250~5350MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	42.65	-25.65	68.3	49.23	37.71	16.36	60.65	300	0	P	H
		10520	43.02	-25.28	68.3	49.6	37.71	16.36	60.65	300	0	P	V
		14370	53.88	-14.42	68.3	55.28	39.38	19.26	60.04	100	0	P	V
802.11n HT20 CH 60 5300MHz		10600	43.92	-30.08	74	50.38	37.74	16.43	60.63	300	0	P	H
		14370	51.41	-16.89	68.3	52.81	39.38	19.26	60.04	100	0	P	H
		15900	54.67	-19.33	74	53.31	40.81	20.24	59.69	100	156	P	H
		15900	44.78	-9.22	54	43.42	40.81	20.24	59.69	100	156	A	H
		10600	43.43	-30.57	74	49.89	37.74	16.43	60.63	300	0	P	V
		14370	52.42	-15.88	68.3	53.82	39.38	19.26	60.04	100	0	P	V
802.11n HT20 CH 64 5320MHz		10640	44.3	-29.7	74	50.71	37.76	16.45	60.62	300	0	P	H
		10640	43.05	-30.95	74	49.46	37.76	16.45	60.62	300	0	P	V
		14370	55.34	-12.96	68.3	56.74	39.38	19.26	60.04	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**UNII 2A 5250~5350MHz**  
**WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 62 5310MHz		5138.24	57.93	-16.07	74	42.76	34.6	11.18	30.61	100	244	P	H
		5102.08	47.95	-6.05	54	32.86	34.55	11.14	30.6	100	244	A	H
	*	5308	103.21	-	-	87.8	34.7	11.38	30.67	100	244	P	H
		5308	95.72	-	-	80.31	34.7	11.38	30.67	100	244	A	H
		5351.8	66.9	-7.1	74	51.45	34.7	11.43	30.68	100	244	P	H
	!	5350.9	50.83	-3.17	54	35.38	34.7	11.43	30.68	100	244	A	H
		5105.6	58.01	-15.99	74	42.87	34.58	11.16	30.6	385	88	P	V
		5101.92	47.75	-6.25	54	32.66	34.55	11.14	30.6	385	88	A	V
	*	5308	98.03	-	-	82.62	34.7	11.38	30.67	385	88	P	V
		5308	89.66	-	-	74.25	34.7	11.38	30.67	385	88	A	V
	5350.3	59.21	-14.79	74	43.76	34.7	11.43	30.68	385	88	P	V	
	5351.7	47.23	-6.77	54	31.78	34.7	11.43	30.68	385	88	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2A 5250~5350MHz**  
**WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10540	42.22	-26.08	68.3	48.77	37.71	16.38	60.64	100	360	P	H
VHT40		14370	49.97	-18.33	68.3	51.37	39.38	19.26	60.04	100	0	P	H
CH 54		10540	43.21	-25.09	68.3	49.76	37.71	16.38	60.64	100	360	P	V
5270MHz		14370	51.21	-17.09	68.3	52.61	39.38	19.26	60.04	100	0	P	V
802.11ac		10620	42.4	-31.6	74	48.83	37.75	16.44	60.62	100	360	P	H
VHT40		14359	50.04	-18.26	68.3	51.44	39.38	19.26	60.04	100	0	P	H
CH 62		10620	43.2	-30.8	74	49.63	37.75	16.44	60.62	100	360	P	V
5310MHz		14370	54.65	-13.65	68.3	56.05	39.38	19.26	60.04	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2A 5250~5350MHz  
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 58 5290MHz		5127.04	57.12	-16.88	74	41.94	34.6	11.18	30.6	110	244	P	H
		5100.8	47.78	-6.22	54	32.69	34.55	11.14	30.6	110	244	A	H
	*	5290	97.72	-	-	82.32	34.7	11.36	30.66	110	244	P	H
		5290	90.15	-	-	74.75	34.7	11.36	30.66	110	244	A	H
		5382.4	62.35	-11.65	74	46.87	34.7	11.47	30.69	110	244	P	H
	!	5350.6	50.57	-3.43	54	35.12	34.7	11.43	30.68	110	244	A	H
		5132.32	58.01	-15.99	74	42.83	34.6	11.18	30.6	367	85	P	V
		5108.8	47.81	-6.19	54	32.67	34.58	11.16	30.6	367	85	A	V
	*	5296	93.33	-	-	77.91	34.7	11.38	30.66	367	85	P	V
		5296	86.1	-	-	70.68	34.7	11.38	30.66	367	85	A	V
		5381.7	57.78	-16.22	74	42.3	34.7	11.47	30.69	367	85	P	V
	5350	47.11	-6.89	54	31.66	34.7	11.43	30.68	367	85	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 2A 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10580	42.54	-25.76	68.3	49.03	37.73	16.41	60.63	100	360	P	H
VHT80		10580	42.68	-25.62	68.3	49.17	37.73	16.41	60.63	100	360	P	V
CH 58		14359	57.8	-10.5	68.3	59.2	39.38	19.26	60.04	100	0	P	V
5290MHz													
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2C - 5470~5725MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 100 5500MHz		5459.98	58.33	-15.67	74	42.82	34.7	11.53	30.72	100	256	P	H
	!	5470	64.34	-3.96	68.3	48.81	34.7	11.55	30.72	100	256	P	H
	!	5459.12	48.52	-5.48	54	33.01	34.7	11.53	30.72	100	256	A	H
	*	5500	106.67	-	-	91.12	34.7	11.58	30.73	100	256	P	H
		5500	99.46	-	-	83.91	34.7	11.58	30.73	100	256	A	H
		5432.72	56.5	-17.5	74	40.98	34.7	11.52	30.7	340	82	P	V
		5461.68	59.96	-8.34	68.3	44.45	34.7	11.53	30.72	340	82	P	V
		5458.64	47.29	-6.71	54	31.78	34.7	11.53	30.72	340	82	A	V
	*	5500	101.72	-	-	86.17	34.7	11.58	30.73	340	82	P	V
		5500	93.95	-	-	78.4	34.7	11.58	30.73	340	82	A	V
802.11a CH 140 5700MHz	!	5726.04	64.55	-3.75	68.3	48.45	35.08	11.84	30.82	100	243	P	H
	*	5704	102.92	-	-	86.88	35.03	11.82	30.81	100	243	P	H
		5704	95.97	-	-	79.93	35.03	11.82	30.81	100	243	A	H
		5725.32	61.12	-7.18	68.3	45.02	35.08	11.84	30.82	316	82	P	V
	*	5698	100.18	-	-	84.22	34.97	11.79	30.8	316	82	P	V
		5698	93.28	-	-	77.32	34.97	11.79	30.8	316	82	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 2C - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	44.21	-29.79	74	50.14	37.9	16.71	60.54	300	0	P	H
		14359	52.15	-16.15	68.3	53.55	39.38	19.26	60.04	100	0	P	H
		11000	43.07	-30.93	74	49	37.9	16.71	60.54	300	0	P	V
		14359	54.81	-13.49	68.3	56.21	39.38	19.26	60.04	100	0	P	V
802.11a CH 116 5580MHz		11160	43.52	-30.48	74	49.19	38	16.83	60.5	300	0	P	H
		14359	52.08	-16.22	68.3	53.48	39.38	19.26	60.04	100	0	P	H
		16740	53.51	-14.79	68.3	48.97	42.29	20.82	58.57	100	0	P	H
		11160	43.79	-30.21	74	49.46	38	16.83	60.5	300	0	P	V
		14359	57.73	-10.57	68.3	59.13	39.38	19.26	60.04	100	0	P	V
		16740	52.34	-15.96	68.3	47.8	42.29	20.82	58.57	100	0	P	V
802.11a CH 140 5700MHz		11400	44.27	-29.73	74	49.57	38.14	17.01	60.45	300	0	P	H
		14359	48.35	-19.95	68.3	49.75	39.38	19.26	60.04	100	0	P	H
		11400	43.7	-30.3	74	49	38.14	17.01	60.45	300	0	P	V
		14359	57.15	-11.15	68.3	58.55	39.38	19.26	60.04	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2C - 5470~5725MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 100 5500MHz		5457.36	61.72	-12.28	74	46.21	34.7	11.53	30.72	101	253	P	H
	!	5460.08	65.02	-3.28	68.3	49.51	34.7	11.53	30.72	101	253	P	H
	!	5459.98	48.29	-5.71	54	32.78	34.7	11.53	30.72	101	253	A	H
	*	5500	105.99	-	-	90.44	34.7	11.58	30.73	101	253	P	H
		5500	98.91	-	-	83.36	34.7	11.58	30.73	101	253	A	H
		5459.12	59.29	-14.71	74	43.78	34.7	11.53	30.72	372	27	P	V
		5469.52	61.11	-7.19	68.3	45.58	34.7	11.55	30.72	372	27	P	V
		5456.4	47.32	-6.68	54	31.81	34.7	11.53	30.72	372	27	A	V
	*	5500	102.12	-	-	86.57	34.7	11.58	30.73	372	27	P	V
	5500	94.58	-	-	79.03	34.7	11.58	30.73	372	27	A	V	
802.11n HT20 CH 140 5700MHz	!	5725.4	65.25	-3.05	68.3	49.15	35.08	11.84	30.82	105	268	P	H
	*	5704	102.62	-	-	86.58	35.03	11.82	30.81	105	268	P	H
		5704	95.68	-	-	79.64	35.03	11.82	30.81	105	268	A	H
		5730.28	60.83	-7.47	68.3	44.73	35.08	11.84	30.82	298	73	P	V
	*	5698	99.8	-	-	83.84	34.97	11.79	30.8	298	73	P	V
	5698	92.28	-	-	76.32	34.97	11.79	30.8	298	73	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2C - 5470~5725MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100		11000	43.89	-30.11	74	49.82	37.9	16.71	60.54	300	0	P	H
		14370	52.31	-15.99	68.3	53.71	39.38	19.26	60.04	100	0	P	H
5500MHz		11000	44.26	-29.74	74	50.19	37.9	16.71	60.54	300	0	P	V
		14370	60.2	-8.1	68.3	61.6	39.38	19.26	60.04	100	0	P	V
802.11n HT20 CH 116		11160	43.75	-30.25	74	49.42	38	16.83	60.5	300	0	P	H
		16740	51.14	-17.16	68.3	46.6	42.29	20.82	58.57	100	0	P	H
		11160	43.85	-30.15	74	49.52	38	16.83	60.5	300	0	P	V
		14370	54.01	-14.29	68.3	55.41	39.38	19.26	60.04	100	0	P	V
		16740	53.83	-14.47	68.3	49.29	42.29	20.82	58.57	100	0	P	V
802.11n HT20 CH 140		11400	44.1	-29.9	74	49.4	38.14	17.01	60.45	300	0	P	H
		11400	43.96	-30.04	74	49.26	38.14	17.01	60.45	300	0	P	V
		14370	57.13	-11.17	68.3	58.53	39.38	19.26	60.04	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**UNII 2C - 5470~5725MHz**  
**WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 102 5510MHz		5457.04	58.64	-15.36	74	43.13	34.7	11.53	30.72	100	255	P	H
	!	5467.28	64.84	-3.46	68.3	49.31	34.7	11.55	30.72	100	255	P	H
	!	5459.98	48.44	-5.56	54	32.93	34.7	11.53	30.72	100	255	A	H
	*	5506	101.56	-	-	86.01	34.7	11.58	30.73	100	255	P	H
		5506	93.72	-	-	78.17	34.7	11.58	30.73	100	255	A	H
		5726.04	57.22	-11.08	68.3	41.12	35.08	11.84	30.82	100	255	P	H
		5446.32	56.45	-17.55	74	40.93	34.7	11.53	30.71	336	85	P	V
		5468.4	59.33	-8.97	68.3	43.8	34.7	11.55	30.72	336	85	P	V
		5456.4	47.23	-6.77	54	31.72	34.7	11.53	30.72	336	85	A	V
	*	5506	96.64	-	-	81.09	34.7	11.58	30.73	336	85	P	V
		5506	88.9	-	-	73.35	34.7	11.58	30.73	336	85	A	V
		5741.64	57.75	-10.55	68.3	41.57	35.14	11.87	30.83	336	85	P	V
802.11ac VHT40 CH 134 5670MHz		5434.8	56.76	-17.24	74	41.24	34.7	11.52	30.7	100	256	P	H
		5463.12	55.44	-12.86	68.3	39.91	34.7	11.55	30.72	100	256	P	H
		5456.88	47.15	-6.85	54	31.64	34.7	11.53	30.72	100	256	A	H
	*	5674	101.94	-	-	86.04	34.92	11.77	30.79	100	256	P	H
		5674	94.35	-	-	78.45	34.92	11.77	30.79	100	256	A	H
	!	5725.08	62.76	-5.54	68.3	46.66	35.08	11.84	30.82	100	256	P	H
		5439.44	56.24	-17.76	74	40.73	34.7	11.52	30.71	318	82	P	V
		5460.72	56.36	-11.94	68.3	40.85	34.7	11.53	30.72	318	82	P	V
		5453.84	46.86	-7.14	54	31.34	34.7	11.53	30.71	318	82	A	V
	*	5668	98.96	-	-	83.06	34.92	11.77	30.79	318	82	P	V
	5668	91.22	-	-	75.32	34.92	11.77	30.79	318	82	A	V	
	5736.76	62.09	-6.21	68.3	45.9	35.14	11.87	30.82	318	82	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2C - 5470~5725MHz**  
**WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 102		11020	42.6	-31.4	74	48.51	37.91	16.72	60.54	100	360	P	H
		14370	49.91	-18.39	68.3	51.31	39.38	19.26	60.04	100	0	P	H
5510MHz		11020	43.34	-30.66	74	49.25	37.91	16.72	60.54	100	360	P	V
		14359	55.99	-12.31	68.3	57.39	39.38	19.26	60.04	100	0	P	V
802.11ac VHT40 CH 110		11100	43.79	-30.21	74	49.57	37.96	16.78	60.52	100	360	P	H
		11100	43.32	-30.68	74	49.1	37.96	16.78	60.52	100	360	P	V
5550MHz		14370	54.76	-13.54	68.3	56.16	39.38	19.26	60.04	100	0	P	V
802.11ac VHT40 CH 134		11340	43.54	-30.46	74	48.95	38.1	16.96	60.47	100	360	P	H
		14370	50.3	-18	68.3	51.7	39.38	19.26	60.04	100	0	P	H
5670MHz		11340	43.89	-30.11	74	49.3	38.1	16.96	60.47	100	360	P	V
		14359	57.5	-10.8	68.3	58.9	39.38	19.26	60.04	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 2C 5470~5725MHz  
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 106 5530MHz		5441.84	59.9	-14.1	74	44.39	34.7	11.52	30.71	101	246	P	H
		5468.72	60.66	-7.64	68.3	45.13	34.7	11.55	30.72	101	246	P	H
	!	5459.98	50.76	-3.24	54	35.25	34.7	11.53	30.72	101	246	A	H
	*	5530	96.44	-	-	80.88	34.7	11.6	30.74	101	246	P	H
		5530	88.5	-	-	72.94	34.7	11.6	30.74	101	246	A	H
		5728.2	56.71	-11.59	68.3	40.61	35.08	11.84	30.82	101	246	P	H
		5446.48	57.6	-16.4	74	42.08	34.7	11.53	30.71	305	86	P	V
		5468.56	57.82	-10.48	68.3	42.29	34.7	11.55	30.72	305	86	P	V
	!	5459.6	48.23	-5.77	54	32.72	34.7	11.53	30.72	305	86	A	V
	*	5518	90.82	-	-	75.26	34.7	11.6	30.74	305	86	P	V
		5518	83.58	-	-	68.02	34.7	11.6	30.74	305	86	A	V
		5750.92	56.75	-11.55	68.3	40.57	35.14	11.87	30.83	305	86	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 2C 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11060	43.03	-30.97	74	48.86	37.94	16.76	60.53	100	360	P	H
VHT80		11060	42.08	-31.92	74	47.91	37.94	16.76	60.53	100	360	P	V
CH 106		14359	52.24	-16.06	68.3	53.64	39.38	19.26	60.04	100	0	P	V
5530MHz													
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
WIFI 802.11n HT20 (LF @ 3m)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains 12 rows of test data for 802.11n HT20 LF and a Remark section at the bottom.



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>not under limit 6dB</b> .
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.47	1.399	0.715	0.75KHz
802.11n HT20	97.28	1.297	0.771	0.82KHz
802.11ac VHT40	97.21	1.261	0.793	0.82KHz
802.11ac VHT80	94.53	0.601	1.663	1.80KHz


### 802.11a

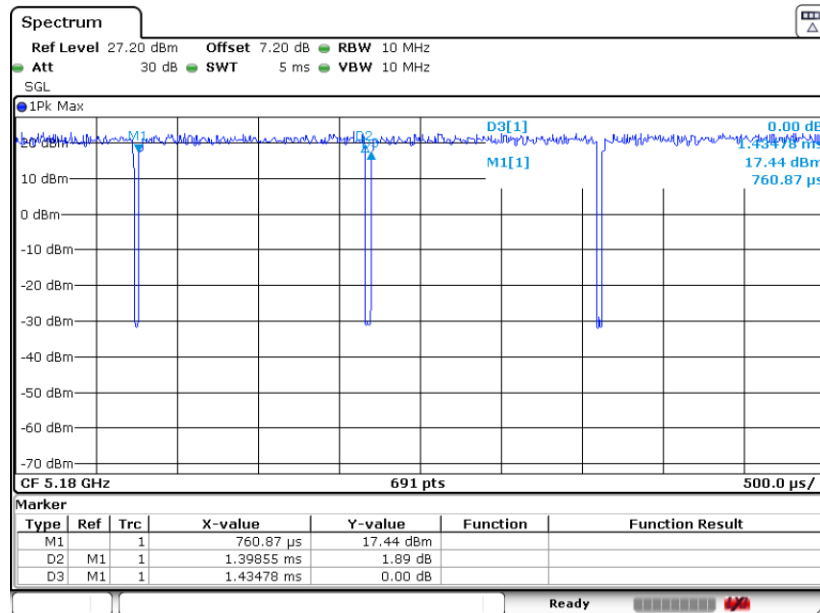






802.11n HT20

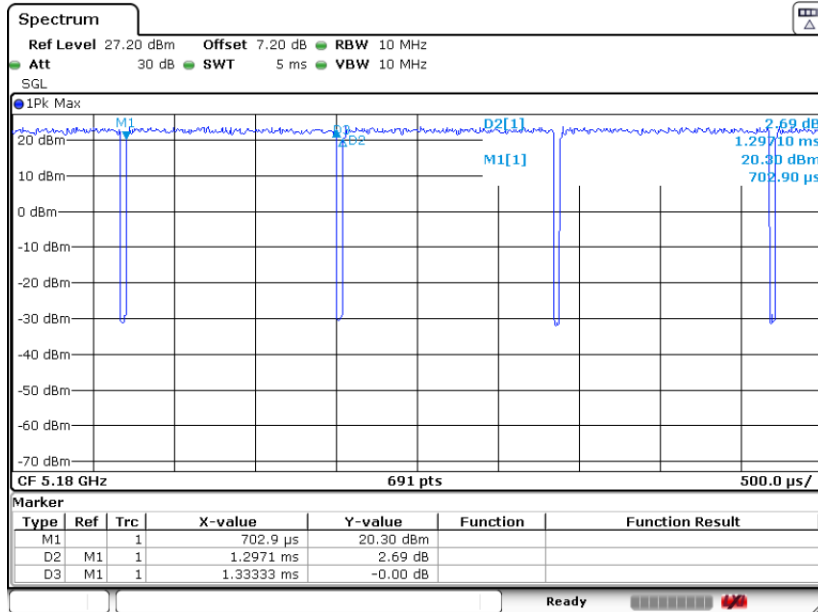

802.11ac VHT40

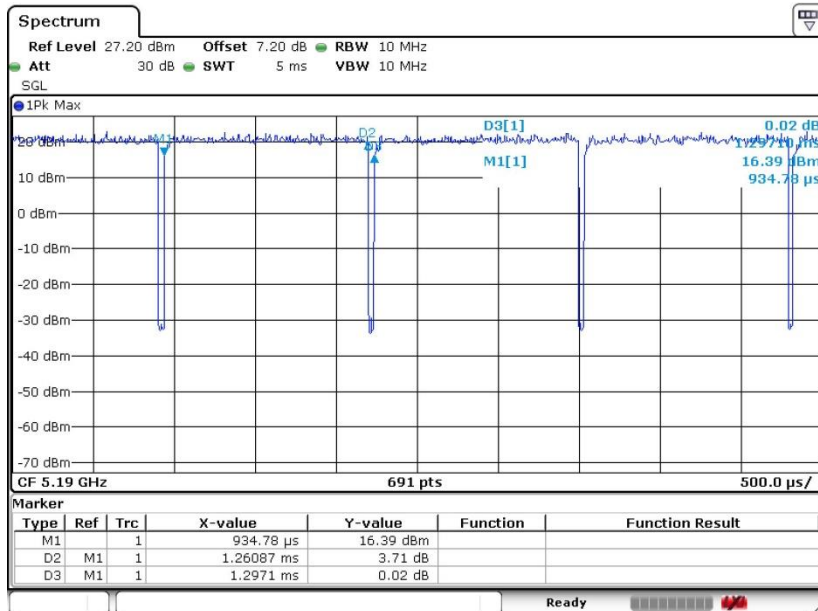



802.11ac VHT80

