



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2169-1
FCC ID : IHDT56ZW3
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Sep. 12, 2021 ~ Sep. 14, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 8

 1.7. Test Software 8

 1.8. Applicable Standards 8

 1.9. Specification of Accessory 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 12

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 23

5. UNCERTAINTY OF EVALUATION 24

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|----------|-----------------------|-----------------|--------|--|
| 3.1 | 15.107 | AC Conducted Emission | < 15.107 limits | PASS | Under limit 3.38 dB at 0.195 MHz |
| 3.2 | 15.109 | Radiated Emission | < 15.109 limits | PASS | Under limit 6.97 dB at 44.55 MHz |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2169-1 |
| FCC ID | IHDT56ZW3 |
| EUT supports Radios application | GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS / FM / NFC |
| IMEI Code | Conduction: 350662070023679/350662070023687 for sample 1 352580670006415 for sample 2 Radiation: 350662070023414/350662070023422 for Sample 1 352580670006399 for Sample 2 |
| HW Version | DVT2 |
| SW Version | RRUB31.Q3-46 |
| EUT Stage | Identical Prototype |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four samples for this project, sample 1 and sample 3 is 1st source dual/single SIM, sample 2 and sample 4 is 2nd source single/dual SIM. The detailed differences could be referred to the "XT2167-1_Operational Description of Product Equality Declaration for sample" which is exhibit separately. According to the difference, sample 1 perform full test and the sample 2 verify the worst cases for the differences.



1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|---|
| Tx Frequency | GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz |
| Rx Frequency | GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 17 : 734 MHz ~ 746 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz LTE Band 66 : 2110 MHz~ 2200 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz |



| | |
|---------------------------|---|
| | 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz |
| Antenna Type | WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC : Loop Antenna FM : earphone Antenna |
| Type of Modulation | GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM(16QAM not support uplink) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM |

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--|----------------------------|---------------------------------------|
| Test Firm | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-KS 03CH02-KS | CN1257 | 314309 |

1.7. Test Software

| Item | Site | Manufacturer | Name | Version |
|------|-----------|--------------|------|--------------|
| 1. | 03CH02-KS | AUDIX | E3 | 6.2009-8-24a |
| 2. | CO01-KS | AUDIX | E3 | 6.2009-8-24 |

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



1.9. Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------|----------------------|------------|-------------------|
| AC Adapter 1(US) | Brand Name | Motorola (Salcomp) | Model Name | MC-331 |
| AC Adapter 1(EU) | Brand Name | Motorola (Salcomp) | Model Name | MC-332 |
| AC Adapter 1(UK) | Brand Name | Motorola (Salcomp) | Model Name | MC-333 |
| AC Adapter 1(AU) | Brand Name | Motorola (Salcomp) | Model Name | MC-335 |
| AC Adapter 1(AR) | Brand Name | Motorola (Salcomp) | Model Name | MC-336 |
| AC Adapter 1(BR) | Brand Name | Motorola (Salcomp) | Model Name | MC-337 |
| AC Adapter 1(PRC) | Brand Name | Motorola (Salcomp) | Model Name | MC-338 |
| AC Adapter 1(CHILE) | Brand Name | Motorola (Salcomp) | Model Name | MC-339 |
| AC Adapter 2(IN) | Brand Name | Motorola (Salcomp) | Model Name | MC-334 |
| AC Adapter 3(US) | Brand Name | Motorola (Chenyang) | Model Name | MC-331 |
| AC Adapter 3(EU) | Brand Name | Motorola (Chenyang) | Model Name | MC-332 |
| AC Adapter 3(AU) | Brand Name | Motorola (Chenyang) | Model Name | MC-335 |
| AC Adapter 3(AR) | Brand Name | Motorola (Chenyang) | Model Name | MC-336 |
| AC Adapter 3(BR) | Brand Name | Motorola (Chenyang) | Model Name | MC-337 |
| AC Adapter 4(US) | Brand Name | Motorola (Acbel) | Model Name | MC-331 |
| AC Adapter 4(EU) | Brand Name | Motorola (Acbel) | Model Name | MC-332 |
| AC Adapter 4(UK) | Brand Name | Motorola (Acbel) | Model Name | MC-333 |
| Battery 1 | Brand Name | Motorola (ATL) | Model Name | NG50 |
| Battery 2 | Brand Name | Motorola (Sunwoda) | Model Name | NG50 |
| Earphone 1 | Brand Name | Motorola (Lyand) | Model Name | MH191(SH38C81577) |
| Earphone 2 | Brand Name | Motorola (LCHSE) | Model Name | MH191(SH38C81576) |
| USB Cable 1 | Brand Name | Motorola (Saibao) | Model Name | SC18D22297 |
| USB Cable 2 | Brand Name | Motorola (Cabletech) | Model Name | SC18D22298 |
| USB Cable 3 | Brand Name | Motorola (Luxshare) | Model Name | SC18D22299 |



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

| Test Items | Function Type |
|-----------------------|--|
| AC Conducted Emission | Mode 1: GSM850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + USB Cable 1(Charging from Adapter 1)+ Battery 1 + Earphone 1 for sample 1 |
| | Mode 2: WCDMA Band II Rx + Bluetooth Idle + WLAN Idle(5G) + Camera(Front) + USB Cable 2(Charging from Adapter 2) + Battery 1+ Earphone 2 for sample 1 |
| | Mode 3: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN Idle(2.4G) + MPEG4 + USB Cable 3(Charging from Adapter 3) + Battery 1+ Earphone 1 for sample 1 |
| | Mode 4: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN Idle(5G) + NFC On + USB Cable 1(Charging from Adapter 4)+ Battery 1 + Earphone 1 for sample 1 |
| | Mode 5: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + FM Rx(98MHz) + USB Cable 1(Data Link with Notebook)+ Battery 1 + Earphone 1 for sample 1 |
| | Mode 6: LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN Idle(5G) + GNSS Rx + USB Cable 2(Data Link with Notebook)+ Battery 1 + Earphone 1 for sample 1 |
| | Mode 7: DC_41A_n78A Rx + Bluetooth Idle + WLAN Idle(2.4G) + GNSS Rx + USB Cable 3(Data Link with Notebook) + Battery 1 + Earphone 1 for sample 1 |
| | Mode 8 :GSM850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + USB Cable 2(Charging from Adapter 1) + Battery 2 + Earphone 1 for sample 2 |
| | Mode 9 : LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + FM Rx(98MHz) + USB Cable 1(Data Link with Notebook)+ Battery 2 + Earphone 2 for sample 2 |



| | |
|--|--|
| Radiated Emissions | <p>Mode 1: GSM850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + Battery 1 + Earphone 1 for Sample 1</p> <p>Mode 2: WCDMA Band II Rx + Bluetooth Idle + WLAN Idle(5G) + Camera(Front) + USB Cable 2(Charging from Adapter 2) + Battery 1 + Earphone 2 for Sample 1</p> <p>Mode 3: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN Idle(2.4G) + MPEG4 + USB Cable 3(Charging from Adapter 3)+ Battery 1 + Earphone 1 for sample 1</p> <p>Mode 4: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN Idle(5G) + NFC On + USB Cable 1(Charging from Adapter 4)+ Battery 1 + Earphone 1 for sample 1</p> <p>Mode 5: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN Idle(2.4G) + FM Rx(98MHz) + USB Cable 1(Data Link with Notebook)+ Battery 1 + Earphone 1 for sample 1</p> <p>Mode 6: LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN Idle(5G) + GNSS Rx + USB Cable 2(Data Link with Notebook)+ Battery 1 + Earphone 1 for sample 1</p> <p>Mode 7: DC_41A_n78A Rx + Bluetooth Idle + WLAN Idle(2.4G) + GNSS Rx + USB Cable 3(Data Link with Notebook) + Battery 1 + Earphone 1 for sample 1</p> <p>Mode 8: GSM850 Rx(Middle) + Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + Battery 2 + Earphone 1 for sample 2</p> <p>Mode 9: LTE Band 12 Rx(Middle) + Bluetooth Idle + WLAN Idle(5G) + GNSS Rx + USB Cable 2(Data Link with Notebook)+ Battery 2 + Earphone 2 for sample 2</p> |
| Remark: | |
| <ol style="list-style-type: none"> 1. The worst case of AC is mode 1; only the test data of this mode is reported. 2. The worst case of RE is mode 8; only the test data of this mode is reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook. 4. Pre-scanned Low/Middle/High channel for GSM 850/LTE Band 5/12/13/26 and FM Rx, the worst channel was recorded in this report. | |

2.2. Connection Diagram of Test System

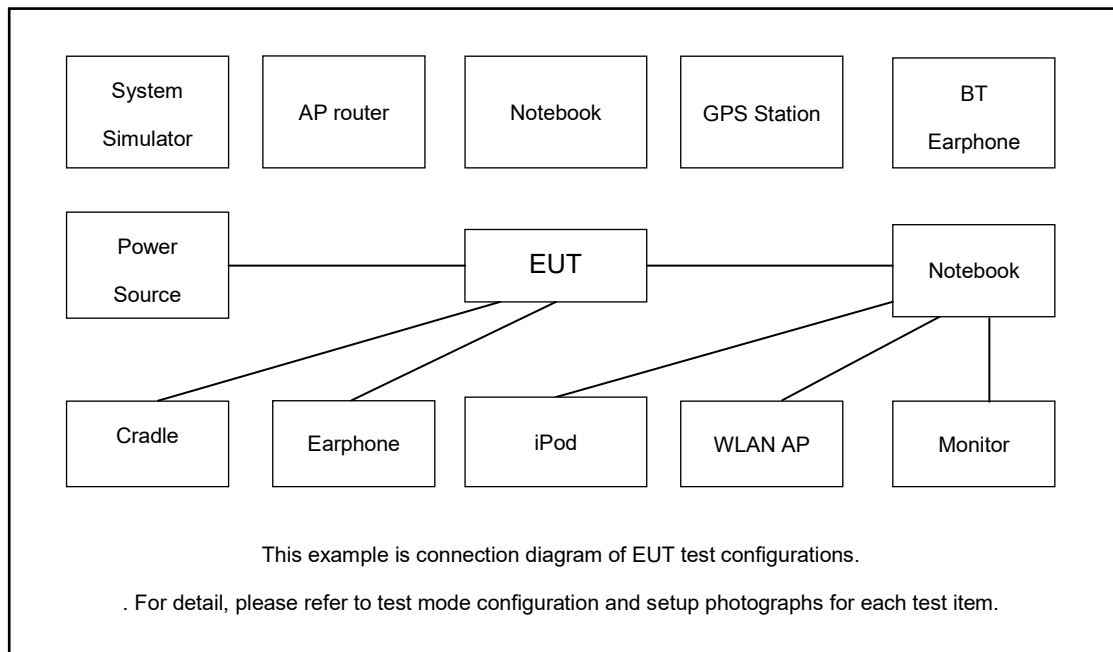

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|------------|------------|---------------|----------------|--|
| 1. | LTE Base Station | Anritus | MT8820C | N/A | N/A | Unshielded, 1.8m |
| 2. | LTE Base Station | Anritus | MT8821C | N/A | N/A | Unshielded, 1.8m |
| 3. | Base Station | Anritus | MT8000A | N/A | N/A | Unshielded, 1.8m |
| 4. | Signal Generator | R&S | SMBV100A | N/A | N/A | Unshielded, 1.8m |
| 5. | WLAN AP | TP-Link | TL-WDR5600 | N/A | N/A | Unshielded, 1.8m |
| 6. | WLAN AP | D-link | DIR-655 | KA21R655B1 | N/A | Unshielded, 1.8m |
| 7. | Bluetooth Earphone | Xiaomi | LYEJ02LM | N/A | N/A | N/A |
| 8. | Bluetooth Earphone | Lenovo | LBH308 | N/A | N/A | N/A |
| 9. | Notebook | Lenovo | S730-13IWL | N/A | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 10. | Notebook | Lenovo | G480 | QDS-BRCM1050I | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 11. | Hard disk | KINGSHARE | KSP6120G | Fcc DoC | Shielded, 1.2m | N/A |
| 12. | Hard Disk | Lenovo | F310 | DoC | Shielded, 1.2m | N/A |
| 13. | SD Card | SanDisk | Ultra | N/A | N/A | N/A |
| 14. | NFC Card | N/A | N/A | N/A | N/A | N/A |



2.4. EUT Operation Test Setup

The EUT was in GSM or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable
2. Turn on MPEG4 function
3. Turn on camera to capture images.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station
5. Turn on FM function to make the EUT receive continuous signals from FM station
6. Turn on NFC function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|--------------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

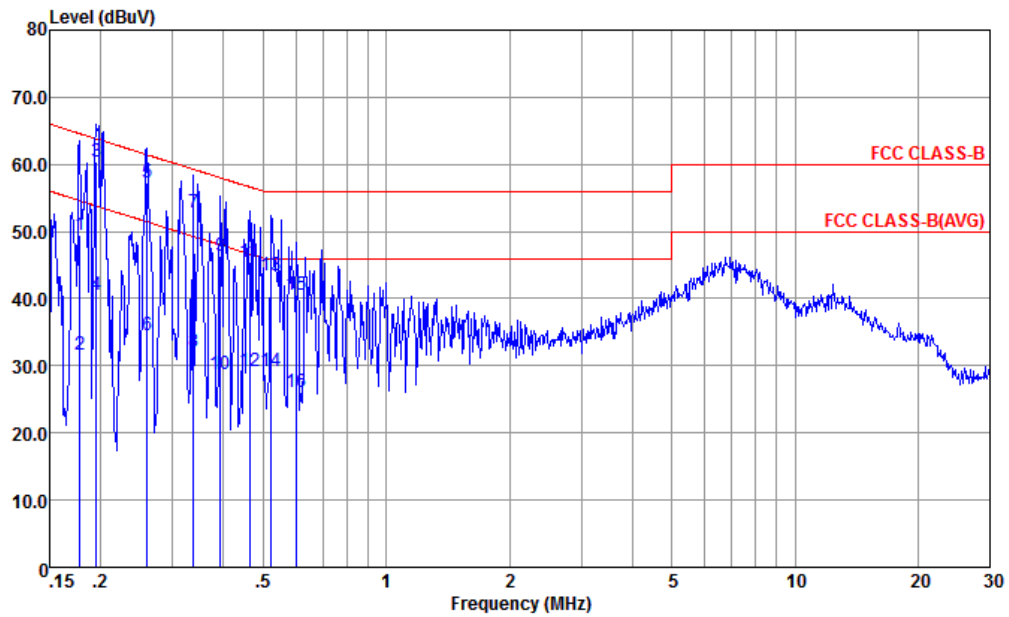


Site : CO01-KS
 Condition : FCC CLASS-B TWO-LISN-CN02-L LINE

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|-----|-------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.178 | 49.41 | -15.18 | 64.59 | 29.36 | 9.64 | 10.41 | QP |
| 2 | 0.178 | 31.55 | -23.04 | 54.59 | 11.50 | 9.64 | 10.41 | Average |
| 3 * | 0.195 | 60.42 | -3.38 | 63.80 | 40.41 | 9.64 | 10.37 | QP |
| 4 | 0.195 | 40.62 | -13.18 | 53.80 | 20.61 | 9.64 | 10.37 | Average |
| 5 | 0.260 | 57.17 | -4.25 | 61.42 | 37.20 | 9.64 | 10.33 | QP |
| 6 | 0.260 | 34.57 | -16.85 | 51.42 | 14.60 | 9.64 | 10.33 | Average |
| 7 | 0.337 | 52.73 | -6.54 | 59.27 | 32.80 | 9.64 | 10.29 | QP |
| 8 | 0.337 | 32.13 | -17.14 | 49.27 | 12.20 | 9.64 | 10.29 | Average |
| 9 | 0.393 | 46.41 | -11.58 | 57.99 | 26.49 | 9.65 | 10.27 | QP |
| 10 | 0.393 | 28.81 | -19.18 | 47.99 | 8.89 | 9.65 | 10.27 | Average |
| 11 | 0.464 | 45.39 | -11.24 | 56.63 | 25.49 | 9.65 | 10.25 | QP |
| 12 | 0.464 | 29.09 | -17.54 | 46.63 | 9.19 | 9.65 | 10.25 | Average |
| 13 | 0.524 | 43.49 | -12.51 | 56.00 | 23.60 | 9.65 | 10.24 | QP |
| 14 | 0.524 | 29.09 | -16.91 | 46.00 | 9.20 | 9.65 | 10.24 | Average |
| 15 | 0.601 | 40.49 | -15.51 | 56.00 | 20.59 | 9.66 | 10.24 | QP |
| 16 | 0.601 | 26.09 | -19.91 | 46.00 | 6.19 | 9.66 | 10.24 | Average |



| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

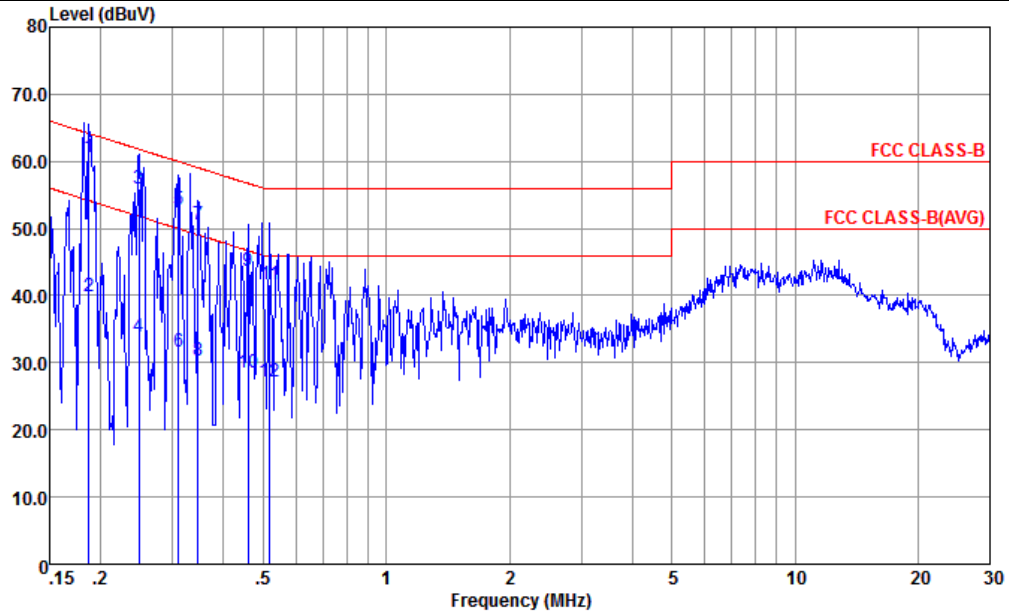

Site : CO01-KS
Condition : FCC CLASS-B TWO-LISN-CN02-N NEUTRAL

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.187 | 60.56 | -3.59 | 64.15 | 40.30 | 9.87 | 10.39 | QP |
| 2 | 0.187 | 39.86 | -14.29 | 54.15 | 19.60 | 9.87 | 10.39 | Average |
| 3 | 0.248 | 55.97 | -5.85 | 61.82 | 35.80 | 9.84 | 10.33 | QP |
| 4 | 0.248 | 33.77 | -18.05 | 51.82 | 13.60 | 9.84 | 10.33 | Average |
| 5 | 0.310 | 52.89 | -7.08 | 59.97 | 32.80 | 9.79 | 10.30 | QP |
| 6 | 0.310 | 31.69 | -18.28 | 49.97 | 11.60 | 9.79 | 10.30 | Average |
| 7 | 0.346 | 50.66 | -8.39 | 59.05 | 30.60 | 9.77 | 10.29 | QP |
| 8 | 0.346 | 30.36 | -18.69 | 49.05 | 10.30 | 9.77 | 10.29 | Average |
| 9 | 0.459 | 43.79 | -12.92 | 56.71 | 23.80 | 9.74 | 10.25 | QP |
| 10 | 0.459 | 28.59 | -18.12 | 46.71 | 8.60 | 9.74 | 10.25 | Average |
| 11 | 0.518 | 41.56 | -14.44 | 56.00 | 21.59 | 9.73 | 10.24 | QP |
| 12 | 0.518 | 27.26 | -18.74 | 46.00 | 7.29 | 9.73 | 10.24 | Average |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

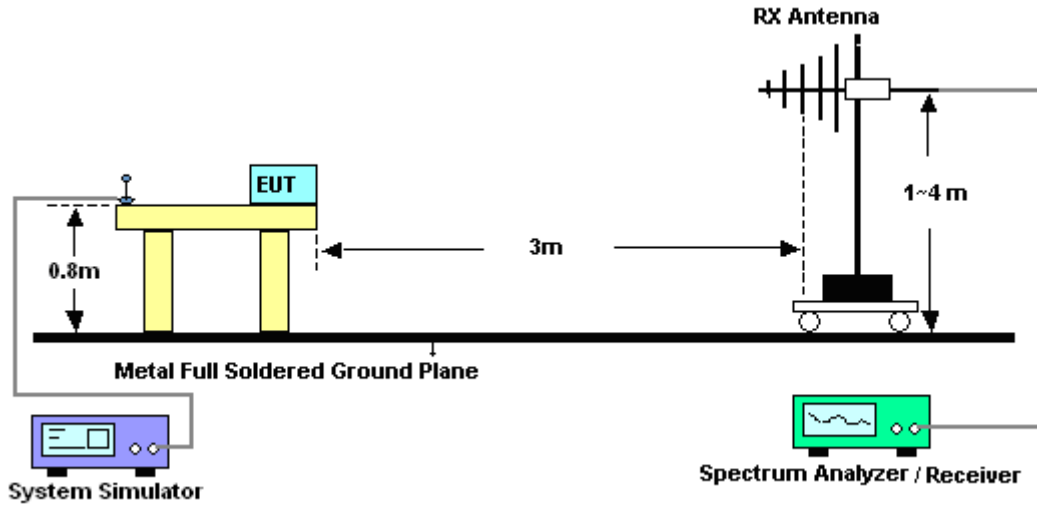


For radiated emissions above 1GHz

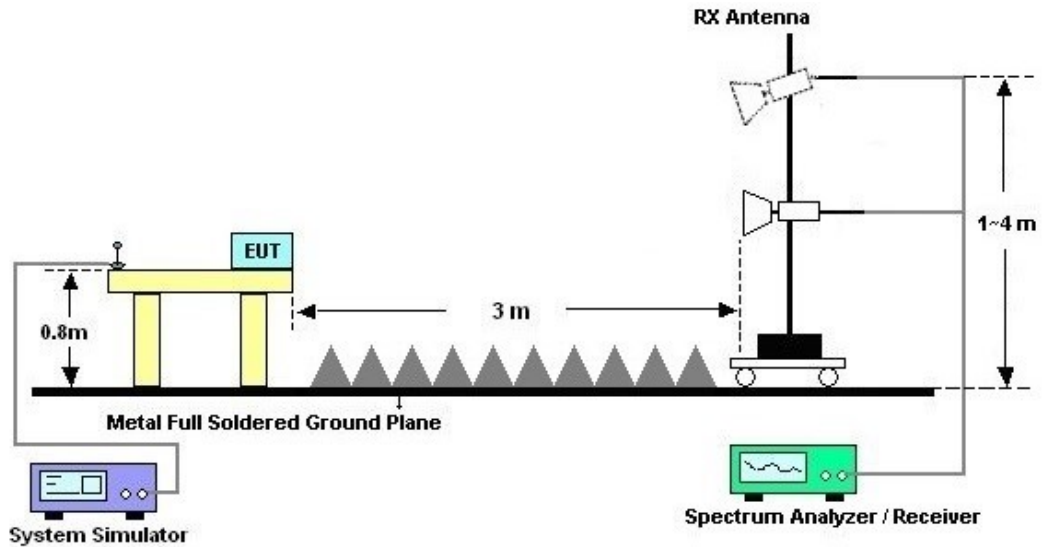



3.2.5. Test Result of Radiated Emission

| | | | |
|-----------------|------|---------------------|------------|
| Test Engineer : | Fang | Temperature : | 21~22°C |
| | | Relative Humidity : | 41~42% |
| Test Distance : | 3m | Polarization : | Horizontal |

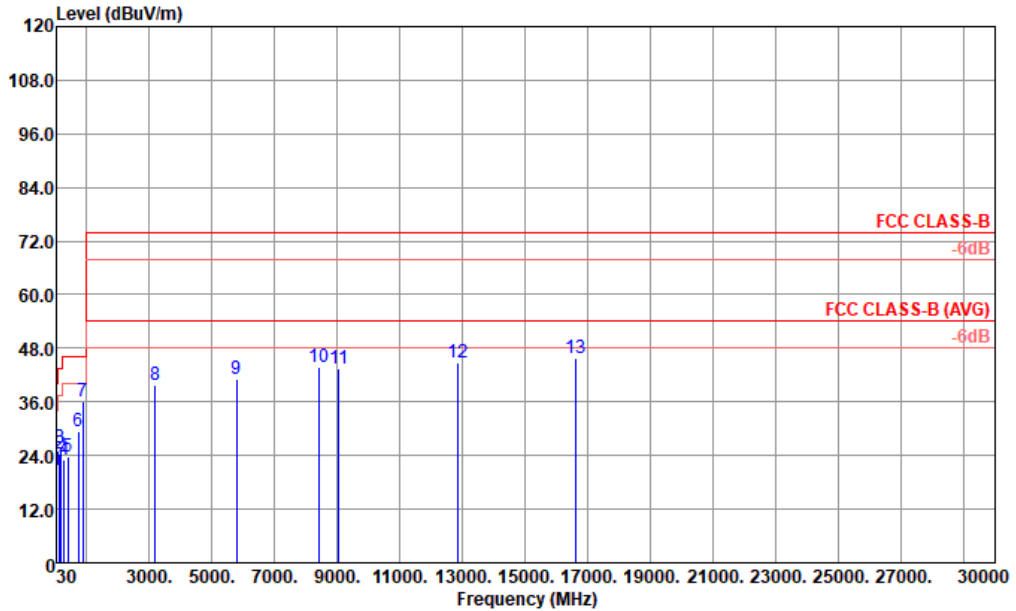


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SM44483 HORIZONTAL

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Factor | Preamp Loss | A/Pos | T/Pos | Remark | |
|----|-----------|--------|------------|------------|-------------------|--------------|-------------|-------|-------|--------|------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 31.940 | 20.71 | -19.29 | 40.00 | 28.30 | 24.04 | 0.57 | 32.20 | --- | --- | Peak |
| 2 | 128.940 | 24.41 | -19.09 | 43.50 | 37.12 | 17.60 | 1.83 | 32.14 | --- | --- | Peak |
| 3 | 166.770 | 25.70 | -17.80 | 43.50 | 39.76 | 15.94 | 2.10 | 32.10 | --- | --- | Peak |
| 4 | 289.960 | 23.17 | -22.83 | 46.00 | 33.31 | 19.20 | 2.78 | 32.12 | --- | --- | Peak |
| 5 | 398.600 | 23.70 | -22.30 | 46.00 | 30.87 | 21.86 | 3.27 | 32.30 | --- | --- | Peak |
| 6 | 726.460 | 29.32 | -16.68 | 46.00 | 29.68 | 27.49 | 4.40 | 32.25 | --- | --- | Peak |
| 7 | 881.660 | 36.07 | -9.93 | 46.00 | 34.32 | 29.17 | 4.85 | 32.27 | --- | --- | Peak |
| 8 | 3176.000 | 39.72 | -34.28 | 74.00 | 58.38 | 33.38 | 9.28 | 61.32 | --- | --- | Peak |
| 9 | 5784.000 | 41.06 | -32.94 | 74.00 | 54.74 | 35.28 | 12.66 | 61.62 | --- | --- | Peak |
| 10 | 8408.000 | 43.86 | -30.14 | 74.00 | 54.01 | 36.47 | 15.59 | 62.21 | --- | --- | Peak |
| 11 | 9036.000 | 43.31 | -30.69 | 74.00 | 51.71 | 37.87 | 16.06 | 62.33 | --- | --- | Peak |
| 12 | 12834.000 | 44.63 | -29.37 | 74.00 | 48.05 | 38.75 | 19.36 | 61.53 | --- | --- | Peak |
| 13 | 16605.000 | 45.66 | -28.34 | 74.00 | 45.08 | 40.26 | 22.27 | 61.95 | --- | --- | Peak |



| | | | |
|-----------------|------|---------------------|----------|
| Test Engineer : | Fang | Temperature : | 21~22°C |
| | | Relative Humidity : | 41~42% |
| Test Distance : | 3m | Polarization : | Vertical |

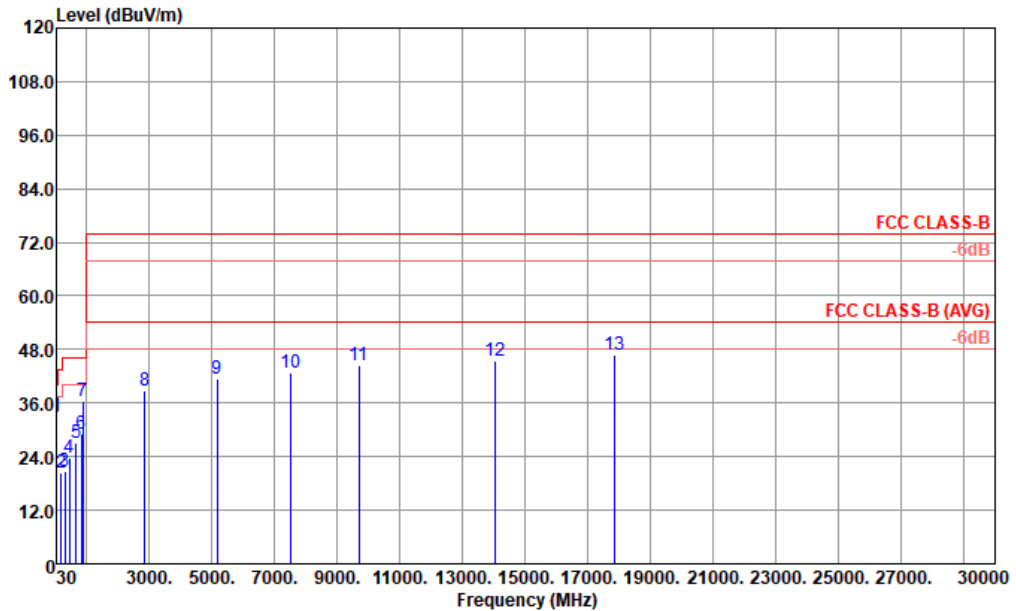

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | A/Pos | T/Pos | Remark | |
|----|-----------|--------|------------|------------|-------------------|------------|---------------|-------|-------|--------|------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 44.550 | 33.03 | -6.97 | 40.00 | 47.08 | 17.35 | 0.78 | 32.18 | --- | --- | Peak |
| 2 | 176.470 | 20.39 | -23.11 | 43.50 | 35.02 | 15.32 | 2.15 | 32.10 | --- | --- | Peak |
| 3 | 311.300 | 20.82 | -25.18 | 46.00 | 30.55 | 19.51 | 2.88 | 32.12 | --- | --- | Peak |
| 4 | 453.890 | 23.84 | -22.16 | 46.00 | 29.41 | 23.17 | 3.48 | 32.22 | --- | --- | Peak |
| 5 | 655.650 | 27.10 | -18.90 | 46.00 | 28.61 | 26.52 | 4.17 | 32.20 | --- | --- | Peak |
| 6 | 816.670 | 29.17 | -16.83 | 46.00 | 28.26 | 28.57 | 4.67 | 32.33 | --- | --- | Peak |
| 7 | 881.660 | 36.46 | -9.54 | 46.00 | 34.71 | 29.17 | 4.85 | 32.27 | --- | --- | Peak |
| 8 | 2856.000 | 38.86 | -35.14 | 74.00 | 59.04 | 32.60 | 8.80 | 61.58 | --- | --- | Peak |
| 9 | 5160.000 | 41.57 | -32.43 | 74.00 | 56.31 | 34.95 | 12.00 | 61.69 | --- | --- | Peak |
| 10 | 7520.000 | 42.82 | -31.18 | 74.00 | 53.57 | 36.52 | 14.58 | 61.85 | --- | --- | Peak |
| 11 | 9684.000 | 44.44 | -29.56 | 74.00 | 52.37 | 37.50 | 16.59 | 62.02 | --- | --- | Peak |
| 12 | 14022.000 | 45.50 | -28.50 | 74.00 | 48.37 | 38.61 | 20.13 | 61.61 | --- | --- | Peak |
| 13 | 17856.000 | 46.84 | -27.16 | 74.00 | 42.87 | 41.34 | 23.49 | 60.86 | --- | --- | Peak |

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|--------------|------------|------------------|----------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver | R&S | ESC17 | 100768 | 9kHz~7GHz; | Apr. 21, 2021 | Sep. 14, 2021 | Apr. 20, 2022 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 17, 2020 | Sep. 14, 2021 | Oct. 16, 2021 | Conduction (CO01-KS) |
| AC LISN | R&S | ENV216 | 100334 | 9kHz~30MHz | Oct. 17, 2020 | Sep. 14, 2021 | Oct. 16, 2021 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP0000008 11 | AC 0V~300V, 45Hz~1000Hz | Oct. 17, 2020 | Sep. 14, 2021 | Oct. 16, 2021 | Conduction (CO01-KS) |
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz;Ma x 30dBm | Oct. 17, 2020 | Sep. 12, 2021 | Oct. 16, 2021 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55370528 | 10Hz-44G,MAX 30dB | Oct. 17, 2020 | Sep. 12, 2021 | Oct. 16, 2021 | Radiation (03CH02-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 44483 | 30MHz-1GHz | Jan. 26, 2021 | Sep. 12, 2021 | Jan. 25, 2022 | Radiation (03CH02-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 75957 | 1GHz~18GHz | Nov. 01, 2020 | Sep. 12, 2021 | Oct. 31, 2021 | Radiation (03CH02-KS) |
| SHF-EHF Horn | Com-power | AH-840 | 101115 | 18GHz~40GHz | Nov. 06, 2020 | Sep. 12, 2021 | Nov. 05, 2021 | Radiation (03CH02-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz-1GHz | Apr. 12, 2021 | Sep. 12, 2021 | Apr. 11, 2022 | Radiation (03CH02-KS) |
| Amplifier | Keysight | 83017A | MY53270316 | 500MHz~26.5G Hz | Oct. 17, 2020 | Sep. 12, 2021 | Oct. 16, 2021 | Radiation (03CH02-KS) |
| Amplifier | MITEQ | EM18G40GGA | 060728 | 18~40GHz | Jan. 06, 2021 | Sep. 12, 2021 | Jan. 05, 2022 | Radiation (03CH02-KS) |
| AC Power Source | Chroma | 61601 | 61601000247 3 | N/A | NCR | Sep. 12, 2021 | NCR | Radiation (03CH02-KS) |
| Turn Table | MF | MF7802 | N/A | 0~360 degree | NCR | Sep. 12, 2021 | NCR | Radiation (03CH02-KS) |
| Antenna Mast | MF | MF7802 | N/A | 1 m~4 m | NCR | Sep. 12, 2021 | NCR | Radiation (03CH02-KS) |

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.9B |
|---|------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.9dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.0dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.1dB |
|---|-------|