



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Phone
BRAND NAME : Motorola
MODEL NAME : XT2155-1
FCC ID : IHDT56ZW4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : May 12, 2021 ~ Jun. 09, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Testing Location 6

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 34

 3.6 AC Conducted Emission Measurement..... 38

 3.7 Antenna Requirements 40

4 LIST OF MEASURING EQUIPMENT 41

5 UNCERTAINTY OF EVALUATION 42

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS

APPENDIX F. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	N/A	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.35 dB at 2389.950 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.27 dB at 0.186 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	N/A	-

Remark: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago, IL60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago, IL60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Motorola
Model Name	XT2155-1
FCC ID	IHDT56ZW4
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE FM Receiver, and GNSS
IMEI Code	Conducted: N/A Conduction: 350164370005399 Radiation: N/A
HW Version	DVT2
SW Version	RON31.179-2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.35 dBm (0.1365 W) 802.11g : 23.39 dBm (0.2183 W) 802.11n HT20 : 21.95 dBm (0.1567 W)
Antenna Type / Gain	PIFA Antenna type with gain -2.5 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-106
AC Adapter 2(Chile)	Brand Name	Motorola (Salcomp)	Model Name	MC-109
AC Adapter 3(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 3(AR)	Brand Name	Motorola (Aohai)	Model Name	MC-106
Battery 1	Brand Name	Motorola (ATL)	Model Name	NT40
Battery 2	Brand Name	Motorola (SCUD)	Model Name	NT40
Earphone 1	Brand Name	Motorola (NEW LEADER)	Model Name	NLD-EM313A-23SF
Earphone 2	Brand Name	Motorola (Ju wei)	Model Name	JWEP1185-ZN01H
USB Cable	Brand Name	Motorola (Ju wei)	Model Name	JWUB1485-ZN01H

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309



1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Co-location
WIFI 802.11n20 + LTE 2 BW=20M


Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter3) + Earphone 1 + Battery 1
Remark: 1. For Radiated Test Cases, The tests were performance with Battery.	

2.3 Connection Diagram of Test System

For Radiated Emission

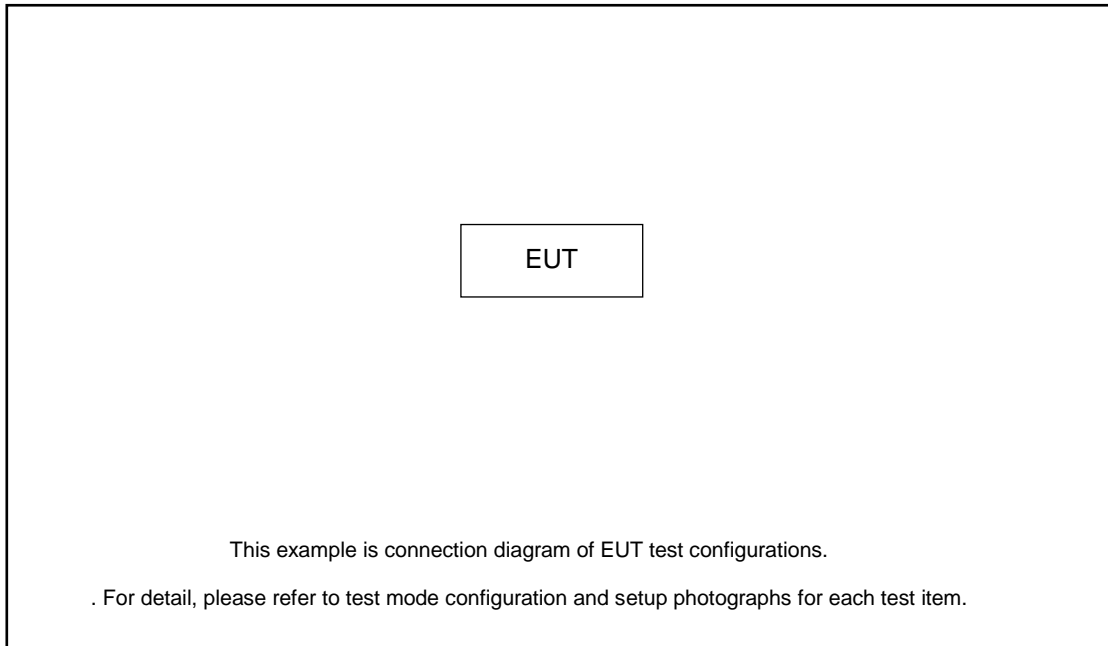

For Conducted Emission

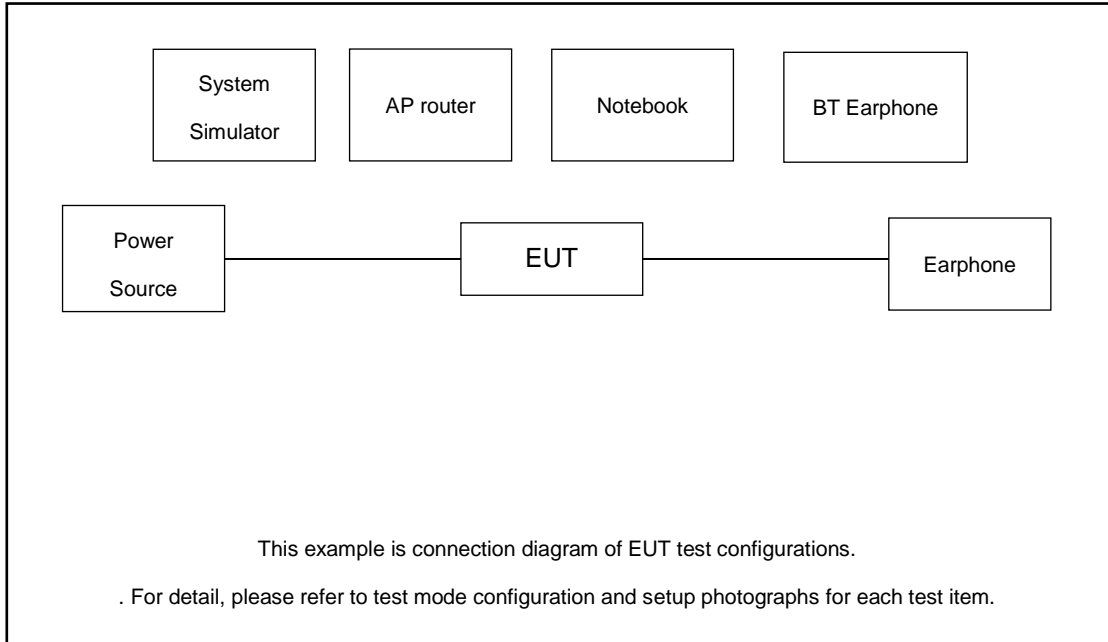

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.6dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

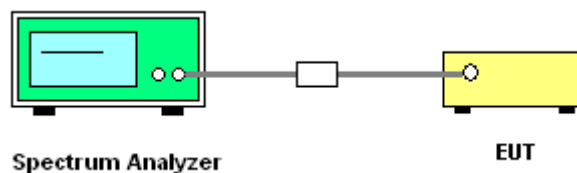



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

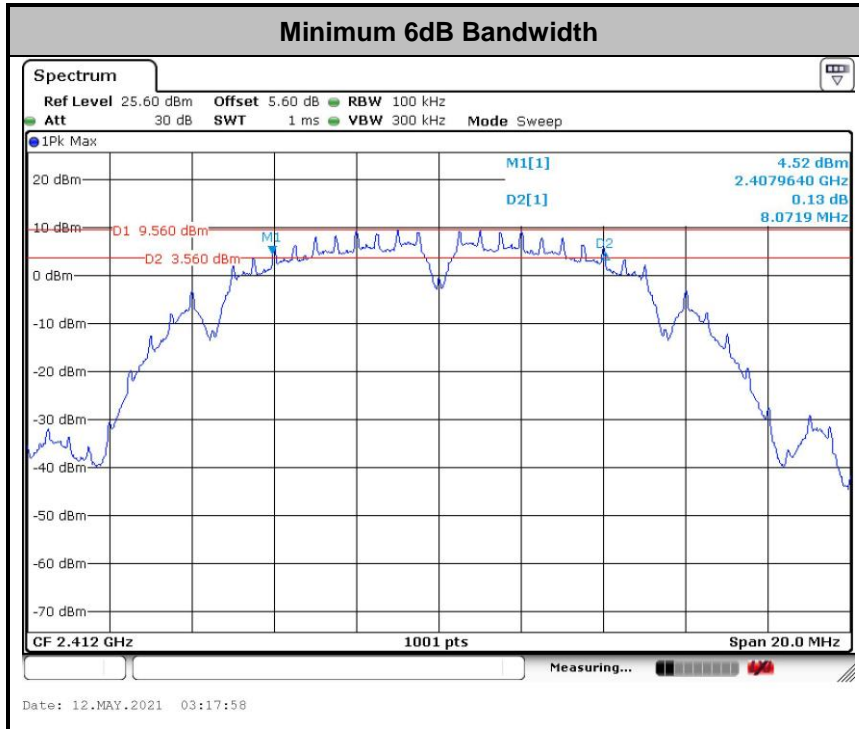

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

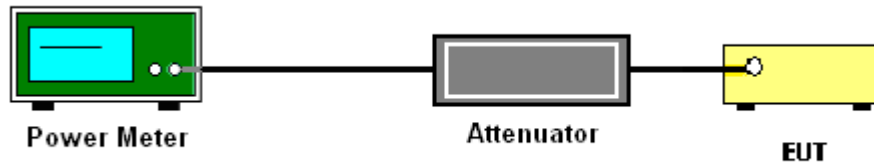

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

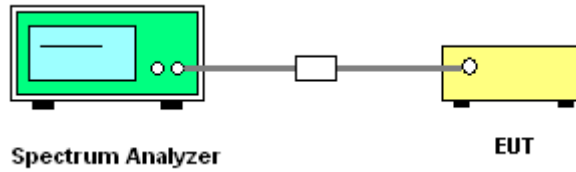

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

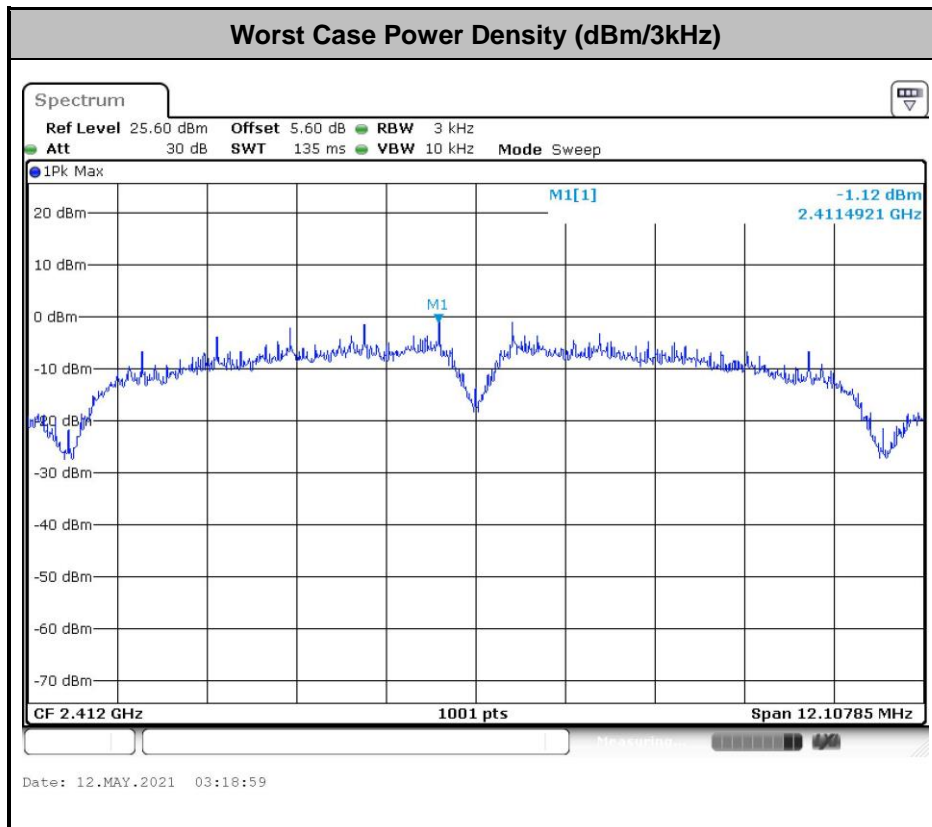

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup


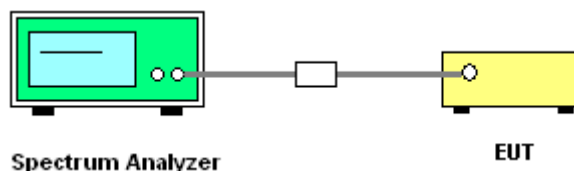




3.4.5 Test Result of Conducted Band Edges and Spurious Emission



Test Engineer : Jiang Jun	Temperature : 21~25°C
	Relative Humidity : 51~54%

Test Mode : 802.11b	Test Channel : 01
---------------------	-------------------

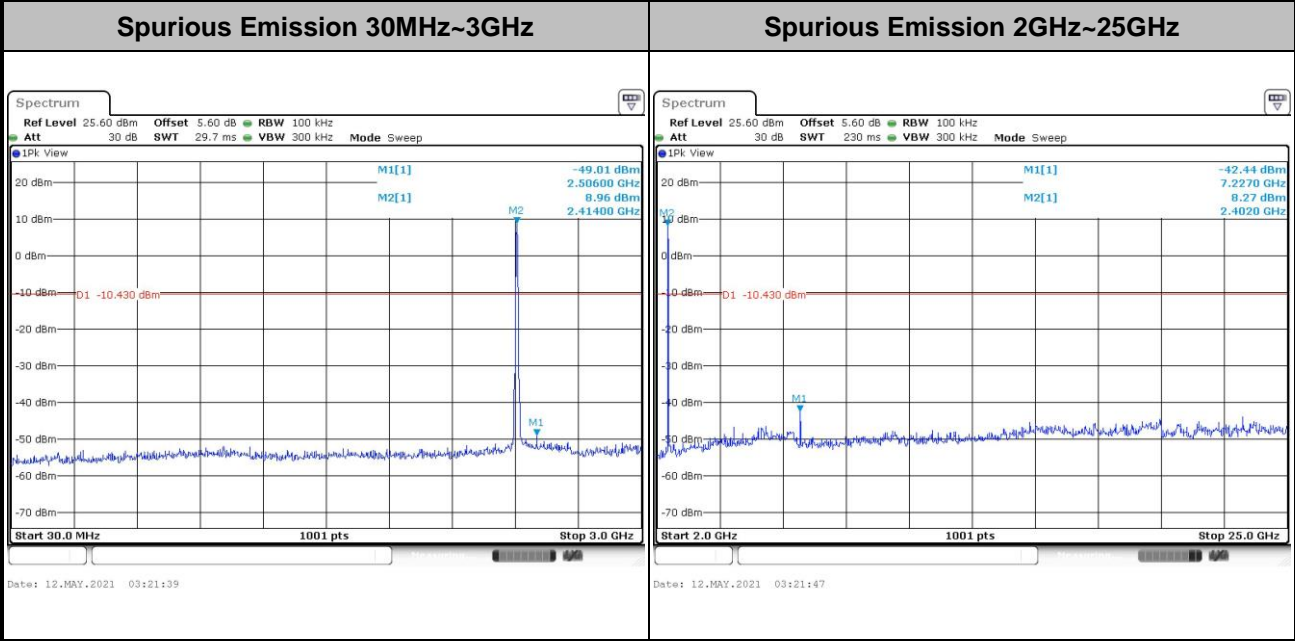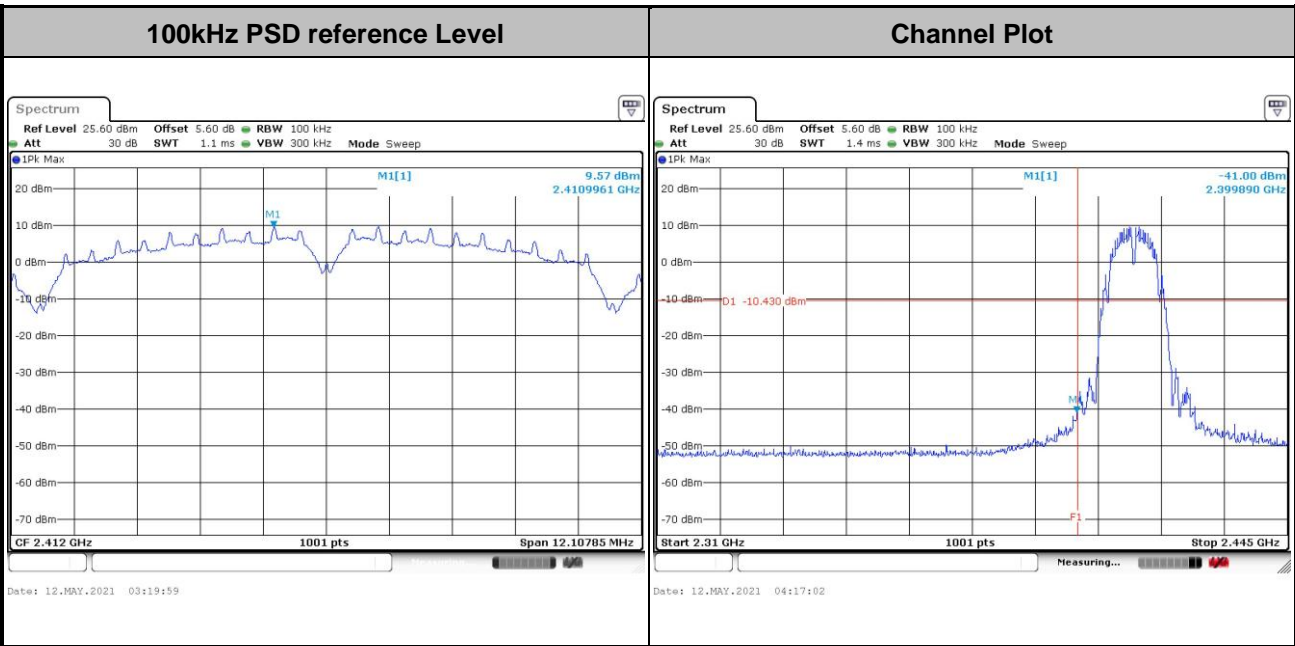





Test Mode :	802.11b	Test Channel :	03
-------------	---------	----------------	----

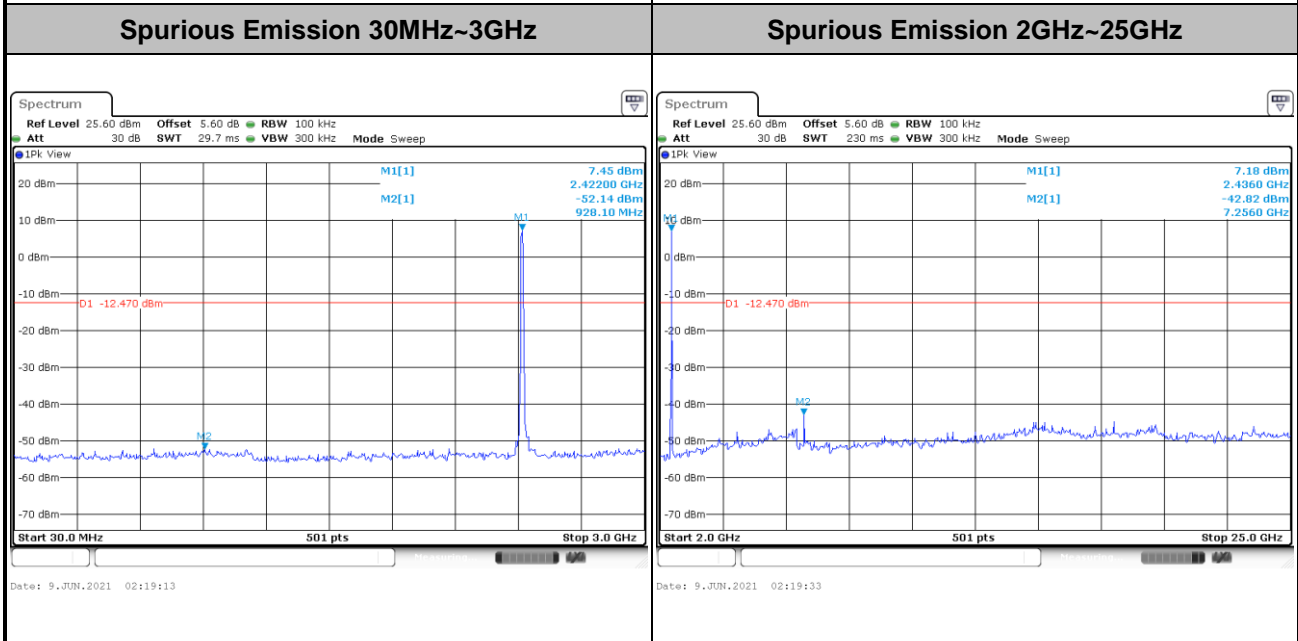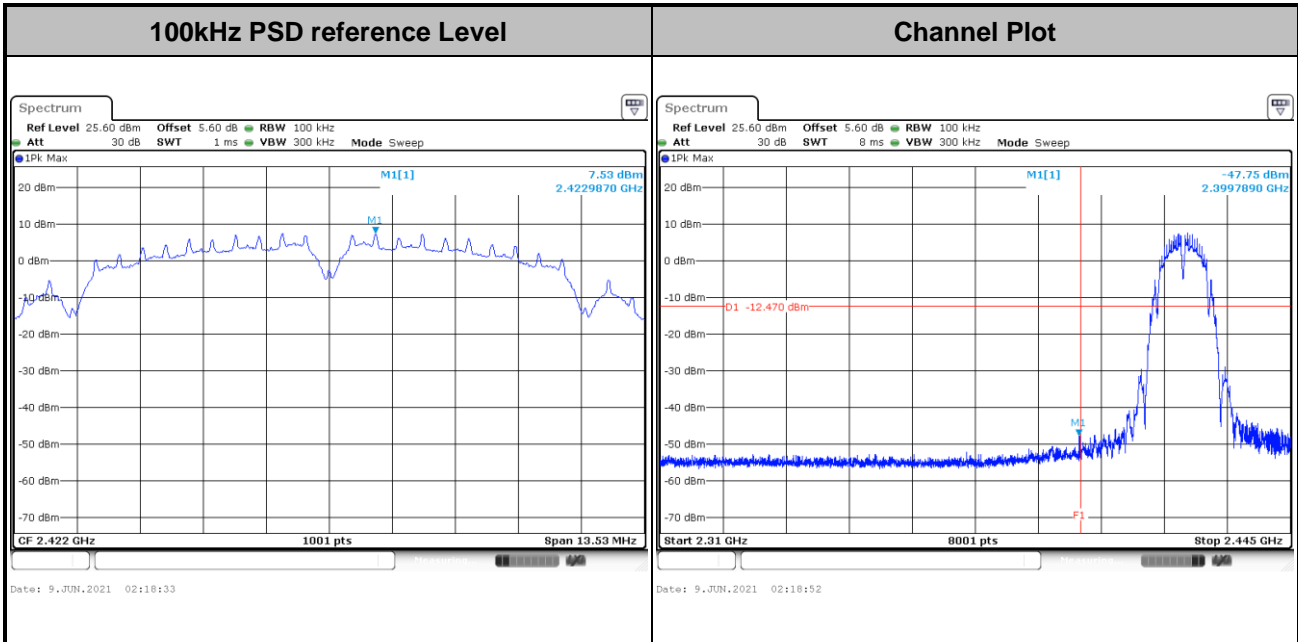




Test Mode :	802.11b	Test Channel :	04
-------------	---------	----------------	----

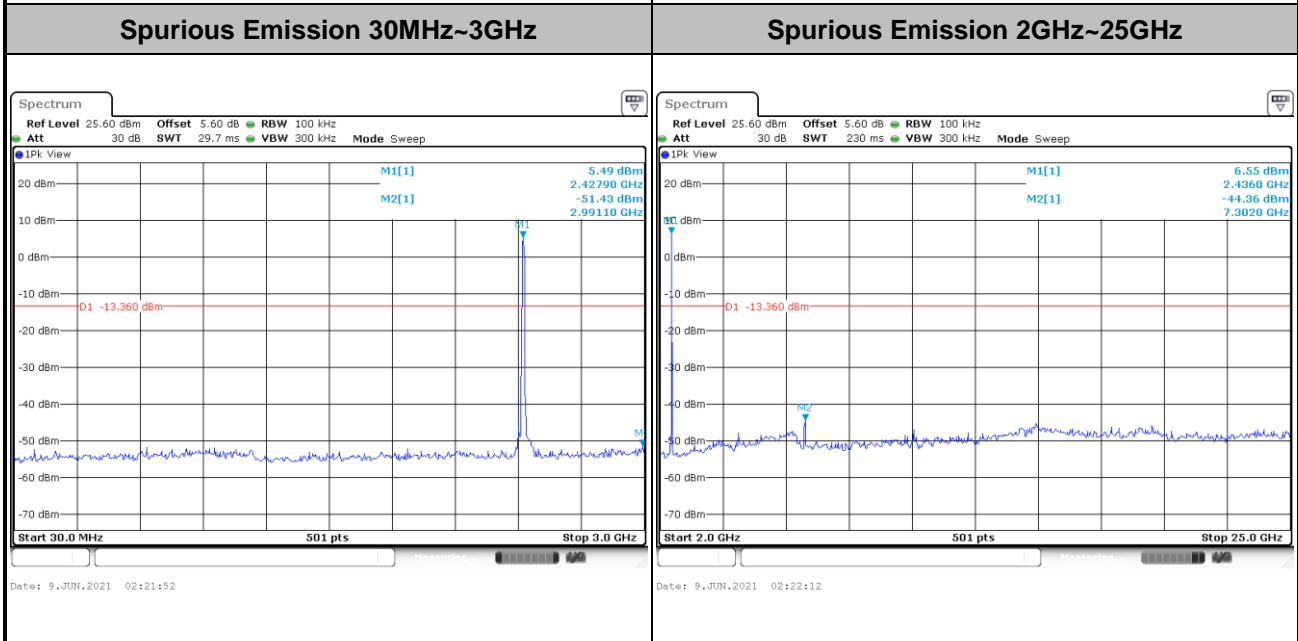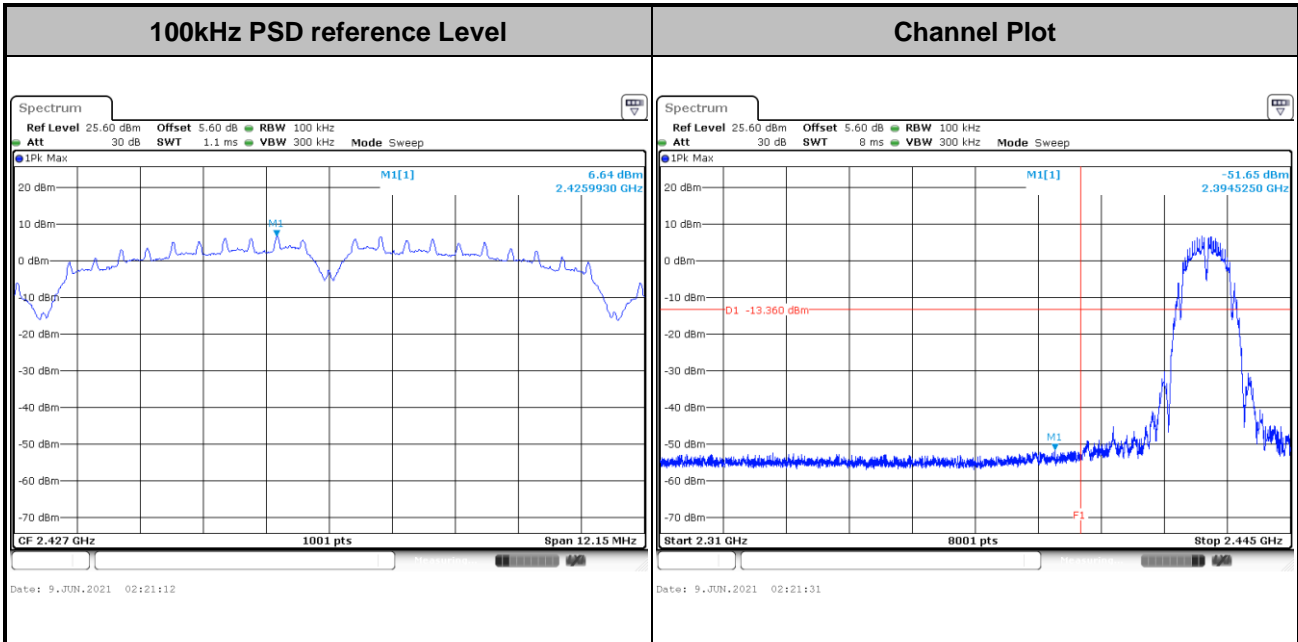





Test Mode :	802.11b	Test Channel :	05
-------------	---------	----------------	----

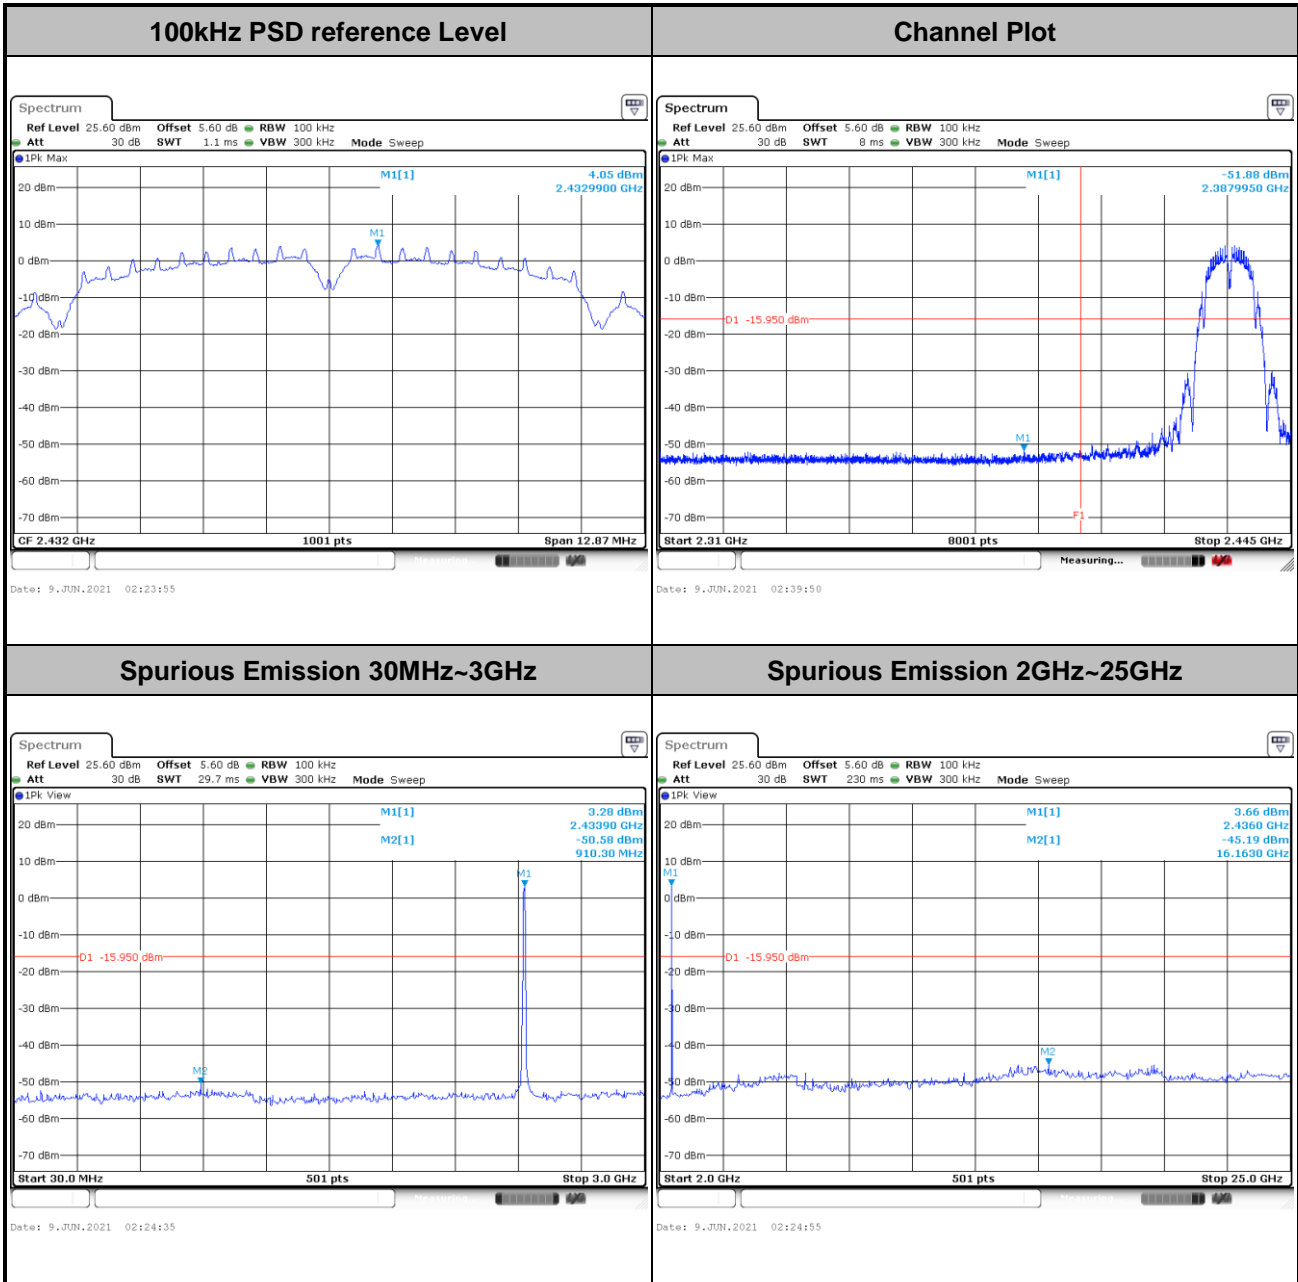





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

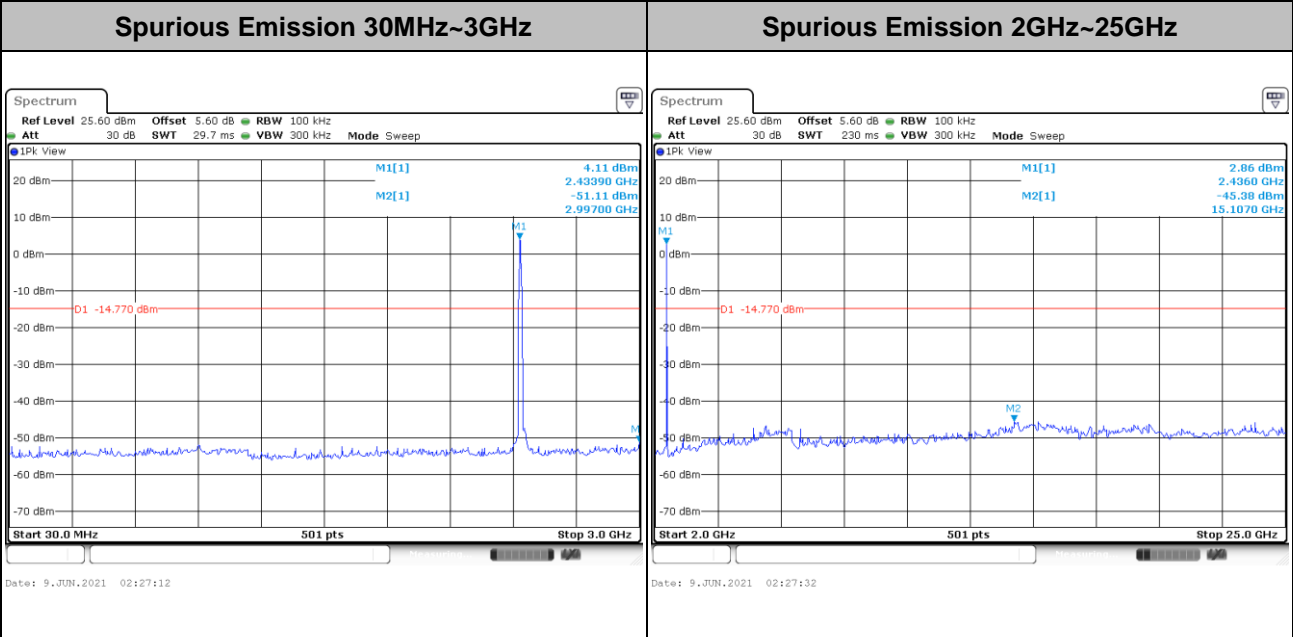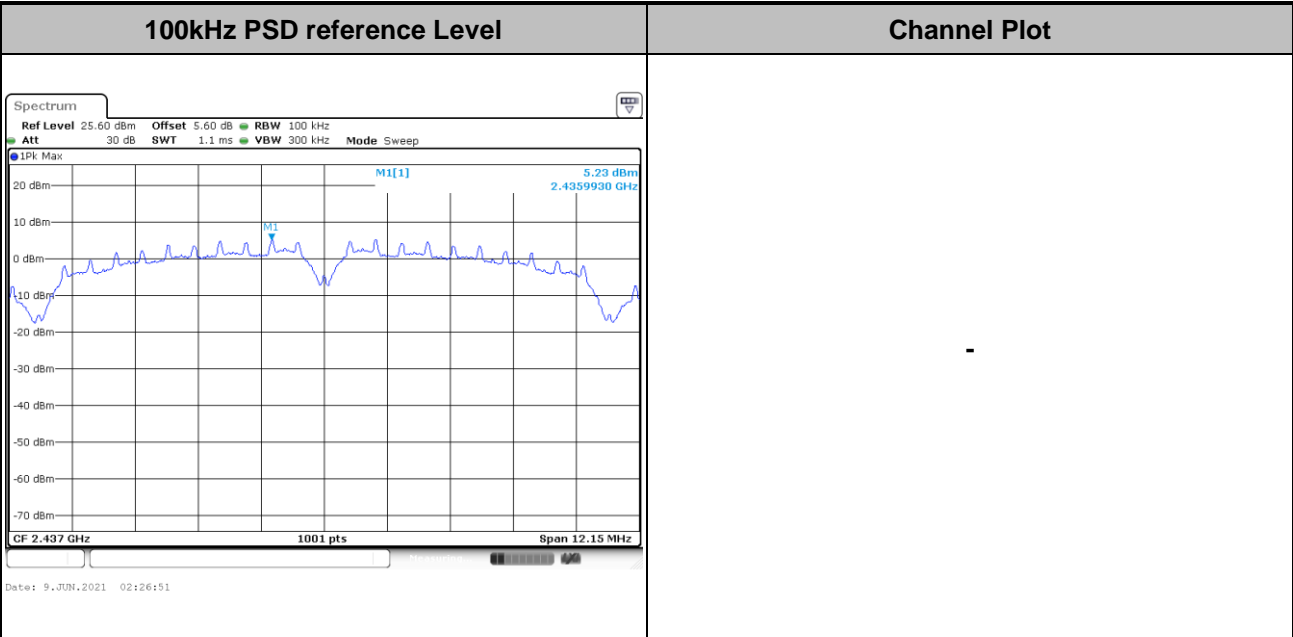





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

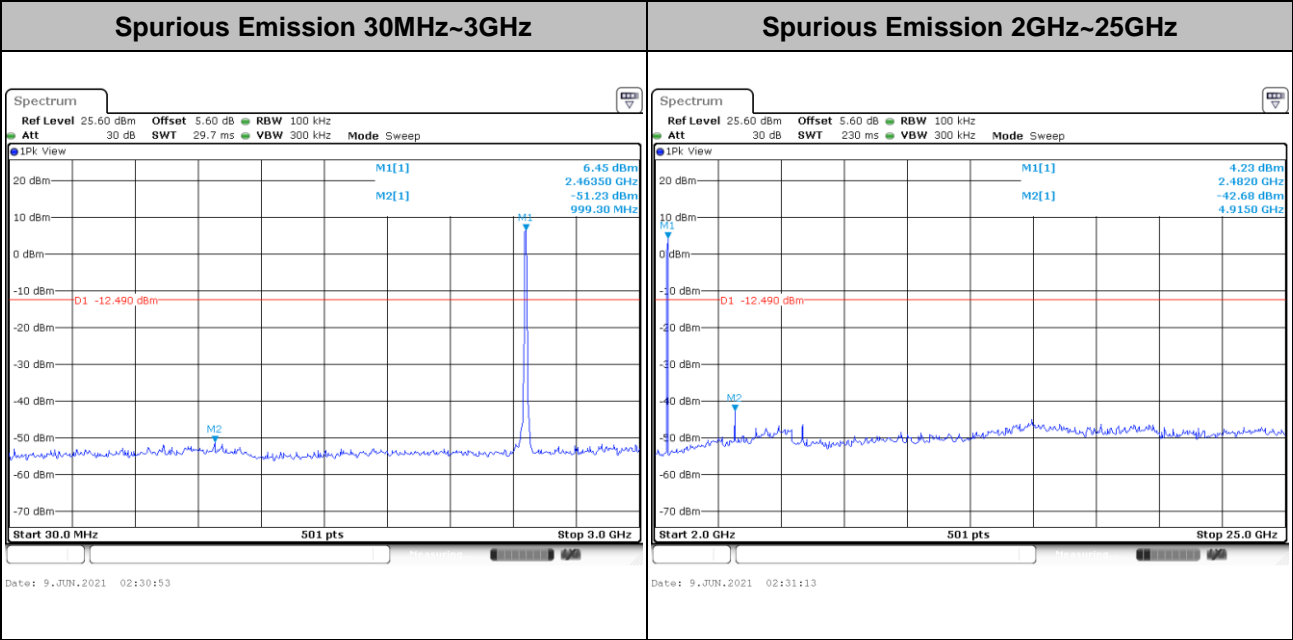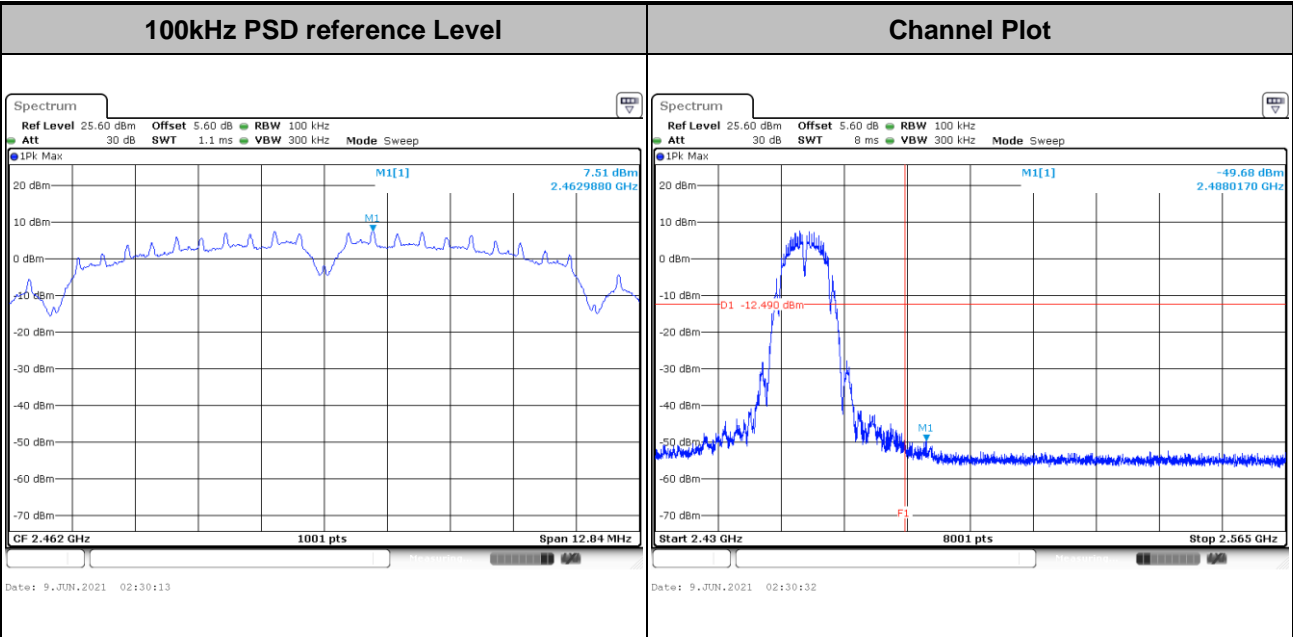




Test Mode : 802.11g Test Channel : 01

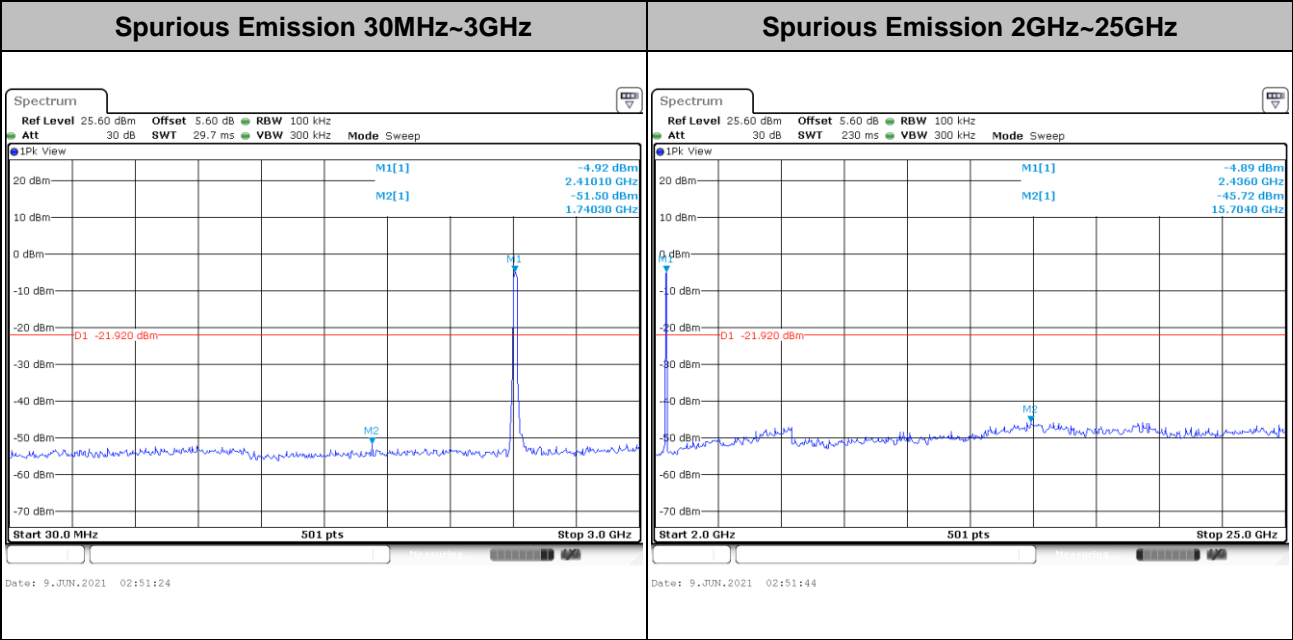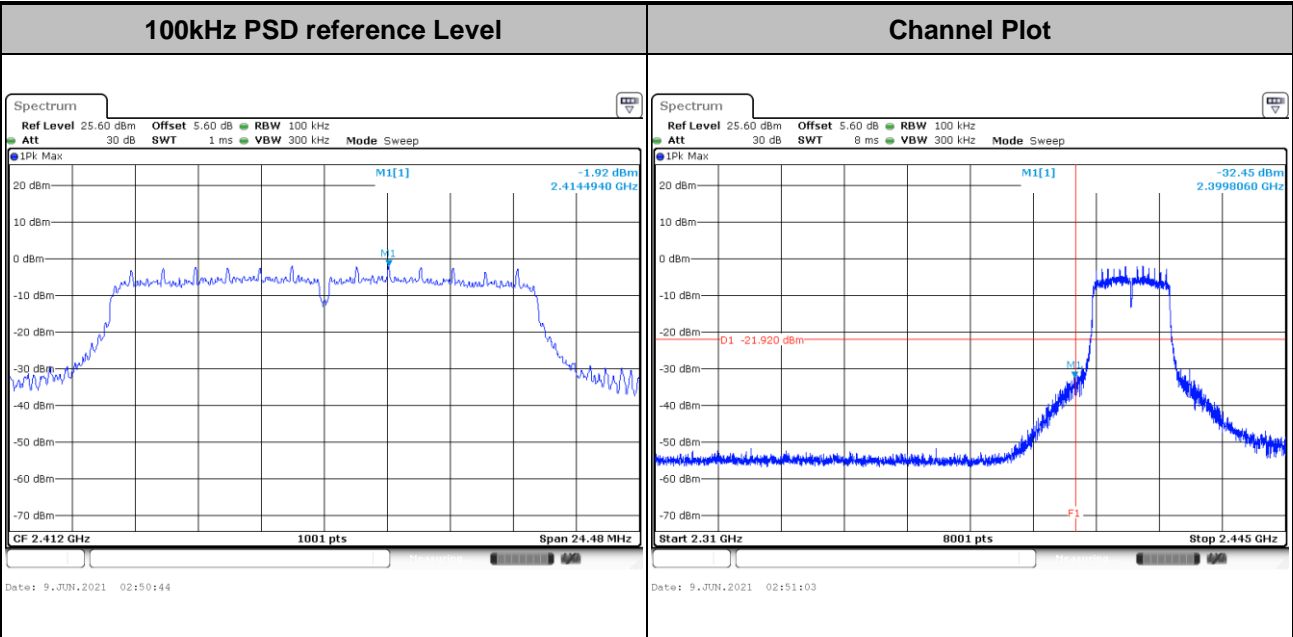





Test Mode :	802.11g	Test Channel :	02
-------------	---------	----------------	----

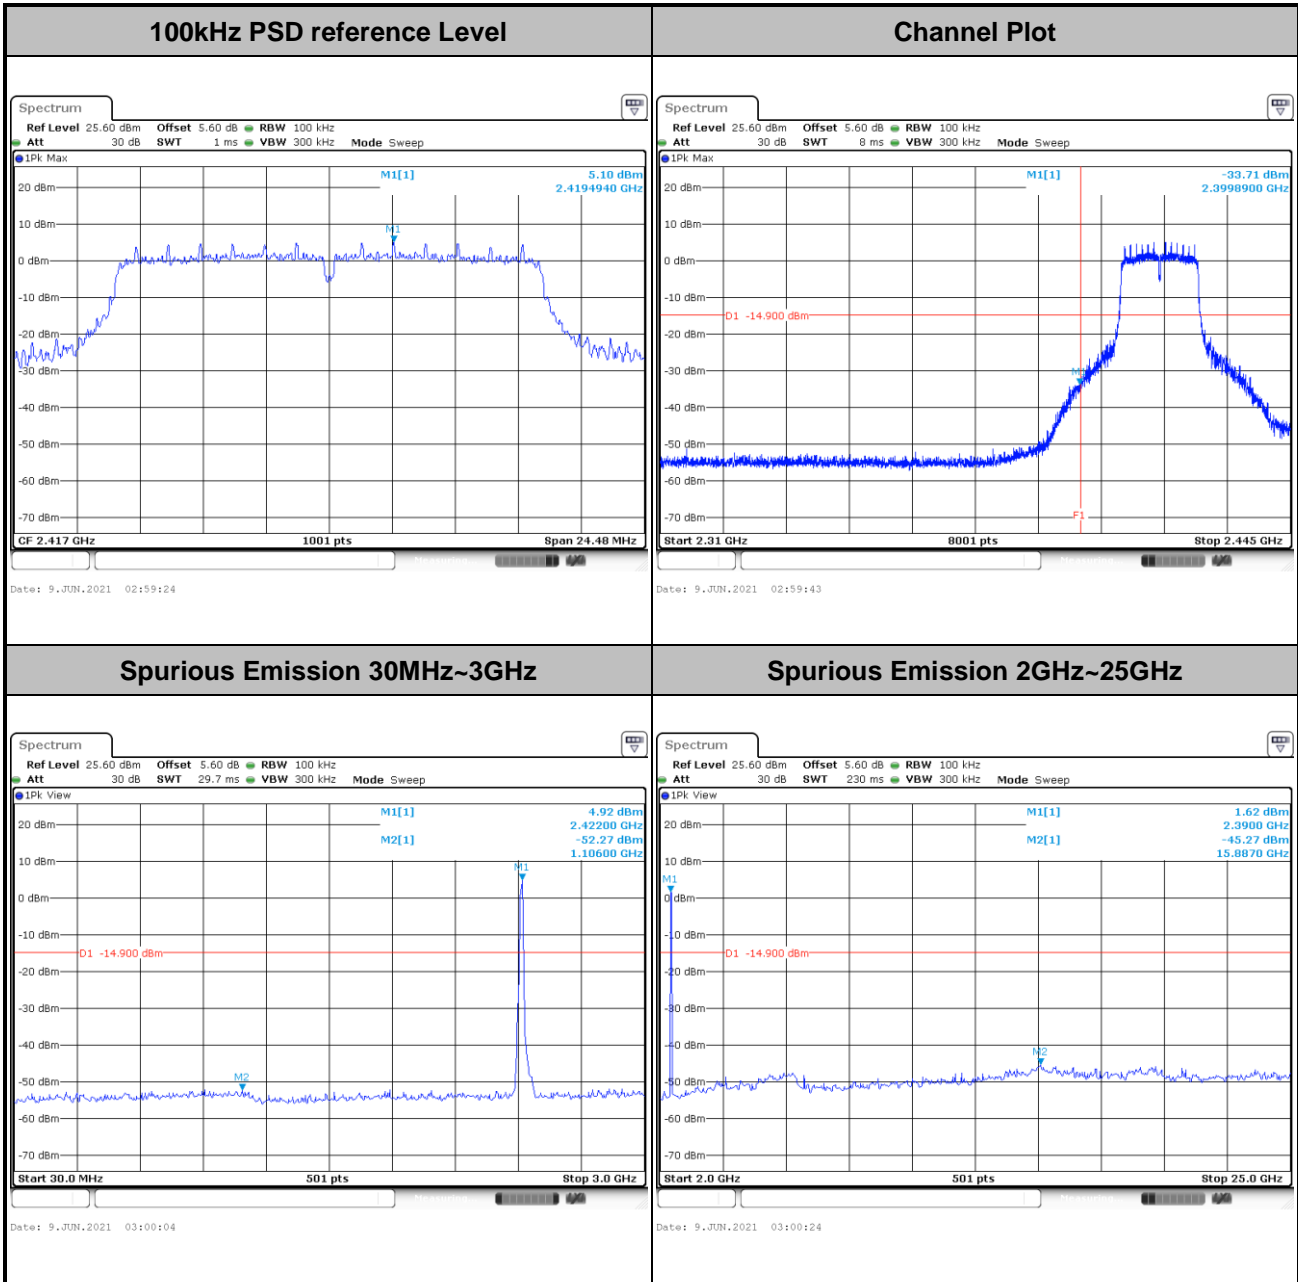





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

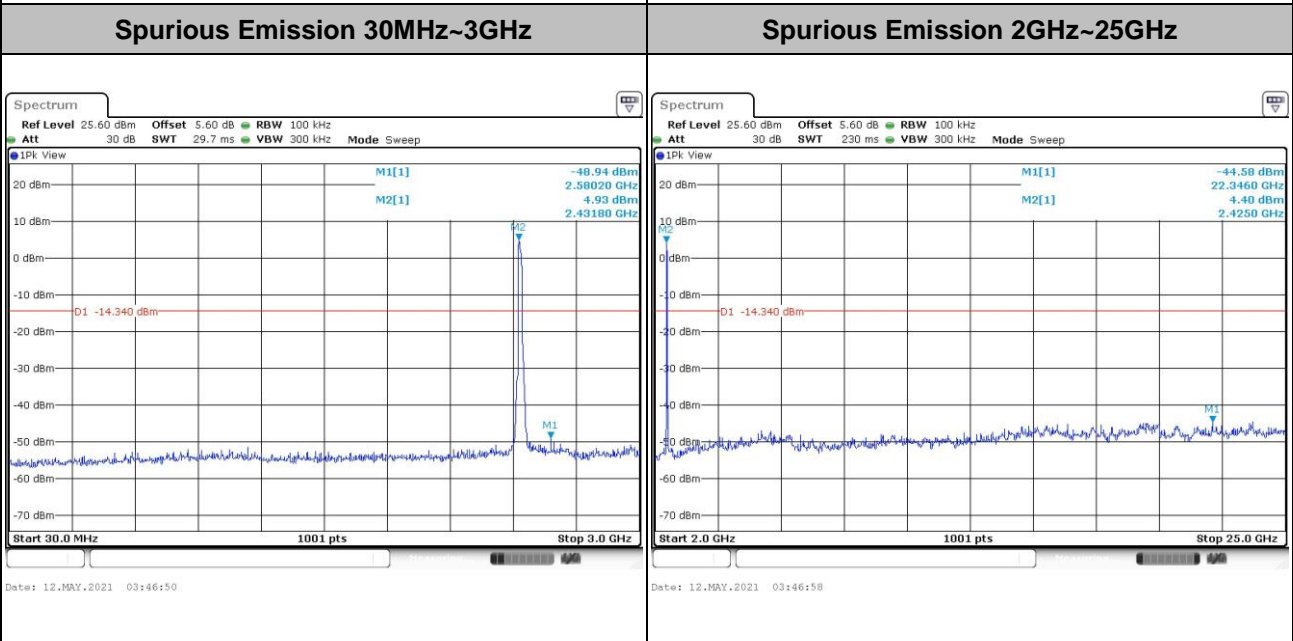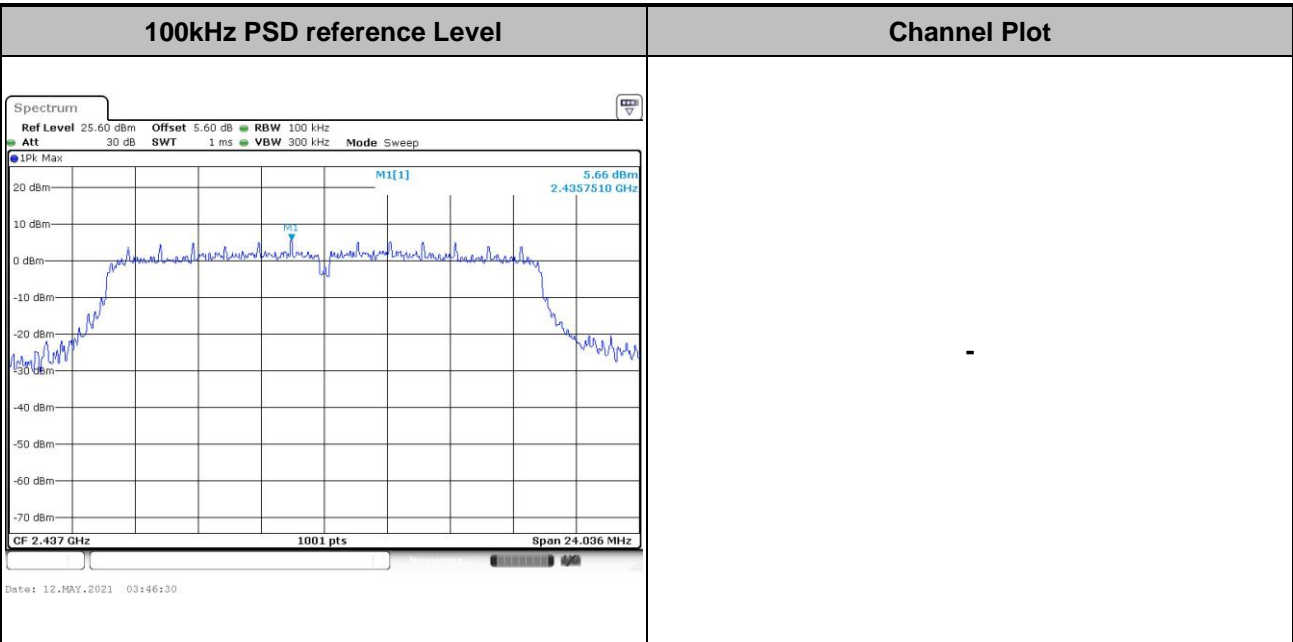





Test Mode : 802.11g Test Channel : 10

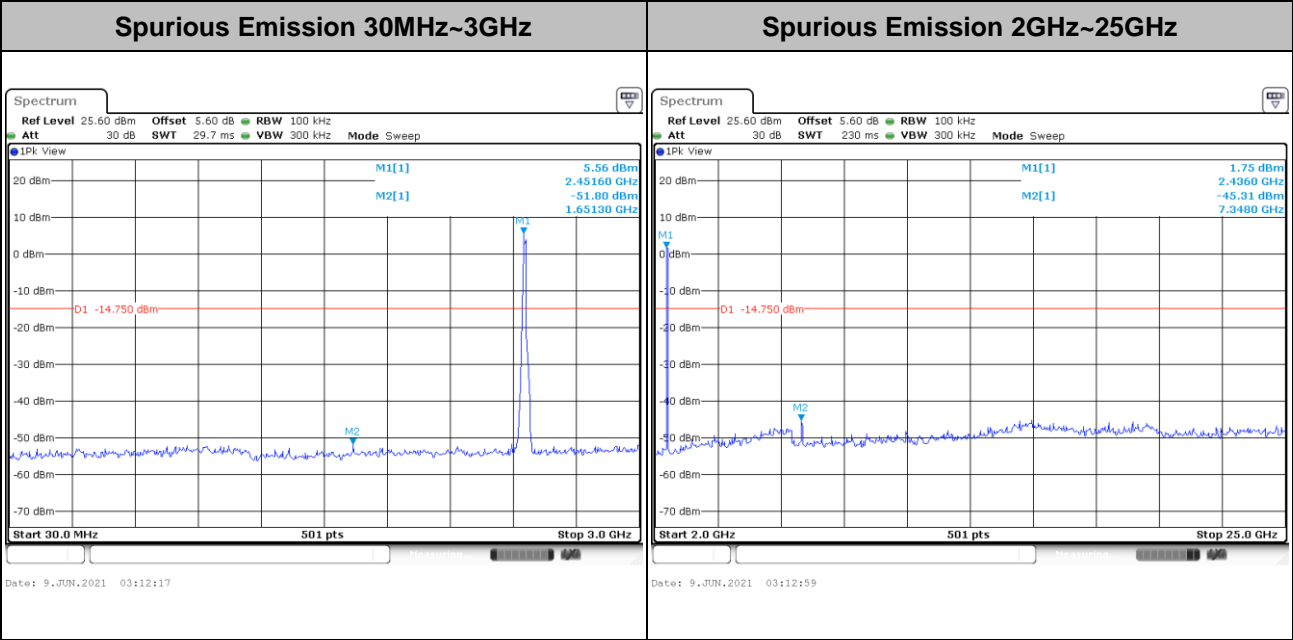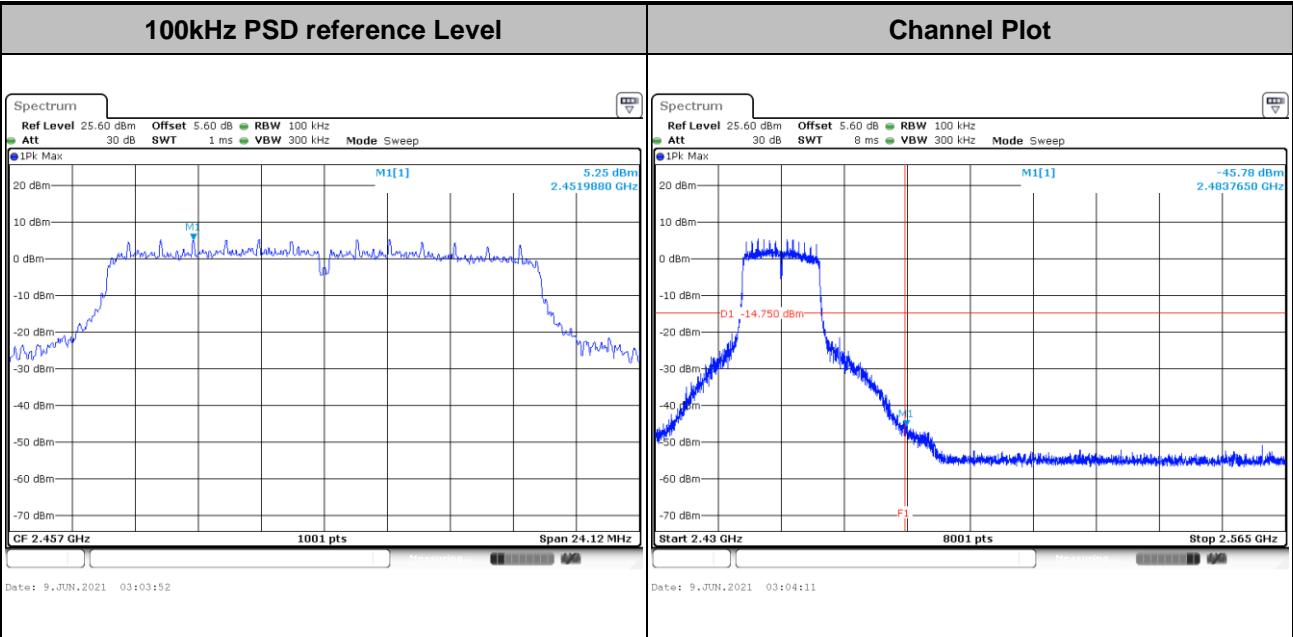





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

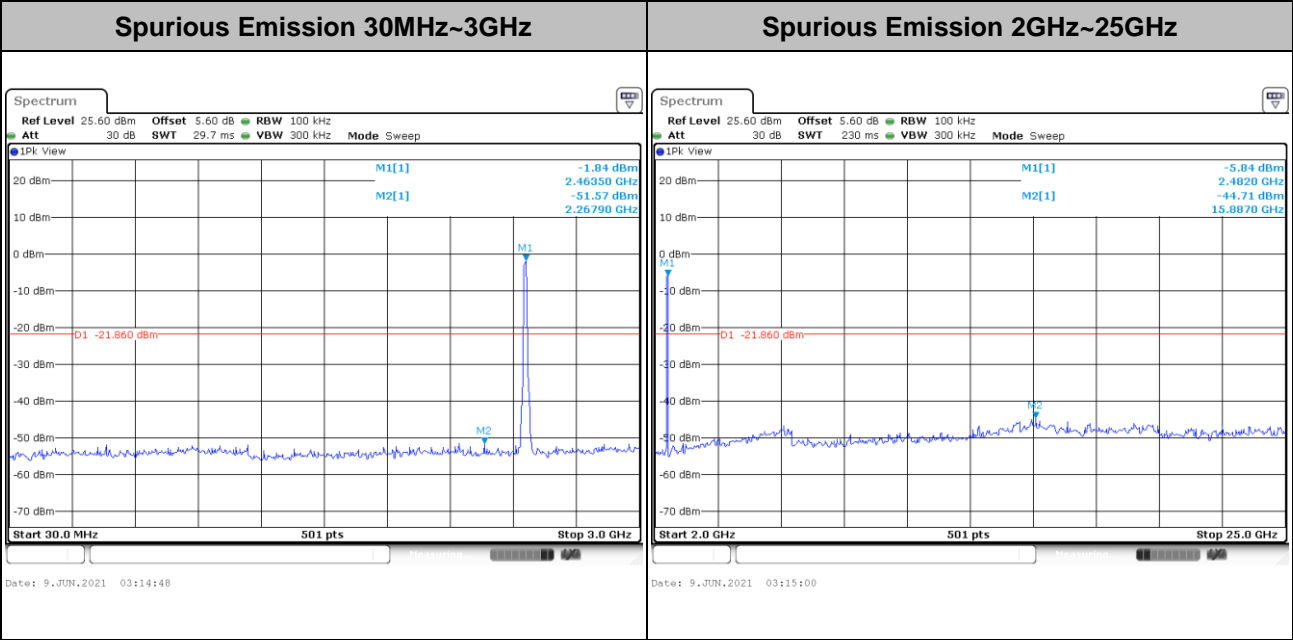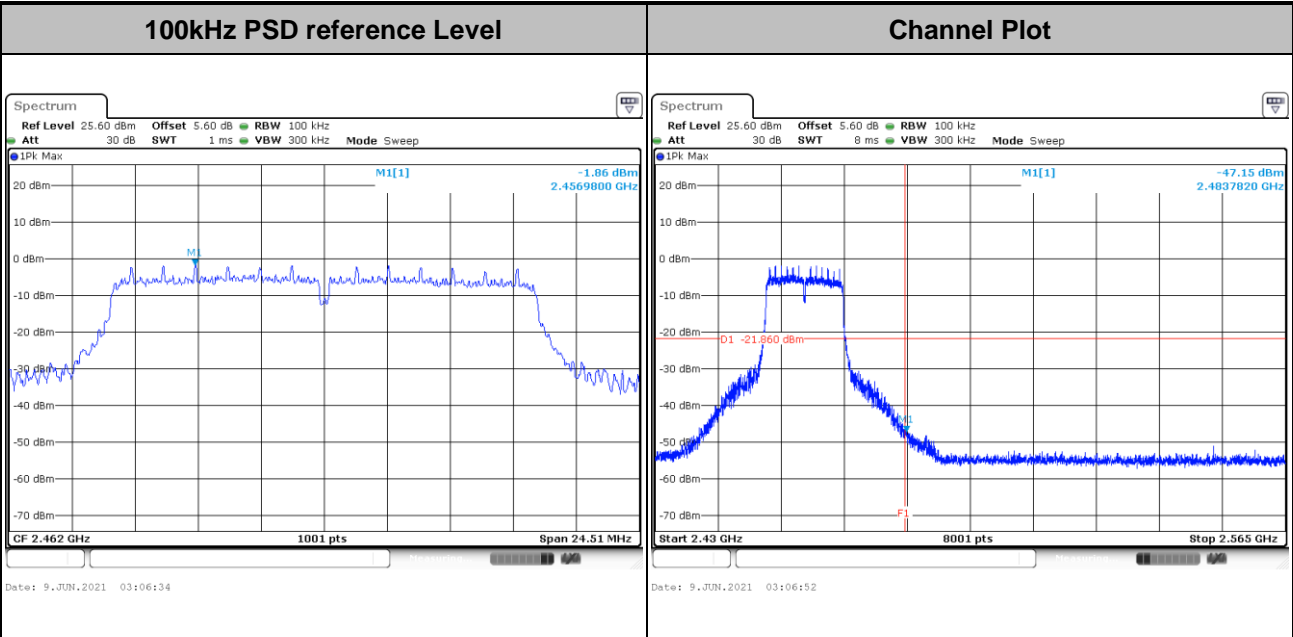




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

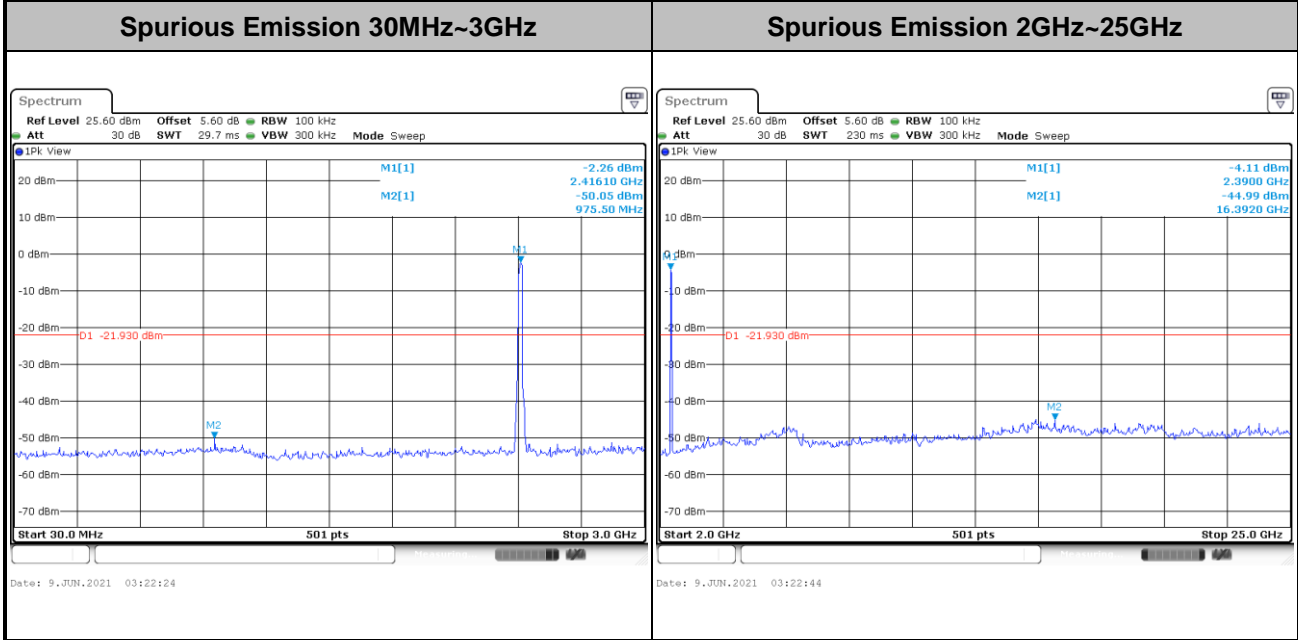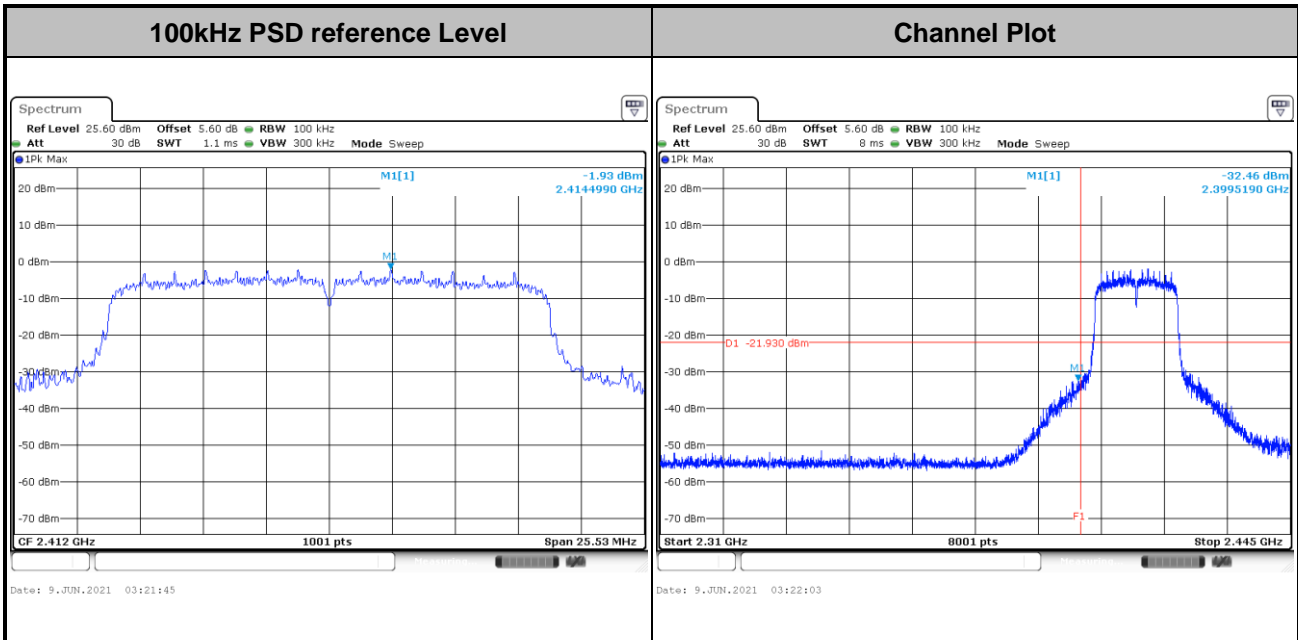





Test Mode :	802.11n HT20	Test Channel :	02
-------------	--------------	----------------	----

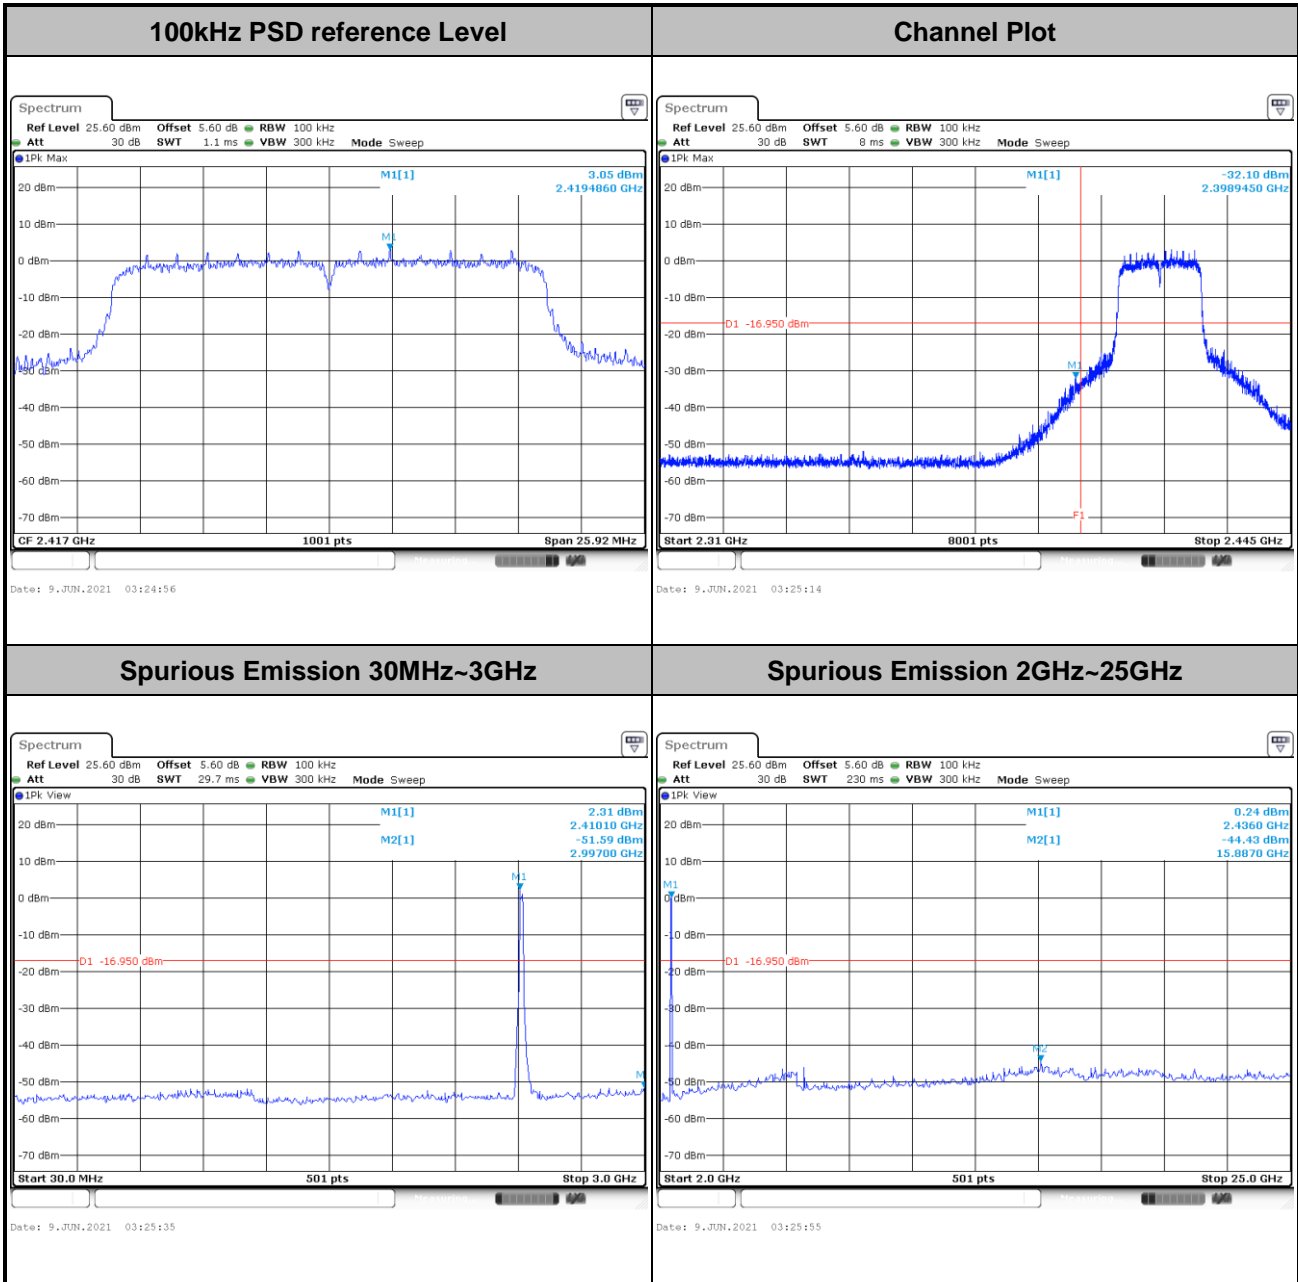




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

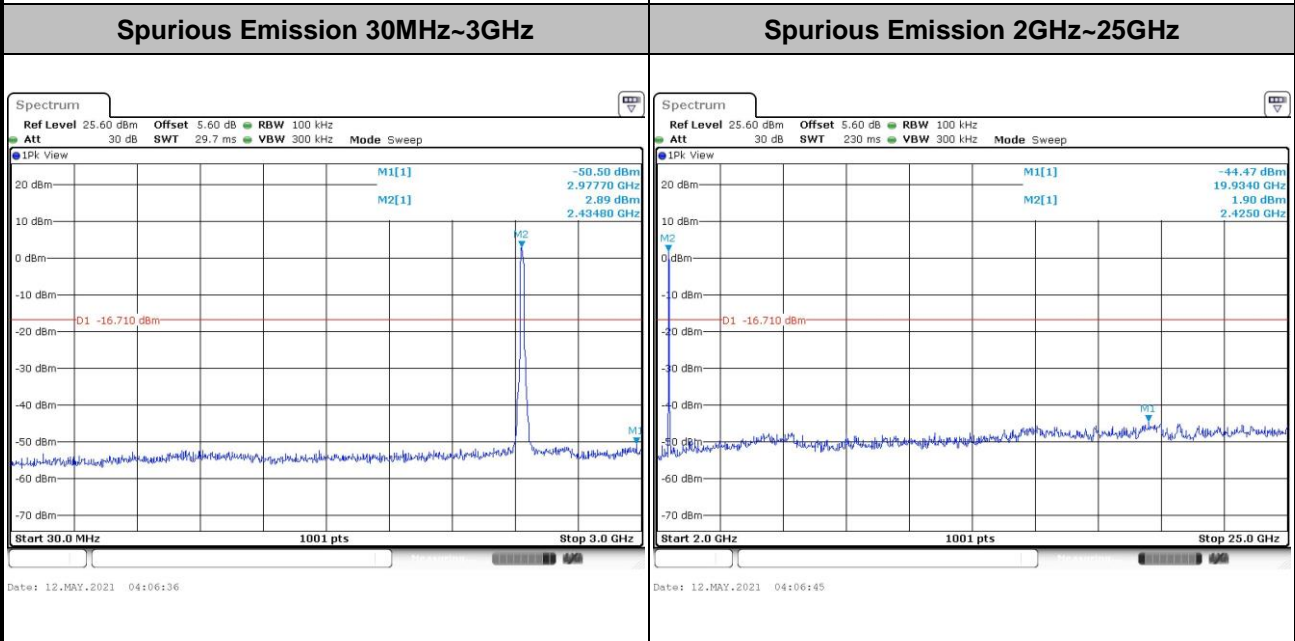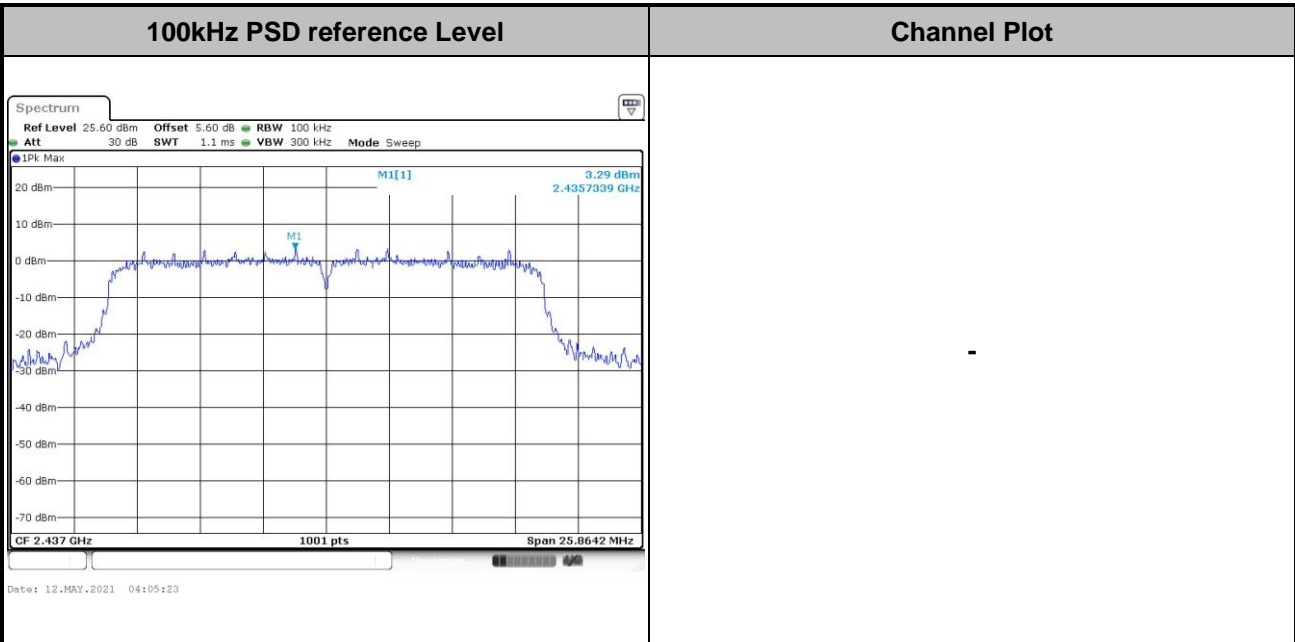




Test Mode :	802.11n HT20	Test Channel :	10
-------------	--------------	----------------	----

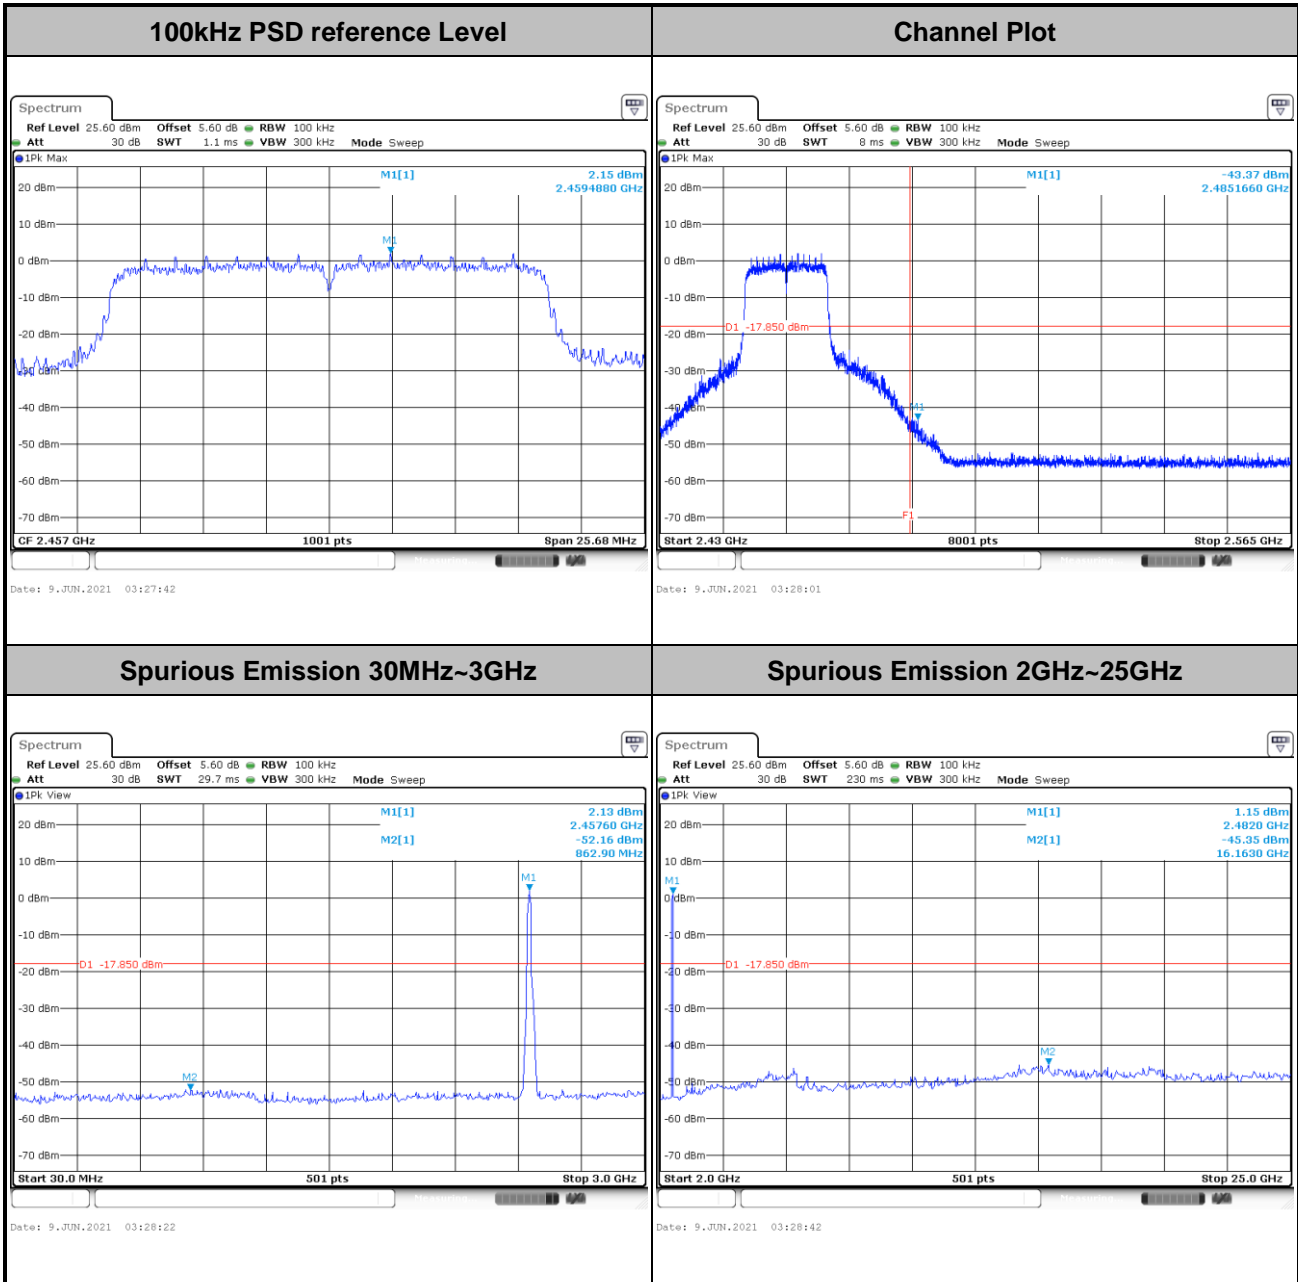



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

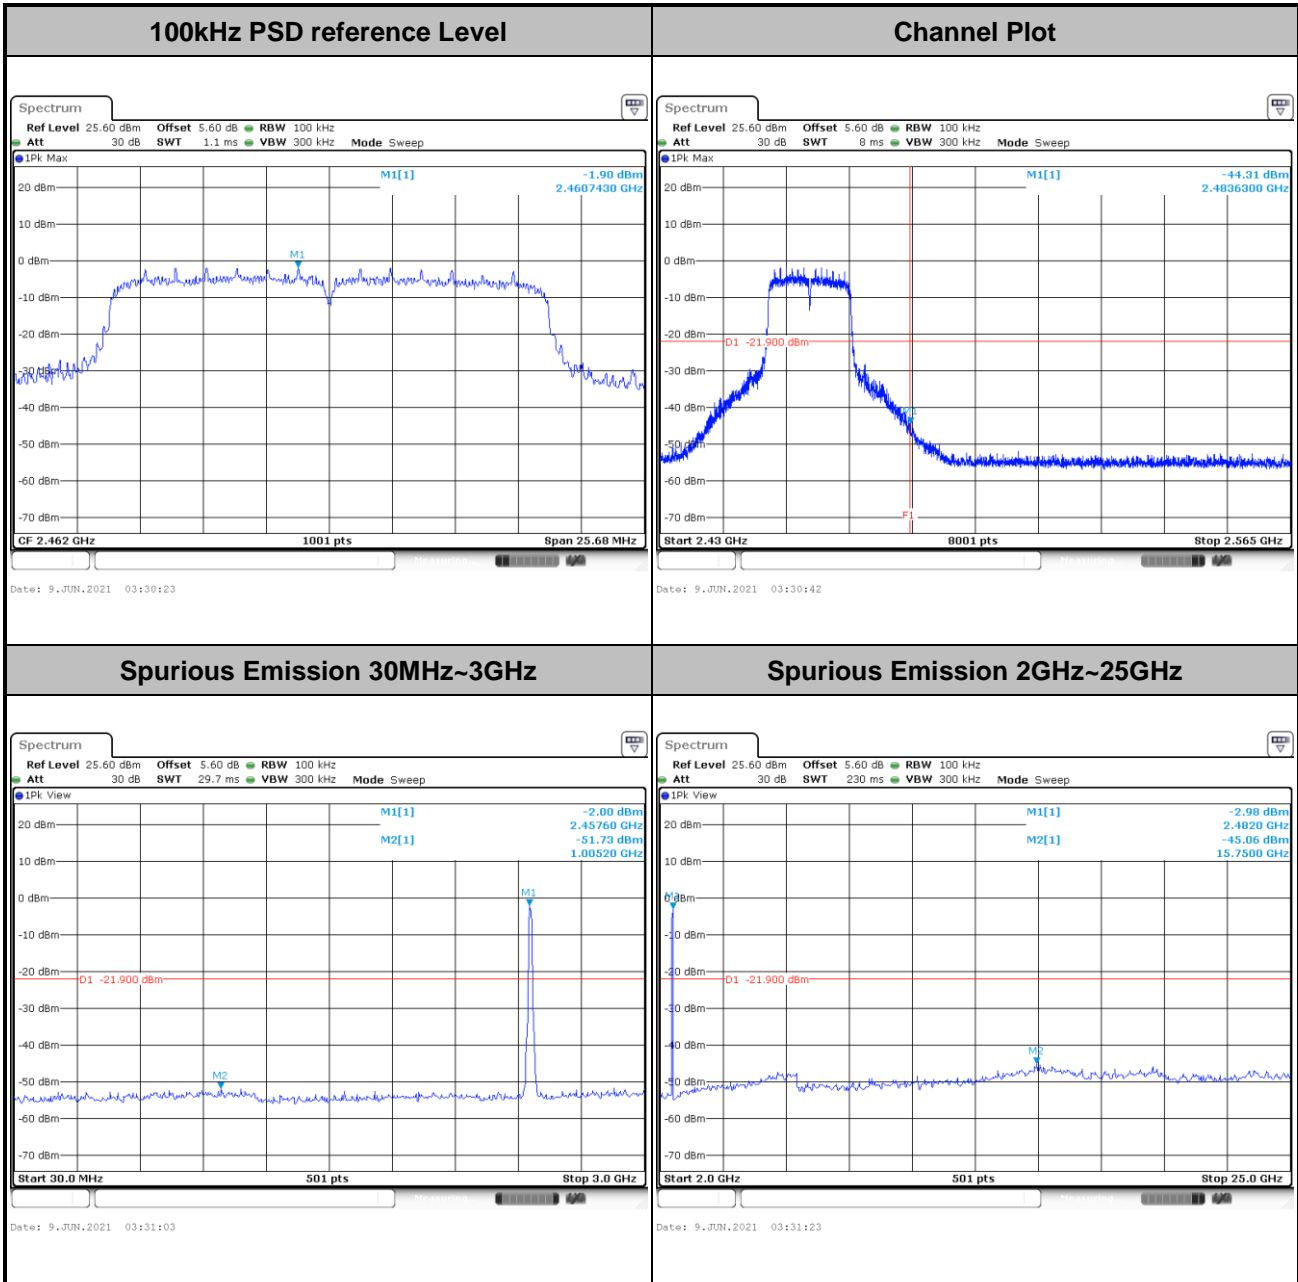



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

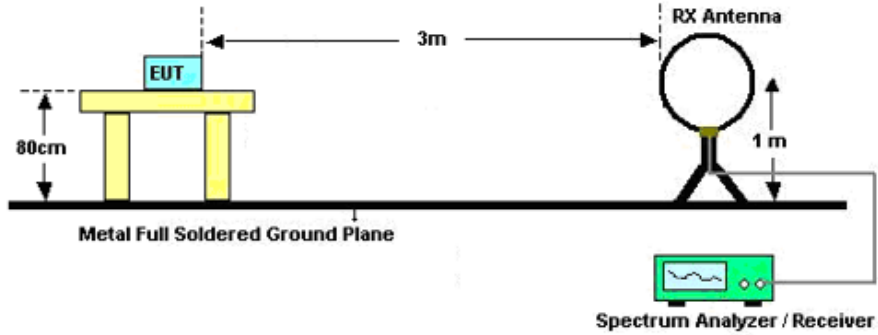

For radiated emissions from 30MHz to 1GHz

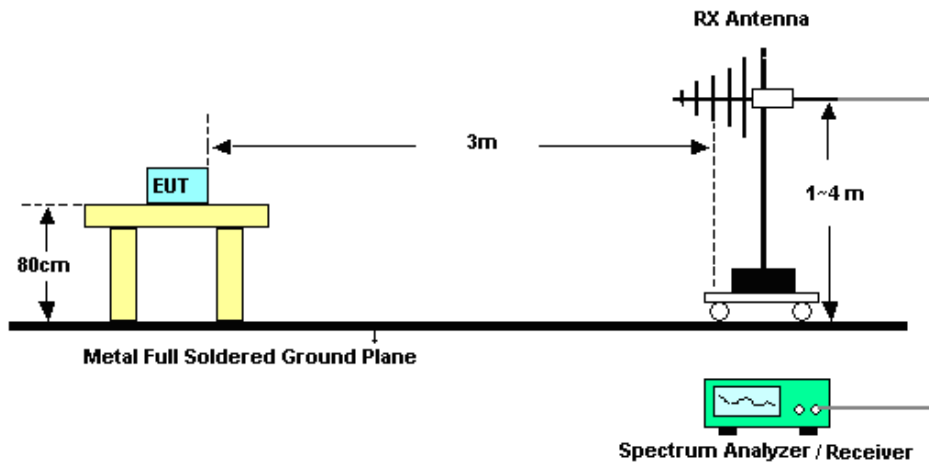

For radiated emissions above 1GHz

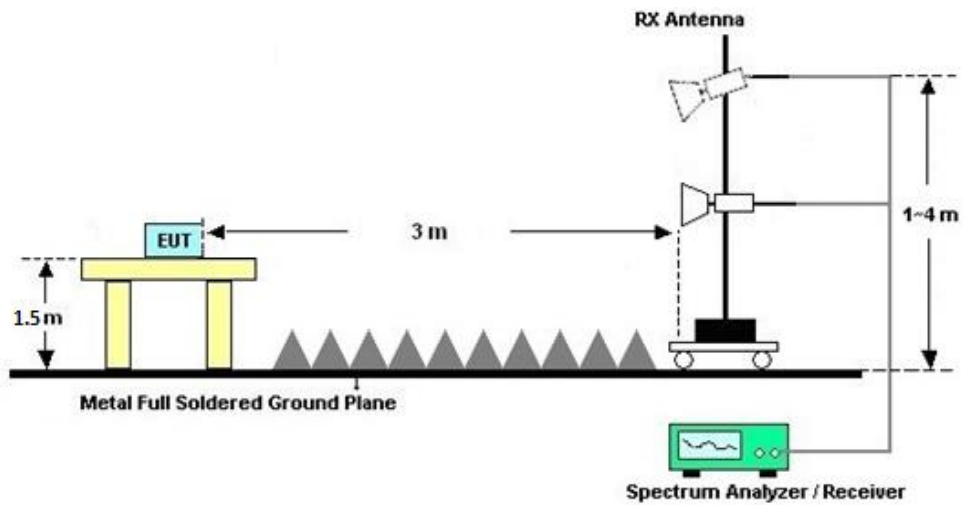



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

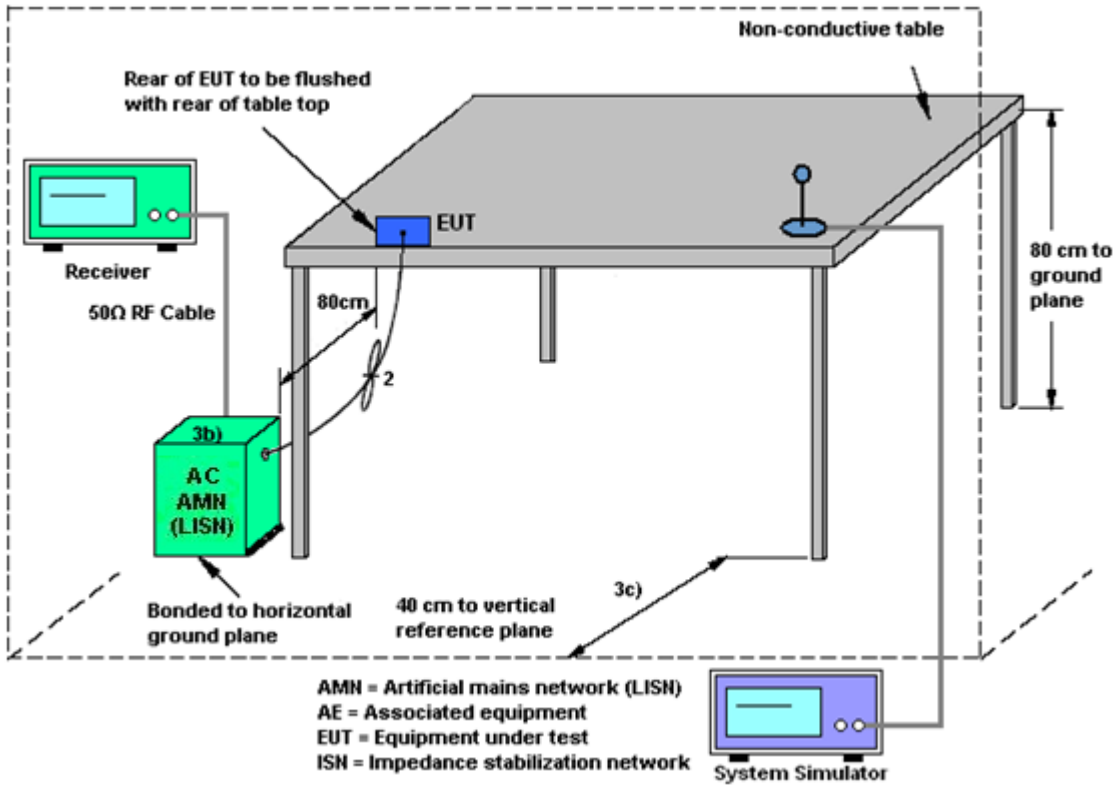

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	May 12, 2021~ Jun. 09, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	May 12, 2021~ Jun. 09, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	May 12, 2021~ Jun. 09, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 17, 2020	Jun. 06, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz-44G,MAX 30dB	Apr. 13, 2021	Jun. 06, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Jun. 06, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2021	Jun. 06, 2021	May 29, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Jun. 06, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Jun. 06, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 13, 2021	Jun. 06, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 07, 2021	Jun. 06, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz-18Ghz	Oct. 17, 2020	Jun. 06, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY532703 16	500MHz~26.5G Hz	Oct. 17, 2020	Jun. 06, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jun. 06, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 06, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 06, 2021	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	May 29, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	May 29, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	May 29, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	May 29, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2021/05/12~2021/06/09	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	11.69	8.07	0.50	Pass
11b	1Mbps	1	3	2422	11.79	9.02	0.50	Pass
11b	1Mbps	1	4	2427	11.79	8.10	0.50	Pass
11b	1Mbps	1	5	2432	11.79	8.58	0.50	Pass
11b	1Mbps	1	6	2437	11.74	8.10	0.50	Pass
11b	1Mbps	1	11	2462	11.79	8.56	0.50	Pass
11g	6Mbps	1	1	2412	17.48	16.32	0.50	Pass
11g	6Mbps	1	2	2417	17.58	16.32	0.50	Pass
11g	6Mbps	1	6	2437	17.33	16.02	0.50	Pass
11g	6Mbps	1	10	2457	17.58	16.08	0.50	Pass
11g	6Mbps	1	11	2462	17.63	16.34	0.50	Pass
HT20	MCS0	1	1	2412	18.18	17.02	0.50	Pass
HT20	MCS0	1	2	2417	18.38	17.28	0.50	Pass
HT20	MCS0	1	6	2437	18.33	17.24	0.50	Pass
HT20	MCS0	1	10	2457	18.43	17.12	0.50	Pass
HT20	MCS0	1	11	2462	18.33	17.12	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band											
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
11b	1Mbps	1	1	2412	21.35	30.00	-2.50	18.85	36.00	Pass	
11b	1Mbps	1	3	2422	21.35	30.00	-2.50	18.85	36.00	Pass	
11b	1Mbps	1	4	2427	18.69	30.00	-2.50	16.19	36.00	Pass	
11b	1Mbps	1	5	2432	16.03	30.00	-2.50	13.53	36.00	Pass	
11b	1Mbps	1	6	2437	17.43	30.00	-2.50	14.93	36.00	Pass	
11b	1Mbps	1	11	2462	19.16	30.00	-2.50	16.66	36.00	Pass	
11g	6Mbps	1	1	2412	16.65	30.00	-2.50	14.15	36.00	Pass	
11g	6Mbps	1	2	2417	23.32	30.00	-2.50	20.82	36.00	Pass	
11g	6Mbps	1	6	2437	23.39	30.00	-2.50	20.89	36.00	Pass	
11g	6Mbps	1	10	2457	23.39	30.00	-2.50	20.89	36.00	Pass	
11g	6Mbps	1	11	2462	16.68	30.00	-2.50	14.18	36.00	Pass	
HT20	MCS0	1	1	2412	16.75	30.00	-2.50	14.25	36.00	Pass	
HT20	MCS0	1	2	2417	21.71	30.00	-2.50	19.21	36.00	Pass	
HT20	MCS0	1	6	2437	21.95	30.00	-2.50	19.45	36.00	Pass	
HT20	MCS0	1	10	2457	20.93	30.00	-2.50	18.43	36.00	Pass	
HT20	MCS0	1	11	2462	16.88	30.00	-2.50	14.38	36.00	Pass	

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	18.00
11b	1Mbps	1	3	2422	0.08	16.07
11b	1Mbps	1	4	2427	0.08	15.22
11b	1Mbps	1	5	2432	0.08	12.70
11b	1Mbps	1	6	2437	0.08	13.75
11b	1Mbps	1	11	2462	0.08	15.66
11g	6Mbps	1	1	2412	0.45	9.24
11g	6Mbps	1	2	2417	0.45	16.36
11g	6Mbps	1	6	2437	0.45	16.53
11g	6Mbps	1	10	2457	0.45	13.69
11g	6Mbps	1	11	2462	0.45	9.42
HT20	MCS0	1	1	2412	0.53	9.46
HT20	MCS0	1	2	2417	0.53	14.66
HT20	MCS0	1	6	2437	0.53	14.82
HT20	MCS0	1	10	2457	0.53	13.69
HT20	MCS0	1	11	2462	0.53	9.42


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-1.12	-2.50	8.00	Pass
11b	1Mbps	1	3	2422	-3.18	-2.50	8.00	Pass
11b	1Mbps	1	4	2427	-4.17	-2.50	8.00	Pass
11b	1Mbps	1	5	2432	-7.05	-2.50	8.00	Pass
11b	1Mbps	1	6	2437	-6.71	-2.50	8.00	Pass
11b	1Mbps	1	11	2462	-3.41	-2.50	8.00	Pass
11g	6Mbps	1	1	2412	-16.04	-2.50	8.00	Pass
11g	6Mbps	1	2	2417	-9.10	-2.50	8.00	Pass
11g	6Mbps	1	6	2437	-8.75	-2.50	8.00	Pass
11g	6Mbps	1	10	2457	-9.58	-2.50	8.00	Pass
11g	6Mbps	1	11	2462	-15.14	-2.50	8.00	Pass
HT20	MCS0	1	1	2412	-15.52	-2.50	8.00	Pass
HT20	MCS0	1	2	2417	-11.10	-2.50	8.00	Pass
HT20	MCS0	1	6	2437	-10.59	-2.50	8.00	Pass
HT20	MCS0	1	10	2457	-11.82	-2.50	8.00	Pass
HT20	MCS0	1	11	2462	-15.88	-2.50	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

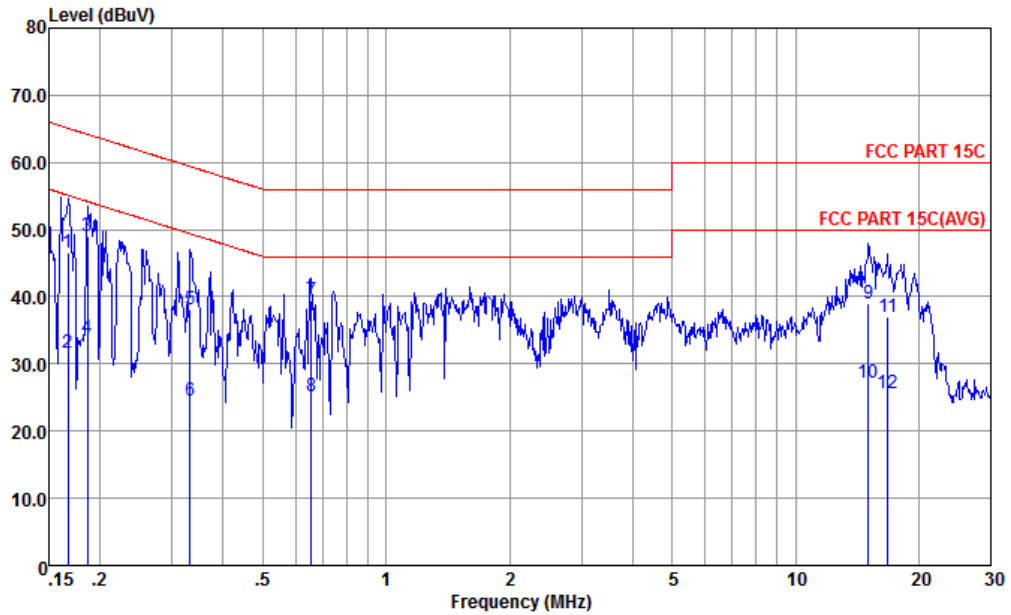


Site : CO01-KS
 Condition : FCC PART 15C TWO-LISN-CN02-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.167	46.68	-18.44	65.12	26.60	9.64	10.44	QP
2	0.167	31.58	-23.54	55.12	11.50	9.64	10.44	Average
3 *	0.186	48.93	-15.27	64.20	28.90	9.64	10.39	QP
4	0.186	33.83	-20.37	54.20	13.80	9.64	10.39	Average
5	0.332	38.13	-21.27	59.40	18.20	9.64	10.29	QP
6	0.332	24.53	-24.87	49.40	4.60	9.64	10.29	Average
7	0.658	39.49	-16.51	56.00	19.59	9.66	10.24	QP
8	0.658	25.09	-20.91	46.00	5.19	9.66	10.24	Average
9	15.066	38.90	-21.10	60.00	17.60	10.90	10.40	QP
10	15.066	27.10	-22.90	50.00	5.80	10.90	10.40	Average
11	16.839	37.04	-22.96	60.00	15.60	11.00	10.44	QP
12	16.839	25.54	-24.46	50.00	4.10	11.00	10.44	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

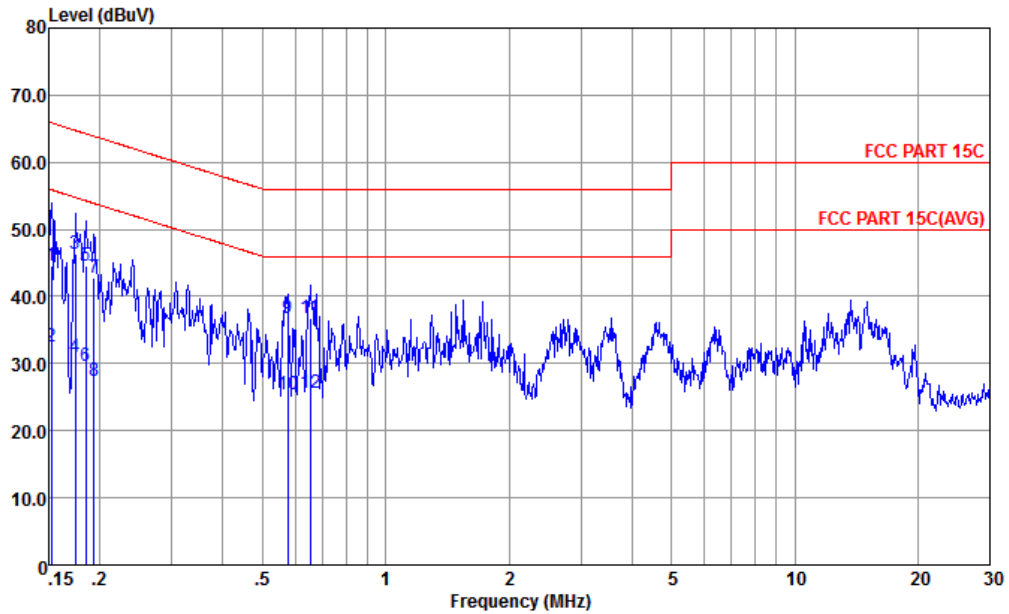

Site : CO01-KS
 Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	44.47	-21.40	65.87	24.20	9.80	10.47	QP
2	0.152	32.47	-23.40	55.87	12.20	9.80	10.47	Average
3 *	0.174	46.37	-18.40	64.77	26.10	9.85	10.42	QP
4	0.174	30.87	-23.90	54.77	10.60	9.85	10.42	Average
5	0.184	44.46	-19.82	64.28	24.19	9.87	10.40	QP
6	0.184	29.56	-24.72	54.28	9.29	9.87	10.40	Average
7	0.193	42.86	-21.03	63.89	22.60	9.88	10.38	QP
8	0.193	27.46	-26.43	53.89	7.20	9.88	10.38	Average
9	0.576	36.76	-19.24	56.00	16.79	9.73	10.24	QP
10	0.576	25.46	-20.54	46.00	5.49	9.73	10.24	Average
11	0.654	36.86	-19.14	56.00	16.89	9.73	10.24	QP
12	0.654	25.56	-20.44	46.00	5.59	9.73	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2342.24	56.75	-17.25	74	48.86	32.06	7.5	31.67	100	113	P	H
		2384.23	45.18	-8.82	54	37.12	32.15	7.56	31.65	100	113	A	H
	*	2412	108.71	-	-	100.56	32.18	7.62	31.65	100	113	P	H
	*	2410	105.38	-	-	97.23	32.18	7.62	31.65	100	113	A	H
		2365.51	56.04	-17.96	74	48.06	32.11	7.53	31.66	355	232	P	V
		2389.56	44.62	-9.38	54	36.48	32.2	7.59	31.65	355	232	A	V
	*	2412	104.76	-	-	96.61	32.18	7.62	31.65	355	232	P	V
	*	2410	101.41	-	-	93.26	32.18	7.62	31.65	355	232	A	V
802.11b CH 03 2422MHz		2386.44	57.55	-16.45	74	49.41	32.2	7.59	31.65	101	297	P	H
		2389.95	47.07	-6.93	54	38.93	32.2	7.59	31.65	101	297	A	H
	*	2420	113.38	-	-	105.2	32.17	7.64	31.63	101	297	P	H
	*	2420	110.42	-	-	102.24	32.17	7.64	31.63	101	297	A	H
		2386.7	56.32	-17.68	74	48.18	32.2	7.59	31.65	394	58	P	V
		2389.82	45.6	-8.4	54	37.46	32.2	7.59	31.65	394	58	A	V
	*	2422	108.76	-	-	100.58	32.17	7.64	31.63	394	58	P	V
	*	2420	105.54	-	-	97.36	32.17	7.64	31.63	394	58	A	V
802.11b CH 04 2427MHz		2328.33	56.71	-17.29	74	48.89	32.02	7.47	31.67	336	289	P	H
		2385.53	45.36	-8.64	54	37.22	32.2	7.59	31.65	336	289	A	H
	*	2428	104.1	-	-	95.92	32.17	7.64	31.63	336	289	P	H
	*	2428	99.92	-	-	91.74	32.17	7.64	31.63	336	289	A	H
		2347.44	56.03	-17.97	74	48.14	32.06	7.5	31.67	351	21	P	V
		2389.17	44.95	-9.05	54	36.81	32.2	7.59	31.65	351	21	A	V
	*	2428	95.75	-	-	87.57	32.17	7.64	31.63	351	21	P	V
	*	2428	91.81	-	-	83.63	32.17	7.64	31.63	351	21	A	V
802.11b CH 05 2432MHz		2384.62	56.82	-17.18	74	48.76	32.15	7.56	31.65	301	292	P	H
		2389.82	44.87	-9.13	54	36.73	32.2	7.59	31.65	301	292	A	H
	*	2434	101.3	-	-	93.12	32.17	7.64	31.63	301	292	P	H



	*	2434	98.34	-	-	90.16	32.17	7.64	31.63	301	292	A	H
		2368.11	56.28	-17.72	74	48.3	32.11	7.53	31.66	381	287	P	V
		2389.95	44.74	-9.26	54	36.6	32.2	7.59	31.65	381	287	A	V
	*	2434	93.38	-	-	85.2	32.17	7.64	31.63	381	287	P	V
	*	2434	90.17	-	-	81.99	32.17	7.64	31.63	381	287	A	V
802.11b CH 11 2462MHz		2485.6	57.54	-16.46	74	49.27	32.12	7.73	31.58	121	118	P	H
		2483.5	45.54	-8.46	54	37.27	32.12	7.73	31.58	121	118	A	H
	*	2462	106.68	-	-	98.45	32.13	7.7	31.6	121	118	P	H
	*	2460	103.32	-	-	95.09	32.13	7.7	31.6	121	118	A	H
		2484.04	56.06	-17.94	74	47.79	32.12	7.73	31.58	388	229	P	V
		2483.56	44.8	-9.2	54	36.53	32.12	7.73	31.58	388	229	A	V
	*	2462	103.16	-	-	94.93	32.13	7.7	31.6	388	229	P	V
	*	2460	100.11	-	-	91.88	32.13	7.7	31.6	388	229	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	44.21	-29.79	74	58.88	34.31	11.06	60.04	300	360	P	H
		7236	52.13	-32.89	85.02	63.26	35.95	13.42	60.5	300	360	P	H
		4824	42.92	-31.08	74	57.59	34.31	11.06	60.04	100	0	P	V
		7236	53.94	-25.51	79.45	65.07	35.95	13.42	60.5	100	0	P	V
802.11b CH 03 2422MHz		4842	52.03	-21.97	74	66.69	34.32	11.05	60.03	100	310	P	H
		4842	49.27	-4.73	54	63.93	34.32	11.05	60.03	100	310	A	H
		7266	47.88	-26.12	74	59	35.94	13.45	60.51	300	0	P	H
		4842	47.83	-26.17	74	62.49	34.32	11.05	60.03	300	360	P	V
802.11b CH 04 2427MHz		7266	44.7	-29.3	74	55.82	35.94	13.45	60.51	300	360	P	V
		4854	52.49	-21.51	74	67.14	34.33	11.05	60.03	300	0	P	H
		4854	49.45	-4.55	54	64.1	34.33	11.05	60.03	300	0	A	H
		7284	45.52	-28.48	74	56.63	35.94	13.46	60.51	300	0	P	H
802.11b CH 05 2432MHz		4854	48.4	-25.6	74	63.05	34.33	11.05	60.03	300	360	P	V
		7284	45.77	-28.23	74	56.88	35.94	13.46	60.51	300	360	P	V
		4866	52.4	-21.6	74	67.05	34.33	11.05	60.03	300	0	P	H
		4866	49.74	-4.26	54	64.39	34.33	11.05	60.03	300	0	A	H
802.11b CH 06 2437MHz		7296	44.83	-29.17	74	55.94	35.94	13.46	60.51	300	0	P	H
		4866	48.71	-25.29	74	63.36	34.33	11.05	60.03	300	360	P	V
		7296	45.13	-28.87	74	56.24	35.94	13.46	60.51	300	360	P	V
		4872	52.73	-21.27	74	67.38	34.34	11.04	60.03	100	312	P	H
802.11b CH 11 2462MHz		4872	50.59	-3.41	54	65.24	34.34	11.04	60.03	100	312	A	H
		7308	46.04	-27.96	74	57.13	35.94	13.48	60.51	300	0	P	H
		4872	53.15	-20.85	74	67.8	34.34	11.04	60.03	400	14	P	V
		4872	50.29	-3.71	54	64.94	34.34	11.04	60.03	400	14	A	V
802.11b CH 11 2462MHz		7308	44.62	-29.38	74	55.71	35.94	13.48	60.51	300	360	P	V
		4926	52.52	-21.48	74	67.15	34.36	11.03	60.02	287	313	P	H
		4926	49.14	-4.86	54	63.77	34.36	11.03	60.02	287	313	A	H
	7386	45.86	-28.14	74	56.92	35.92	13.55	60.53	300	0	P	H	



		4926	48.07	-25.93	74	62.7	34.36	11.03	60.02	300	360	P	V
		7386	45.29	-28.71	74	56.35	35.92	13.55	60.53	300	360	P	V
Remark	<ol style="list-style-type: none">1. No other spurious found.2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.56	61.58	-12.42	74	53.44	32.2	7.59	31.65	100	116	P	H
		2389.95	46.87	-7.13	54	38.73	32.2	7.59	31.65	100	116	A	H
	*	2416	102.45	-	-	94.28	32.18	7.62	31.63	100	116	P	H
	*	2414	94.01	-	-	85.86	32.18	7.62	31.65	100	116	A	H
		2351.86	56.95	-17.05	74	48.98	32.11	7.53	31.67	354	233	P	V
		2389.82	45.56	-8.44	54	37.42	32.2	7.59	31.65	354	233	A	V
	*	2416	97.82	-	-	89.65	32.18	7.62	31.63	354	233	P	V
	*	2410	89.88	-	-	81.73	32.18	7.62	31.65	354	233	A	V
802.11g CH 02 2417MHz		2389.56	59.23	-14.77	74	51.09	32.2	7.59	31.65	386	303	P	H
		2389.82	47.55	-6.45	54	39.41	32.2	7.59	31.65	386	303	A	H
		2416	108.23	-	-	100.06	32.18	7.62	31.63	386	303	P	H
		2414	100.39	-	-	92.24	32.18	7.62	31.65	386	303	A	H
		2389.43	55.84	-18.16	74	47.7	32.2	7.59	31.65	357	26	P	V
		2389.82	45.8	-8.2	54	37.66	32.2	7.59	31.65	357	26	A	V
		2414	104.07	-	-	95.92	32.18	7.62	31.65	357	26	P	V
		2414	95.68	-	-	87.53	32.18	7.62	31.65	357	26	A	V
802.11g CH 10 2457MHz		2483.8	63.07	-10.93	74	54.8	32.12	7.73	31.58	100	233	P	H
		2483.68	50.39	-3.61	54	42.12	32.12	7.73	31.58	100	233	A	H
		2458	104.49	-	-	96.26	32.13	7.7	31.6	100	233	P	H
		2458	96.87	-	-	88.64	32.13	7.7	31.6	100	233	A	H
		2483.68	58.02	-15.98	74	49.75	32.12	7.73	31.58	388	37	P	V
		2483.5	46.9	-7.1	54	38.63	32.12	7.73	31.58	388	37	A	V
		2460	102.82	-	-	94.59	32.13	7.7	31.6	388	37	P	V
		2460	94.98	-	-	86.75	32.13	7.7	31.6	388	37	A	V
802.11g CH 11 2462MHz		2483.62	59.82	-14.18	74	51.55	32.12	7.73	31.58	100	297	P	H
		2483.5	46.44	-7.56	54	38.17	32.12	7.73	31.58	100	297	A	H
	*	2460	100.03	-	-	91.8	32.13	7.7	31.6	100	297	P	H
	*	2458	92.15	-	-	83.92	32.13	7.7	31.6	100	297	A	H
		2483.68	58.07	-15.93	74	49.8	32.12	7.73	31.58	383	225	P	V
		2484.52	45.89	-8.11	54	37.62	32.12	7.73	31.58	383	225	A	V



	*	2460	97.78	-	-	89.55	32.13	7.7	31.6	383	225	P	V
	*	2460	89.65	-	-	81.42	32.13	7.7	31.6	383	225	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	41.18	-32.82	74	55.85	34.31	11.06	60.04	300	0	P	H
		4824	41.04	-32.96	74	55.71	34.31	11.06	60.04	300	360	P	V
802.11g CH 02 2417MHz		4836	48.54	-25.46	74	63.2	34.32	11.05	60.03	300	0	P	H
		7248	43.71	-30.29	74	54.83	35.95	13.43	60.5	300	0	P	H
		4836	44.07	-29.93	74	58.73	34.32	11.05	60.03	300	360	P	V
802.11g CH 06 2437MHz		7248	44.79	-29.21	74	55.91	35.95	13.43	60.5	300	360	P	V
		4872	56.05	-17.95	74	70.7	34.34	11.04	60.03	104	132	P	H
		4872	44.67	-9.33	54	59.32	34.34	11.04	60.03	104	132	A	H
		7308	44.82	-29.18	74	55.91	35.94	13.48	60.51	300	0	P	H
		4872	50.23	-23.77	74	64.88	34.34	11.04	60.03	300	360	P	V
802.11g CH 10 2457MHz		7308	45.25	-28.75	74	56.34	35.94	13.48	60.51	300	360	P	V
		4914	45.74	-28.26	74	60.38	34.35	11.03	60.02	300	0	P	H
		7368	43.76	-30.24	74	54.83	35.92	13.54	60.53	300	0	P	H
		4914	43.7	-30.3	74	58.34	34.35	11.03	60.02	300	360	P	V
802.11g CH 11 2462MHz		7368	45.54	-28.46	74	56.61	35.92	13.54	60.53	300	360	P	V
		4926	43.05	-30.95	74	57.68	34.36	11.03	60.02	300	0	P	H
		7386	42.89	-31.11	74	53.95	35.92	13.55	60.53	300	0	P	H
		4926	41.67	-32.33	74	56.3	34.36	11.03	60.02	300	360	P	V
Remark		7386	43.23	-30.77	74	54.29	35.92	13.55	60.53	300	360	P	V
	1.	No other spurious found.											
2.	All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.95	63.36	-10.64	74	55.22	32.2	7.59	31.65	100	115	P	H
		2389.82	48.11	-5.89	54	39.97	32.2	7.59	31.65	100	115	A	H
	*	2414	102.55	-	-	94.4	32.18	7.62	31.65	100	115	P	H
	*	2414	93.93	-	-	85.78	32.18	7.62	31.65	100	115	A	H
		2389.69	58.39	-15.61	74	50.25	32.2	7.59	31.65	356	232	P	V
		2389.69	46.1	-7.9	54	37.96	32.2	7.59	31.65	356	232	A	V
	*	2410	98.73	-	-	90.58	32.18	7.62	31.65	356	232	P	V
	*	2414	90.18	-	-	82.03	32.18	7.62	31.65	356	232	A	V
802.11n HT20 CH 02 2417MHz		2389.56	65.72	-8.28	74	57.58	32.2	7.59	31.65	101	114	P	H
		2389.95	50.65	-3.35	54	42.51	32.2	7.59	31.65	101	114	A	H
	*	2420	107.22	-	-	99.04	32.17	7.64	31.63	101	114	P	H
	*	2420	98.72	-	-	90.54	32.17	7.64	31.63	101	114	A	H
		2389.95	60.67	-13.33	74	52.53	32.2	7.59	31.65	357	230	P	V
		2389.69	47.73	-6.27	54	39.59	32.2	7.59	31.65	357	230	A	V
	*	2422	104.45	-	-	96.27	32.17	7.64	31.63	357	230	P	V
	*	2422	95.55	-	-	87.37	32.17	7.64	31.63	357	230	A	V
802.11n HT20 CH 10 2457Hz		2483.92	62.09	-11.91	74	53.82	32.12	7.73	31.58	121	119	P	H
		2483.62	48.32	-5.68	54	40.05	32.12	7.73	31.58	121	119	A	H
	*	2452	104.54	-	-	96.33	32.15	7.67	31.61	121	119	P	H
	*	2454	95.97	-	-	87.74	32.13	7.7	31.6	121	119	A	H
		2484.94	57	-17	74	48.73	32.12	7.73	31.58	389	225	P	V
		2483.62	45.82	-8.18	54	37.55	32.12	7.73	31.58	389	225	A	V
	*	2452	101.53	-	-	93.32	32.15	7.67	31.61	389	225	P	V
	*	2454	93.02	-	-	84.79	32.13	7.7	31.6	389	225	A	V
802.11n HT20 CH 11 2462MHz		2483.62	65.43	-8.57	74	57.16	32.12	7.73	31.58	121	118	P	H
		2483.68	47.83	-6.17	54	39.56	32.12	7.73	31.58	121	118	A	H
	*	2460	101.47	-	-	93.24	32.13	7.7	31.6	121	118	P	H
	*	2460	92.76	-	-	84.53	32.13	7.7	31.6	121	118	A	H
		2483.56	56.97	-17.03	74	48.7	32.12	7.73	31.58	388	234	P	V



		2484.82	45.69	-8.31	54	37.42	32.12	7.73	31.58	388	234	A	V
	*	2460	98.4	-	-	90.17	32.13	7.7	31.6	388	234	P	V
	*	2460	90.1	-	-	81.87	32.13	7.7	31.6	388	234	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	42.17	-31.83	74	56.84	34.31	11.06	60.04	300	0	P	H
		4824	41.12	-32.88	74	55.79	34.31	11.06	60.04	300	360	P	V
802.11n HT20 CH 02 2417MHz		4836	46.05	-27.95	74	60.71	34.32	11.05	60.03	300	0	P	H
		7248	43.09	-30.91	74	54.21	35.95	13.43	60.5	300	0	A	H
		4836	43.75	-30.25	74	58.41	34.32	11.05	60.03	300	360	P	V
		7248	43.43	-30.57	74	54.55	35.95	13.43	60.5	300	360	P	V
802.11n HT20 CH 06 2437MHz		4872	53.56	-20.44	74	68.21	34.34	11.04	60.03	100	305	P	H
		4872	41.52	-12.48	54	56.17	34.34	11.04	60.03	100	305	A	H
		7308	44.79	-29.21	74	55.88	35.94	13.48	60.51	300	0	P	H
		4872	50.36	-23.64	74	65.01	34.34	11.04	60.03	300	360	P	V
		7308	43.58	-30.42	74	54.67	35.94	13.48	60.51	300	360	P	V
802.11n HT20 CH 10 2457MHz		4914	47.85	-26.15	74	62.49	34.35	11.03	60.02	300	0	P	H
		7368	43.06	-30.94	74	54.13	35.92	13.54	60.53	300	0	P	H
		4914	41.81	-32.19	74	56.45	34.35	11.03	60.02	300	360	P	V
		7368	44.15	-29.85	74	55.22	35.92	13.54	60.53	300	360	P	V
802.11n HT20 CH 11 2462MHz		4926	44.22	-29.78	74	58.85	34.36	11.03	60.02	300	0	P	H
		7386	43.3	-30.7	74	54.36	35.92	13.55	60.53	300	0	P	H
		4926	42.22	-31.78	74	56.85	34.36	11.03	60.02	300	360	P	V
		7386	42.61	-31.39	74	53.67	35.92	13.55	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30	22.53	-17.47	40	29.02	25.5	0.71	32.7	100	0	P	H
		123.12	16.25	-27.25	43.5	29.6	17.82	1.68	32.85	-	-	P	H
		375.32	19.82	-26.18	46	27.66	22.06	2.95	32.85	-	-	P	H
		473.29	24.01	-21.99	46	29.42	24.02	3.32	32.75	-	-	P	H
		677.96	26.59	-19.41	46	29.58	25.79	3.98	32.76	-	-	P	H
		875.84	27.09	-18.91	46	27.82	27.3	4.52	32.55	-	-	P	H
		41.64	28.95	-11.05	40	41.96	18.86	0.97	32.84	100	360	P	V
		55.22	26.4	-13.6	40	44.29	14.2	1.11	33.2	-	-	P	V
		264.74	17.97	-28.03	46	28.89	19.64	2.48	33.04	-	-	P	V
		412.18	22.64	-23.36	46	29.39	22.93	3.1	32.78	-	-	P	V
		612.97	25.67	-20.33	46	28.84	25.6	3.78	32.55	-	-	P	V
	781.75	26.81	-19.19	46	28.36	26.75	4.27	32.57	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n20 & LTE 2 BW=20M (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n20 CH 02 2417MHz		2389.17	62.24	-11.76	74	54.1	32.2	7.59	31.65	400	99	P	H
		2389.56	48.05	-5.95	54	39.91	32.2	7.59	31.65	400	99	A	H
	*	2410	104	---	---	95.85	32.18	7.62	31.65	400	99	P	H
	*	2410	96.23	---	---	88.08	32.18	7.62	31.65	400	99	A	H
		2389.56	58.17	-15.83	74	50.03	32.2	7.59	31.65	313	75	P	V
		2389.95	46.25	-7.75	54	38.11	32.2	7.59	31.65	313	75	A	V
	*	2410	99.39	---	---	91.24	32.18	7.62	31.65	313	75	P	V
	*	2410	91.63	---	---	83.48	32.18	7.62	31.65	313	75	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n20 & LTE 2 BW=20M (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n20 CH 02 2417MHz		4836	48.48	-25.52	74	63.14	34.32	11.05	60.03	300	0	P	H
		7248	42.94	-31.06	74	54.06	35.95	13.43	60.5	300	0	P	H
		4836	48.2	-25.8	74	62.86	34.32	11.05	60.03	300	360	P	V
		7248	44.41	-29.59	74	55.53	35.95	13.43	60.5	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:


- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.27	-	-	10Hz
802.11g	90.19	1.399	0.715	0.75KHz
802.11n HT20	88.59	1.181	0.847	0.91KHz

802.11b

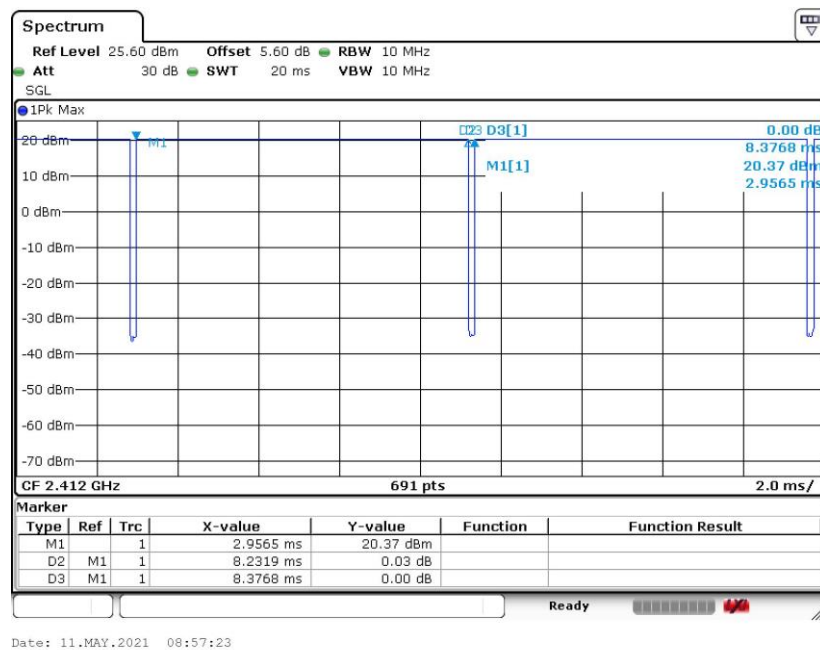




802.11g

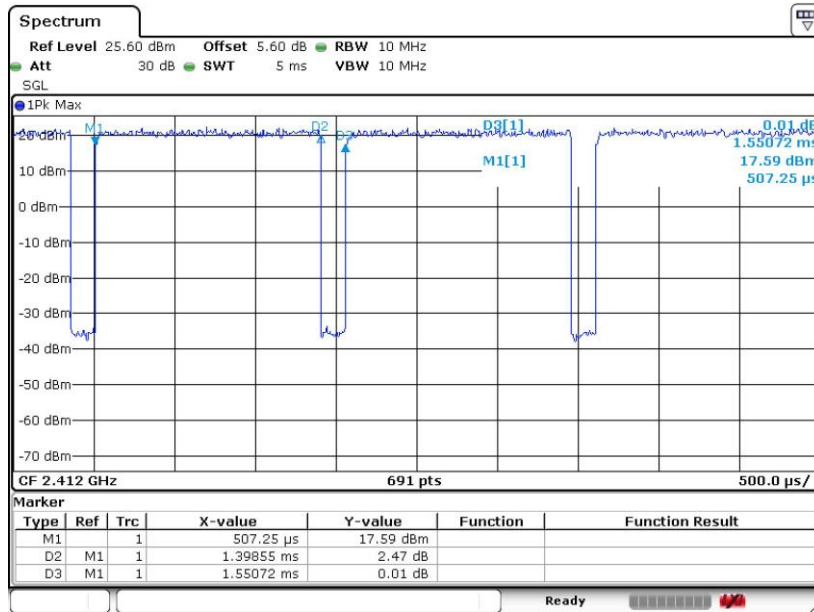

Date: 11.MAY.2021 08:59:07

802.11n HT20

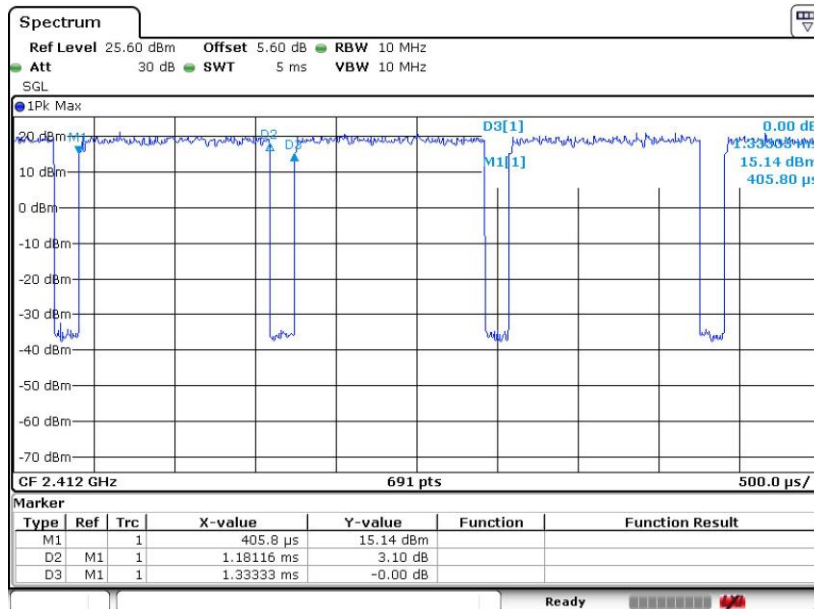

Date: 11.MAY.2021 08:58:18