



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2163-4,XT2163DL  
**FCC ID** : IHDT56ZX2  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Jun. 02, 2021 ~ Jul. 09, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

*Derreck Chen*

Reviewed by: Derreck Chen / Supervisor

*Eric Shih*

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055  
 People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Test Software..... 7

    1.8 Applicable Standards..... 7

    1.9 Specification of Accessory..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 99% Bandwidth Measurement ..... 12

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 30

    3.6 AC Conducted Emission Measurement..... 34

    3.7 Antenna Requirements ..... 36

**4 LIST OF MEASURING EQUIPMENT ..... 37**

**5 UNCERTAINTY OF EVALUATION ..... 38**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR151921C	Rev. 01	Initial issue of report	Jul. 22, 2021



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.59 dB at 2359.905 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.36 dB at 0.630 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	N/A	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2163-4,XT2163DL
FCC ID	IHDT56ZX2
IMEI Code	Conducted: 352304800016305 Conduction: 352304800007379 Radiation: 352304800014847
HW Version	DVT2
SW Version	RRH31.Q3-36
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to antenna</b>	802.11b : 23.65 dBm (0.2317 W) 802.11g : 26.57 dBm (0.4539 W) 802.11n HT20 : 26.62 dBm (0.4592 W) 802.11n HT40 : 26.34 dBm (0.4305 W)
<b>99% Occupied Bandwidth</b>	802.11b : 13.19MHz 802.11g : 18.33MHz 802.11n HT20 : 19.23MHz 802.11n HT40 : 36.46MHz
<b>Antenna Type / Gain</b>	FPC Antenna with gain -4.5 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Location Site</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272



### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

### 1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Aohai)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3	Brand Name	Motorola(Chenyang)	Model Name	MC-101
Battery	Brand Name	Motorola(ATL)	Model Name	NT40
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18C24367
USB Cable 2	Brand Name	Motorola(cabletech)	Model Name	SC18C49697
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18C24368



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		





## 2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
<b>AC Conducted Emission</b>	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 3(Charging from Adapter3) + Earphone + Battery
<b>Remark:</b> 1. For Radiated Test Cases, The tests were performed with Adapter 1, Earphone Battery and USB Cable 1.	

## 2.3 Connection Diagram of Test System

<For AC Conducted Emission>

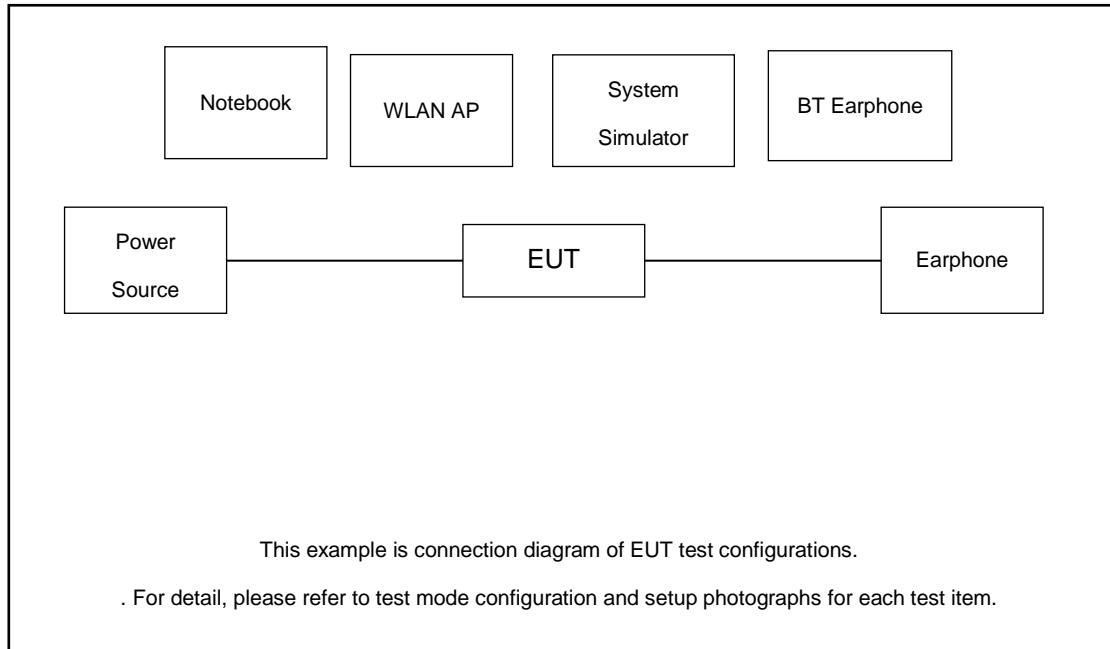

<For Radiated spurious emission >

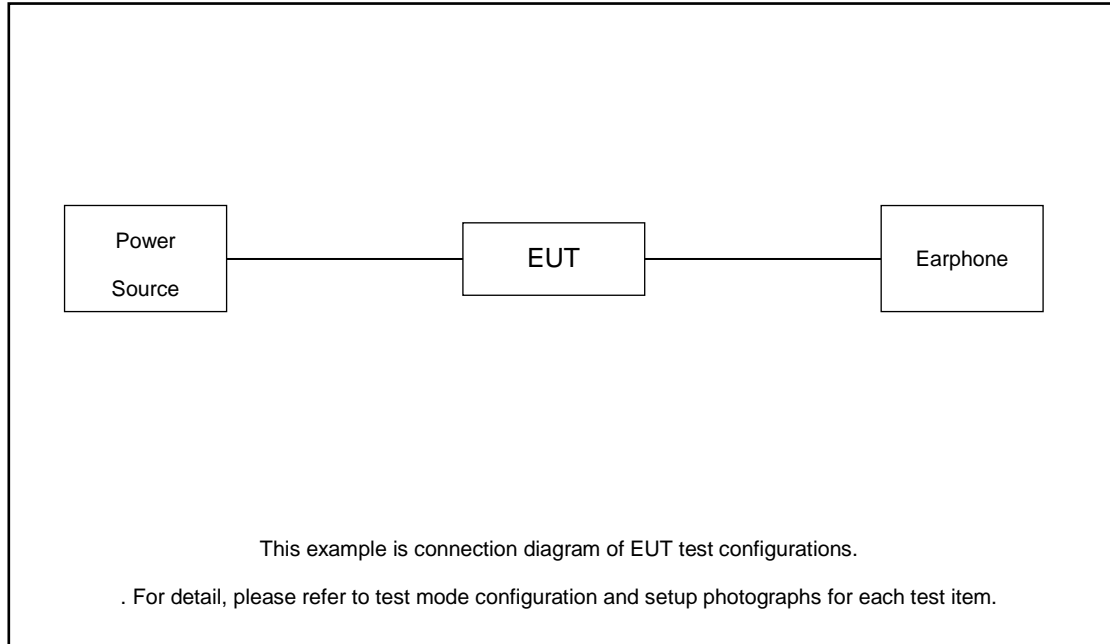

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone	MOTO	S88731AA1	N/A	Unshielded,1.2m	N/A
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 1.2dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.2 + 20 = 21.2(\text{dB}) \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup

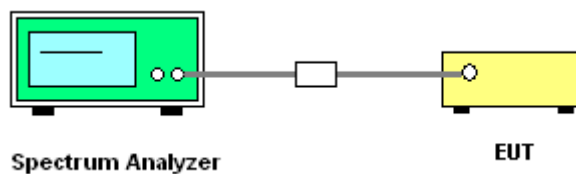



### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

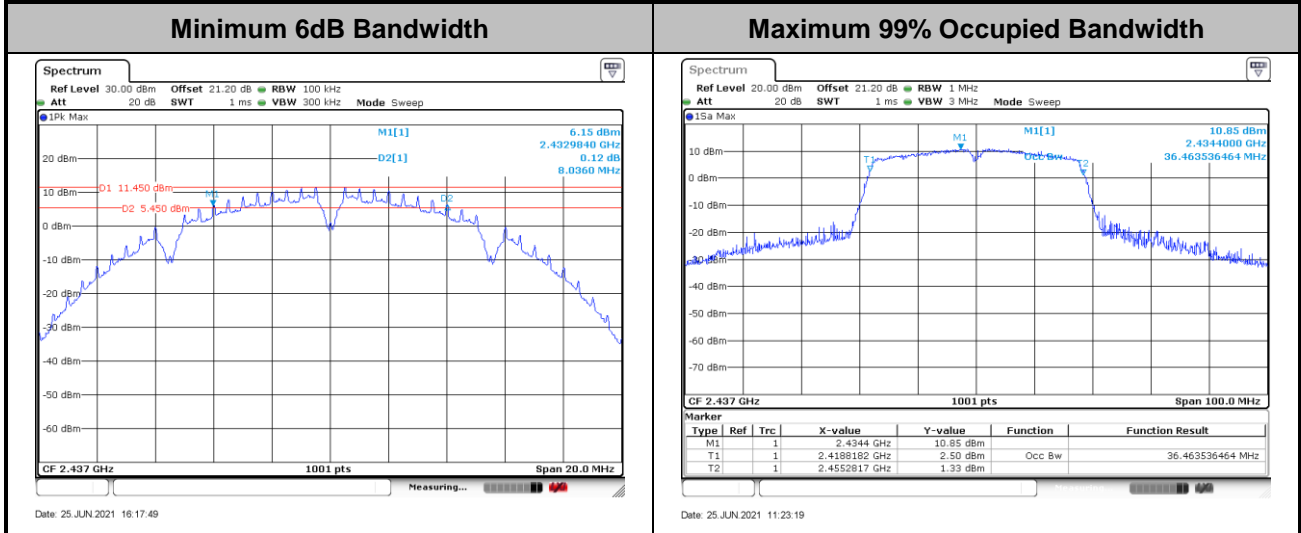

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

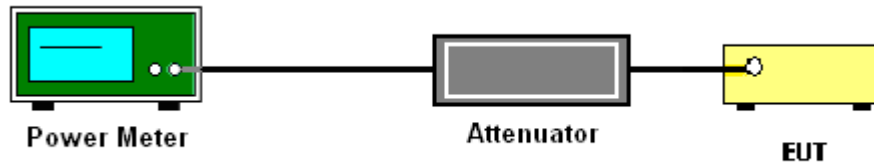

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

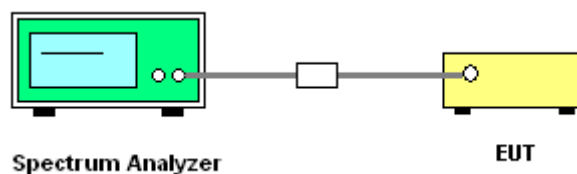



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

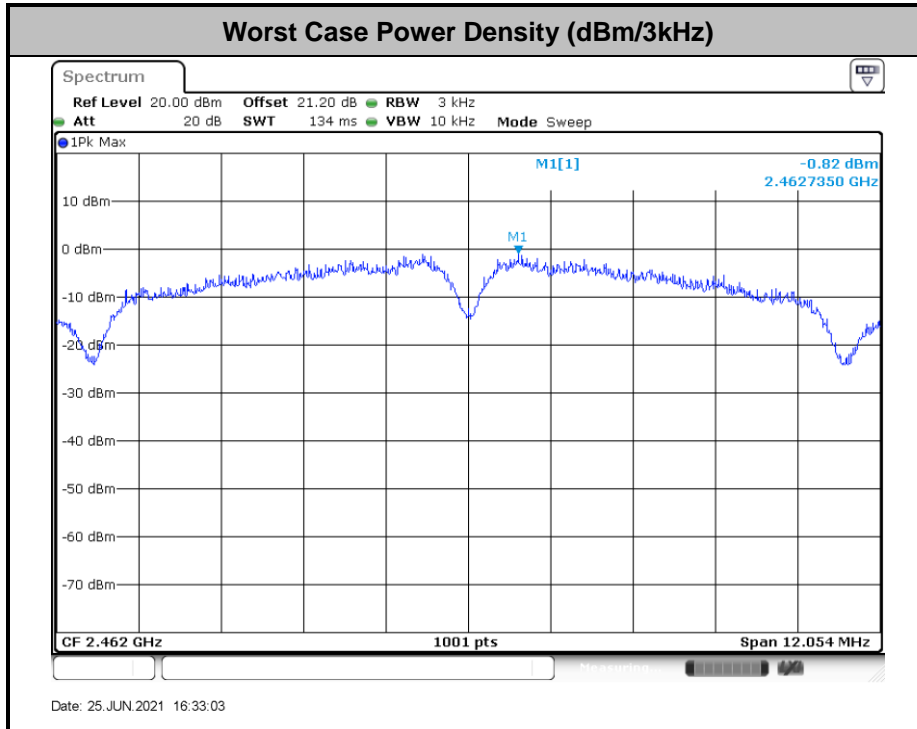



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup


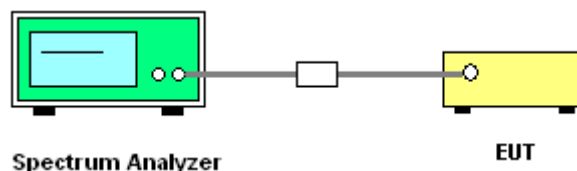




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission





Test Engineer :	Zhang Xue Yi	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

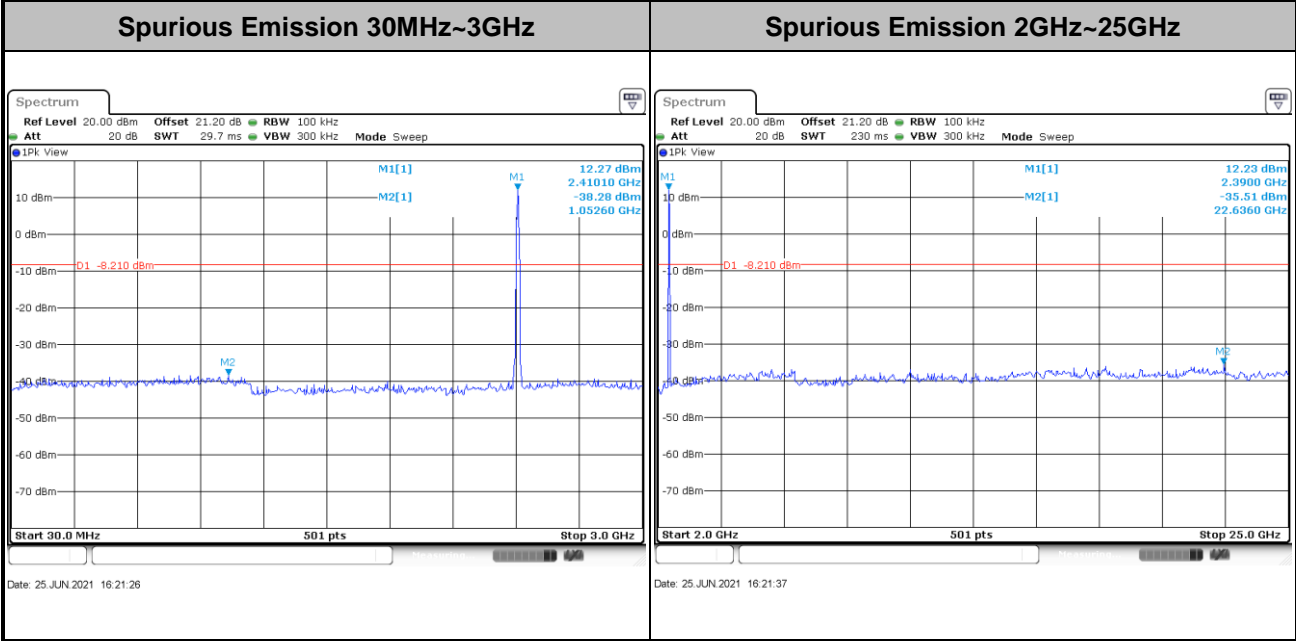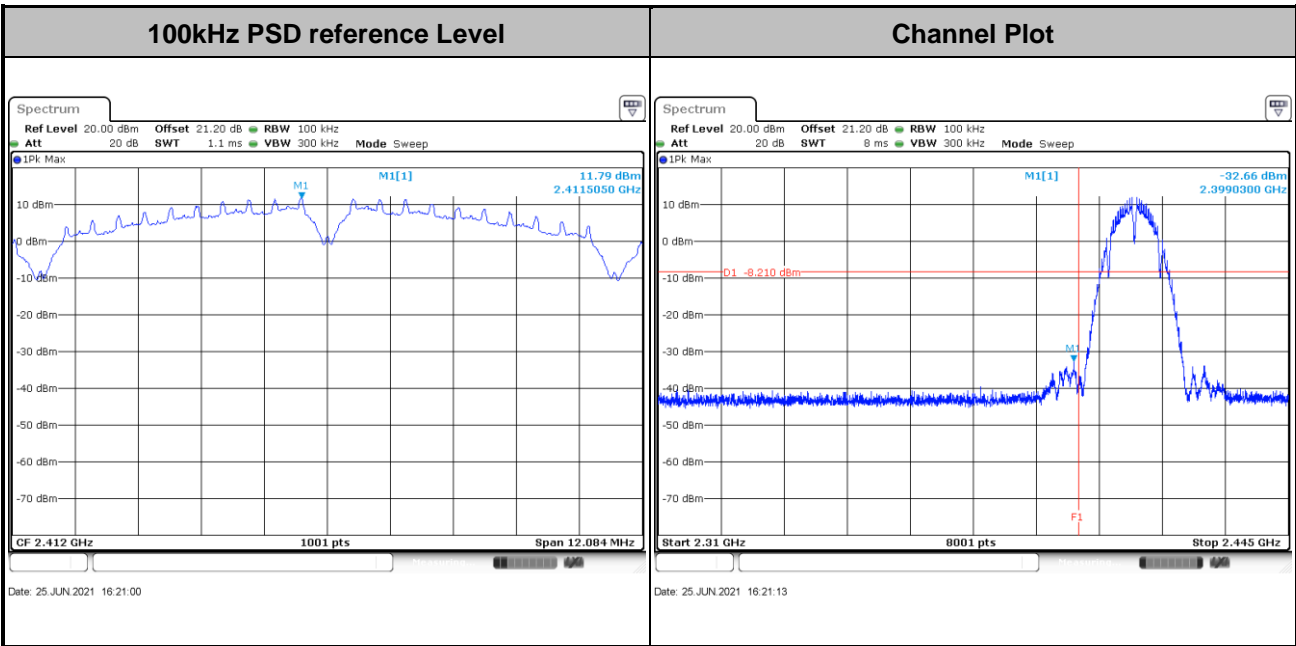





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

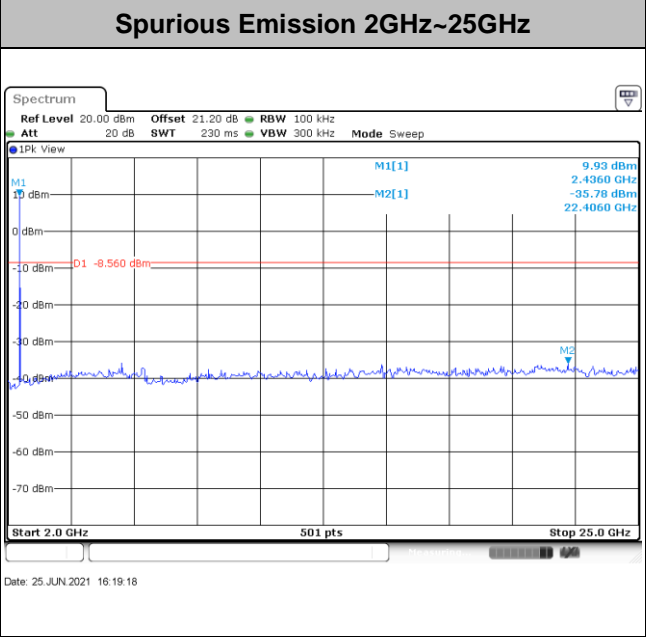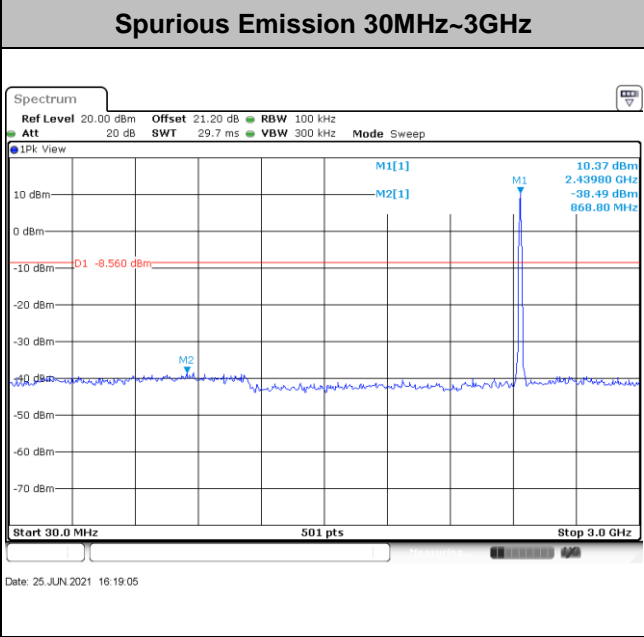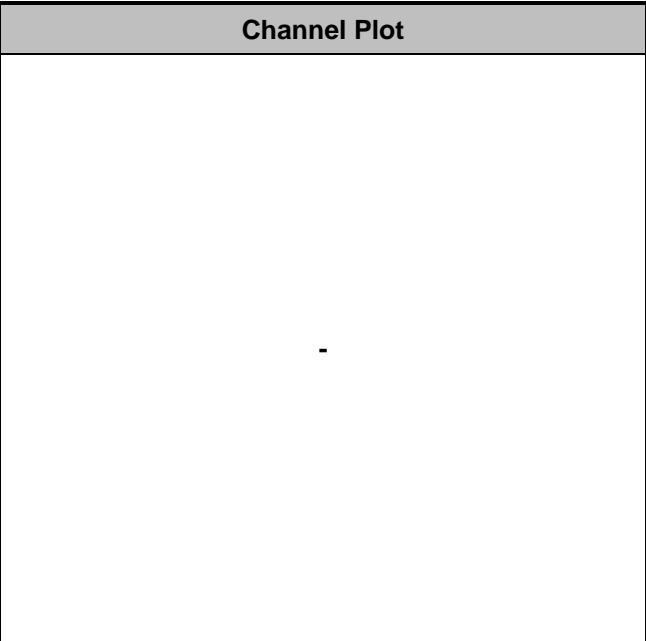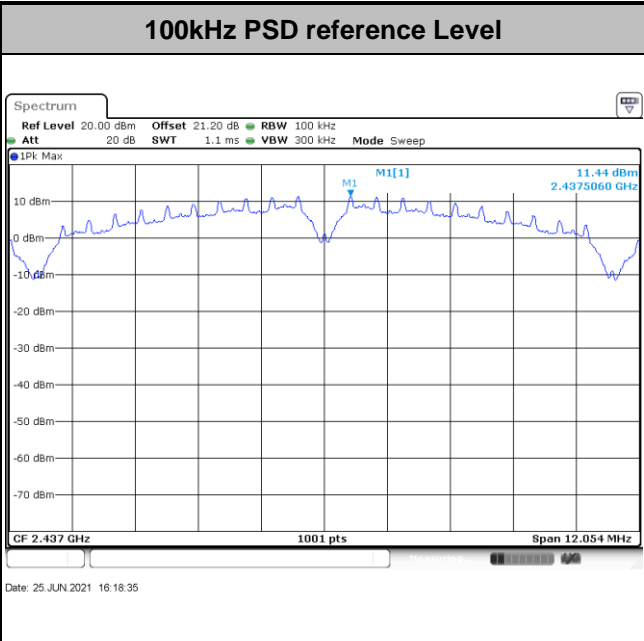





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

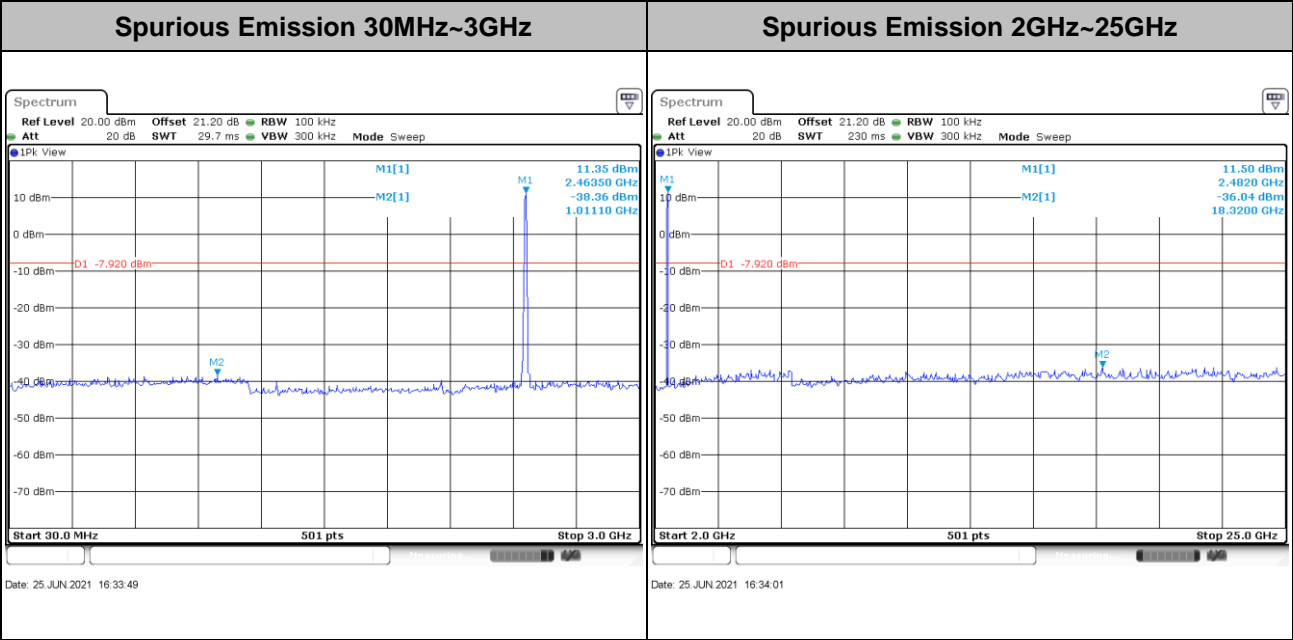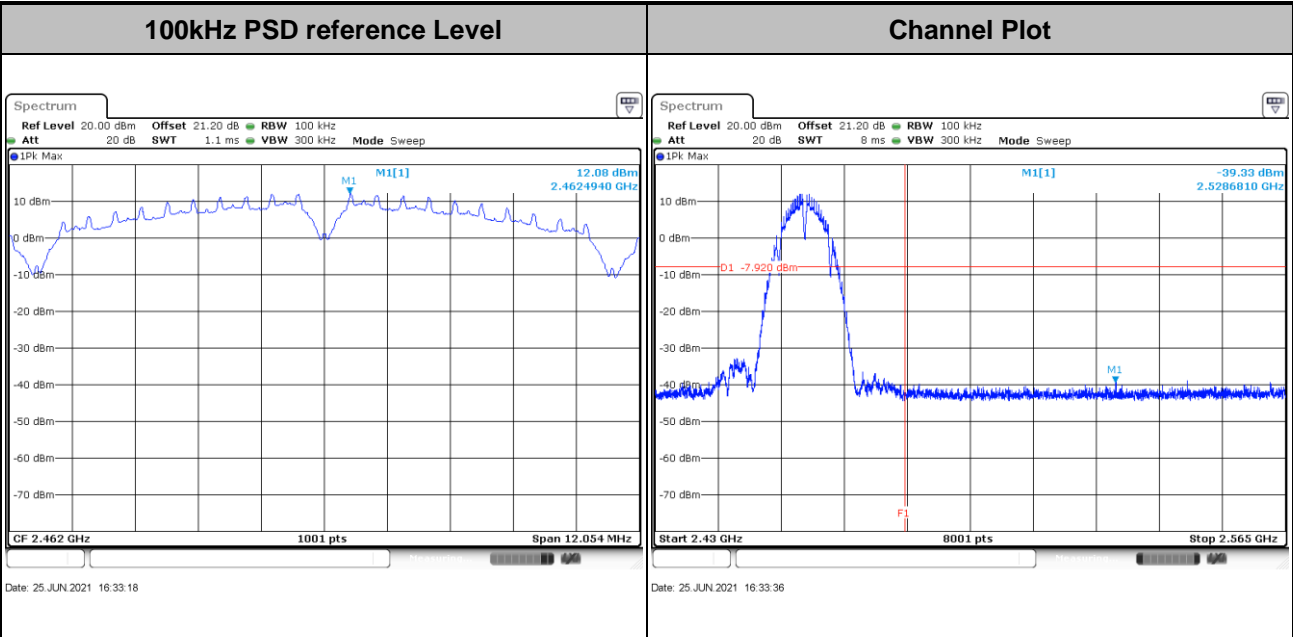





Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

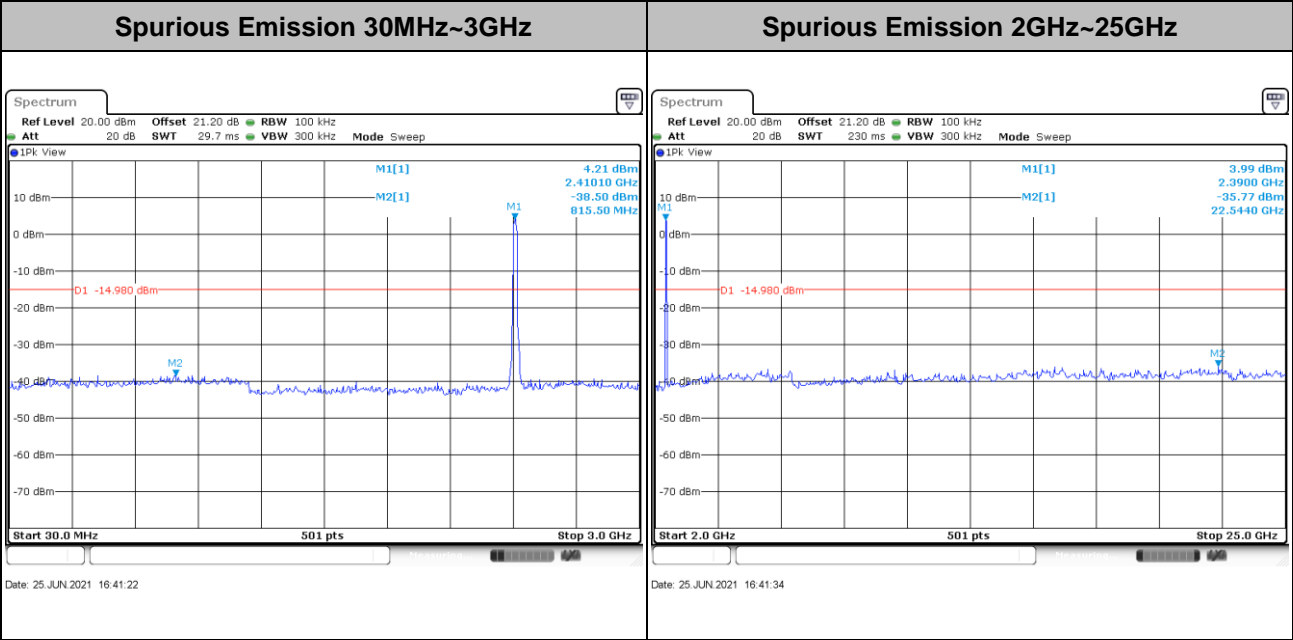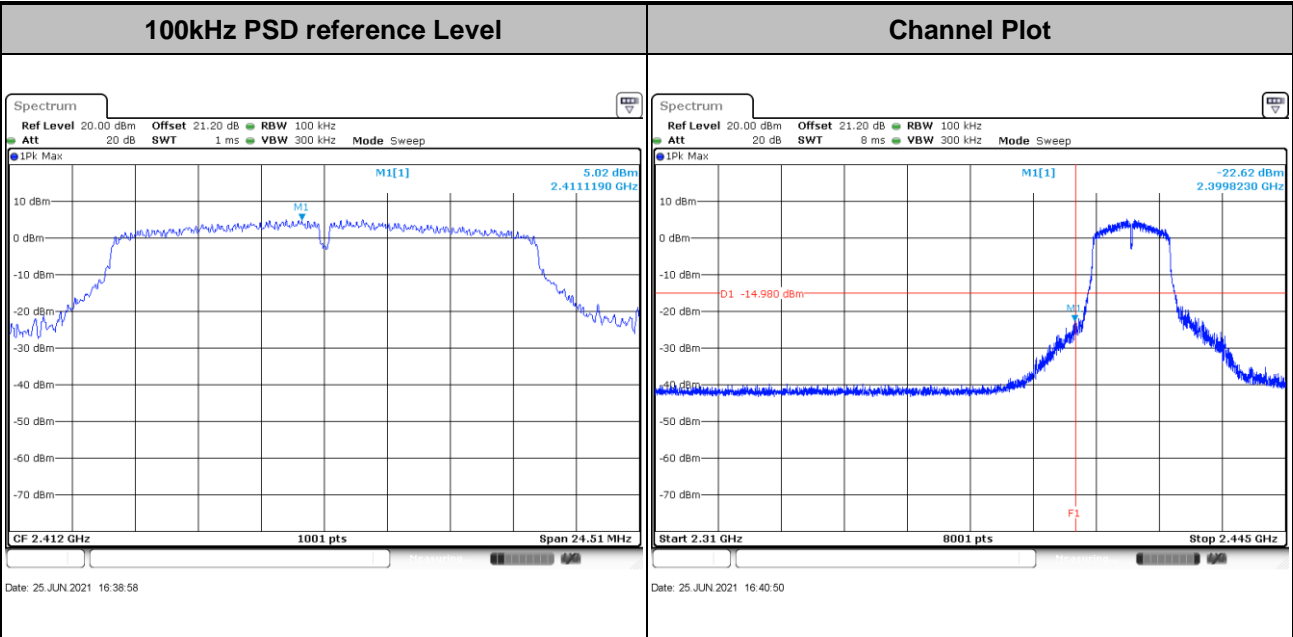





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

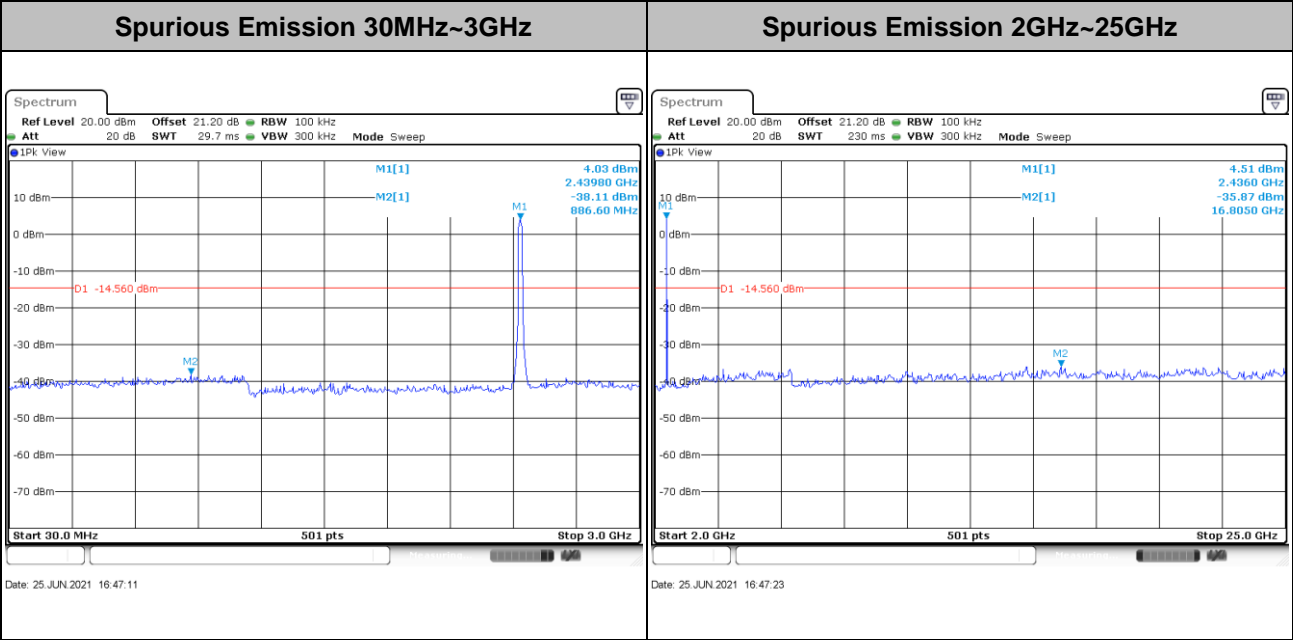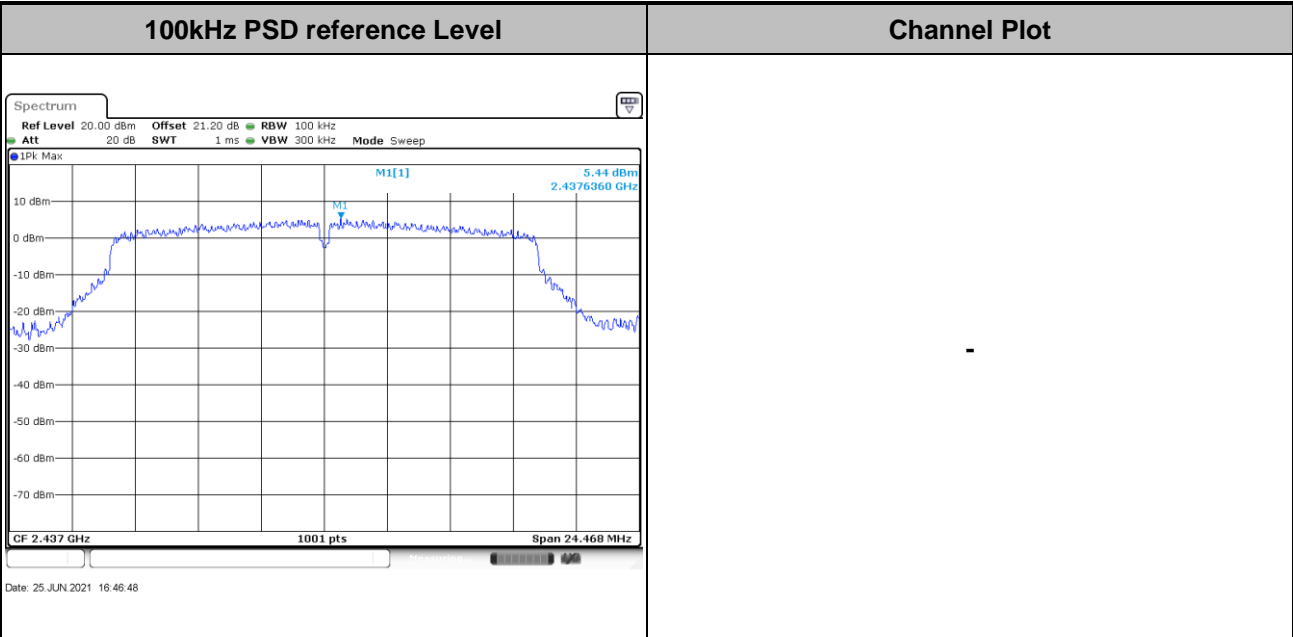





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

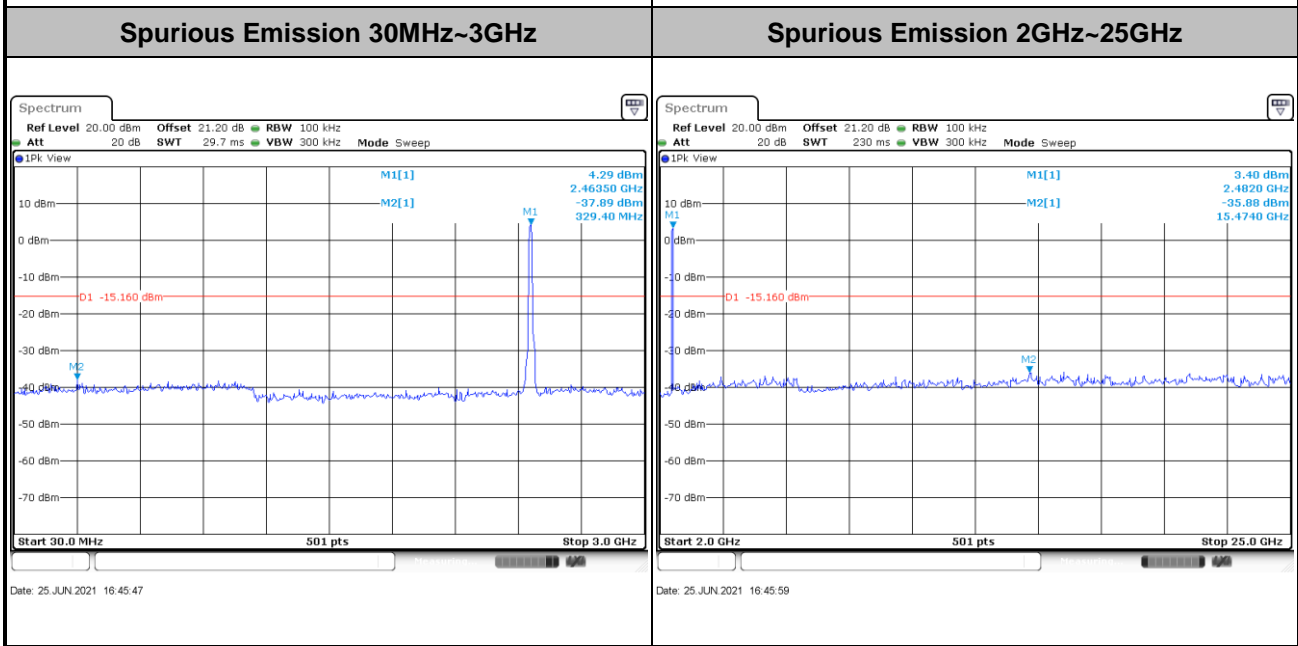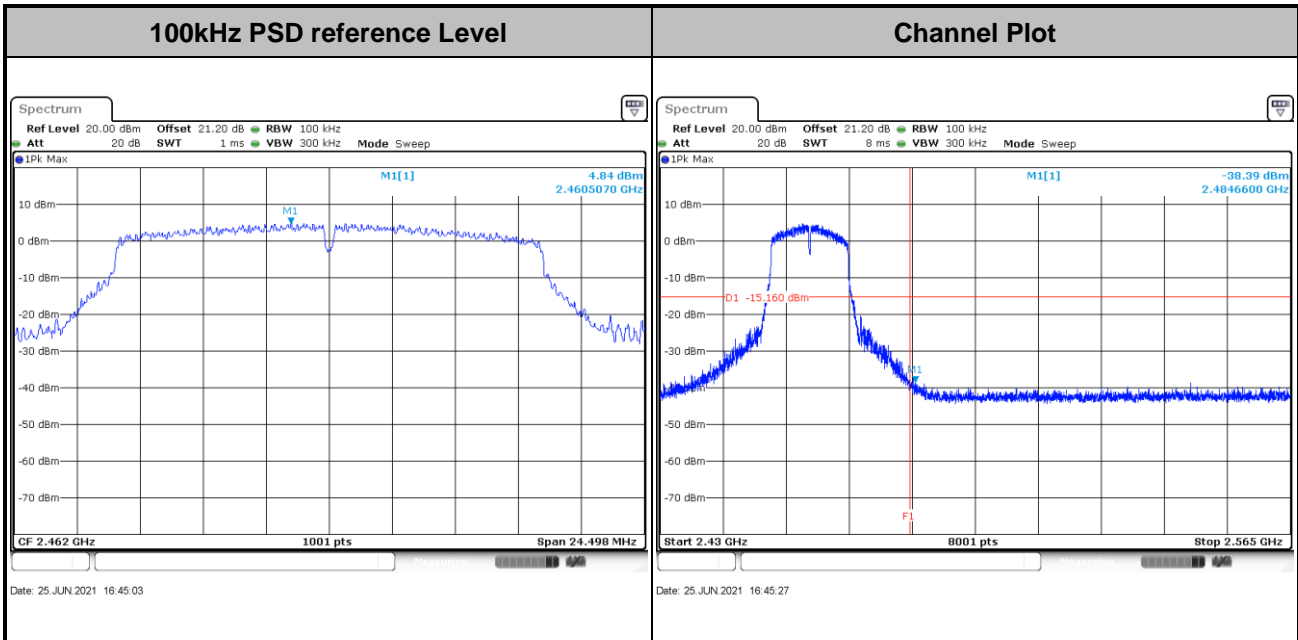





Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

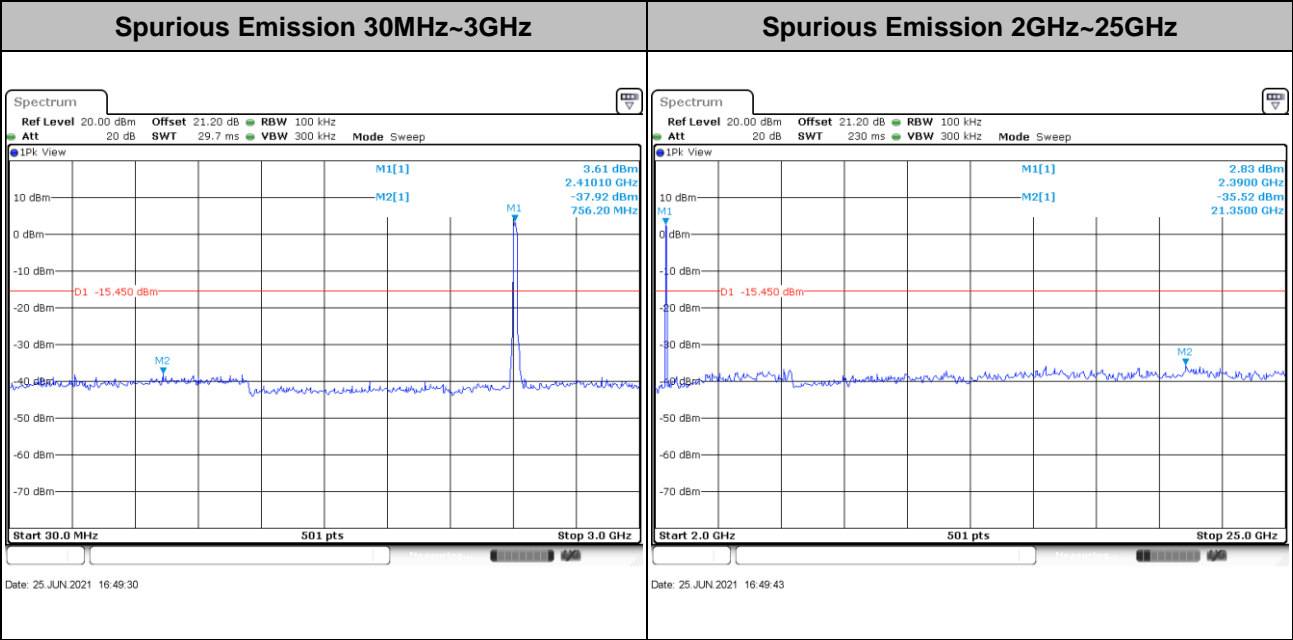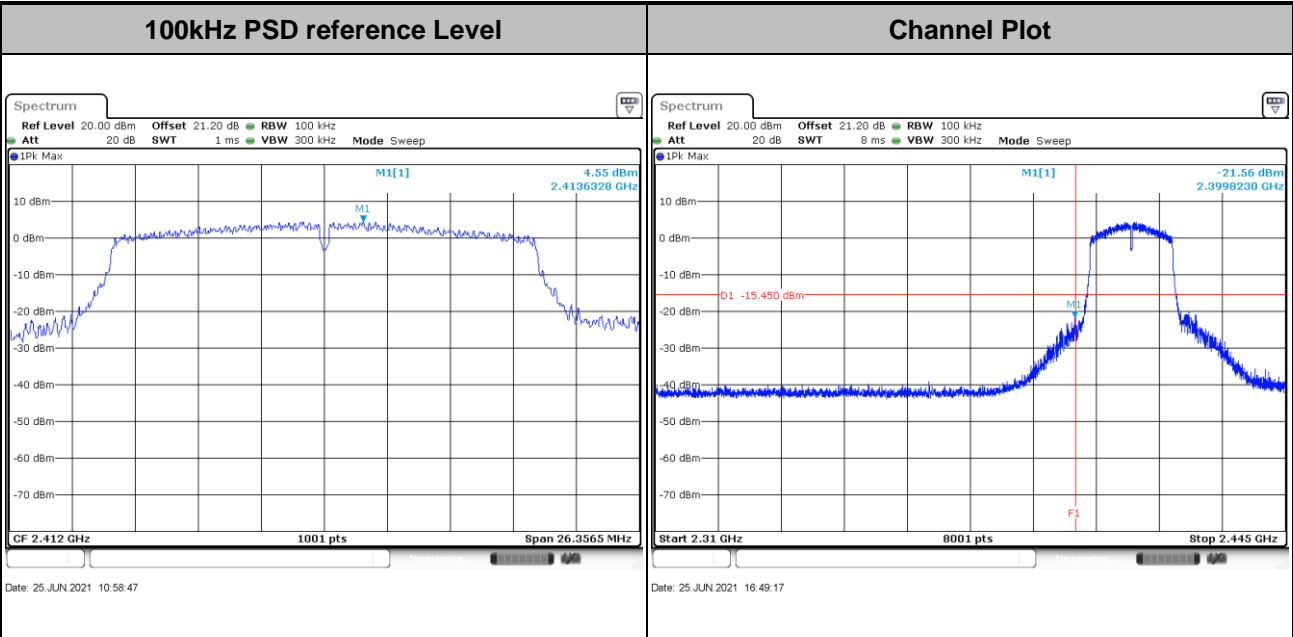









Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

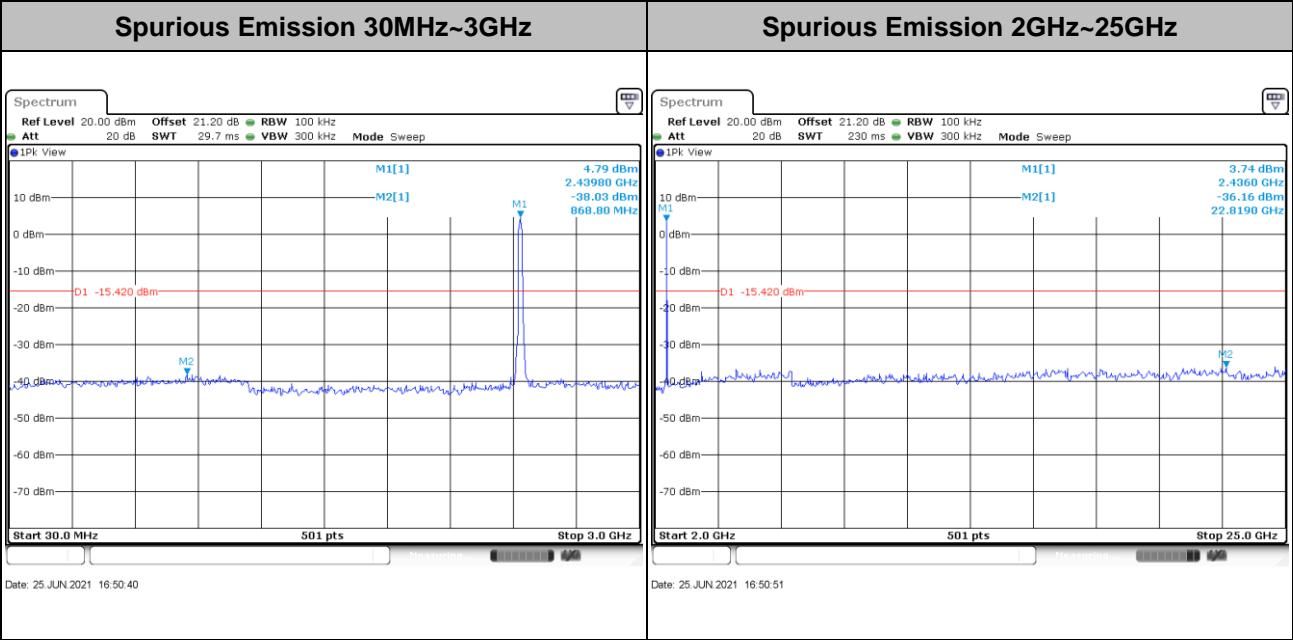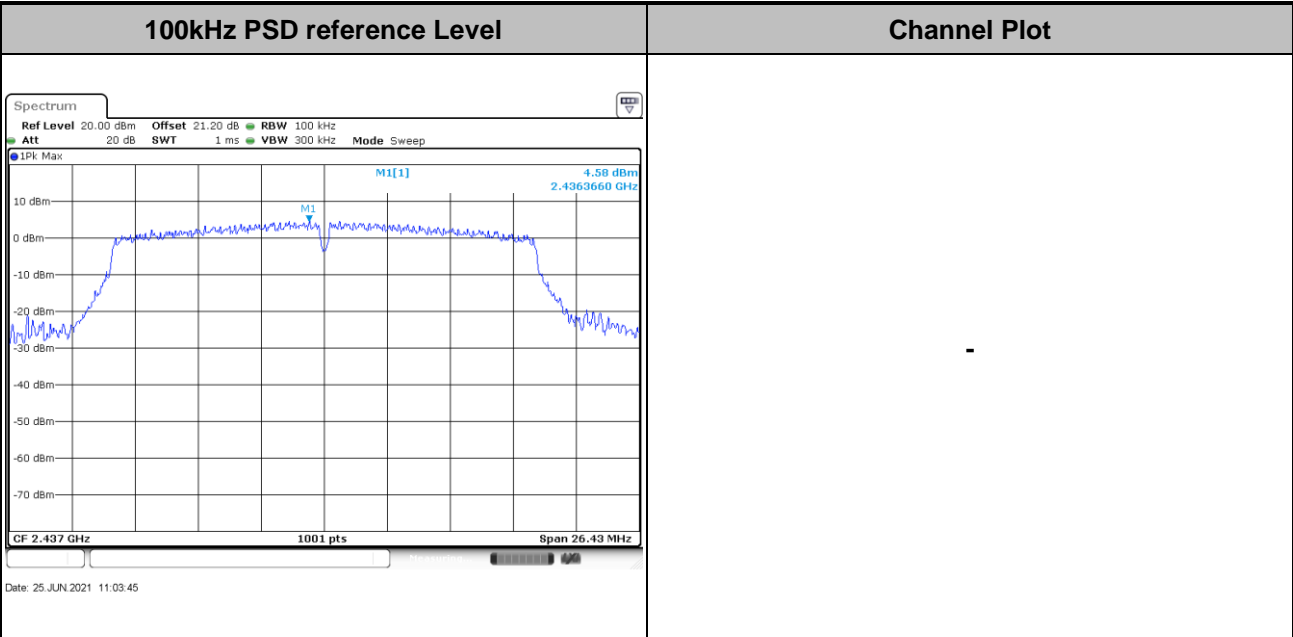





Test Mode : 802.11n HT20 Test Channel : 11

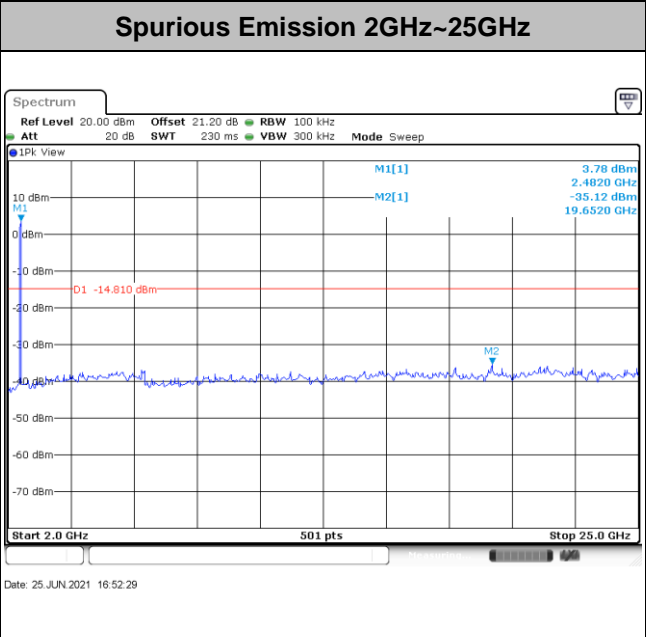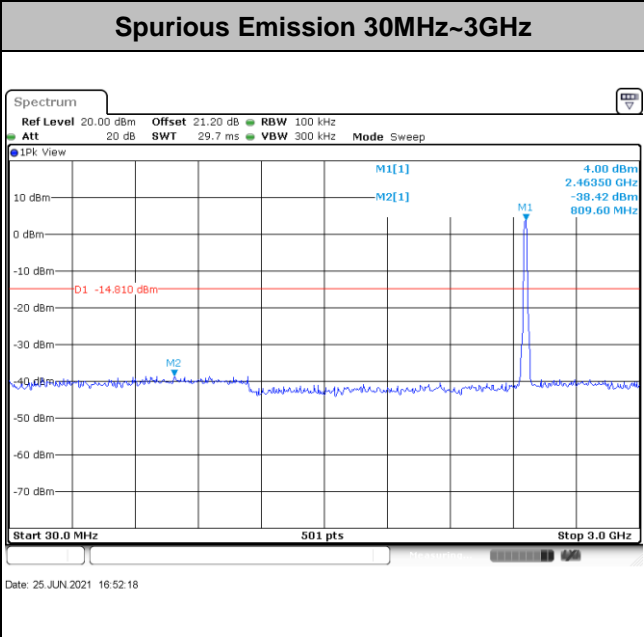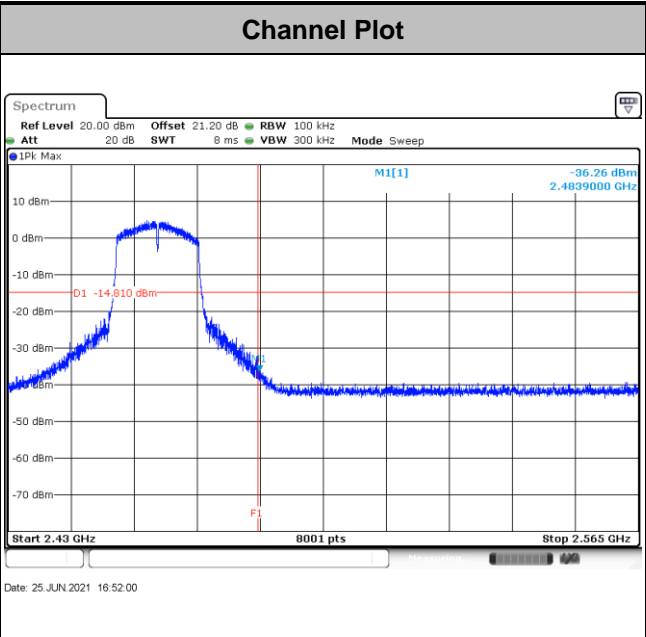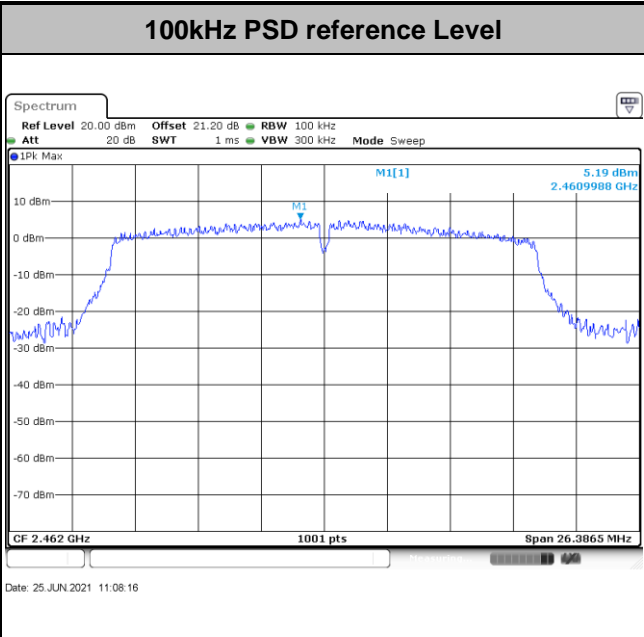





Test Mode : 802.11n HT40 Test Channel : 03

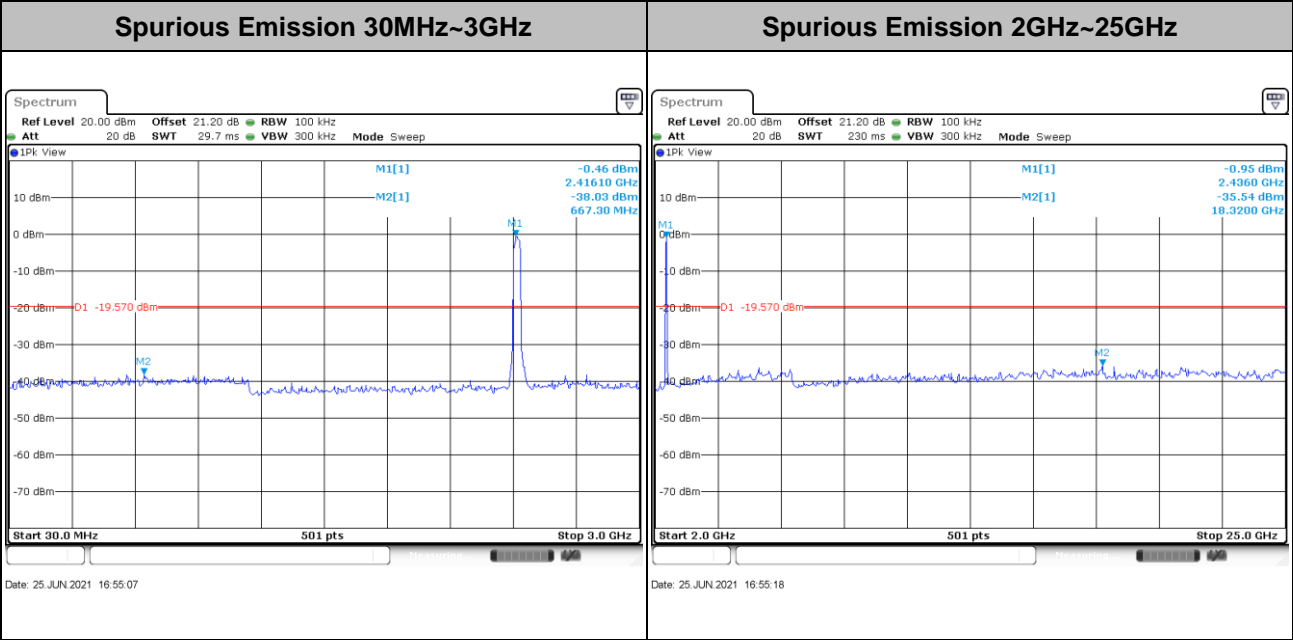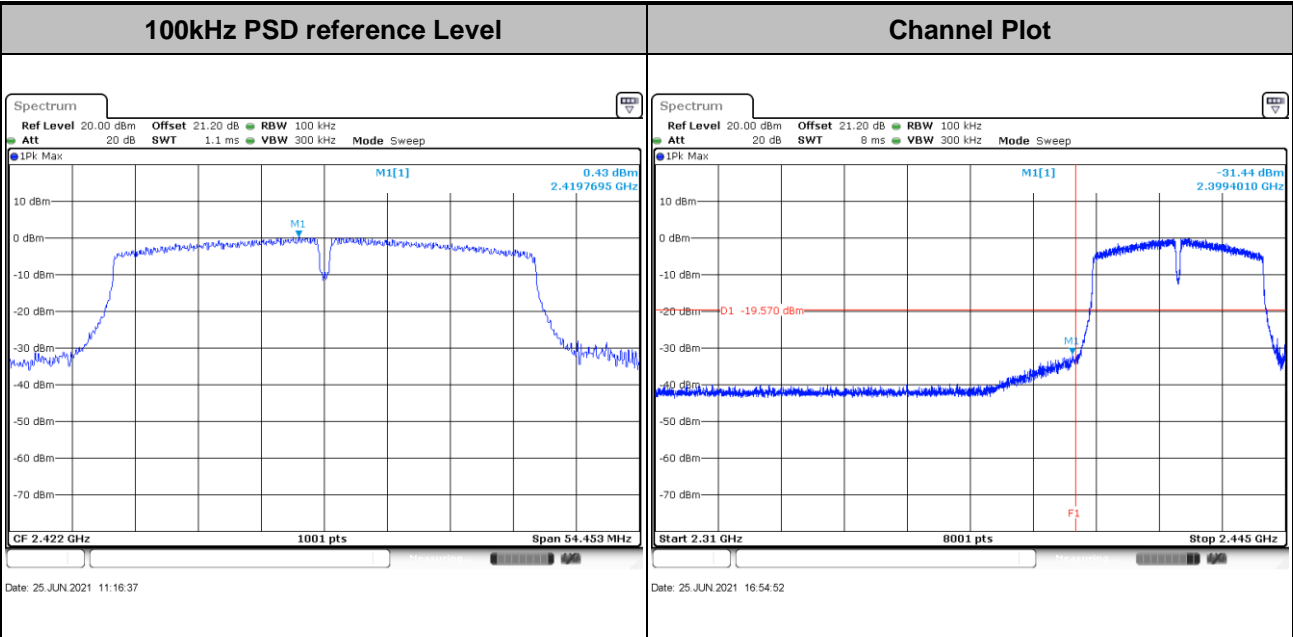







Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

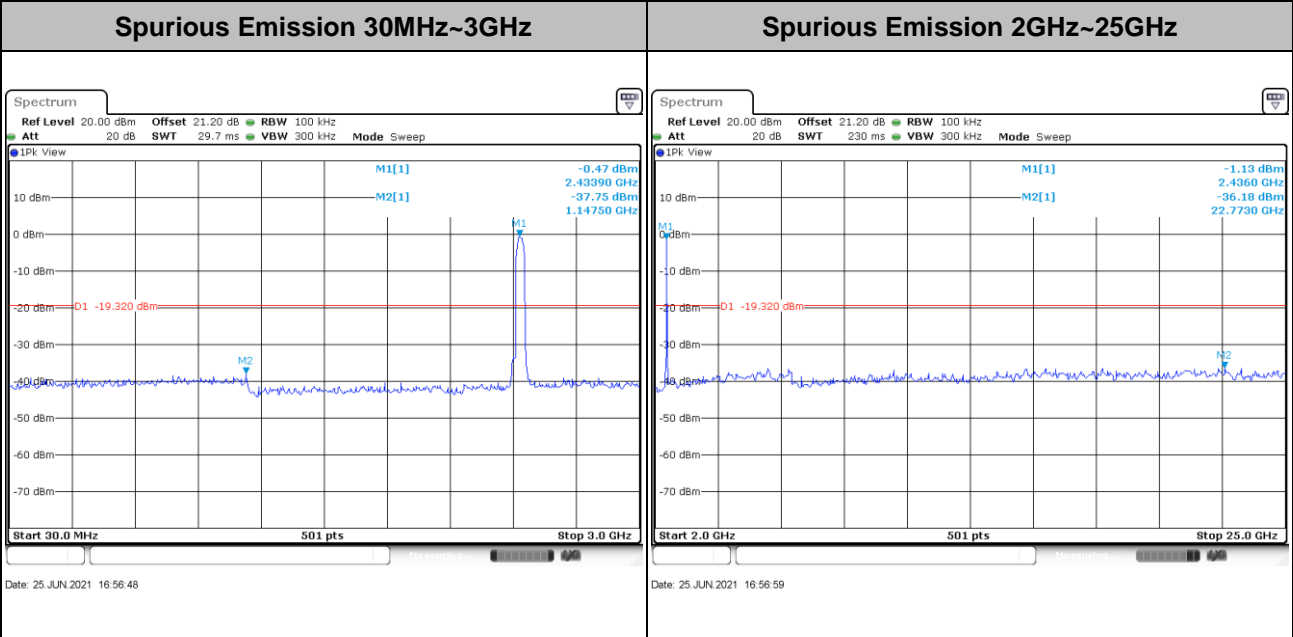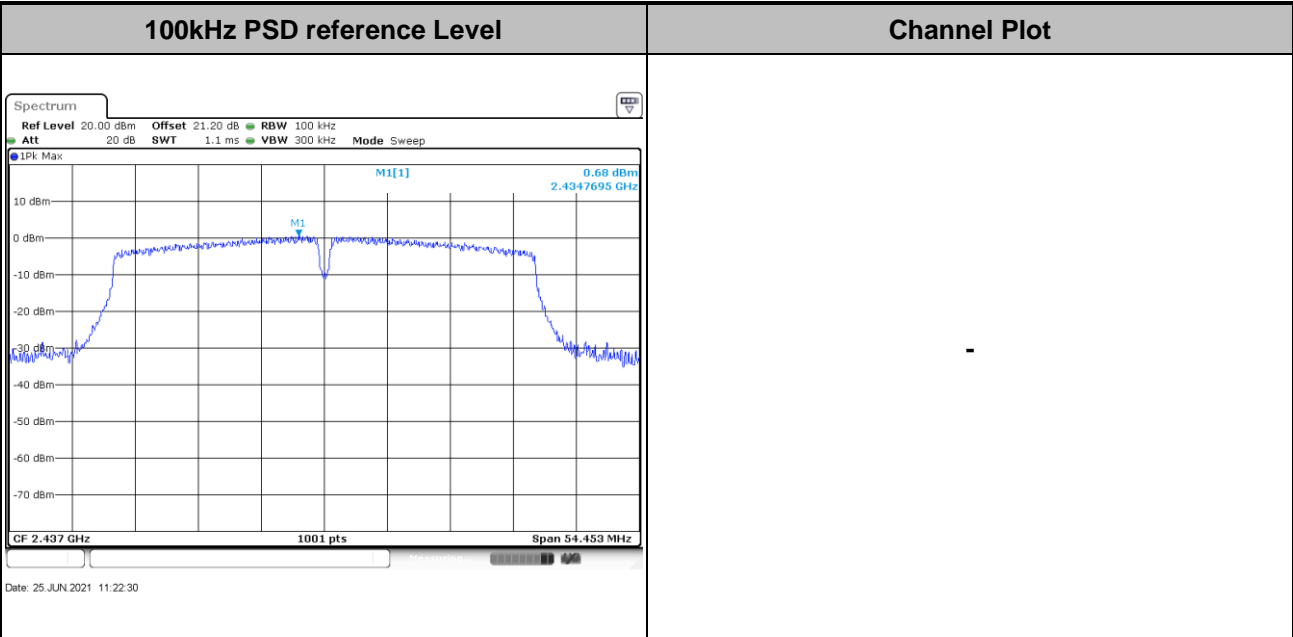



Test Mode : 802.11n HT40      Test Channel : 09

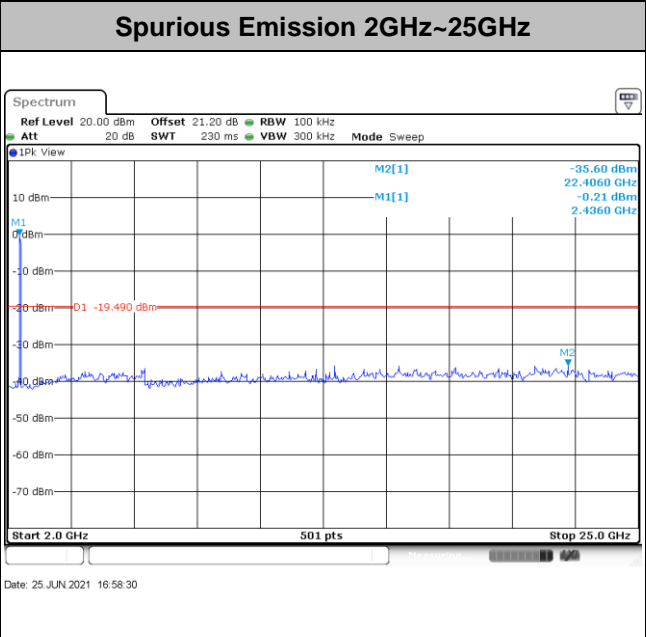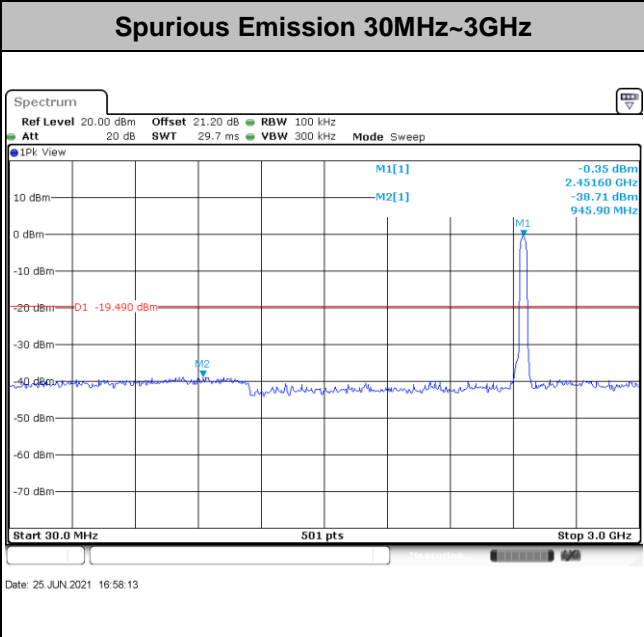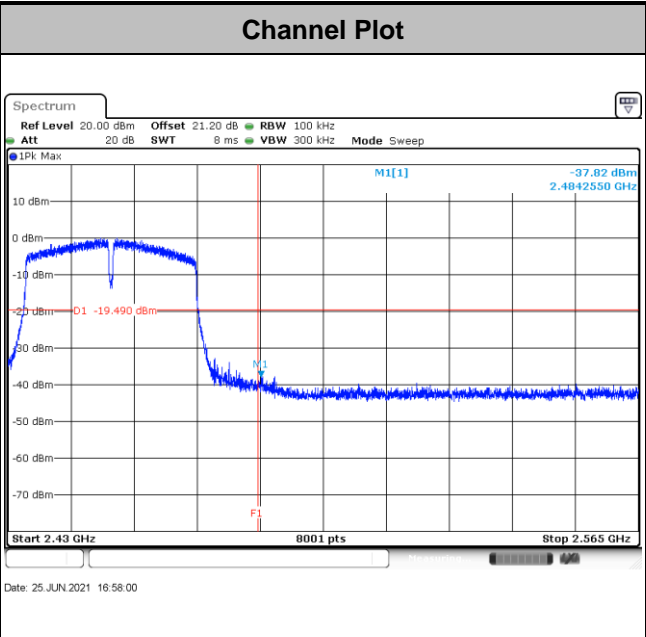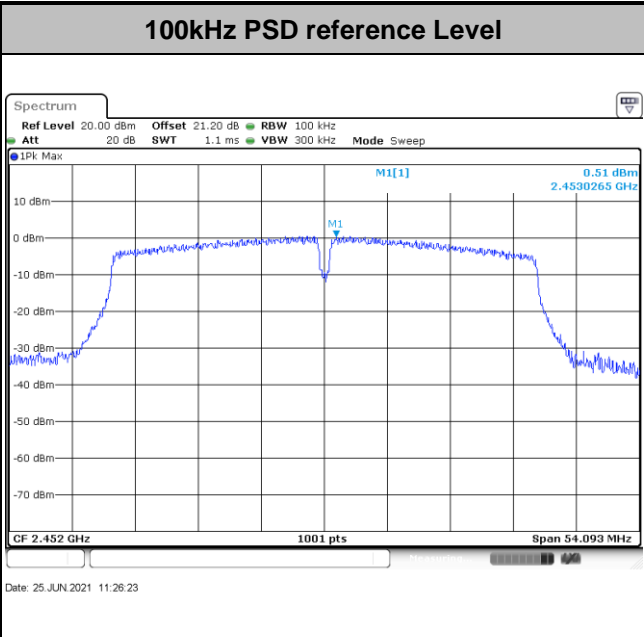



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

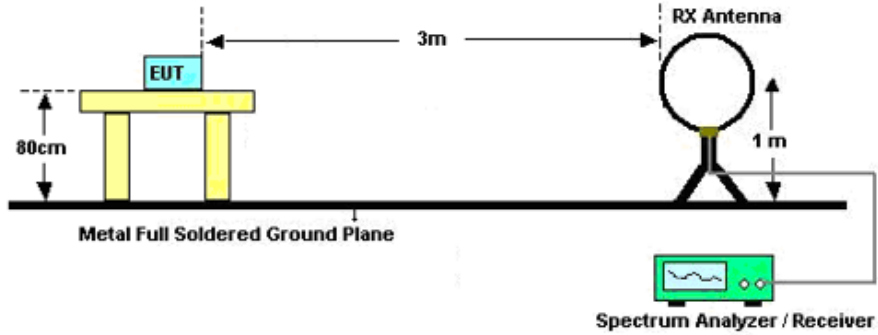

For radiated emissions from 30MHz to 1GHz

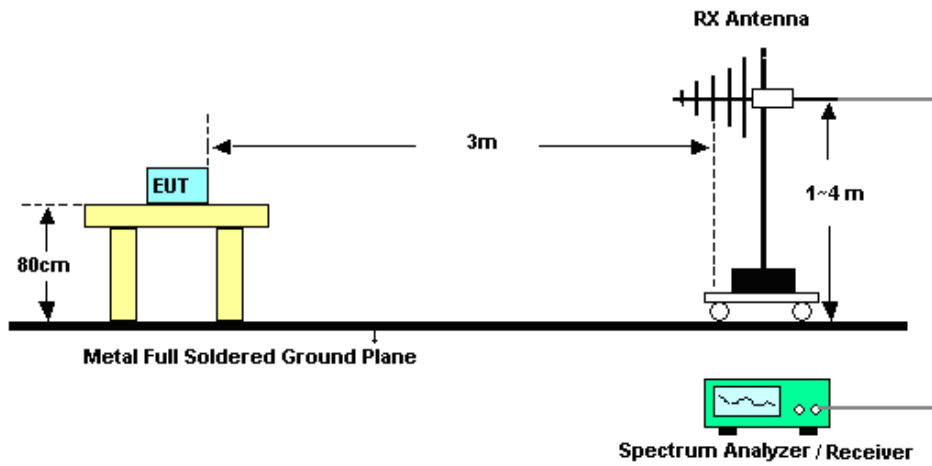

For radiated emissions above 1GHz

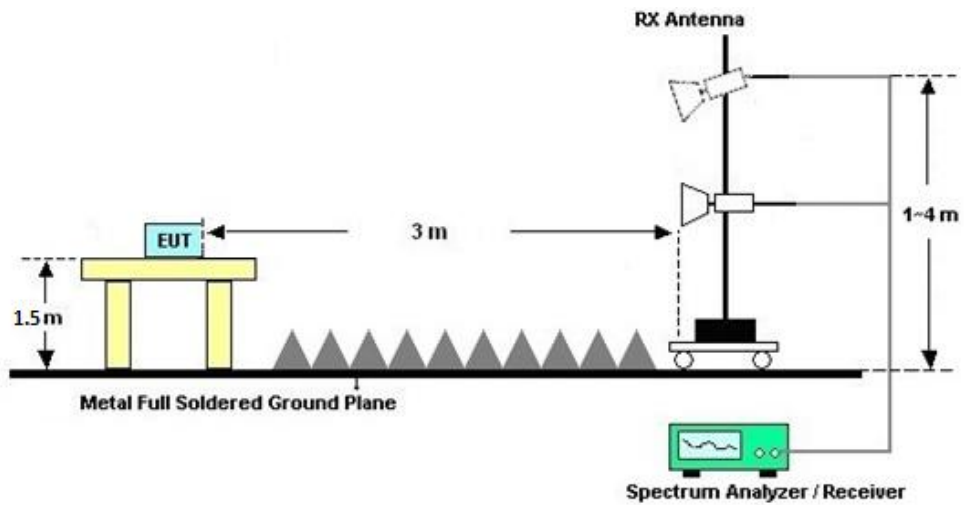





### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

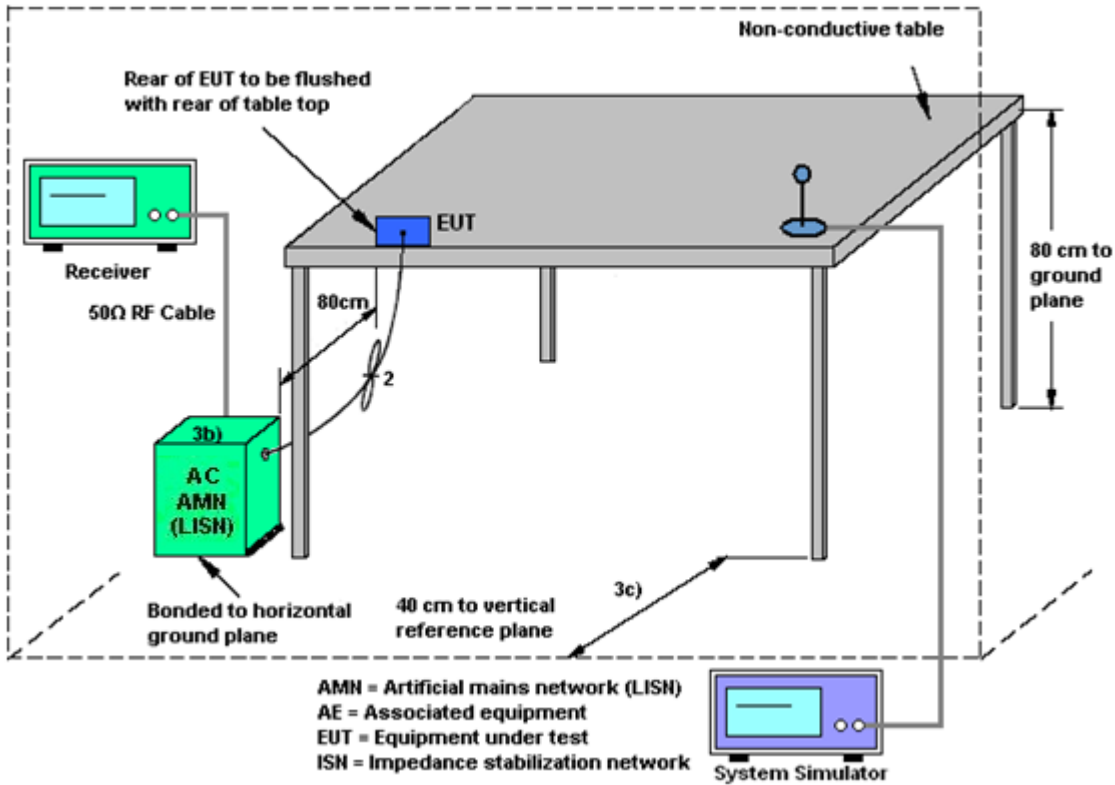

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 07, 2021	Jun. 02, 2021	Mar. 06, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Jun. 02, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Jun. 02, 2021	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2020	Jun. 02, 2021	Jul. 20, 2021	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Jun. 25, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Jun. 25, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Jun. 25, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Jul. 21, 2020	Jul. 09, 2021	Jul. 20, 2021	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2020	Jul. 09, 2021	Jul. 20, 2021	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 22, 2020	Jul. 09, 2021	Jul. 21, 2021	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2020	Jul. 09, 2021	Jul. 14, 2021	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2020	Jul. 09, 2021	Jul. 24, 2021	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 23, 2021	Jul. 09, 2021	Apr. 22, 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 17, 2021	Jul. 09, 2021	Apr. 16, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 17, 2020	Jul. 09, 2021	Oct. 16, 2021	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 16, 2020	Jul. 09, 2021	Oct. 15, 2021	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2020	Jul. 09, 2021	Jul. 20, 2021	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jul. 09, 2021	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 09, 2021	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 09, 2021	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------



## Appendix A. Conducted Test Results

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2021/6/25	Relative Humidity:	51~54	%



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	13.19	8.06	0.50	Pass
11b	1Mbps	1	6	2437	12.99	8.04	0.50	Pass
11b	1Mbps	1	11	2462	13.04	8.04	0.50	Pass
11g	6Mbps	1	1	2412	18.33	16.34	0.50	Pass
11g	6Mbps	1	6	2437	18.23	16.31	0.50	Pass
11g	6Mbps	1	11	2462	18.13	16.33	0.50	Pass
HT20	MCS0	1	1	2412	19.03	17.57	0.50	Pass
HT20	MCS0	1	6	2437	19.23	17.62	0.50	Pass
HT20	MCS0	1	11	2462	18.68	17.59	0.50	Pass
HT40	MCS0	1	3	2422	36.46	36.30	0.50	Pass
HT40	MCS0	1	6	2437	36.46	36.30	0.50	Pass
HT40	MCS0	1	9	2452	36.46	36.06	0.50	Pass

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	23.25	30.00	-4.50	18.75	36.00	Pass
11b	1Mbps	1	6	2437	23.65	30.00	-4.50	19.15	36.00	Pass
11b	1Mbps	1	11	2462	23.55	30.00	-4.50	19.05	36.00	Pass
11g	6Mbps	1	1	2412	24.81	30.00	-4.50	20.31	36.00	Pass
11g	6Mbps	1	6	2437	26.57	30.00	-4.50	22.07	36.00	Pass
11g	6Mbps	1	11	2462	25.14	30.00	-4.50	20.64	36.00	Pass
HT20	MCS0	1	1	2412	24.56	30.00	-4.50	20.06	36.00	Pass
HT20	MCS0	1	6	2437	26.62	30.00	-4.50	22.12	36.00	Pass
HT20	MCS0	1	11	2462	25.03	30.00	-4.50	20.53	36.00	Pass
HT40	MCS0	1	3	2422	23.85	30.00	-4.50	19.35	36.00	Pass
HT40	MCS0	1	6	2437	26.34	30.00	-4.50	21.84	36.00	Pass
HT40	MCS0	1	9	2452	25.07	30.00	-4.50	20.57	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band					
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
					Ant 1
11b	1Mbps	1	1	2412	21.00
11b	1Mbps	1	6	2437	21.00
11b	1Mbps	1	11	2462	20.90
11g	6Mbps	1	1	2412	16.70
11g	6Mbps	1	6	2437	18.90
11g	6Mbps	1	11	2462	16.50
HT20	MCS0	1	1	2412	16.50
HT20	MCS0	1	6	2437	18.80
HT20	MCS0	1	11	2462	16.70
HT40	MCS0	1	3	2422	13.60
HT40	MCS0	1	6	2437	16.90
HT40	MCS0	1	9	2452	16.10

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**


2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-1.67	-4.50	8.00	Pass
11b	1Mbps	1	6	2437	-2.37	-4.50	8.00	Pass
11b	1Mbps	1	11	2462	-0.82	-4.50	8.00	Pass
11g	6Mbps	1	1	2412	-5.24	-4.50	8.00	Pass
11g	6Mbps	1	6	2437	-5.62	-4.50	8.00	Pass
11g	6Mbps	1	11	2462	-5.41	-4.50	8.00	Pass
HT20	MCS0	1	1	2412	-6.98	-4.50	8.00	Pass
HT20	MCS0	1	6	2437	-6.64	-4.50	8.00	Pass
HT20	MCS0	1	11	2462	-6.25	-4.50	8.00	Pass
HT40	MCS0	1	3	2422	-10.87	-4.50	8.00	Pass
HT40	MCS0	1	6	2437	-10.92	-4.50	8.00	Pass
HT40	MCS0	1	9	2452	-10.88	-4.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

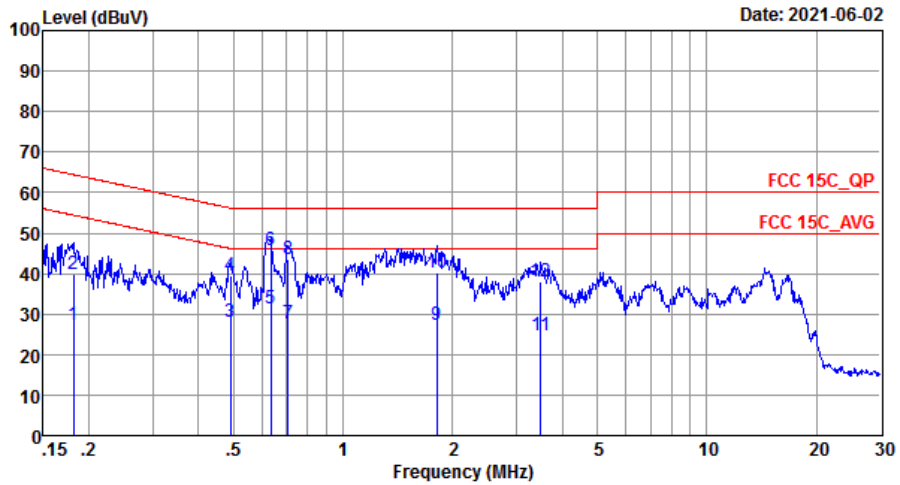


Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20201030\_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	27.20	-27.22	54.42	17.10	0.08	10.02	Average
2	0.18	39.70	-24.72	64.42	29.60	0.08	10.02	QP
3	0.49	27.95	-18.19	46.14	17.80	0.10	10.05	Average
4	0.49	39.35	-16.79	56.14	29.20	0.10	10.05	QP
5	0.63	31.24	-14.76	46.00	21.10	0.10	10.04	Average
6 *	0.63	45.64	-10.36	56.00	35.50	0.10	10.04	QP
7	0.70	27.74	-18.26	46.00	17.60	0.10	10.04	Average
8	0.70	43.64	-12.36	56.00	33.50	0.10	10.04	QP
9	1.81	27.17	-18.83	46.00	17.00	0.09	10.08	Average
10	1.81	40.37	-15.63	56.00	30.20	0.09	10.08	QP
11	3.49	24.87	-21.13	46.00	14.60	0.05	10.22	Average
12	3.49	37.97	-18.03	56.00	27.70	0.05	10.22	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

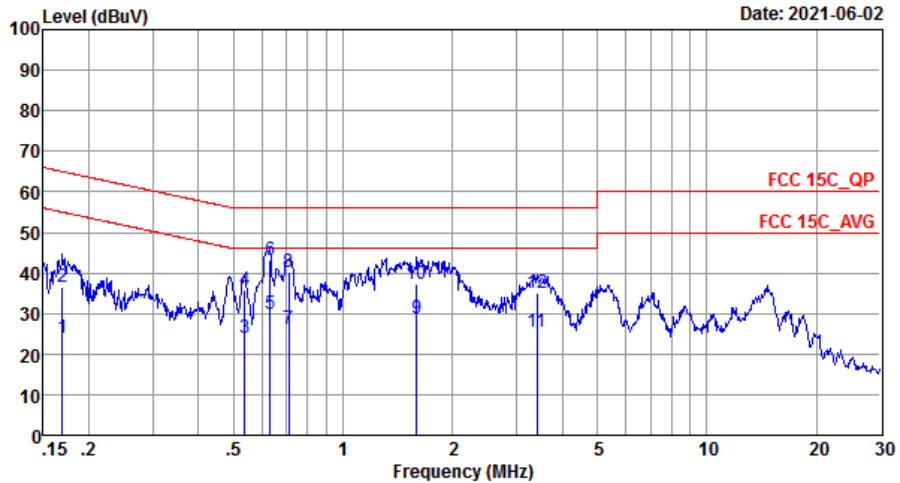

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20201030\_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	24.00	-30.99	54.99	13.90	0.08	10.02	Average
2	0.17	36.70	-28.29	64.99	26.60	0.08	10.02	QP
3	0.54	23.85	-22.15	46.00	13.70	0.10	10.05	Average
4	0.54	35.65	-20.35	56.00	25.50	0.10	10.05	QP
5	0.63	30.04	-15.96	46.00	19.90	0.10	10.04	Average
6 *	0.63	43.14	-12.86	56.00	33.00	0.10	10.04	QP
7	0.71	26.13	-19.87	46.00	16.00	0.10	10.03	Average
8	0.71	40.23	-15.77	56.00	30.10	0.10	10.03	QP
9	1.59	28.96	-17.04	46.00	18.80	0.09	10.07	Average
10	1.59	37.36	-18.64	56.00	27.20	0.09	10.07	QP
11	3.42	25.47	-20.53	46.00	15.21	0.05	10.21	Average
12	3.42	35.17	-20.83	56.00	24.91	0.05	10.21	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

### 2.4GHz 2400~2483.5MHz

#### WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b CH 01 2412MHz		2389.38	53.57	-20.43	74	48.83	27.8	9.64	32.7	192	286	P	H
		2388.435	42.38	-11.62	54	37.64	27.8	9.64	32.7	192	286	A	H
		2412	109.91	-	-	105.18	27.77	9.66	32.7	192	286	P	H
		2412	106.82	-	-	102.09	27.77	9.66	32.7	192	286	A	H
		2389.065	50.74	-23.26	74	46	27.8	9.64	32.7	166	48	P	V
		2388.54	40.36	-13.64	54	35.62	27.8	9.64	32.7	166	48	A	V
		2412	102.58	-	-	97.85	27.77	9.66	32.7	166	48	P	V
		2412	99.81	-	-	95.08	27.77	9.66	32.7	166	48	A	V
802.11b CH 06 2437MHz		2389.94	51.51	-22.49	74	46.77	27.8	9.64	32.7	215	288	P	H
		2389.94	41.79	-12.21	54	37.05	27.8	9.64	32.7	215	288	A	H
		2437	111.22	-	-	106.52	27.71	9.69	32.7	215	288	P	H
		2437	108.22	-	-	103.52	27.71	9.69	32.7	215	288	A	H
		2484.81	51.53	-22.47	74	46.82	27.66	9.75	32.7	215	288	P	H
		2483.5	40.91	-13.09	54	36.2	27.66	9.75	32.7	215	288	A	H
		2319.1	50.27	-23.73	74	45.51	27.91	9.55	32.7	212	124	P	V
		2388.54	39.85	-14.15	54	35.11	27.8	9.64	32.7	212	124	A	V
		2437	101.51	-	-	96.8	27.71	9.7	32.7	212	124	P	V
		2437	98.51	-	-	93.8	27.71	9.7	32.7	212	124	A	V
		2495.66	50.11	-23.89	74	45.42	27.63	9.76	32.7	212	124	P	V
	2483.5	39.95	-14.05	54	35.24	27.66	9.75	32.7	212	124	A	V	



802.11b CH 11 2462MHz	2462	112.82	-	-	108.11	27.69	9.72	32.7	303	289	P	H
	2462	109.73	-	-	105.02	27.69	9.72	32.7	303	289	A	H
	2483.6	52.62	-21.38	74	47.91	27.66	9.75	32.7	303	289	P	H
	2483.52	42.5	-11.5	54	37.79	27.66	9.75	32.7	303	289	A	H
	2462	107.9	-	-	103.19	27.69	9.72	32.7	274	240	P	V
	2462	104.79	-	-	100.08	27.69	9.72	32.7	274	240	A	V
	2488.56	51.4	-22.6	74	46.71	27.63	9.76	32.7	274	240	P	V
	2483.52	40.69	-13.31	54	35.98	27.66	9.75	32.7	274	240	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											





**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 01 2412MHz		4824	42.72	-31.28	74	51.73	31.12	12.01	52.14	174	29	P	H
		4824	43.14	-30.86	74	52.15	31.12	12.01	52.14	185	255	P	V
802.11b CH 06 2437MHz		4874	41.48	-32.52	74	50.37	31.17	12.04	52.1	165	106	P	H
		7311	47.28	-26.72	74	48.88	36.03	14.16	51.79	174	100	P	H
		4874	40.86	-33.14	74	49.75	31.17	12.04	52.1	165	106	P	V
		7311	47.66	-26.34	74	49.26	36.03	14.16	51.79	174	100	P	V
802.11b CH 11 2462MHz		4924	43.05	-30.95	74	51.82	31.22	12.07	52.06	150	285	P	H
		7386	48.97	-25.03	74	50.17	36.29	14.21	51.7	155	274	P	H
		4924	43.95	-30.05	74	52.72	31.22	12.07	52.06	150	285	P	V
		7386	48.95	-25.05	74	50.15	36.29	14.21	51.7	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2388.96	67.26	-6.74	74	62.52	27.8	9.64	32.7	319	287	P	H
		2389.905	51.41	-2.59	54	46.67	27.8	9.64	32.7	319	287	A	H
		2412	111.29	-	-	106.56	27.77	9.66	32.7	319	287	P	H
		2412	103.99	-	-	99.26	27.77	9.66	32.7	319	287	A	H
		2386.965	55.03	-18.97	74	50.3	27.8	9.63	32.7	100	324	P	V
		2390	42.86	-11.14	54	38.12	27.8	9.64	32.7	100	324	A	V
		2412	102.25	-	-	97.52	27.77	9.66	32.7	100	324	P	V
		2412	94.66	-	-	89.93	27.77	9.66	32.7	100	324	A	V
802.11g CH 06 2437MHz		2387.98	55.23	-18.77	74	50.49	27.8	9.64	32.7	310	281	P	H
		2389.94	43.42	-10.58	54	38.68	27.8	9.64	32.7	310	281	A	H
		2437	111.52	-	-	106.82	27.71	9.69	32.7	310	281	P	H
		2437	104.42	-	-	99.72	27.71	9.69	32.7	310	281	A	H
		2483.5	52.2	-21.8	74	47.49	27.66	9.75	32.7	310	281	P	H
		2483.5	42.28	-11.72	54	37.57	27.66	9.75	32.7	310	281	A	H
		2318.12	50.17	-23.83	74	45.41	27.91	9.55	32.7	106	323	P	V
		2389.66	40.24	-13.76	54	35.5	27.8	9.64	32.7	106	323	A	V
		2437	102.48	-	-	97.78	27.71	9.69	32.7	106	323	P	V
		2437	94.69	-	-	89.99	27.71	9.69	32.7	106	323	A	V
		2487.96	50.06	-23.94	74	45.37	27.63	9.76	32.7	106	323	P	V
	2483.69	39.82	-14.18	54	35.11	27.66	9.75	32.7	106	323	A	V	
802.11g CH 11 2462MHz		2462	110.02	-	-	105.31	27.69	9.72	32.7	343	293	P	H
		2462	102.44	-	-	97.73	27.69	9.72	32.7	343	293	A	H
		2483.68	67.65	-6.35	74	62.94	27.66	9.75	32.7	343	293	P	H
		2483.56	51.14	-2.86	54	46.43	27.66	9.75	32.7	343	293	A	H
		2462	101.5	-	-	96.79	27.69	9.72	32.7	115	316	P	V
		2462	94.13	-	-	89.42	27.69	9.72	32.7	115	316	A	V
		2484.04	51.43	-22.57	74	46.72	27.66	9.75	32.7	115	316	P	V
		2483.52	41.05	-12.95	54	36.34	27.66	9.75	32.7	115	316	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	43.19	-30.81	74	52.2	31.12	12.01	52.14	174	29	P	H
		4824	42.56	-31.44	74	51.57	31.12	12.01	52.14	185	255	P	V
802.11g CH 06 2437MHz		4874	40.95	-33.05	74	49.84	31.17	12.04	52.1	165	106	P	H
		7311	46.59	-27.41	74	48.19	36.03	14.16	51.79	174	100	P	H
		4874	41.66	-32.34	74	50.55	31.17	12.04	52.1	165	106	P	V
		7311	46.72	-27.28	74	48.32	36.03	14.16	51.79	174	100	P	V
802.11g CH 11 2462MHz		4924	43.76	-30.24	74	52.53	31.22	12.07	52.06	150	285	P	H
		7386	49.02	-24.98	74	50.22	36.29	14.21	51.7	155	274	P	H
		4924	43.21	-30.79	74	51.98	31.22	12.07	52.06	150	285	P	V
		7386	48.68	-25.32	74	49.88	36.29	14.21	51.7	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		2389.17	66.16	-7.84	74	61.42	27.8	9.64	32.7	321	284	P	H
		2390	51.23	-2.77	54	46.49	27.8	9.64	32.7	321	284	A	H
		2412	110.97	-	-	106.24	27.77	9.66	32.7	321	284	P	H
		2412	103.67	-	-	98.94	27.77	9.66	32.7	321	284	A	H
		2389.275	54.69	-19.31	74	49.95	27.8	9.64	32.7	113	357	P	V
		2390	41.64	-12.36	54	36.9	27.8	9.64	32.7	113	357	A	V
		2412	100.86	-	-	96.13	27.77	9.66	32.7	113	357	P	V
802.11n HT20 CH 06 2437MHz		2385.18	53.6	-20.4	74	48.84	27.83	9.63	32.7	316	284	P	H
		2389.94	43.82	-10.18	54	39.08	27.8	9.64	32.7	316	284	A	H
		2437	111.84	-	-	107.14	27.71	9.69	32.7	316	284	P	H
		2437	104.65	-	-	99.95	27.71	9.69	32.7	316	284	A	H
		2484.95	51.9	-22.1	74	47.19	27.66	9.75	32.7	316	284	P	H
		2483.5	42.09	-11.91	54	37.38	27.66	9.75	32.7	316	284	A	H
		2350.88	50.82	-23.18	74	46.05	27.88	9.59	32.7	100	303	P	V
		2389.94	40.86	-13.14	54	36.12	27.8	9.64	32.7	100	303	A	V
		2437	103.69	-	-	98.99	27.71	9.69	32.7	100	303	P	V
		2437	96.2	-	-	91.5	27.71	9.69	32.7	100	303	A	V
		2495.94	51.42	-22.58	74	46.72	27.63	9.77	32.7	100	303	P	V
	2483.5	40.32	-13.68	54	35.61	27.66	9.75	32.7	100	303	A	V	



<b>802.11n</b>  <b>HT20</b>  <b>CH 11</b>  <b>2462MHz</b>		2462	110.03	-	-	105.32	27.69	9.72	32.7	349	286	P	H
		2462	102.79	-	-	98.08	27.69	9.72	32.7	349	286	A	H
		2483.56	66.59	-7.41	74	61.88	27.66	9.75	32.7	349	286	P	H
		2483.52	49.72	-4.28	54	45.01	27.66	9.75	32.7	349	286	A	H
		2462	103.66	-	-	98.95	27.69	9.72	32.7	309	250	P	V
		2462	96.14	-	-	91.43	27.69	9.72	32.7	309	250	A	V
		2483.6	62.83	-11.17	74	58.12	27.66	9.75	32.7	309	250	P	V
		2483.52	46.48	-7.52	54	41.77	27.66	9.75	32.7	309	250	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 at 4824, 4874, 7311, 4924, 7386 MHz.



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 03 2422MHz		2388.12	62.58	-11.42	74	57.84	27.8	9.64	32.7	282	285	P	H
		2389.94	51.4	-2.6	54	46.66	27.8	9.64	32.7	282	285	A	H
		2422	104.92	-	-	100.2	27.74	9.68	32.7	282	285	P	H
		2422	97.22	-	-	92.5	27.74	9.68	32.7	282	285	A	H
		2484.67	51.81	-22.19	74	47.1	27.66	9.75	32.7	282	285	P	H
		2483.5	41.25	-12.75	54	36.54	27.66	9.75	32.7	282	285	A	H
		2389.94	57.75	-16.25	74	53.01	27.8	9.64	32.7	282	247	P	V
		2389.94	47.26	-6.74	54	42.52	27.8	9.64	32.7	282	247	A	V
		2422	99.43	-	-	94.71	27.74	9.68	32.7	282	247	P	V
		2422	91.81	-	-	87.09	27.74	9.68	32.7	282	247	A	V
		2485.93	50.46	-23.54	74	45.75	27.66	9.75	32.7	282	247	P	V
		2483.62	40.1	-13.9	54	35.39	27.66	9.75	32.7	282	247	A	V
802.11n HT40 CH 06 2437MHz		2389.52	61.96	-12.04	74	57.22	27.8	9.64	32.7	355	285	P	H
		2389.94	49.9	-4.1	54	45.16	27.8	9.64	32.7	355	285	A	H
		2437	107.44	-	-	102.74	27.71	9.69	32.7	355	285	P	H
		2437	99.99	-	-	95.29	27.71	9.69	32.7	355	285	A	H
		2483.62	60.13	-13.87	74	55.42	27.66	9.75	32.7	355	285	P	H
		2483.5	46.95	-7.05	54	42.24	27.66	9.75	32.7	355	285	A	H
		2389.8	59.18	-14.82	74	54.44	27.8	9.64	32.7	318	247	P	V
		2389.94	46.94	-7.06	54	42.2	27.8	9.64	32.7	318	247	A	V
		2437	104.46	-	-	99.76	27.71	9.69	32.7	318	247	P	V
		2437	96.9	-	-	92.2	27.71	9.69	32.7	318	247	A	V
		2483.9	59.49	-14.51	74	54.78	27.66	9.75	32.7	318	247	P	V
		2483.5	43.92	-10.08	54	39.21	27.66	9.75	32.7	318	247	A	V



<b>802.11n</b>  <b>HT40</b>  <b>CH 09</b>  <b>2452MHz</b>		2389.94	54.28	-19.72	74	49.54	27.8	9.64	32.7	349	288	P	H
		2389.94	43.36	-10.64	54	38.62	27.8	9.64	32.7	349	288	A	H
		2452	107.64	-	-	102.92	27.71	9.71	32.7	349	288	P	H
		2452	99.83	-	-	95.11	27.71	9.71	32.7	349	288	A	H
		2483.55	62.85	-11.15	74	58.14	27.66	9.75	32.7	349	288	P	H
		2483.5	49.98	-4.02	54	45.27	27.66	9.75	32.7	349	288	A	H
		2389.94	51.89	-22.11	74	47.15	27.8	9.64	32.7	314	245	P	V
		2389.94	41.72	-12.28	54	36.98	27.8	9.64	32.7	314	245	A	V
		2452	104.23	-	-	99.51	27.71	9.71	32.7	314	245	P	V
		2452	96.6	-	-	91.88	27.71	9.71	32.7	314	245	A	V
		2483.69	60.32	-13.68	74	55.61	27.66	9.75	32.7	314	245	P	V
		2483.5	46.34	-7.66	54	41.63	27.66	9.75	32.7	314	245	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4844	43.1	-30.9	74	52.06	31.13	12.03	52.12	188	296	P	H
HT40		7266	48.85	-25.15	74	50.6	35.93	14.14	51.82	169	275	P	H
CH 03		4844	43.26	-30.74	74	52.22	31.13	12.03	52.12	188	296	P	V
2422MHz		7266	49.07	-24.93	74	50.82	35.93	14.14	51.82	169	275	P	V
802.11n		4874	41.37	-32.63	74	50.26	31.17	12.04	52.1	165	230	P	H
HT40		7311	47.08	-26.92	74	48.68	36.03	14.16	51.79	186	323	P	H
CH 06		4874	43.13	-30.87	74	52.02	31.17	12.04	52.1	165	230	P	V
2437MHz		7311	48.81	-25.19	74	50.41	36.03	14.16	51.79	186	323	P	V
802.11n		4904	43.32	-30.68	74	52.13	31.2	12.06	52.07	150	360	P	H
HT40		7356	49.35	-24.65	74	50.71	36.19	14.19	51.74	165	335	P	H
CH 09		4904	43.76	-30.24	74	52.57	31.2	12.06	52.07	150	360	P	V
2452MHz		7356	49.32	-24.68	74	50.68	36.19	14.19	51.74	165	335	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
2.4GHz WIFI 802.11g (LF)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for frequencies like 30.97, 99.84, 259.89, 589.69, 810.85, 975.75, 49.4, 87.23, 270.56, 566.41, 778.84, 950.53. A Remark section at the bottom states: '1. No other spurious found. 2. All results are PASS against limit line.'



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

## Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz

### 802.11b






802.11g

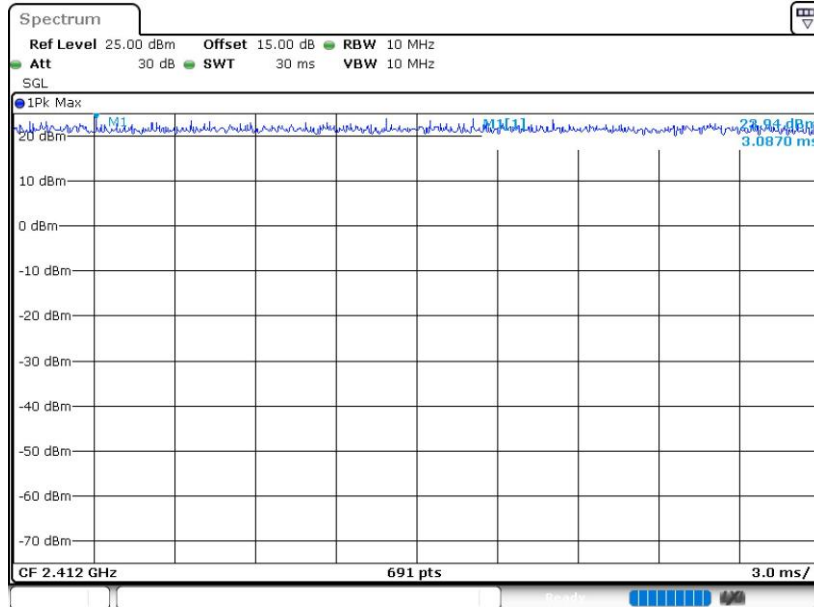

802.11n HT20

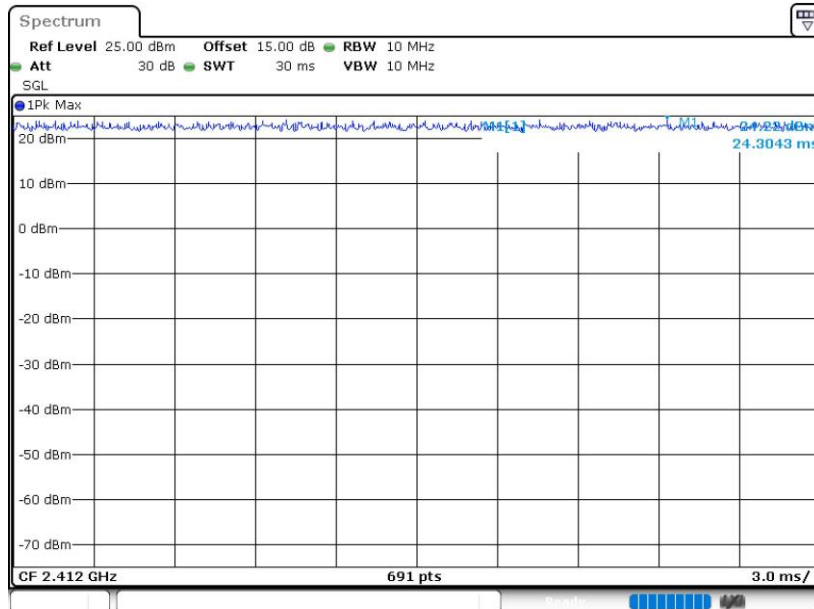



802.11n HT40

