



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2171-1
FCC ID : IHDT56ZX3
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Sep. 04, 2021 ~ Oct. 26, 2021

We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant5

 1.2 Manufacturer5

 1.3 Product Feature of Equipment Under Test.....5

 1.4 Product Specification of Equipment Under Test.....6

 1.5 Modification of EUT6

 1.6 Testing Location7

 1.7 Test Software.....7

 1.8 Applicable Standards.....8

 1.9 Specification of Accessory.....9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST10

 2.1 Carrier Frequency and Channel10

 2.2 Test Mode.....11

 2.3 Connection Diagram of Test System.....12

 2.4 Support Unit used in test configuration and system12

 2.5 EUT Operation Test Setup13

 2.6 Measurement Results Explanation Example.....13

3 TEST RESULT.....14

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement14

 3.2 Maximum Conducted Output Power Measurement17

 3.3 Power Spectral Density Measurement18

 3.4 Unwanted Emissions Measurement20

 3.5 AC Conducted Emission Measurement.....25

 3.6 Antenna Requirements27

4 LIST OF MEASURING EQUIPMENT28

5 UNCERTAINTY OF EVALUATION29

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 7.16 dB at 46.490 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.17 dB at 7.690 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2171-1
FCC ID	IHDT56ZX3
EUT supports Radios application	GSM/WCDMA/LTE/5G NR/ NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 Bluetooth BR/EDR/LE FM and GNSS,
IMEI Code	Conducted: 351368590021339/351368590021347 Conduction:351368590018715/351368590018723 Radiation: 351368590018871/351368590018889
HW Version	DVT2
SW Version	RRYA31.Q3-23
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 17.34 dBm / 0.0542 W 802.11n HT20 : 17.22 dBm / 0.0527 W 802.11n HT40 : 16.33 dBm / 0.0430 W 802.11ac VHT20: 16.62 dBm / 0.0459 W 802.11ac VHT40: 16.26 dBm / 0.0423 W 802.11ac VHT80: 14.80 dBm / 0.0302 W
99% Occupied Bandwidth	802.11a : 17.78 MHz 802.11ac VHT20 : 18.88 MHz 802.11ac VHT40 : 36.66 MHz 802.11ac VHT80 : 75.76 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PIFA Antenna with gain -5.30 dBi

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name MC-101
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name MC-102
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name MC-103
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name MC-105
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name MC-101
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name MC-102
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name MC-103
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name MC-105
AC Adapter 3(US)	Brand Name	Motorola(Aohai)	Model Name MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Aohai)	Model Name MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Aohai)	Model Name MC-103
AC Adapter 3(AU)	Brand Name	Motorola (Aohai)	Model Name MC-105
AC Adapter 4(US)	Brand Name	Motorola (Chenyang)	Model Name MC-201
AC Adapter 4(AR)	Brand Name	Motorola (Chenyang)	Model Name MC-206
AC Adapter 5(US)	Brand Name	Motorola (Acbel)	Model Name MC-201
AC Adapter 5(AR)	Brand Name	Motorola (Acbel)	Model Name MC-206
AC Adapter 5(CHILE)	Brand Name	Motorola (Acbel)	Model Name MC-209
AC Adapter 6(IN)	Brand Name	Motorola (Chenyang)	Model Name MC-204
AC Adapter 7(IN)	Brand Name	Motorola (Aohai)	Model Name MC-204
AC Adapter 8(BR Local build)	Brand Name	Motorola (Salcomp)	Model Name MC-207
AC Adapter 9(BR Local build)	Brand Name	Motorola (Flex)	Model Name MC-207
AC Adapter 10(US)	Brand Name	Motorola(Chenyang)	Model Name MC-201
Battery	Brand Name	Motorola (ATL)	Model Name JK50
Earphone 1	Brand Name	Motorola (Juwei)	Model Name MH202(JWEP1182-T03H)
Earphone 2	Brand Name	Motorola (New Leader)	Model Name MH202(NLD-EM313A-11SF)
Earphone 3	Brand Name	Motorola (Juwei)	Model Name MH191(JWEP1209-T03H)
Earphone 4	Brand Name	Motorola (New Leader)	Model Name MH191(NLD-EM313A-21SF)
USB Cable 1	Brand Name	Motorola (Chuangyitong)	Model Name 88806-024
USB Cable 2	Brand Name	Motorola (SUNTOPS)	Model Name 336258
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name SC18C28955



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN(5G)Link + USB Cable 1(Charging from Adapter 8) + Battery+Earphone1
Remark:	
1. For Radiated Test Cases, The tests were performance with Adapter 1, Battery, Earphone 1, USB Cable 1	

Ch. #	U-NII-3 : 5725-5850 MHz			
	802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-

2.3 Connection Diagram of Test System

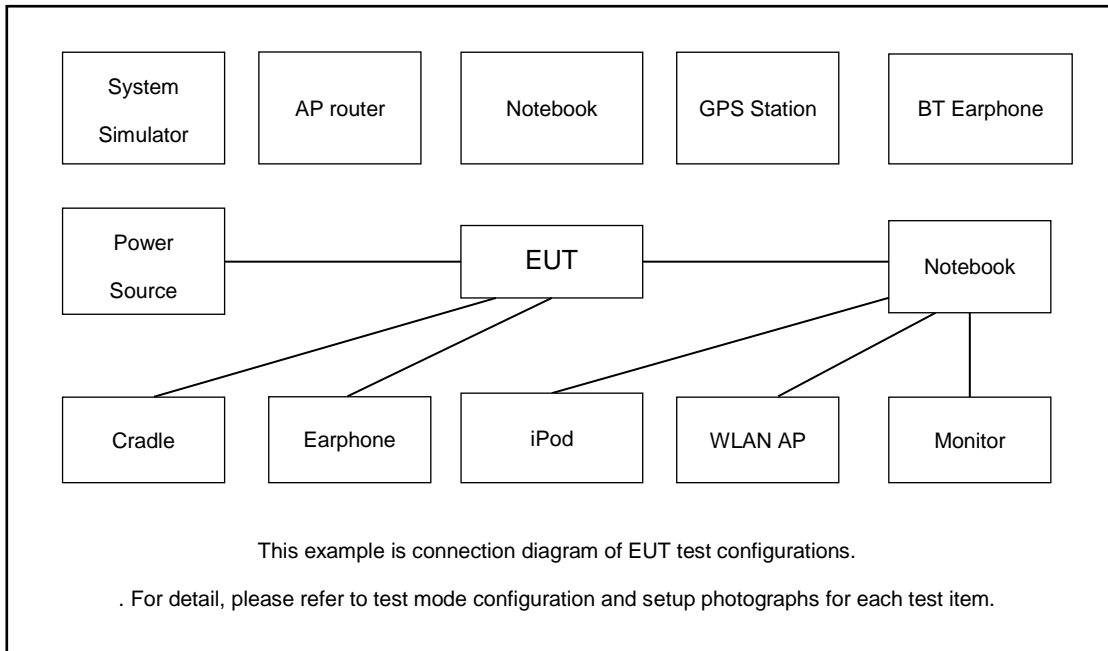

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	NOTE BOOK	Lenovo	E540	FCC DoC	NOTE BOOK	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.0 + 20 = 25.0(\text{dB}) \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

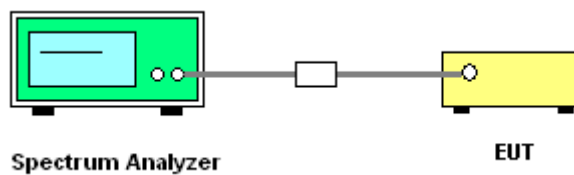




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

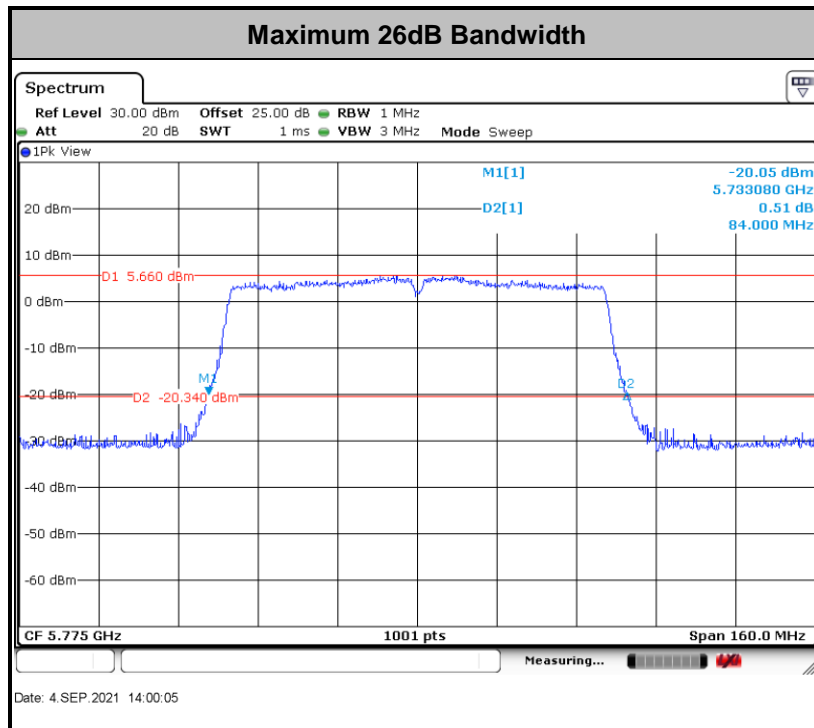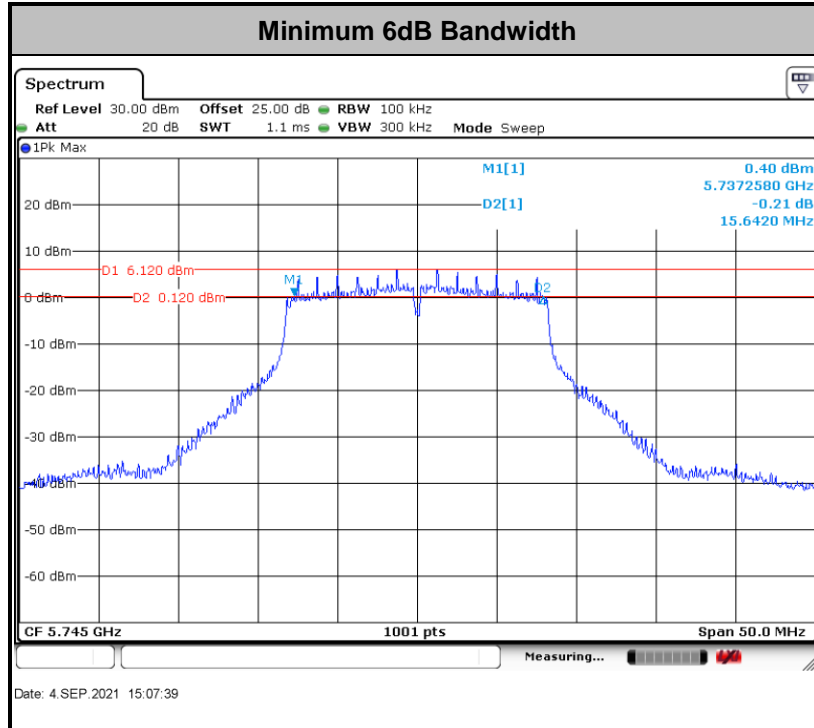

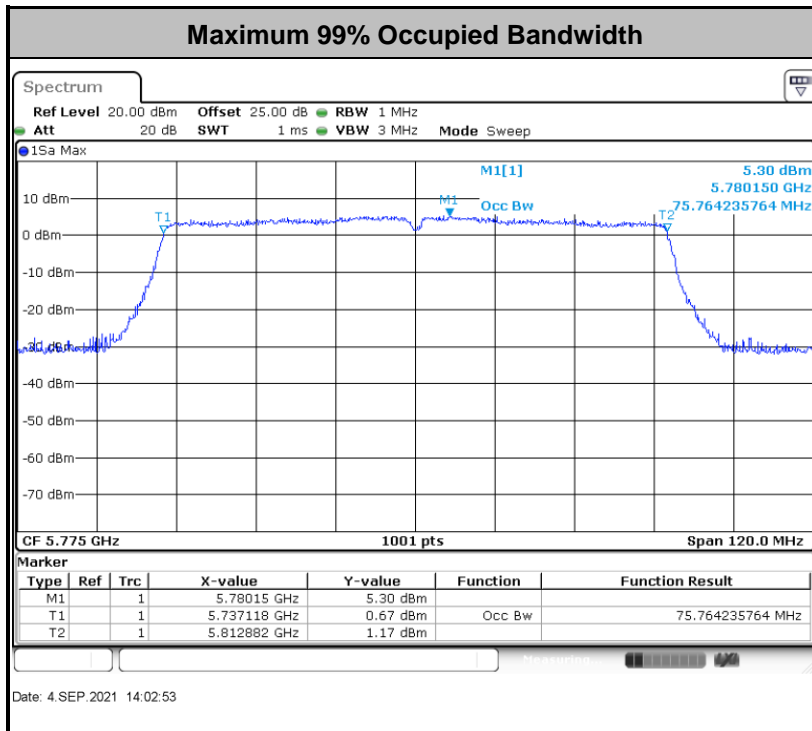

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

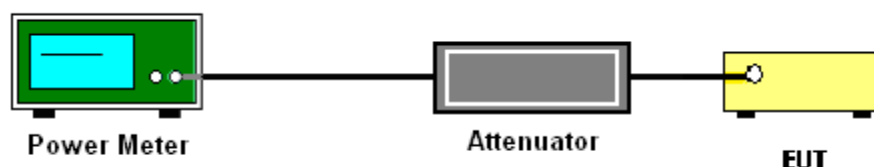

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

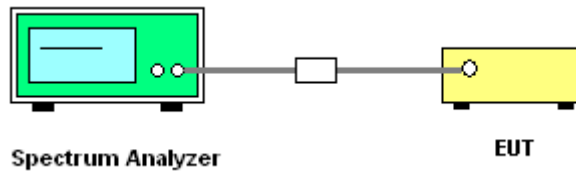

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

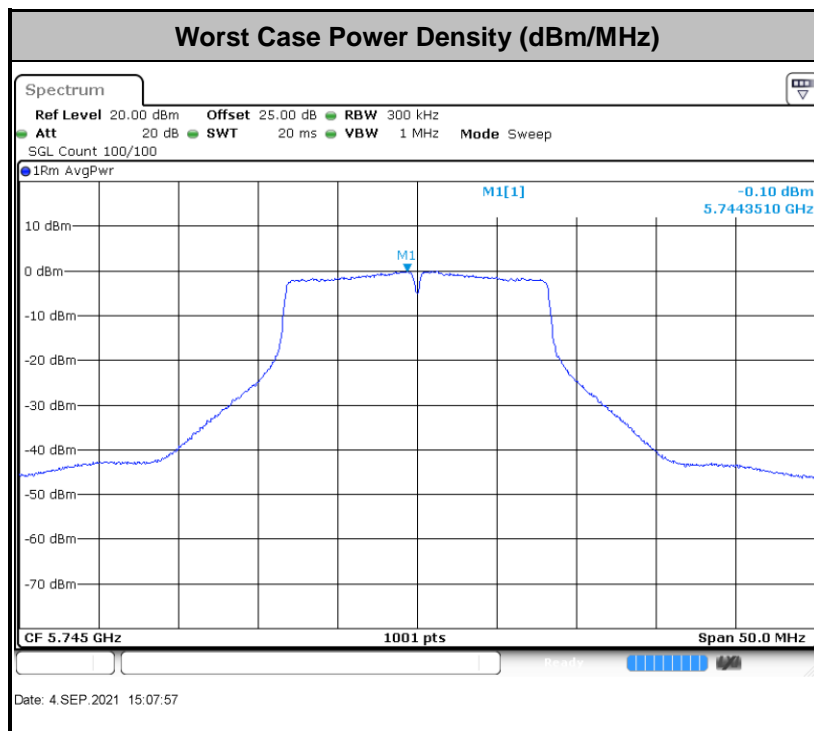

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

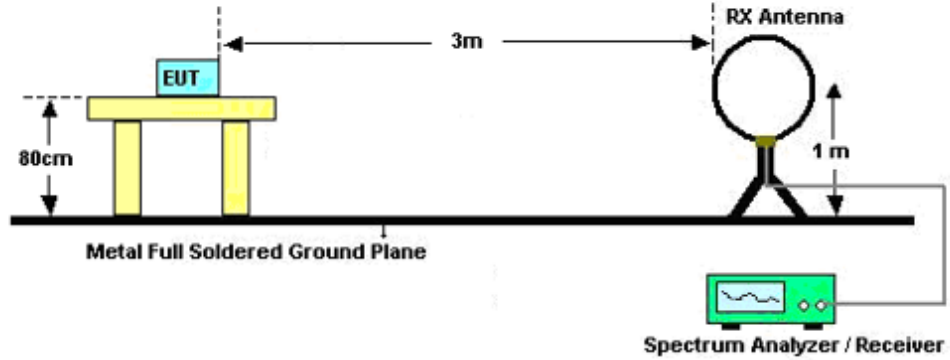

For radiated emissions from 30MHz to 1GHz

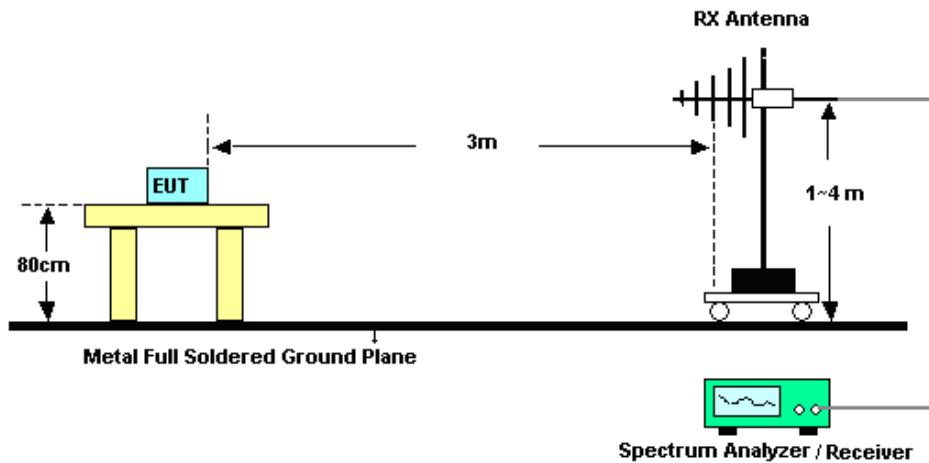

For radiated emissions above 1GHz

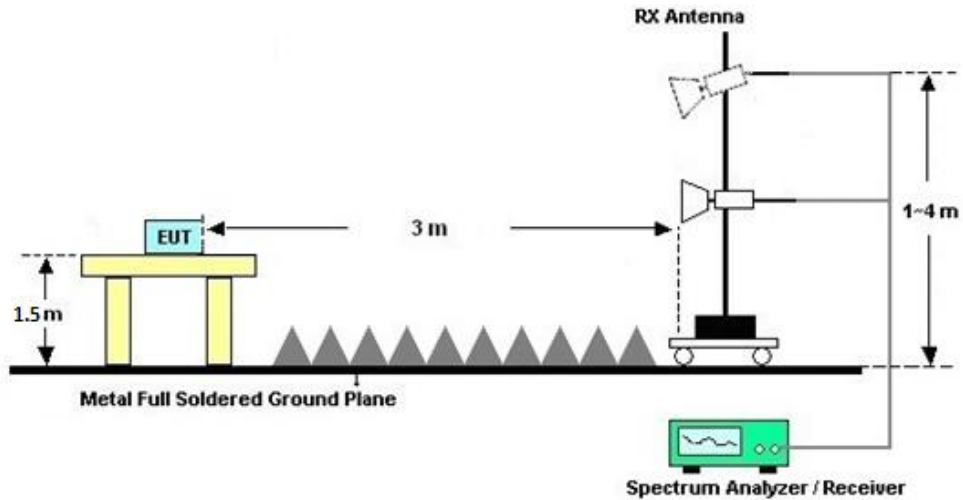

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

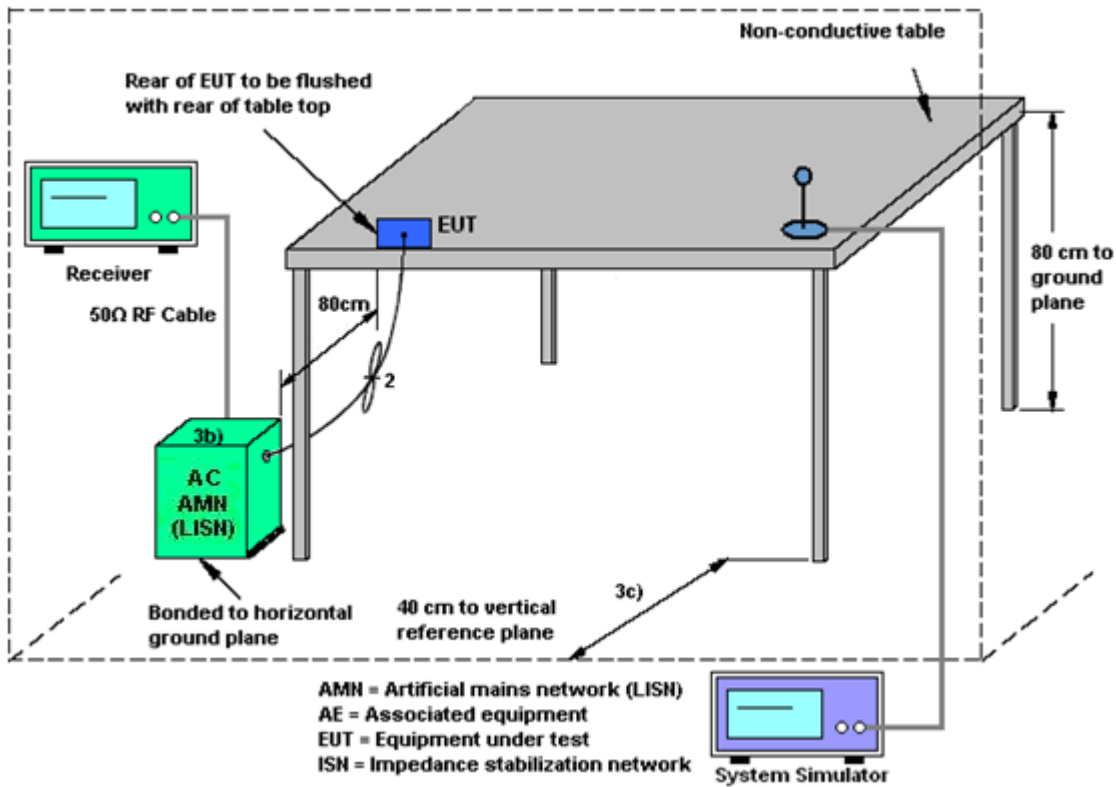

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 07, 2021	Sep. 11, 2021	Mar. 06, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Sep. 11, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Sep. 11, 2021	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2021	Sep. 11, 2021	Jul. 20, 2022	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Sep. 04, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Sep. 04, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Sep. 04, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 03, 2020	Sep. 26, 2021	Dec. 02, 2021	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2021	Sep. 26, 2021	Jul. 20, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Sep. 26, 2021	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2021	Sep. 26, 2021	Jul. 14, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Sep. 26, 2021	Jul. 24, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 11, 2021	Sep. 26, 2021	Apr. 10 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000MHz	Apr. 07, 2021	Sep. 26, 2021	Apr. 06, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct.16, 2020	Sep. 26, 2021	Oct. 15, 2021	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 16, 2020	Sep. 26, 2021	Oct.15, 2021	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21. 2021	Sep. 26, 2021	Jul. 20. 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Sep. 26, 2021	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 26, 2021	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 26, 2021	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2021/9/4	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.78	24.15	15.64	0.5	Pass
11a	6Mbps	1	157	5785	17.78	24.55	16.04	0.5	Pass
11a	6Mbps	1	165	5825	17.68	24.45	15.78	0.5	Pass
HT20	MCS 0	1	149	5745	18.88	26.40	16.74	0.5	Pass
HT20	MCS 0	1	157	5785	18.88	26.20	16.24	0.5	Pass
HT20	MCS 0	1	165	5825	18.78	25.80	16.64	0.5	Pass
HT40	MCS 0	1	151	5755	36.56	42.57	35.78	0.5	Pass
HT40	MCS 0	1	159	5795	36.66	42.21	36.07	0.5	Pass
VHT80	MCS 0	1	155	5775	75.76	84.00	75.12	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.09	17.34	30.00	-5.30	Pass
11a	6Mbps	1	157	5785	0.09	17.02	30.00	-5.30	Pass
11a	6Mbps	1	165	5825	0.09	16.84	30.00	-5.30	Pass
HT20	MCS 0	1	149	5745	0.10	17.22	30.00	-5.30	Pass
HT20	MCS 0	1	157	5785	0.10	16.92	30.00	-5.30	Pass
HT20	MCS 0	1	165	5825	0.10	16.73	30.00	-5.30	Pass
HT40	MCS 0	1	151	5755	0.16	16.33	30.00	-5.30	Pass
HT40	MCS 0	1	159	5795	0.16	16.10	30.00	-5.30	Pass
VHT20	MCS 0	1	149	5745	0.29	16.62	30.00	-5.30	Pass
VHT20	MCS 0	1	157	5785	0.29	16.12	30.00	-5.30	Pass
VHT20	MCS 0	1	165	5825	0.29	16.01	30.00	-5.30	Pass
VHT40	MCS 0	1	151	5755	0.61	16.26	30.00	-5.30	Pass
VHT40	MCS 0	1	159	5795	0.61	16.01	30.00	-5.30	Pass
VHT80	MCS 0	1	155	5775	0.19	14.80	30.00	-5.30	Pass


TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.09	2.22	2.21	30.00	-5.30	Pass
11a	6Mbps	1	157	5785	0.09	2.22	1.82	30.00	-5.30	Pass
11a	6Mbps	1	165	5825	0.09	2.22	1.67	30.00	-5.30	Pass
HT20	MCS 0	1	149	5745	0.29	2.22	2.19	30.00	-5.30	Pass
HT20	MCS 0	1	157	5785	0.29	2.22	1.46	30.00	-5.30	Pass
HT20	MCS 0	1	165	5825	0.29	2.22	1.51	30.00	-5.30	Pass
HT40	MCS 0	1	151	5755	0.61	2.22	-1.52	30.00	-5.30	Pass
HT40	MCS 0	1	159	5795	0.61	2.22	-2.18	30.00	-5.30	Pass
VHT80	MCS 0	1	155	5775	0.19	2.22	-5.93	30.00	-5.30	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Yu Qiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

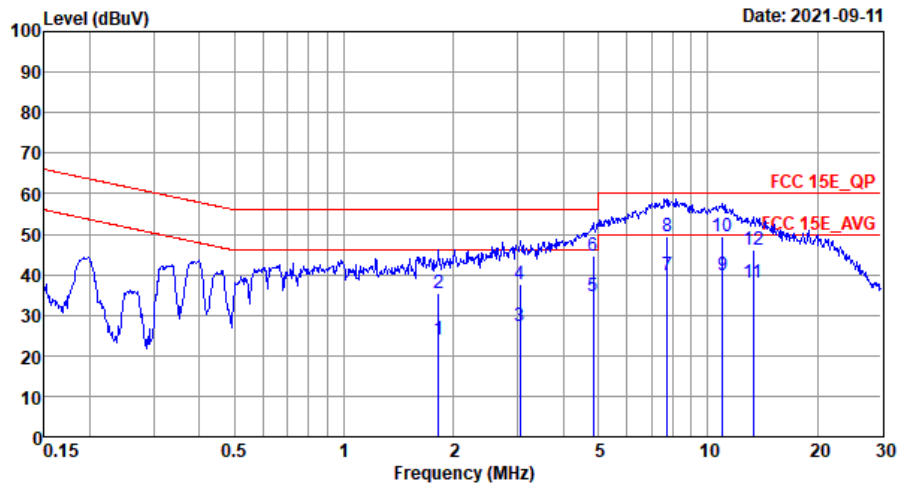


Site : CO01-SZ
 Condition: FCC 15E QP LISN 20201030 L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.82	24.07	-21.93	46.00	13.90	0.09	10.08	Average
2	1.82	35.27	-20.73	56.00	25.10	0.09	10.08	QP
3	3.04	27.25	-18.75	46.00	16.99	0.07	10.19	Average
4	3.04	37.75	-18.25	56.00	27.49	0.07	10.19	QP
5	4.85	34.61	-11.39	46.00	24.31	0.01	10.29	Average
6	4.85	44.51	-11.49	56.00	34.21	0.01	10.29	QP
7	7.73	39.73	-10.27	50.00	29.40	0.15	10.18	Average
8	7.73	49.63	-10.37	60.00	39.30	0.15	10.18	QP
9 *	10.96	40.01	-9.99	50.00	29.50	0.36	10.15	Average
10	10.96	49.31	-10.69	60.00	38.80	0.36	10.15	QP
11	13.34	37.98	-12.02	50.00	27.31	0.43	10.24	Average
12	13.34	46.28	-13.72	60.00	35.61	0.43	10.24	QP



Test Engineer :	Yu Qiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

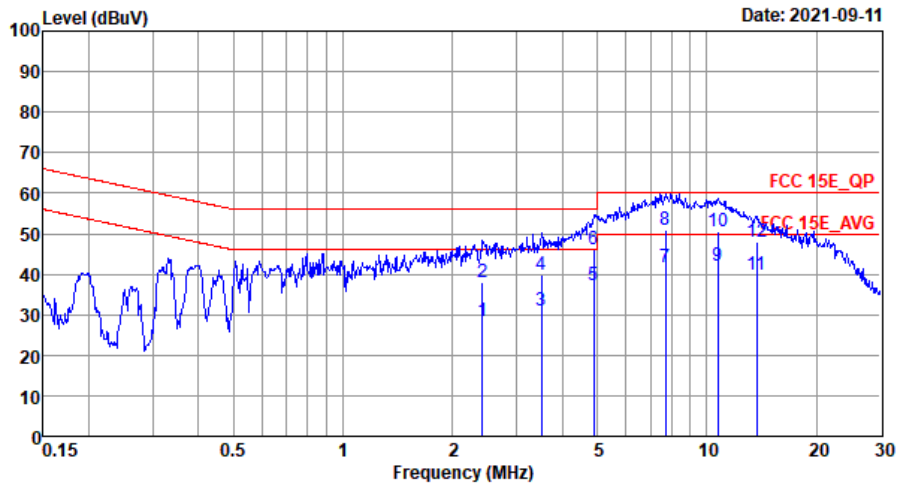

Site : CO01-SZ
 Condition: FCC 15E_QP LISN_20201030_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.42	28.31	-17.69	46.00	18.10	0.08	10.13	Average
2	2.42	37.91	-18.09	56.00	27.70	0.08	10.13	QP
3	3.51	30.87	-15.13	46.00	20.60	0.05	10.22	Average
4	3.51	39.97	-16.03	56.00	29.70	0.05	10.22	QP
5	4.90	37.21	-8.79	46.00	26.90	0.01	10.30	Average
6	4.90	46.31	-9.69	56.00	36.00	0.01	10.30	QP
7	7.69	41.83	-8.17	50.00	31.51	0.14	10.18	Average
8	7.69	50.83	-9.17	60.00	40.51	0.14	10.18	QP
9 *	10.73	41.99	-8.01	50.00	31.50	0.35	10.14	Average
10	10.73	50.49	-9.51	60.00	40.00	0.35	10.14	QP
11	13.70	40.00	-10.00	50.00	29.30	0.44	10.26	Average
12	13.70	48.10	-11.90	60.00	37.40	0.44	10.26	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5624.6	50.21	-18.09	68.3	38.95	31.59	12.27	32.6	100	111	P	H
		5696.6	50.18	-52.52	102.7	38.71	31.78	12.29	32.6	100	111	P	H
		5718.8	57.45	-53.01	110.46	45.85	31.91	12.29	32.6	100	111	P	H
		5725	61.14	-61.06	122.2	49.53	31.91	12.3	32.6	100	111	P	H
		5745	103.62	-	-	91.95	31.97	12.3	32.6	100	111	P	H
		5745	94.97	-	-	83.3	31.97	12.3	32.6	100	111	A	H
		5637.4	49.79	-18.51	68.3	38.51	31.6	12.28	32.6	102	75	P	V
		5690.6	50.31	-47.98	98.29	38.84	31.78	12.29	32.6	102	75	P	V
		5720	58.6	-52.2	110.8	47	31.91	12.29	32.6	102	75	P	V
		5723.4	60.18	-58.37	118.55	48.58	31.91	12.29	32.6	102	75	P	V
		5745	98.23	-	-	86.56	31.97	12.3	32.6	102	75	P	V
		5745	92.16	-	-	80.49	31.97	12.3	32.6	102	75	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5633.8	49.7	-18.6	68.3	38.42	31.6	12.28	32.6	102	110	P	H
		5680.6	50.13	-40.79	90.92	38.72	31.72	12.29	32.6	102	110	P	H
		5716.2	49.87	-59.87	109.74	38.33	31.85	12.29	32.6	102	110	P	H
		5721.4	49.37	-64.62	113.99	37.77	31.91	12.29	32.6	102	110	P	H
		5785	103.03	-	-	91.23	32.09	12.31	32.6	102	110	P	H
		5785	96.6	-	-	84.8	32.09	12.31	32.6	102	110	A	H
		5852.4	50.16	-66.57	116.73	38.1	32.34	12.32	32.6	102	110	P	H
		5857.6	50.62	-59.45	110.07	38.5	32.4	12.32	32.6	102	110	P	H
		5885.6	50.23	-47.12	97.35	38.07	32.43	12.33	32.6	102	110	P	H
		5943.8	50.69	-17.61	68.3	38.39	32.56	12.34	32.6	102	110	P	H
		5641.4	48.85	-19.45	68.3	37.57	31.6	12.28	32.6	176	41	P	V
		5678.4	49.63	-39.67	89.3	38.22	31.72	12.29	32.6	176	41	P	V
		5701.8	49.23	-56.47	105.7	37.69	31.85	12.29	32.6	176	41	P	V
		5720.2	48.66	-62.6	111.26	37.06	31.91	12.29	32.6	176	41	P	V
		5785	99.37	-	-	87.57	32.09	12.31	32.6	176	41	P	V
		5785	91.6	-	-	79.8	32.09	12.31	32.6	176	41	A	V
		5852.4	49.39	-67.34	116.73	37.33	32.34	12.32	32.6	176	41	P	V
		5855.8	49.44	-61.14	110.58	37.32	32.4	12.32	32.6	176	41	P	V
		5894	51.01	-40.13	91.14	38.81	32.47	12.33	32.6	176	41	P	V
		5928.2	51.01	-17.29	68.3	38.74	32.53	12.34	32.6	176	41	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz		5825	103.21	-	-	91.21	32.28	12.32	32.6	100	111	P	H	
		5825	95.76	-	-	83.76	32.28	12.32	32.6	100	111	A	H	
		5852	54.14	-63.5	117.64	42.08	32.34	12.32	32.6	100	111	P	H	
		5856.6	53.2	-57.15	110.35	41.08	32.4	12.32	32.6	100	111	P	H	
		5901.2	50.86	-34.97	85.83	38.66	32.47	12.33	32.6	100	111	P	H	
		5947.2	50.38	-17.92	68.3	38.08	32.56	12.34	32.6	100	111	P	H	
		5825	96.92	-	-	84.92	32.28	12.32	32.6	100	41	41	P	V
		5825	90.68	-	-	78.68	32.28	12.32	32.6	100	41	41	A	V
		5851.6	50.89	-67.66	118.55	38.83	32.34	12.32	32.6	100	41	41	P	V
		5863.8	51.04	-57.29	108.33	38.92	32.4	12.32	32.6	100	41	41	P	V
		5916.6	50.94	-23.54	74.48	38.71	32.5	12.33	32.6	100	41	41	P	V
		5943.2	49.37	-18.93	68.3	37.07	32.56	12.34	32.6	100	41	41	P	V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	50.14	-23.86	74	46.43	38.19	16.53	51.01	-	-	P	H
		17235	51.59	-16.71	68.3	44.68	41.86	18.46	53.41	-	-	P	H
		11490	51.03	-22.97	74	47.32	38.19	16.53	51.01	-	-	P	V
		17235	50.04	-18.26	68.3	43.13	41.86	18.46	53.41	-	-	P	V
802.11a CH 157 5785MHz		11570	49.9	-24.1	74	46.08	38.26	16.55	50.99	-	-	P	H
		17355	49.61	-18.69	68.3	42.69	41.74	18.5	53.32	-	-	P	H
		11570	49.9	-24.1	74	46.08	38.26	16.55	50.99	-	-	P	V
		17355	49.72	-18.58	68.3	42.8	41.74	18.5	53.32	-	-	P	V
802.11a CH 165 5825MHz		11650	49.31	-24.69	74	45.39	38.32	16.57	50.97	-	-	P	H
		17475	51.84	-16.46	68.3	44.89	41.63	18.55	53.23	-	-	P	H
		11650	50.7	-23.3	74	46.78	38.32	16.57	50.97	-	-	P	V
		17475	52.33	-15.97	68.3	45.38	41.63	18.55	53.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5626.2 to 5745 MHz.



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5633	49	-19.3	68.3	37.72	31.6	12.28	32.6	100	94	P	H
		5657	50.17	-23.32	73.49	38.83	31.66	12.28	32.6	100	94	P	H
		5717.2	49.21	-60.81	110.02	37.67	31.85	12.29	32.6	100	94	P	H
		5723.2	48.76	-69.34	118.1	37.16	31.91	12.29	32.6	100	94	P	H
		5785	101.21	-	-	89.41	32.09	12.31	32.6	100	94	P	H
		5785	95.09	-	-	83.29	32.09	12.31	32.6	100	94	A	H
		5852	49.64	-68	117.64	37.58	32.34	12.32	32.6	100	94	P	H
		5856.4	49.35	-61.06	110.41	37.23	32.4	12.32	32.6	100	94	P	H
		5913.4	50.1	-26.73	76.83	37.87	32.5	12.33	32.6	100	94	P	H
		5941.6	50.11	-18.19	68.3	37.81	32.56	12.34	32.6	100	94	P	H
		5624.6	49.82	-18.48	68.3	38.56	31.59	12.27	32.6	100	263	P	V
		5691.4	49.64	-49.24	98.88	38.17	31.78	12.29	32.6	100	263	P	V
		5718.2	49.65	-60.65	110.3	38.05	31.91	12.29	32.6	100	263	P	V
		5724.6	48.4	-72.89	121.29	36.8	31.91	12.29	32.6	100	263	P	V
		5785	99	-	-	87.2	32.09	12.31	32.6	100	263	P	V
		5785	92.98	-	-	81.18	32.09	12.31	32.6	100	263	A	V
		5854.8	50.1	-61.16	111.26	37.98	32.4	12.32	32.6	100	263	P	V
		5864.2	50.62	-57.6	108.22	38.5	32.4	12.32	32.6	100	263	P	V
	5894.6	50.63	-40.07	90.7	38.43	32.47	12.33	32.6	100	263	P	V	
	5943.8	50.52	-17.78	68.3	38.22	32.56	12.34	32.6	100	263	P	V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5825	102.34	-	-	90.34	32.28	12.32	32.6	100	280	P	H
		5825	96.3	-	-	84.3	32.28	12.32	32.6	100	280	A	H
		5850.2	54.97	-66.77	121.74	42.91	32.34	12.32	32.6	100	280	P	H
		5858.2	53.38	-56.52	109.9	41.26	32.4	12.32	32.6	100	280	P	H
		5878.4	51.04	-51.64	102.68	38.88	32.43	12.33	32.6	100	280	P	H
		5943.2	49.72	-18.58	68.3	37.42	32.56	12.34	32.6	100	280	P	H
		5825	99.42	-	-	87.42	32.28	12.32	32.6	135	221	P	V
		5825	93.37	-	-	81.37	32.28	12.32	32.6	135	221	A	V
		5853.8	51.17	-62.37	113.54	39.05	32.4	12.32	32.6	135	221	P	V
		5862	50.41	-58.43	108.84	38.29	32.4	12.32	32.6	135	221	P	V
		5899	50.92	-36.53	87.45	38.72	32.47	12.33	32.6	135	221	P	V
	5928	50.34	-17.96	68.3	38.07	32.53	12.34	32.6	135	221	P	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11490	51.14	-22.86	74	47.43	38.19	16.53	51.01	-	-	P	H
		17235	51.59	-16.71	68.3	44.68	41.86	18.46	53.41	-	-	P	H
CH 149 5745MHz		11490	50.03	-23.97	74	46.32	38.19	16.53	51.01	-	-	P	V
		17235	51.04	-17.26	68.3	44.13	41.86	18.46	53.41	-	-	P	V
802.11n HT20 CH 157 5785MHz		11570	51.9	-22.1	74	48.08	38.26	16.55	50.99	-	-	P	H
		17355	50.61	-17.69	68.3	43.69	41.74	18.5	53.32	-	-	P	H
		11570	51.9	-22.1	74	48.08	38.26	16.55	50.99	-	-	P	V
		17355	49.72	-18.58	68.3	42.8	41.74	18.5	53.32	-	-	P	V
802.11n HT20 CH 165 5825MHz		11650	51.31	-22.69	74	47.39	38.32	16.57	50.97	-	-	P	H
		17475	51.84	-16.46	68.3	44.89	41.63	18.55	53.23	-	-	P	H
		11650	51.7	-22.3	74	47.78	38.32	16.57	50.97	-	-	P	V
		17475	50.33	-17.97	68.3	43.38	41.63	18.55	53.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5637.8	50.25	-18.05	68.3	38.97	31.6	12.28	32.6	100	278	P	H
		5693.2	57.12	-43.08	100.2	45.65	31.78	12.29	32.6	100	278	P	H
		5715.2	61.1	-48.36	109.46	49.56	31.85	12.29	32.6	100	278	P	H
		5723	60.76	-56.88	117.64	49.16	31.91	12.29	32.6	100	278	P	H
		5755	99.76	-	-	88.03	32.03	12.3	32.6	100	278	P	H
		5755	93.32	-	-	81.59	32.03	12.3	32.6	100	278	A	H
		5852	49.46	-68.18	117.64	37.4	32.34	12.32	32.6	100	278	P	H
		5873.6	49.88	-55.71	105.59	37.73	32.43	12.32	32.6	100	278	P	H
		5881.4	52.2	-48.26	100.46	40.04	32.43	12.33	32.6	100	278	P	H
		5942.4	50.18	-18.12	68.3	37.88	32.56	12.34	32.6	100	278	P	H
		5624.6	50.38	-17.92	68.3	39.12	31.59	12.27	32.6	100	263	P	V
		5698.8	58.91	-45.41	104.32	47.44	31.78	12.29	32.6	100	263	P	V
		5716.4	60.58	-49.21	109.79	49.04	31.85	12.29	32.6	100	263	P	V
		5722.6	58.95	-57.78	116.73	47.35	31.91	12.29	32.6	100	263	P	V
		5755	99.42	-	-	87.69	32.03	12.3	32.6	100	263	P	V
		5755	93.27	-	-	81.54	32.03	12.3	32.6	100	263	A	V
		5852.4	49.71	-67.02	116.73	37.65	32.34	12.32	32.6	100	263	P	V
		5866.6	50.04	-57.51	107.55	37.92	32.4	12.32	32.6	100	263	P	V
	5888.8	51.38	-43.6	94.98	39.18	32.47	12.33	32.6	100	263	P	V	
	5925.8	50.4	-17.9	68.3	38.13	32.53	12.34	32.6	100	263	P	V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5606.2	49.23	-19.07	68.3	37.98	31.58	12.27	32.6	100	282	P	H
		5675	50.23	-36.56	86.79	38.83	31.72	12.28	32.6	100	282	P	H
		5715.6	52.29	-57.28	109.57	40.75	31.85	12.29	32.6	100	282	P	H
		5724.6	50.14	-71.15	121.29	38.54	31.91	12.29	32.6	100	282	P	H
		5795	100.07	-	-	88.21	32.15	12.31	32.6	100	282	P	H
		5795	94.01	-	-	82.15	32.15	12.31	32.6	100	282	A	H
		5850.8	50.69	-69.69	120.38	38.63	32.34	12.32	32.6	100	282	P	H
		5866	52.08	-55.64	107.72	39.96	32.4	12.32	32.6	100	282	P	H
		5900	51.19	-35.52	86.71	38.99	32.47	12.33	32.6	100	282	P	H
		5930	51.03	-17.27	68.3	38.76	32.53	12.34	32.6	100	282	P	H
		5647	49.58	-18.72	68.3	38.3	31.6	12.28	32.6	100	263	P	V
		5689.8	49.69	-48.01	97.7	38.22	31.78	12.29	32.6	100	263	P	V
		5715.2	50.22	-59.24	109.46	38.68	31.85	12.29	32.6	100	263	P	V
		5720.6	49.17	-63	112.17	37.57	31.91	12.29	32.6	100	263	P	V
		5795	96	-	-	84.14	32.15	12.31	32.6	100	263	P	V
		5795	89.98	-	-	78.12	32.15	12.31	32.6	100	263	A	V
		5853	50.47	-64.89	115.36	38.41	32.34	12.32	32.6	100	263	P	V
		5857.2	50.2	-59.98	110.18	38.08	32.4	12.32	32.6	100	263	P	V
	5898.4	51.29	-36.6	87.89	39.09	32.47	12.33	32.6	100	263	P	V	
	5934.6	51.26	-17.04	68.3	38.99	32.53	12.34	32.6	100	263	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	50.18	-23.82	74	46.44	38.21	16.53	51	-	-	P	H
		17265	51.56	-16.74	68.3	44.65	41.83	18.47	53.39	-	-	P	H
		11510	51.56	-22.44	74	47.82	38.21	16.53	51	-	-	P	V
		17265	49.07	-19.23	68.3	42.16	41.83	18.47	53.39	-	-	P	V
802.11n HT40 CH 159 5795MHz		11590	51.9	-22.1	74	48.05	38.27	16.56	50.98	-	-	P	H
		17385	50.74	-17.56	68.3	43.81	41.71	18.51	53.29	-	-	P	H
		11590	51.9	-22.1	74	48.05	38.27	16.56	50.98	-	-	P	V
		17385	51.49	-16.81	68.3	44.56	41.71	18.51	53.29	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5628 to 5944.8 MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	51.67	-22.33	74	47.87	38.25	16.54	50.99	-	-	P	H
VHT80		17325	50.81	-17.49	68.3	43.89	41.78	18.49	53.35	-	-	P	H
CH 155		11550	51.13	-22.87	74	47.33	38.25	16.54	50.99	-	-	P	V
5775MHz		17325	50.95	-17.35	68.3	44.03	41.78	18.49	53.35	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

Emission below 1GHz

5GHz WIFI 802.11 A (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11A LF		30.97	23.18	-16.82	40	30.34	24.7	0.54	32.4	-	-	P	H
		155.13	25.62	-17.88	43.5	39.64	16.9	1.27	32.19	-	-	P	H
		186.17	26.29	-17.21	43.5	42.22	14.8	1.39	32.12	-	-	P	H
		289.96	32.08	-13.92	46	42.93	19.1	1.77	31.72	-	-	P	H
		853.53	30.85	-15.15	46	29.93	29.27	3.06	31.41	-	-	P	H
		990.3	33.31	-20.69	54	30.64	30.5	3.29	31.12	-	-	P	H
		46.49	32.84	-7.16	40	48.27	16.3	0.67	32.4	-	-	P	H
		169.68	25.38	-18.12	43.5	40.51	15.7	1.33	32.16	-	-	P	V
		291.9	27.64	-18.36	46	38.44	19.14	1.78	31.72	-	-	P	V
		564.47	28.3	-17.7	46	30.15	26.5	2.49	30.84	-	-	P	V
		914.64	30.96	-15.04	46	29.88	29.4	3.18	31.5	-	-	P	V
	954.41	33.69	-12.31	46	30.87	31.05	3.24	31.47	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.97	2.03	0.49	1KHz
802.11n HT20	97.78	1.88	0.53	1KHz
802.11n HT40	96.40	0.93	1.07	3KHz
802.11ac VHT80	95.78	0.86	1.17	3KHz




802.11a

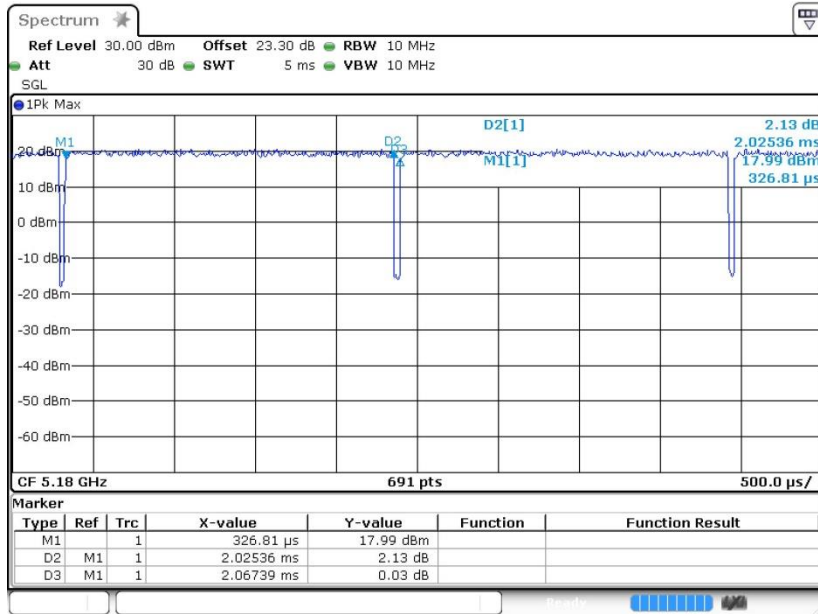

Date: 2.SEP.2021 09:27:28


802.11n HT20

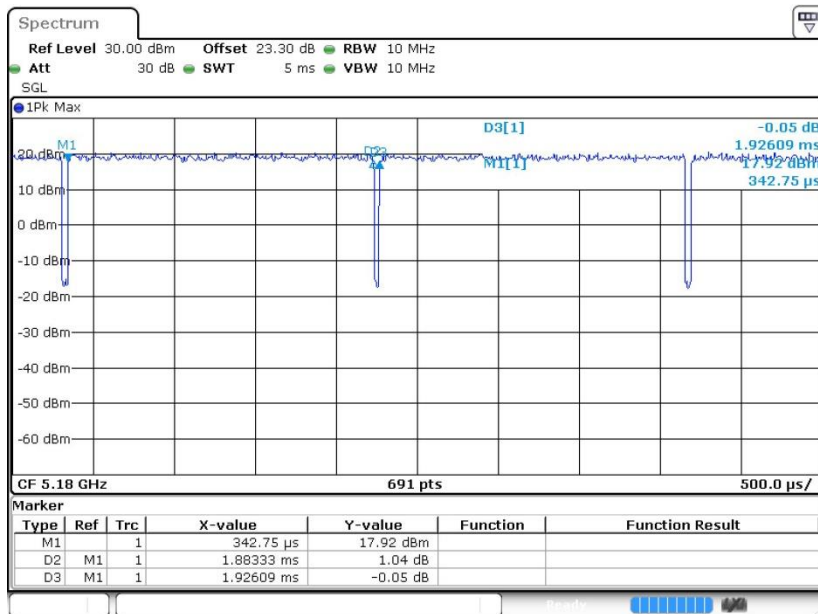

Date: 2.SEP.2021 09:24:35




802.11n HT40

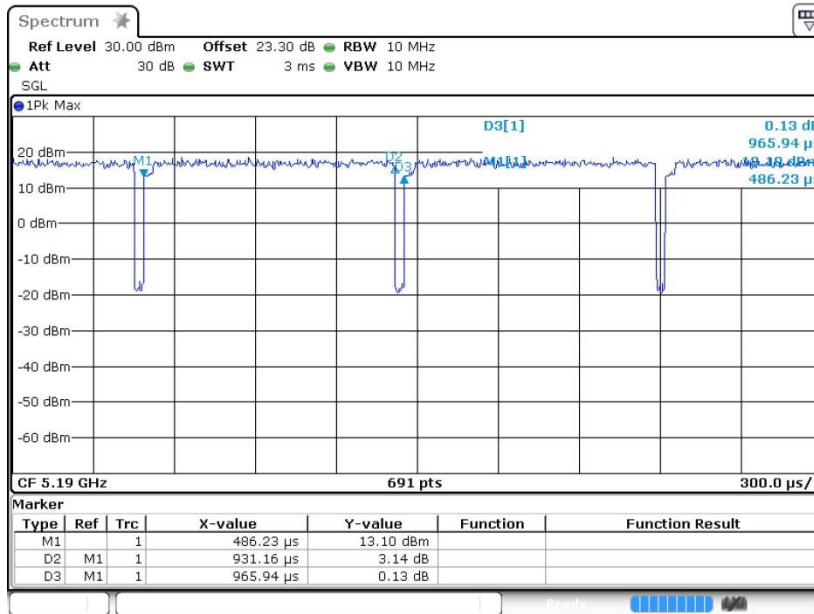

Date: 2.SEP.2021 09:26:01

802.11ac VHT80

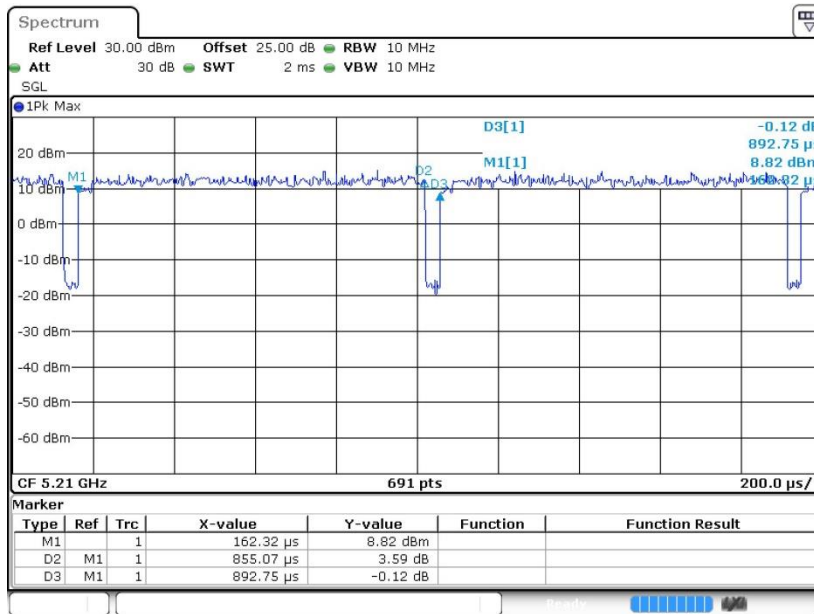

Date: 4.SEP.2021 10:22:20