



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2171-1  
**FCC ID** : IHDT56ZX3  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Sep. 03, 2021 ~ Sep. 21, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055  
 People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Test Software..... 6

    1.8 Applicable Standards..... 7

    1.9 Specification of Accessory..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 11

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 6dB Bandwidth Measurement ..... 13

    3.2 Output Power Measurement..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 18

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 31

    3.6 AC Conducted Emission Measurement..... 35

    3.7 Antenna Requirements ..... 37

**4 LIST OF MEASURING EQUIPMENT ..... 38**

**5 UNCERTAINTY OF EVALUATION ..... 39**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR180409C	Rev. 01	Initial issue of report	Oct. 08, 2021



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 30dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.12 dB at 2483.690 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.55 dB at 11.560MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Remark:** Not required means after assessing, test items are not necessary to carry out.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2171-1
FCC ID	IHDT56ZX3
IMEI Code	Conducted: 351368590021339/351368590021347 Conduction: 351368590018715/351368590018723 Radiation:N/A
HW Version	DVT2
SW Version	RRYA31.Q3-23
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 19.00 dBm (0.0794 W) 802.11g : 17.50 dBm (0.0562 W) 802.11n HT20 : 16.90 dBm (0.0490 W) 802.11n HT40 : 15.00 dBm (0.0316 W)
Antenna Type / Gain	PIFA Antenna type with gain -5.0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



## **1.8 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



### 1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
AC Adapter 3(US)	Brand Name	Motorola(Aohai)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Aohai)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Aohai)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 4(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 4(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-206
AC Adapter 5(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 5(AR)	Brand Name	Motorola (Acbel)	Model Name	MC-206
AC Adapter 5(CHILE)	Brand Name	Motorola (Acbel)	Model Name	MC-209
AC Adapter 6(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-204
AC Adapter 7(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-204
AC Adapter 8(BR Local build)	Brand Name	Motorola (Salcomp)	Model Name	MC-207
AC Adapter 9(BR Local build)	Brand Name	Motorola (Flex)	Model Name	MC-207
AC Adapter 10(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-201
Battery	Brand Name	Motorola (ATL)	Model Name	JK50
Earphone 1	Brand Name	Motorola (Juwei)	Model Name	MH202(JWEP1182-T03H)
Earphone 2	Brand Name	Motorola (New Leader)	Model Name	MH202(NLD-EM313A-11SF)
Earphone 3	Brand Name	Motorola (Juwei)	Model Name	MH191(JWEP1209-T03H)
Earphone 4	Brand Name	Motorola (New Leader)	Model Name	MH191(NLD-EM313A-21SF)
USB Cable 1	Brand Name	Motorola (Chuangyitong)	Model Name	88806-024
USB Cable 2	Brand Name	Motorola (SUNTOPS)	Model Name	336258
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



## 2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Co-location
802.11g HT20 CH 09 + LTE Band13 link

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable1 (Charging from Adapter8) + Earphone 1+Battery
<b>Remark:</b>	
1. For Radiated Test Cases, The tests were performance with Adapter 1, Battery, Earphone 1, USB Cable 1	

### 2.3 Connection Diagram of Test System

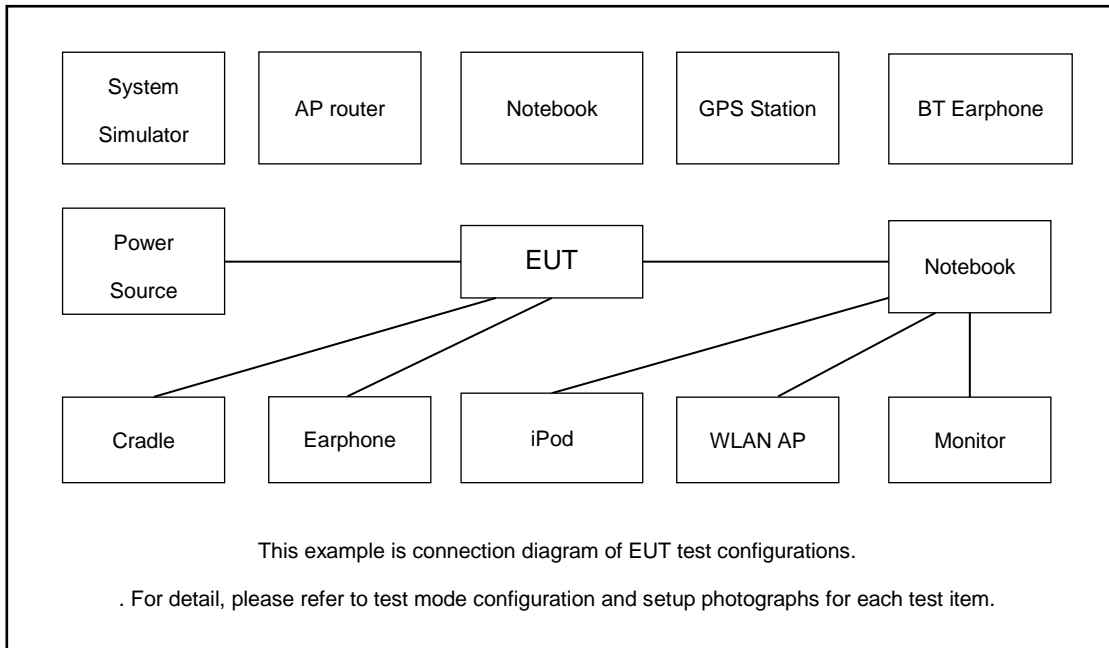

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Base Station	R&S	CBT32	N/A	N/A	Unshielded,1.8m
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	NOTE BOOK	Lenovo	E540	FCC DoC	NOTE BOOK	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A



## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 1.20 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.20 + 10 = 11.20 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

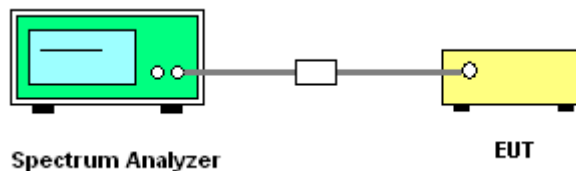

### 3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

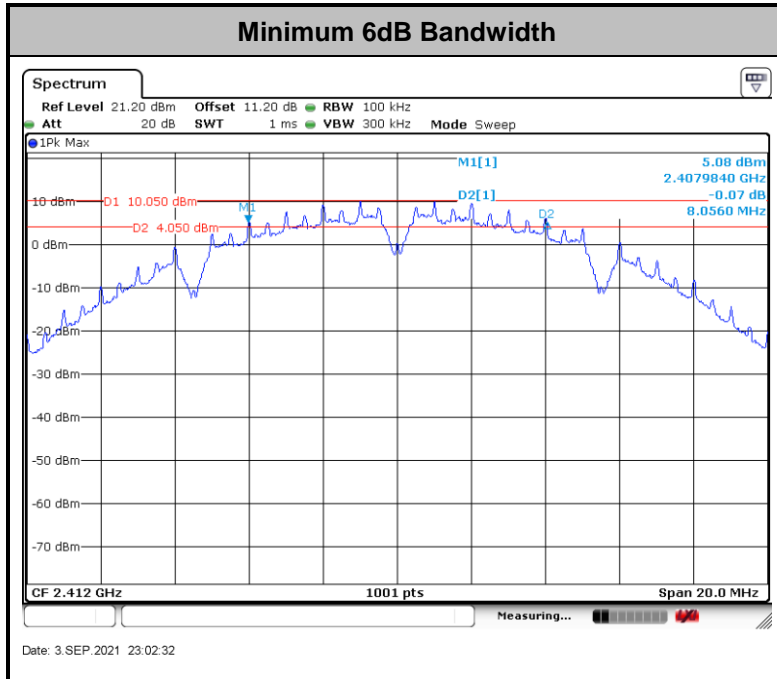

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

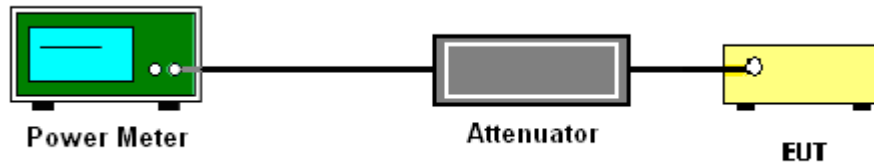

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### **3.3.2 Measuring Instruments**


The measuring equipment is listed in the section 4 of this test report.

#### **3.3.3 Test Procedures**

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.




### 3.3.4 Test Setup

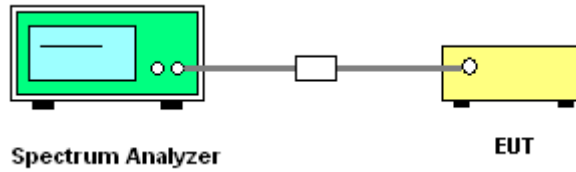

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

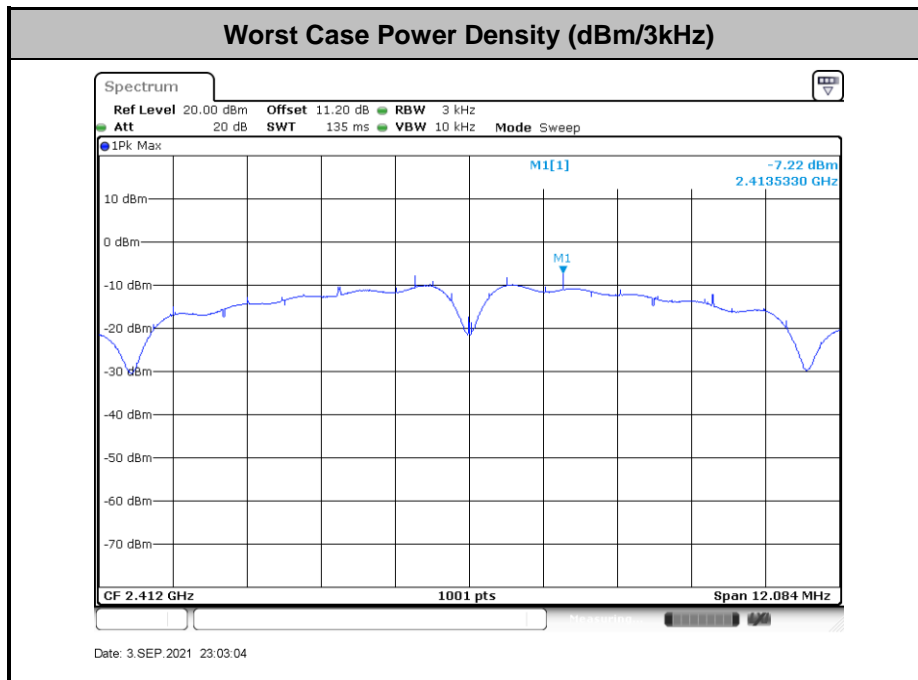

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

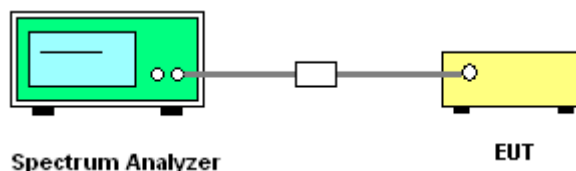




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Ma Jie	Temperature :	21~25°C
	Relative Humidity :	51~54%

Number of TX = 1, Ant. 1 (Measured)


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

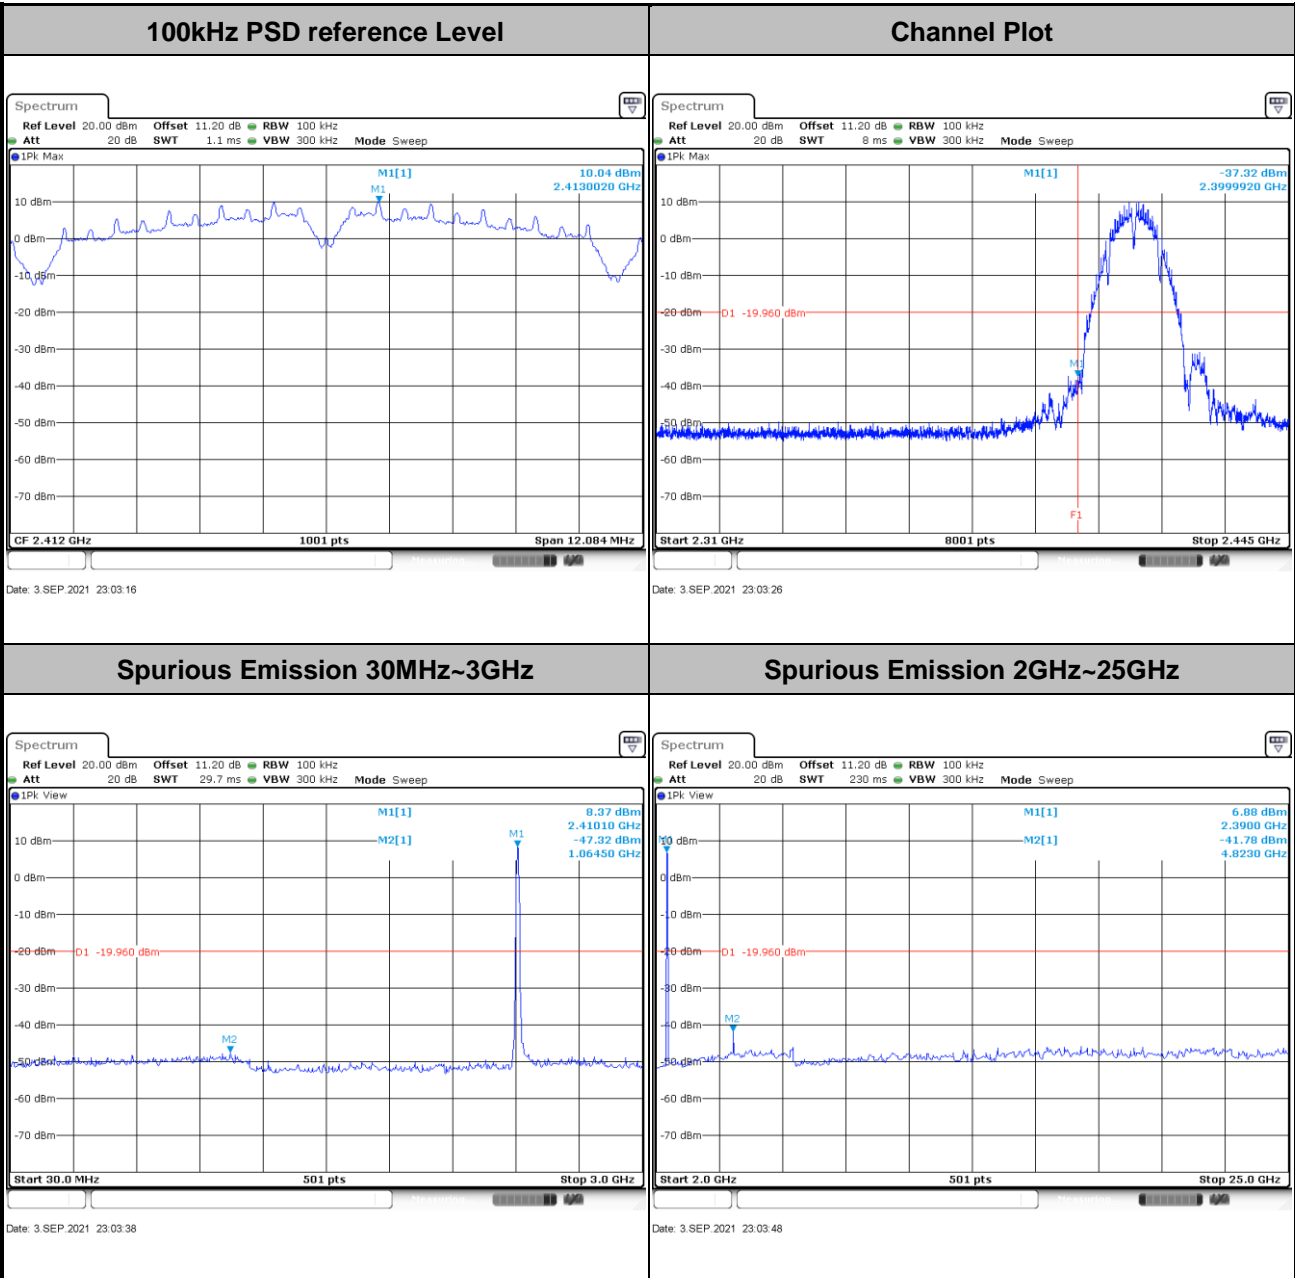





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

<b>100kHz PSD reference Level</b>	<b>Channel Plot</b>
-----------------------------------	---------------------

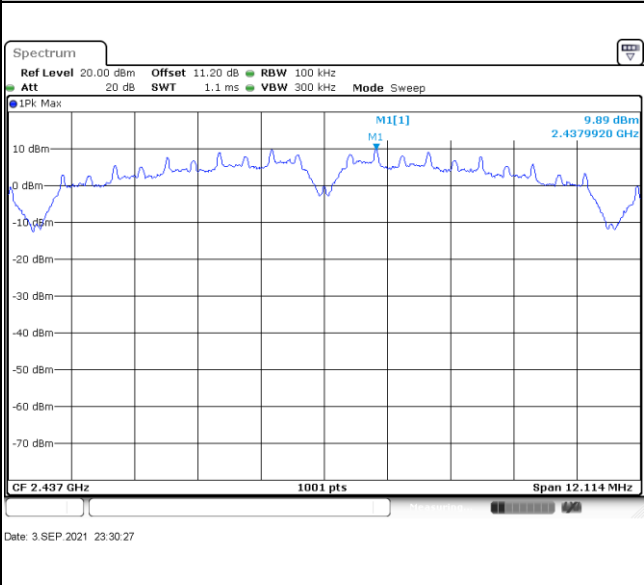



**Spurious Emission 30MHz~3GHz**

**Spurious Emission 2GHz~25GHz**

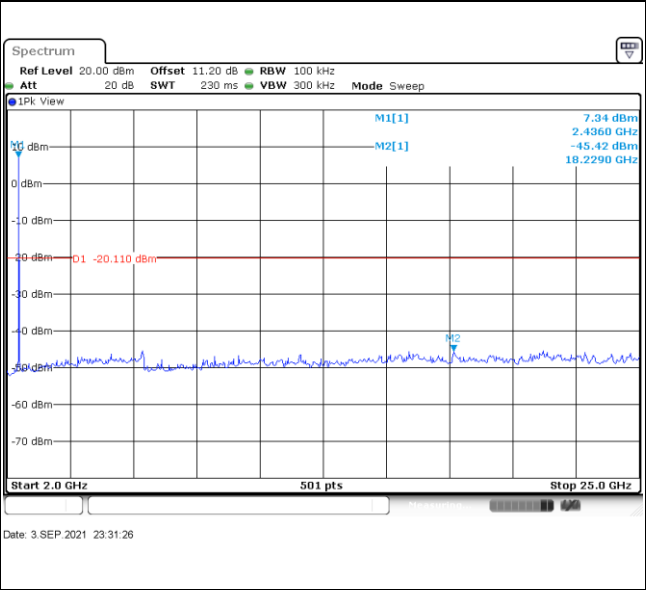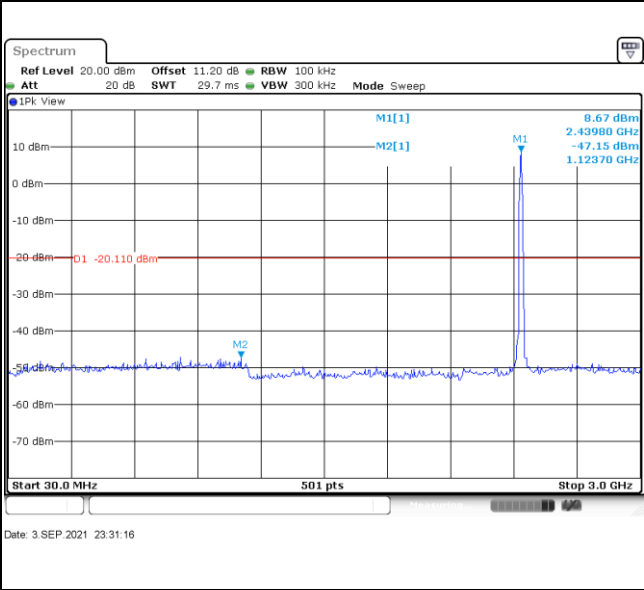





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

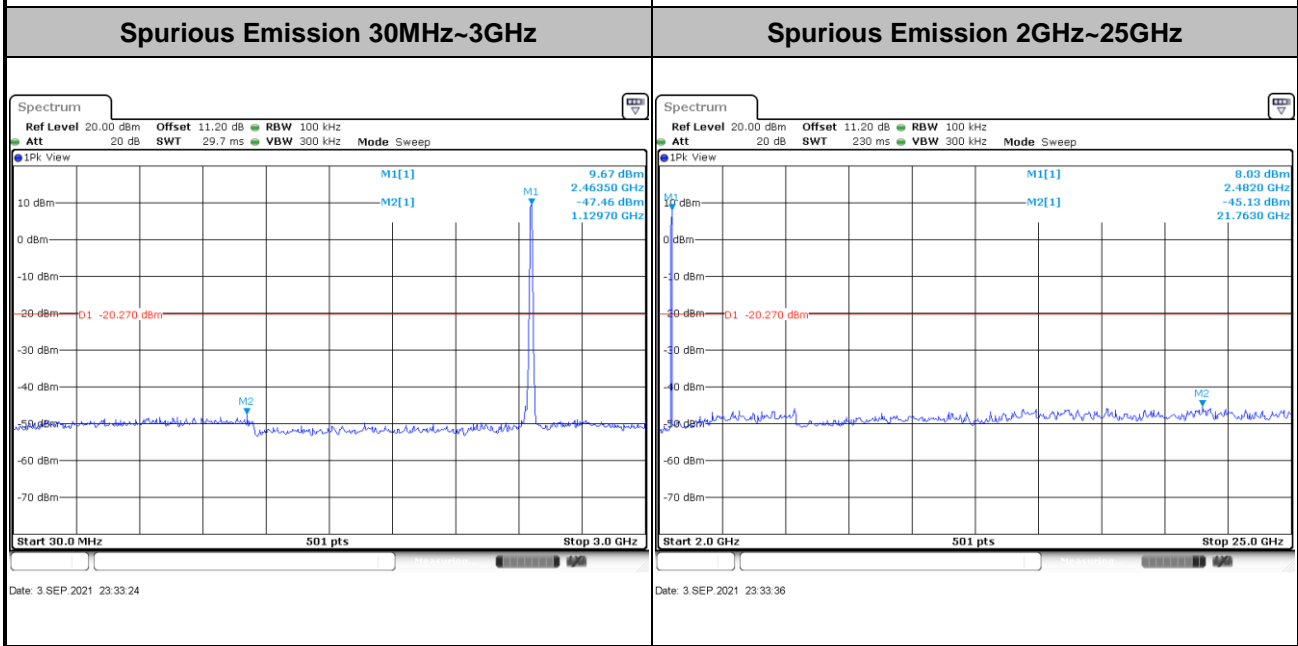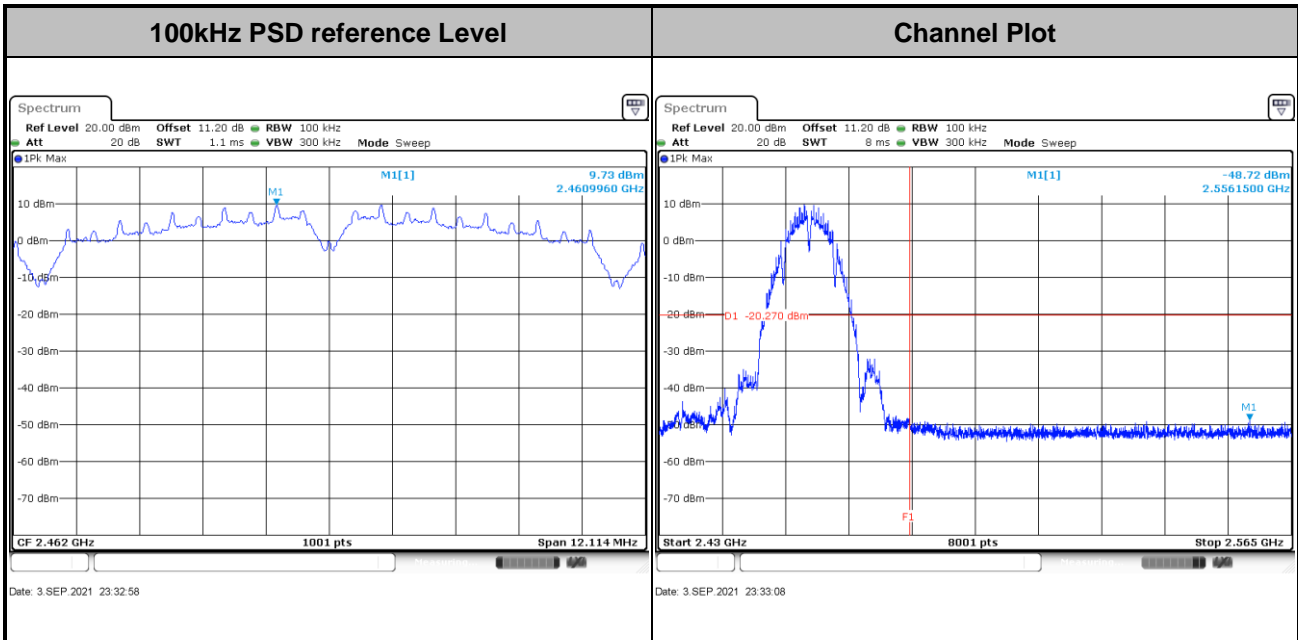





Test Mode : 802.11g Test Channel : 01

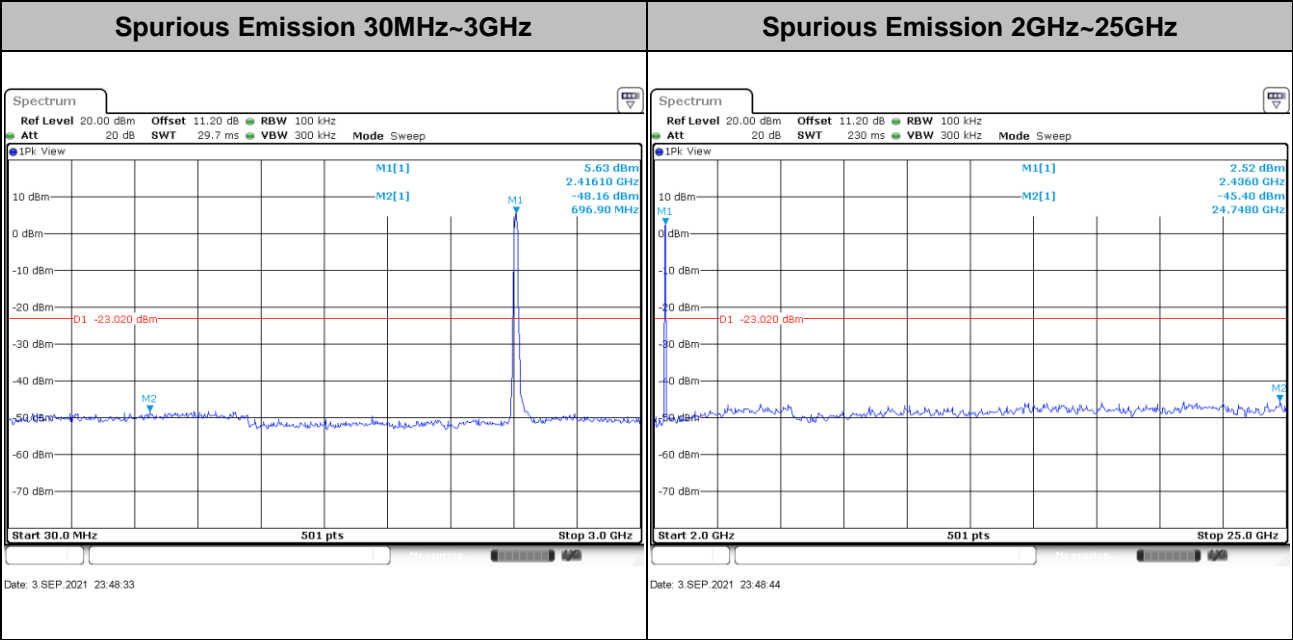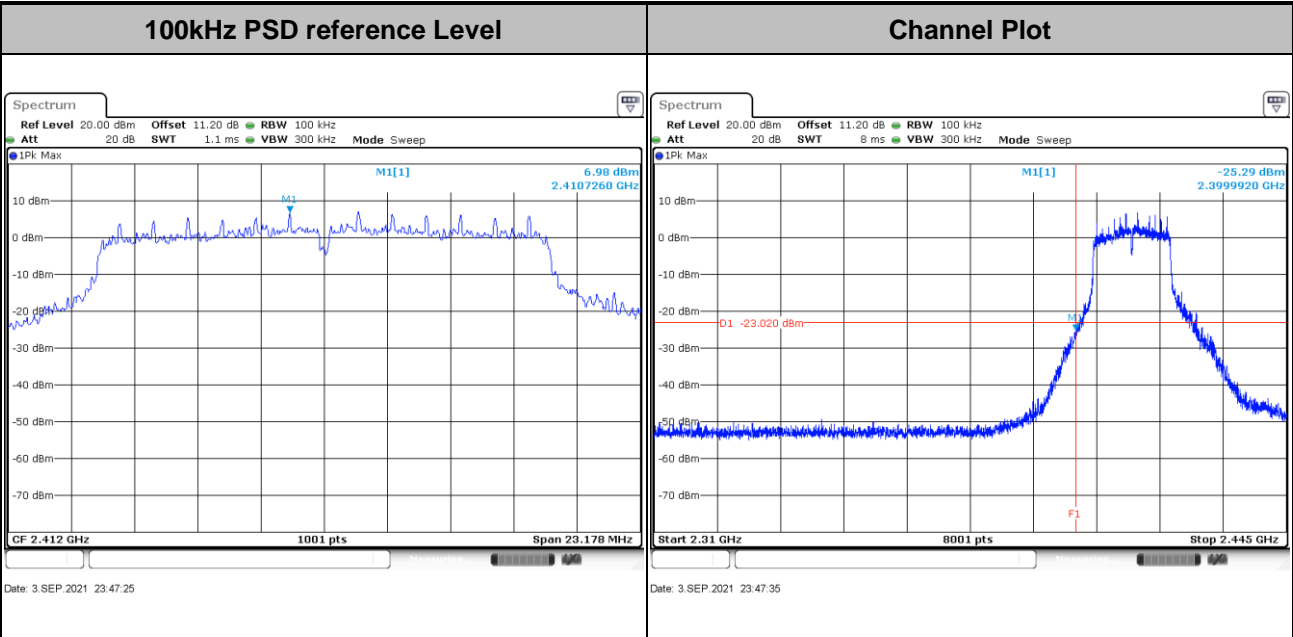





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

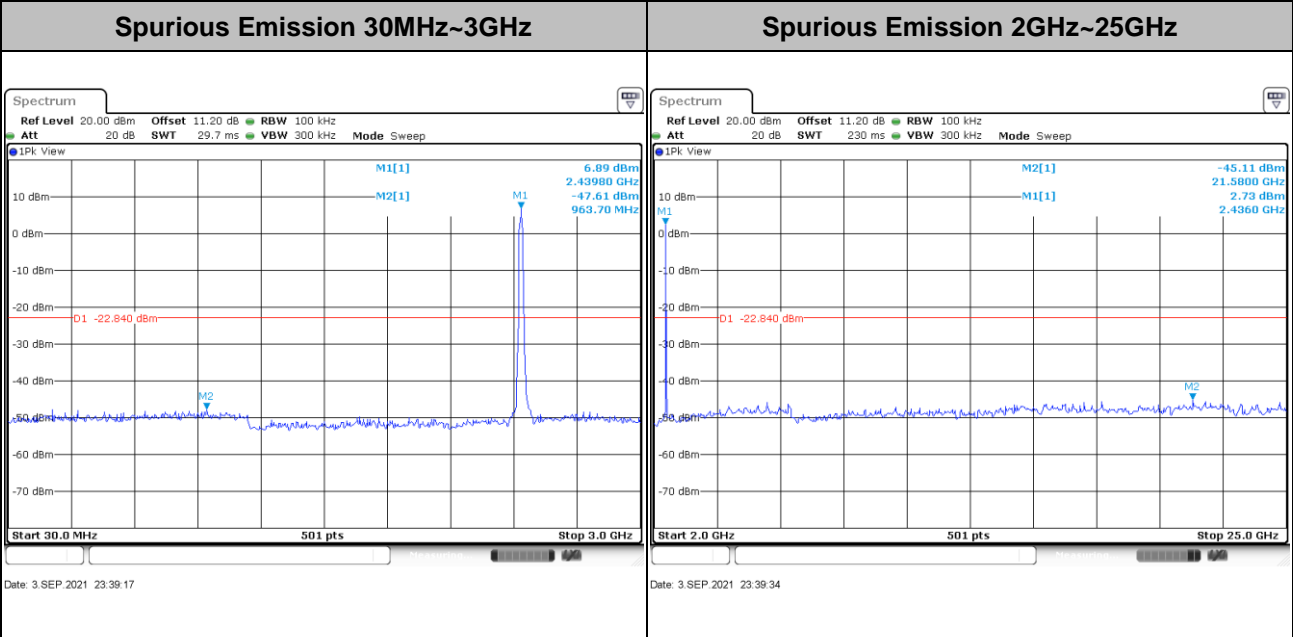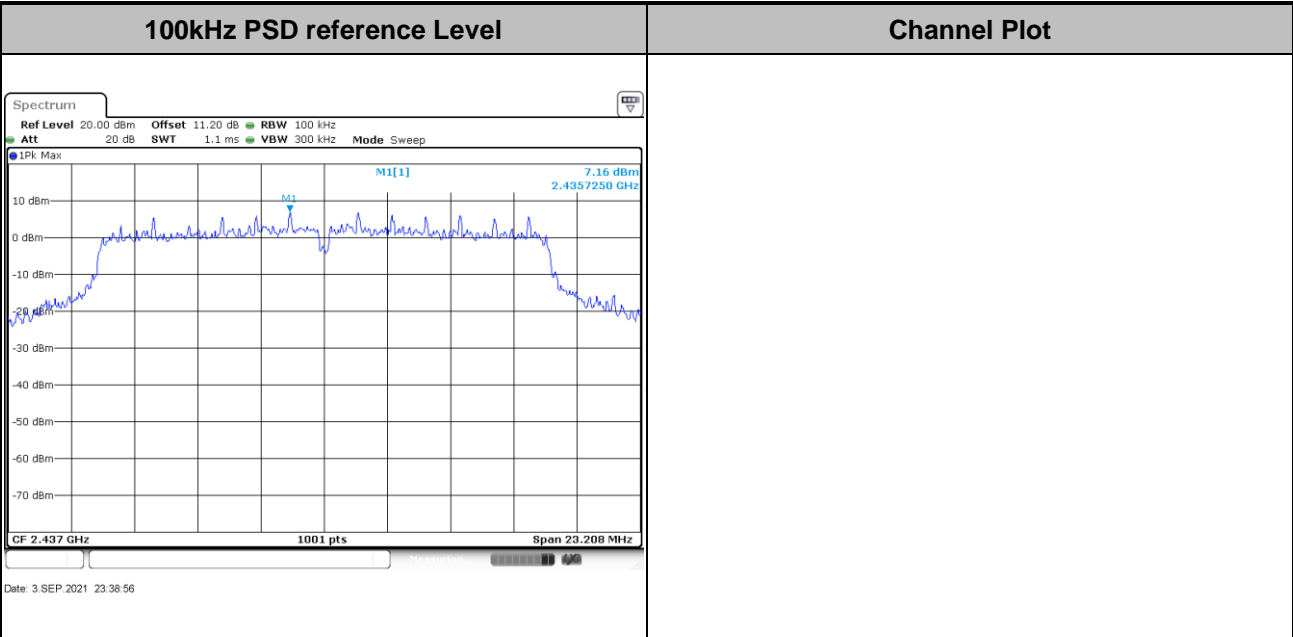





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

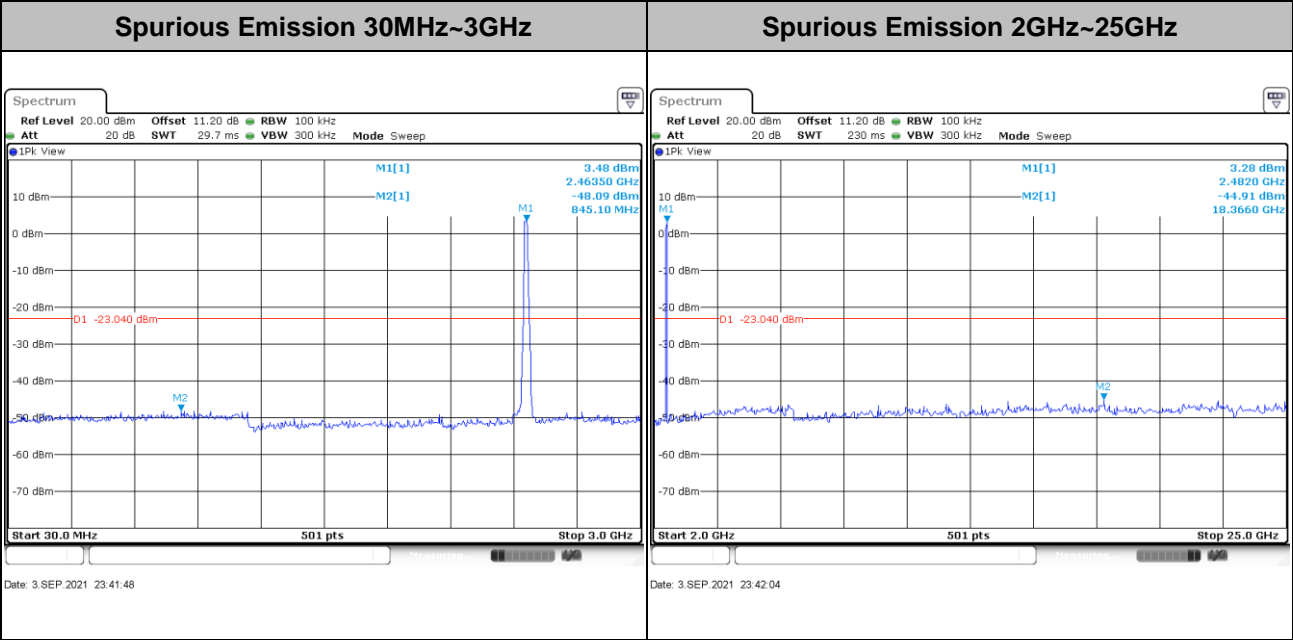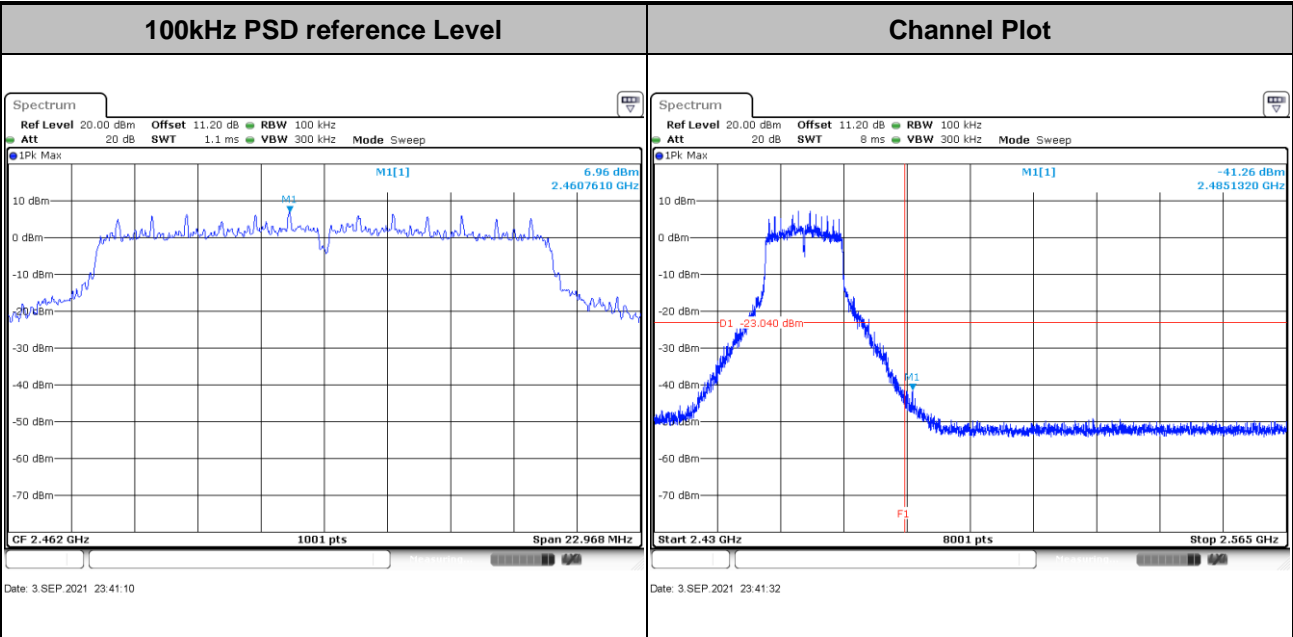







Test Mode : 802.11n HT20 Test Channel : 01

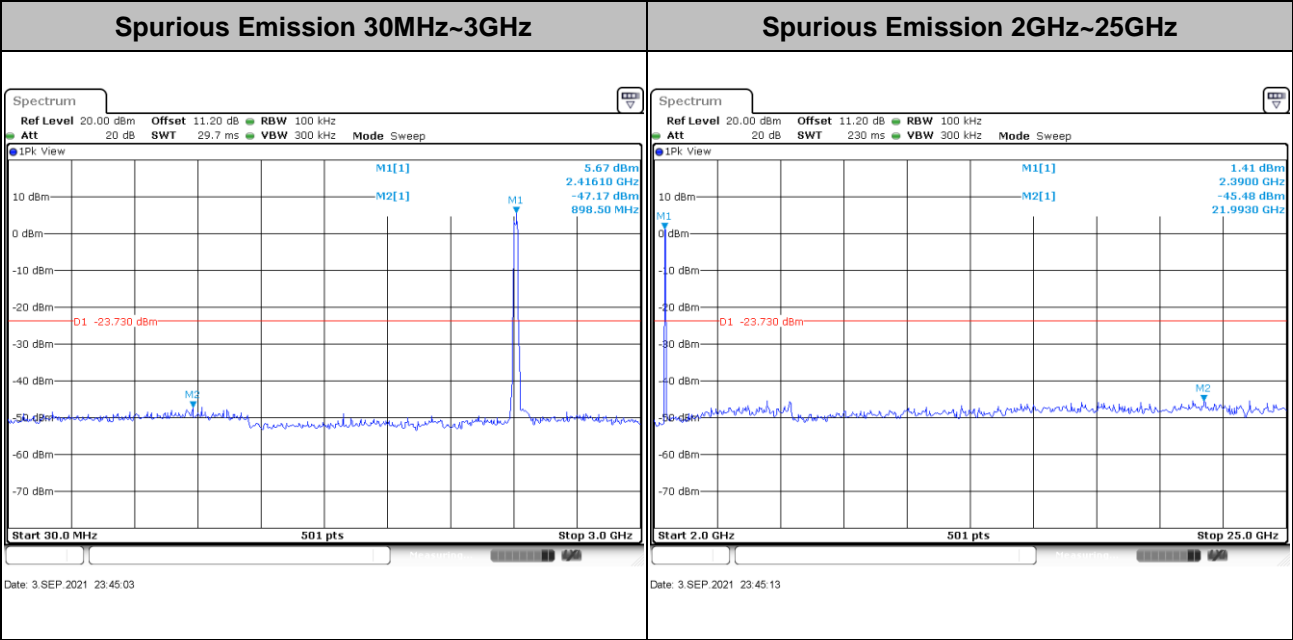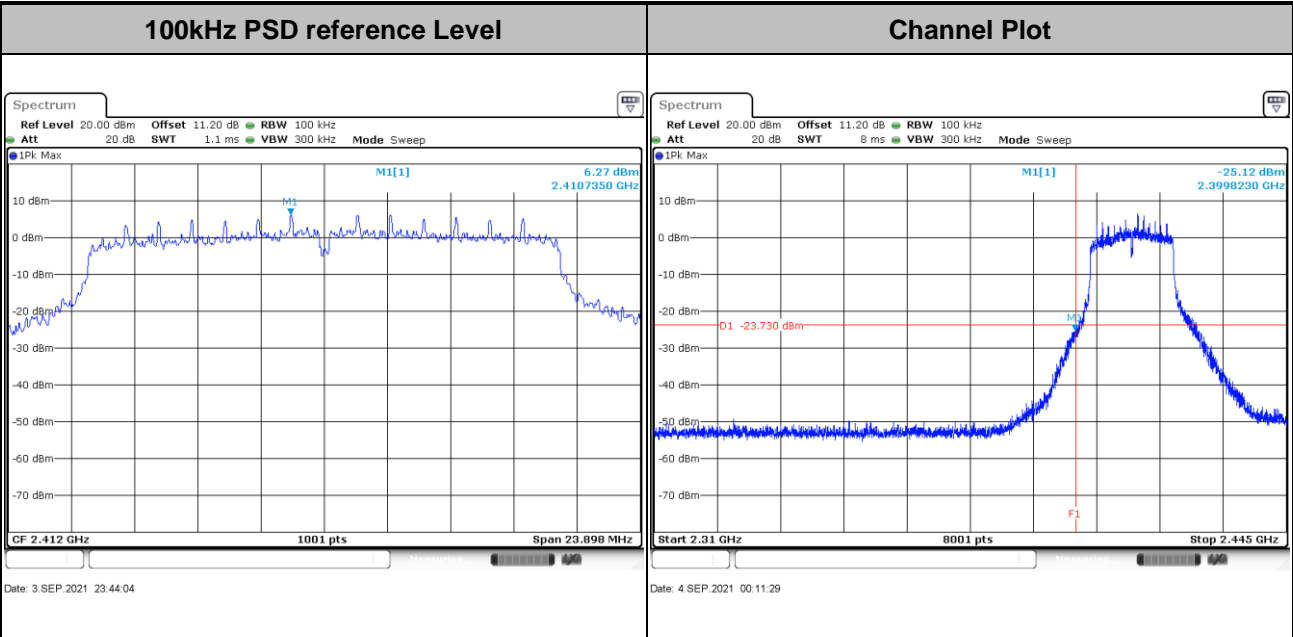





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

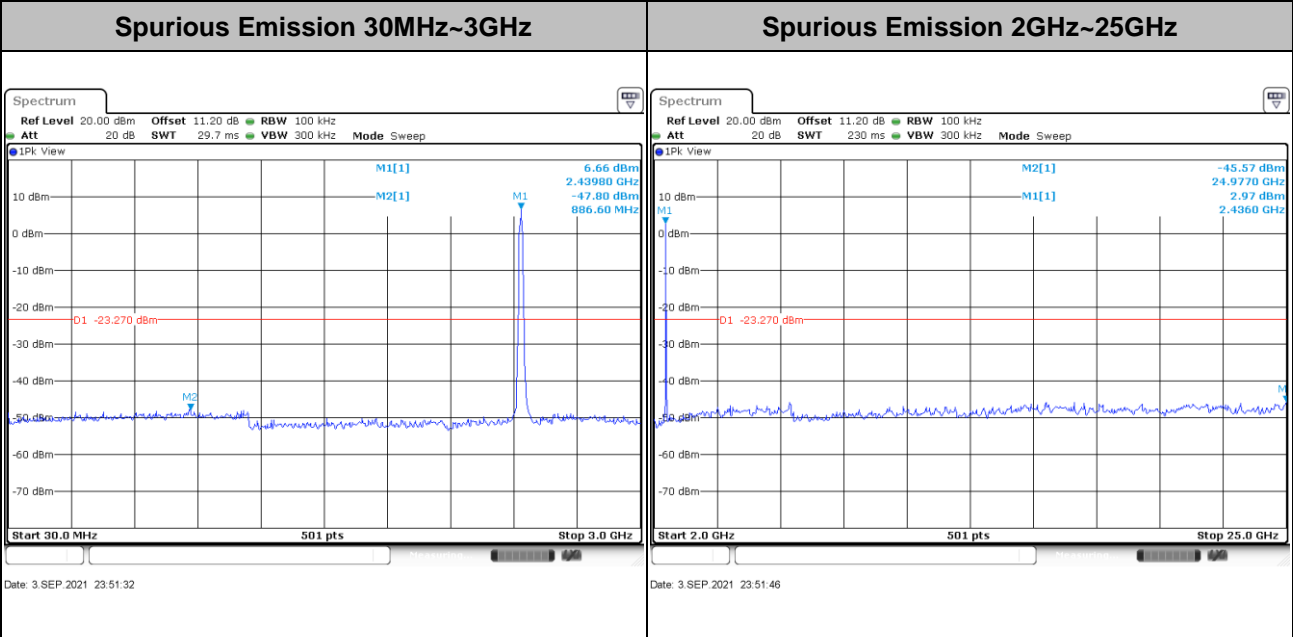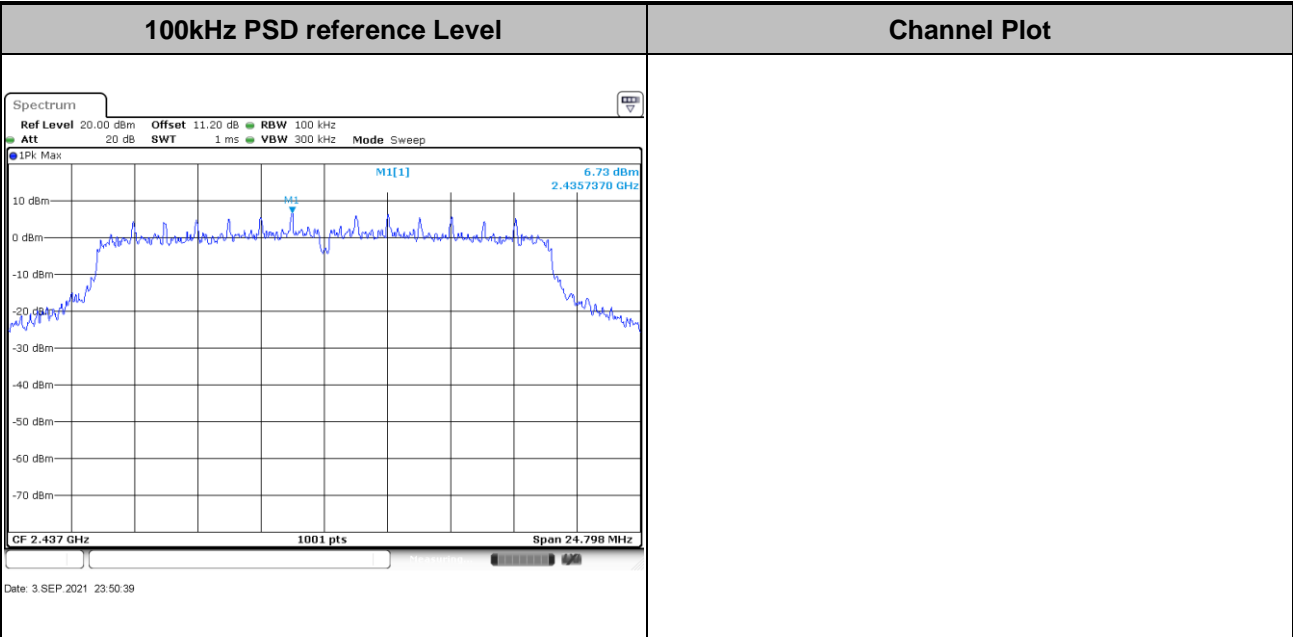





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

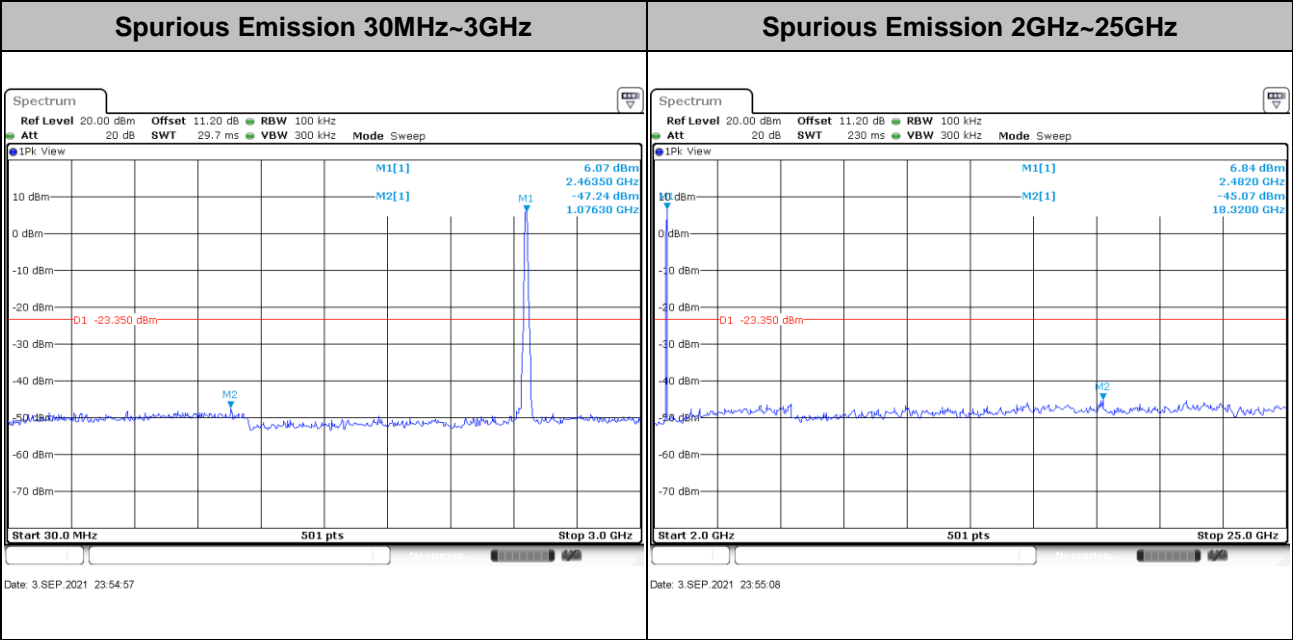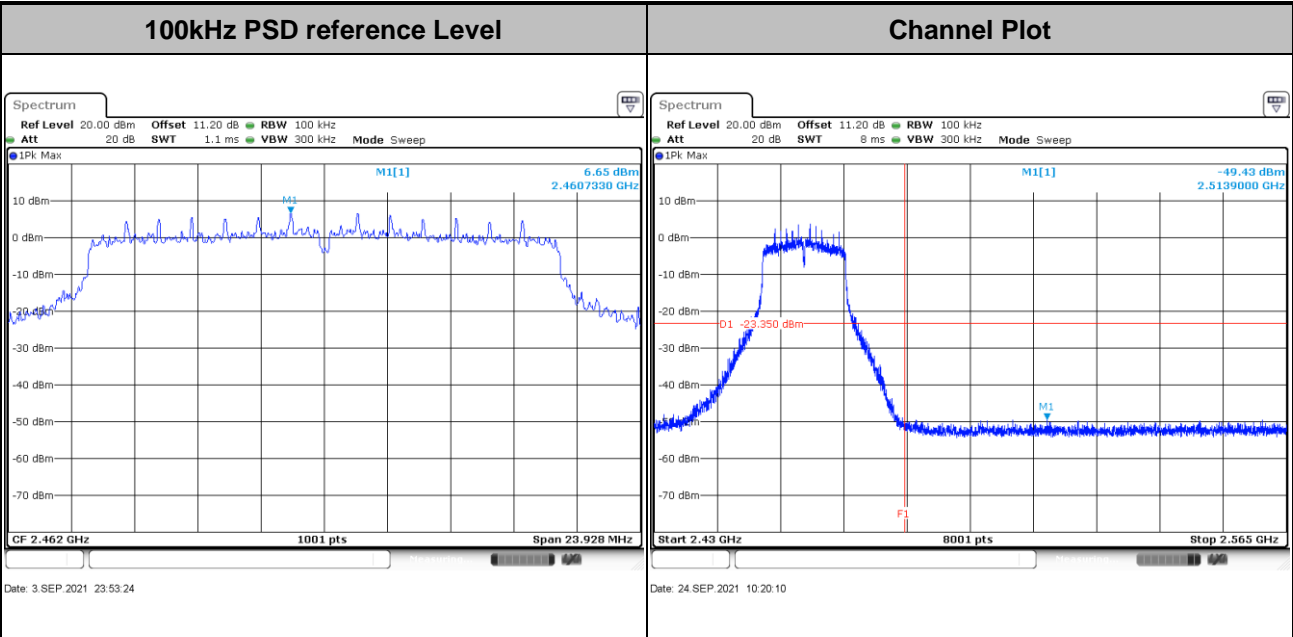





Test Mode : 802.11n HT40 Test Channel : 03

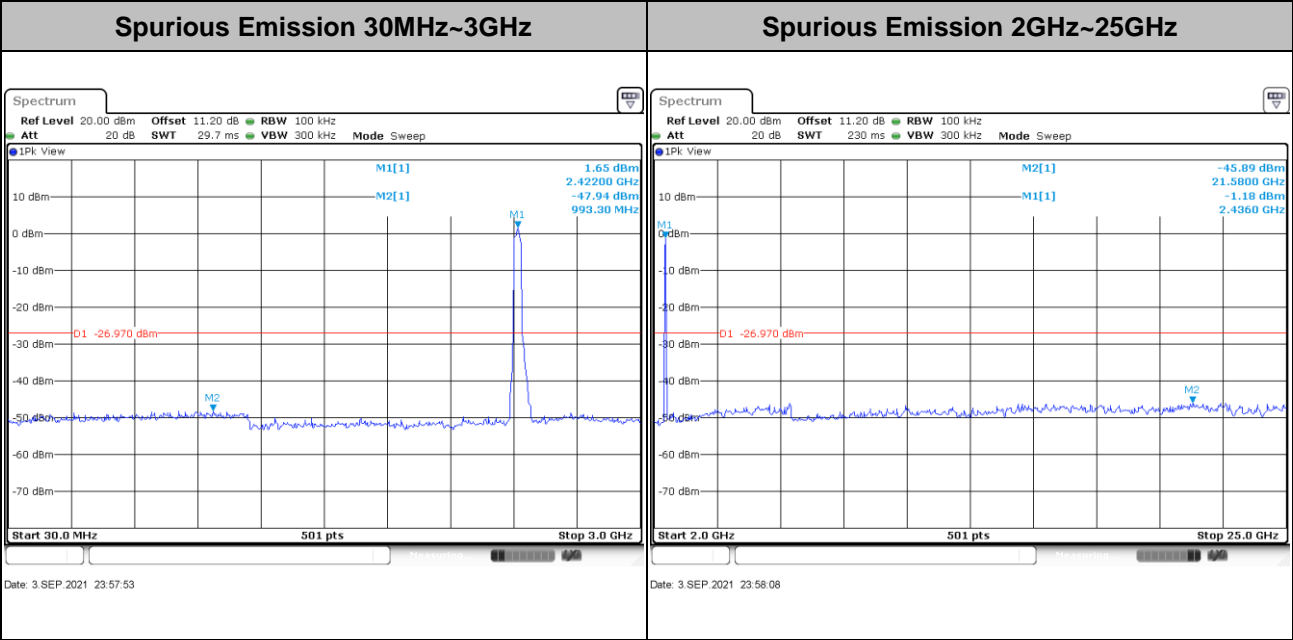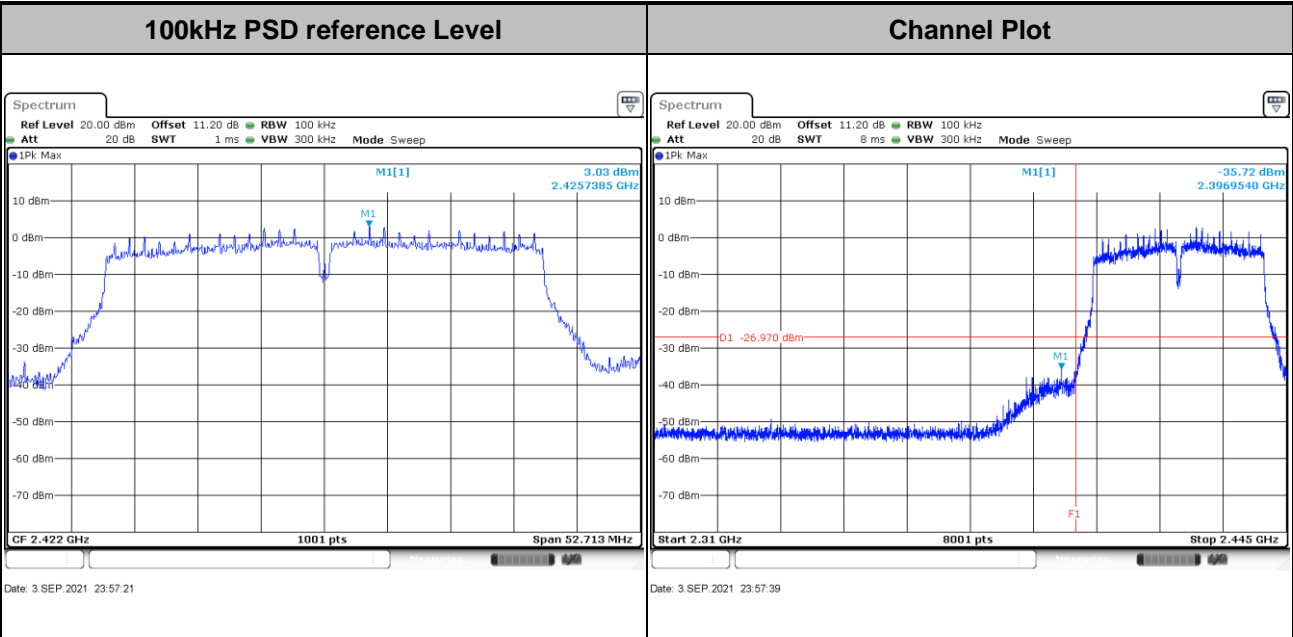





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

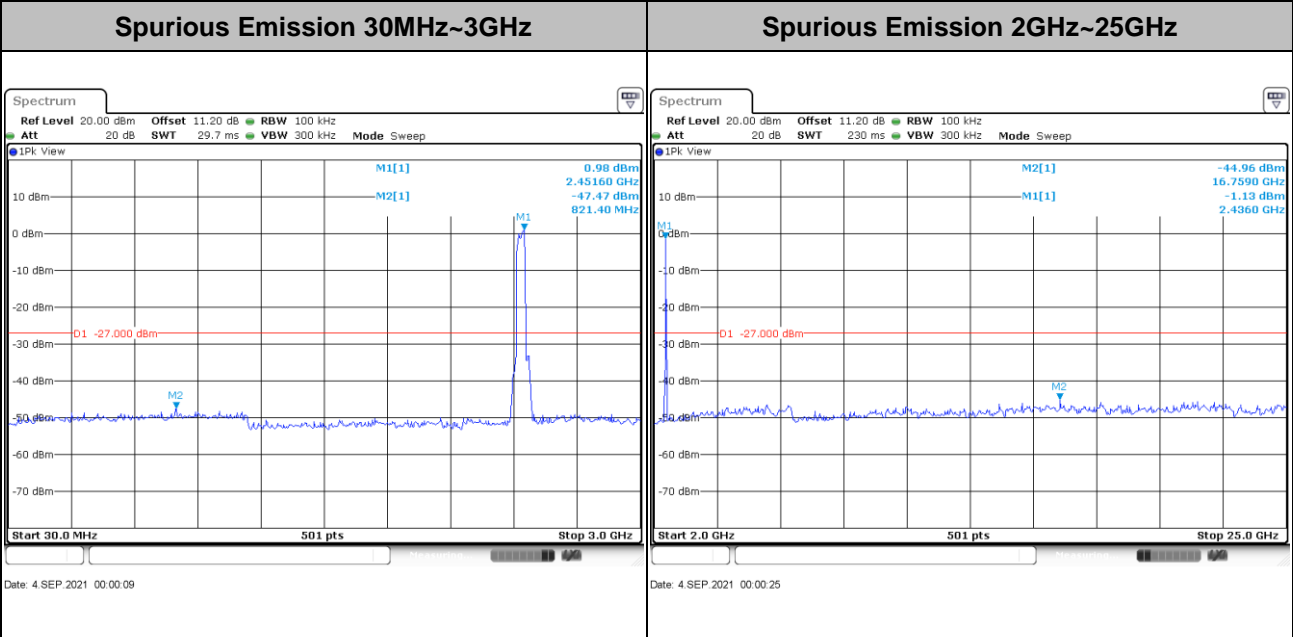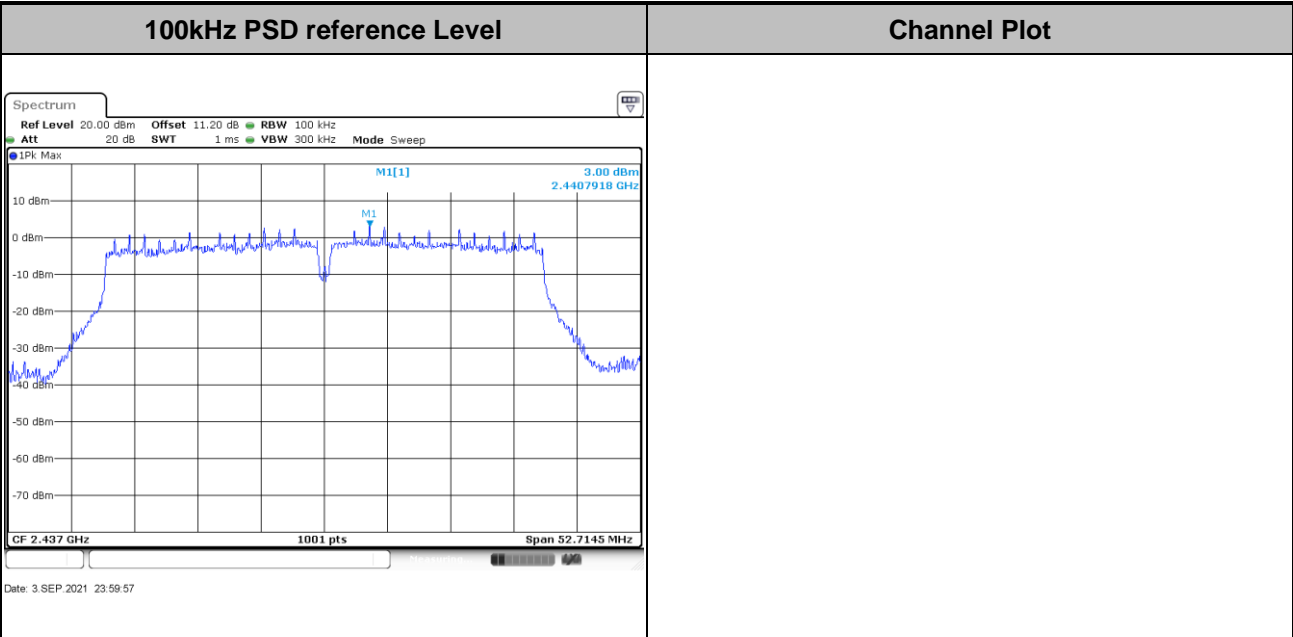



Test Mode : 802.11n HT40 Test Channel : 09

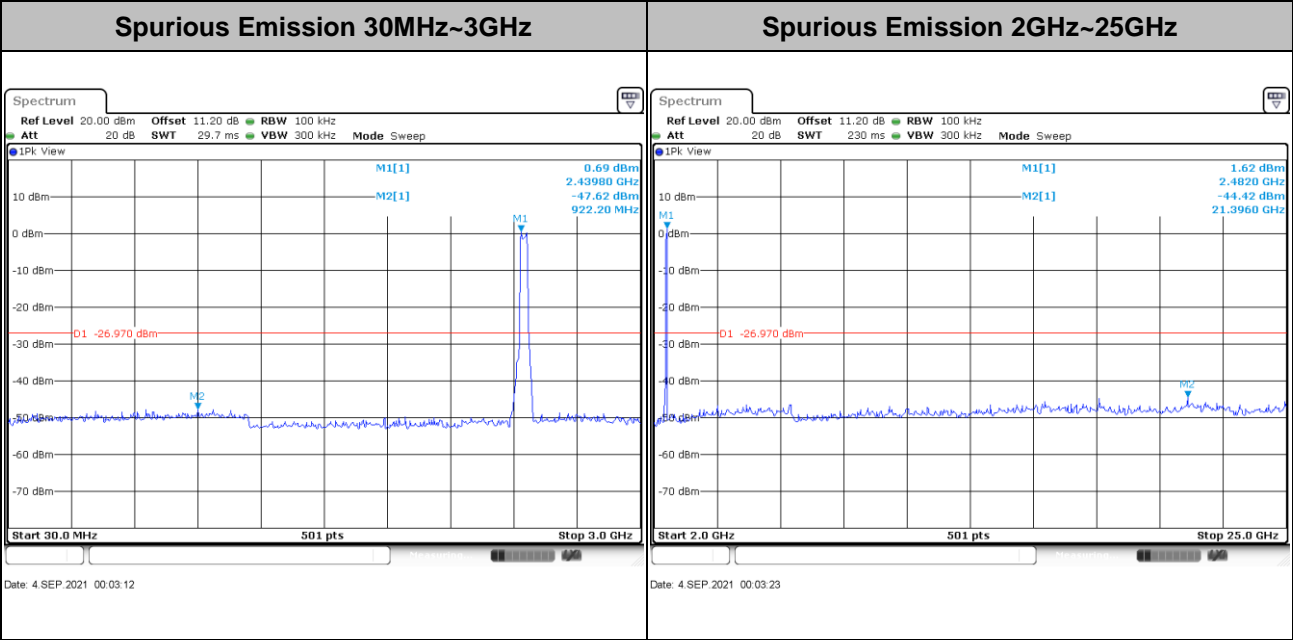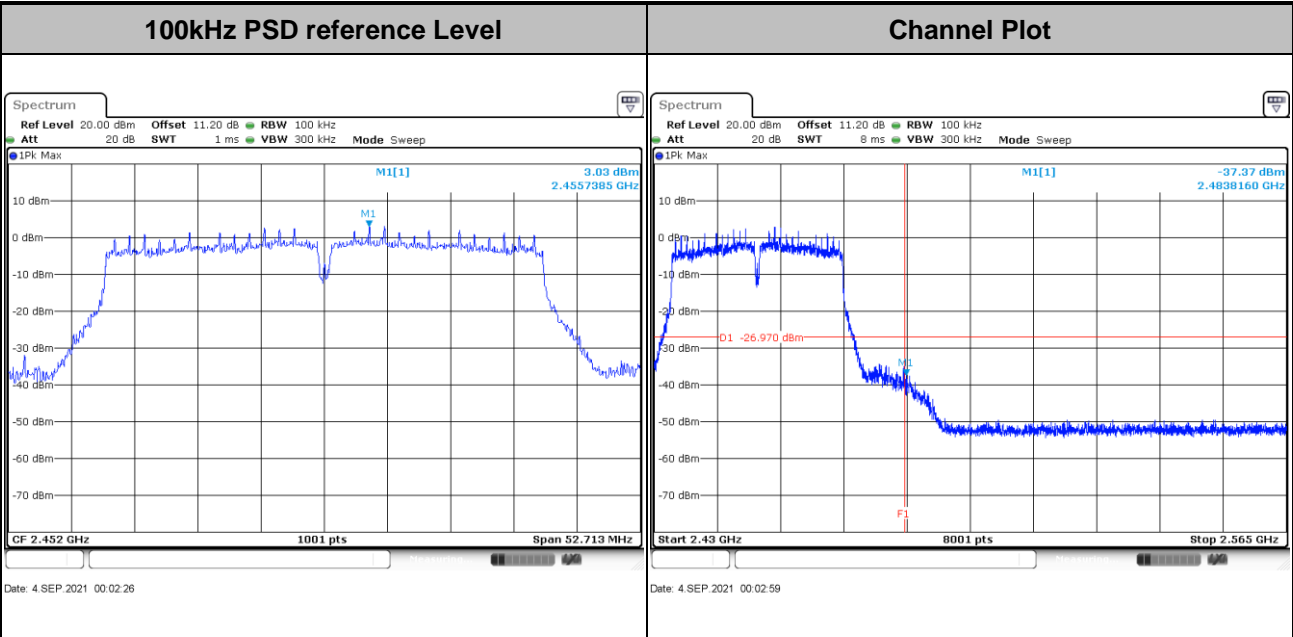



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

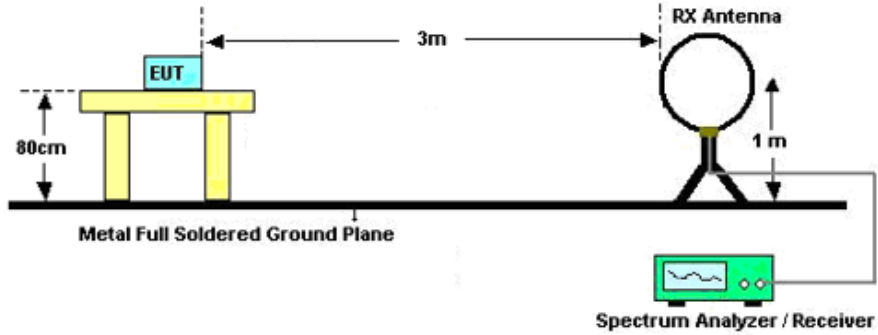

For radiated emissions from 30MHz to 1GHz

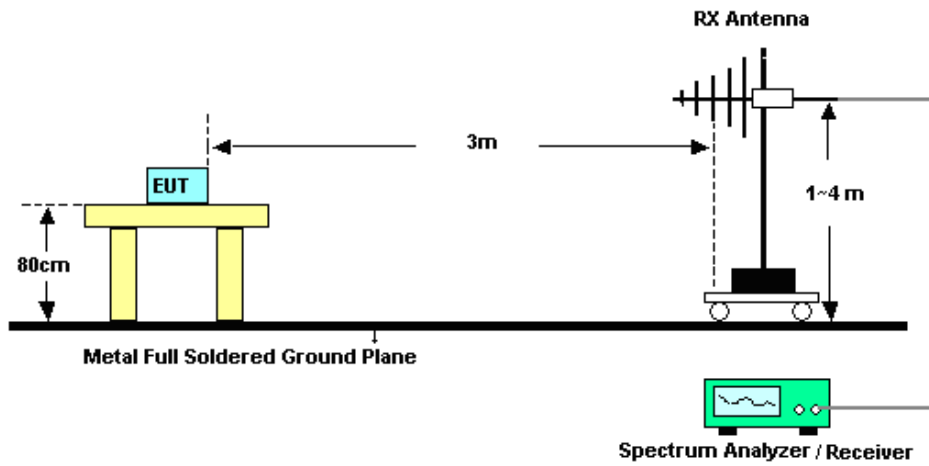

For radiated emissions above 1GHz

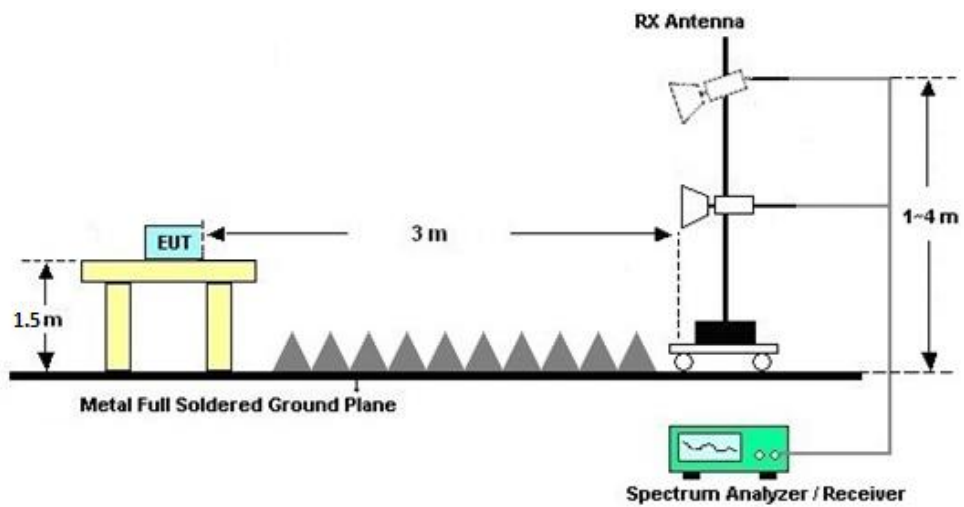



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

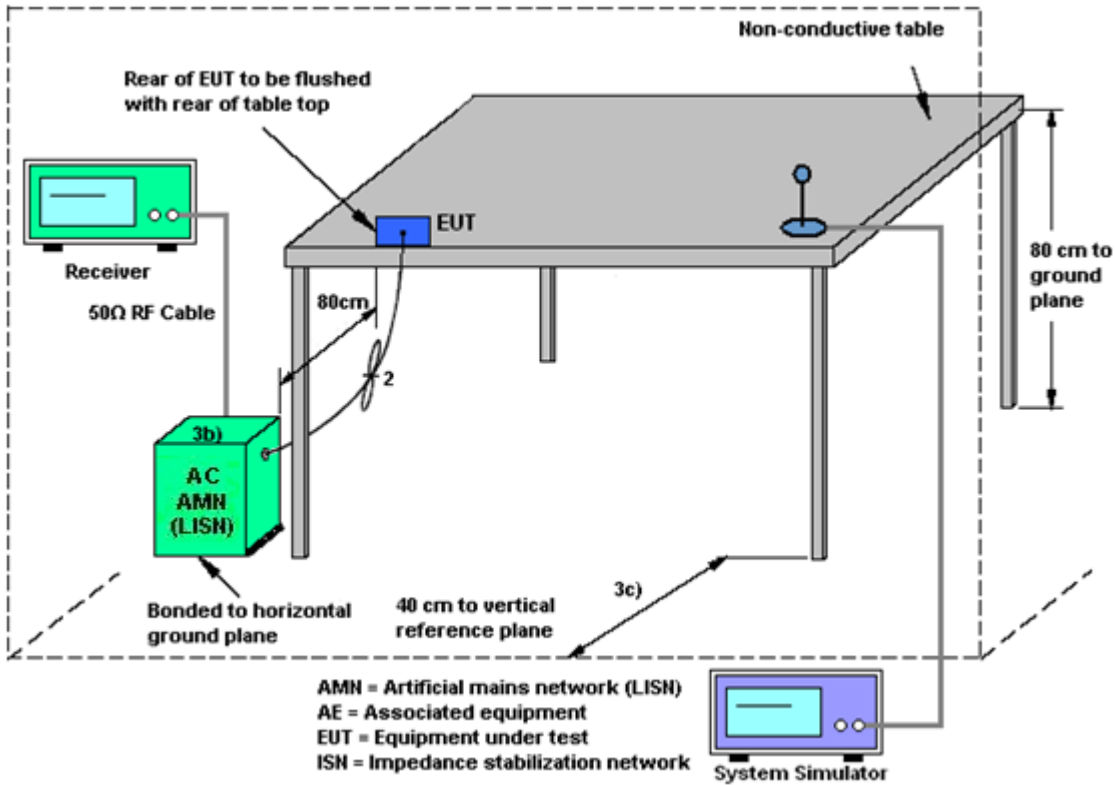

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Sep. 03, 2021~ Sep. 04, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Sep. 03, 2021~ Sep. 04, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Sep. 03, 2021~ Sep. 04, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Dec. 03, 2020	Sep. 21, 2021	Dec. 02, 2021	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 21, 2021	Sep. 21, 2021	Jul. 20, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Sep. 21, 2021	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2021	Sep. 21, 2021	Jul. 14, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Sep. 21, 2021	Jul. 24, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 11, 2021	Sep. 21, 2021	Apr.10 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 07, 2021	Sep. 21, 2021	Apr. 06, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 16,2020	Sep. 21, 2021	Oct.15,2021	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5GHz	Oct. 16, 2020	Sep. 21, 2021	Oct. 15, 2021	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21. 2021	Sep. 21, 2021	Jul. 20. 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Sep. 21, 2021	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 21, 2021	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 21, 2021	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 08, 2021	Sep. 11, 2021	Mar. 07, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Sep. 11, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Sep. 11, 2021	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 14, 2021	Sep. 11, 2021	Jul. 13, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



## Appendix A. Conducted Test Results



**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2021/9/3~2021/9/4	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	14.04	8.06	0.50	Pass
11b	1Mbps	1	6	2437	14.04	8.08	0.50	Pass
11b	1Mbps	1	11	2462	14.04	8.08	0.50	Pass
11g	6Mbps	1	1	2412	17.58	15.45	0.50	Pass
11g	6Mbps	1	6	2437	17.68	15.47	0.50	Pass
11g	6Mbps	1	11	2462	17.68	15.31	0.50	Pass
HT20	MCS0	1	1	2412	18.78	15.93	0.50	Pass
HT20	MCS0	1	6	2437	18.83	16.53	0.50	Pass
HT20	MCS0	1	11	2462	18.73	15.95	0.50	Pass
HT40	MCS0	1	3	2422	36.36	35.14	0.50	Pass
HT40	MCS0	1	6	2437	36.56	35.14	0.50	Pass
HT40	MCS0	1	9	2452	36.46	35.14	0.50	Pass

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	18.80	30.00	-5.00	13.80	36.00	Pass
11b	1Mbps	1	6	2437	19.00	30.00	-5.00	14.00	36.00	Pass
11b	1Mbps	1	11	2462	18.70	30.00	-5.00	13.70	36.00	Pass
11g	6Mbps	1	1	2412	16.50	30.00	-5.00	11.50	36.00	Pass
11g	6Mbps	1	6	2437	17.50	30.00	-5.00	12.50	36.00	Pass
11g	6Mbps	1	11	2462	13.90	30.00	-5.00	8.90	36.00	Pass
HT20	MCS0	1	1	2412	16.20	30.00	-5.00	11.20	36.00	Pass
HT20	MCS0	1	6	2437	16.90	30.00	-5.00	11.90	36.00	Pass
HT20	MCS0	1	11	2462	13.80	30.00	-5.00	8.80	36.00	Pass
HT40	MCS0	1	3	2422	13.00	30.00	-5.00	8.00	36.00	Pass
HT40	MCS0	1	6	2437	15.00	30.00	-5.00	10.00	36.00	Pass
HT40	MCS0	1	9	2452	13.00	30.00	-5.00	8.00	36.00	Pass


**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-7.22	-5.00	8.00	Pass
11b	1Mbps	1	6	2437	-7.92	-5.00	8.00	Pass
11b	1Mbps	1	11	2462	-7.48	-5.00	8.00	Pass
11g	6Mbps	1	1	2412	-10.56	-5.00	8.00	Pass
11g	6Mbps	1	6	2437	-10.19	-5.00	8.00	Pass
11g	6Mbps	1	11	2462	-10.17	-5.00	8.00	Pass
HT20	MCS0	1	1	2412	-11.29	-5.00	8.00	Pass
HT20	MCS0	1	6	2437	-9.64	-5.00	8.00	Pass
HT20	MCS0	1	11	2462	-10.88	-5.00	8.00	Pass
HT40	MCS0	1	3	2422	-13.51	-5.00	8.00	Pass
HT40	MCS0	1	6	2437	-12.50	-5.00	8.00	Pass
HT40	MCS0	1	9	2452	-13.21	-5.00	8.00	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

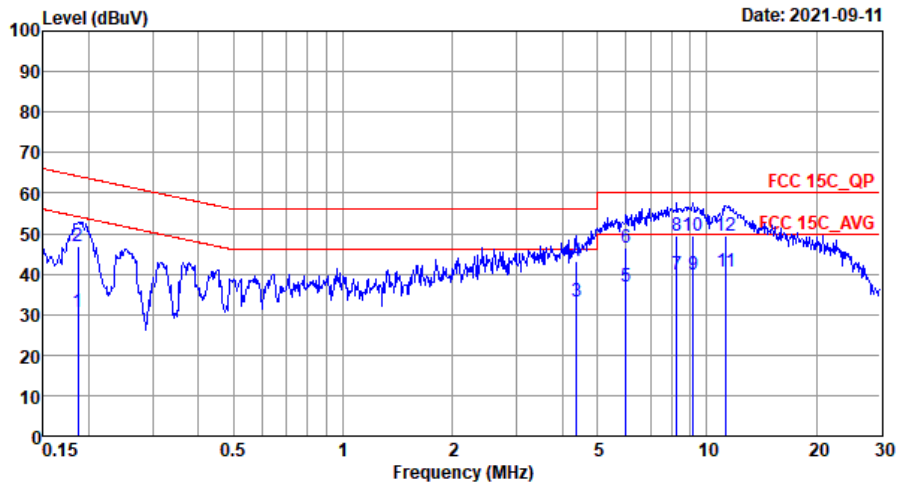


Site : CO01-SZ  
Condition: FCC 15C\_QP LISN\_20201030\_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	30.81	-23.39	54.20	20.70	0.08	10.03	Average
2	0.19	47.01	-17.19	64.20	36.90	0.08	10.03	QP
3	4.38	33.30	-12.70	46.00	23.00	0.03	10.27	Average
4	4.38	43.00	-13.00	56.00	32.70	0.03	10.27	QP
5	5.99	36.90	-13.10	50.00	26.60	0.05	10.25	Average
6	5.99	46.60	-13.40	60.00	36.30	0.05	10.25	QP
7	8.28	39.76	-10.24	50.00	29.41	0.19	10.16	Average
8	8.28	49.46	-10.54	60.00	39.11	0.19	10.16	QP
9	9.16	39.99	-10.01	50.00	29.60	0.26	10.13	Average
10	9.16	49.59	-10.41	60.00	39.20	0.26	10.13	QP
11 *	11.32	40.74	-9.26	50.00	30.20	0.37	10.17	Average
12	11.32	49.54	-10.46	60.00	39.00	0.37	10.17	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

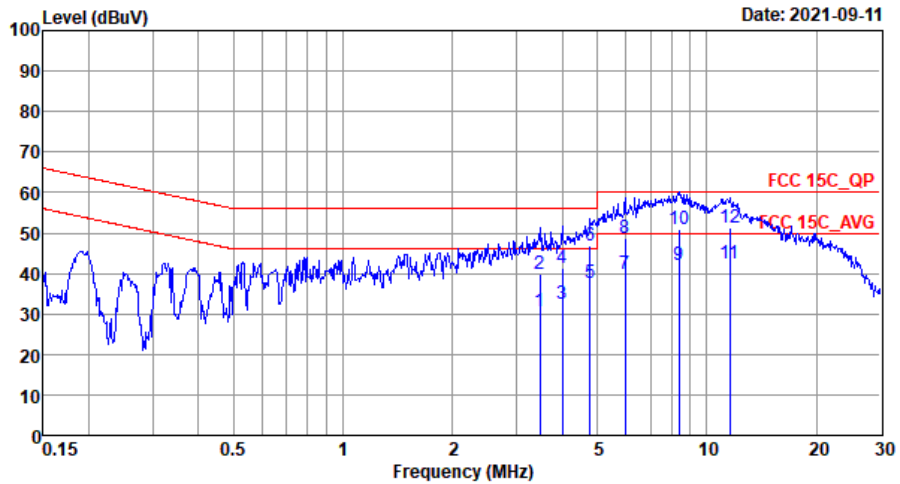

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20201030\_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	3.47	30.67	-15.33	46.00	20.40	0.05	10.22	Average
2	3.47	39.77	-16.23	56.00	29.50	0.05	10.22	QP
3	4.01	32.38	-13.62	46.00	22.09	0.04	10.25	Average
4	4.01	41.38	-14.62	56.00	31.09	0.04	10.25	QP
5	4.77	37.60	-8.40	46.00	27.29	0.02	10.29	Average
6	4.77	46.70	-9.30	56.00	36.39	0.02	10.29	QP
7	5.96	39.70	-10.30	50.00	29.40	0.05	10.25	Average
8	5.96	48.80	-11.20	60.00	38.50	0.05	10.25	QP
9	8.37	42.16	-7.84	50.00	31.80	0.20	10.16	Average
10	8.37	51.06	-8.94	60.00	40.70	0.20	10.16	QP
11 *	11.56	42.45	-7.55	50.00	31.89	0.38	10.18	Average
12	11.56	51.15	-8.85	60.00	40.59	0.38	10.18	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2384.55	56.11	-17.89	74	47.15	32.03	9.63	32.7	112	315	P	H
		2387.175	46.28	-7.72	54	37.35	32	9.63	32.7	112	315	A	H
		2412	108.92	-	-	99.86	32.1	9.66	32.7	112	315	P	H
		2412	105.72	-	-	96.66	32.1	9.66	32.7	112	315	A	H
		2352.21	55.78	-18.22	74	46.82	32.07	9.59	32.7	121	321	P	V
		2387.385	45.71	-8.29	54	36.78	32	9.63	32.7	121	321	A	V
		2412	109.46	-	-	100.4	32.1	9.66	32.7	121	321	P	V
		2412	106.3	-	-	97.24	32.1	9.66	32.7	121	321	A	V
802.11b CH 06 2437MHz		2333.52	54.88	-19.12	74	46.01	32	9.57	32.7	113	315	P	H
		2389.8	44.69	-9.31	54	35.75	32	9.64	32.7	113	315	A	H
		2437	108.32	-	-	99.03	32.3	9.69	32.7	113	315	P	H
		2437	105.11	-	-	95.82	32.3	9.69	32.7	113	315	A	H
		2486.84	55.74	-18.26	74	46.52	32.17	9.75	32.7	113	315	P	H
		2483.83	45.04	-8.96	54	35.82	32.17	9.75	32.7	113	315	A	H
		2372.44	55.49	-18.51	74	46.54	32.03	9.62	32.7	113	255	P	V
		2389.38	45.18	-8.82	54	36.24	32	9.64	32.7	113	255	A	V
		2437	112.97	-	-	103.68	32.3	9.69	32.7	113	255	P	V
		2437	109.9	-	-	100.61	32.3	9.69	32.7	113	255	A	V
		2484.81	55.7	-18.3	74	46.48	32.17	9.75	32.7	113	255	P	V
	2483.9	45.58	-8.42	54	36.36	32.17	9.75	32.7	113	255	A	V	



<b>802.11b</b> <b>CH 11</b> <b>2462MHz</b>	2462	107.19	-	-	97.94	32.23	9.72	32.7	108	314	P	H
	2462	104	-	-	94.75	32.23	9.72	32.7	108	314	A	H
	2487.44	57.5	-16.5	74	48.28	32.17	9.75	32.7	108	314	P	H
	2485.92	48.75	-5.25	54	39.53	32.17	9.75	32.7	108	314	A	H
	2462	112.42	-	-	103.17	32.23	9.72	32.7	136	254	P	V
	2462	109.28	-	-	100.03	32.23	9.72	32.7	136	254	A	V
	2485.92	59.68	-14.32	74	50.46	32.17	9.75	32.7	136	254	P	V
	2486	50.59	-3.41	54	41.37	32.17	9.75	32.7	136	254	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											

**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
<b>802.11b</b> <b>CH 01</b> <b>2412MHz</b>		4824	43.96	-30.04	74	52.97	31.12	12.01	52.14			P	H
		4824	45.93	-28.07	74	54.94	31.12	12.01	52.14			P	V
<b>802.11b</b> <b>CH 06</b> <b>2437MHz</b>		4874	43.09	-30.91	74	51.98	31.17	12.04	52.1			P	H
		7311	49.7	-24.3	74	51.3	36.03	14.16	51.79			P	H
		4874	44.02	-29.98	74	52.91	31.17	12.04	52.1			P	V
		7311	49.33	-24.67	74	50.93	36.03	14.16	51.79			P	V
<b>802.11b</b> <b>CH 11</b> <b>2462MHz</b>		4924	44.89	-29.11	74	53.66	31.22	12.07	52.06			P	H
		7386	49.05	-24.95	74	50.25	36.29	14.21	51.7			P	H
		4924	45.55	-28.45	74	54.32	31.22	12.07	52.06			P	V
		7386	49.2	-24.8	74	50.4	36.29	14.21	51.7			P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		2389.8	55.29	-18.71	74	50.55	27.8	9.64	32.7	131	252	P	H
		2389.8	44.01	-9.99	54	39.27	27.8	9.64	32.7	131	252	A	H
		2412	105.32	-	-	100.59	27.77	9.66	32.7	131	252	P	H
		2412	97.66	-	-	92.93	27.77	9.66	32.7	131	252	A	H
		2390	60.21	-13.79	74	55.47	27.8	9.64	32.7	136	244	P	V
		2389.905	50.01	-3.99	54	45.27	27.8	9.64	32.7	136	244	A	V
		2412	113.19	-	-	108.46	27.77	9.66	32.7	136	244	P	V
		2412	105.1	-	-	100.37	27.77	9.66	32.7	136	244	A	V
802.11g CH 06 2437MHz		2388.96	53.81	-20.19	74	49.07	27.8	9.64	32.7	108	233	P	H
		2389.8	42.39	-11.61	54	37.65	27.8	9.64	32.7	108	233	A	H
		2437	110.42	-	-	105.72	27.71	9.69	32.7	108	233	P	H
		2437	102.57	-	-	97.87	27.71	9.69	32.7	108	233	A	H
		2485.09	52.74	-21.26	74	48.03	27.66	9.75	32.7	108	233	P	H
		2484.48	42.98	-11.02	54	38.27	27.66	9.75	32.7	108	233	A	H
		2388.82	52.61	-21.39	74	47.87	27.8	9.64	32.7	133	246	P	V
		2389.94	44.04	-9.96	54	39.3	27.8	9.64	32.7	133	246	A	V
		2437	114.22	-	-	109.52	27.71	9.69	32.7	133	246	P	V
		2437	106.01	-	-	101.31	27.71	9.69	32.7	133	246	A	V
		2483.9	57.39	-16.61	74	52.68	27.66	9.75	32.7	133	246	P	V
		2484.48	45.91	-8.09	54	41.2	27.66	9.75	32.7	133	246	A	V



802.11g CH 11 2462MHz	2462	104.76	-	-	100.05	27.69	9.72	32.7	107	217	P	H
	2462	96.92	-	-	92.21	27.69	9.72	32.7	107	217	A	H
	2483.64	55.9	-18.1	74	51.19	27.66	9.75	32.7	107	217	P	H
	2483.52	45.55	-8.45	54	40.84	27.66	9.75	32.7	107	217	A	H
	2462	109.03	-	-	104.32	27.69	9.72	32.7	143	248	P	V
	2462	101.09	-	-	96.38	27.69	9.72	32.7	143	248	A	V
	2483.92	60.98	-13.02	74	56.27	27.66	9.75	32.7	143	248	P	V
	2483.52	49.44	-4.56	54	44.73	27.66	9.75	32.7	143	248	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											

**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11g CH 01 2412MHz		4824	45.91	-28.09	74	52.19	33.85	12.01	52.14			P	H
		4824	46.74	-27.26	74	53.02	33.85	12.01	52.14			P	V
802.11g CH 06 2437MHz		4874	46.17	-27.83	74	52.5	33.73	12.04	52.1			P	H
		7311	49.07	-24.93	74	50.94	35.76	14.16	51.79			P	H
		4874	46.08	-27.92	74	52.41	33.73	12.04	52.1			P	V
		7311	48.99	-25.01	74	50.86	35.76	14.16	51.79			P	V
802.11g CH 11 2462MHz		4924	45.96	-28.04	74	52.25	33.7	12.07	52.06			P	H
		7386	49.1	-24.9	74	50.81	35.78	14.21	51.7			P	H
		4924	46.16	-27.84	74	52.45	33.7	12.07	52.06			P	V
		7386	48.95	-25.05	74	50.66	35.78	14.21	51.7			P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		2390	56.84	-17.16	74	52.1	27.8	9.64	32.7	124	235	P	H
		2389.8	46.85	-7.15	54	42.11	27.8	9.64	32.7	124	235	A	H
		2412	108.64	-	-	103.91	27.77	9.66	32.7	124	235	P	H
		2412	100.81	-	-	96.08	27.77	9.66	32.7	124	235	A	H
		2389.90	58.23	-15.77	74	53.49	27.8	9.64	32.7	137	246	P	V
		2389.90	49.64	-4.36	54	44.9	27.8	9.64	32.7	137	246	A	V
		2412	110.86	-	-	106.13	27.77	9.66	32.7	137	246	P	V
		2412	102.06	-	-	97.33	27.77	9.66	32.7	137	246	A	V
802.11n HT20 CH 06 2437MHz		2388.68	51.68	-22.32	74	46.94	27.8	9.64	32.7	146	234	P	H
		2389.94	41.78	-12.22	54	37.04	27.8	9.64	32.7	146	234	A	H
		2437	109.51	-	-	104.81	27.71	9.69	32.7	146	234	P	H
		2437	101.54	-	-	96.84	27.71	9.69	32.7	146	234	A	H
		2485.51	52.5	-21.5	74	47.79	27.66	9.75	32.7	146	234	P	H
		2483.55	42.64	-11.36	54	37.93	27.66	9.75	32.7	146	234	A	H
		2389.66	53.61	-20.39	74	48.87	27.8	9.64	32.7	121	250	P	V
		2389.94	42.92	-11.08	54	38.18	27.8	9.64	32.7	121	250	A	V
		2437	112.37	-	-	107.67	27.71	9.69	32.7	121	250	P	V
		2437	104.42	-	-	99.72	27.71	9.69	32.7	121	250	A	V
		2483.9	54.83	-19.17	74	50.12	27.66	9.75	32.7	121	250	P	V
		2484.48	44.84	-9.16	54	40.13	27.66	9.75	32.7	121	250	A	V



<b>802.11n</b> <b>HT20</b> <b>CH 11</b> <b>2462MHz</b>		2462	106.1	-	-	101.39	27.69	9.72	32.7	119	236	P	H
		2462	97.66	-	-	92.95	27.69	9.72	32.7	119	236	A	H
		2483.6	59.62	-14.38	74	54.91	27.66	9.75	32.7	119	236	P	H
		2483.52	46.7	-7.3	54	41.99	27.66	9.75	32.7	119	236	A	H
		2462	109.11	-	-	104.4	27.69	9.72	32.7	114	250	P	V
		2462	101.02	-	-	96.31	27.69	9.72	32.7	114	250	A	V
		2483.56	61.66	-12.34	74	56.95	27.66	9.75	32.7	114	250	P	V
	2483.52	50.59	-3.41	54	45.88	27.66	9.75	32.7	114	250	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for channels 01, 06, and 11, and a Remark section.



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 03 2422MHz		2387.84	56.31	-17.69	74	47.37	32	9.64	32.7	199	213	P	H
		2389.52	48.02	-5.98	54	39.08	32	9.64	32.7	199	213	A	H
		2422	101.57	-	-	92.39	32.2	9.68	32.7	199	213	P	H
		2422	93.44	-	-	84.26	32.2	9.68	32.7	199	213	A	H
		2484.53	54.88	-19.12	74	45.66	32.17	9.75	32.7	199	213	P	H
		2483.97	46.39	-7.61	54	37.17	32.17	9.75	32.7	199	213	A	H
		2389.94	59.15	-14.85	74	50.21	32	9.64	32.7	279	264	P	V
		2389.38	51.46	-2.54	54	42.52	32	9.64	32.7	279	264	A	V
		2422	107.84	-	-	98.66	32.2	9.68	32.7	279	264	P	V
		2422	100.3	-	-	91.12	32.2	9.68	32.7	279	264	A	V
		2485.02	55.81	-18.19	74	46.59	32.17	9.75	32.7	279	264	P	V
		2484.32	47.33	-6.67	54	38.11	32.17	9.75	32.7	279	264	A	V
802.11n HT40 CH 06 2437MHz		2389.8	57.53	-16.47	74	52.79	27.8	9.64	32.7	147	234	P	H
		2389.8	46.95	-7.05	54	42.21	27.8	9.64	32.7	147	234	A	H
		2437	104.38	-	-	99.68	27.71	9.69	32.7	147	234	P	H
		2437	96.42	-	-	91.72	27.71	9.69	32.7	147	234	A	H
		2484.04	53.27	-20.73	74	48.56	27.66	9.75	32.7	147	234	P	H
		2483.48	44.7	-105.3	150	39.99	27.66	9.75	32.7	147	234	A	H
		2389.94	59.19	-14.81	74	54.45	27.8	9.64	32.7	122	250	P	V
		2389.66	49.15	-4.85	54	44.41	27.8	9.64	32.7	122	250	A	V
		2437	107.53	-	-	102.83	27.71	9.69	32.7	122	250	P	V
		2437	99.98	-	-	95.28	27.71	9.69	32.7	122	250	A	V
		2485.3	57.41	-16.59	74	52.7	27.66	9.75	32.7	122	250	P	V
		2483.55	48.21	-5.79	54	43.5	27.66	9.75	32.7	122	250	A	V



<b>802.11n</b> <b>HT40</b> <b>CH 09</b> <b>2452MHz</b>		2389.94	50.62	-23.38	74	45.88	27.8	9.64	32.7	138	235	P	H
		2389.1	41.84	-12.16	54	37.1	27.8	9.64	32.7	138	235	A	H
		2452	100.99	-	-	96.27	27.71	9.71	32.7	138	235	P	H
		2452	92.66	-	-	87.94	27.71	9.71	32.7	138	235	A	H
		2485.44	54.68	-19.32	74	49.97	27.66	9.75	32.7	138	235	P	H
		2484.67	46.66	-7.34	54	41.95	27.66	9.75	32.7	138	235	A	H
		2388.68	55.3	-18.7	74	46.36	32	9.64	32.7	185	270	P	V
		2388.96	46.71	-7.29	54	37.77	32	9.64	32.7	185	270	A	V
		2452	107.25	-	-	97.94	32.3	9.71	32.7	185	270	P	V
		2452	99.73	-	-	90.42	32.3	9.71	32.7	185	270	A	V
		2483.5	59.95	-14.05	74	50.73	32.17	9.75	32.7	185	270	P	V
		2483.69	51.88	-2.12	54	42.66	32.17	9.75	32.7	185	270	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4844	46.05	-27.95	74	52.34	33.8	12.03	52.12	-	-	P	H
HT40		7266	49.23	-24.77	74	51.15	35.76	14.14	51.82	-	-	P	H
CH 03		4844	46.97	-27.03	74	53.26	33.8	12.03	52.12	-	-	P	V
2422MHz		7266	48.38	-25.62	74	50.3	35.76	14.14	51.82	-	-	P	V
802.11n		4874	46.25	-27.75	74	52.58	33.73	12.04	52.1	-	-	P	H
HT40		7311	48.81	-25.19	74	50.68	35.76	14.16	51.79	-	-	P	H
CH 06		4874	46.76	-27.24	74	53.09	33.73	12.04	52.1	-	-	P	V
2437MHz		7311	49.19	-24.81	74	51.06	35.76	14.16	51.79	-	-	P	V
802.11n		4904	46.13	-27.87	74	52.44	33.7	12.06	52.07	-	-	P	H
HT40		7356	48.92	-25.08	74	50.7	35.77	14.19	51.74	-	-	P	H
CH 09		4904	46.37	-27.63	74	52.68	33.7	12.06	52.07	-	-	P	V
2452MHz		7356	49.74	-24.26	74	51.52	35.77	14.19	51.74	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT40 LF		30.97	23.39	-16.61	40	30.55	24.7	0.54	32.4	-	-	P	H
		156.1	21.18	-22.32	43.5	35.3	16.8	1.27	32.19	-	-	P	H
		283.17	31.8	-14.2	46	42.97	18.82	1.75	31.74	-	-	P	H
		559.62	28.48	-17.52	46	30.36	26.5	2.48	30.86	-	-	P	H
		863.23	31.13	-14.87	46	30.18	29.3	3.08	31.43	-	-	P	H
		970.9	33.56	-20.44	54	30.31	31.28	3.26	31.29	-	-	P	H
		53.28	30.35	-9.65	40	48.82	13.2	0.73	32.4	-	-	P	V
		157.07	22.67	-20.83	43.5	36.87	16.7	1.28	32.18	-	-	P	V
		296.75	27.13	-18.87	46	37.81	19.24	1.79	31.71	-	-	P	V
		644.98	28.19	-17.81	46	29.84	26.5	2.64	30.79	-	-	P	V
		845.77	30.2	-15.8	46	29.51	29.04	3.04	31.39	-	-	P	V
	971.87	33.19	-20.81	54	29.95	31.26	3.27	31.29	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11g HT20 CH 09 2462MHz & LTE Band13	*	2372.02	54.95	-19.05	74	46	32.03	9.62	32.7	309	131	P	H
	*	2387.98	46.19	-7.81	54	37.25	32	9.64	32.7	309	131	A	H
		2452	103.72	---	---	94.41	32.3	9.71	32.7	309	131	P	H
		2452	96.35	---	---	87.04	32.3	9.71	32.7	309	131	A	H
		2484.04	57.06	-16.94	74	47.84	32.17	9.75	32.7	309	131	P	H
		2484.46	48.43	-5.57	54	39.21	32.17	9.75	32.7	309	131	A	H
	*	2389.24	55.34	-18.66	74	46.4	32	9.64	32.7	156	100	P	V
	*	2389.66	47.03	-6.97	54	38.09	32	9.64	32.7	156	100	A	V
		2452	106.1	---	---	96.79	32.3	9.71	32.7	156	100	P	V
		2452	98.35	---	---	89.04	32.3	9.71	32.7	156	100	A	V
		2483.97	58.25	-15.75	74	49.03	32.17	9.75	32.7	156	100	P	V
		2483.58	50.01	-3.99	54	40.79	32.17	9.75	32.7	156	100	A	V

Remark	3. No other spurious found.
	4. All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g HT20 CH 09 2462MHz & LTE Band13		1559.5	38.49	-35.51	74	53.95	27.93	8.56	51.95	-	-	P	H
		2339.25	43.54	-30.46	74	54.44	32.1	9.58	52.58	-	-	P	H
		3119	46.48	-27.52	74	55.15	32.85	10.75	52.27	-	-	P	H
		4904	47.26	-26.74	74	53.57	33.7	12.06	52.07	-	-	P	H
		7356	49.09	-24.91	74	50.87	35.77	14.19	51.74	-	-	P	H
		1559.5	38.19	-35.81	74	53.65	27.93	8.56	51.95	-	-	P	V
		2339.25	42.86	-31.14	74	53.76	32.1	9.58	52.58	-	-	P	V
		3119	45.22	-28.78	74	53.89	32.85	10.75	52.27	-	-	P	V
		4904	45.86	-28.14	74	52.17	33.7	12.06	52.07	-	-	P	V
		7356	48.86	-25.14	74	50.64	35.77	14.19	51.74	-	-	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.01	-	-	10Hz
802.11g	98.25	-	-	10Hz
802.11n HT20	98.12	-	-	10Hz
802.11n HT40	94.82	0.93	1.08	3KHz


### 802.11b

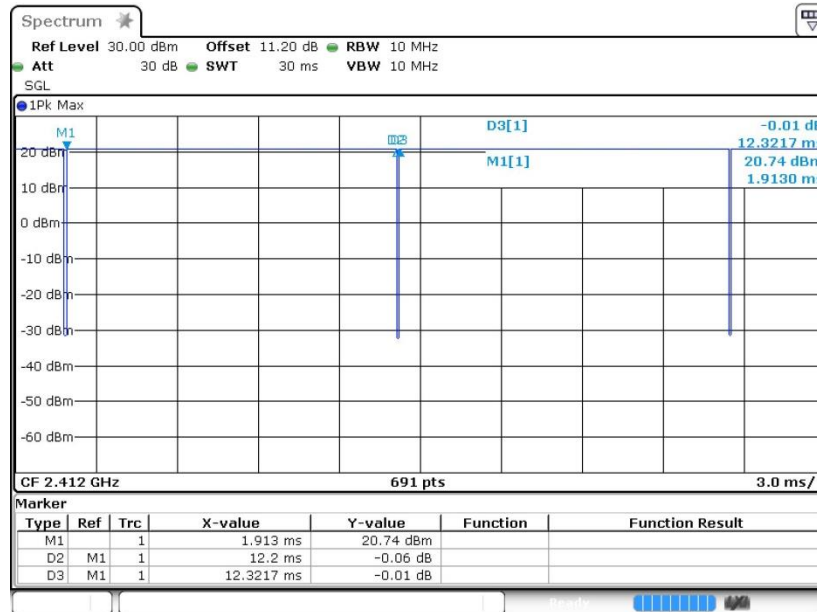

Date: 26.AUG.2021 15:48:29




802.11g

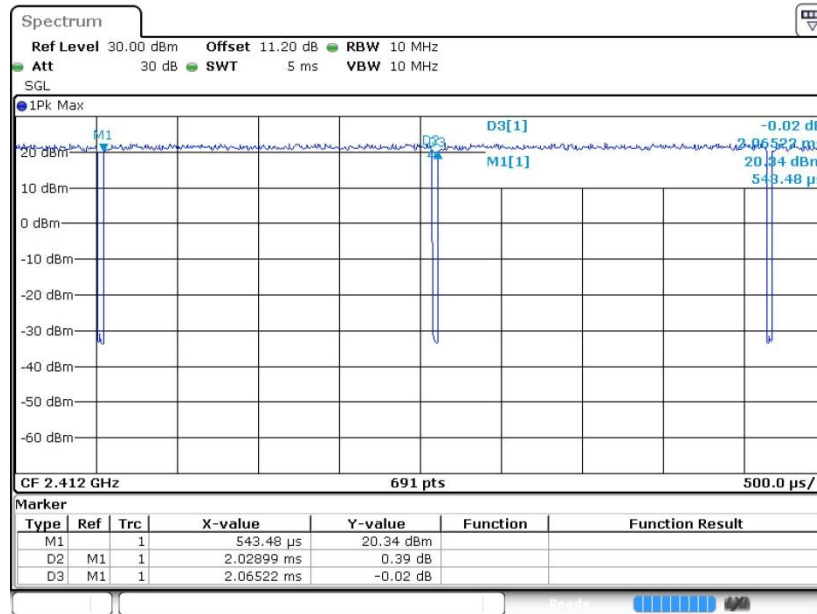

Date: 26.AUG.2021 15:56:04


802.11n HT20

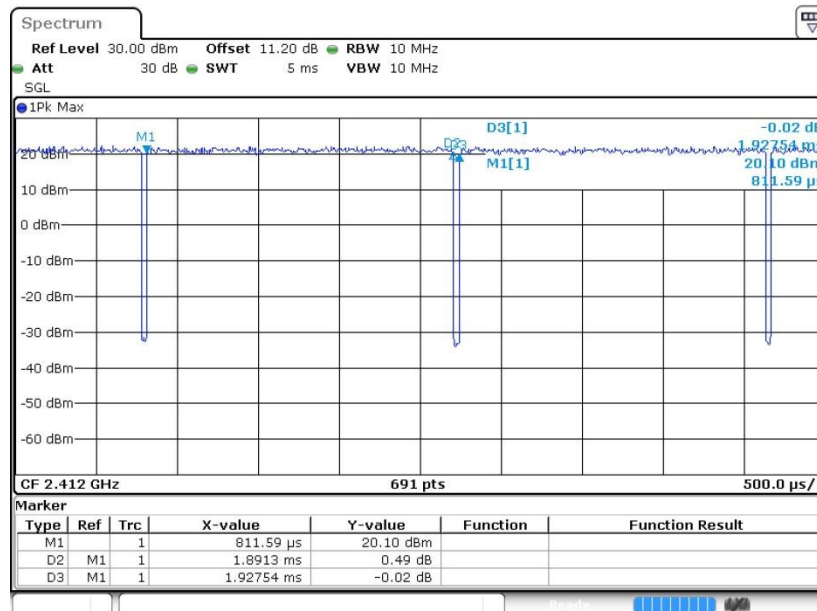

Date: 26.AUG.2021 15:56:55



802.11n HT40

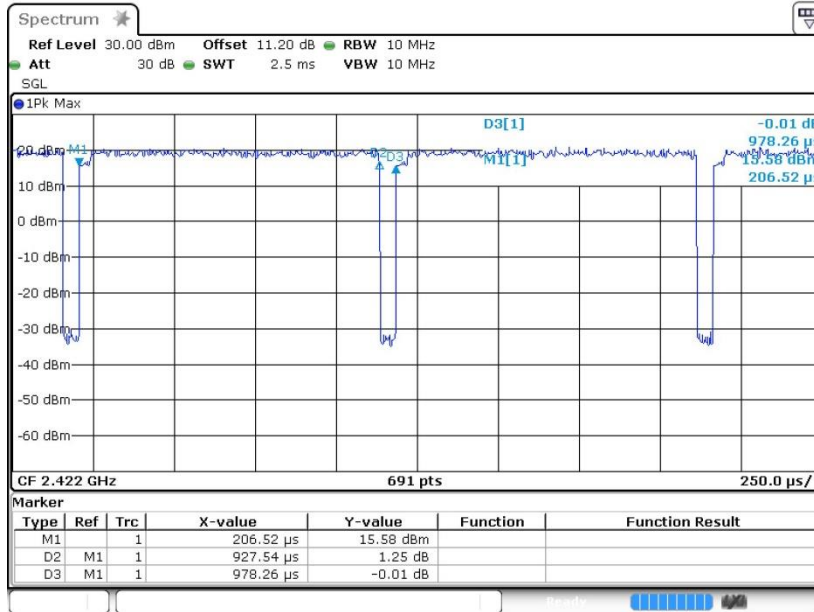

Date: 26.AUG.2021 15:58:05