

# TEST REPORT

**Product** : motorola smart stylus  
**Trade mark** : Motorola  
**Model/Type reference** : XT2201-S  
**Serial Number** : N/A  
**Report Number** : EED32N81246302  
**FCC ID** : IHDT6AA1  
**Date of Issue** : Feb. 15,2022  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Motorola Mobility LLC**  
**222 W Merchandise Mart Plaza Chicago, IL 60654 USA**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by: Martin Lee

Reviewed by: Avon Ma

Approved by: David Wang

Date: Feb. 15,2022

David Wang

Check No.: 2202231121



## 1 Version

Version No.	Date	Description
00	Feb. 15,2022	Original

**2 Test Summary**

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10:2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10:2013	N/A
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.209	ANSI C63.10:2013	PASS
Occupied Bandwidth	47 CFR Part 15 Subpart C Section 2.1049	ANSI C63.10:2013	PASS

N/A: The EUT is powered by DC , So Not Applicable.

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

## 3 Contents

<b>1 VERSION</b> .....	2
<b>2 TEST SUMMARY</b> .....	3
<b>3 CONTENTS</b> .....	4
<b>4 GENERAL INFORMATION</b> .....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST ENVIRONMENT AND MODE.....	6
4.4 DESCRIPTION OF SUPPORT UNITS.....	6
4.5 TEST LOCATION.....	6
4.6 DEVIATION FROM STANDARDS.....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	7
<b>5 EQUIPMENT LIST</b> .....	8
<b>6 TEST RESULTS AND MEASUREMENT DATA</b> .....	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 RADIATED SPURIOUS EMISSIONS.....	10
6.3 OCCUPIED BANDWIDTH.....	14
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP</b> .....	15
<b>APPENDIX 2 PHOTOGRAPHS OF EUT</b> .....	16

## 4 General Information

### 4.1 Client Information

Applicant:	Motorola Mobility LLC
Address of Applicant:	222 W Merchandise Mart Plaza Chicago, IL 60654 USA
Manufacturer:	Motorola Mobility LLC
Address of Manufacturer:	222 W Merchandise Mart Plaza Chicago, IL 60654 USA
Factory:	Shenzhen Sunwinon Electronics Co., Ltd.
Address of Factory:	Floor 1-6 of 4#Building of 101, No. 6-6, Yanshan avenue, Yanchuan community, Yanluo street, Bao'an district, Shenzhen, 518108, China

### 4.2 General Description of EUT

Product Name:	motorola smart stylus
Model No.:	XT2201-S
Trade mark:	Motorola
Frequency Range:	110~495kHz
Test Frequency:	400kHz
Modulation Type:	FSK
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Antenna Type:	Internal antenna
Antenna Gain:	0dBi
Power Supply:	Lithium battery: DC 3.85V
Test Voltage:	DC 3.85V
Sample Received Date:	Dec. 02, 2021
Sample tested Date:	Dec. 02, 2021 to Jan. 10, 2022

### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
<b>Radiated Spurious Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>RF Conducted:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>Test mode:</b>	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Phone	Motorola	motorola edge 30 pro	/	Client

### 4.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

### 4.6 Deviation from Standards

None.

### 4.7 Abnormalities from Standard Conditions

None.

### 4.8 Other Information Requested by the Customer

None.

**4.9 Measurement Uncertainty (95% confidence levels, k=2)**

	<b>Item</b>	<b>Measurement Uncertainty</b>
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 5 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	R&S	FSP40	100416	04-29-2021	04-28-2022

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9136-401	10-17-2021	10-16-2022
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-15-2021	04-14-2024
Receiver	R&S	ESC17	100009	04-15-2021	04-14-2022
Multi device Controller	matureo	NCD/070/10711 112	---	---	---
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	06-24-2021	06-23-2022
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---



## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b>	Please see Internal photos
The antenna is Internal antenna. The best case gain of the antenna is 0dBi.	

## 6.2 Radiated Spurious Emissions

**Test Requirement:** 47 CFR Part 15C Section 15.231(b) and 15.209

**Test Method:** ANSI C63.10 2013

**Test Site:** Measurement Distance: 3m (Semi-Anechoic Chamber)

**Receiver Setup:**

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

**Test Setup:**

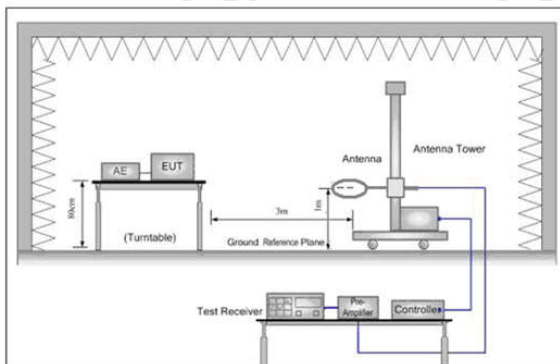


Figure 1. Below 30MHz

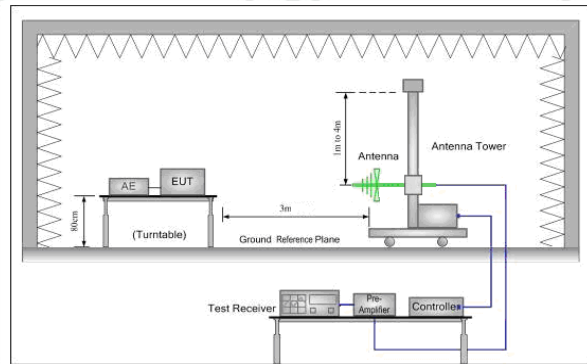


Figure 2. 30MHz to 1GHz

**Test Procedure:**

**Below 1GHz test procedure as below:**

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Limit:**  
(Spurious  
Emissions)

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3


Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

**Test Mode:** Transmitting mode

**Test Results:** Pass

## Measurement Data


### 9kHz~150kHz:

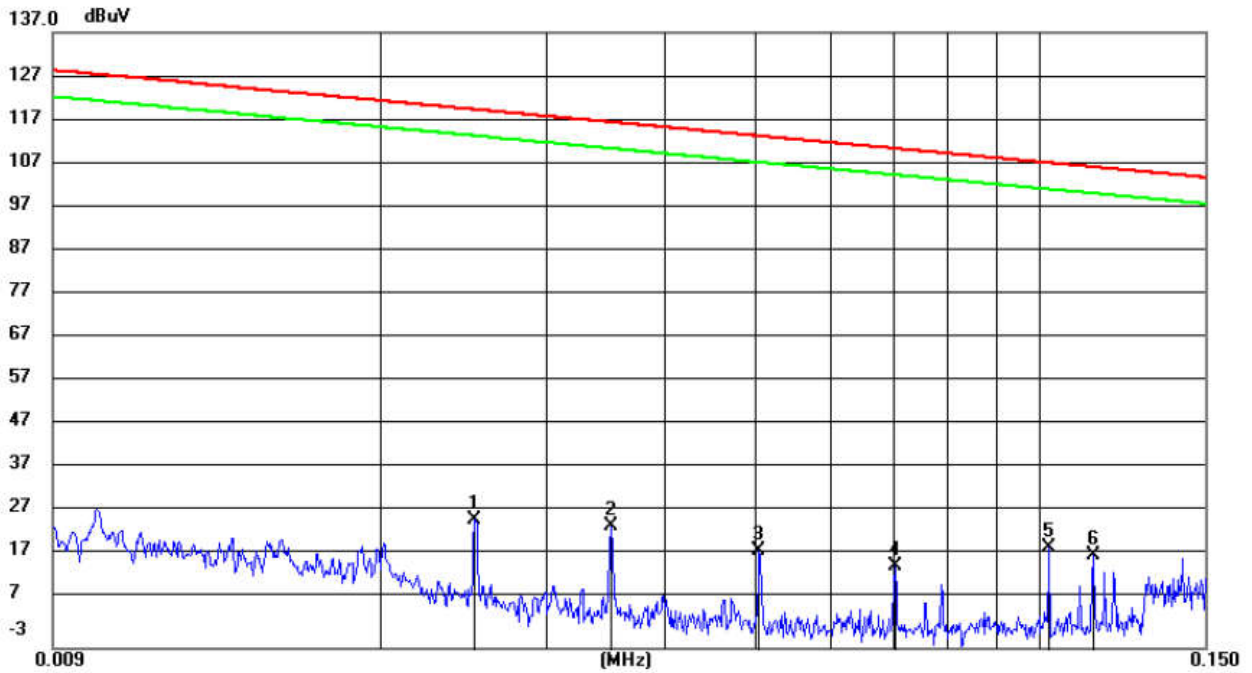

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.0252	34.49	-8.14	26.35	119.43	-93.08			peak
2		0.0351	35.69	-10.90	24.79	116.57	-91.78			peak
3		0.0504	30.04	-10.93	19.11	113.45	-94.34			peak
4		0.0703	26.66	-10.99	15.67	110.57	-94.90			peak
5	*	0.1025	30.81	-10.75	20.06	107.31	-87.25			peak
6		0.1141	28.99	-10.71	18.28	106.39	-88.11			peak

**150kHz~30MHz:**

112.0 dBuV

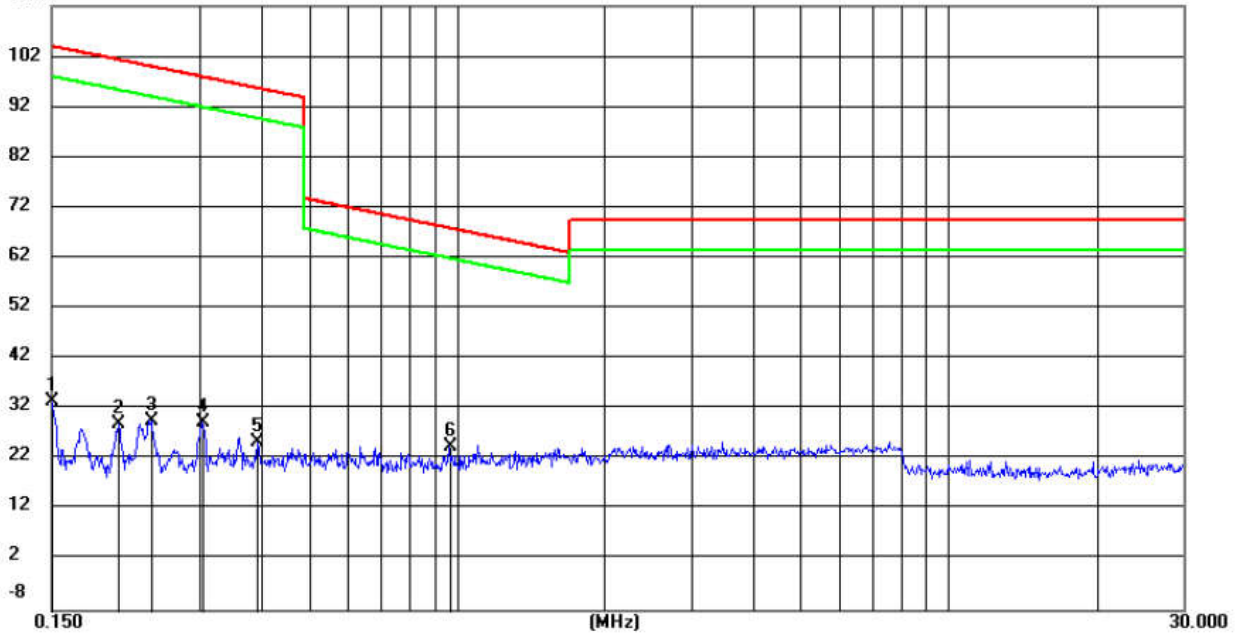

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1500	44.13	-10.67	33.46	104.02	-70.56			peak
2		0.2050	39.63	-10.63	29.00	101.33	-72.33			peak
3		0.2391	40.22	-10.60	29.62	100.00	-70.38			peak
4		0.3035	40.05	-10.59	29.46	97.94	-68.48			peak
5		0.3933	35.91	-10.58	25.33	95.70	-70.37			peak
6	*	0.9633	35.41	-10.81	24.60	67.93	-43.33			peak

**Remark:**

- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading - Correct Factor  
 Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- The highest frequency is 495kHz of the EUT, so upper frequency of measurement range is 30MHz.

## 6.3 Occupied Bandwidth


**Test Requirement:** 47 CFR Part 15C Section 2.1049

**Test Method:** ANSI C63.10 2013

**Limit:**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated are each equal to 0.5% of the total mean power radiated by a given emission.

**Test Setup:**

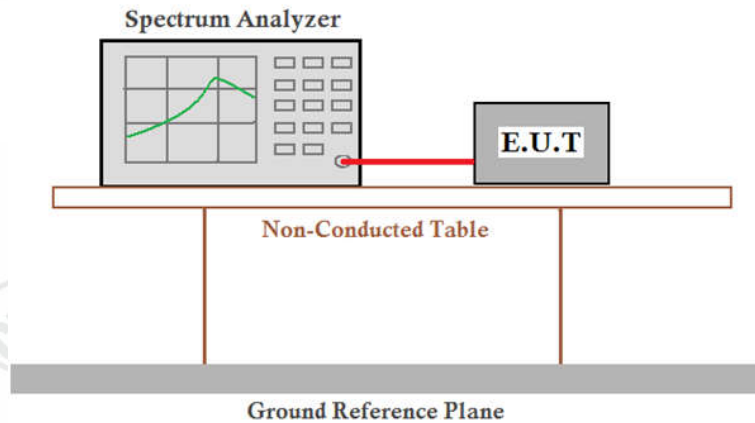


**Test Mode:** Transmitting mode

**Test Results:** Pass

**Measurement Data**

Occupied bandwidth	Results
24.6kHz	Pass

**Test plot as follows:**

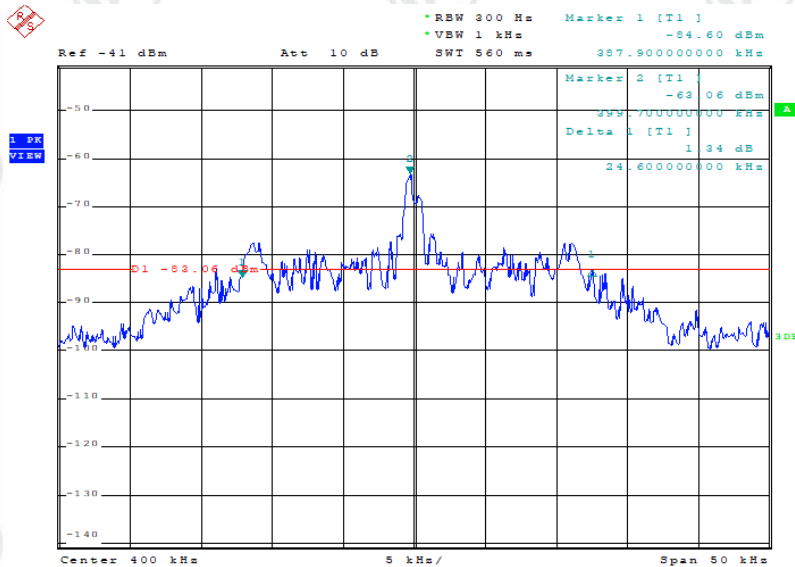

Date: 6.JAN.2022 15:46:17