



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1


Motorola Test Report


Applicant: Motorola
5555 N. Beach Street
Fort Worth, TX 76137
USA


Equipment Under Test: UBS CDMA XMI Transceiver at 800MHz

In Accordance With: FCC PART 22(H)
Cellular Radiotelephone Service

Tested By: Motorola
5555 N. Beach Street
Fort Worth, TX 76137
USA

TESTED BY:  DATE: 4 Oct 2007
Darryl Aucoin Principal Test Engineer

 DATE: 4 Oct 2007
Melissa Vandrie Lead Test Engineer

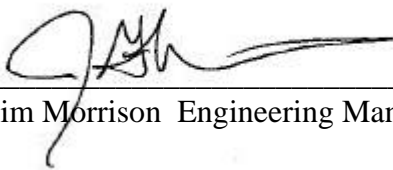APPROVE BY:  DATE: 4 Oct 2007
Jim Morrison Engineering Manager

Total Pages: 32



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1

Table of Contents

Section 1	Summary of Test Results
Section 2	General Equipment Specification
Section 3	RF Power Output
Section 4	Occupied Bandwidth
Section 5	Spurious Emissions at Antenna Terminals
Section 6	Field Strength of Spurious
Section 7	Frequency Stability
Section 8	Test Equipment List



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1

Section 1 Summary of Test Results

Manufacturer: Motorola
Model No.: UBS CDMA 800MHz XMI Transceiver
Serial No.: 575G6Y02TS
General: All measurements are traceable to national standards

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22,

New Submission Production Unit

Class II Permissive Change Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE: NONE



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1

NAME OF TEST	PARA. NO.	SPEC. LIMIT	RESULTS
RF Power Output	2.1046	33 dBW + 10log(X/Y) dBW	Complies
Occupied Bandwidth	2.1049	Not Specified	Complies
Spurious Emissions at Antenna Terminals	2.1051	-13 dBm	Complies
Field Strength of Spurious Radiation	2.1053	-13 dBm	Complies
Frequency Stability	2.1055	Must remain within authorized bandwidth	Complies



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1

Section 2 **General Equipment Specification**

Power Supply: 27 VDC

Frequency Range: 869.88 MHz to 893.07 MHz

Type(s) of Modulation: F3E (Voice) F1D F2D W7D F9W
 — — — — X

Emissions Designator: 1M30F9W

Output Impedance: 50 ohms

RF Power Output: 43dBm Conducted

Selection of Operating Frequency: Selectable by operator


Power Output Adjustment Capability: 25dBm minimum power



Description of EUT

The UBS CDMA 800MHz XMI Transceiver is a Base Station transceiver.

System Diagram

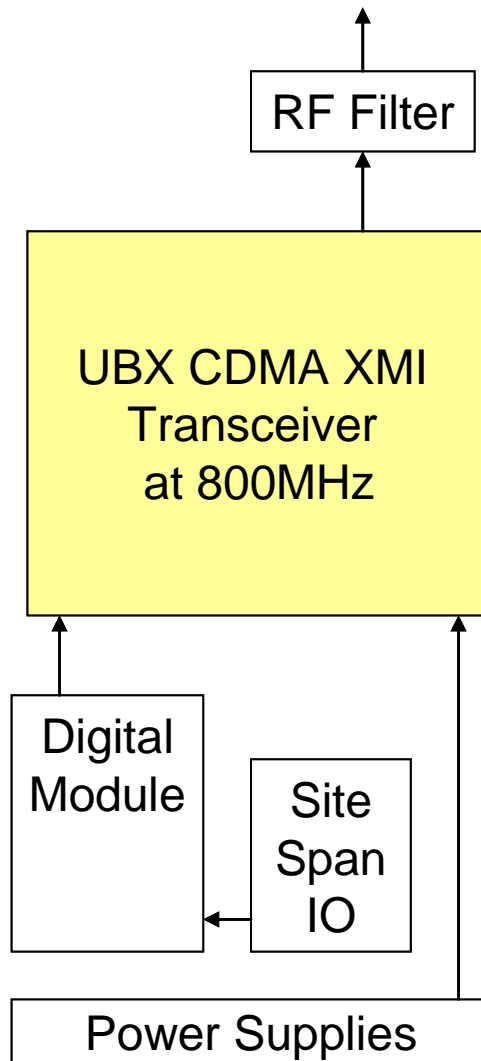



Section 3 RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: Darryl Aucoin, Principal Test Engineer	DATE: Oct 4, 2007

Test Result: Complies

Measurement Data: See Tables

Test Equipment: 13, 15, 16

MAX RF POWER OUTPUT

CDMA 1X QPSK		
Frequency (MHz)	Power (dBm)	Power (Watts)
869.88	44.15	26.0
893.07	44.19	26.2

CDMA EVDO QPSK		
Frequency (MHz)	Power (dBm)	Power (Watts)
869.88	44.13	25.9
893.07	44.09	25.6

CDMA EVDO 16QAM		
Frequency (MHz)	Power (dBm)	Power (Watts)
869.88	44.2	26.3
893.07	44.04	25.4



Section 4 Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
TESTED BY: Darryl Aucoin, Principal Test Engineer	DATE: Oct 4, 2007

Test Result: Complies

Measurement Data: See Attached Tables and Plots

Test Equipment: 13, 15, 16

OCCUPIED BANDWIDTH


CDMA 1X QPSK		
Frequency (MHz)	Occupied BW (MHz)	Maximum Limit (MHz)
869.88	1.2680	1.3
893.07	1.2681	1.3

CDMA EVDO QPSK		
Frequency (MHz)	Occupied BW (MHz)	Maximum Limit (MHz)
869.88	1.2776	1.3
893.07	1.2605	1.3


CDMA EVDO 16QAM		
Frequency (MHz)	Occupied BW (MHz)	Maximum Limit (MHz)
869.88	1.2730	1.3
893.07	1.2610	1.3



Occupied Bandwidth 869.88MHz in CDMA 1X QPSK

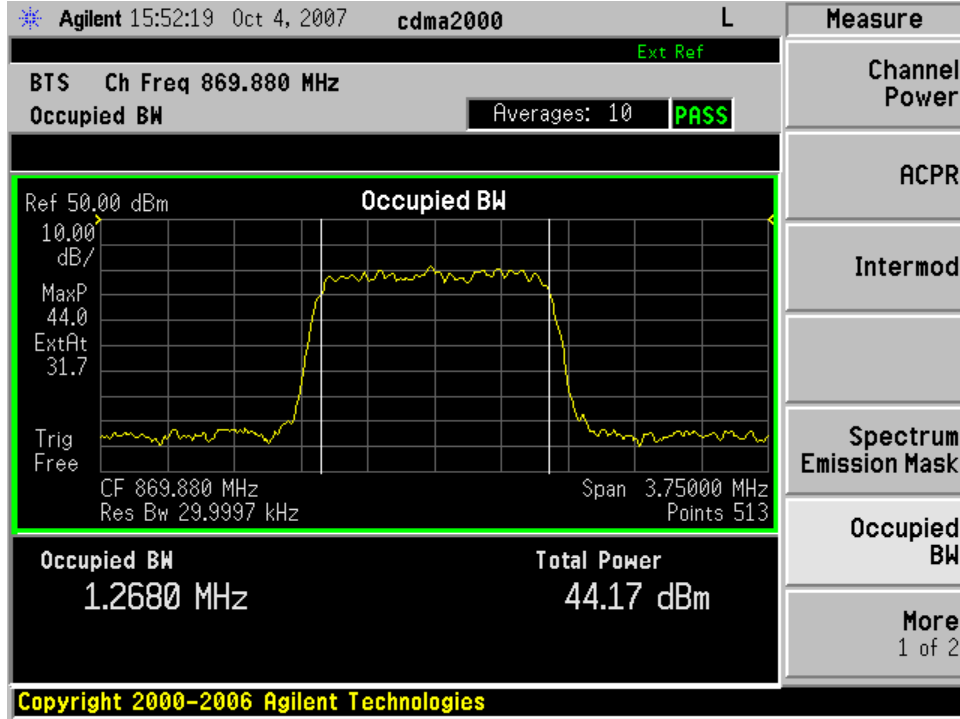


Occupied Bandwidth 893.07MHz in CDMA 1X QPSK

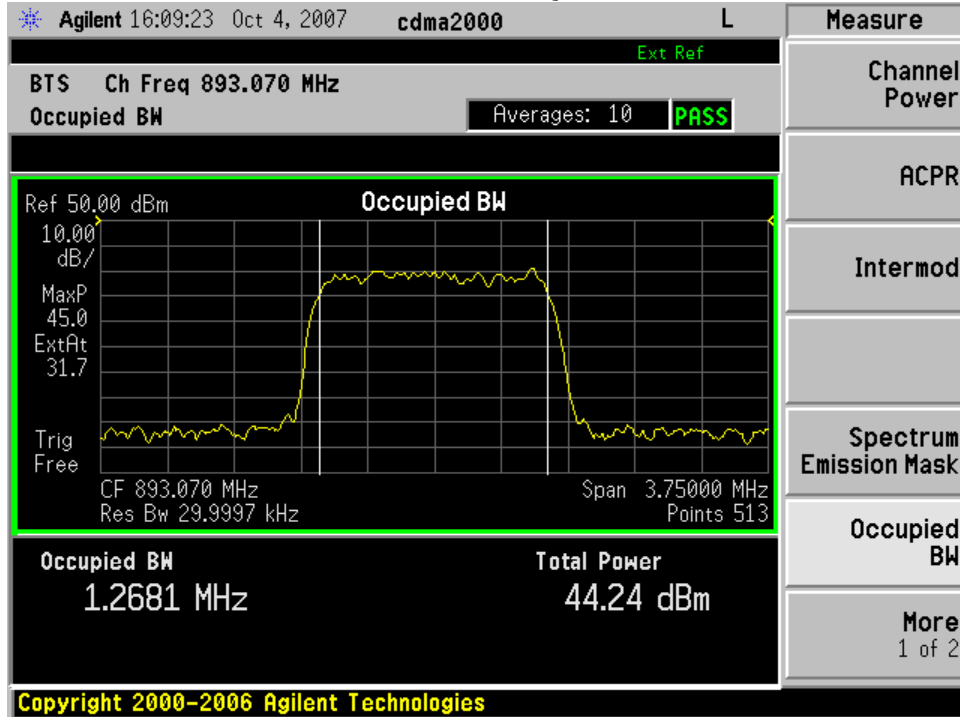




Occupied Bandwidth 869.88MHz in CMDA EVDO QPSK

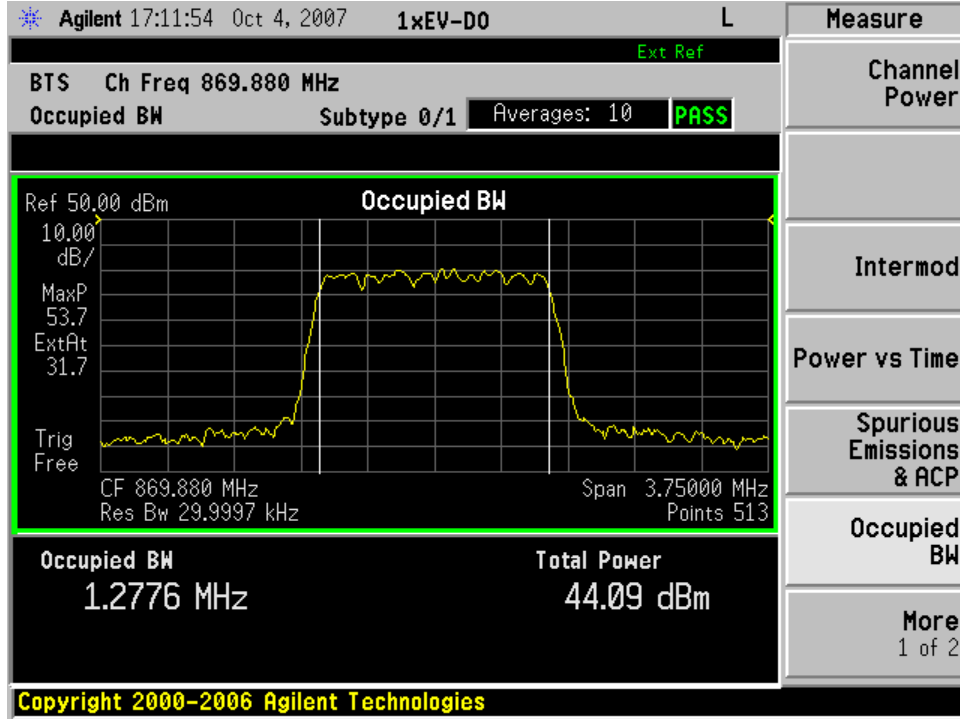


Occupied Bandwidth 893.07MHz in CMDA EVDO QPSK

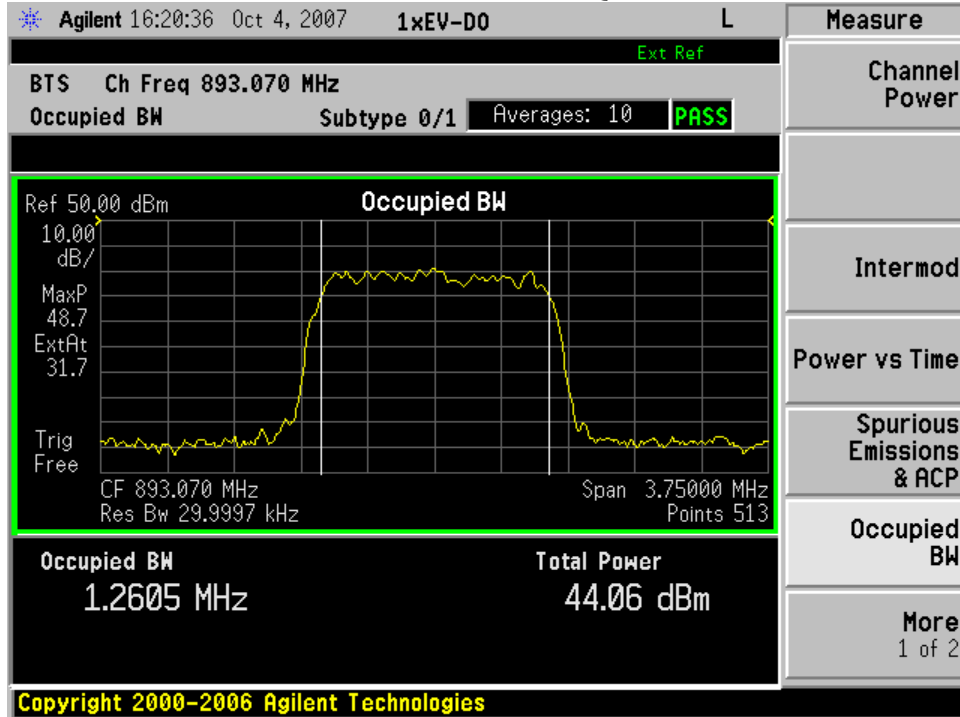




Occupied Bandwidth 869.88MHz in CMDA EVDO 16QAM

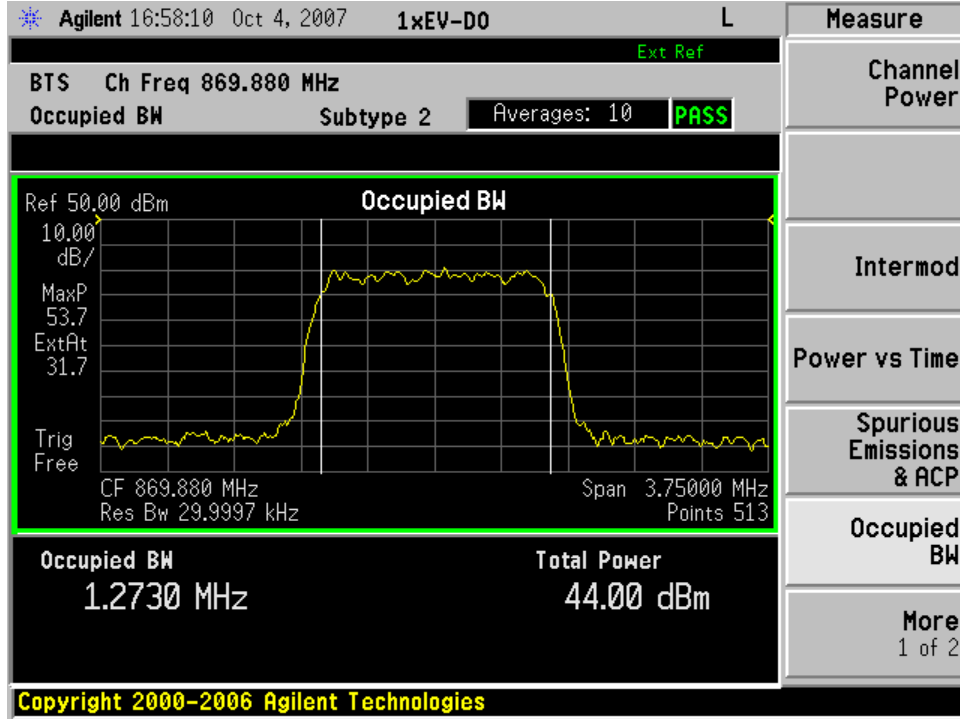

Occupied Bandwidth 893.07MHz in CMDA EVDO 16QAM

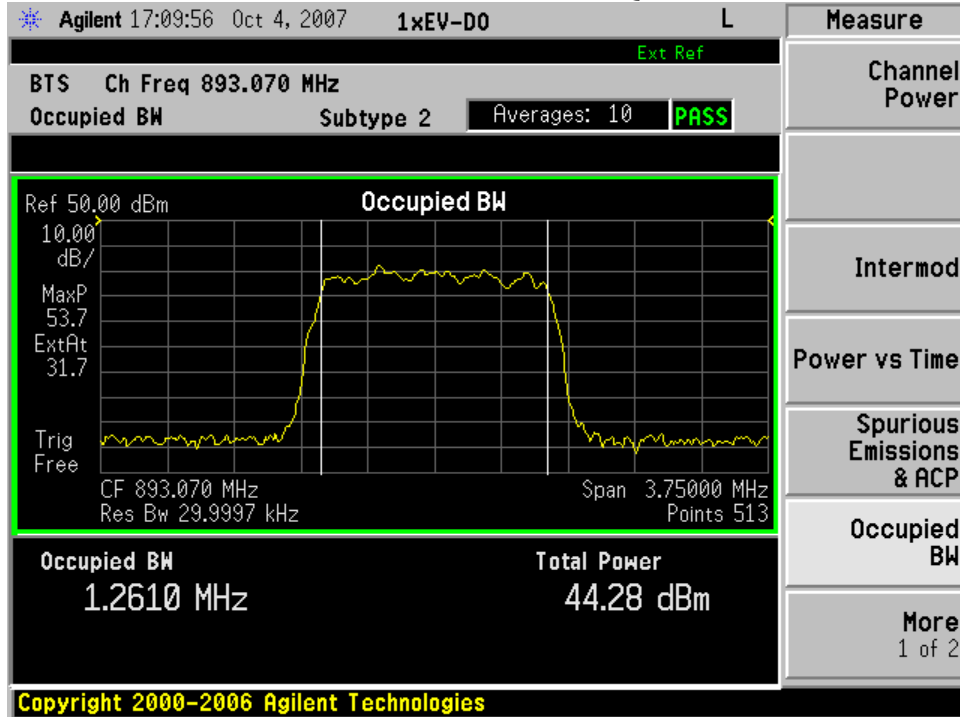



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1

Section 5 Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions at Antenna Terminals PARA. NO.: 2.1051

TESTED BY: Darryl Aucoin, Principal Test Engineer DATE: Oct 4, 2007

Test Result: Complies


Measurement Data: See Attached Plots

Test Equipment: 13, 15, 16, 17


SPURIOUS EMISSIONS AT ANTENNA TERMINALS



Lower Band Edge 869.88MHz in CDMA 1X QPSK

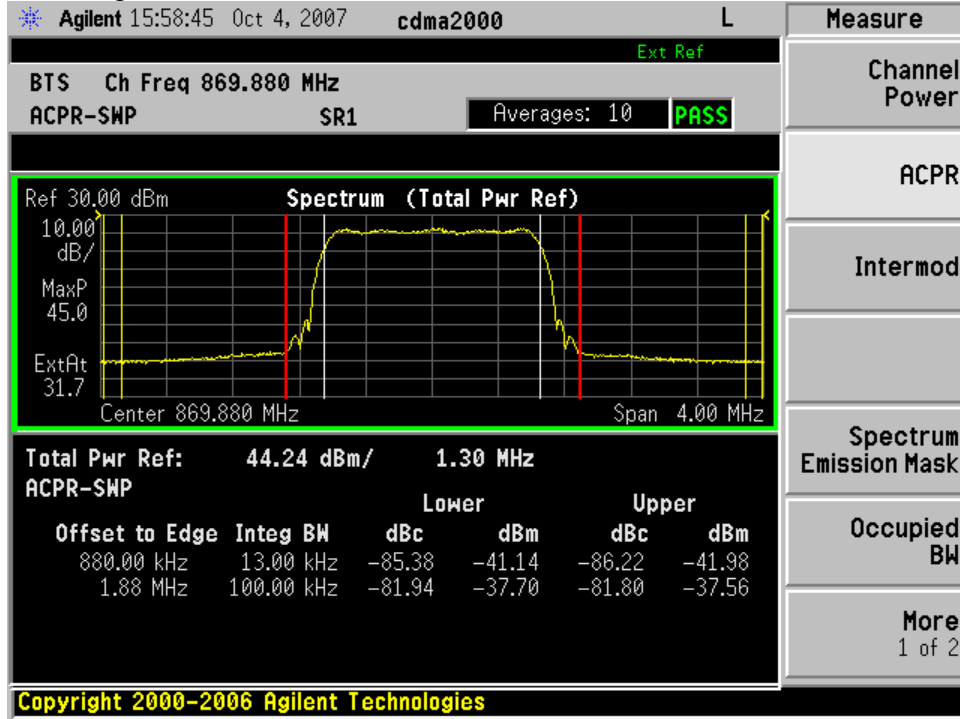


Upper Band Edge 893.07MHz in CDMA 1X QPSK

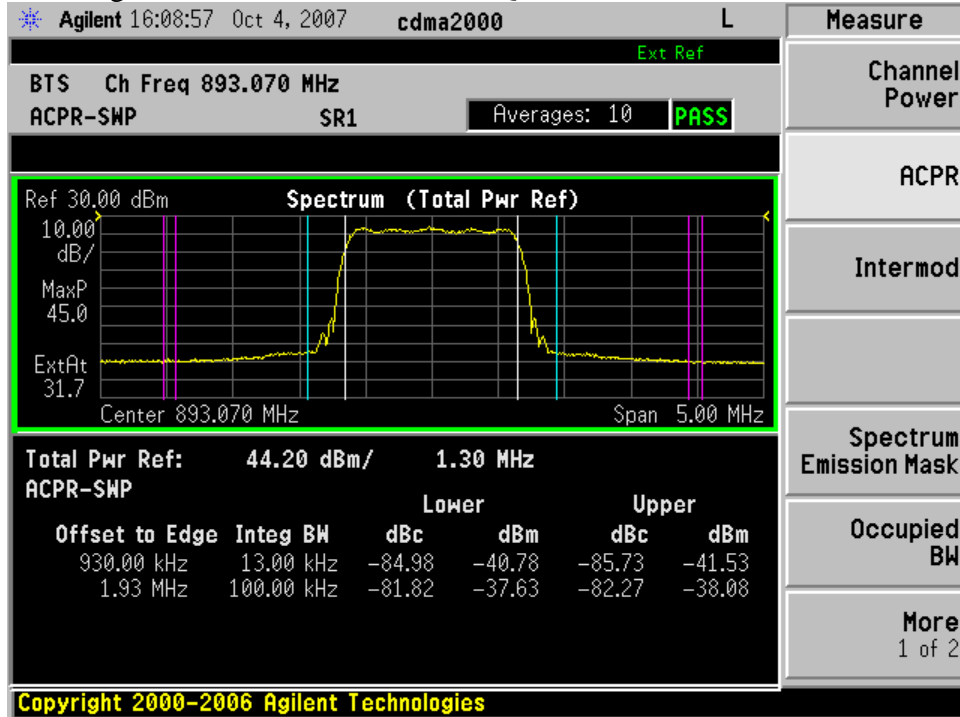




Lower Band Edge 869.88MHz in CDMA EVDO QPSK

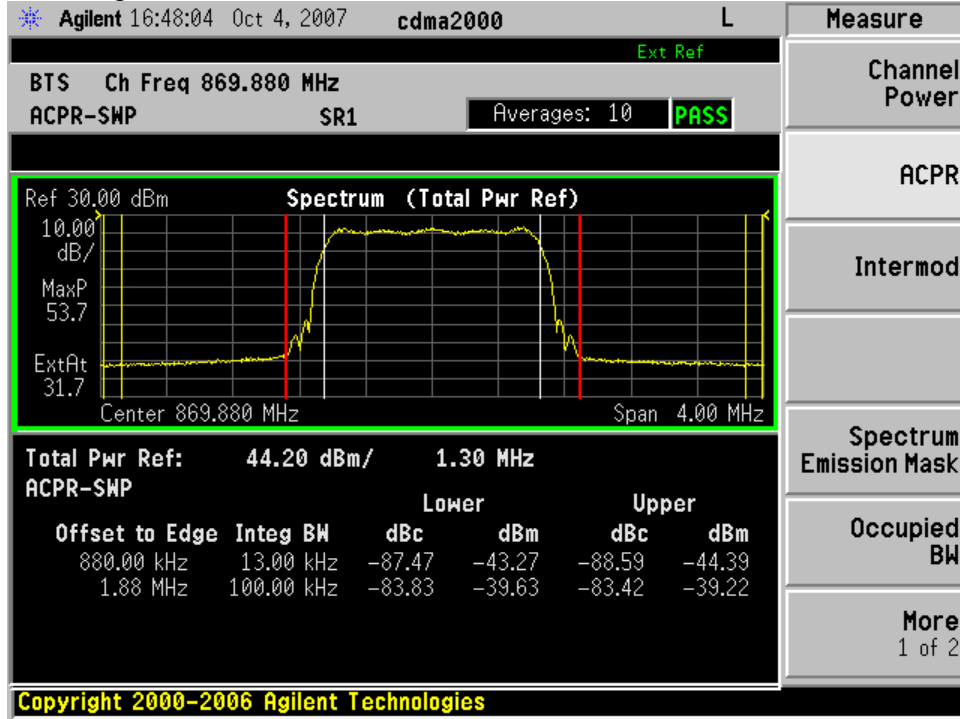


Upper Band Edge 893.07MHz in CDMA EVDO QPSK

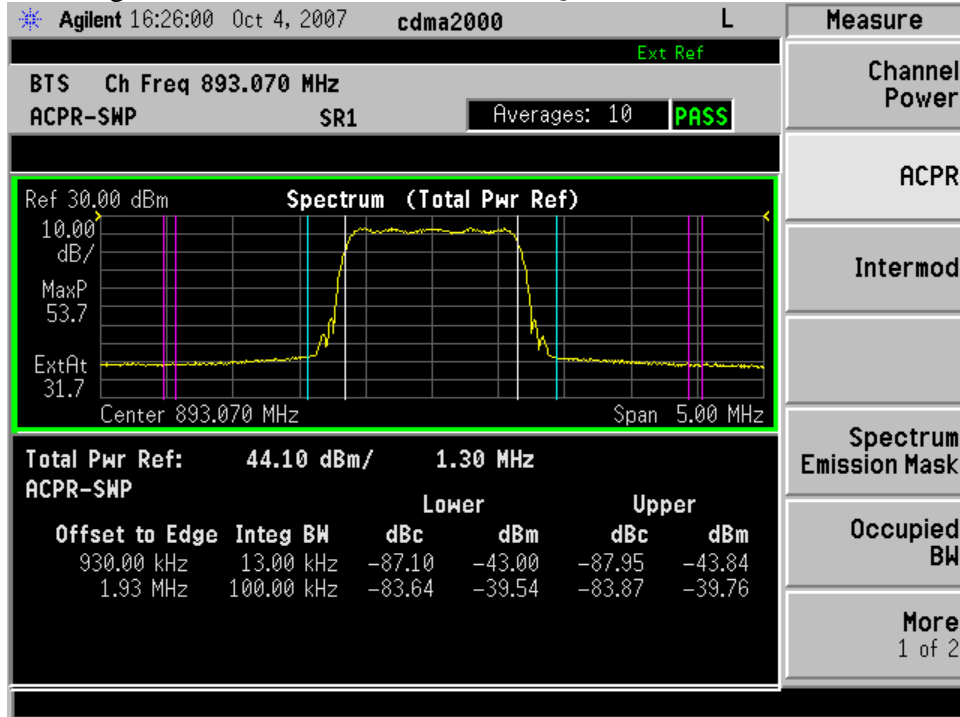




Lower Band Edge 869.88MHz in CDMA EVDO 16QAM

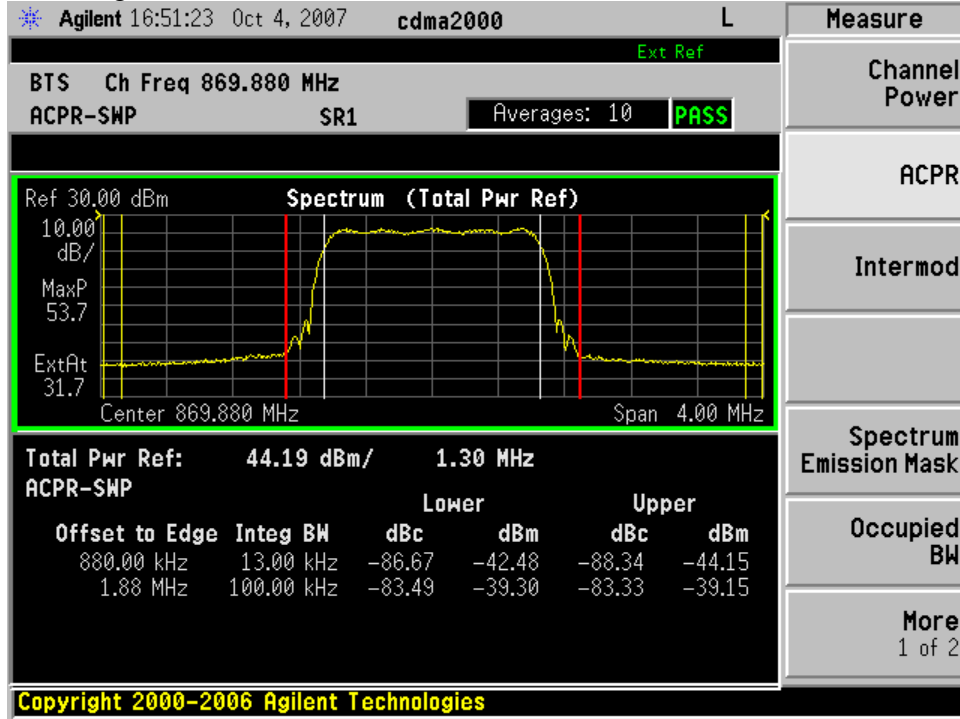


Upper Band Edge 893.07MHz in CDMA EVDO 16QAM

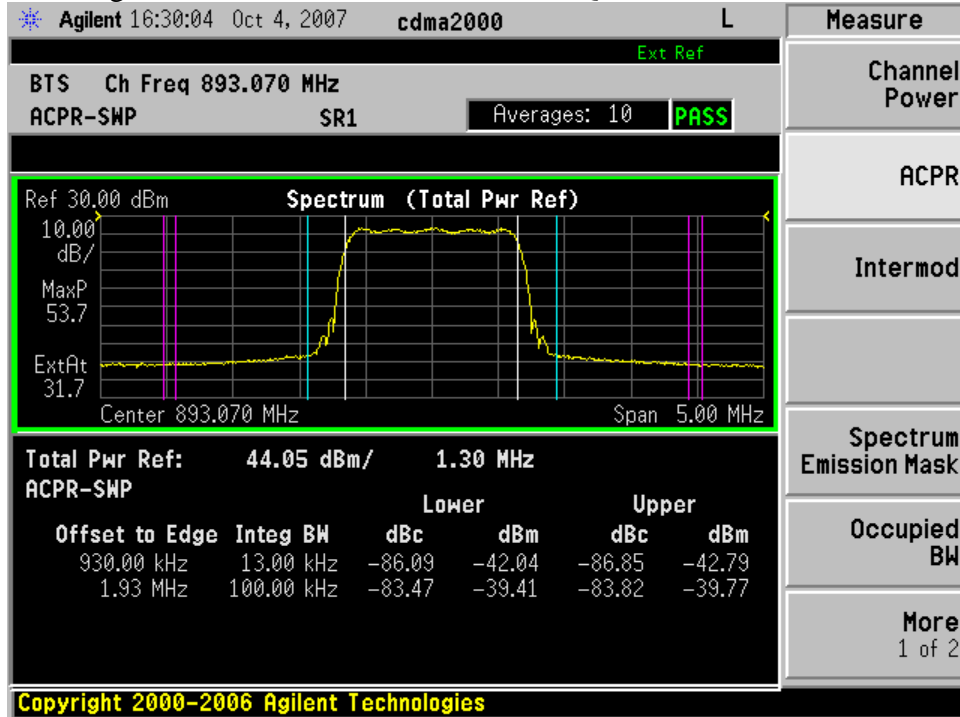




Spurious 30MHz to 3GHz for 869.88MHz in CDMA 1X QPSK

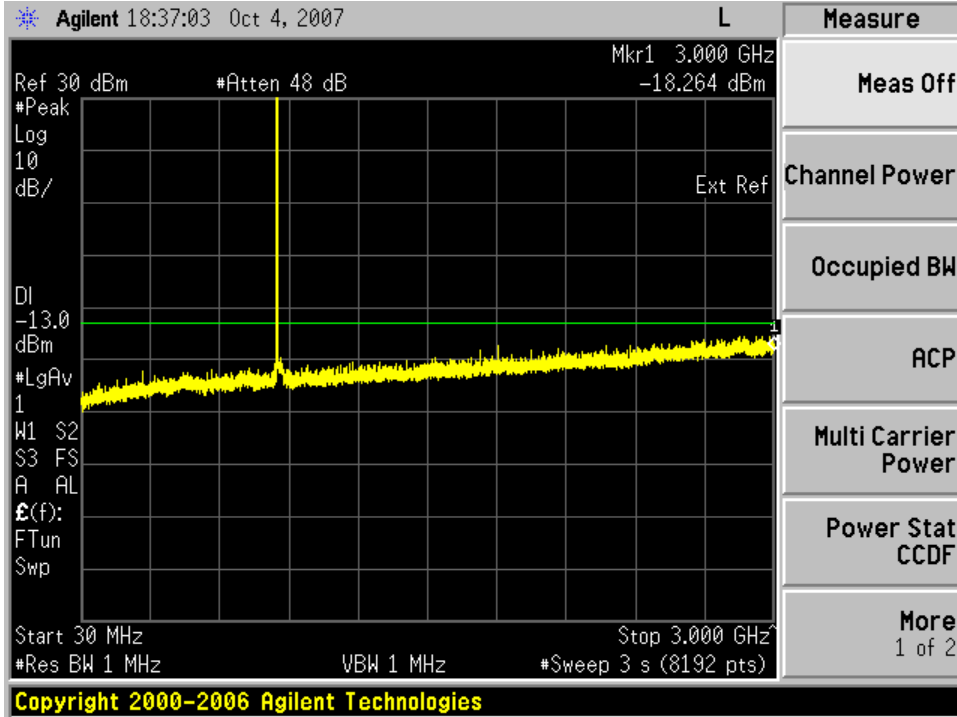


Spurious 3GHz to 9GHz for 869.88MHz in CDMA 1X QPSK

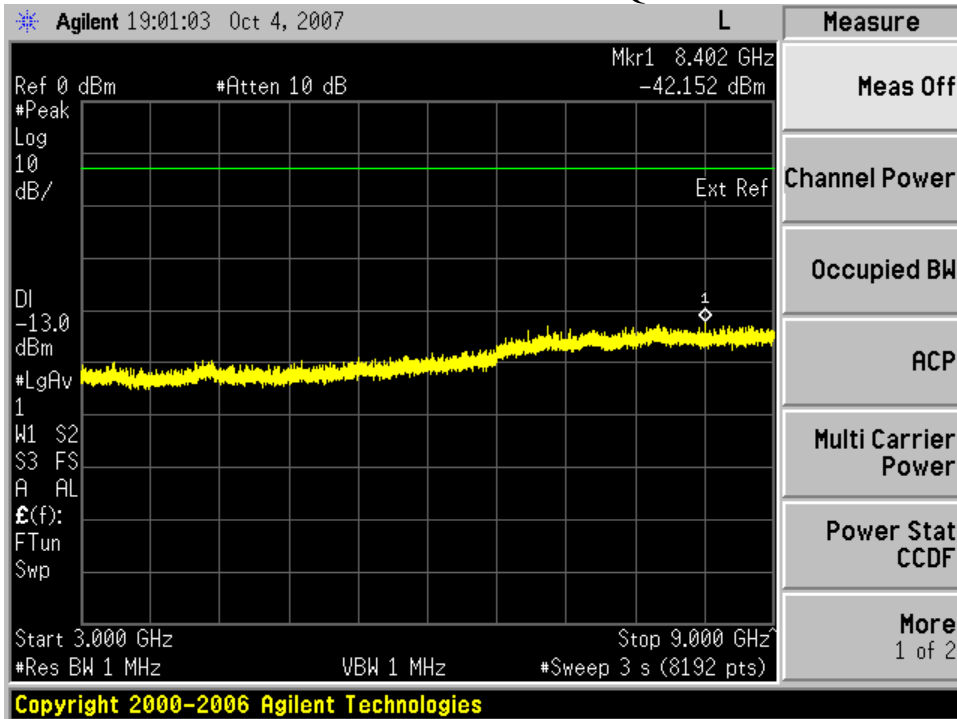




Spurious 30MHz to 3GHz for 893.07MHz in CDMA 1X QPSK

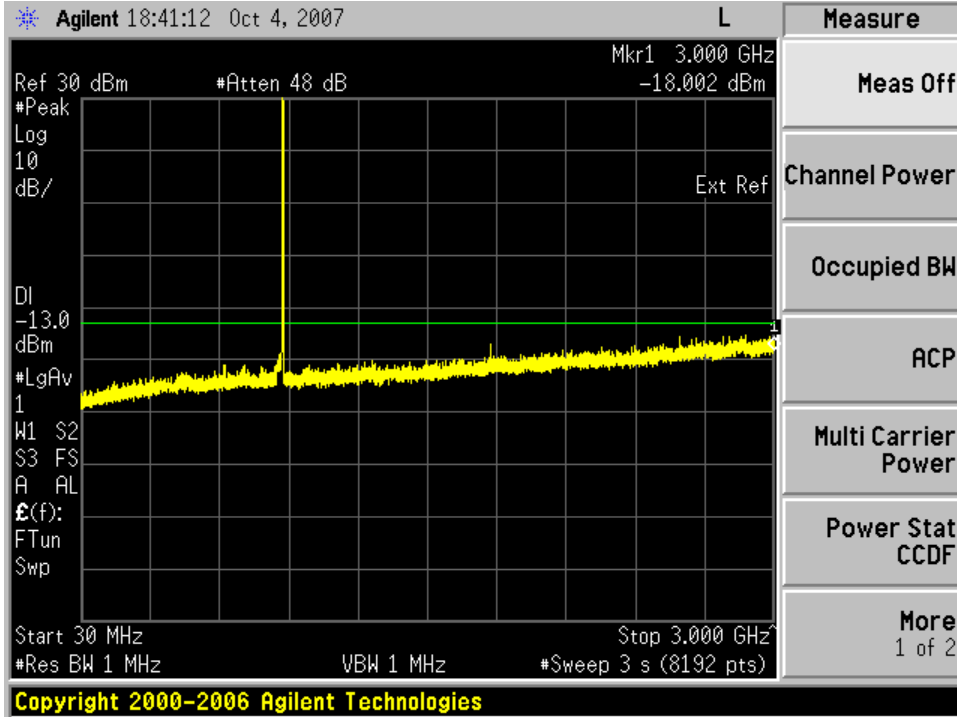


Spurious 3GHz to 9GHz for 893.07MHz in CDMA 1X QPSK

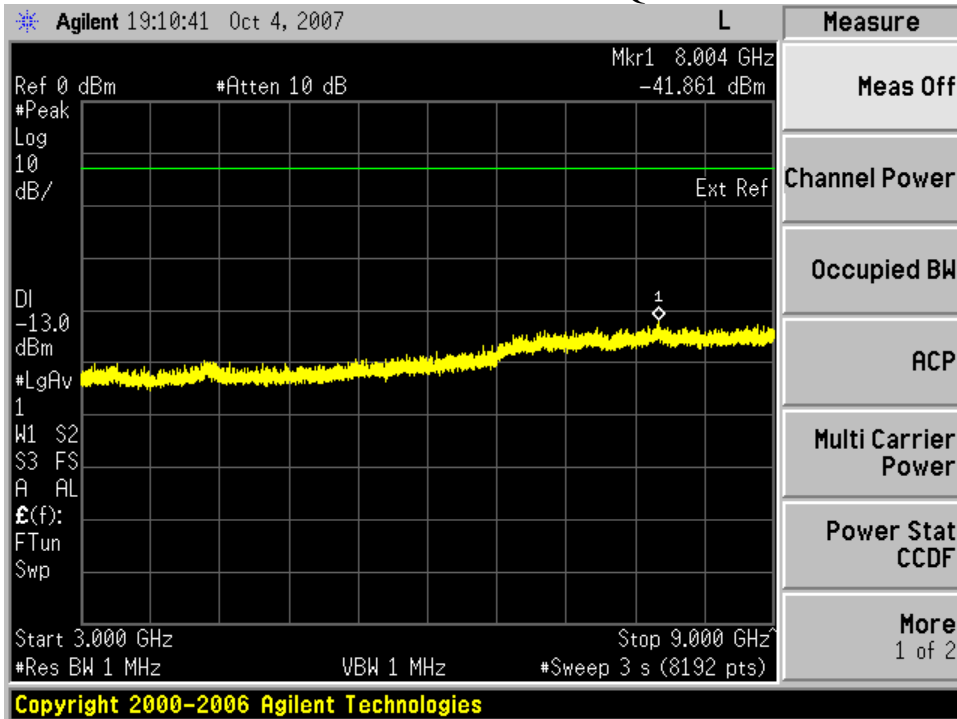




Spurious 30MHz to 3GHz for 869.88MHz in CDMA EVDO QPSK

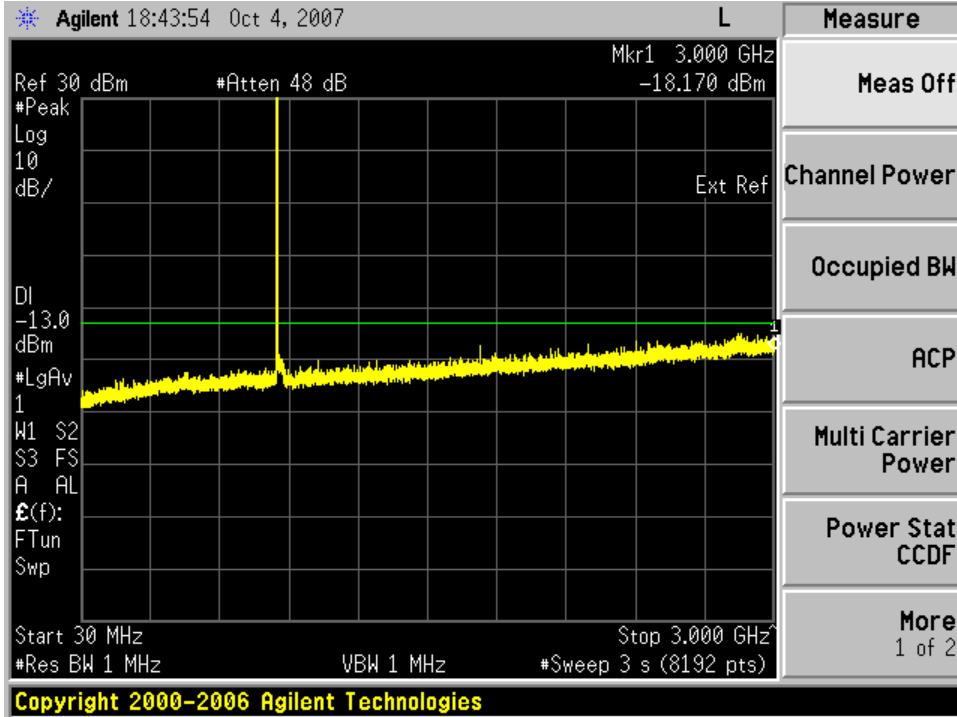


Spurious 3GHz to 9GHz for 869.88MHz in CDMA EVDO QPSK

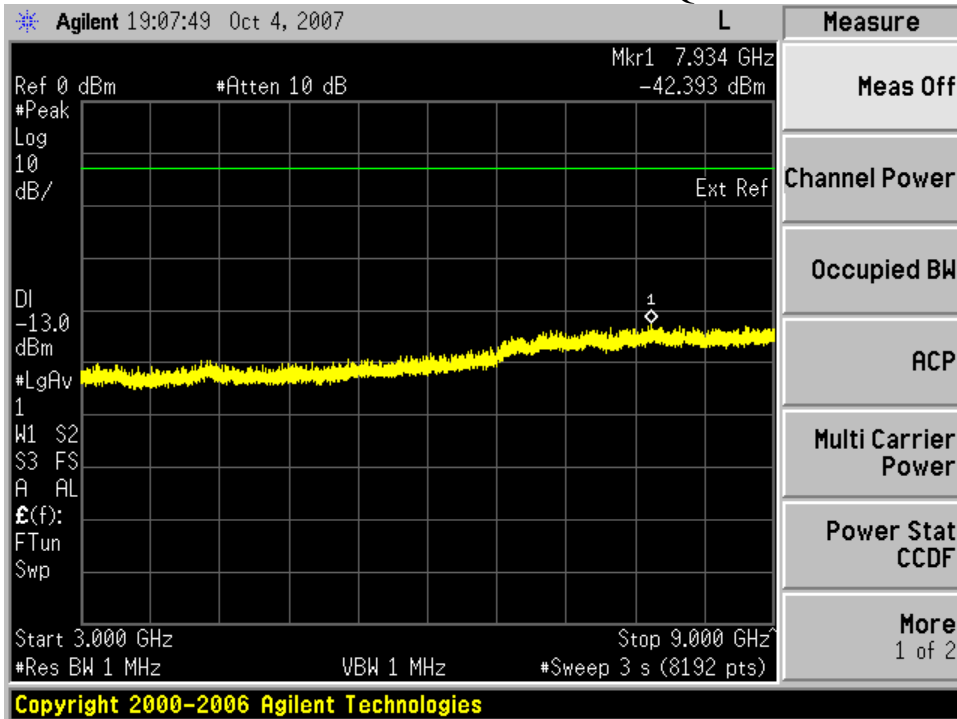




Spurious 30MHz to 3GHz for 893.07MHz in CDMA EVDO QPSK

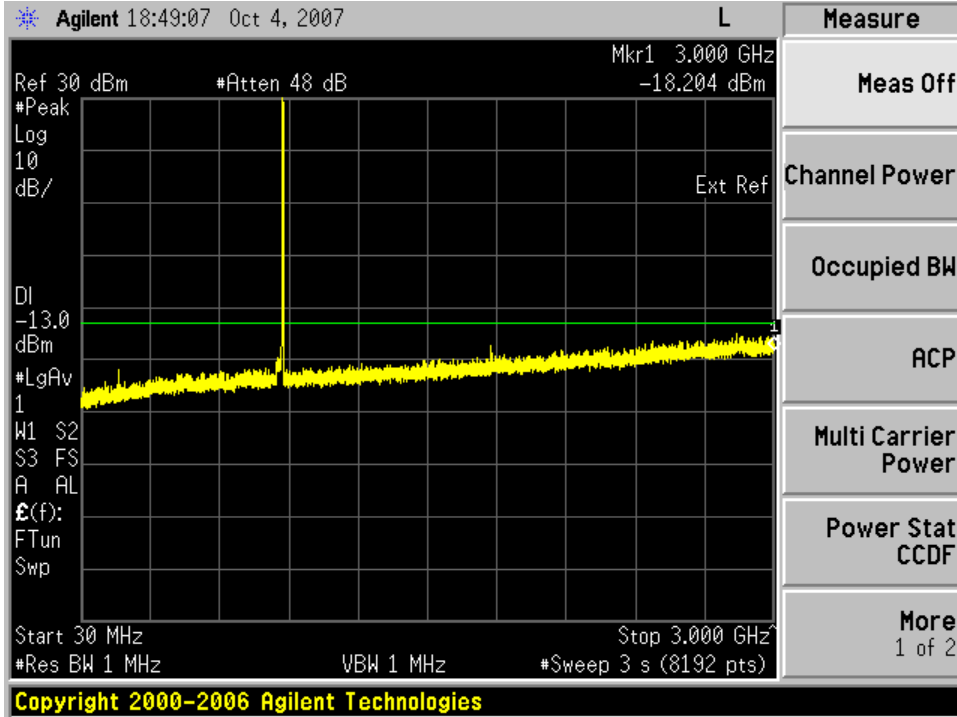


Spurious 3GHz to 9GHz for 893.07MHz in CDMA EVDO QPSK

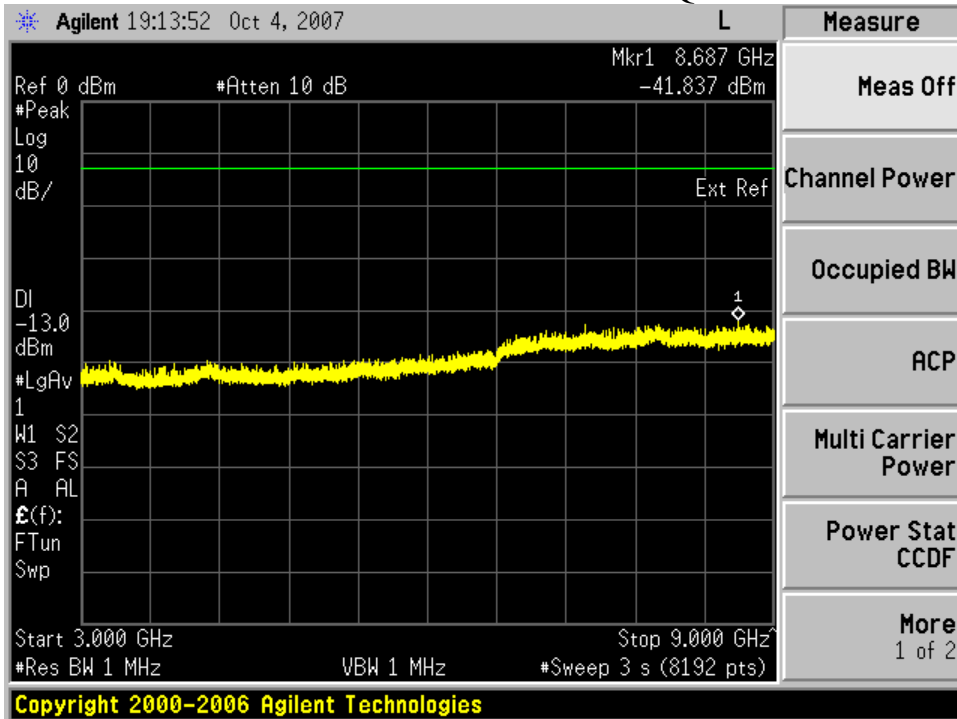




Spurious 30MHz to 3GHz for 869.88MHz in CDMA EVDO 16QAM

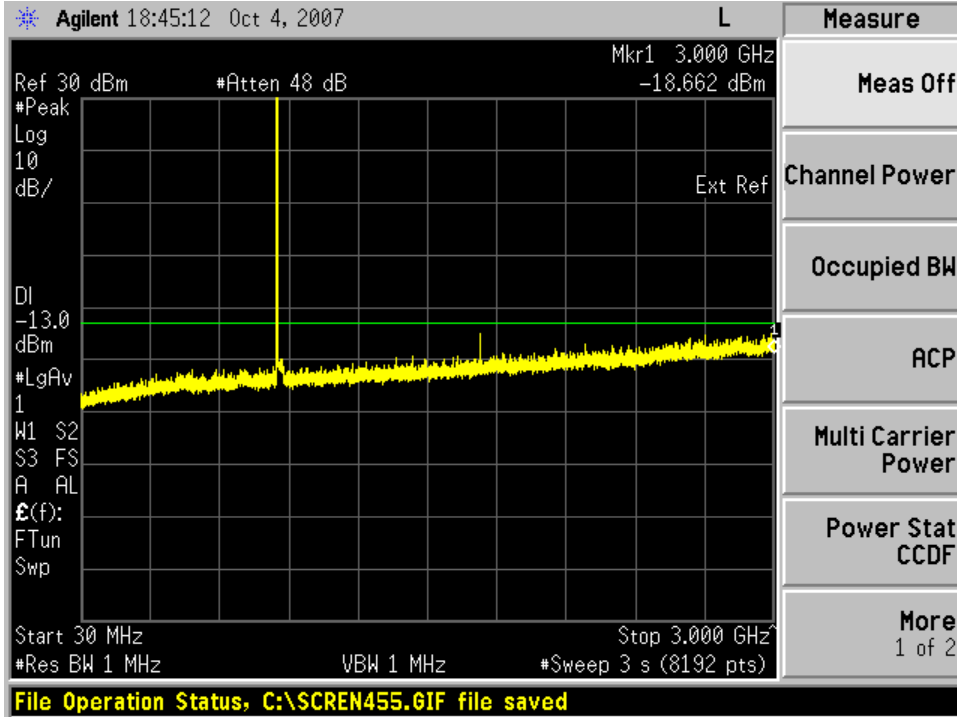


Spurious 3GHz to 9GHz for 869.88MHz in CDMA EVDO 16QAM

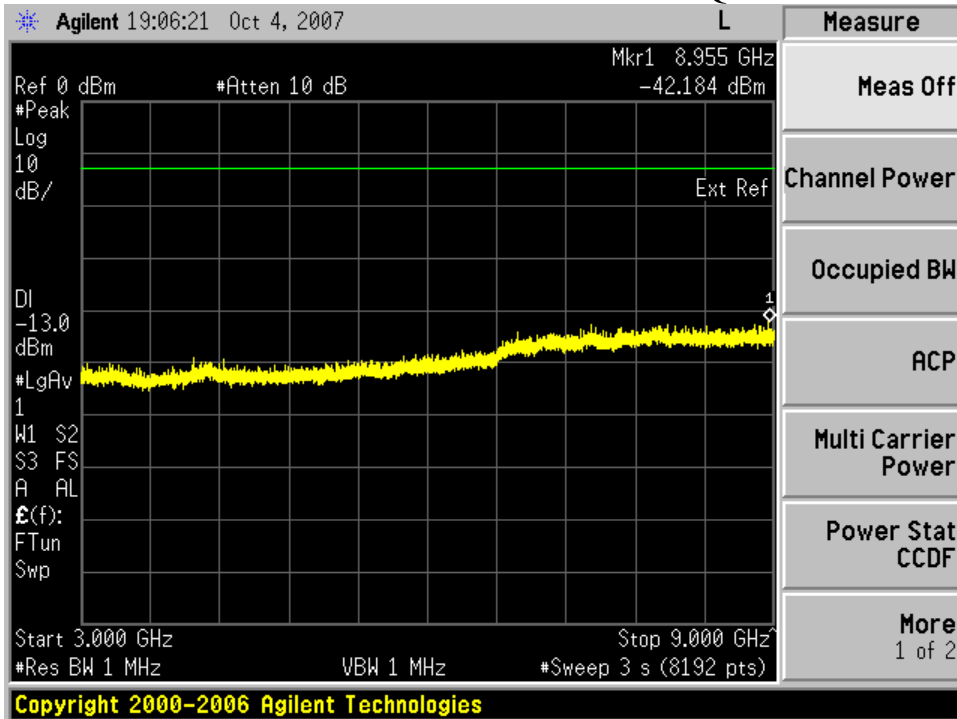




Spurious 30MHz to 3GHz for 893.07MHz in CDMA EVDO 16QAM

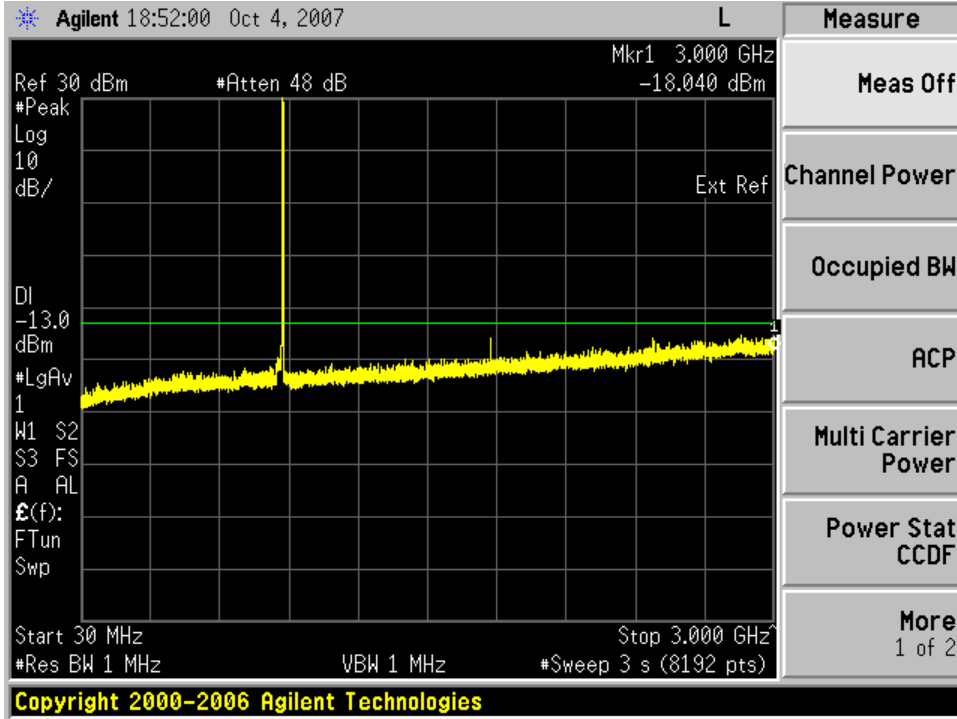

Spurious 3GHz to 9GHz for 893.07MHz in CDMA EVDO 16QAM

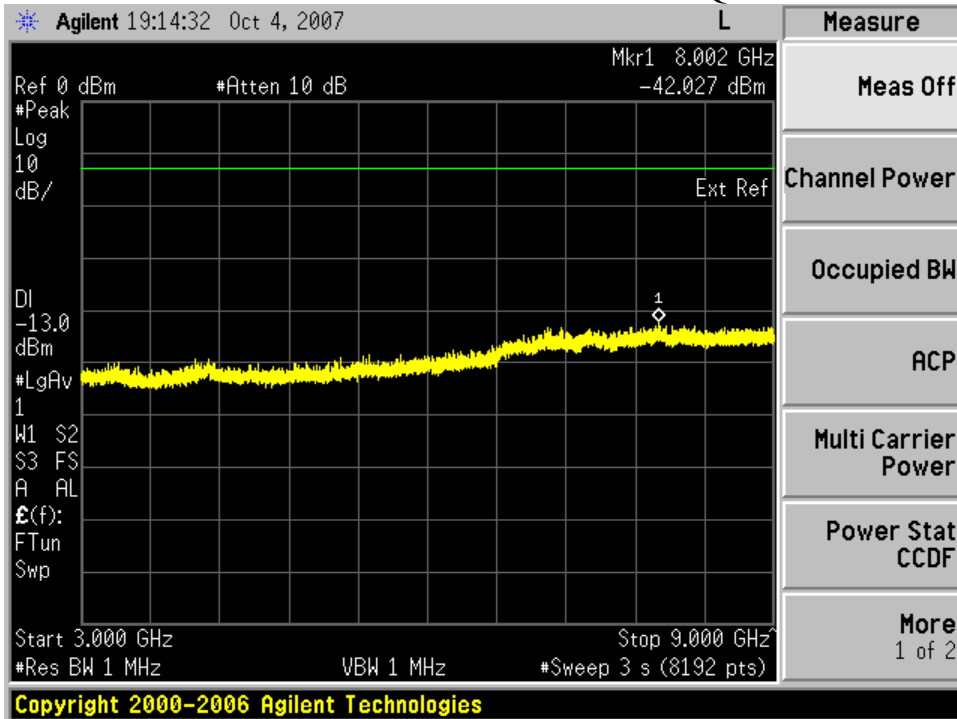



Section 6 Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
TESTED BY: Don Ahrens, Test Technician	DATE: Oct 4, 2007

Test Result: Complies

Measurement Data: See Attached Table

Test Equipment: 1,2,3,4,5,6,7,8,9,10,11,12,14

FIELD STRENGTH OF SPURIOUS

The spectrum was searched from 30MHz to the 10th harmonic of the carrier

SPUR FREQUENCY (GHz)	DISTANCE MEASURED (meters)	WORST CASE SPUR LEVEL MEASURED (dBuV/meter)	WORST CASE SPUR LEVEL MEASURED (dBm)	FCC MAX LIMIT (dBm)
3.54276	3	48.2	-47.0	-13



Section 7 Frequency Stability


NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
TESTED BY: Melissa Vandrie, Lead Test Engineer	DATE: Aug 29, 2007


Test Result: Complies

Measurement Data: See Plots

Test Equipment: 13, 15, 16

FREQUENCY STABILITY

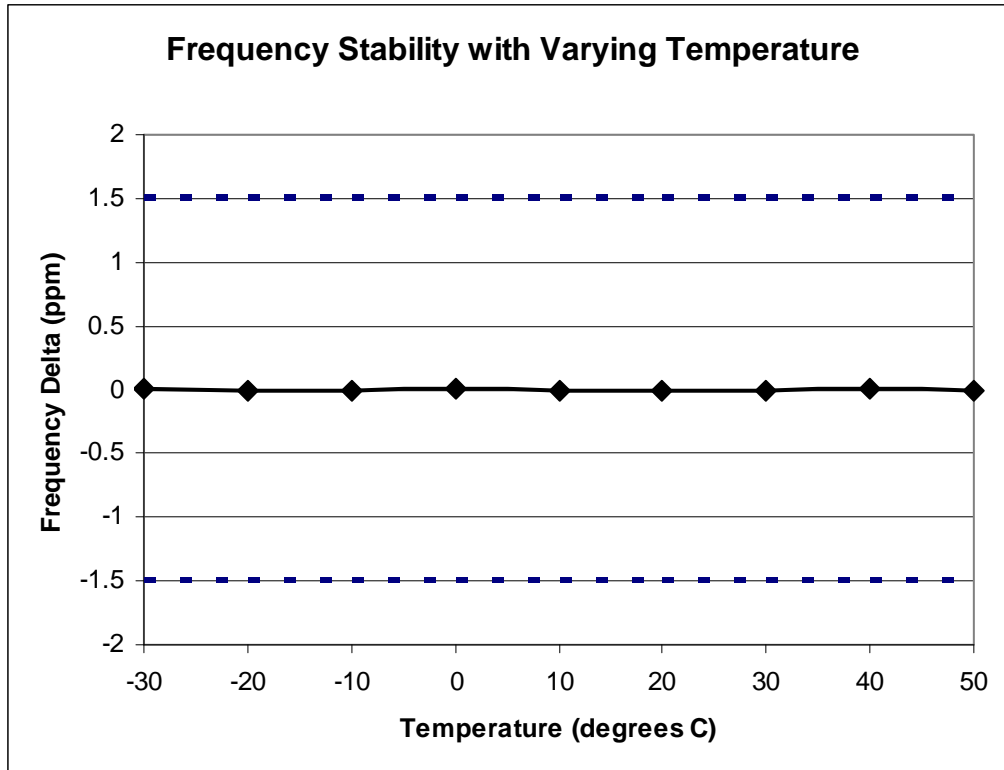

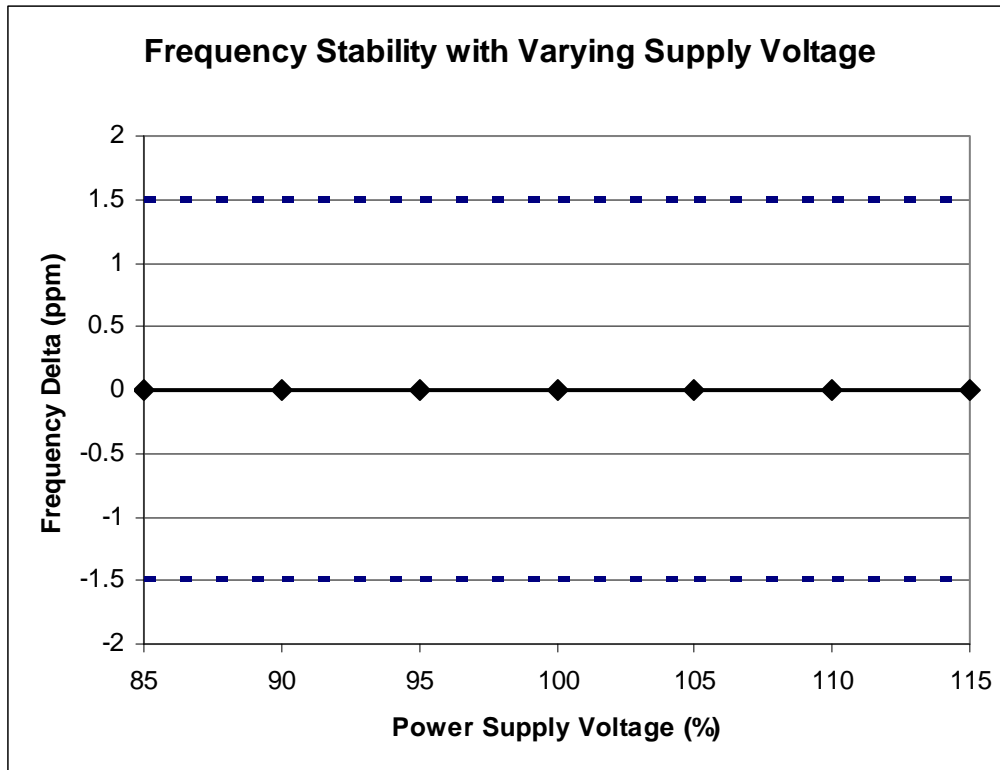



MOTOROLA

Cellular Networks

APPLICANT: MOTOROLA

FCC ID: IHET5GX1

Section 8 Test Equipment List

Item #	Motorola ID	Description	Model	Serial No.	Cal Date	Cal Due Date
1	118938	Pre-Amp	HP83006A	3950M00136	N/A	N/A
2	118937	Pre-Amp	HP83006A	3950M00135	N/A	N/A
3	505082	Antenna, Log Periodic	EMCO 3146	9303-3597	10/26/2006	5/21/2008
4	500301	Antenna, Biconnical	EMCO 3104C	8905-3974	10/26/2006	5/1/2008
5	502512	Antenna, Double Ridged Guide	EMCO 3115	2021	10/26/2006	5/21/2008
6	112019	Spectrum Analyzer	HP8593EM	3628A00164	4/3/2007	4/3/2008
7	508768	Power Meter	HP438A	3513U03967	3/29/2007	3/29/2008
8	116232	Power Sensor	HP8481A	2702A61832	3/30/2007	3/30/2008
9	509002	Signal Generator	HP83712A	3429A00422	3/27/2006	4/2/2008
10	N/A	Cable, Heliax 1/2" - 100 feet	Andrew	N/A	N/A	N/A
11	N/A	Cable, Coax - 6 feet	Microcoax	N/A	N/A	N/A
12	N/A	Cable, Coax - 6 feet	Microcoax	N/A	N/A	N/A
13	N/A	Cable, Coax - 6 feet	Microcoax	N/A	N/A	N/A
14	N/A	Cable, Reel - 20 feet	Emco	N/A	N/A	N/A
15	123503	Spectrum Analyzer	E4440A	MY4430375 6	4/19/2007	4/19/2008
16	N/A	Attenuator, 20dB	Wienschel	N/A	N/A	N/A
17	N/A	Low Pass Filter	Teledyne	N/A	N/A	N/A