

# DESCRIPTIVE INFORMATION

## FCC FILING FOR SC4812T Lite 1X/EVDO @ 1.9 GHz CDMA BTS

The Information in this exhibit is in accordance with the FCC Rules and Regulations, Vol. II, Part 2, Subpart J. Sections 2.1033 through 2.1055 are addressed.

Section 2.1033 (a) **Name of Applicant and Manufacturer:** MOTOROLA

Section 2. 1033 (b) **Identification of Equipment:** IHET6FE1

Section 2. 1033 (c) **Quantity Production:** Quantity Production is planned.

Section 2. 1033 (d) **Technical Description**

This Transmitter is intended for use in the Public Cellular Radio Telecommunications Service and is designed in compliance with the FCC Rules and Regulations Title 47, Part 24. This transmitter is capable of spread spectrum (CDMA) operation, and allows up to 128 Walsh codes to support Pilot, Sync, Paging, Supplemental, and Traffic channels.

(1) **Types of Emissions**

This equipment will be capable of operation using wide band spread spectrum techniques employing Direct Sequence Code Division Multiple Access (DS-SS) digital communication techniques.

For this transmitter, the emission designator is 1M30F9W (per FCC Part 2.201, subpart C).

(2) **Frequency Range**

This transmitter operates within the 1931.25-1988.75 MHz Band for 1X/EVDO operation (per FCC Part 24). This base station will support CDMA operations on channel numbers 25 through 1175 inclusive for 1X/EVDO operation.

(3) **Range of Operating Power**

The rated maximum average power out of the SC4812T Lite 1X @ 1.9 GHz CDMA BTS is 40 W (46.00 dBm) per RF carrier. However, in CDMA the actual power output is based on the number of traffic channels in operation. The minimum power occurs when only a pilot signal is present. The maximum power occurs when a pilot along with synchronization, paging, and traffic channels are present.

(3) **Range of Operating Power (cont.)**

For a typical system setup, the theoretical difference between minimum power and maximum power is about 8 dB. The output power is variable in 0.25 dB steps. In addition, the dynamics of a CDMA system allow for what is called “cell breathing”. This allows an operator to vary the range of a cell by controlling the power of the pilot signal.

(4) **Maximum Power Limits**

The peak output power of a base station transmitter may not exceed 100 Watts as defined in Part 24.232.

(5) **Applied voltages and currents into the final transistor elements of the transmitter output:**

The applied voltages and currents into each of the Linear Power Amplifier’s final transistor elements are as follows:

Drain	27.0 VDC
Drain Current	1.0 AMPS
Gate Voltage	4 VDC

(6) **Function of Each Active Device**

Refer to the Operational Description Exhibit.

(7) **Complete Circuit Diagrams**

Refer to the Schematics Exhibit.

(8) **Instruction/Installation Manual**

Refer to the Installation Manual Exhibit.

(9) **Tune-Up/Optimization Procedure**

Refer to the Users Manual Exhibit.

**(10) Means for Frequency Stabilization**

Refer to the Test Report Exhibit.

The Clock Synchronization Module (CSM2) provides clock and time signals for an SC4812T Lite 1X/EVDO @ 1.9 GHz CDMA BTS. In addition, it provides the primary, source a 3 MHz clock, for the transmit synthesizer in the Broadband Transceiver. The CSM2 relies on a GPS receiver, either riding piggyback onto the CSM2 card or remotely located in an integrated package with the GPS antenna as the primary time reference for the ovenized oscillator. Two types of redundancy are provided:

- 1) Dual CSM2 cards provide redundancy in case of primary CSM2 failure.
- 2) Redundancy is also provided by either a High Stability Oscillator (HSO) or a Low Frequency Reference (LFR), such as a Loran C receiver, residing in a separate slot. The HSO is provided in case of GPS system failure.

The CSM2 uses the received signals as a reference to provide the required clock for the site. The CSM2 distributes CDMA time, a 19.6608 MHz clock, and a two second synchronization pulse every even second of universal time to the CDMA Clock Distribution (CCD) Cards.

The CSM2 is also responsible for configuration and management of the GPS and LFR systems. CSM2 software determines on a site basis what the GPS and LFR configurations should be. For future Commercial CDMA systems, GPS and LFR configuration information could optionally be downloaded to the CSM2 from the GLI2. The CSM2 is managed by the GLI2.

The High Stability Oscillator (HSO) or Low Frequency Time Reference (LFR) is used to provide a stable time reference in case of a GPS system failure or shutdown. The output of the LFR card is routed to the CSM2 cards, which derive the appropriate time references for the RF section. The current LFR is a LoranC receiver. In areas where LoranC is unavailable, the HSO may be used.

(11) **Means for Attenuation of Spurious Emissions**

Refer to the Test Report Exhibit.

Band pass filters are employed in the transmit RF circuit to attenuate far out spurious emissions. The filter used here is of an air dielectric cavity resonator type.

In addition to the digital filters described below, the baseband also employs a discrete anti-alias filter that attenuates signals greater than 2MHz. Out of band emissions are also attenuated by ceramic filters in the transmit RF lineup.

In addition, suppression of spurious radiation is obtained by proper shielding techniques.

**Means for Limiting Modulation**


Refer to the Test Report Exhibit.

In a CDMA system, the input signal (voice for example) is sampled and coded in a vocoder. This signal is then spread to approximately 1.25 MHz by a pseudo-random spreading code. This spreading code sets the bandwidth of the spread-spectrum signal. If more than one signal is in operation (i.e. more than one voice channel), then the two signals are simply layered one atop the other within the 1.25 MHz band. So, to some extent, the bandwidth of the transmitted signal is limited by the chip rate of the PN spreading code.

Primary limiting of the CDMA signal bandwidth is accomplished by the use of a programmable digital Finite Impulse Response (FIR) filters in the BBX1X. There are two such filters, the short filter (33 tap) and the long filter (43 tap), both of which operate at 2x the CDMA chip rate. Following the FIR filters are two half band filters which each double the sample rate to produce an 8x output rate. The digital filtering exceeds the requirements of the 48 tap CDMA specification. Output I and Q data streams from the filters are guaranteed to be 45 dBc below the carrier at 750 kHz offset. After conversion to analog, further filtering of the signal in order to prevent aliasing and further reduce emissions is accomplished with 5-pole analog filters.

A more detailed description of the typical FIR filter response is given in the following graph.

The baseband filters have a linear phase. In addition, they have a frequency response  $S(f)$  that satisfies the limits shown in the figure below.

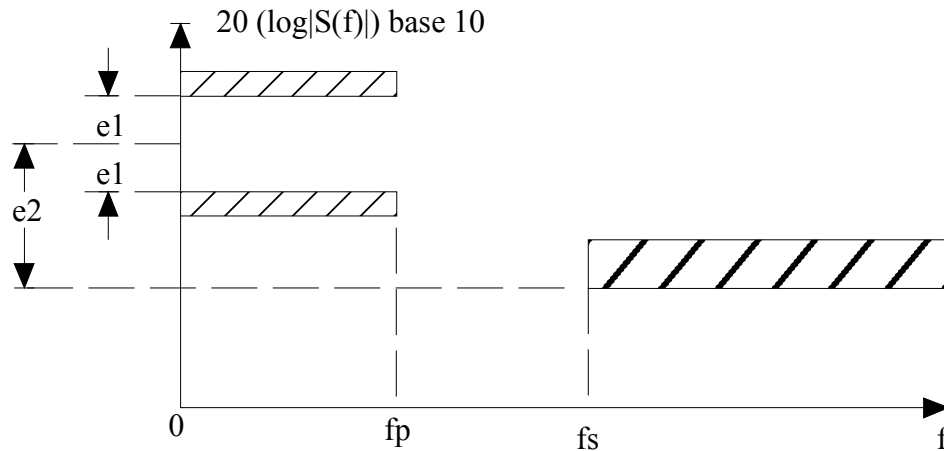

### BASEBAND FILTERS FREQUENCY RESPONSE LIMITS

The normalized frequency response of either filter shall be contained within plus or minus error ( $e_1$ ) in the passband and shall be less than or equal to error ( $e_2$ ) in the stop band ( $f > f_s$ ). The numerical values for the parameters are:

Short filter,  $e_1=1.5\text{dB}$ ,  $e_2=-8\text{dB}$ ,  $f_p=590\text{kHz}$ , and  $f_s=740\text{kHz}$

Long filter,  $e_1=1.5\text{dB}$ ,  $e_2=55\text{dB}$  from  $705\text{kHz}$  to  $740\text{kHz}$  and  $60\text{dB}$  at  $740\text{kHz}$ .

### Means for Limiting Power

The power output will be controlled by the Multi-Channel CDMA (MCC) card and the Base Band Transceiver (BBX-1X). The Base Band Transceiver card (BBX-1X) has an automatic gain control around the transmitter lineup to maintain an output power that is within  $\pm 1\text{dB}$  of the input power plus required gain on the BBX-1X. In addition, the baseband filtering system is implemented in a manner that precludes digital wrap around. That is, the filters and other compensation blocks saturate rather than roll over. Thus, large power swings are not presented to the DACs or, subsequently, to the power amplifiers. Naturally occurring peaks are also limited with the digital limiter as described above.

### (12) Description of Digital Modulation Techniques

This system supports and conforms to the modulation characteristics for voice and data as defined by IS95 A and B. It also supports and conforms to the modulation characteristics of IS2000 for spreading rate 1, rate sets 3 and 4 and user data rates up to  $153.6\text{ kbps}$ . For clarity, the following table shows all supported data rates and modulation characteristics supported by the system.

Forward Radio Configuration	Rates
RC1	1200, 2400, 4800 and 9600 bps data; R=1/2; BPSK modulation Rate Set 1
RC2	1800, 3600, 7200 and 14400 bps data; R=1/2; BPSK modulation Rate Set 2
RC3	1500, 2700, 4800, 9600, 19200, 38400, 76800 and 153600 bps data; R=1/4; QPSK modulation Supported in 1X mode only

### Forward Radio Configurations

Modulation of individual channels is performed digitally, at baseband and in conformance with the modulation characteristics defined by the standards. Once modulated, the amplitude of each channel is set and Walsh code spreading is applied. At this point, all channels assigned to a particular carrier are summed together with the pilot, sync and paging channels, limited to reduce the peak to average power, and then quadrature spread. The spread, baseband carrier is then digitally filtered and applied to an RF carrier. Each RF carrier is then amplified, combined with other carriers and then transmit out the base station antenna.

#### Section 2.925 (f) **Equipment Identification**

A drawing of the equipment identification nameplate appears in the ID Label/Location Info Exhibit.

#### Section 2.925 **Photographs**

The photographs showing external construction are in the External Photos Exhibit. The photographs showing internal construction are in the Internal Photos Exhibit.

#### Section 2.925 **Description of Various BTS Configurations**

The Frame contains one Small CDMA Channel Processing (S-CCP) shelf, capable of supporting up to 4 MCC-1X/ 2 MCC-DO cards. The MCC provides signal processing functions necessary to implement various channel functions specified in the CDMA Common Air Interface specification. Channel types include sync channels, paging channels, access channels, and traffic channels. The pilot Channel is implemented on the BBX. The MCC-1X converts between CDMA STRAU traffic and control format and CDMA baseband format. RX inputs from the BBX to the MCC-1X consist of I and Q signals from the main & diversity receive antennas. Each of the 7 BBX cards has its own common connection to all MCC-1X cards. A single TX output per MCC per sector is routed to the proper BBX. The S-CCP shelf

supports up to 2 dedicated CDMA carriers at 1 to 3 sectors. The S-CCP also contains control, clock, and alarm functions as required.

The MCC-DO (Multi-Channel CDMA Data Only) card is a MODEM (Modulator/Demodulator) card designed for the HRPD (High Rate Packet Data) system. By mounting MCC-DO cards into a base station for the 1x system (BTS: Base Station Transceiver System), 1xEV-DO services can be provided. 1X-EVDO channel types include synch channels, paging channels, access channels, and traffic channels. The MCC converts between CDMA STRAU traffic and control format CDMA baseband format.

A fully loaded Frame supports one complete S-CCP shelf. Up to two (2) CDMA Carriers for 3 sectors. Again, the frame is configurable in an omni or three-sector arrangement, with a transmit diversity (one carrier only) option being available in the future.

### Section 2.983 **Use with Various Power Supplies**

The BTS can also accommodate a DC input voltage of -48VDC (-40 to -60 VDC is acceptable) or a 27 VDC power source. . Polarity changes are accommodated in the power distribution area by feeding straight through or crossing over the primary input voltage. Circuit breakers are provided for each feed to the C-CCP shelf in the BTS. Additionally, circuit breakers are provided for fans and other components requiring direct primary input voltage.

Three Power Supply Cards installed in the C-CCP Shelf convert the input DC voltage to the necessary voltages required to power the cards in the shelf.

The power supply cards are in a N+1 redundant, load sharing configuration. This means all supplies are on line at all times. Two supplies have the capacity to power an entire shelf. With this scheme, one supply is not designated as primary or redundant, all are on line and circuitry between the supplies assures load sharing equality to within approximately 15%. Each supply has an LED to alarm a detected failure.

Section 2.987(d) Measurements Required:

**Modulation Characteristics**

Refer to the Test Report Exhibit.

Waveform Quality ( $\rho$ )

DEFINITION

Transmit waveform quality is the normalized correlated power between the actual waveform and the ideal waveform. The range of values for the transmit waveform quality is from 1.0, a perfect CDMA waveform, to 0.0, a non-CDMA signal. As an example, a base station with a -0.4 dB degradation in its transmit waveform would have a quality ( $\rho$ ) of  $10^{(-0.4/10)} = 0.912$ .

MINIMUM STANDARD

The minimum waveform quality figure for a spread-spectrum CDMA signal is -0.4 dB or 0.912 and for a spread spectrum EVDO CDMA signal is -0.13 dB or 0.970 as measured with a Rho meter.

METHOD OF MEASUREMENT

Set the pilot level to 20% of the CDMA Avg. power, and transmit the pilot signal only. Connect the Rho meter directly to the transmit port. On the CDMA Rho Meter, disable the RF generator and set the tuning mode to manual. Enter the base station's RF transmit frequency and set the input attenuation to hold. Set the input attenuation to 20 dB. Now, set the DSP Analyzer test mode to continuous and chose the Rho measurement as the measurement type. Set the channel to forward and choose amplitude middle as the trigger qualifier. Set the gain to 0 dB. Set the reference frequency to 19.6608 MHz. Select internal to lock-on to the CDMA time base reference. Read the measured value for Rho on the Rho meter.



Section 2.1047 Measurement Required: **Occupied Bandwidth**

Refer to the Test Report Exhibit.

DEFINITION

The measured spectral width of an emission. The measurement determines occupied bandwidth as the difference between upper and lower frequencies where 0.5% of the emission power is above the upper frequency and 0.5% of the emission power is below the lower frequency at rated power, with Pilot, Page, Sync, and Traffic Channel modulation.

Data to show the bandwidth occupied by this transmitter and output power is presented in the form of Channel Power Measurement plots from a spectrum analyzer. The Channel Power Measurement divides the Channel Power Bandwidth into increments (defined by the Resolution Bandwidth Setting selected), then sums the energy contained in each of those increments to provide an integrated measurement of the power in the Channel Power Bandwidth.

METHOD OF MEASUREMENT

Connect a spectrum analyzer to the BTS RF Transmit Port. Set the CDMA signal power to maximum. Setup the spectrum analyzer to make the following integrated Channel Power Measurements:

1. Channel Power Measurement of the CDMA Carrier Centered at 1931.25 MHz (Ch. 25) for 1X/ EVDO.

Channel Power Bandwidth: 1.30 MHz

Resolution Bandwidth: 30 KHz

2. Channel Power Measurement of the CDMA Carrier Centered at 1988.75 MHz (Ch. 1175) for 1X/EVDO.

Channel Power Bandwidth: 1.30 MHz

Resolution Bandwidth: 30 KHz

Record the Channel Power Measurements.

Repeat the procedure with the CDMA signal power set to Minimum level.

Section 2.1051 Measurement Required: **Spurious & Harmonic Emissions at the Antenna Terminals**

Refer to the Test Report Exhibit.

DEFINITION

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies that are outside the authorized bandwidth of the transmitter at rated power, with Pilot, Page, Sync, and Traffic Channel modulation. Reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

MINIMUM STANDARD

Per CFR 47 Part 24 the minimum standards for Transmit Port Conducted Spurious Emissions are as follows:

Section 22.917 (a) Emission Limits

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43+10 \log (P)$  dB.

METHOD OF MEASUREMENT

Connect a spectrum analyzer to the BTS RF Transmit Port. Measure the power level at the carrier frequency. Now, sweep the spectrum analyzer over a frequency range from 1MHz to tenth harmonic of the carrier frequency, recording all spurious emissions.

Section 2.1053 Measurement Required: **Field Strength of Spurious & Harmonic Radiation**

Refer to the Test Report Exhibit.

DEFINITION

Radiated spurious and harmonic emissions are emissions from the equipment when loaded into a non-radiating load on a frequency or frequencies that are outside an occupied band sufficient to assure transmission of information with required quality for the class of communications desired at rated power, with Pilot, Page, Sync, and Traffic Channel modulation. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

MINIMUM STANDARD

The magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the alignment procedure, shall not be less than  $43 + 10 \cdot \log$  (mean output power in Watts) dB below the mean power output. Necessary measurements were made at Motorola Inc., located at 1475 W Shure Dr, Arlington Heights, IL 60004 or at the radiation UL International Lab test facility located at 333 Pfingsten Road., Northbrook, IL 60062-2096

INSTALLATION OF EQUIPMENT

The equipment under test is placed on a turntable, connected to a dummy RF load, and placed in normal operation. A receiving antenna located 3 meters from the turntable picks up any signal radiated from the transmitter and its operating accessories. The antenna is adjustable in height from 1 to 4 meters and can be horizontally or vertically polarized.

METHOD OF MEASUREMENT

The equipment is adjusted to obtain peak readings of received signals wherever they occur in the spectrum by:

1. Rotating the transmitter under test.
2. Adjusting the antenna height.

The testing procedure is repeated for both horizontal and vertical polarization of the receiving antenna. Relative signal strength is indicated on meters built into the

receiver. To obtain an actual radiated signal strength, the meter reading is adjusted to correct for all affecting factors, such as antenna gain, RF gain, and cable loss. A table of correction factors vs. frequency is then used to convert a signal level measured at the receiver to the value that would be measured at the device (assuming an isotropic radiator).

Section 2.1055 Measurement Required: **Frequency Stability**

Refer to the Test Report Exhibit.

DEFINITION

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

MINIMUM STANDARD

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block (per CFR47 Part 24.235)

METHOD OF MEASUREMENT

Frequency measurements shall be made at the extremes of the temperature range -30 to 50 degrees Celsius and at intervals of not more than 10 degrees throughout the range. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.